

# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

# INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C CLASS II PC REPORT

	OF
Product Name:	Otoscope
Brand Name:	QOCA
Model No.:	Q-tube-O
Model Difference:	N/A
FCC ID:	WS2-WG7831DELF
Report No.:	E2/2016/30005
Issue Date:	Mar. 30, 2016
FCC Rule Part:	§15.247, Cat: DTS
Prepared for:	Quanta Computer Inc. 211 Wen Hwa 2nd Rd., Kueishan, Taoyuan 33377,Taiwan
Prepared by:	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333
Testing Laboratory 0513	<b>Note:</b> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



# VERIFICATION OF COMPLIANCE

Applicant:	Quanta Computer Inc. 211 Wen Hwa 2nd Rd., Kueishan, Taoyuan 33377,Taiwan
Product Name:	Otoscope
Brand Name:	QOCA
Model No.:	Q-tube-O
Model Difference:	N/A
FCC ID:	WS2-WG7831DELF
Report Number:	E2/2016/30005
Date of test:	Mar. 01, 2016 ~ Mar. 25, 2015
Date of EUT Received:	Mar. 01, 2016

# We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Mar. 30, 2016
	Jazz Huang / Asst. Supervisor		
Prepared By:	Allen Isai	Date:	Mar. 30, 2016
Approved By:	Allen Tsai / Engineer Jim Chang Jim Chang / Asst. Manager	Date:	Mar. 30, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# **Revision History**

Report Number	Revision	Description	Issue Date
E2/2016/30005	Rev.00	Initial creation of document	Mar. 30, 2016

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



# **Table of Contents**

1	GENERAL INFORMATION	6
	1.1 Product description	
	1.2 Product Feature of Equipment Under Test	7
	1.3 Test Methodology of Applied Standards	8
	1.4 Test Facility	
	1.5 Special Accessories	
	1.6 Equipment Modifications	8
2	SYSTEM TEST CONFIGURATION	9
	2.1 EUT Configuration	9
	2.2 EUT Exercise	9
	2.3 Test Procedure	9
	2.4 Measurement Results Explanation Example	
	2.5 Configuration of Tested System	10
3	SUMMARY OF TEST RESULTS	11
4	DESCRIPTION OF TEST MODES	
	4.1 Operated in 2400 ~ 2483.5MHz Band	12
	4.2 The Worst Test Modes and Channel Details	12
5	MEASUREMENT UNCERTAINTY	14
6	PEAK OUTPUT POWER MEASUREMENT	
	6.1 Standard Applicable	15
	6.2 Measurement Equipment Used	15
	6.3 Test Set-up	15
	6.4 Measurement Procedure	16
	6.5 Measurement Result	16
7	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	19
	7.1 Standard Applicable	19
	7.2 Measurement Equipment Used:	20
	7.3 Test SET-UP	21
	7.4 Measurement Procedure	22
	7.5 Field Strength Calculation	23
	7.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz	23
	7.7 Measurement Result	23
	7.8 ANTENNA REQUIREMENT	62



7.9 Standard Applicable	62
7.10 Antenna Connected Construction	62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



#### **GENERAL INFORMATION** 1

# **1.1 Product description**

General:

Product Name:	Otoscope		
Brand Name:	QOCA		
Model No.:	Q-tube-O		
Model Difference:	N/A		
Software version:	N/A		
Hardware version:	Rev.C		
Model No. for BT/WLAN Module:	WG7831DELF		
Module FCC ID:	WS2-WG7831DELF		
Scope:	The test report covers the radiated emissions requirements of the standards referenced in the report to allow system level approval of the module in this specific host.		
Class II Permissive change:	Wireless module(WG7831DELF) is installed in a host of port- able category.		
	3.7Vdc from battery, 5Vdc from adapter.		
	Battery: Model No.:Q6T Supplier: Getac		
Power Supply:	Adapter: Model No.: MIL0502200U Supplier: TPT		
	Charging Dock: Model No.:N/A Supplier: N/A		

# WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power	Modulation Technology
11b/g	2412-2462	11	b: 14.15dBm g: 14.09dBm	DSSS, OFDM
11n	HT20 2412-2462	11	HT20:14.58dBm	OFDM
11n	HT40 2422-2452	11	HT40:13.91dBm	OFDM
Antenna Designation: PIFA Antenna Part No.: DQ6EP000200 (680-INNEP0002-A) Supplier: Inno Wave Technology Co.,Ltd. Gain: 2.35dBi			,	
			PSK, DBPSK for DSSS 16QAM, QPSK, BPSK for	OFDM
Transitio	n Rate:	802.11 g:	1/2/5.5/11 Mbps 6/9/12/18/24/36/48/54 M _20MHz: 6.5 – 72.2Mbps	bps



# **1.2 Product Feature of Equipment Under Test**

The equipment under Test (Hereafter Called: EUT) is supporting Wi-Fi 802.11b/g/n and Bluetooth LE features, and below is details of information.

Product Feature			
Product Name: Otoscope			
Brand Name:	QOCA		
Model No.: Q-tube-O			
Model Difference:	N/A		
FCC ID:	WS2-WG7831DELF		
Wi-Fi Specification	802.11b/g/n		
Bluetooth Version	V4.0 BLE		

Note: The above EUT information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance

ANSI C63.10:2013

Note:

- All test items have been performed and record as per the above standards. 1.
- 2. The composite system is compliance with FCC Subpart B is authorized under a DoC procedure.

### **1.4 Test Facility**

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

(TAF code 0513)

FCC Registration Numbers are: 628985

#### **1.5 Special Accessories**

There are no special accessories used while test was conducted.

#### **1.6 Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



#### SYSTEM TEST CONFIGURATION 2

# 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

# 2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

# 2.3 Test Procedure

# 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

# 2.4 Measurement Results Explanation Example

#### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level. Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss 1dB and 10dB attenuator.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Ref 另有說明,此報告結果僅對測試之樣品負責、同時此樣品僅保留的玩。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms\_and\_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# 2.5 Configuration of Tested System


# Fig. 2-1 Radiated & Conducted (Antenna Port) Emission



#### **Table 2-1 Equipment Used in Tested System**

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	DRTU	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L440	R9-007LAZ	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





#### SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.247(b) (3)	Peak Output Power	Compliant
§15.247(d)	Radiated Band edge and Spurious Emission	Compliant
§15.203 §15.247(b)	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



# DESCRIPTION OF TEST MODES

# 4.1 Operated in 2400 ~ 2483.5MHz Band

11 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

# 4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case.

# **RADIATED EMISSION TEST:**

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)			
802.11g	1 to 11	1,6,11	OFDM	6			

	RADIATED EMISSION TEST (ABOVE 1 GHz)							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)				
802.11b	1 to 11	1, 6, 11	DSSS	1				
802.11g	1 to 11	1, 6, 11	OFDM	6				
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 0				

#### Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




#### ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE	TESTED	MODULATION	DATA RATE			
INIODE	CHANNEL	CHANNEL	WODULATION	(Mbps)			
802.11b	1 to 11	1, 6, 11	DSSS	1			
802.11g	1 to 11	1, 6, 11	OFDM	6			
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 0			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.





#### **MEASUREMENT UNCERTAINTY** 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB			
Macouromont uncortainty	180MHz -417MHz: +/- 3.19dB			
Measurement uncertainty (Polarization : <b>Vertical</b> )	0.417GHz-1GHz: +/- 3.19dB			
	1GHz - 18GHz: +/- 4.04dB			
	18GHz - 40GHz: +/- 4.04dB			

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



#### PEAK OUTPUT POWER MEASUREMENT 6

# 6.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.


In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

### 6.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510568	04/14/2015	04/13/2016		
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016		
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016		
Power Sensor	Anritsu	MA2411B	1315049	06/23/2015	06/22/2016		
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/12/2015	12/11/2016		
DC Block	PASTERNACK	PE8210	RF29	12/12/2015	12/11/2016		
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/12/2015	12/11/2016		
Attenuator	WOKEN	218FS-10	RF23	12/12/2015	12/11/2016		
Temperature Cham- ber	TERCHY	MHK-120LK	1020582	06/23/2015	06/22/2016		

# 6.3 Test Set-up

Power Meter:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 6.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

### **Power Meter:**

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

### 6.5 Measurement Result

802.11	802.11b Main							
СН	Frequency (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	L	.imit		RESULT
1	2412	1	14.15	26.00	1 Watt =	30.00	dBm	PASS
6	2437	1	13.19	20.84	1 Watt =	30.00	dBm	PASS
11	2462	1	13.17	20.75	1 Watt =	30.00	dBm	PASS
802.1 <sup>-</sup>	1b Main							
СН	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)	Avg. Output Power (mW)	Limit		RESULT	
1	2412	1	12.19	16.56	1 Watt =	30.00	dBm	PASS
6	2437	1	11.38	13.74	1 Watt =	30.00	dBm	PASS
11	2462	1	11.29	13.46	1 Watt =	30.00	dBm	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



802.1 <sup>-</sup>	802.11g Main							
СН	Frequency (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	L	.imit		RESULT
1	2412	6	13.61	22.96	1 Watt =	30.00	dBm	PASS
6	2437	6	14.09	25.64	1 Watt =	30.00	dBm	PASS
11	2462	6	13.85	24.27	1 Watt =	30.00	dBm	PASS
802.11	1g Main	-			_			
СН	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)	Avg. Output Power (mW)	Limit		RESULT	
1	2412	6	11.84	15.28	1 Watt =	30.00	dBm	PASS
6	2437	6	11.79	15.10	1 Watt =	30.00	dBm	PASS
11	2462	6	11.77	15.03	1 Watt =	30.00	dBm	PASS

802.11	802.11n_HT20M Main							
СН	Frequency (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	L	.imit		RESULT
1	2412	MCS0	14.2	26.30	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	14.58	28.71	1 Watt =	30.00	dBm	PASS
11	2462	MCS0	14.42	27.67	1 Watt =	30.00	dBm	PASS
802.11	1n_HT20M Main							
СН	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)	Avg. Output Power (mW)	Limit		RESULT	
1	2412	MCS0	11.89	15.45	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	11.68	14.72	1 Watt =	30.00	dBm	PASS
11	2462	MCS0	11.54	14.26	1 Watt =	30.00	dBm	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有说明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



802.1	802.11n_HT40M Main							
СН	Frequency (MHz)	Data Rate	Peak Output Power (dBm)	Peak Output Power (mW)	L	.imit		RESULT
3	2422	MCS0	10.68	11.69	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	13.91	24.60	1 Watt =	30.00	dBm	PASS
9	2452	MCS0	11.27	13.40	1 Watt =	30.00	dBm	PASS
802.1 <sup>-</sup>	1n_HT40M Mair	1						
СН	Frequency (MHz)	Data Rate	Avg. Output Power (dBm)	Avg. Output Power (mW)	Limit		RESULT	
3	2422	MCS0	8.03	6.35	1 Watt =	30.00	dBm	PASS
6	2437	MCS0	11.75	14.96	1 Watt =	30.00	dBm	PASS
9	2452	MCS0	8.81	7.60	1 Watt =	30.00	dBm	PASS

\* Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.



#### RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT 7

# 7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### Note:

- 1. The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (dBµV/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



### 7.2 Measurement Equipment Used:


966 Chamber									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	Agilent	N9038A	MY52260216	11/16/2016	11/15/2016				
Spectrum Analyzer	Keysight	N9010A	MY51440113	06/10/2015	06/09/2016				
Loop Antenna	ETS-Lindgren	6502	143303	12/23/2015	12/22/2016				
Broadband Antenna	SCHWAZBECK	VULB9168	9168-617	10/15/2015	10/14/2016				
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1341	05/21/2015	15/20/2016				
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170-185	07/24/2015	07/23/2016				
Pre Amplifier	EMC Instruments	EMC9135	980234	08/13/2015	08/12/2016				
Pre Amplifier	EMC Instruments	EMC12630SE	980271	08/13/2015	08/12/2016				
Pre Amplifier	<b>EMC</b> Instruments	EMC184045B	980135	10/27/2015	10/26/2016				
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	08/13/2015	08/12/2016				
Coaxial Cable	Huber+Suhner	RG 214/U	W22.01	08/13/2015	08/12/2016				
Coaxial Cable	EMC Instruments	EMC106-SM-SM	150702	08/13/2015	08/12/2016				
		-2300							
Coaxial Cable	EMC Instruments	EMC106-SM-SM	150703	08/13/2015	08/12/2016				
		-7200							
Coaxial Cable	EMC Instruments	EMC106-SM-SM	150701	08/13/2015	08/12/2016				
		-2300							
Coaxial Cable	EMC Instruments	EMC106-SM-SM	150704	08/13/2015	08/12/2016				
A 11 1		-9100	5507	40/40/0045	40/44/0040				
Attenuator	WOKEN	218FS-10	RF27	12/12/2015	12/11/2016				
Site NSA	SGS	966 Chamber D	SAC-D	07/09/2015	07/08/2016				
Site VSWR	SGS	966 Chamber D	SAC-D	07/09/2015	07/08/2016				
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.				
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.				
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.				
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.				

NOTE: N.C.R refers to Not Calibrated Required.




# 7.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

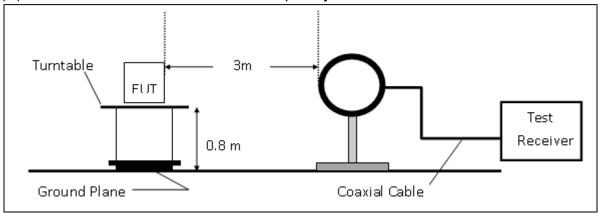

# (B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

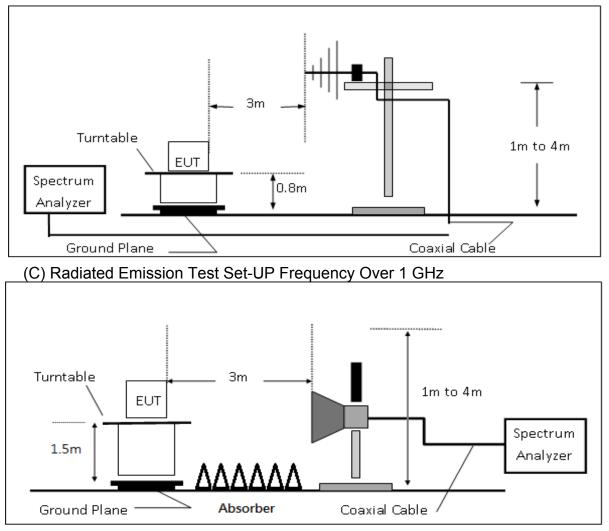

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



# 7.4 Measurement Procedure

- 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



# 7.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

### FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB $\mu$ V/m) = SPA. Reading level(dB $\mu$ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

#### Note :

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

# 7.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

# 7.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



#### Radiated Band Edge Measurement Result (802.11b)

Operation Me Fundamenta Operation Ba EUT Pol. :	I Frequency	802.11b /: 2412 Mł BE CH L H	Hz Temp./ ∟ow TestEng	np. / Humi. : st Engineer :		2016/3/13 22.7deg_C/57RH Pony Vertical	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2388.60	S	Peak	45.28	5.76	51.04	74	-22.96
2388.60	S	Average	30.30	5.76	36.06	54	-17.94
2390.00	E	Peak	43.28	5.78	49.05	74	-24.95
2390.00	Е	Average	30.70	5.78	36.48	54	-17.52
Fundamenta	Operation Mode :802.11bFundamental Frequency :2412 MHzOperation Band :BE CH LowEUT Pol. :H		Hz Temp./ ₋ow Test Eng	•		2016/3/13 22.7deg_C/57RH Pony Horizontal	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2385.96	S	Peak	45.82	5.72	51.55	74	-22.45
2385.96	S	Average	32.18	5.72	37.90	54	-16.10
2390.00	Е	Peak	43.92	5.78	49.70	74	-24.30
2390.00	Е	Average	31.38	5.78	37.16	54	-16.84



#### Report No.:E2/2016/30005 Page 25 of 62

Fundamenta	eration Mode : 802.11b damental Frequency : 2462 MHz eration Band : BE CH Hig F Pol. : H		Hz Temp. / H High Test Engi	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :		2016/3/13 22.7deg_C/57RH Pony Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
N 41 I_		Mode	Reading Level	-10	FS	@3m	-10
MHz	F/H/E/S	PK/QP/AV	d BµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	43.49	5.88	49.37	74	-24.63
2483.50	Е	Average	31.64	5.88	37.52	54	-16.48
Operation Mode :802.11bFundamental Frequency :2462 MHzOperation Band :BE CH HighEUT Pol. :H			Test Date : Temp. / Humi. : n Test Engineer : Measurement Antenna Pol. :		2016/3/13 22.7deg_C/57RH Pony Horizontal		
Fundamenta Operation B	al Frequency	y: 2462 M BE CH	Hz Temp. / H High Test Engi	lumi. : neer :	na Pol. :	22.7deg_C Pony	C/57RH
Fundamenta Operation B	al Frequency	y: 2462 M BE CH	Hz Temp. / H High Test Engi Measurer Spectum	lumi. : neer :	na Pol. : Actual FS	22.7deg_C Pony	C/57RH Margin
Fundamenta Operation B EUT Pol. :	al Frequency and :	y : 2462 M BE CH H Detector	Hz Temp. / F High Test Engi Measurer	łumi. : neer : nent Anten	Actual	22.7deg_C Pony Horizontal Limit	
Fundamenta Operation B EUT Pol. : Freq.	al Frequency and : Note	y : 2462 M BE CH H Detector Mode	Hz Temp. / F High Test Engi Measurer Spectum Reading Level	łumi. : neer : nent Anten Factor	Actual FS	22.7deg_C Pony Horizontal Limit @3m	Margin
Fundamenta Operation B EUT Pol. : Freq. MHz	al Frequency and : Note F/H/E/S	y : 2462 M BE CH H Detector Mode PK/QP/AV	Hz Temp. / Η High Test Engi Measurer Spectum Reading Level dBμV	łumi. : neer : nent Anten Factor dB	Actual FS dBµV/m	22.7deg_C Pony Horizontal Limit @3m dBµV/m	Margin dB
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50	al Frequency and : Note F/H/E/S E	y : 2462 M BE CH H Detector Mode PK/QP/AV Peak	Hz Temp. / H High Test Engi Measurer Spectum Reading Level dBµV 44.87	łumi. : neer : nent Anten Factor dB 5.88	Actual FS dBµV/m 50.75	22.7deg_C Pony Horizontal Limit @3m dBµV/m 74	Margin dB -23.25
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2483.50 2483.50	al Frequency and : Note <u>F/H/E/S</u> E E	y : 2462 M BE CH H Detector Mode PK/QP/AV Peak Average	Hz Temp. / H High Test Engi Measurer Spectum Reading Level dBµV 44.87 31.54	łumi. : neer : nent Anten Factor <u>dB</u> 5.88 5.88	Actual FS dBµV/m 50.75 37.42	22.7deg_C Pony Horizontal Limit @3m dBµV/m 74 54	Margin dB -23.25 -16.58



#### Radiated Band Edge Measurement Result (802.11g)

Fundamenta	ration Mode :802.11gTest Datedamental Frequency :2412 MHzTemp. / Hration Band :BE CH LowTest EngiPol. :HMeasuren		lumi. :	na Pol. :	2016/3/13 22.7deg_C/57RH Pony Vertical		
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Peak	59.22	5.78	64.99	74	-9.01
2390.00	Е	Average	35.53	5.78	41.31	54	-12.69
Operation Mode :802.11gFundamental Frequency :2412 MHzOperation Band :BE CH LowEUT Pol. :H			Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :			2016/3/13 22.7deg_C/57RH Pony Horizontal	
Fundamenta Operation B	al Frequenc	y: 2412 MH BE CH L	lz Temp. / ⊢ .ow Test Engi	lumi. : neer :	na Pol. :	22.7deg_C Pony	/57RH
Fundamenta Operation B EUT Pol. : Freq.	al Frequenc and : Note	y: 2412 MH BE CH L H Detector Mode	łz Temp. / ⊢ ow Test Engi Measurer Spectum Reading Level	lumi. : neer : nent Anten Factor	Actual FS	22.7deg_C Pony Horizontal Limit @3m	Margin
Fundamenta Operation B EUT Pol. : Freq. MHz	al Frequenc and : Note F/H/E/S	y : 2412 MH BE CH L H Detector Mode PK/QP/AV	łz Temp. / ⊢ ow Test Engi Measurer Spectum Reading Level dBµV	lumi. : neer : nent Anten Factor dB	Actual FS dBµV/m	22.7deg_C Pony Horizontal Limit @3m dBµV/m	Margin dB
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2389.80	al Frequenc and : Note <u>F/H/E/S</u> S	y : 2412 MH BE CH L H Detector Mode PK/QP/AV Peak	Iz Temp. / ⊢ ow Test Engi Measurer Spectum Reading Level dBμV 64.51	lumi.: neer: nent Anten Factor dB 5.77	Actual FS dBµV/m 70.28	22.7deg_C Pony Horizontal Limit @3m dBµV/m 74	Margin dB -3.72
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2389.80 2389.80	al Frequenc and : Note <u>F/H/E/S</u> S S	y : 2412 MH BE CH L H Detector Mode PK/QP/AV Peak Average	Iz Temp. / ⊢ ow Test Engi Measurer Spectum Reading Level dBµV 64.51 38.02	lumi. : neer : nent Anten Factor <u>dB</u> 5.77 5.77	Actual FS dBµV/m 70.28 43.79	22.7deg_C Pony Horizontal Limit @3m dBµV/m 74 54	Margin dB -3.72 -10.21
Fundamenta Operation B EUT Pol. : Freq. <u>MHz</u> 2389.80	al Frequenc and : Note <u>F/H/E/S</u> S	y : 2412 MH BE CH L H Detector Mode PK/QP/AV Peak	Iz Temp. / ⊢ ow Test Engi Measurer Spectum Reading Level dBμV 64.51	lumi.: neer: nent Anten Factor dB 5.77	Actual FS dBµV/m 70.28	22.7deg_C Pony Horizontal Limit @3m dBµV/m 74	Margin dB -3.72



2483.50

Е

Average

Fundamenta	Operation Mode :802.11gTest Date :Fundamental Frequency :2462 MHzTemp. / Humi. :Operation Band :BE CH HighTest Engineer :EUT Pol. :HMeasurement Antenna F			ina Pol. :	2016/3/13 22.7deg_0 Pony Vertical	C/57RH	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	10
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	Е	Peak	64.43	5.88	70.31	74	-3.69
2483.50	E	Average	36.71	5.88	42.59	54	-11.41
Operation M Fundamenta Operation B EUT Pol. :	g Test Date Hz Temp. / H High Test Eng Measure	lumi. :	ına Pol. :	2016/3/13 22.7deg_0 Pony Horizontal	C/57RH		
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	65.83	5.88	71.71	74	-2.29

38.29

5.88

44.17

54

-9.83



#### Radiated Band Edge Measurement Result (802.11\_HT20)

Operation Mode : Fundamental Frequency Operation Band : EUT Pol. :	requency: 2412 MHz Temp. / Humi. :		2016/3/13 22.7deg_C/57RH Pony Vertical			
Freq. Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00 E	Peak	61.18	5.78	66.96	74	-7.04
2390.00 E	Average	35.79	5.78	41.57	54	-12.43
Operation Mode : Fundamental Frequency Operation Band : EUT Pol. :	Fundamental Frequency :2412 MHzOperation Band :BE CH Low		e : lumi. : neer : nent Anten	na Pol. :	2016/3/13 22.7deg_C Pony Horizontal	/57RH
Freq. Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00 E	Peak	65.22	5.78	71.00	74	-3.00
2390.00 E	Average	39.91	5.78	45.69	54	-8.31



2483.70

S

Fundamenta	Deration Mode :802.11n20Test Date :ndamental Frequency :2462 MHzTemp. / Humi. :Deration Band :BE CH HighTest Engineer :JT Pol. :HMeasurement A		Humi. : jineer :	na Pol. :	2016/3/13 22.7deg_0 Pony Vertical	C/57RH	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	63.41	5.88	69.29	74	-4.71
2483.50	Е	Average	38.87	5.88	44.75	54	-9.25
Fundamenta	eration Mode : 802.11n20 Idamental Frequency : 2462 MHz eration Band : BE CH High T Pol. : H		IHz Temp. / I High Test Eng	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :		2016/3/13 22.7deg_C/57RH Pony Horizontal	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	65.97	5.88	71.86	74	-2.14
2483.50	E	Average	40.09	5.88	45.97	54	-8.03
		Average	40.09	5.00	45.57	54	-0.03
2483.70	S	Peak	66.77	5.88	72.65	54 74	-0.03

39.85

5.88

45.73

54

-8.27

Average



Operation M Fundamenta Operation B EUT Pol. :	al Frequency	802.11n y : 2422 MI BE CH I H	Hz Temp. / H Low Test Engi	lumi. :	na Pol. :	2016/3/13 22.7deg_C/57RH Pony Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
MHz	F/H/E/S	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
2384.40	S	Peak	64.96	5.70	70.66	74	-3.34
2384.40	S	Average	36.02	5.70	41.72	54	-12.28
2390.00	E	Peak	63.60	5.78	69.38	74	-4.62
2390.00	Е	Average	37.66	5.78	43.44	54	-10.56
	al Frequency		Hz Temp. / H	Test Date : Temp. / Humi. :		2016/3/13 22.7deg_C/57RH	
Operation B	and :	BE CH I	0		na Dal I	Pony	
EUT Pol. :		Н	Measurer	nent Anten	na Pol. :	Horizontal	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2389.08	S	Peak	66.79	5.76	72.55	74	-1.45
2389.08	S	Average	38.37	5.76	44.13	54	-9.87
2390.00	E	Peak	64.94	5.78	70.71	74	-3.29
2390.00	E	Average	38.49	5.78	44.27	54	-9.73




Operation M Fundamenta Operation B EUT Pol. :	al Frequency	BE CH High Test Engir		łumi. :		2016/3/13 22.7deg_C/57RH Pony Vertical	
Freq.	Note	Detector	Spectum	Factor	Actual	Limit	Margin
MHz	F/H/E/S	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	dB
2483.50	E	Peak	64.44	5.88	70.33	74	-3.67
2483.50	Е	Average	39.57	5.88	45.45	54	-8.55
2486.40	S	Peak	65.80	5.87	71.68	74	-2.32
2486.40	S	Average	38.49	5.87	44.36	54	-9.64
•			Hz Temp. / Humi. :			2016/3/13 22.7deg_C/57RH	
Operation B	and :	BE CH	0 0		<b>D</b> 1	Pony	
EUT Pol. :		Н	Measure	ment Anten	ina Pol. :	Horizontal	
Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Peak	66.68	5.88	72.56	74	-1.44
2483.50	Е	Average	40.29	5.88	46.17	54	-7.83
2487.30	S	Peak	67.50	5.87	73.37	74	-0.63
2487.30	S	Average	39.17	5.87	45.04	54	-8.96



#### **Below 1GHz Worst-Case Data:**

#### Radiated Spurious Emission Measurement Result (802.11 g)

Operation Mode :	802.11g	Test Date :	2016/3/14
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol.:	Н	Measurement Antenna Pol.:	Vertical

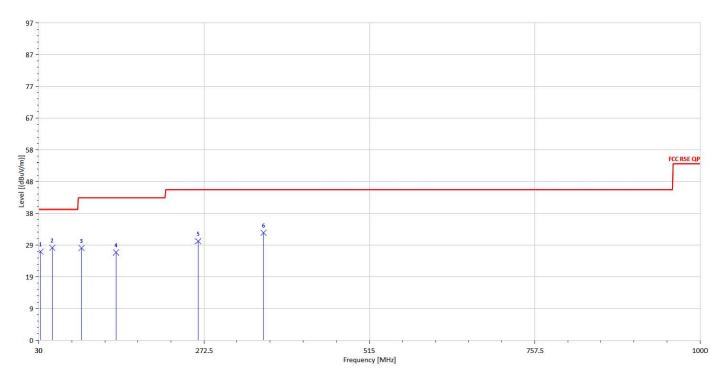


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	43.14	-8.22	34.92	40	-5.08
99.84	S	Peak	47.93	-17.77	30.16	43.5	-13.34
146.40	S	Peak	42.99	-16.45	26.54	43.5	-16.96
232.73	S	Peak	44.12	-15.99	28.13	46	-17.87
391.81	S	Peak	39.22	-10.01	29.21	46	-16.79
579.02	S	Peak	36.67	-6.38	30.29	46	-15.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	802.11g	Test Date :	2016/3/14
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

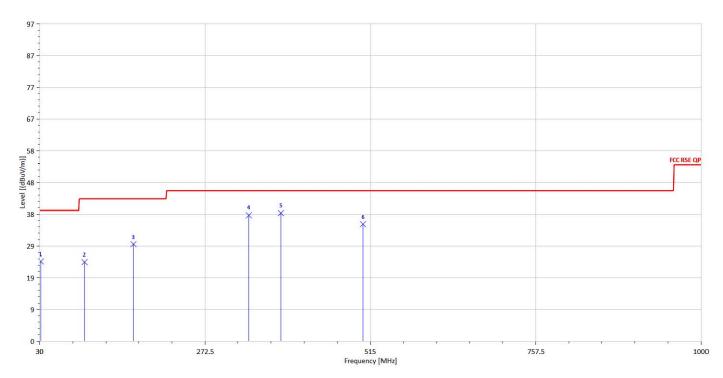

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	36.80	-8.22	28.58	40	-11.42
62.98	S	Peak	44.66	-22.56	22.10	40	-17.90
167.74	S	Peak	46.97	-18.06	28.92	43.5	-14.58
232.73	S	Peak	50.72	-15.99	34.73	46	-11.27
391.81	S	Peak	46.96	-10.01	36.94	46	-9.06
521.79	S	Peak	38.79	-7.26	31.53	46	-14.47




Operation Mode :	802.11g	Test Date :	2016/3/14
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

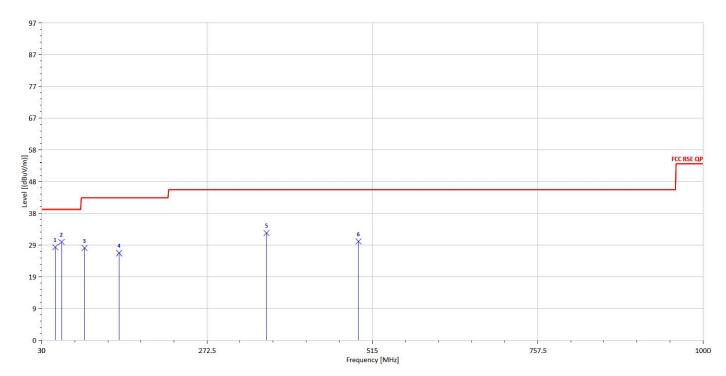

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
33.88	S	Peak	34.37	-9.27	25.10	40	-14.90
66.86	S	Peak	45.58	-22.18	23.40	40	-16.60
100.81	S	Peak	45.23	-17.64	27.59	43.5	-15.91
167.74	S	Peak	44.57	-18.06	26.52	43.5	-16.98
497.54	S	Peak	36.33	-7.72	28.62	46	-17.38
583.87	S	Peak	37.42	-5.98	31.44	46	-14.56





Operation Mode :	802.11g	Test Date :	2016/3/14
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

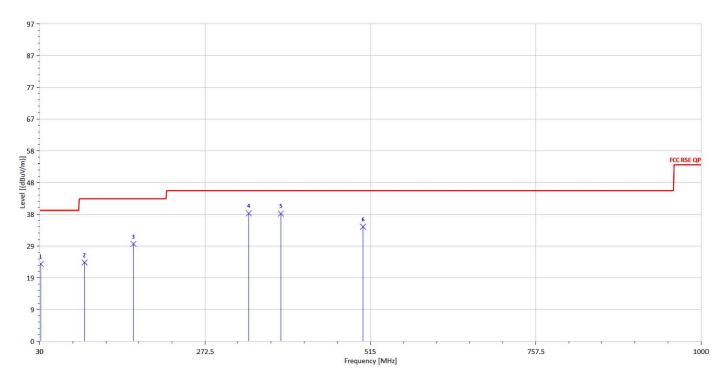

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	34.59	-8.22	26.37	40	-13.63
62.01	S	Peak	45.37	-22.71	22.66	40	-17.34
161.92	S	Peak	46.42	-17.71	28.71	43.5	-14.79
232.73	S	Peak	50.70	-15.99	34.71	46	-11.29
390.84	S	Peak	46.34	-10.07	36.27	46	-9.73
521.79	S	Peak	41.18	-7.26	33.92	46	-12.08







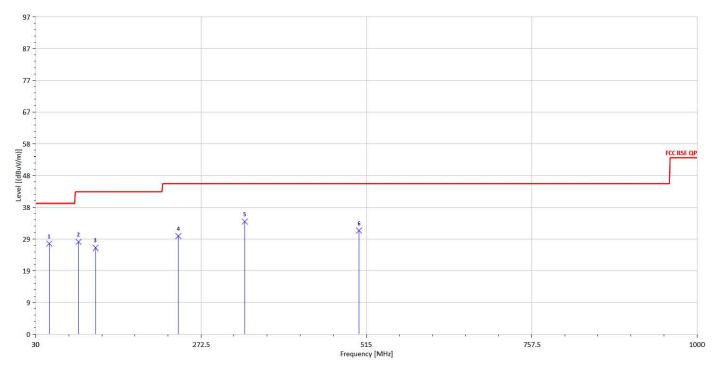

Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	40.03	-8.22	31.81	40	-8.19
93.05	S	Peak	46.48	-18.95	27.53	43.5	-15.97
166.77	S	Peak	44.28	-17.95	26.33	43.5	-17.17
240.49	S	Peak	41.44	-15.21	26.23	46	-19.77
399.57	S	Peak	38.79	-9.73	29.05	46	-16.95
502.39	S	Peak	36.70	-7.77	28.92	46	-17.08





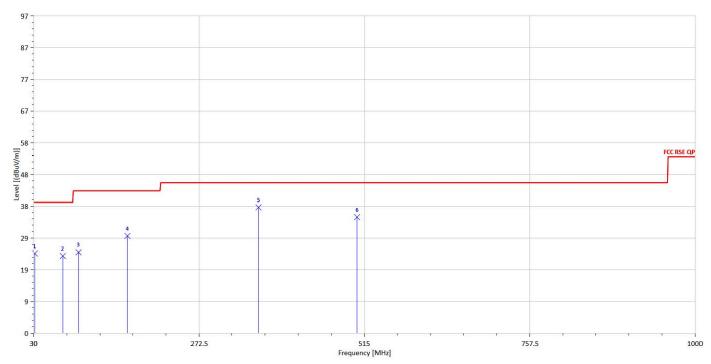


Freq.	Note	Detector Mode	Spectum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
32.91	S	Peak	35.32	-8.75	26.57	40	-13.43
62.01	S	Peak	44.71	-22.71	22.01	40	-17.99
99.84	S	Peak	43.84	-17.77	26.07	43.5	-17.43
120.21	S	Peak	40.52	-15.84	24.68	43.5	-18.82
305.48	S	Peak	46.64	-12.86	33.78	46	-12.22
360.77	S	Peak	42.91	-11.17	31.74	46	-14.26



#### Above 1GHz Data:

#### Radiated Spurious Emission Measurement Result (802.11 b)


Operation Mode : Fundamental Frequency : Operation Band :	802.11b 2412 MHz Tx CH Low	Test Date : Temp. / Humi. : Test Engineer :	2016/3/13 22.7deg_C/57RH Pony
EUT Pol.:	Н	Measurement Antenna Pol.:	Vertical
117			

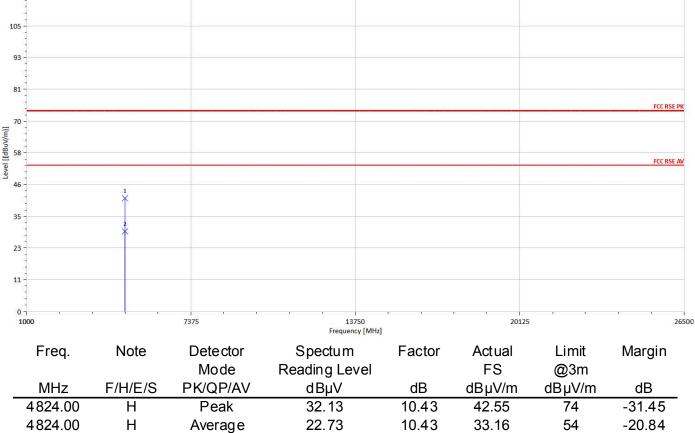

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	802.11b	Test Date :	2016/3/13
Fundamental Frequency:	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol.:	Н	Measurement Antenna Pol. :	Horizontal

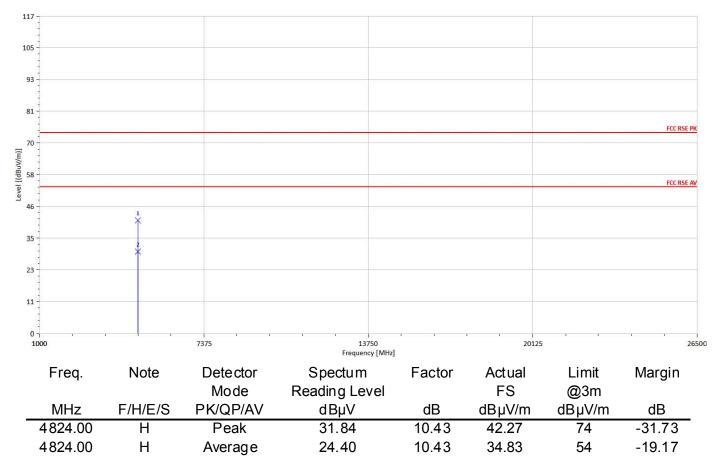




Operation Mode :	802.11b	Test Date :	2016/3/13
Fundamental Frequency:	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol. :	Vertical

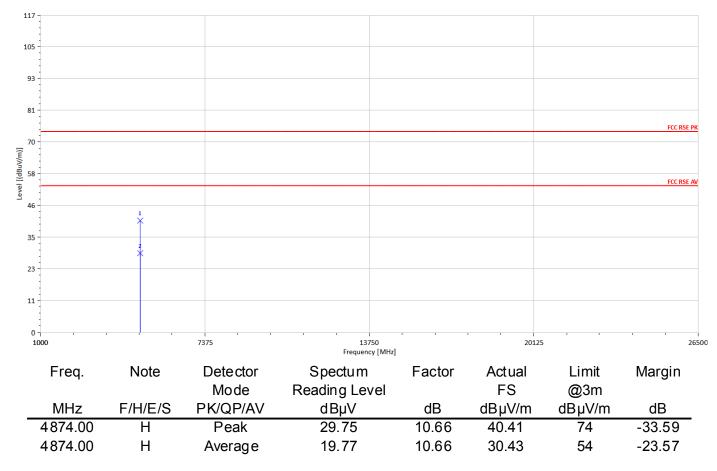




Operation Mode :	802.11b	Test Date :	2016/3/13
Fundamental Frequency:	2437 MHz	Temp. / Humi. :	22.7deg C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

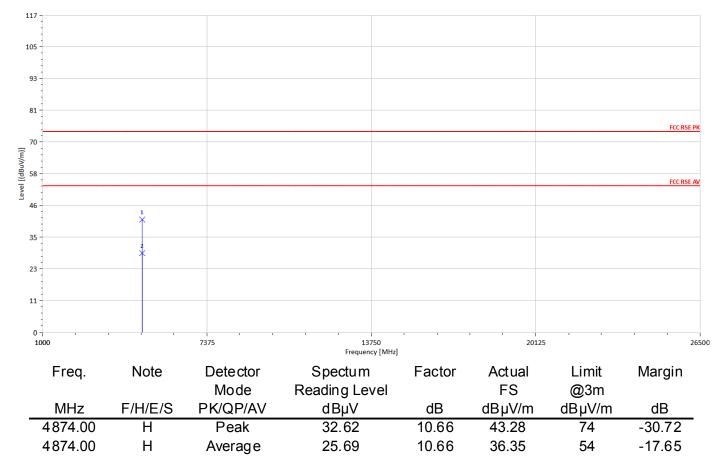




Operation Mode : Fundamental Frequency : Operation Band : EUT Pol. :	802.11b 2462 MHz Tx CH High H	Test Date : Temp. / Humi. : Test Engineer : Measurement Antenna Pol. :	2016/3/13 22.7deg_C/57RH Pony Vertical
117 -			

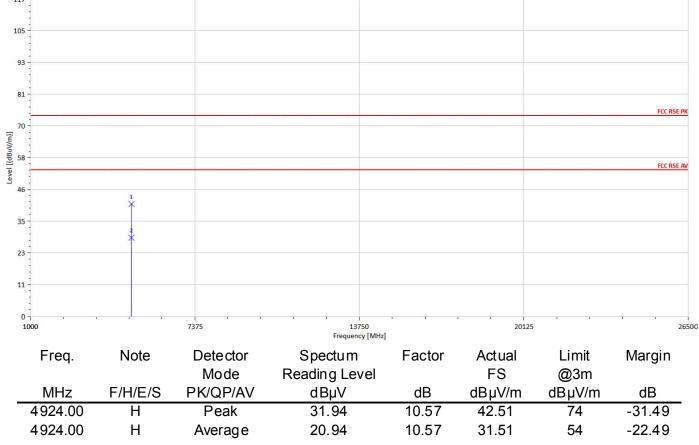




Operation Mode :	802.11b	Test Date :	2016/3/13
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal
17 -			1

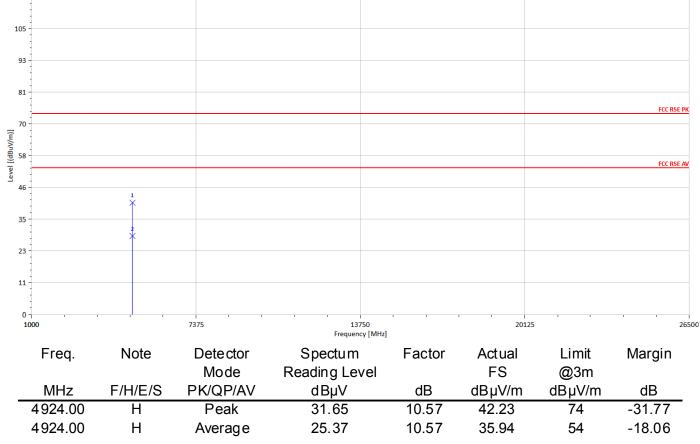



### Radiated Spurious Emission Measurement Result (802.11 g)


Operation Mode :	802.11g	Test Date :	2016/3/13
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	H	Measurement Antenna Pol. :	Vertical

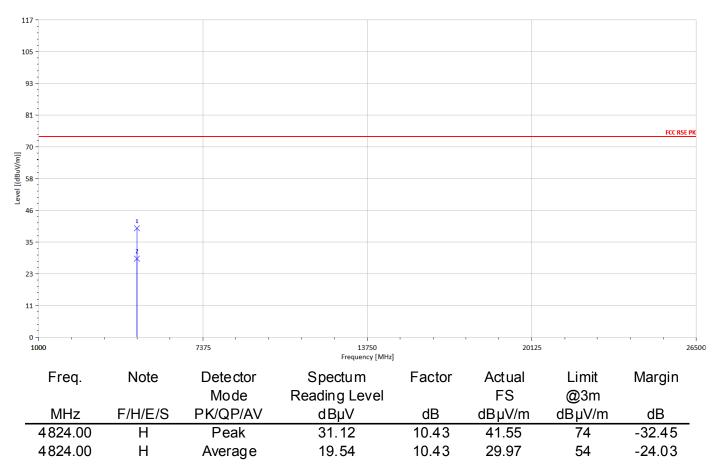

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	802.11g	Test Date :	2016/3/13
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

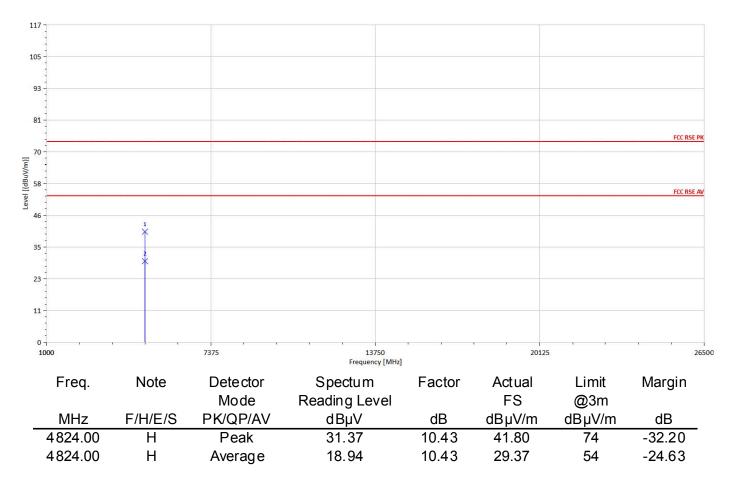




Operation Mode :	802.11g	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

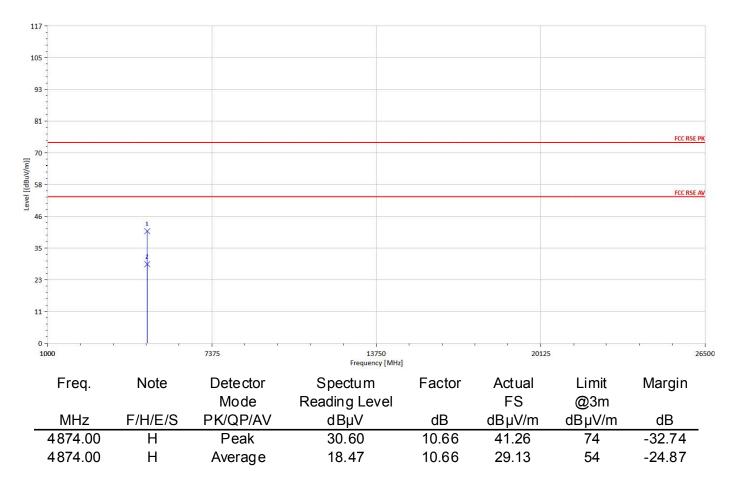




Operation Mode :	802.11g	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol. :	Horizontal

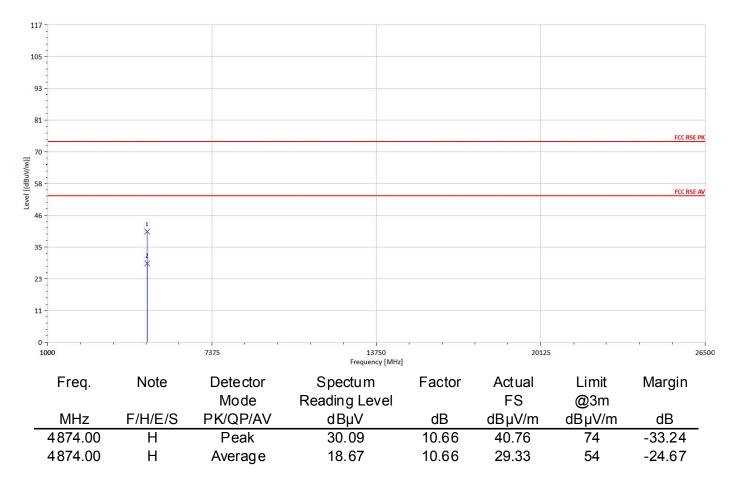




Operation Mode :	802.11g	Test Date :	2016/3/13
Fundamental Frequency : Operation Band :	2462 MHz Tx CH High	Temp. / Humi. : Test Engineer :	22.7deg_C/57RH Pony
EUT Pol. :	Н	Measurement Antenna Pol. :	Vertical

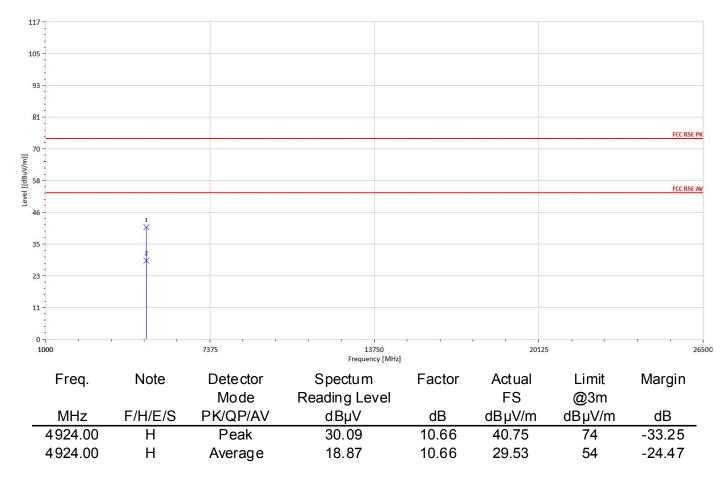




Operation Mode:	802.11g	Test Date :	2016/3/13
Fundamental Frequency:	2462 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	H	Measurement Antenna Pol. :	Horizontal

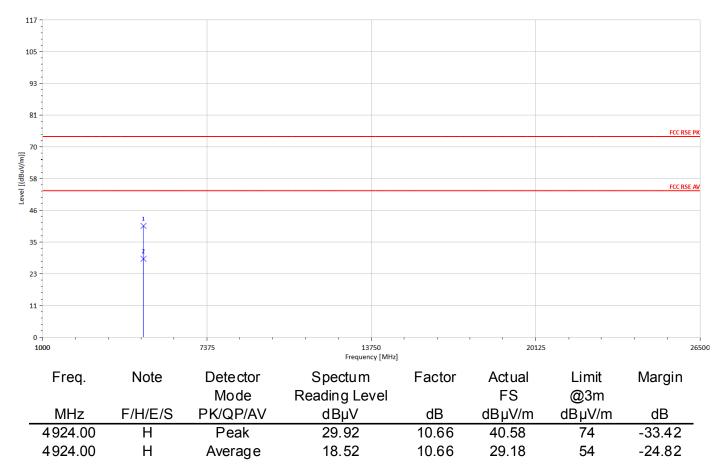



### Radiated Spurious Emission Measurement Result (802.11\_HT20)


Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

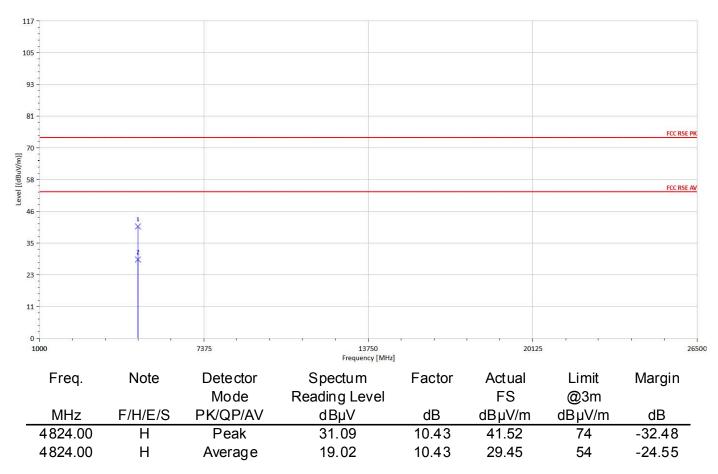

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2412 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

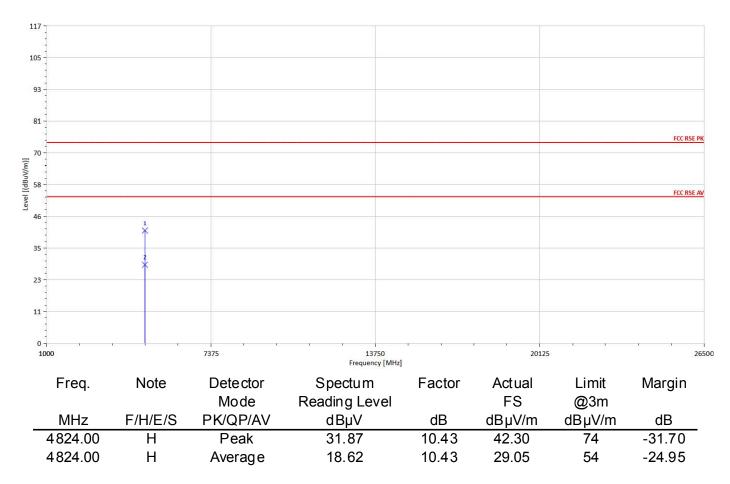




Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

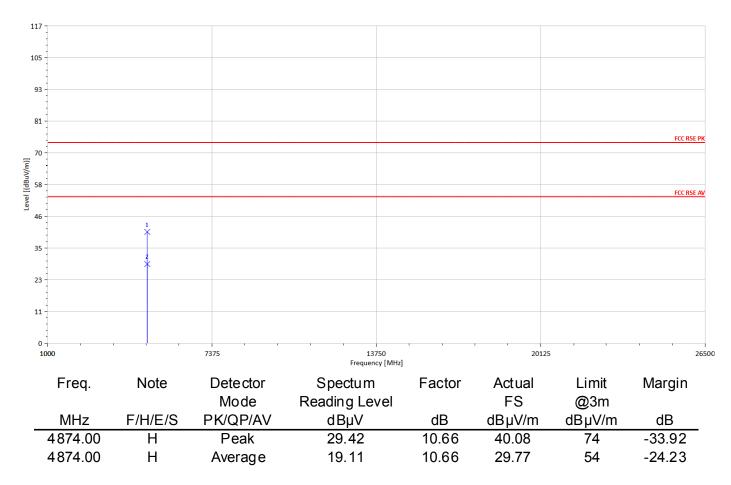




Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

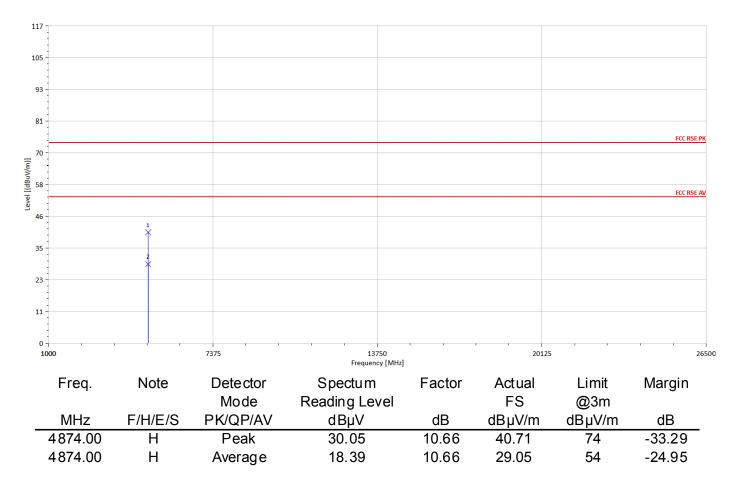




Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

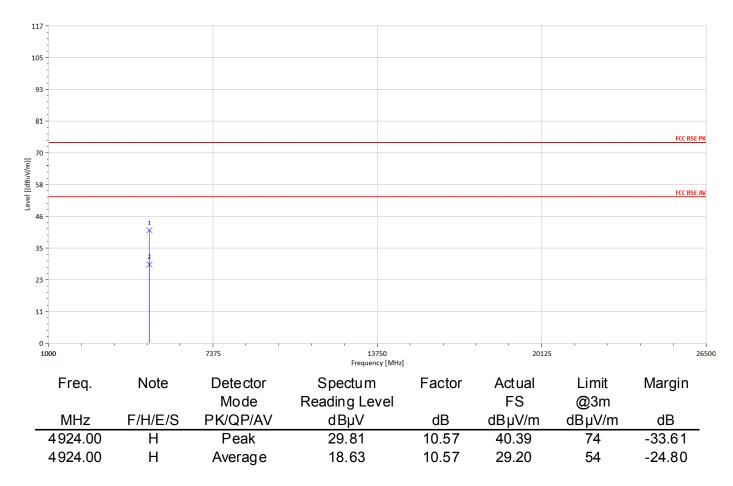




Operation Mode :	802.11n20	Test Date :	2016/3/13
Fundamental Frequency :	2462 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol. :	Horizontal

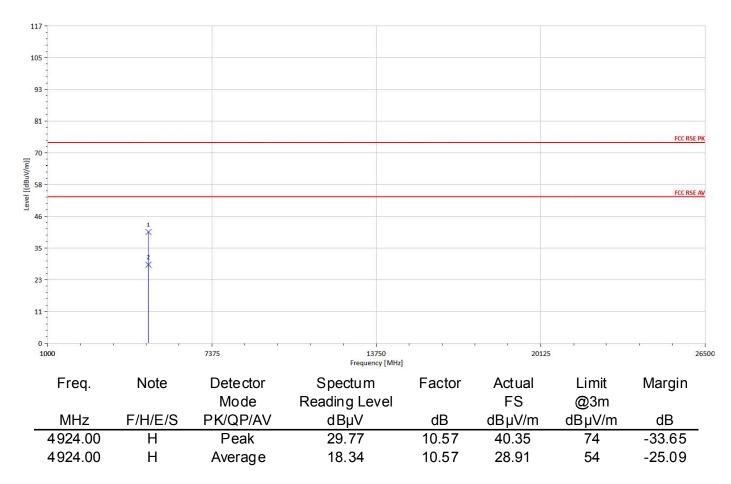




Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency :	2422 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

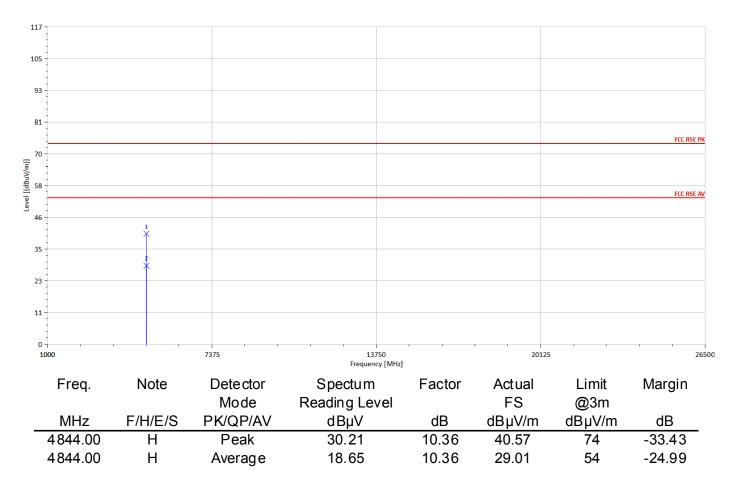




Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency :	2422 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Low	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

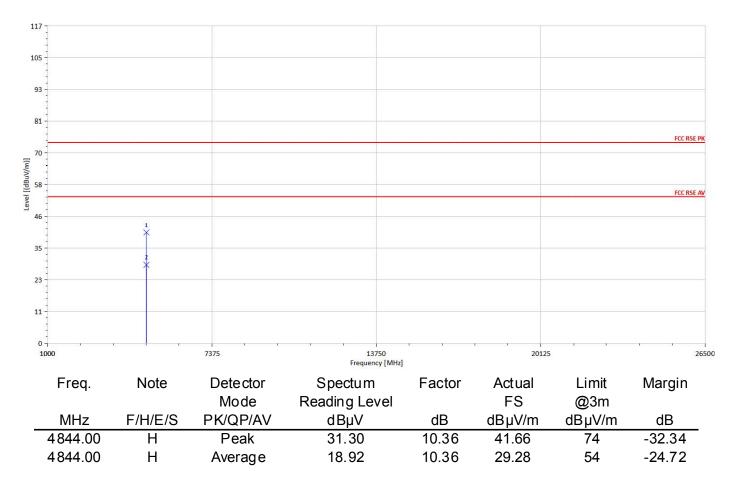




Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

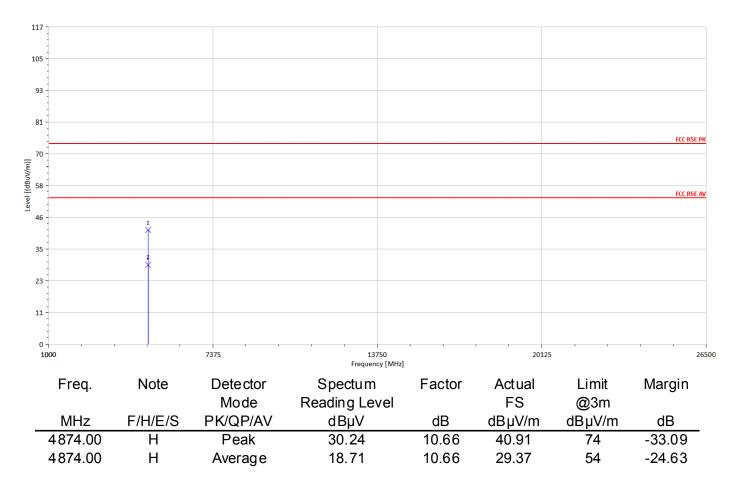




Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency :	2437 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH Mid	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Horizontal

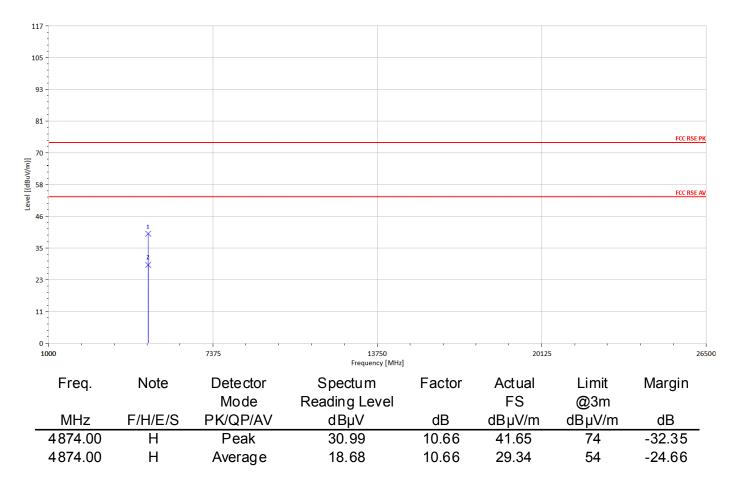




Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency:	2452 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol.:	Vertical

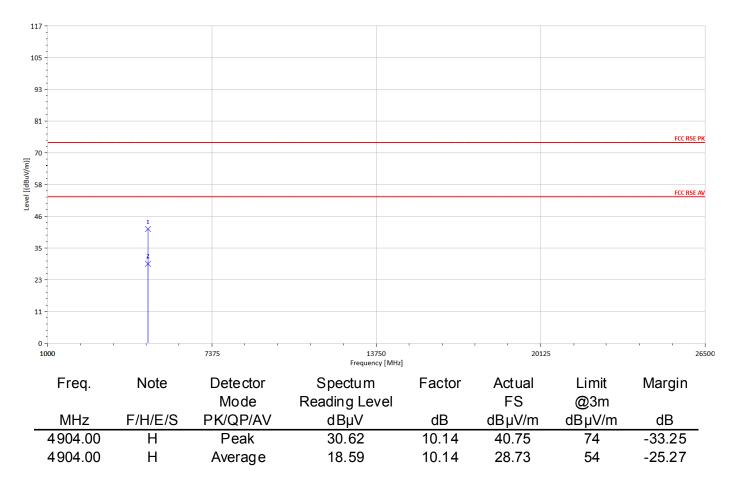



Operation Mode :	802.11n40	Test Date :	2016/3/13
Fundamental Frequency :	2452 MHz	Temp. / Humi. :	22.7deg_C/57RH
Operation Band :	Tx CH High	Test Engineer :	Pony
EUT Pol. :	Н	Measurement Antenna Pol. :	Horizontal

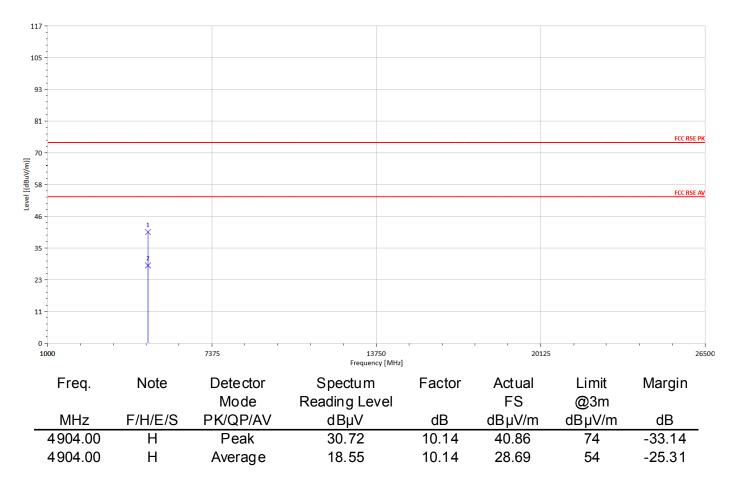



# 7.8 ANTENNA REQUIREMENT

## 7.9 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device. If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

# 7.10 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

The antenna gain is less than 6dBi. Therefore, it is not necessary to reduce maximum output power limit.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でためのです。 除非另有就明,此根告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law