



BT TEST REPORT

Report Number: C21T00052-SRD01-V02

Applicant	Mobiwire Mobiles (Ningbo) Co.,Ltd
Product Name	4G Clamshell Feature Phone
Model Name	DFC-0380
Brand Name	Doro
FCC ID	WS5DFC0380

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part15, ANSI C63.10-2013, KDB 558074.

Prepared by

Reviewed by

Approved by

Issue Date

2021-10-15

Industrial Internet Innovation Center (Shanghai) Co., Ltd.



NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
Tel: +86 21 68866880



Revision Version

Report Number	Revision	Date	Memo
C21T00052-SRD01-V00	00	2021-09-23	Initial creation of test report
C21T00052-SRD01-V01	01	2021-10-13	1. The data and description have been corrected on page 45. 2. With regard to the antenna, a statement has been added in section 4.2 of the report.
C21T00052-SRD01-V02	02	2021-10-15	The antenna statement has been corrected in section 4.2.



CONTENTS

1. TEST LABORATORY.....	6
1.1. TESTING LOCATION.....	6
1.2. TESTING ENVIRONMENT.....	6
1.3. PROJECT INFORMATION.....	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION.....	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	8
4. REFERENCE DOCUMENTS.....	9
4.1. REFERENCE DOCUMENTS FOR TESTING.....	9
4.2. REFERENCE INFORMATION FROM CLIENT.....	9
5. TEST SUMMARY.....	10
5.1. SUMMARY OF TEST RESULTS.....	10
5.2. STATEMENTS.....	11
6. MEASUREMENT RESULTS.....	12
6.1. PEAK OUTPUT POWER-CONDUCTED.....	13
6.1.1. Measurement Limit.....	13
6.1.2. Test Condition.....	13
6.1.3. Test procedure.....	13
6.2. FREQUENCY BAND EDGES-CONDUCTED.....	16
6.2.1. Measurement Limit.....	16
6.2.2. Test procedure.....	16

6.3. CONDUCTED EMISSION.....	20
6.3.1 Measurement Limit.....	20
6.3.2 Test procedures.....	20
6.4. RADIATED EMISSION.....	23
6.4.1. Measurement Limit.....	23
6.4.2. Test Method.....	23
6.5. TIME OF OCCUPANCY (DWELL TIME).....	45
6.5.1. Measurement Limit.....	45
6.5.2. Test procedures.....	45
6.6. 20DB BANDWIDTH.....	51
6.6.1. Measurement Limit.....	51
6.6.2. Test procedures.....	51
6.7 CARRIER FREQUENCY SEPARATION.....	54
6.7.1. Measurement Limit.....	54
6.7.2. Test procedures.....	54
6.8 NUMBER OF HOPPING CHANNELS.....	56
6.8.1. Measurement Limit.....	56
6.8.2. Test procedure.....	56
7. TEST EQUIPMENT LIST.....	58
7.1. CONDUCTED TEST SYSTEM.....	58
7.2. RADIATED EMISSION TEST SYSTEM.....	58
ANNEX A: MEASUREMENT UNCERTAINTY.....	59
ANNEX B: ACCREDITATION CERTIFICATE.....	60

1. Test Laboratory

1.1. Testing Location

Primary Lab:

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	958356
FCC Designation No.	CN1177

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Supply Voltage	230V/50Hz

1.3. Project Information

Project Leader	Xu Yuting
Testing Start Date	2021-07-08
Testing End Date	2021-09-11



2. Client Information

2.1. Applicant Information

Company Name	Mobiwire Mobiles (Ningbo) Co.,Ltd
Address	No.999,Dacheng East Road,Fenghua City,Zhejiang Province,China
Telephone	+86 574 59555707

2.2. Manufacturer Information

Company Name	Doro AB
Address	Jörgen Kocksgatan 1B, SE 211 20 MALMÖ, SWEDEN
Telephone	+46 46 280 50 00

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	4G Clamshell Feature Phone
Model name	DFC-0380
Supported Radio Technology and Bands	GSM900/DCS1800/PCS1900 WCDMA Band I/VIII LTE Band 1/3/7/8/20/28/38 BT 5.0 BR EDR
Hardware Version	V01(HW2011/2021/2031/2041)
Software Version	DFC-0380_SF296_N_S01A_V01_M210607_CE
FCC ID	WS5DFC0380

Note: Photographs of EUT are shown in ANNEX B of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N01	352683990005081	V01 (HW code:2011)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-07-05
N02	352683990004274	V01 (HW code: 2011)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-07-05
N08 (Mainly Supply)	352683990007913	V01 (HW code: 2011)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-08-02
N013 (Secondary Supply)	352683990008531	V01 (HW code: 2021)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-09-02
N014 (Thirdly Supply)	352683990010651	V01 (HW code: 2031)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-09-02
N15 (Fourthly Supply)	352683990011022	V01 (HW code: 2041)	DFC-0380_SF296_N_S01A_V01_M210607_CE	2021-09-02

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

*The AE is provided by the client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2018-10-01
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	v05r02

4.2. Reference Information from client

Information of the test sample provided by the client.

Antenna gain of EUT -1.5 dBi

Note: The product DFC-0380 use an integral antenna which compliance with the requirement of 15.203.

5. Test Summary

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Peak Output Power	15.247(b)	Pass
20dB Occupied Bandwidth	15.247(a)	Pass
Band Edges Compliance	15.247 (d)	Pass
Time Of Occupancy (Dwell Time)	15.247(a)	Pass
Carrier Frequency Separation	15.247(a)	Pass
Number Of Hopping Channels	15.247(a)	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	Pass
Transmitter Spurious Emission-Radiated	15.247,15.209,15.205	Pass

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	3.7V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

Note:

- a. All the test data for each data were verified, but only the worst case was reported.
- b. The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH1 for GFSK, 2-DH1 for $\pi/4$ DQPSK, 3-DH1 for 8DPSK.
- c. The DC and low frequency voltages' measurement uncertainty is $\pm 2\%$.



5.2. Statements

The DFC-0380 , manufactured by Doro AB Company Limited is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Measurement Results

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6.1. Peak Output Power-Conducted

6.1.1. Measurement Limit

Standard	Limit (dBm)
FCC 47 Part 15.247(b)(1)	<30

6.1.2. Test Condition

Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	3MHz	10MHz	9MHz	Auto

6.1.3. Test procedure

The measurement is according to ANSI C63.10 clause 7.8.5.

1. The output power of EUT was connected to the spectrum analyzer and CMW270 by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Measure the conducted output power and record the results it.

Measurement Results

Note: Bold font is the maximum Value

Peak Conducted Output Power GFSK, CH0 (dBm)	4.65	Peak Conducted Output Power GFSK, CH39 (dBm)	4.1

<p>Peak Conducted Output Power GFSK, CH78 (dBm)</p>	<p>4.13</p>	<p>Peak Conducted Output Power $\pi/4$ DQPSK, CH0 (dBm)</p>	<p>4.95</p>
<p>Peak Conducted Output Power $\pi/4$ DQPSK, CH39 (dBm)</p>	<p>4.24</p>	<p>Peak Conducted Output Power $\pi/4$ DQPSK, CH78 (dBm)</p>	<p>4.2</p>

<p>Peak Conducted Output Power 8DPSK, CH0 (dBm)</p>	<p>4.95</p>	<p>Peak Conducted Output Power 8DPSK, CH39 (dBm)</p>	<p>4.27</p>
<p>Date: 14.JUL.2021 11:16:12</p>		<p>Date: 14.JUL.2021 11:17:18</p>	
<p>Peak Conducted Output Power 8DPSK, CH78 (dBm)</p>	<p>4.22</p>	<p>/</p>	<p>/</p>
<p>Date: 14.JUL.2021 11:17:54</p>		<p>/</p>	<p>/</p>

6.2. Frequency Band Edges-Conducted

6.2.1. Measurement Limit


Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

6.2.2. Test procedure

The measurement is according to ANSI C63.10 clause 7.8.6.



1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.
4. Allow sweep to continue until the trace stabilizes.

Measurement results

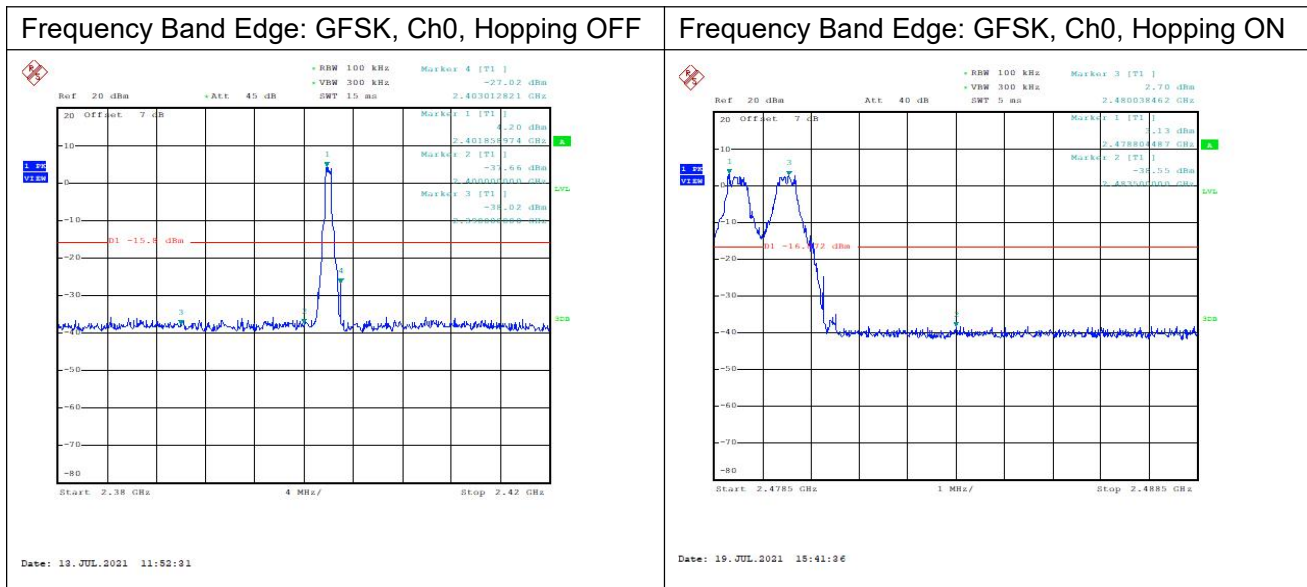



Frequency Band Edge: GFSK,Ch78, Hopping OFF

Frequency Band Edge: GFSK, Ch78, Hopping ON

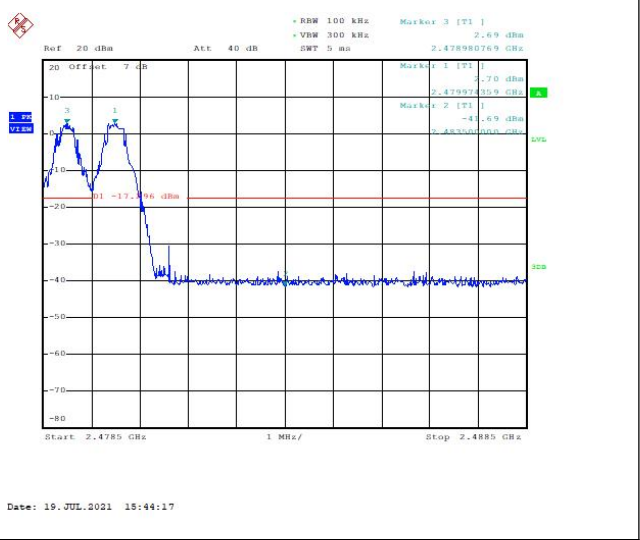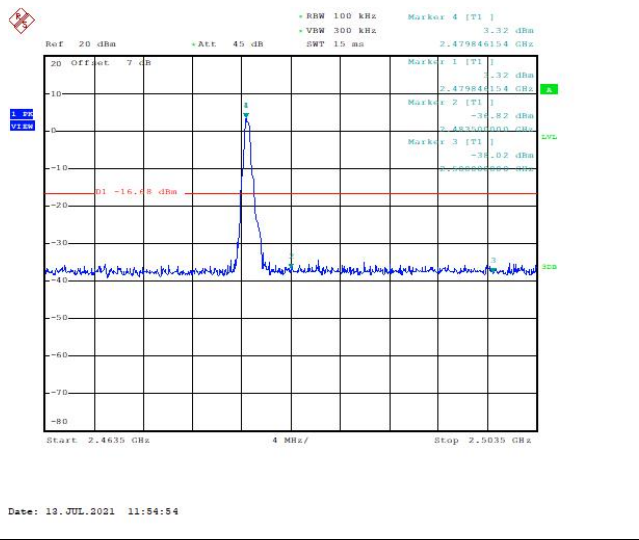


Frequency Band Edge: $\pi/4$ DQPSK, Ch0, Hopping OFF


Frequency Band Edge: $\pi/4$ DQPSK, Ch0, Hopping ON

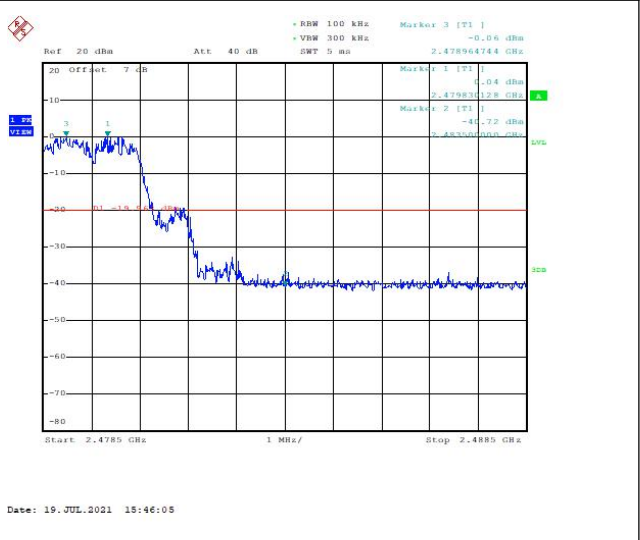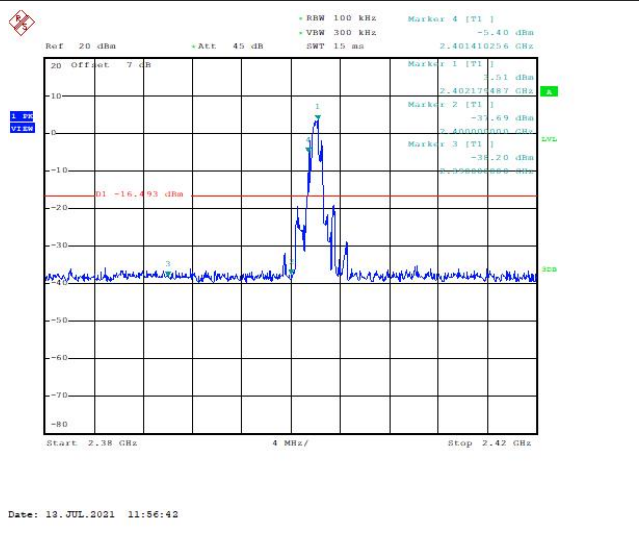


Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping OFF

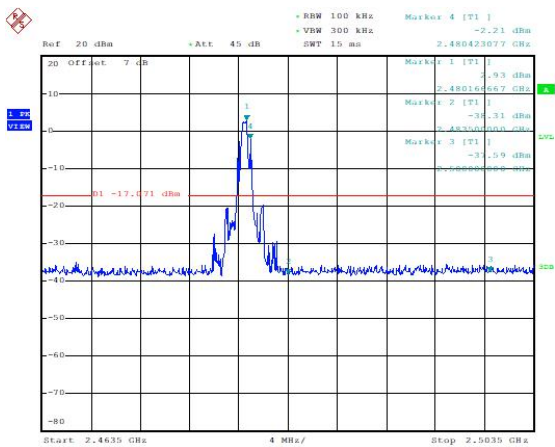

Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping ON

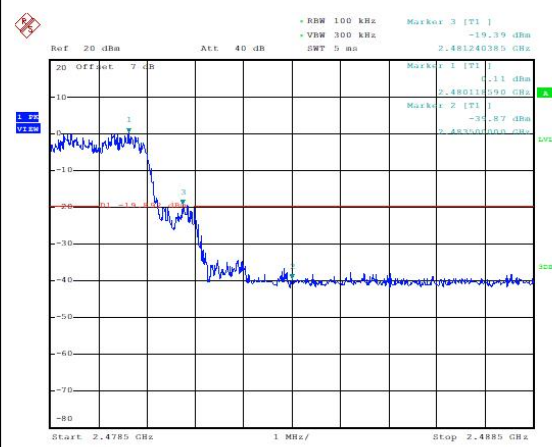

Frequency Band Edge: 8DPSK, Ch0, Hopping OFF

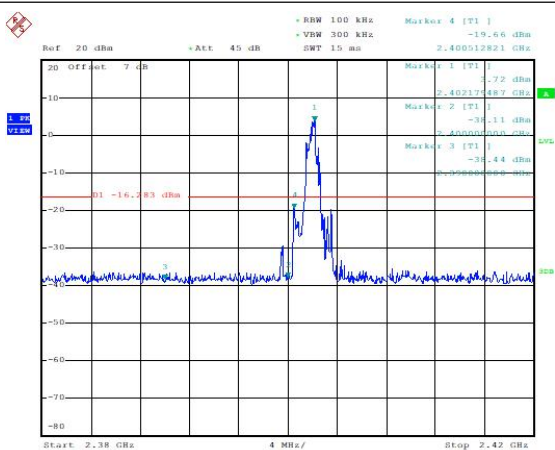


Frequency Band Edge: 8DPSK, Ch0, Hopping ON




Frequency Band Edge: 8DPSK,
Ch78, Hopping OFF

Frequency Band Edge: 8DPSK,
Ch78, Hopping ON

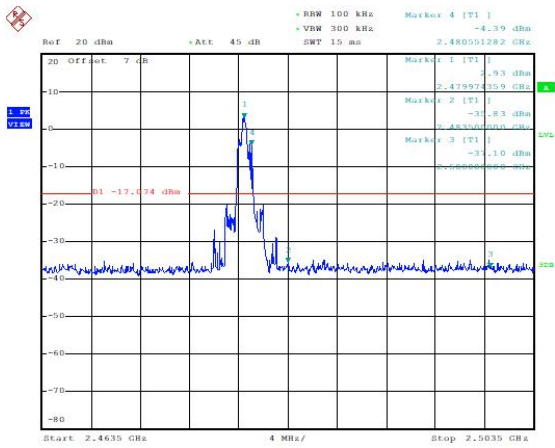

Date: 19.JUL.2021 12:00:17

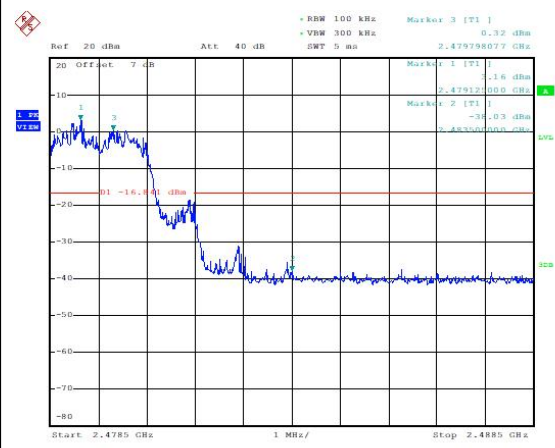

Date: 19.JUL.2021 16:12:41

6.3. Conducted Emission

6.3.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100KHz bandwidth

6.3.2 Test procedures


The measurement is according to ANSI C63.10 clause 7.8.8.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

Measurement Results

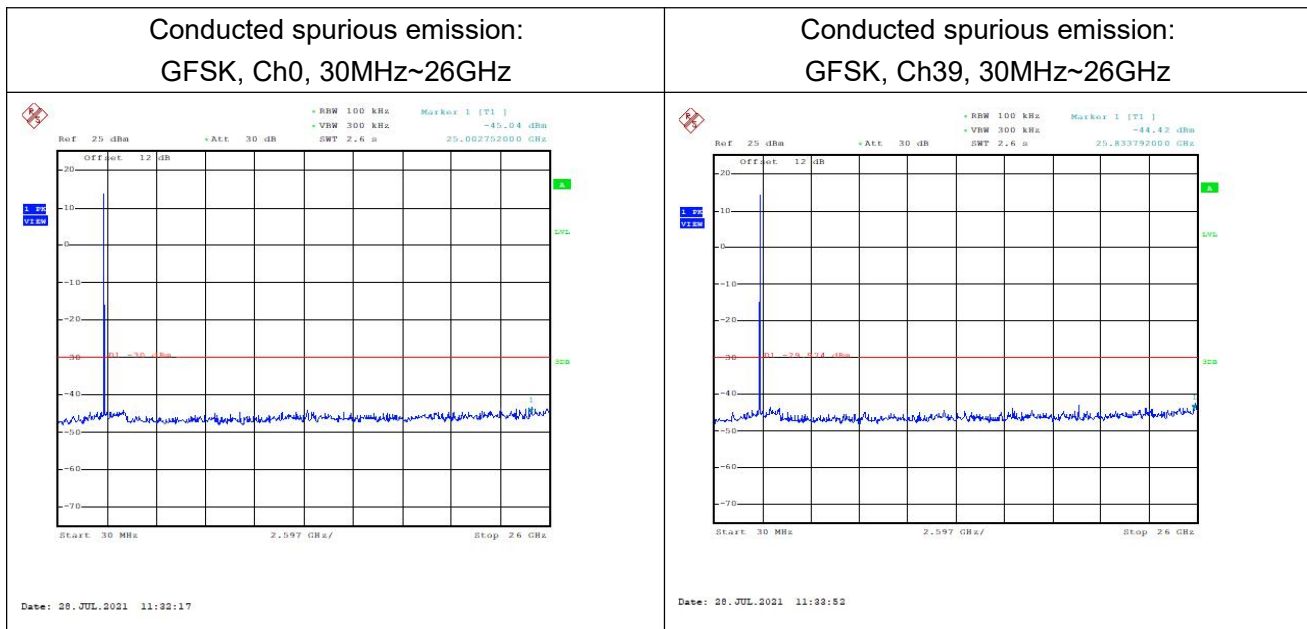


Conducted spurious emission:
GFSK, Ch78, 30MHz~26GHz

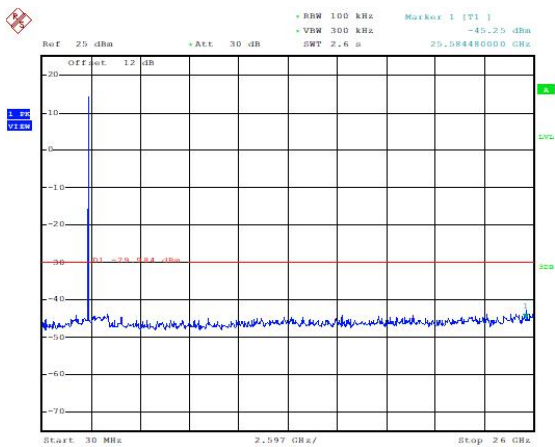


Date: 28.JUL.2021 11:35:05

Conducted spurious emission:
 $\pi/4$ DQPSK, Ch0, 30MHz~26GHz

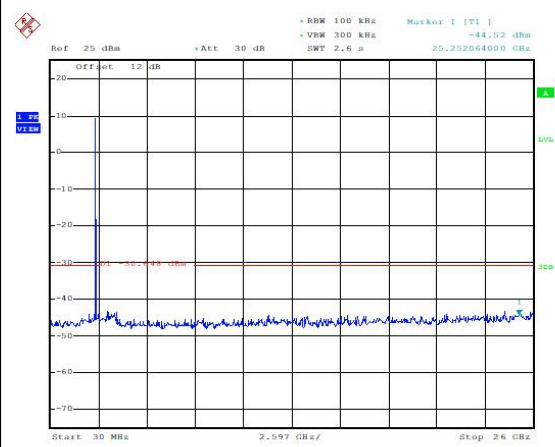


Date: 28.JUL.2021 11:36:08

Conducted spurious emission:
 $\pi/4$ DQPSK, Ch39, 30MHz~26GHz

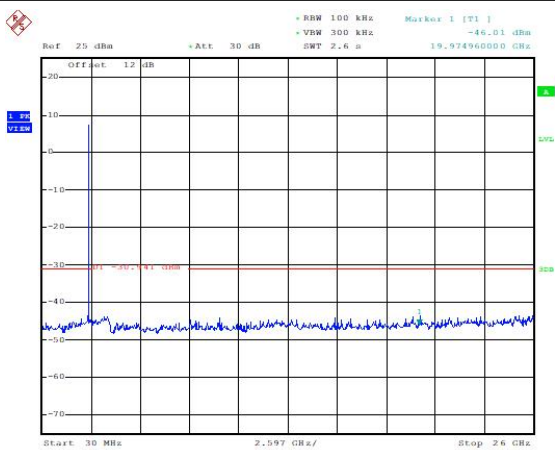


Date: 28.JUL.2021 11:37:40

Conducted spurious emission:
 $\pi/4$ DQPSK, Ch78, 30MHz~26GHz

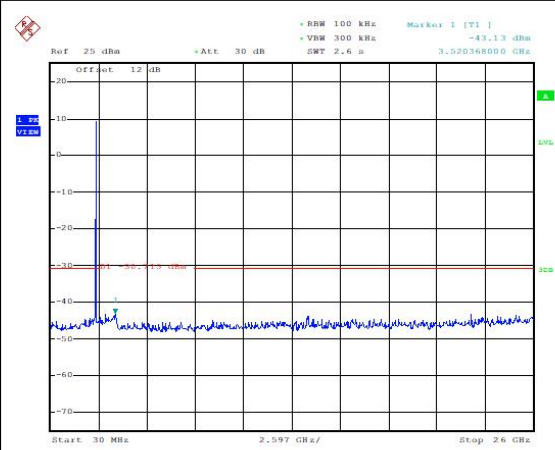


Date: 28.JUL.2021 11:38:30


Conducted spurious emission:
8DQPSK, Ch0, 30MHz~26GHz

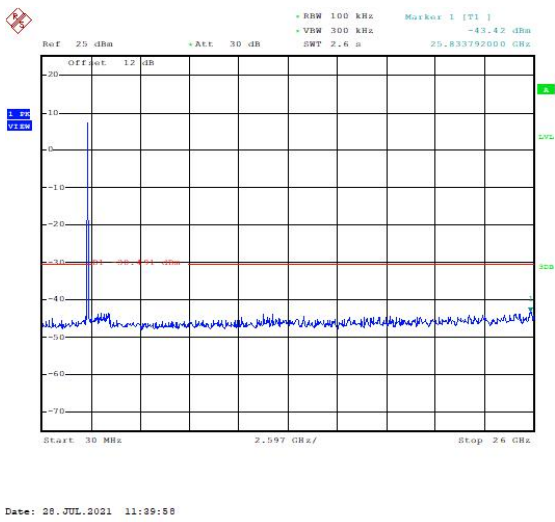

Conducted spurious emission:
8DQPSK, Ch39, 30MHz~26GHz

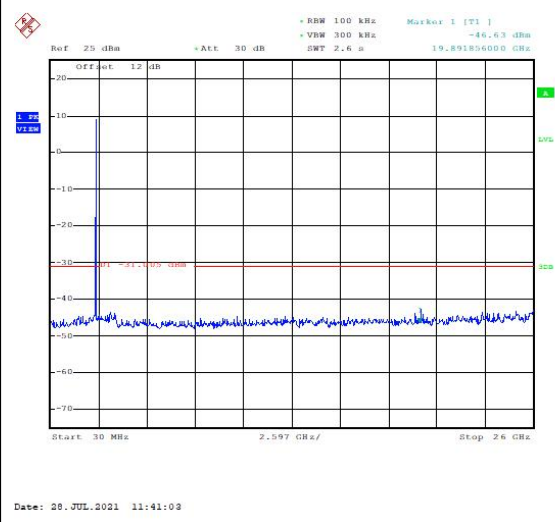

Conducted spurious emission:
8DQPSK, Ch78, 30MHz~26GHz

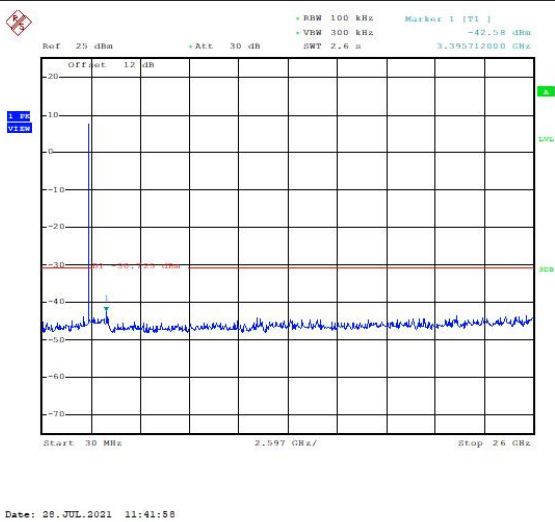

/

/

6.4. Radiated Emission

6.4.1. Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band

Frequency of emission	Field strength (uV/m)	Field strength (dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2. Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

Measurement Results

A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:

$$A_{Rpi} = \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain}$$


$$\text{Result} = P_{\text{Mea}} + A_{Rpi}$$

Mainly Supply


BB12

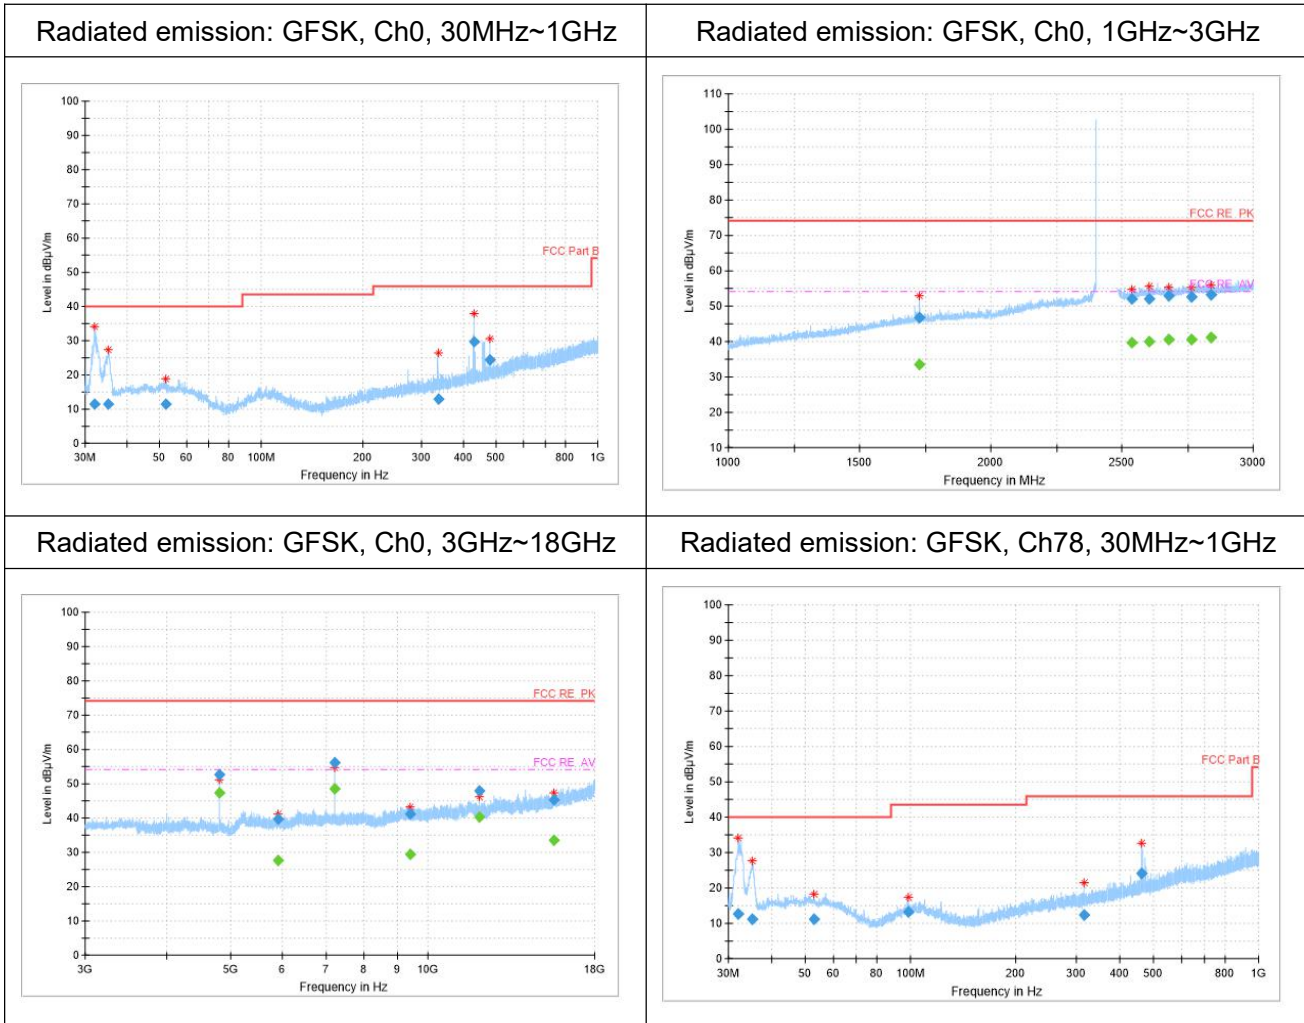


Radiated emission: GFSK, Ch78, 1GHz~3GHz

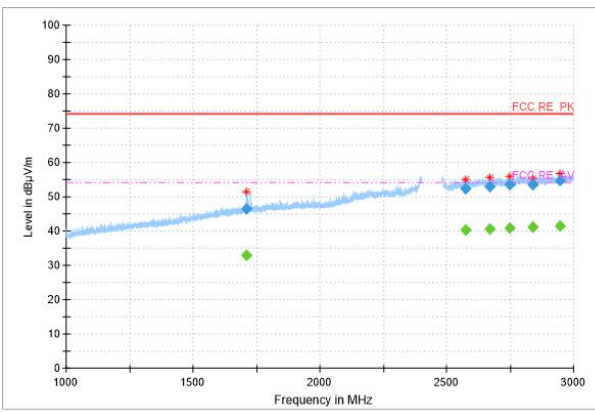


Radiated emission: GFSK, Ch78, 3GHz~18GHz

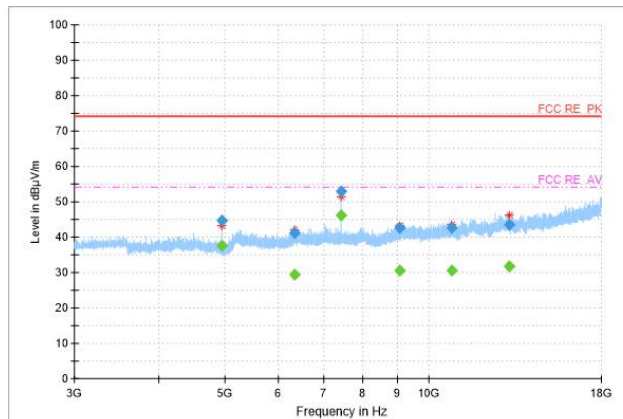


Bandedge (Low): GFSK, low channel

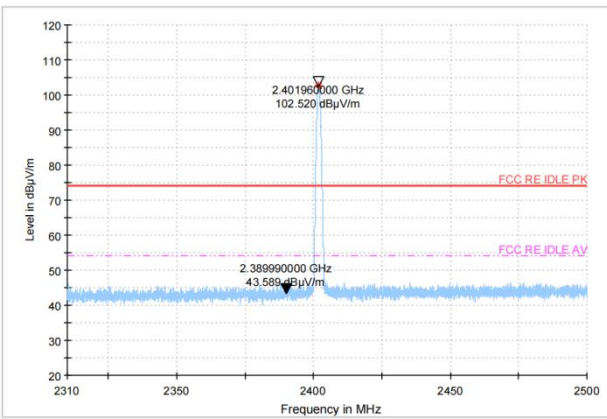


Bandedge (High): GFSK, high channel

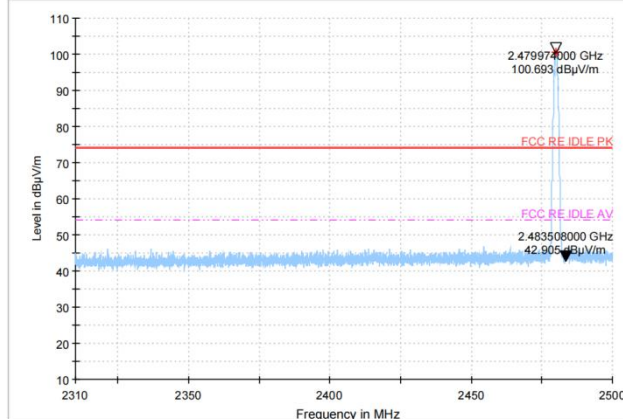


Radiated emission: $\pi/4$ DQPSK, Ch0, 30MHz~1GHz

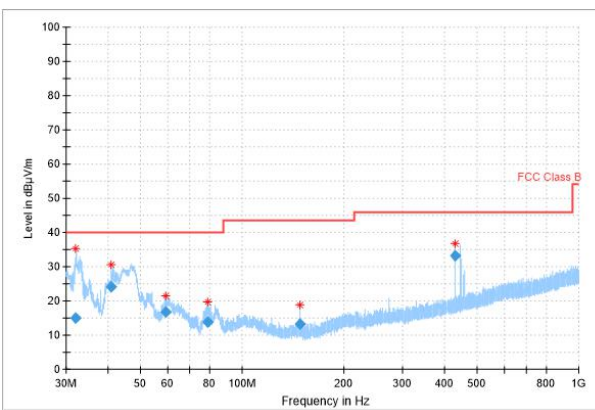


Radiated emission: $\pi/4$ DQPSK, Ch0, 1GHz~3GHz

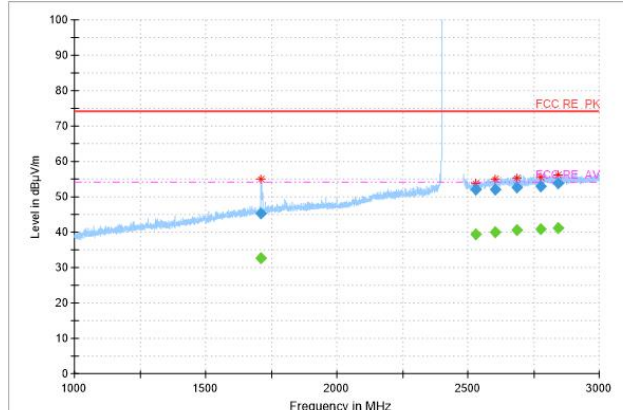


Radiated emission: $\pi/4$ DQPSK, Ch0,
3GHz~18GHz

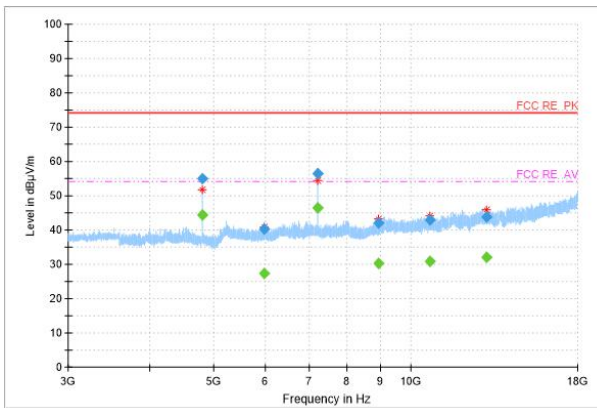


Radiated emission: $\pi/4$ DQPSK, Ch78,
30MHz~1GHz

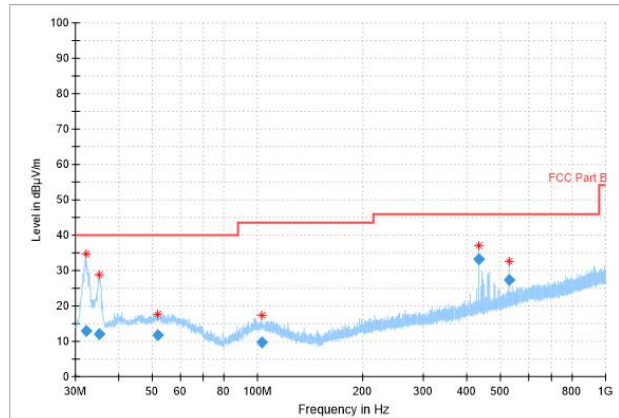


Radiated emission: $\pi/4$ DQPSK, Ch78,
1GHz~3GHz

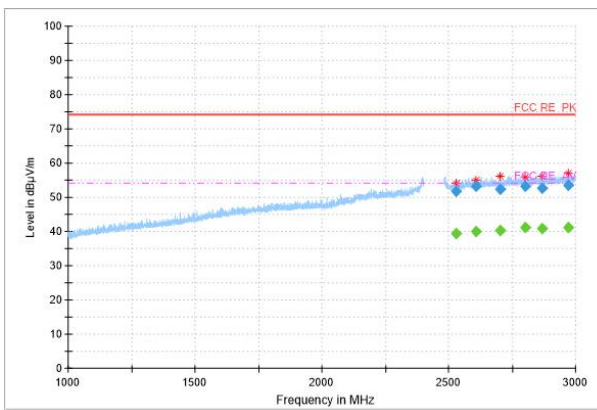


Radiated emission: $\pi/4$ DQPSK, Ch78,
3GHz~18GHz

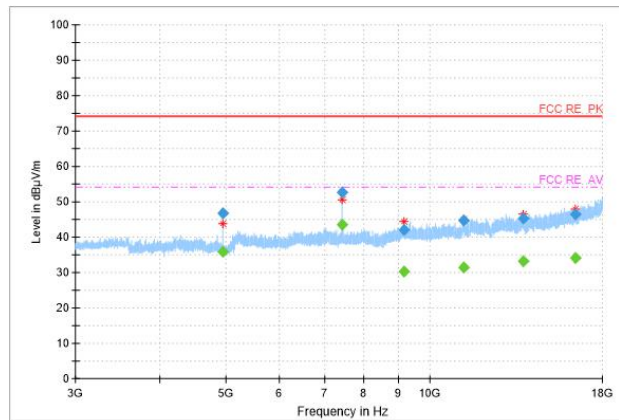


Bandedge (Low): $\pi/4$ DQPSK, low channel

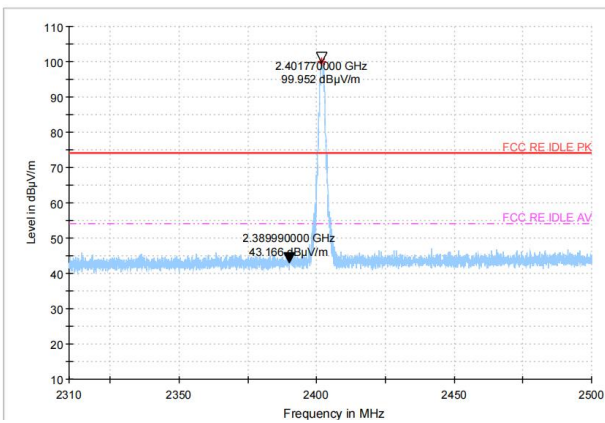


Bandedge (Low): $\pi/4$ DQPSK, high channel

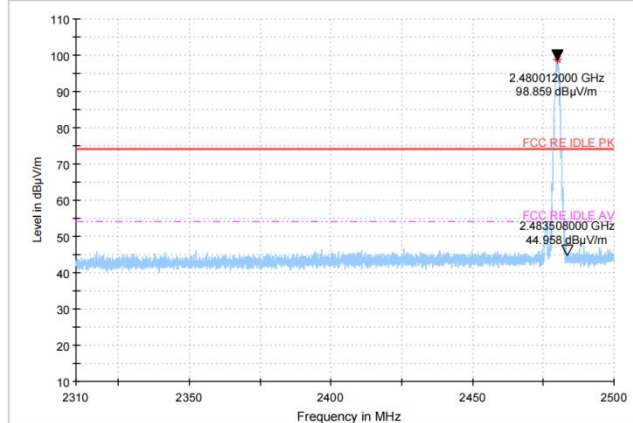


Radiated emission: 8DPSK, Ch0, 30MHz~1GHz

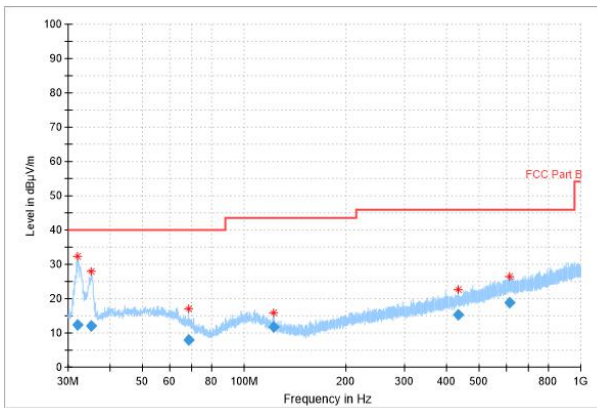


Radiated emission: 8DPSK, Ch0, 1GHz~3GHz

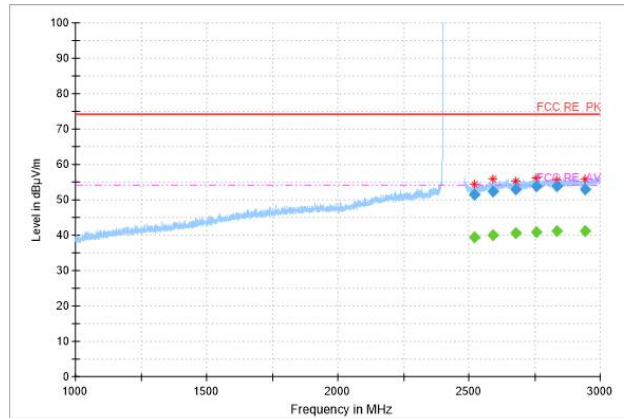


Radiated emission: 8DPSK, Ch0, 3GHz~18GHz

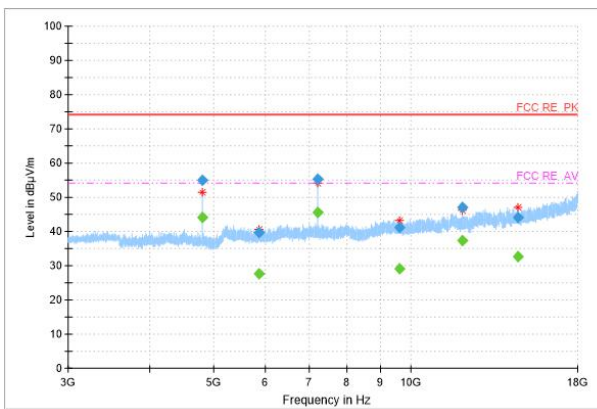


Radiated emission: 8DPSK, Ch78, 30MHz~1GHz

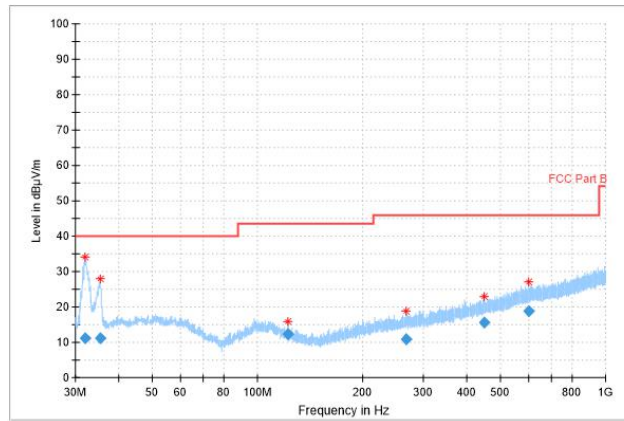


Radiated emission: 8DPSK, Ch78, 1GHz~3GHz

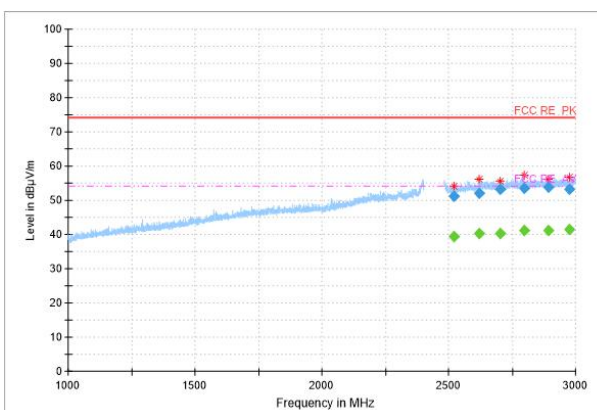


Radiated emission: 8DPSK, Ch78, 3GHz~18GHz

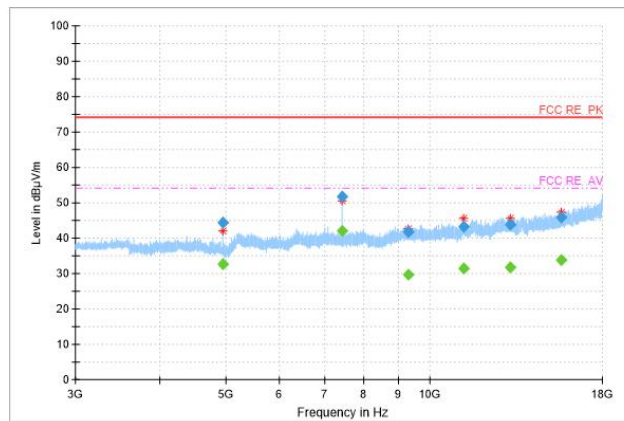


Bandedge (Low): 8DPSK, low channel

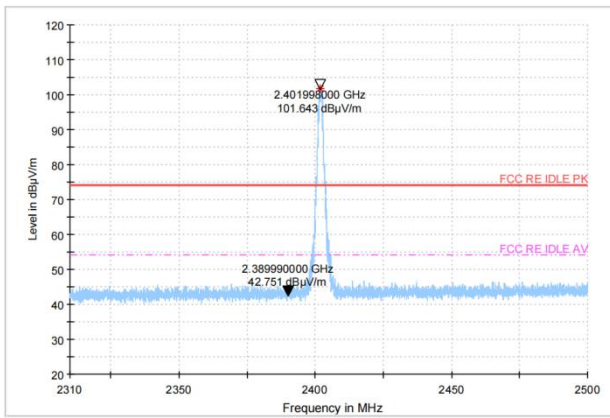

Bandedge (High): 8DPSK, high channel

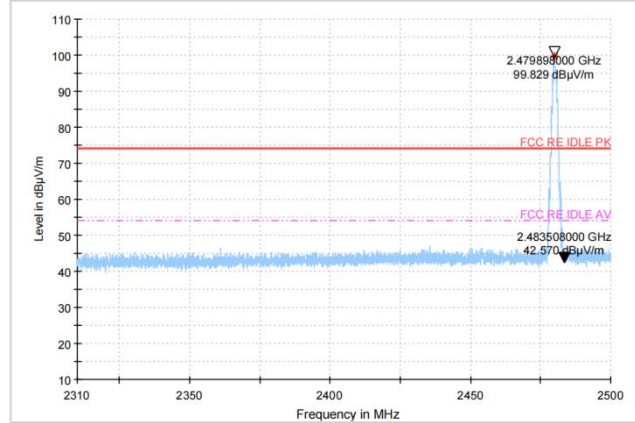

ALL Channel 18GHz~26GHz

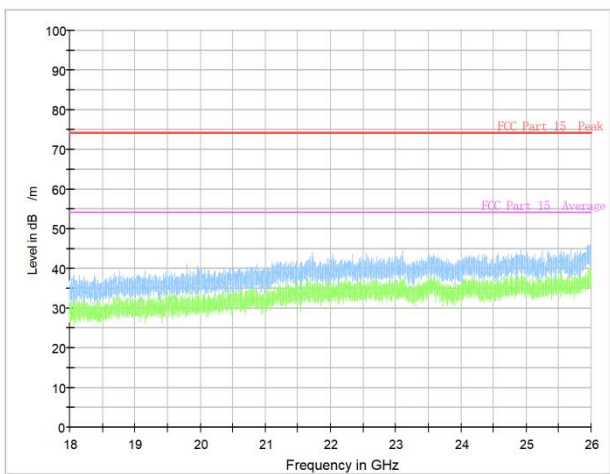


/


/

BA12


Radiated emission: GFSK, Ch0, 30MHz~1GHz

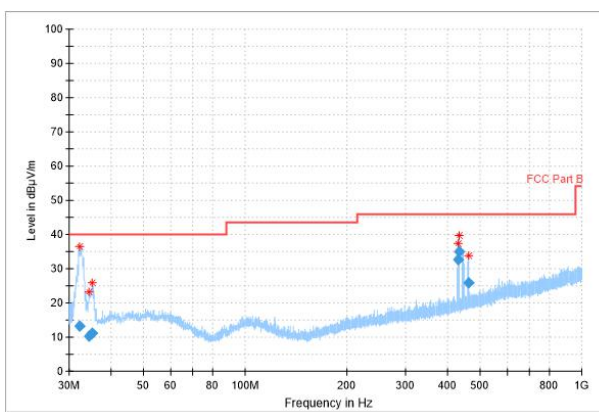


Radiated emission: GFSK, Ch0, 1GHz~3GHz

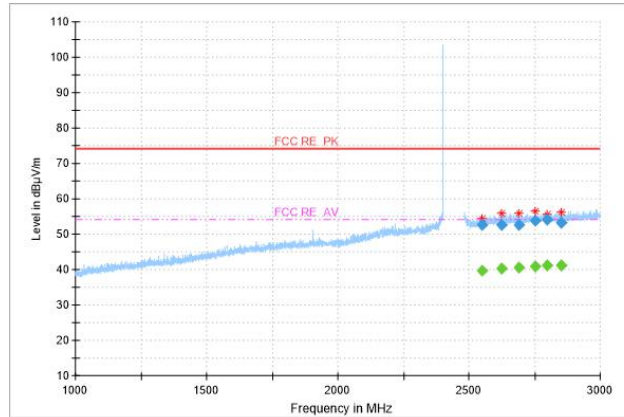


Radiated emission: GFSK, Ch0, 3GHz~18GHz

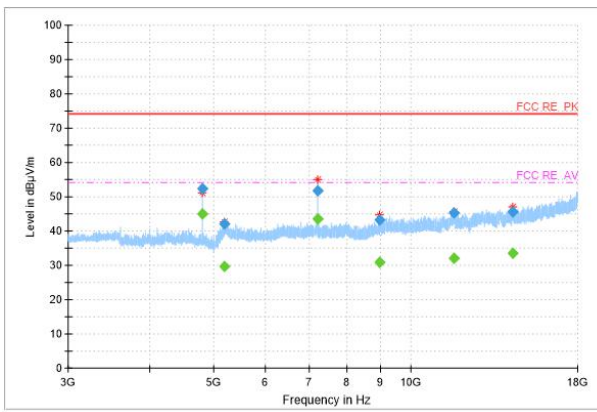


Radiated emission: GFSK, Ch78, 30MHz~1GHz

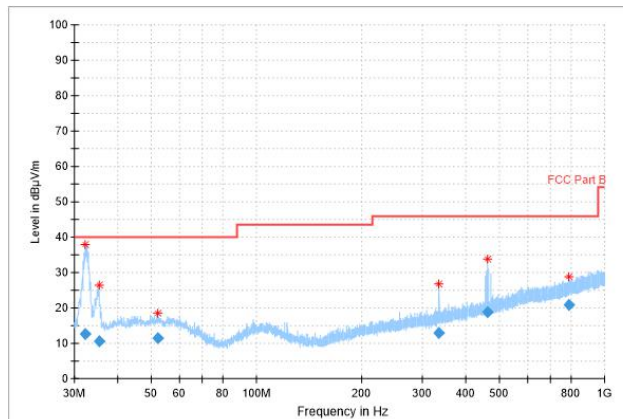


Radiated emission: GFSK, Ch78, 1GHz~3GHz

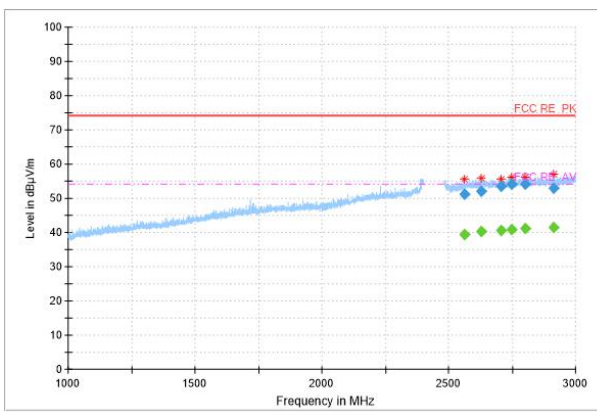


Radiated emission: GFSK, Ch78, 3GHz~18GHz

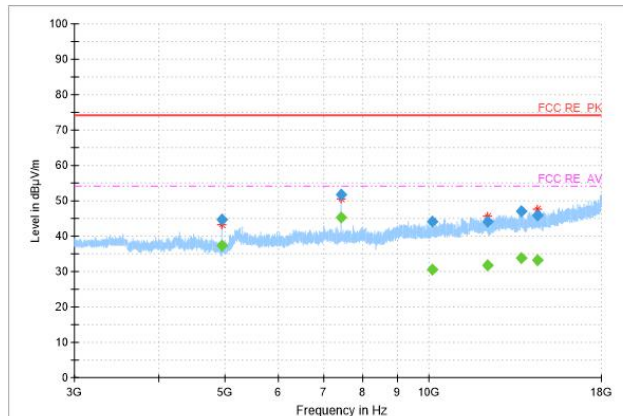

Bandedge (Low): GFSK, low channel

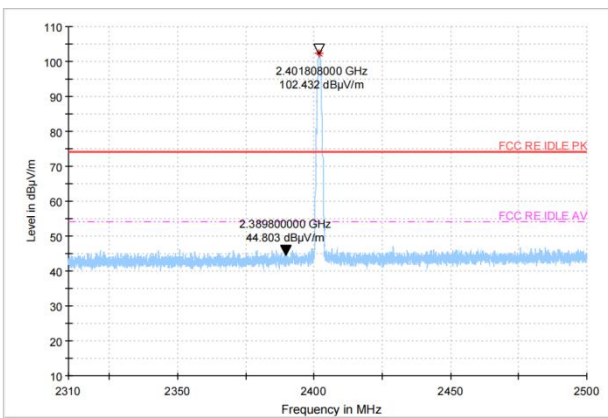


Bandedge (High): GFSK, high channel

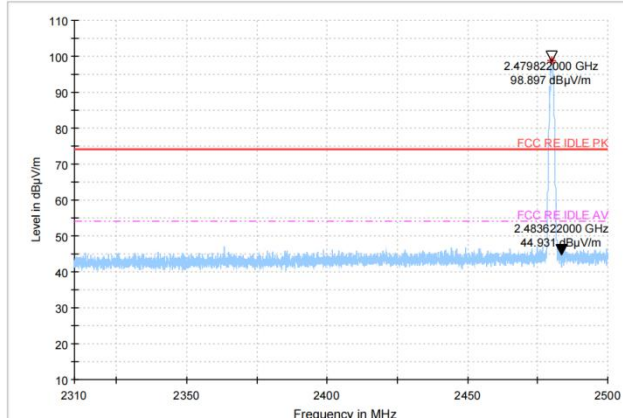


Secondary Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

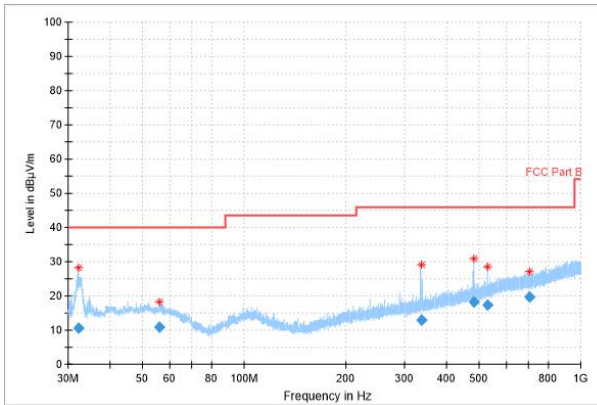


Radiated emission: GFSK, Ch0, 1GHz~3GHz

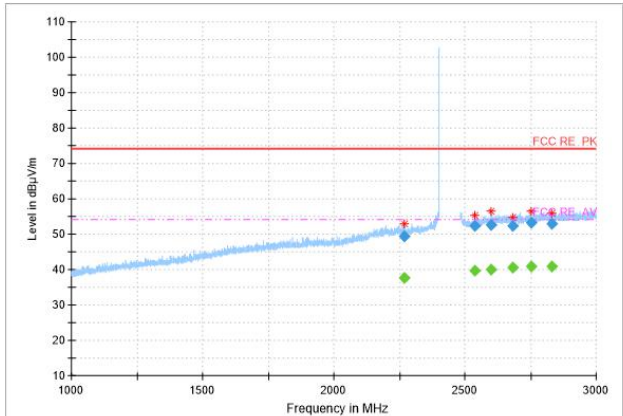


Radiated emission: GFSK, Ch0, 3GHz~18GHz

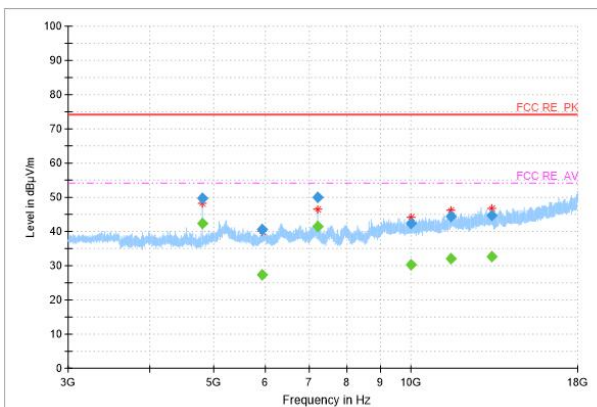


Radiated emission: GFSK, Ch78, 30MHz~1GHz

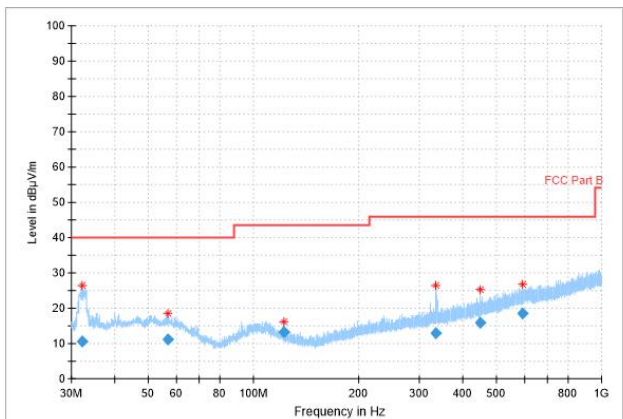


Radiated emission: GFSK, Ch78, 1GHz~3GHz

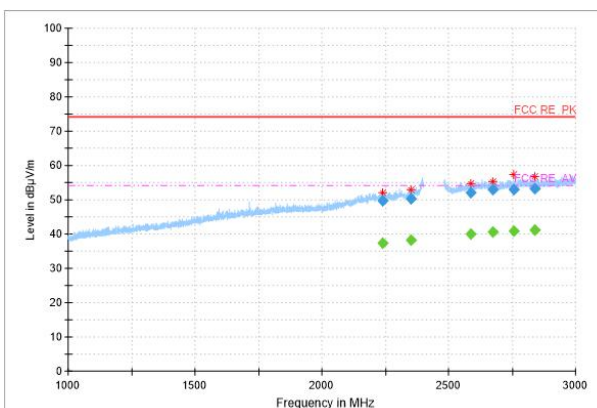


Radiated emission: GFSK, Ch78, 3GHz~18GHz

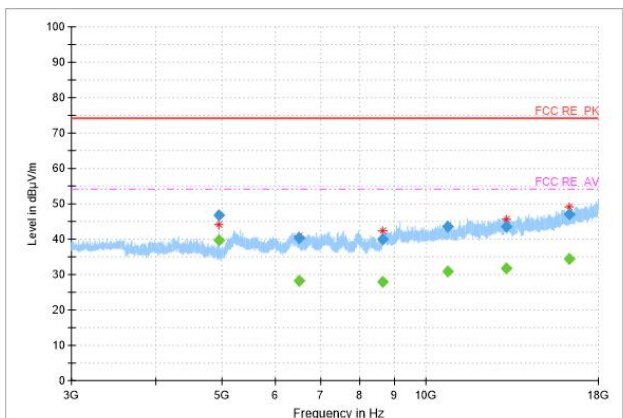

Bandedge (Low): GFSK, low channel

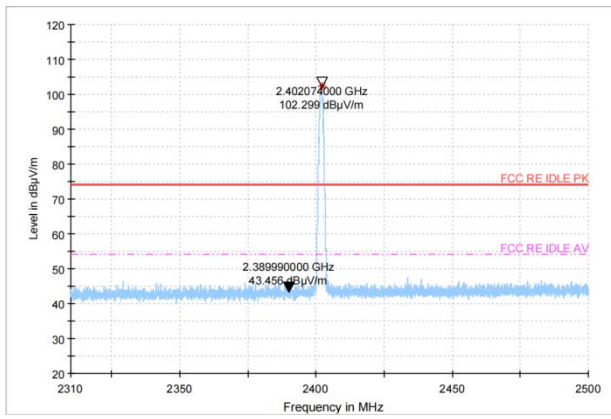


Bandedge (High): GFSK, high channel

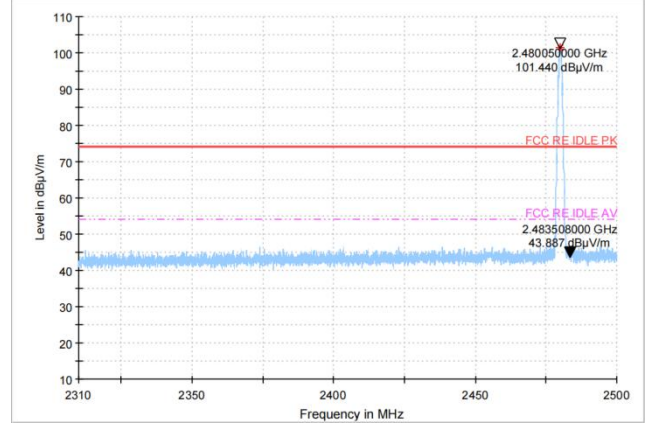


Thirdly Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

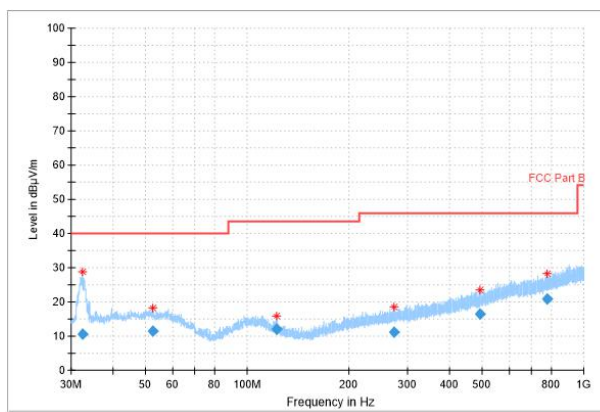


Radiated emission: GFSK, Ch0, 1GHz~3GHz

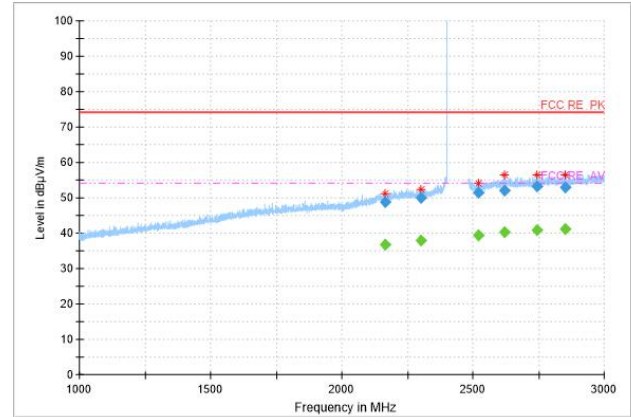


Radiated emission: GFSK, Ch0, 3GHz~18GHz

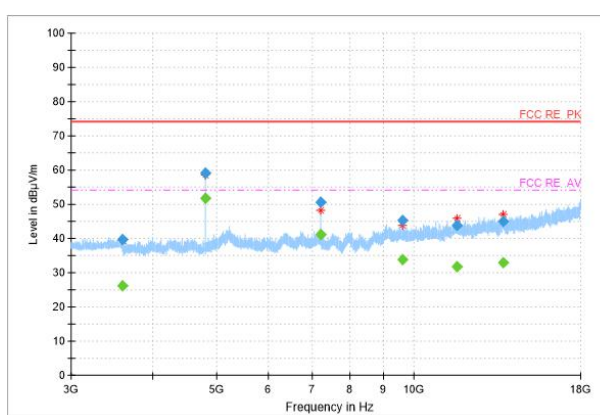


Radiated emission: GFSK, Ch78, 30MHz~1GHz

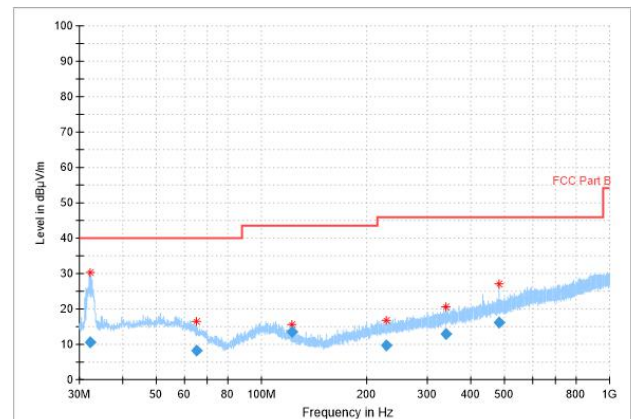


Radiated emission: GFSK, Ch78, 1GHz~3GHz

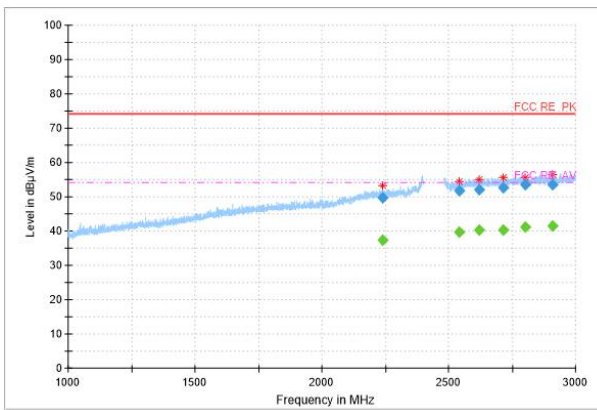


Radiated emission: GFSK, Ch78, 3GHz~18GHz

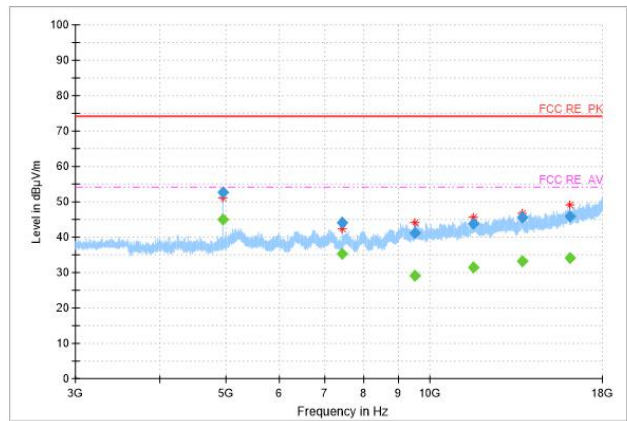

Bandedge (Low): GFSK, low channel

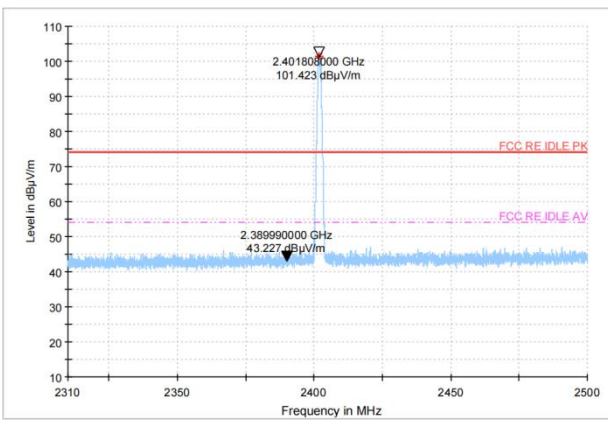


Bandedge (High): GFSK, high channel

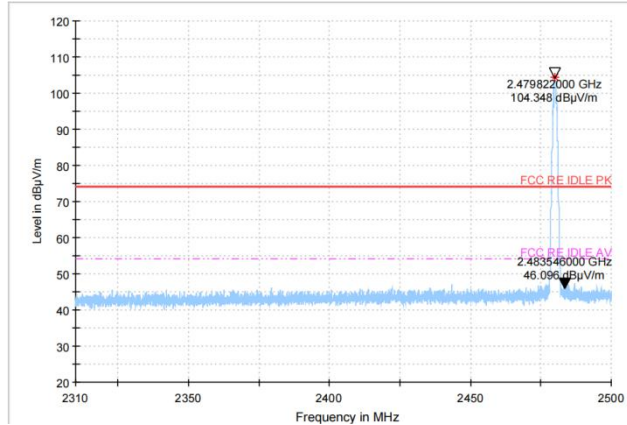


Fourthly Supply


Radiated emission: GFSK, Ch0, 30MHz~1GHz

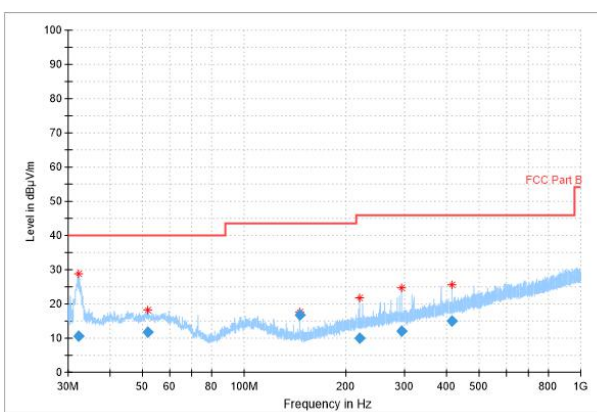


Radiated emission: GFSK, Ch0, 1GHz~3GHz

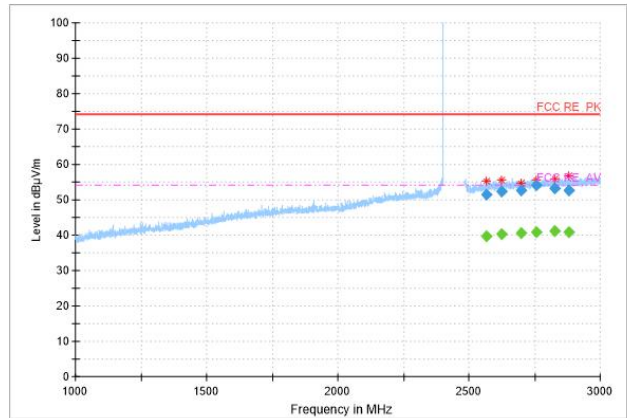


Radiated emission: GFSK, Ch0, 3GHz~18GHz

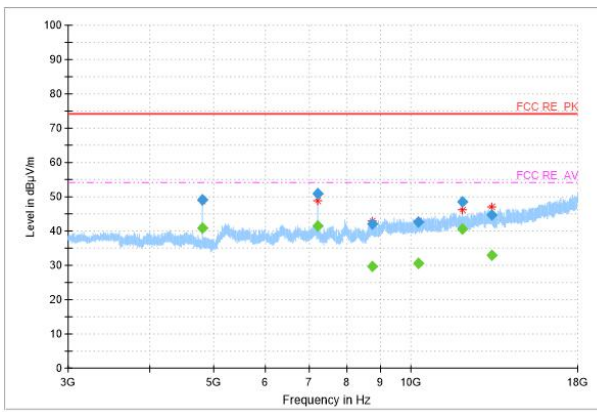


Radiated emission: GFSK, Ch78, 30MHz~1GHz

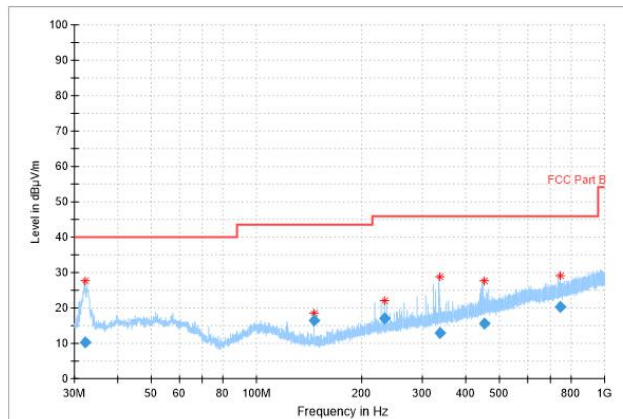


Radiated emission: GFSK, Ch78, 1GHz~3GHz

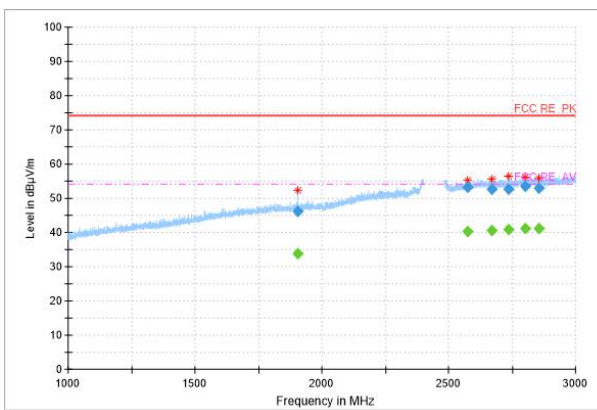


Radiated emission: GFSK, Ch78, 3GHz~18GHz

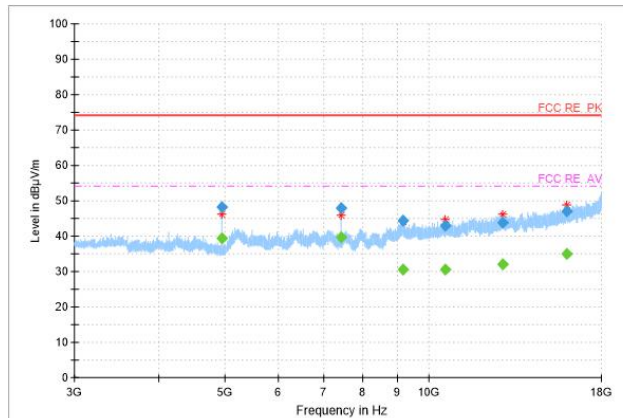

Bandedge (Low): GFSK, low channel

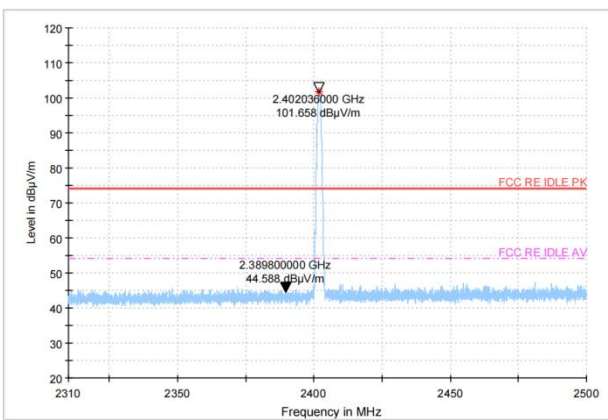

Bandedge (High): GFSK, high channel

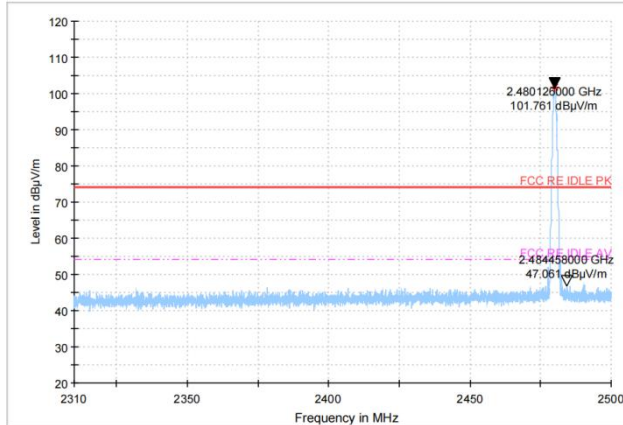



Mainly Supply

BB12

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	11.43	-14.3	25.73	V
35.2	11.43	-14	25.43	V
52.2	11.45	-12	23.45	V
335.1	12.9	-9.5	22.4	V
429.0	29.59	-7.7	37.29	V
477.9	24.53	-6.7	31.23	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
1728.8	46.76	7.9	38.86	H
2537.3	52.06	14.9	37.16	V
2602.1	52.19	15.5	36.69	H
2678.0	52.92	15.9	37.02	H
2763.4	52.7	16.3	36.4	V
2837.7	53.36	16.6	36.76	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4803.9	52.7	-4.9	57.6	V
5906.5	39.65	-3.9	43.55	H
7206.0	56.23	-2	58.23	V
9403.3	41.32	-0.1	41.42	H
12009.8	48	2	46	H
15577.7	45.38	6.5	38.88	H

GFSK Ch0 3GHz-18GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
7206.0	48.43	-2	50.43	V

GFSK CH78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	12.55	-14.3	26.85	V
35.1	11.29	-14	25.29	V
52.8	11.06	-12	23.06	H
98.3	13.11	-13.7	26.81	V
314.6	12.29	-10.3	22.59	V
461.7	24.11	-6.8	30.91	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
1711.1	46.36	7.8	38.56	V
2574.1	52.46	15.3	37.16	H
2670.2	52.89	15.9	36.99	V
2746.7	53.54	16.2	37.34	V
2837.3	53.53	16.6	36.93	H
2948.2	54.56	16.8	37.76	V

GFSK Ch78 1GHz-3GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2948.2	41.54	16.8	24.74	V

GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4959.9	44.75	-4.2	48.95	V
6341.0	41.07	-2.5	43.57	H
7440.0	52.87	-2.4	55.27	V
9069.0	42.78	-0.4	43.18	H
10830.2	42.66	1.1	41.56	H
13155.4	43.43	3.7	39.73	H

BA12
GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.2	13.24	-14.3	27.54	V
34.5	10.22	-14.1	24.32	V
35.2	11.1	-14	25.1	V
428.9	32.72	-7.7	40.42	V
433.0	35.02	-7.7	42.72	V
461.7	25.96	-6.8	32.76	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2551.4	52.77	15.1	37.67	V
2625.9	52.7	15.7	37	H
2690.5	52.59	15.9	36.69	V
2753.5	53.87	16.3	37.57	H
2799.4	53.98	16.6	37.38	V
2849.4	53.38	16.6	36.78	V

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4804.3	52.49	-4.9	57.39	V
5190.1	41.92	-1	42.92	V
7206.0	51.69	-2	53.69	H
8978.3	43.24	-0.6	43.84	V
11653.9	45.34	2.1	43.24	V
14306.9	45.49	5.4	40.09	H

GFSK CH78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.2	12.72	-14.3	27.02	V
35.3	10.64	-14	24.64	H
52.0	11.5	-12	23.5	H
334.9	12.81	-9.5	22.31	V
461.7	18.78	-6.8	25.58	V
791.8	21.02	-1.8	22.82	V

GFSK Ch78 1GHz-3GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2560.2	51.32	15.2	36.12	V
2626.1	52.15	15.7	36.45	V
2707.2	53.41	15.9	37.51	H
2748.7	54.05	16.2	37.85	H
2800.7	54.19	16.6	37.59	H
2913.8	53.07	16.8	36.27	H

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2748.7	40.89	16.2	24.69	H
2800.7	41.22	16.6	24.62	H

GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4959.8	44.76	-4.2	48.96	V
7440.0	51.86	-2.4	54.26	V
10127.3	44.08	-0.2	44.28	V
12226.4	44.26	2	42.26	V
13718.0	47.07	4.1	42.97	H
14470.2	46.02	5.1	40.92	V



$\pi/4$ DQPSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	14.96	-14.4	29.36	V
40.8	23.99	-12.7	36.69	V
59.2	16.68	-12.2	28.88	V
78.8	13.93	-18	31.93	H
148.1	13.21	-17	30.21	H
428.9	33.22	-8	41.22	V

$\pi/4$ DQPSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
1712.4	45.15	7.8	37.35	V
2529.0	52.09	14.7	37.39	H
2603.3	52.04	15.5	36.54	H
2684.9	52.57	15.9	36.67	V
2775.3	52.87	16.4	36.47	V
2842.1	53.73	16.6	37.13	H

$\pi/4$ DQPSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4804.2	54.93	-4.9	59.83	V
5982.9	40.39	-4	44.39	H
7205.9	56.42	-2	58.42	V
8940.0	42.17	-0.9	43.07	V
10683.5	42.82	0.8	42.02	H
13040.3	43.97	3.6	40.37	H

$\pi/4$ DQPSK Ch0 3GHz-18GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4804.2	44.41	-4.9	49.31	V
7205.9	46.49	-2	48.49	V

$\pi/4$ DQPSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	13.03	-14.3	27.33	V
35.2	11.96	-14	25.96	V
51.8	11.65	-12	23.65	V
102.8	9.72	-13.3	23.02	H
433.0	33.25	-7.7	40.95	V
527.0	27.29	-5.5	32.79	V

$\pi/4$ DQPSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2529.6	51.65	14.7	36.95	H
2609.1	53.1	15.6	37.5	H
2702.8	52.35	15.9	36.45	H
2800.1	53.23	16.6	36.63	V
2868.7	52.74	16.7	36.04	H
2971.4	53.48	17	36.48	H

$\pi/4$ DQPSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4960.1	46.76	-4.2	50.96	V
7440.0	52.73	-2.4	55.13	V
9166.0	41.92	-0.3	42.22	H
11218.7	44.74	1.7	43.04	H
13744.8	45.28	4.1	41.18	V
16407.1	46.53	8.1	38.43	H

8DPSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	12.27	-14.3	26.57	V
35.2	12.16	-14	26.16	V
68.5	7.91	-15.2	23.11	V
122.8	11.85	-15.4	27.25	V
431.5	15.22	-7.7	22.92	H
615.9	18.97	-3	21.97	V

8DPSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2521.0	51.33	14.6	36.73	V
2591.0	52.3	15.4	36.9	V
2676.0	52.92	15.9	37.02	H
2755.5	53.97	16.3	37.67	V
2833.3	53.68	16.6	37.08	H
2940.4	53.05	16.8	36.25	V

8DPSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4803.9	54.87	-4.9	59.77	V
5869.8	39.7	-3.9	43.6	H
7205.9	55.28	-2	57.28	V
9608.5	41.08	-0.7	41.78	H
12009.8	47.01	2	45.01	H
14604.5	44.25	5	39.25	H

8DPSK Ch0 3GHz-18GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4803.9	44.08	-4.9	48.98	V
7205.9	45.69	-2	47.69	V

8DPSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	11.31	-14.3	25.61	V
35.4	11.16	-13.9	25.06	V
122.7	12.26	-15.3	27.56	V
267.6	10.98	-11.3	22.28	H
446.8	15.48	-7.5	22.98	H
599.4	18.91	-3.5	22.41	H

8DPSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2521.2	51.11	14.6	36.51	H
2617.8	52.07	15.6	36.47	V
2704.4	53.29	15.9	37.39	H
2797.6	53.62	16.6	37.02	H
2892.5	53.9	16.7	37.2	H
2976.6	53.38	17.1	36.28	H

8DPSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4959.9	44.44	-4.2	48.64	V
7440.2	51.63	-2.4	54.03	V
9309.6	41.7	-0.2	41.9	H
11234.4	43.31	1.7	41.61	V
13151.0	43.77	3.7	40.07	H
15668.5	45.9	6.8	39.1	H

Secondary Supply

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.3	10.48	-14.2	24.68	V
56.0	11.01	-12.1	23.11	H
335.1	12.9	-9.5	22.4	V
479.9	18.35	-6.7	25.05	V
527.1	17.33	-5.5	22.83	V
704.2	19.79	-2.8	22.59	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2269.8	49.33	13	36.33	H
2538.7	52.38	14.9	37.48	H
2598.9	52.73	15.5	37.23	H
2682.2	52.42	15.9	36.52	H
2752.3	53.29	16.2	37.09	H
2829.7	52.86	16.6	36.26	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4803.7	49.82	-4.9	54.72	V
5927.5	40.47	-4	44.47	H
7206.0	50.09	-2	52.09	V
10010.8	42.4	-0.6	43	H
11533.3	44.45	2.3	42.15	V
13286.7	44.71	3.5	41.21	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.3	10.5	-14.2	24.7	V
56.6	11.23	-12.2	23.43	H
122.7	13.33	-15.3	28.63	V
334.9	12.91	-9.5	22.41	V
449.3	15.77	-7.4	23.17	V
591.7	18.63	-3.9	22.53	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2237.6	49.79	12.7	37.09	V
2349.3	50.33	13.3	37.03	H
2586.8	51.99	15.4	36.59	H
2675.2	52.81	15.9	36.91	H
2755.5	52.89	16.3	36.59	H
2840.1	53.34	16.6	36.74	V

GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4960.0	46.74	-4.2	50.94	V
6514.0	40.18	-2.6	42.78	H
8631.2	39.93	-2.1	42.03	H
10799.8	43.62	1.1	42.52	H
13139.2	43.64	3.7	39.94	V
16319.9	46.96	8	38.96	V



Thirdly Supply

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.3	10.71	-14.2	24.91	V
52.3	11.4	-12	23.4	H
122.8	11.97	-15.4	27.37	V
273.8	11.2	-11	22.2	H
492.0	16.45	-6.6	23.05	H
780.2	20.81	-1.9	22.71	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2164.0	48.72	12.2	36.52	H
2300.1	50.08	13.2	36.88	H
2519.9	51.59	14.6	36.99	H
2619.0	52.2	15.6	36.6	H
2745.1	53.28	16.2	37.08	V
2850.8	52.95	16.6	36.35	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4003.0	43.97	-5.6	49.57	V
4804.2	54.6	-4.9	59.5	V
6271.9	41.48	-2.6	44.08	V
7206.0	53.98	-2	55.98	V
9342.5	41.63	-0.2	41.83	V
12009.9	47.25	2	45.25	V

GFSK Ch0 3GHz-18GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4804.2	48.94	-4.9	53.84	V

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	10.57	-14.3	24.87	V
65.0	8.27	-14	22.27	V
122.7	13.43	-15.3	28.73	V
228.7	9.74	-12.5	22.24	V
338.6	12.95	-9.5	22.45	V
479.9	16.18	-6.7	22.88	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2239.6	49.85	12.8	37.05	H
2540.5	51.66	14.9	36.76	V
2620.8	51.97	15.7	36.27	V
2715.7	52.69	16	36.69	V
2800.8	53.56	16.6	36.96	H
2910.0	53.56	16.8	36.76	V

GFSK Ch78 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4959.6	52.76	-4.2	56.96	H
7440.0	44.25	-2.4	46.65	H
9521.1	41.18	-0.5	41.68	H
11610.0	43.85	2.2	41.65	H
13710.1	45.61	4.1	41.51	H
16142.6	45.98	7.6	38.38	H

Fourthly Supply

GFSK Ch0 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.2	10.64	-14.3	24.94	V
51.6	11.7	-12	23.7	H
146.2	16.64	-17.1	33.74	H
220.7	10.02	-12.5	22.52	V
294.0	11.94	-11	22.94	V
412.7	14.93	-7.8	22.73	V

GFSK Ch0 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2565.3	51.6	15.2	36.4	V
2622.0	52.45	15.7	36.75	V
2696.9	52.61	15.9	36.71	V
2758.0	54.04	16.3	37.74	H
2824.4	53.11	16.6	36.51	V
2880.8	52.59	16.7	35.89	H

GFSK Ch0 1GHz-3GHz (Average)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2758.0	40.79	16.3	24.49	H

GFSK Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4804.4	49.22	-4.9	54.12	V
7206.0	50.88	-2	52.88	V
8730.5	42.11	-1.8	43.91	V
10295.2	42.57	0.2	42.37	V
12010.0	48.41	2	46.41	H
13296.2	44.8	3.5	41.3	H

GFSK Ch78 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
32.1	10.37	-14.3	24.67	V
146.2	16.54	-17.1	33.64	H
232.9	17.05	-12.5	29.55	V
335.1	12.99	-9.5	22.49	V
449.5	15.67	-7.4	23.07	V
744.1	20.33	-2.3	22.63	V

GFSK Ch78 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
1904.5	46.27	9.2	37.07	V
2576.3	53.2	15.3	37.9	H
2669.4	52.62	15.9	36.72	H
2736.8	52.78	16.1	36.68	H
2800.3	53.58	16.6	36.98	V
2856.4	52.91	16.7	36.21	H

GFSK Ch78 3GHz-18GHz (Peak)

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4960.4	48.33	-4.2	52.53	H
7440.0	47.93	-2.4	50.33	H
9166.1	44.4	-0.3	44.7	H
10573.6	43.04	0.8	42.24	V
12867.1	43.94	3.2	40.74	H
15999.5	46.93	7.7	39.23	H

6.5. Time Of Occupancy (Dwell Time)

6.5.1. Measurement Limit

Standard	Limit (ms)
FCC 47 Part 15.247 (a) (1) (iii)	< 400

6.5.2. Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4

1. Connect the EUT through cable and divide with CMW 270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Max hold.
9. Use the marker-delta function, and record it.

Note: For AFH mode, Test Period = 0.4 (second/ channel) x 20 Channel = 8 sec,

For FHSS mode, Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec,


So the Time of Occupancy (Dwell Time) of AFH mode = Time of Occupancy (Dwell Time) of FHSS mode / 79 Channel x 20 Channel

Modulation type	Frequency (MHz)	Time slot length (ms)	Hops Number	Dwell Time (ms)	Limit (ms)	Conclusion	
GFSK	2441	DH1	0.4	173	69.2	400	P
		DH3	1.66	119	198.02		
		DH5	2.90	85	246.16		
$\pi/4$ DQPS K	2441	2DH1	0.4	169	67.6	400	P
		2DH3	1.65	121	199.41		
		2DH5	2.91	83	241.7		
8DPSK	2441	3DH1	0.40	165	66	400	P
		3DH3	1.65	119	196.11		
		3DH5	2.91	90	262.08		


Note: Dwell time = Time slot length *Hops Number

Measurement Result


For GFSK, Ch39,Packet DH1
Time of occupancy (Dwell Time):0.40ms

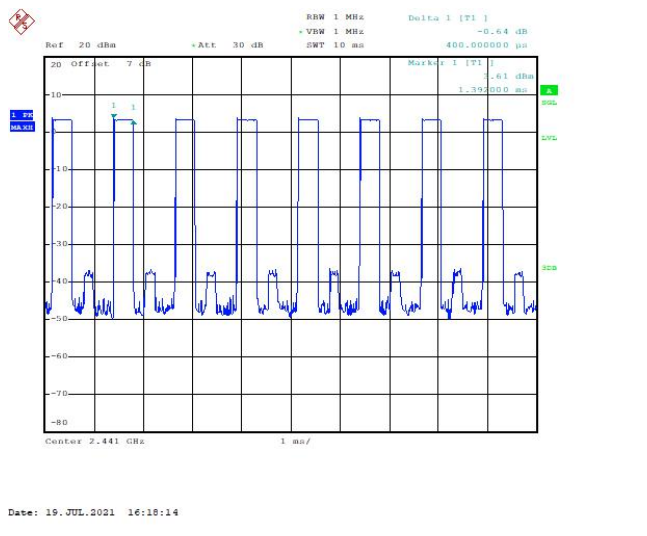


For GFSK, Ch39,Packet DH1
Number of Transmissions Measurement

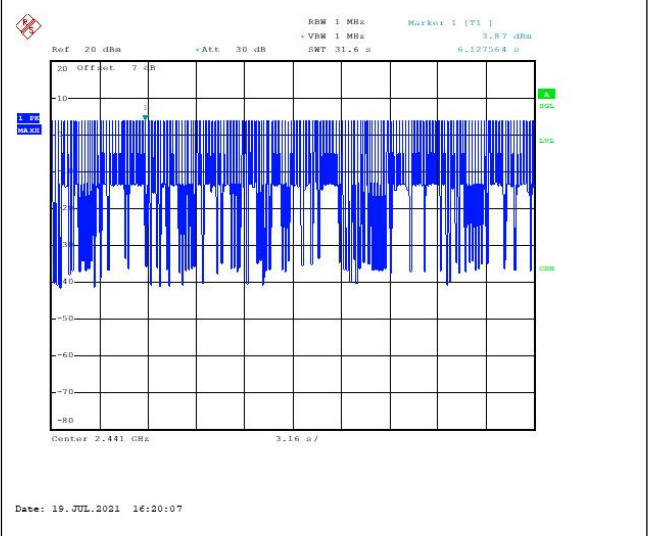

For GFSK, Ch39,Packet DH3
Time of occupancy (Dwell Time):1.66ms

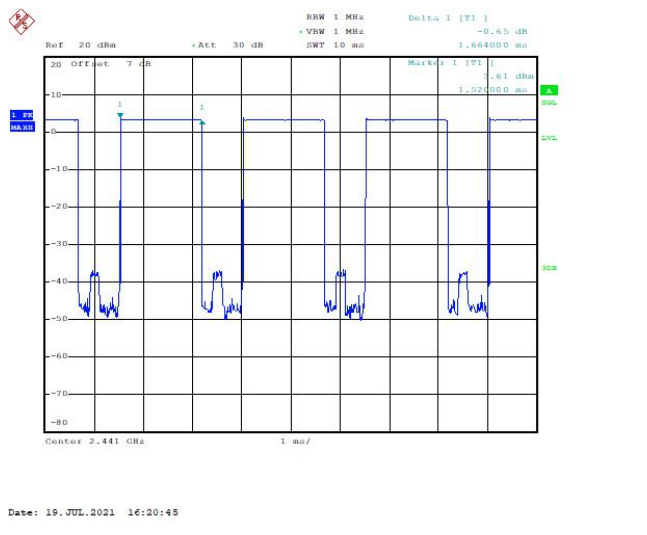


For GFSK, Ch39,Packet DH3
Number of Transmissions Measurement

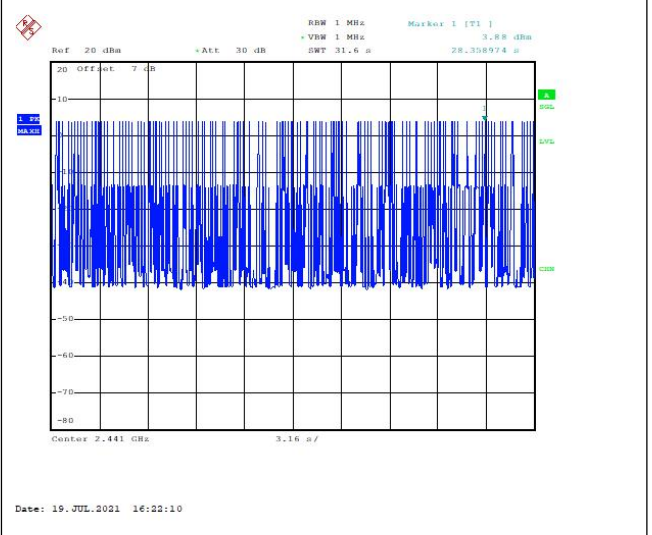


For GFSK, Ch39,Packet DH5
Time of occupancy (Dwell Time): 2.90ms

For GFSK, Ch39,Packet DH5
Number of Transmissions Measurement

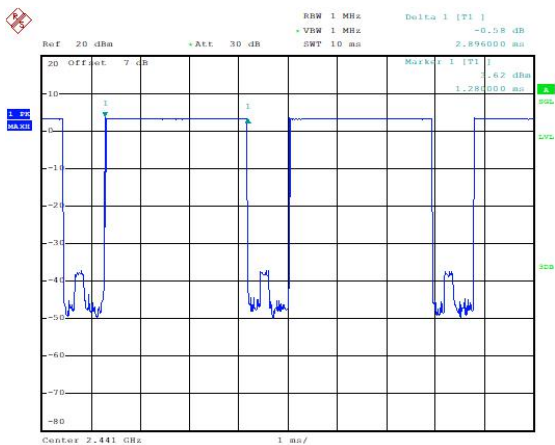


Date: 19.JUL.2021 16:22:50

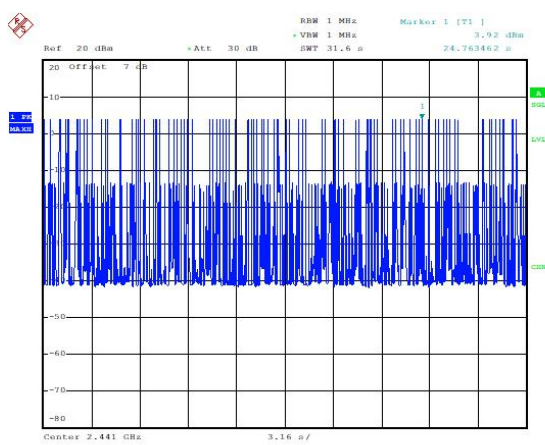


Date: 19.JUL.2021 16:28:50

For $\pi/4$ DQPSK, Ch39,Packet 2DH1
Time of occupancy (Dwell Time):0.4ms

For $\pi/4$ DQPSK, Ch39,Packet 2DH1
Number of Transmissions Measurement

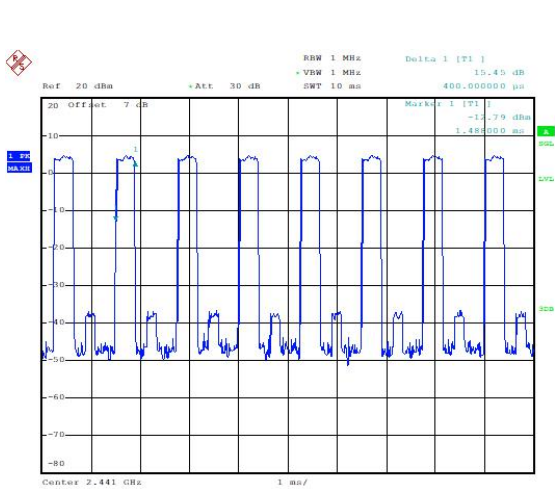


Date: 19.JUL.2021 16:25:16

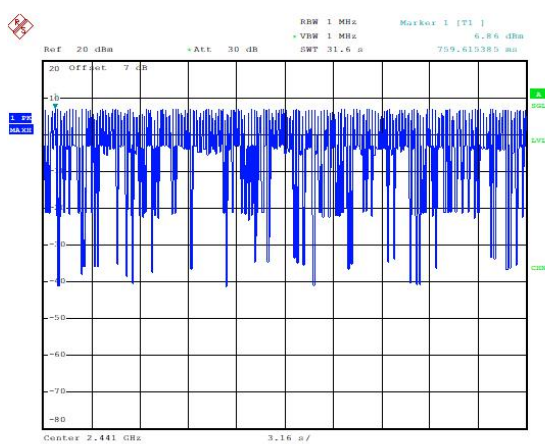


Date: 19.JUL.2021 16:27:08

For $\pi/4$ DQPSK, Ch39,Packet 2DH3
Time of occupancy (Dwell Time):1.65 ms

For $\pi/4$ DQPSK, Ch39,Packet 2DH3
Number of Transmissions Measurement

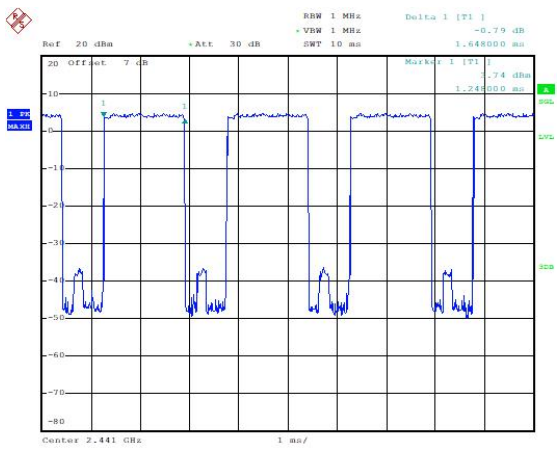


Date: 19.JUL.2021 16:27:29

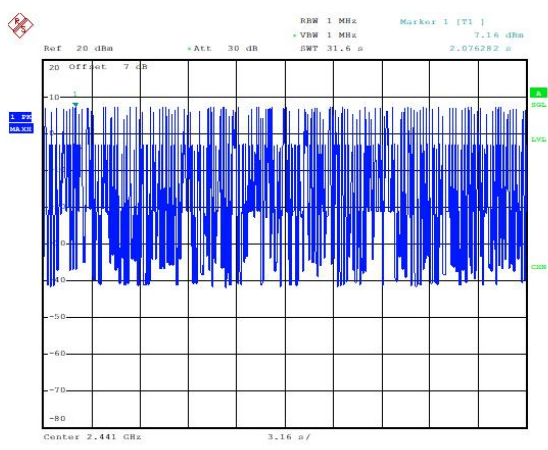


Date: 19.JUL.2021 16:28:46

For $\pi/4$ DQPSK, Ch39,Packet 2DH5
Time of occupancy (Dwell Time):2.91 ms

For $\pi/4$ DQPSK, Ch39,Packet 2DH5
Number of Transmissions Measurement

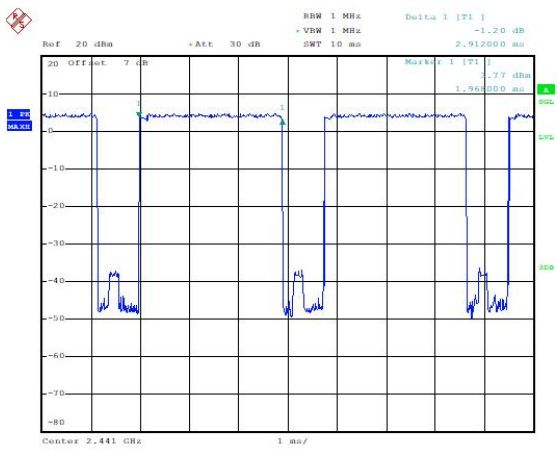


Date: 19.JUL.2021 16:29:41

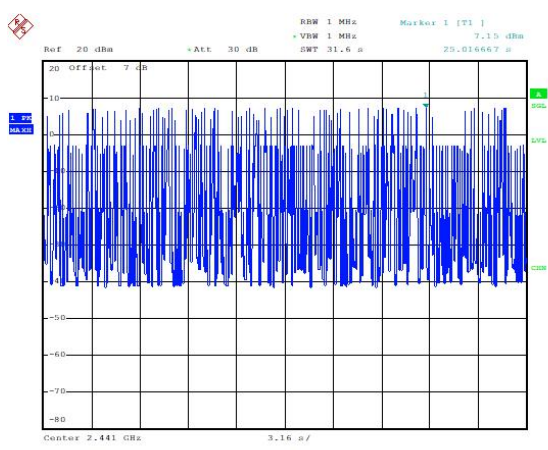


Date: 19.JUL.2021 16:31:22

For 8DPSK, Ch39,Packet 3DH1
Time of occupancy (Dwell Time):0.40ms

For 8DPSK, Ch39,Packet 3DH1
Number of Transmissions Measurement

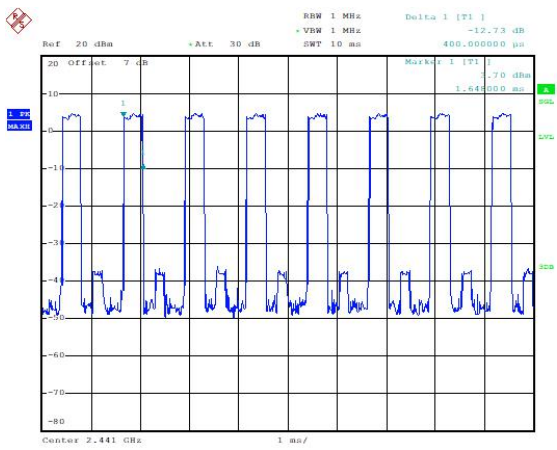


Date: 19.JUL.2021 16:36:21

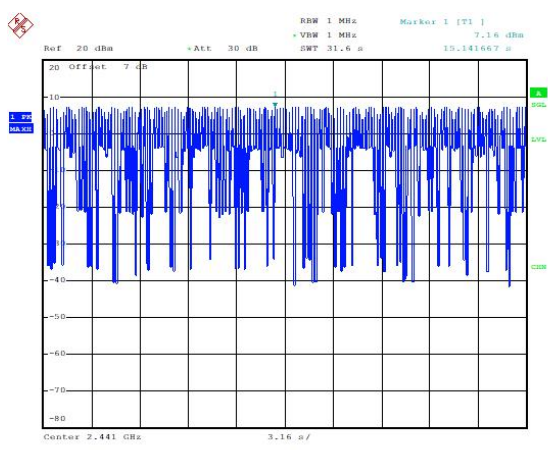


Date: 19.JUL.2021 16:37:14

For 8DPSK, Ch39,Packet 3DH3
Time of occupancy (Dwell Time):1.65ms

For 8DPSK, Ch39,Packet 3DH3
Number of Transmissions Measurement

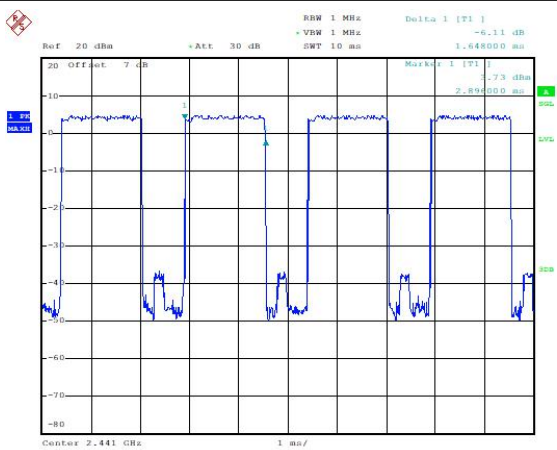



Date: 19.JUL.2021 17:07:09

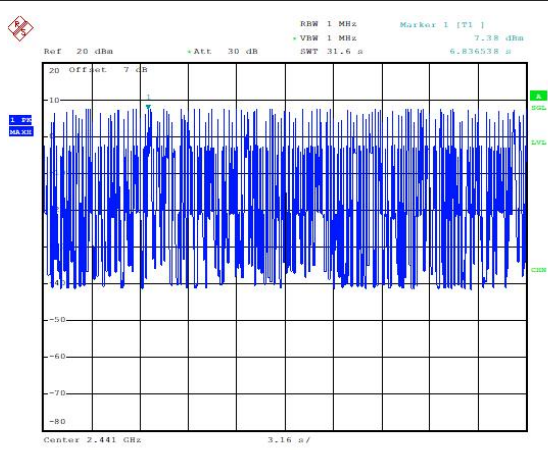

Date: 19.JUL.2021 17:09:24

For 8DPSK, Ch39, Packet 3DH5
Time of occupancy (Dwell Time): 2.91ms

For 8DPSK, Ch39, Packet 3DH5
Number of Transmissions Measurement

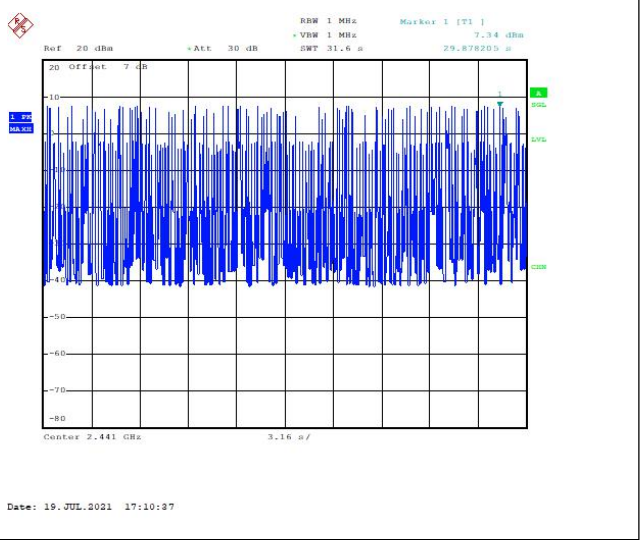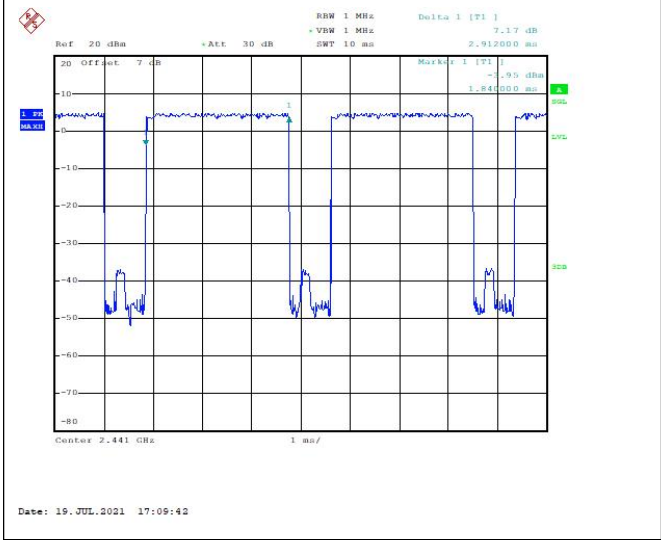

6.6. 20dB Bandwidth

6.6.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247 (a) (1)	N/A

6.6.2. Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

Measurement Result

Note: Bold font is the maximum Value

20dB Bandwidth: GFSK, Ch0(MHz)	0.581	20dB Bandwidth: GFSK, Ch39(MHz)	0.581
<p>Ref: 15 dBm, Att: 30 dB, RBW: 20 kHz, VBW: 50 kHz, SWT: 30 ms. Marker 1 [T1]: 4.19 dBm @ 2.401826923 GHz. Temp 1 [T1 nB]: -3.473 dBm @ 2.401826923 GHz. Temp 2 [T1 nB]: -1.70 dBm @ 2.40228654 GHz. Center: 2.402 GHz, Span: 3 MHz.</p>		<p>Ref: 15 dBm, Att: 30 dB, RBW: 20 kHz, VBW: 50 kHz, SWT: 30 ms. Marker 1 [T1]: 3.38 dBm @ 2.440826923 GHz. Temp 1 [T1 nB]: -14.49 dBm @ 2.440826923 GHz. Temp 2 [T1 nB]: -11.29 dBm @ 2.44128654 GHz. Center: 2.441 GHz, Span: 3 MHz.</p>	

<p>20dB Bandwidth: GFSK, Ch78(MHz)</p>	<p>0.581</p>	<p>20dB Bandwidth: $\pi/4$ DQPSK, Ch0(MHz)</p>	<p>0.62</p>
<p>Date: 18.JUL.2021 11:42:28</p>		<p>Date: 18.JUL.2021 11:44:56</p>	
<p>20dB Bandwidth: $\pi/4$ DQPSK, Ch39(MHz)</p>	<p>0.625</p>	<p>20dB Bandwidth: $\pi/4$ DQPSK, Ch78(MHz)</p>	<p>0.62</p>
<p>Date: 18.JUL.2021 11:46:10</p>		<p>Date: 18.JUL.2021 11:47:19</p>	

<p>20dB Bandwidth: 8DPSK, Ch0(MHz)</p>	<p>0.581</p>	<p>20dB Bandwidth: 8DPSK, Ch39(MHz)</p>	<p>0.841</p>
<p>Ref 15 dBm +Att 30 dB +RBW 20 kHz +VBW 50 kHz SWT 30 ms Marker 1 [T1] 2.401996385 GHz 3.49 dBm Offset 7 dB dB [T1] 20.00 dB Temp 1 [T1 dB] -14.55 dBm Temp 2 [T1 dB] -14.53 dBm Center 2.402 GHz 300 kHz Span 3 MHz</p> <p>Date: 13 JUL 2021 11:48:20</p>		<p>Ref 15 dBm +Att 30 dB +RBW 20 kHz +VBW 50 kHz SWT 30 ms Marker 1 [T1] 2.441278846 GHz 2.77 dBm Offset 7 dB dB [T1] 20.00 dB Temp 1 [T1 dB] -14.55 dBm Temp 2 [T1 dB] -14.55 dBm Center 2.441 GHz 300 kHz Span 3 MHz</p> <p>Date: 13 JUL 2021 11:49:39</p>	
<p>20dB Bandwidth: 8DPSK, Ch78(MHz)</p>	<p>0.591</p>	<p>/</p>	<p>/</p>
<p>Ref 15 dBm +Att 30 dB +RBW 20 kHz +VBW 50 kHz SWT 30 ms Marker 1 [T1] 2.479996385 GHz 2.74 dBm Offset 7 dB dB [T1] 20.00 dB Temp 1 [T1 dB] -14.59 dBm Temp 2 [T1 dB] -14.07 dBm Center 2.48 GHz 300 kHz Span 3 MHz</p> <p>Date: 13 JUL 2021 11:50:40</p>			

6.7 Carrier Frequency Separation

6.7.1. Measurement Limit

Standard	Limit (KHz)
FCC 47 Part 15.247 (a) (1)	Over 25KHz or (2/3)*20dB bandwidth

6.7.2. Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

Measurement Result

Note: Bold font is the maximum Value

Carrier separation measurement: GFSK, Ch0 (kHz)	995.2	Carrier separation measurement: $\pi/4$ DQPSK, Ch39(kHz)	992
<p>Ref 20 dBm +Att 30 dB +RBW 300 kHz +VBW 300 kHz SWT 2.5 ms Delta 1 [T1] 0.01 dB</p> <p>Start 2.4395 GHz 200 kHz/ Stop 2.4415 GHz</p> <p>Date: 19.JUL.2021 17:13:28</p>		<p>Ref 20 dBm +Att 30 dB +RBW 300 kHz +VBW 300 kHz SWT 2.5 ms Delta 1 [T1] -0.49 dB</p> <p>Start 2.4395 GHz 200 kHz/ Stop 2.4415 GHz</p> <p>Date: 19.JUL.2021 17:14:04</p>	

<p>Carrier separation measurement: 8DPSK, Ch39(kHz)</p>	<p>1328</p>	<p>/</p>
<p>Ref: 20 dBm Offset: 7 dB RBW: 300 kHz VBW: 300 kHz SWT: 2.5 ms Delta: 1 [71] Mark: 1 [71]</p> <p>Start: 2.4395 GHz Stop: 2.4415 GHz</p> <p>Date: 19 JUL 2021 17:16:17</p>		

6.8 Number Of Hopping Channels

6.8.1. Measurement Limit


Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels

6.8.2. Test procedure


The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW \geq RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.


Measurement Result:

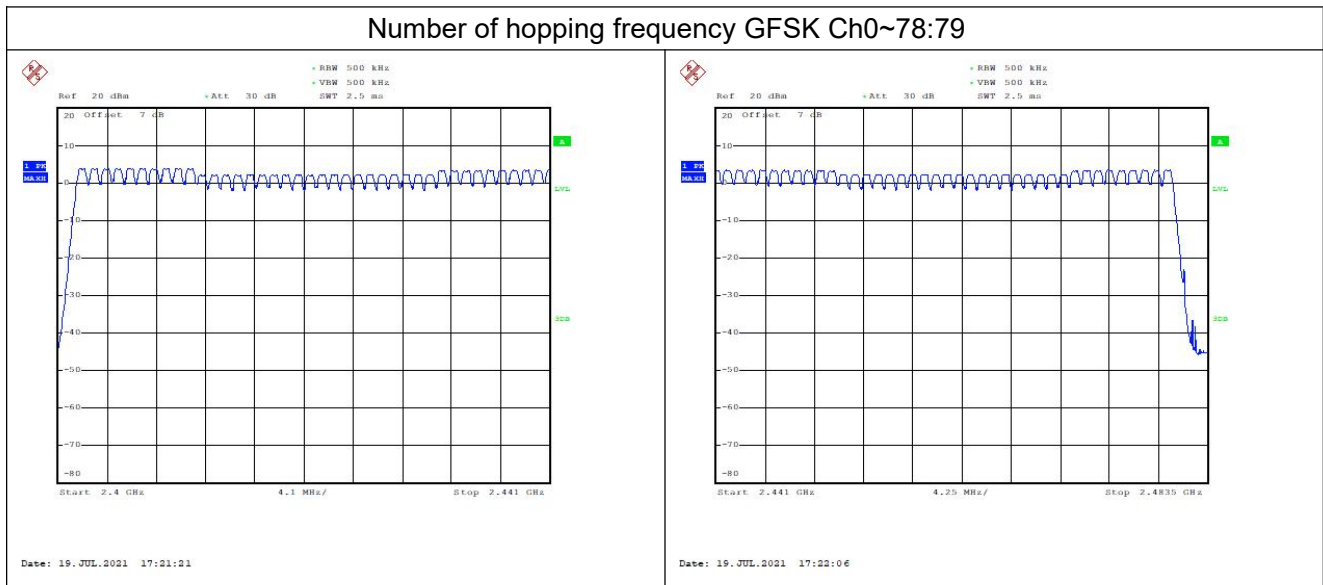

Number of hopping frequency $\pi/4$ DQPSK Ch0~78:79

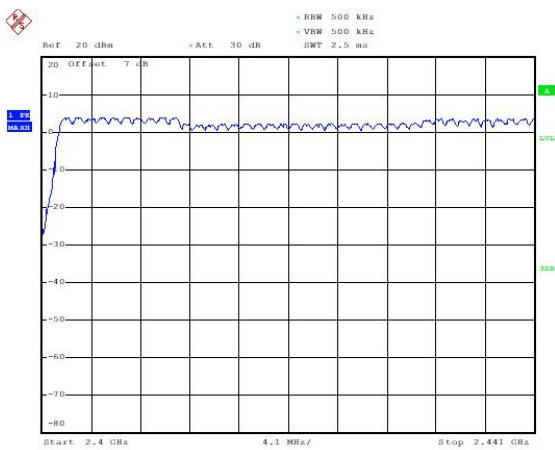


Date: 19.JUL.2021 17:28:04

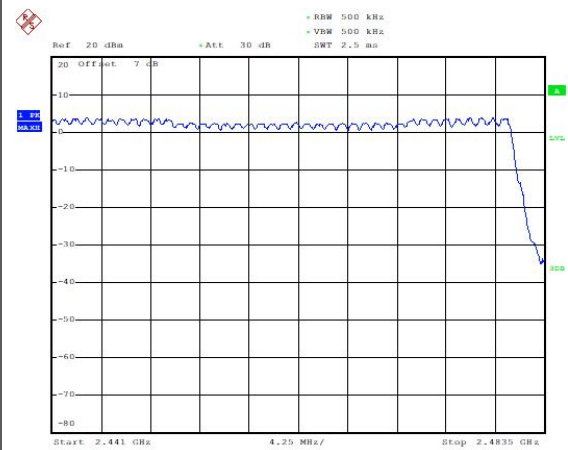


Date: 19.JUL.2021 17:29:22

Number of hopping frequency 8PSK Ch0~78:79

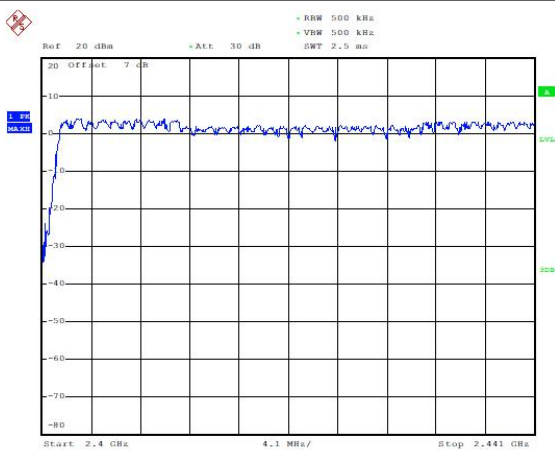

Date: 19.JUL.2021 17:24:09

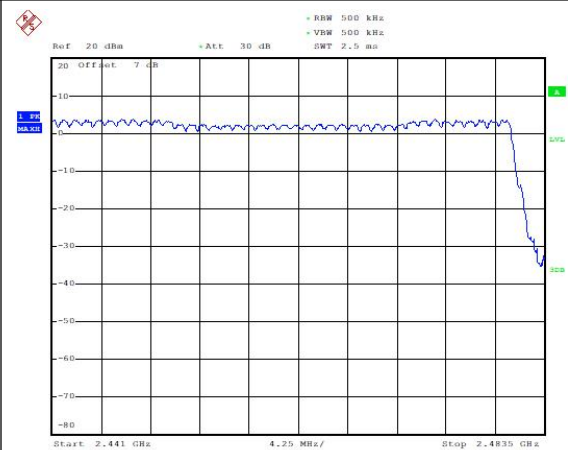

Date: 19.JUL.2021 17:25:16

7. Test Equipment List

7.1. Conducted Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ26	101091	R&S	2021-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z006 -0007	TDL-Lambda	2021-05-10	1 year
3	Eagle Test Software	Eagle V3.1 FCC BT/WIFI	N/A	ECIT	N/A	N/A
4	Wireless Connectivity Tester	CMW270	100919	R&S	2021-05-10	1 year

7.2. Radiated Emission Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2021-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2021-03-03	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-51 5	Schwarzbeck	2021-02-03	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	3 years
5	Universal Radio Communication Tester	CMW500	104178	R&S	2021-05-10	1 year
6	EMI Test Software	EMC32 V 9.15.00	N/A	R&S	N/A	N/A

Anechoic chamber

Fully anechoic chamber by ETS.

Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2402MHz-2480MHz	95%	0.544dB
Frequency Band Edges-Conducted	2402MHz-2480MHz	95%	0.544dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
Dwell Time	2402MHz-2480MHz	95%	0.218ms
20dB Bandwidth	2402MHz-2480MHz	95%	62.04Hz
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 12th day of April 2021.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****