

TEST REPORT

Product Name : Bluetooth Headset
Brand Mark : LEVN
Model No. : CT001
Extension Model : CT002;CT003;CT004;CT005;CT006;
CT007;CT 008;CT009;CT010
FCC ID : WSG-CT001
Report Number : BLA-EMC-202303-A1002
Date of Sample Receipt : 2023/3/6
Date of Test : 2023/3/7 to 2023/3/17
Date of Issue : 2023/3/17
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

SKY WING Communication Electronics Co., Ltd
No.10 Road 63#, Long yan, Humen Town, Dongguan City,
Guangdong,China

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: *charlie*
Approved by: *Blue Zheng*

Review by: *Sueels*
Date: 2023/3/17



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/3/17	Original

BlueAsia

TABLE OF CONTENTS

1 TEST SUMMARY	6
2 GENERAL INFORMATION	8
3 GENERAL DESCRIPTION OF E.U.T.....	8
4 TEST ENVIRONMENT	9
5 TEST MODE	9
6 MEASUREMENT UNCERTAINTY	9
7 DESCRIPTION OF SUPPORT UNIT	10
8 LABORATORY LOCATION	10
9 TEST INSTRUMENTS LIST	11
10 DWELL TIME	14
10.1 LIMITS	14
10.2 BLOCK DIAGRAM OF TEST SETUP	14
10.3 TEST DATA	15
11 HOPPING CHANNEL NUMBER	16
11.1 LIMITS	16
11.2 BLOCK DIAGRAM OF TEST SETUP	16
11.3 TEST DATA	16
12 CARRIER FREQUENCIES SEPARATION	17
12.1 LIMITS	17
12.2 BLOCK DIAGRAM OF TEST SETUP	17
12.3 TEST DATA	17
13 20DB BANDWIDTH	18
13.1 BLOCK DIAGRAM OF TEST SETUP	18
13.2 TEST DATA	18
14 CONDUCTED PEAK OUTPUT POWER	19
14.1 LIMITS	19
14.2 BLOCK DIAGRAM OF TEST SETUP	19
14.3 TEST DATA	20
15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	21

15.1 LIMITS	21
15.2 BLOCK DIAGRAM OF TEST SETUP	21
15.3 PROCEDURE	21
15.4 TEST DATA	23
16 RADIATED SPURIOUS EMISSIONS	25
16.1 LIMITS	25
16.2 BLOCK DIAGRAM OF TEST SETUP	26
16.3 PROCEDURE	26
16.4 TEST DATA	28
17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	36
17.1 LIMITS	36
17.2 BLOCK DIAGRAM OF TEST SETUP	37
17.3 PROCEDURE	37
17.4 TEST DATA	39
18 ANTENNA REQUIREMENT	43
18.1 CONCLUSION	43
19 CONDUCTED SPURIOUS EMISSIONS	44
19.1 LIMITS	44
19.2 BLOCK DIAGRAM OF TEST SETUP	45
19.3 TEST DATA	45
20 CONDUCTED BAND EDGES MEASUREMENT	46
20.1 LIMITS	46
20.2 BLOCK DIAGRAM OF TEST SETUP	47
20.3 TEST DATA	47
21 APPENDIX	48
21.1 MAXIMUM CONDUCTED OUTPUT POWER	48
21.2 -20dB BANDWIDTH	53
21.3 OCCUPIED CHANNEL BANDWIDTH	58
21.4 BAND EDGE	63
21.5 BAND EDGE(HOPPING)	70
21.6 CONDUCTED RF SPURIOUS EMISSION	77
21.7 CARRIER FREQUENCIES SEPARATION	87
21.8 NUMBER OF HOPPING CHANNEL	89

21.9 DWELL TIME 91

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 101

APPENDIX B: PHOTOGRAPHS OF EUT 103

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section	47 CFR Part 15, Subpart C 15.247(d)	Pass

		11.13.3.2		
--	--	-----------	--	--

BlueAsia

2 GENERAL INFORMATION

Applicant	SKY WING Communication Electronics Co., Ltd
Address	No.10 Road 63#, Long yan, Humen Town, Dongguan City, Guangdong,China
Manufacturer	SKY WING Communication Electronics Co., Ltd
Address	No.10 Road 63#, Long yan, Humen Town, Dongguan City, Guangdong,China
Factory	N/A
Address	N/A
Product Name	Bluetooth Headset
Test Model No.	CT001
Extension Model	CT002;CT003;CT004;CT005;CT006;CT007;CT008;CT009;CT010
Remark	All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are model name for commercial purpose.

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK,8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	Ceramic Antenna
Antenna Gain:	2.67dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1,DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK,8DPSK modulation were all pre-scanned Only the 8DPSK of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14100889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13

Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A

BlueAsia


10 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

10.2 BLOCK DIAGRAM OF TEST SETUP

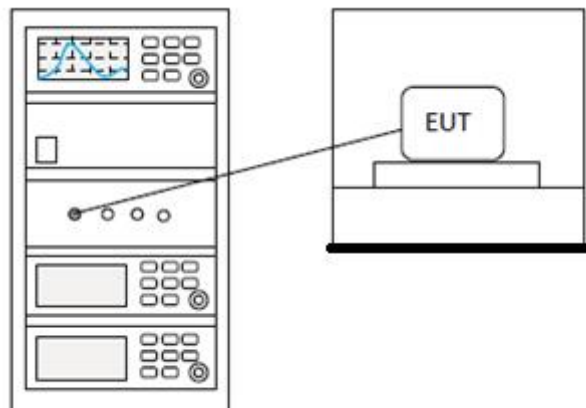

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


11 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

11.2 BLOCK DIAGRAM OF TEST SETUP

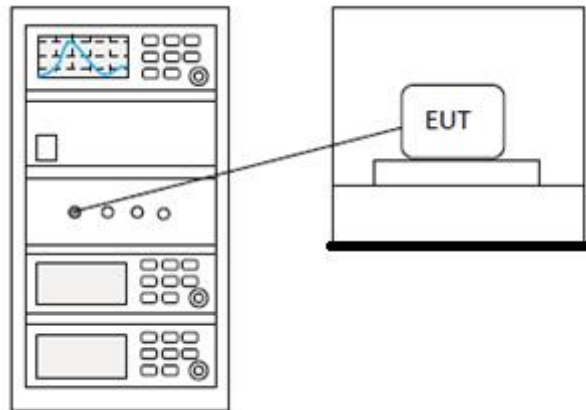

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


12 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 LIMITS

Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

12.2 BLOCK DIAGRAM OF TEST SETUP

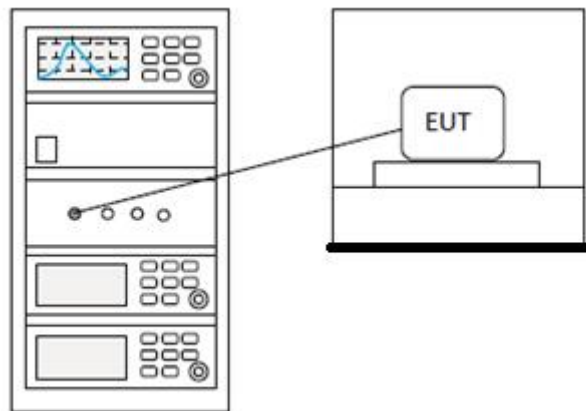


12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 BLOCK DIAGRAM OF TEST SETUP

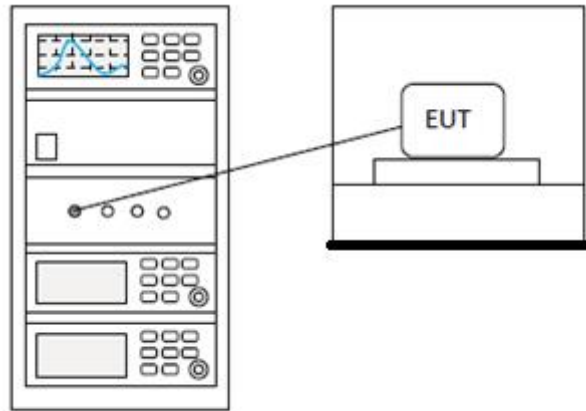

13.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

14.2 BLOCK DIAGRAM OF TEST SETUP

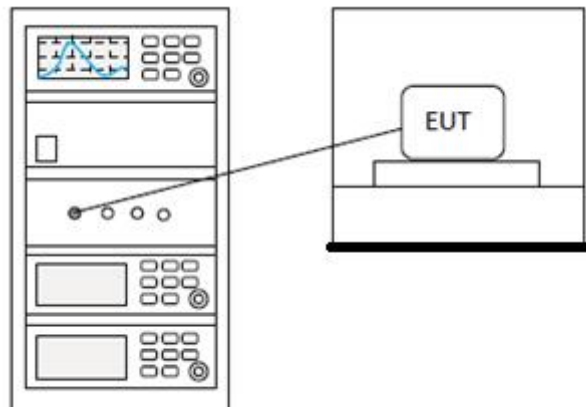

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia