


[TestMode: TX highest channel]; [Polarity: Vertical]

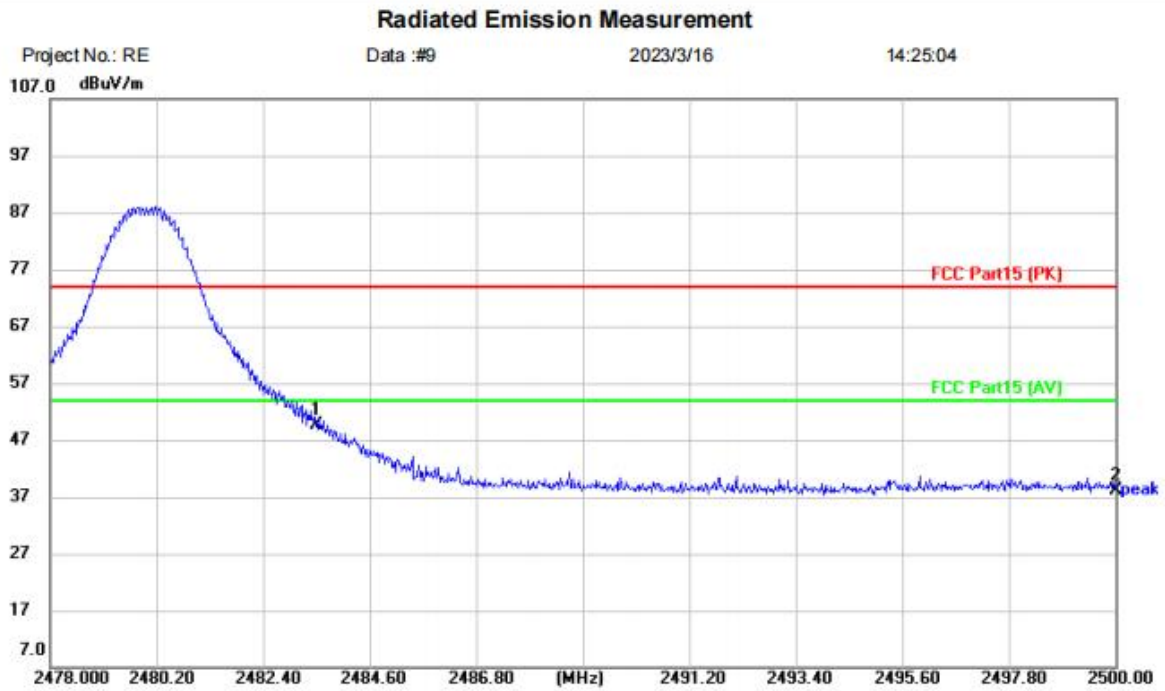


Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth Headset
 M/N: CT001
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	53.68	-3.96	49.72	74.00	-24.28	peak	
2		2500.000	42.21	-4.00	38.21	74.00	-35.79	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

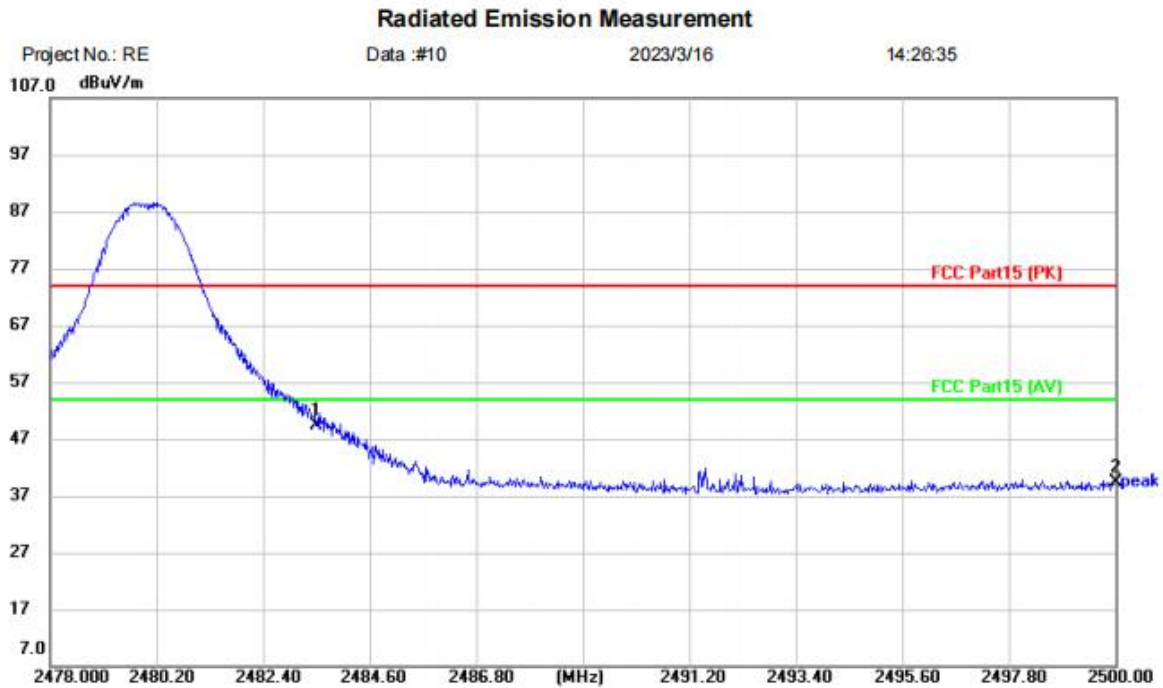

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth Headset
 M/N: CT001
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	53.44	-3.96	49.48	74.00	-24.52	peak	
2		2500.000	43.46	-4.00	39.46	74.00	-34.54	peak	

Test Result: Pass

18 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


18.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.67dBi.

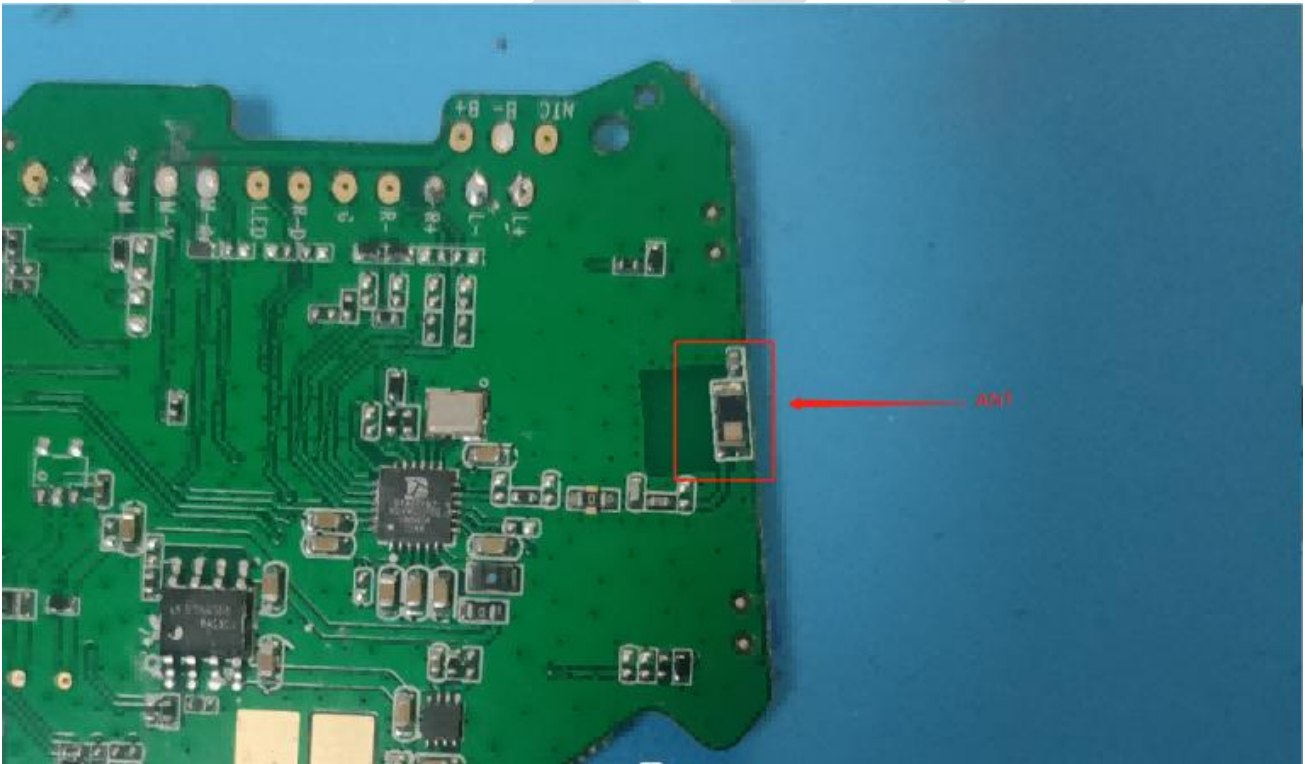


19 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

19.2 BLOCK DIAGRAM OF TEST SETUP

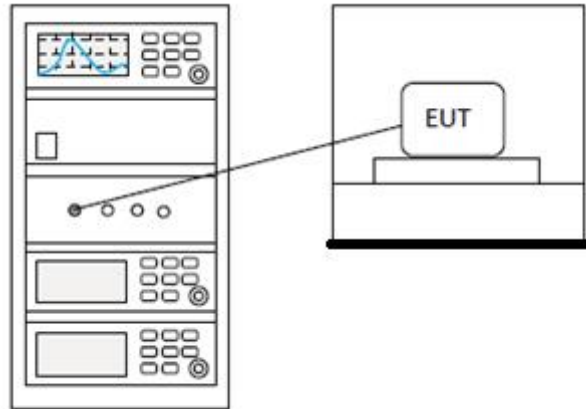

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


20 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

20.2 BLOCK DIAGRAM OF TEST SETUP

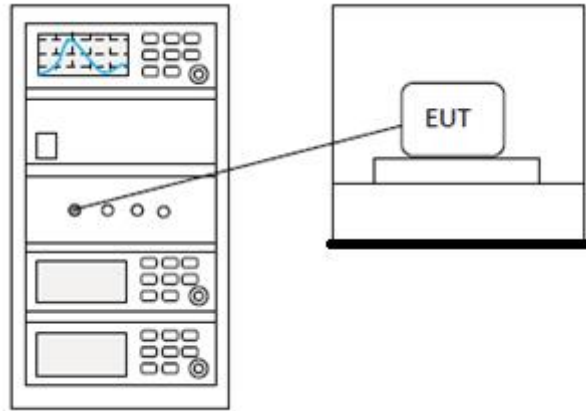

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


21 APPENDIX

Appendix1


21.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVHT	1-DH1	2402	Ant1	-0.414	21	Pass
NVHT	1-DH1	2441	Ant1	0.492	21	Pass
NVHT	1-DH1	2480	Ant1	1.477	21	Pass
NVHT	2-DH1	2402	Ant1	1.553	21	Pass
NVHT	2-DH1	2441	Ant1	2.534	21	Pass
NVHT	2-DH1	2480	Ant1	3.455	21	Pass
NVNT	3-DH1	2402	Ant1	-0.889	21	Pass
NVNT	3-DH1	2441	Ant1	0.096	21	Pass
NVNT	3-DH1	2480	Ant1	1.146	21	Pass


Power NVHT 1-DH1 2402MHz Ant1

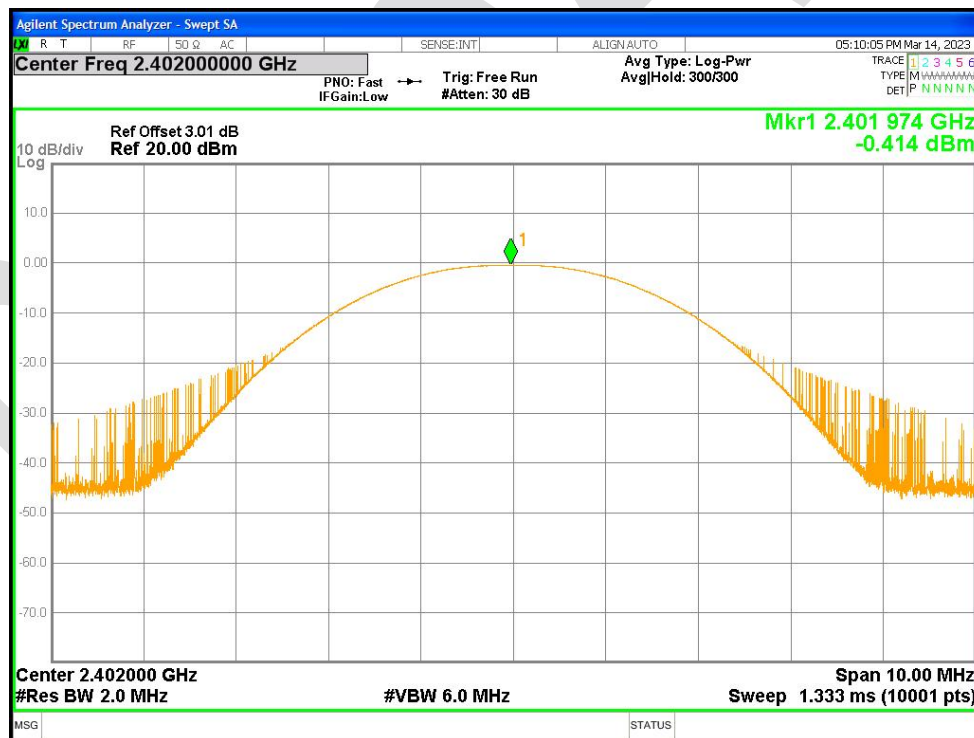


Power NVHT 1-DH1 2441MHz Ant1

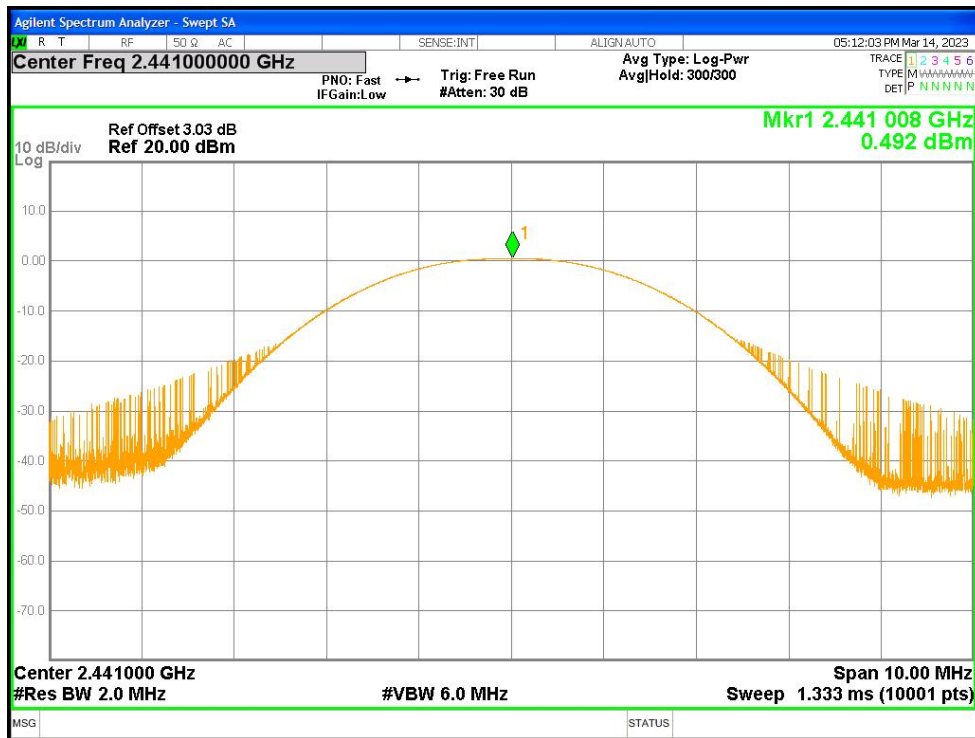


Power NVHT 1-DH1 2480MHz Ant1

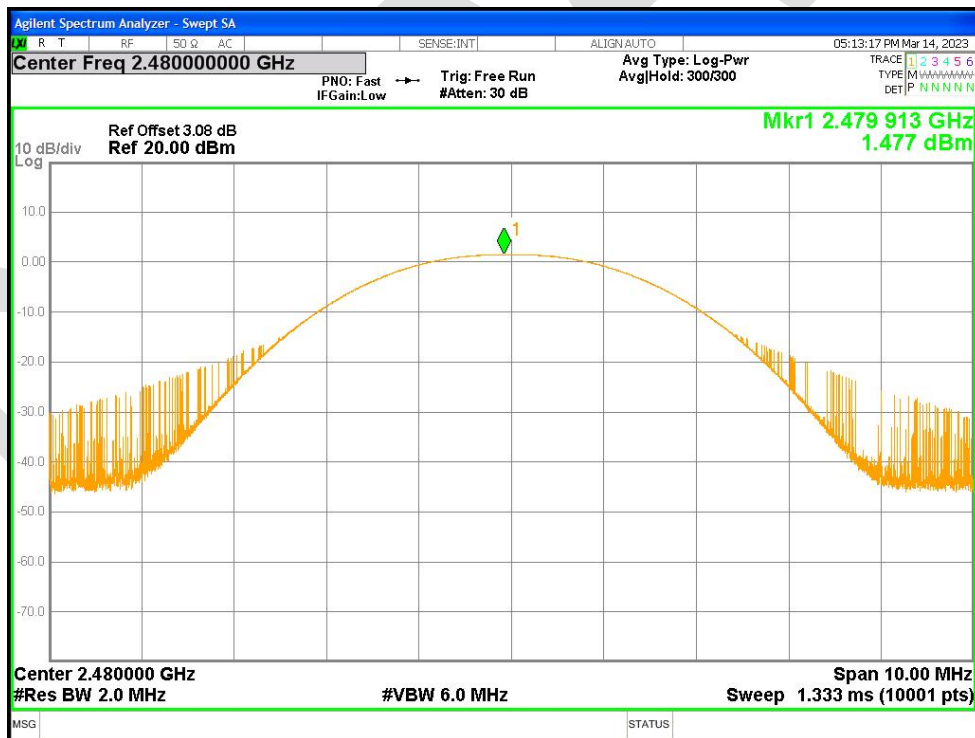


Power NVHT 2-DH1 2402MHz Ant1

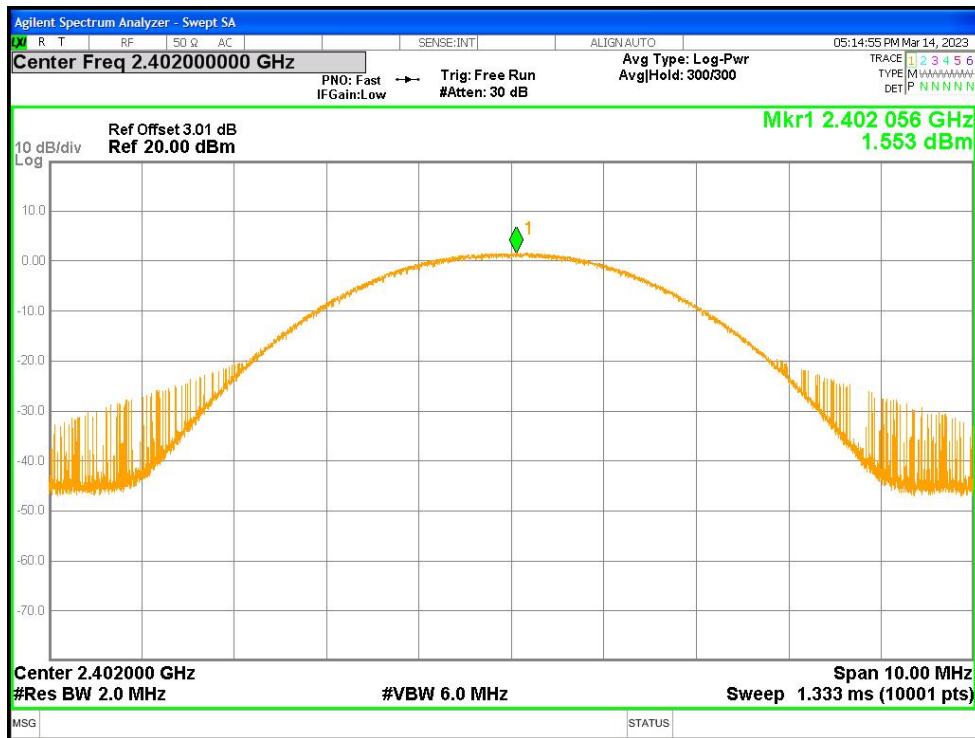


Power NVHT 2-DH1 2441MHz Ant1

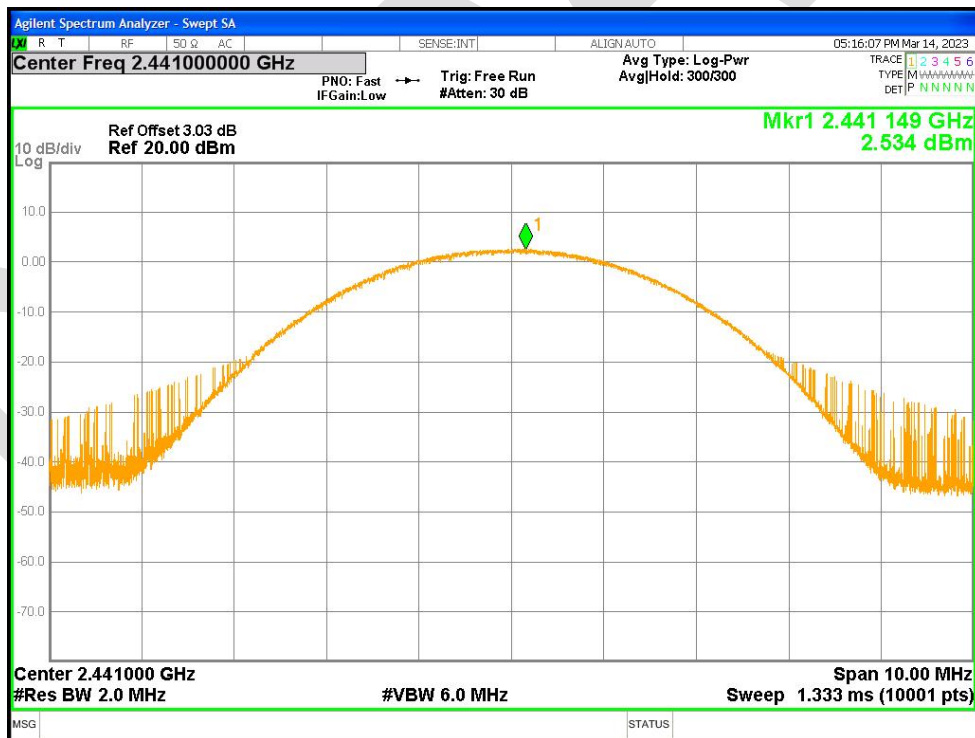


Power NVHT 2-DH1 2480MHz Ant1

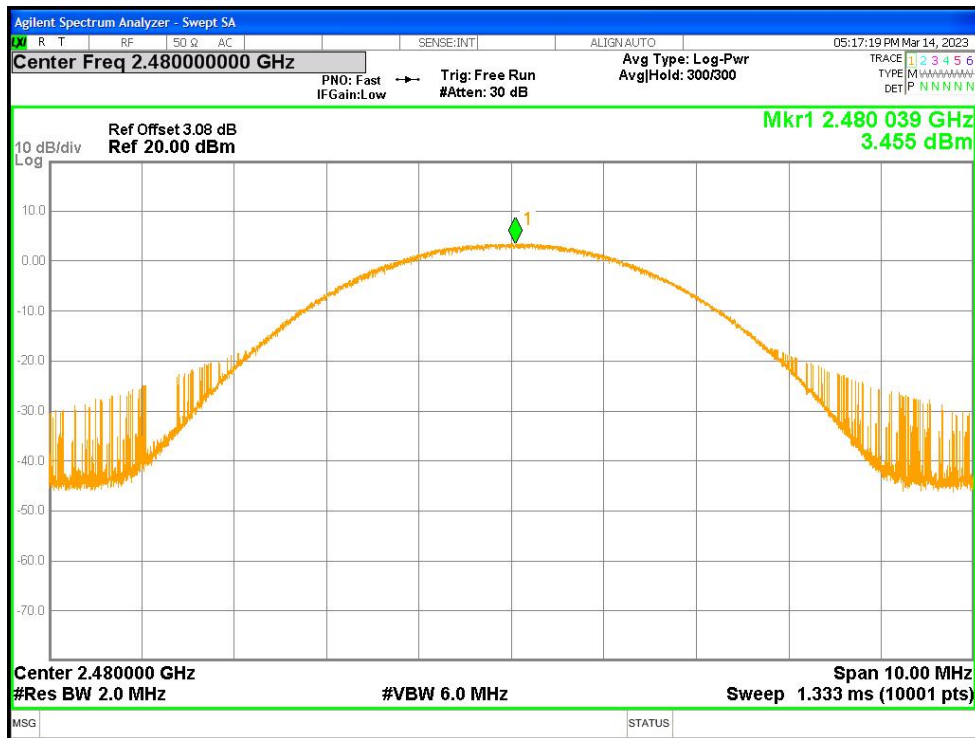


Power NVNT 3-DH1 2402MHz Ant1

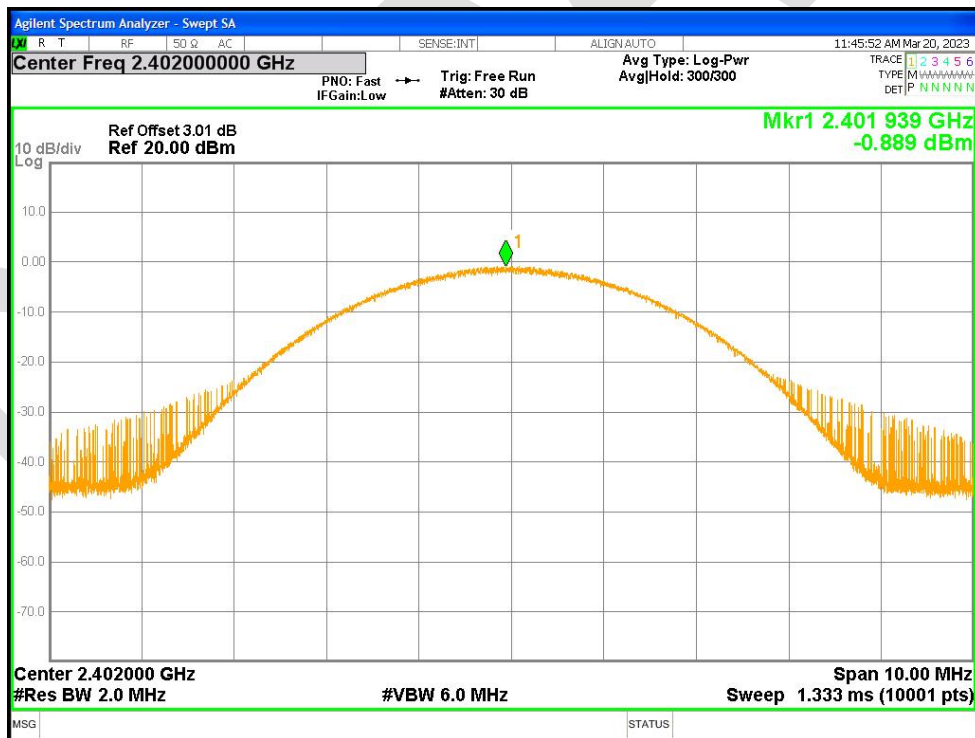

Power NVNT 3-DH1 2441MHz Ant1

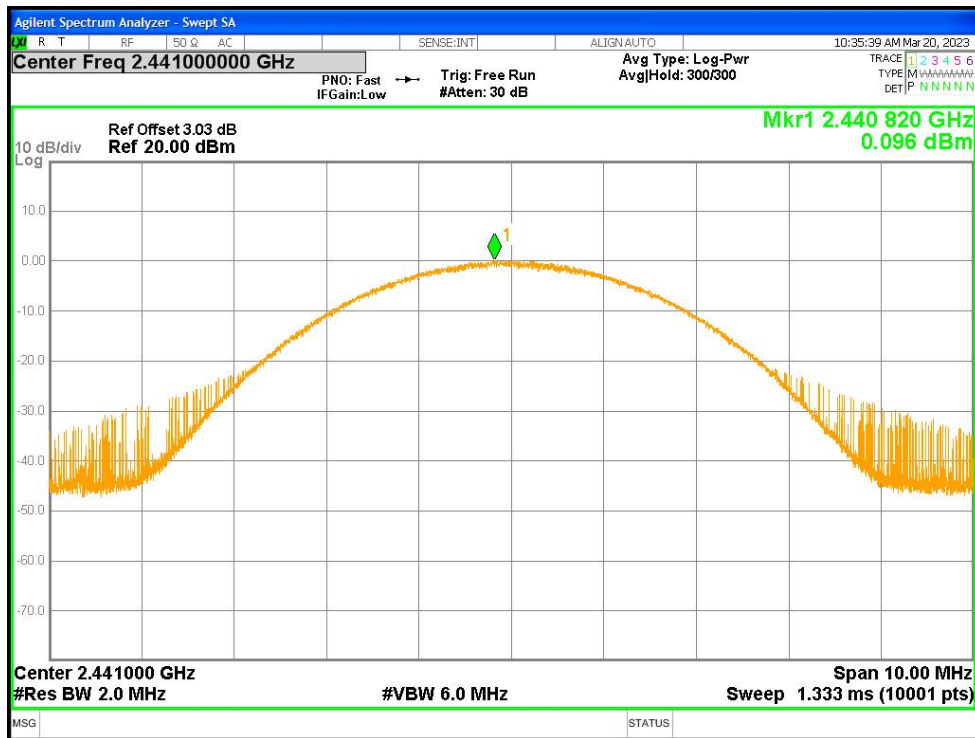


Power NVNT 3-DH1 2480MHz Ant1

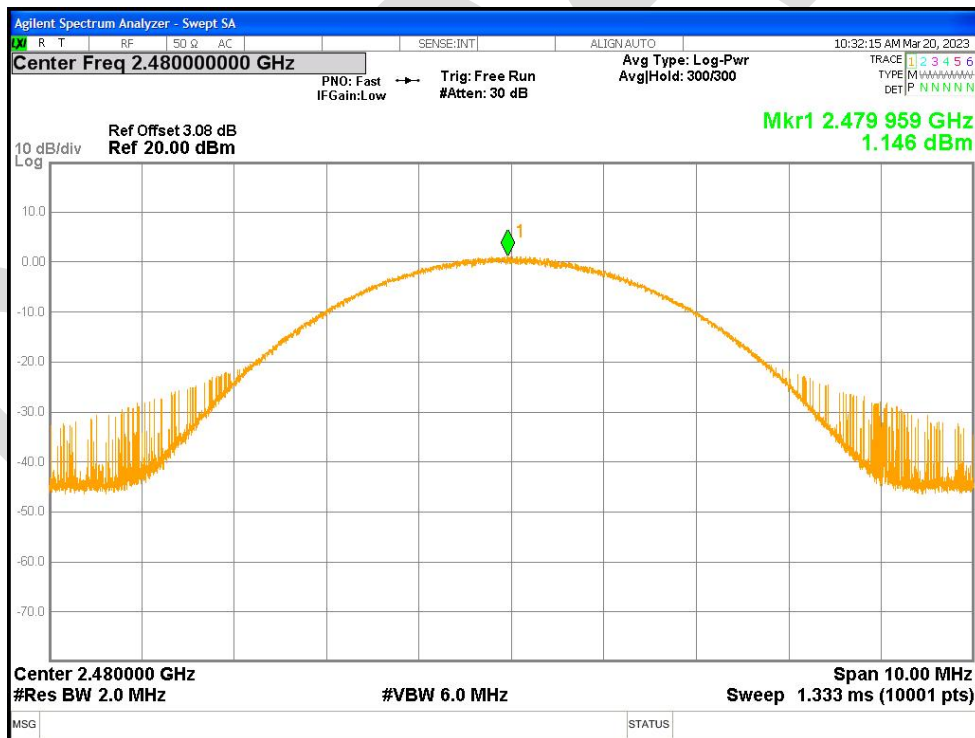


21.2 -20DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVHT	1-DH1	2402	Ant1	0.922	0	Pass
NVHT	1-DH1	2441	Ant1	0.927	0	Pass
NVHT	1-DH1	2480	Ant1	0.881	0	Pass
NVHT	2-DH1	2402	Ant1	1.292	0	Pass
NVHT	2-DH1	2441	Ant1	1.251	0	Pass
NVHT	2-DH1	2480	Ant1	1.297	0	Pass
NVNT	3-DH1	2402	Ant1	1.222	0	Pass
NVNT	3-DH1	2441	Ant1	1.224	0	Pass
NVNT	3-DH1	2480	Ant1	1.216	0	Pass


-20dB Bandwidth NVHT 1-DH1 2402MHz Ant1

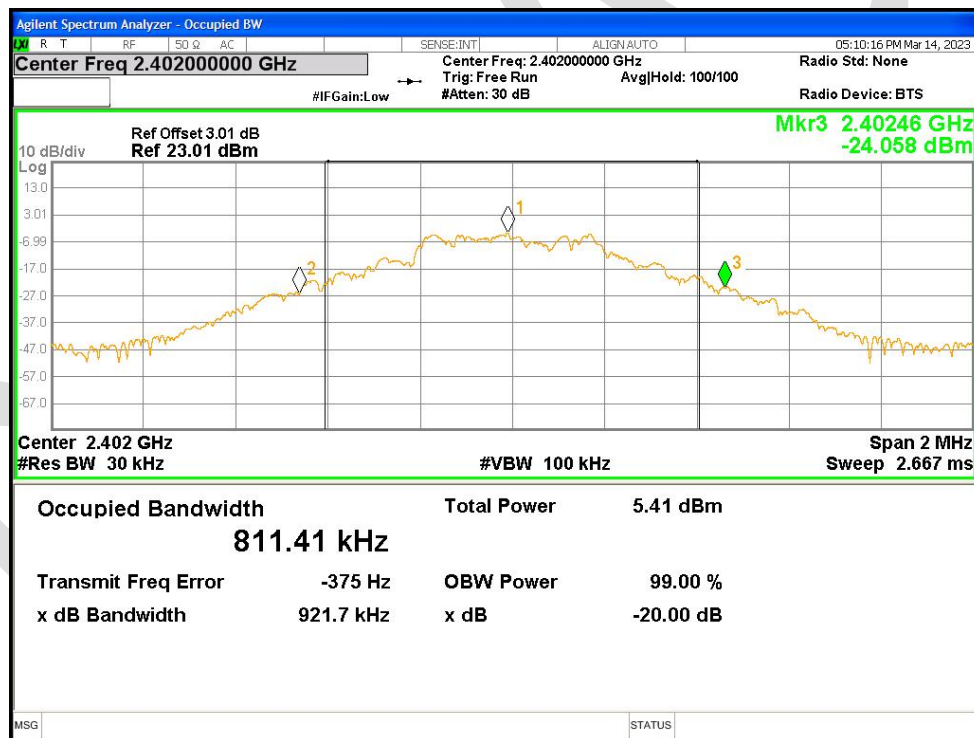


-20dB Bandwidth NVHT 1-DH1 2441MHz Ant1

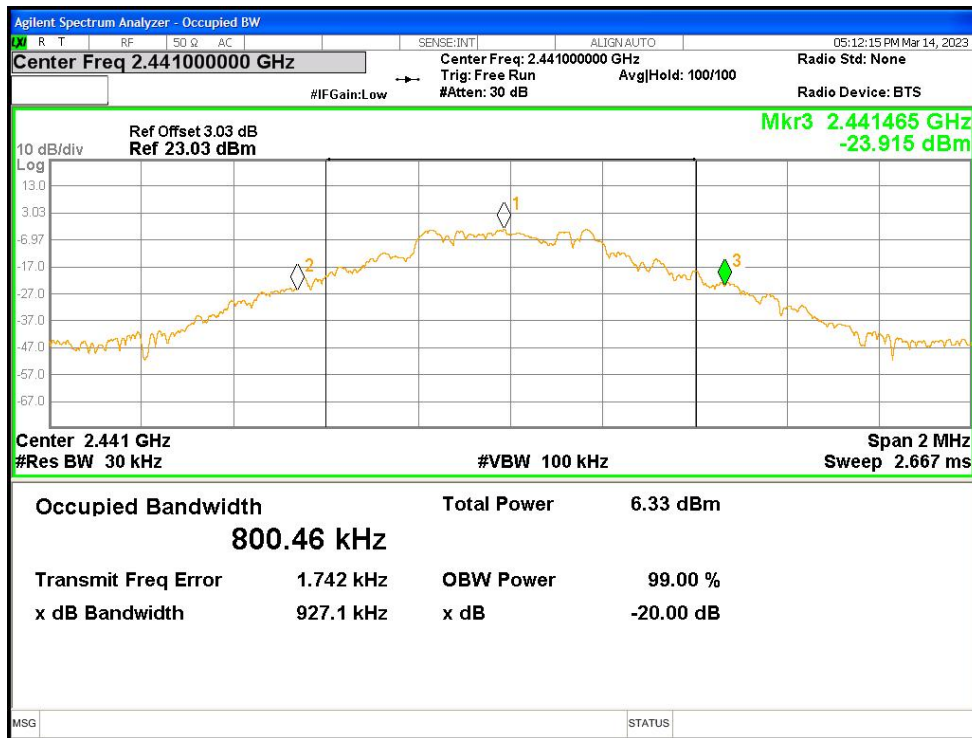


-20dB Bandwidth NVHT 1-DH1 2480MHz Ant1

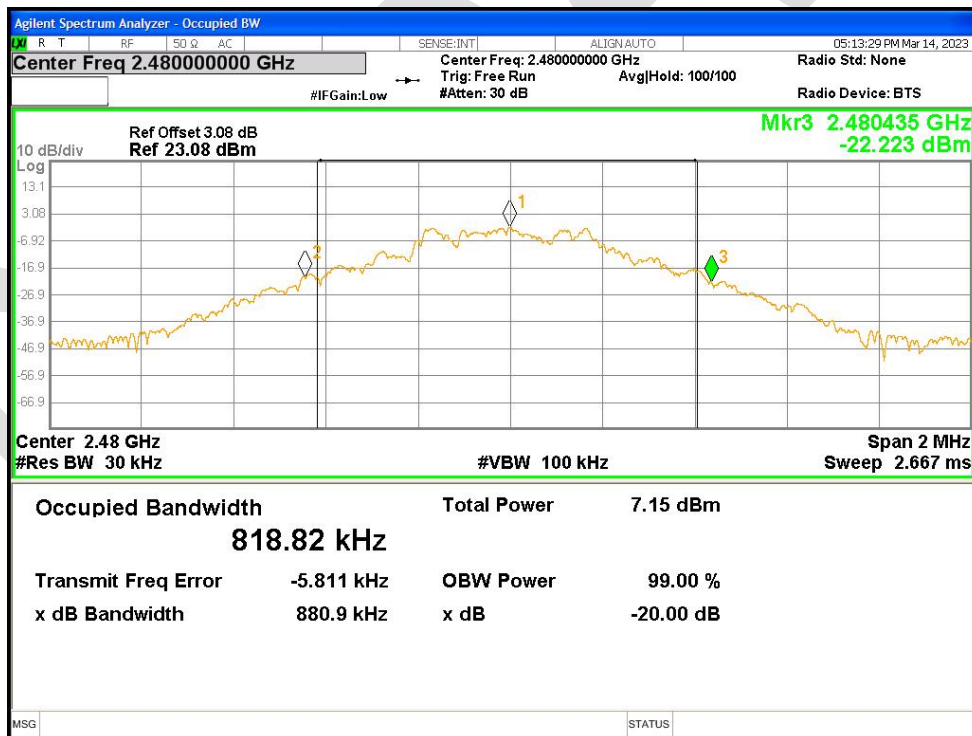


-20dB Bandwidth NVHT 2-DH1 2402MHz Ant1

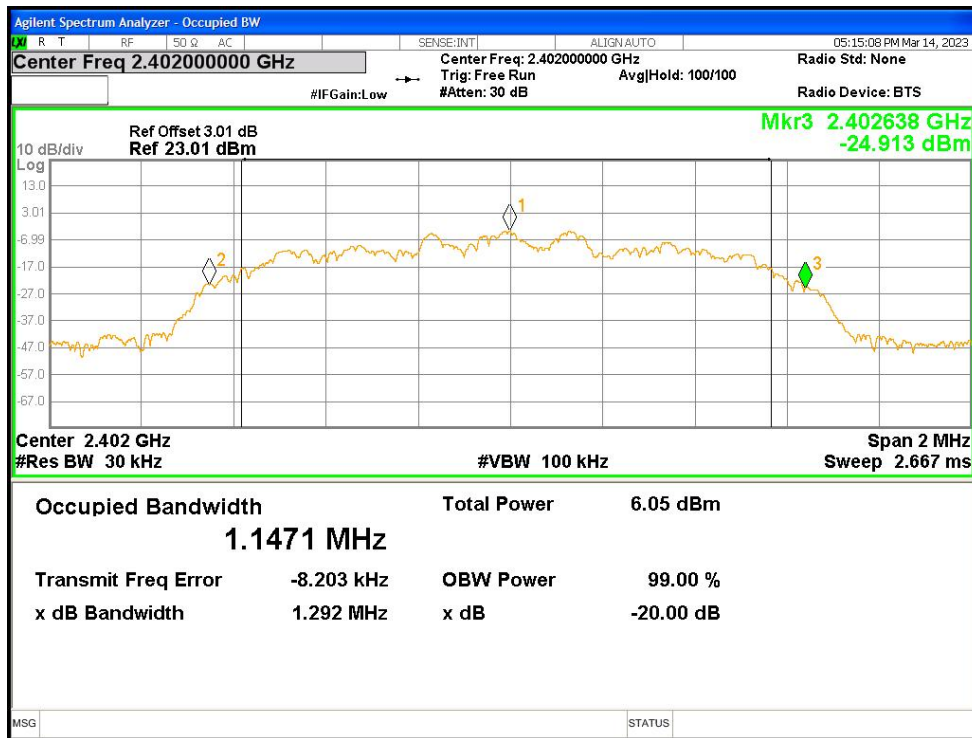


-20dB Bandwidth NVHT 2-DH1 2441MHz Ant1

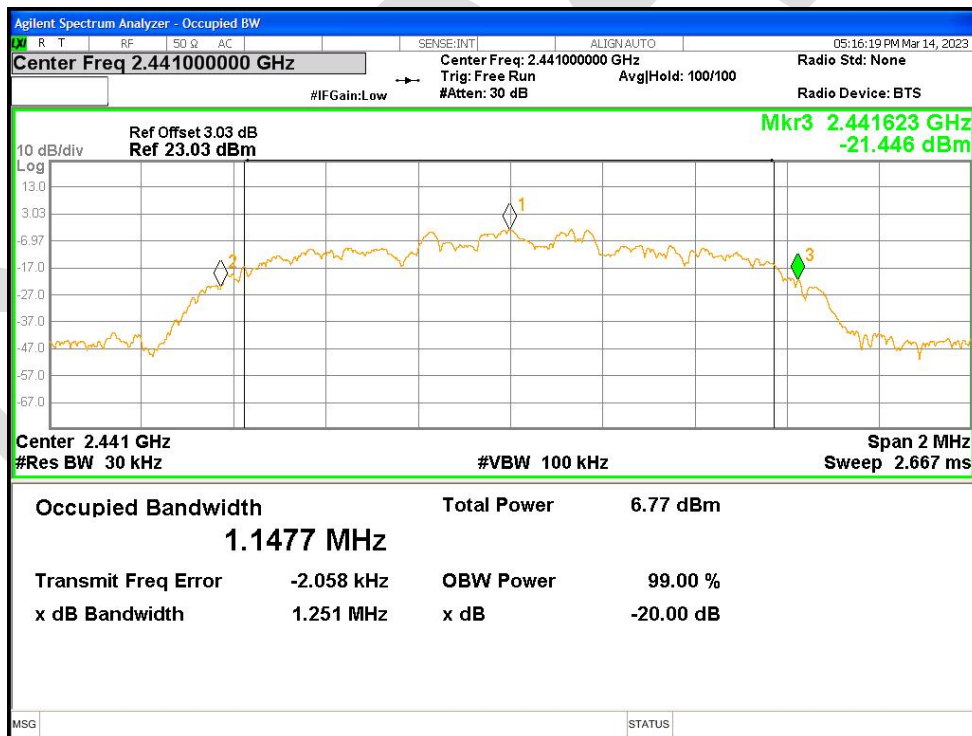


-20dB Bandwidth NVHT 2-DH1 2480MHz Ant1

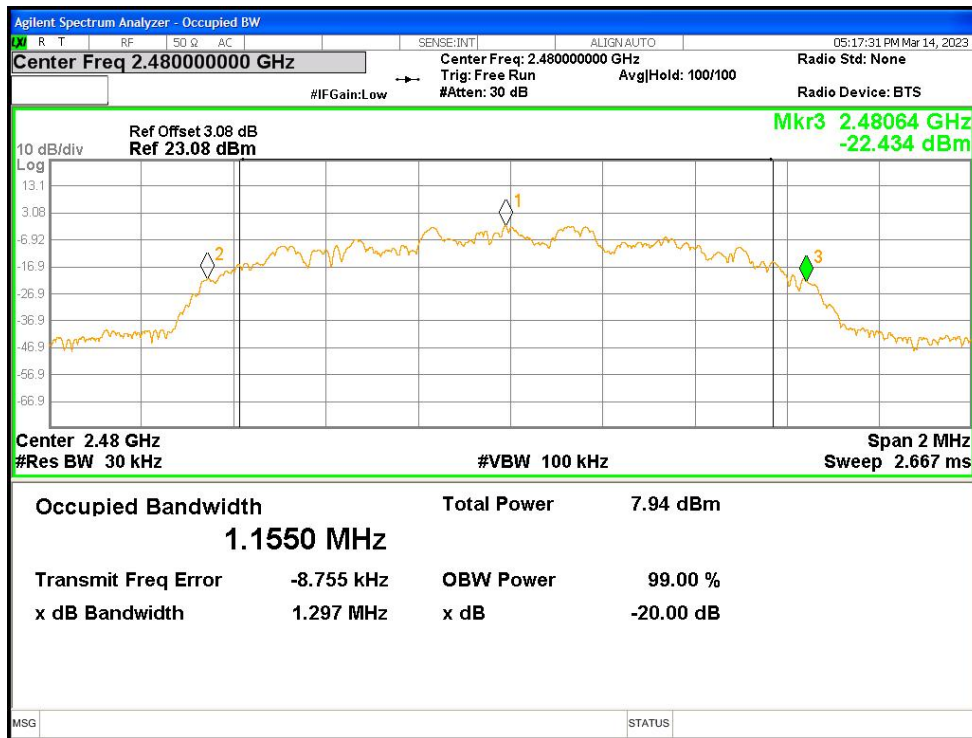


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

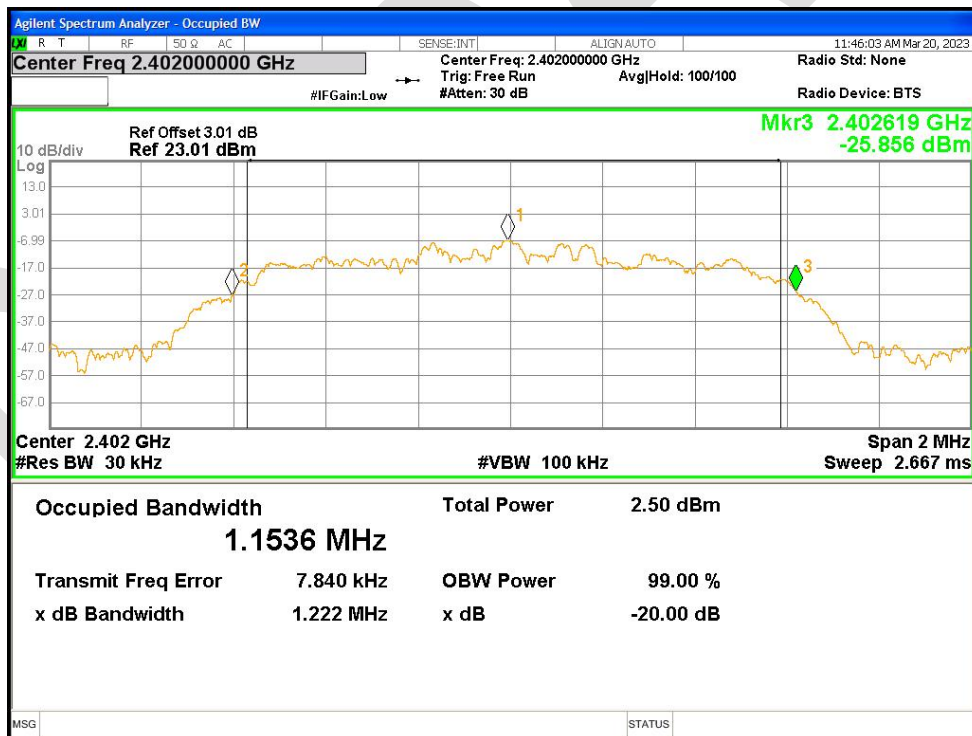

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

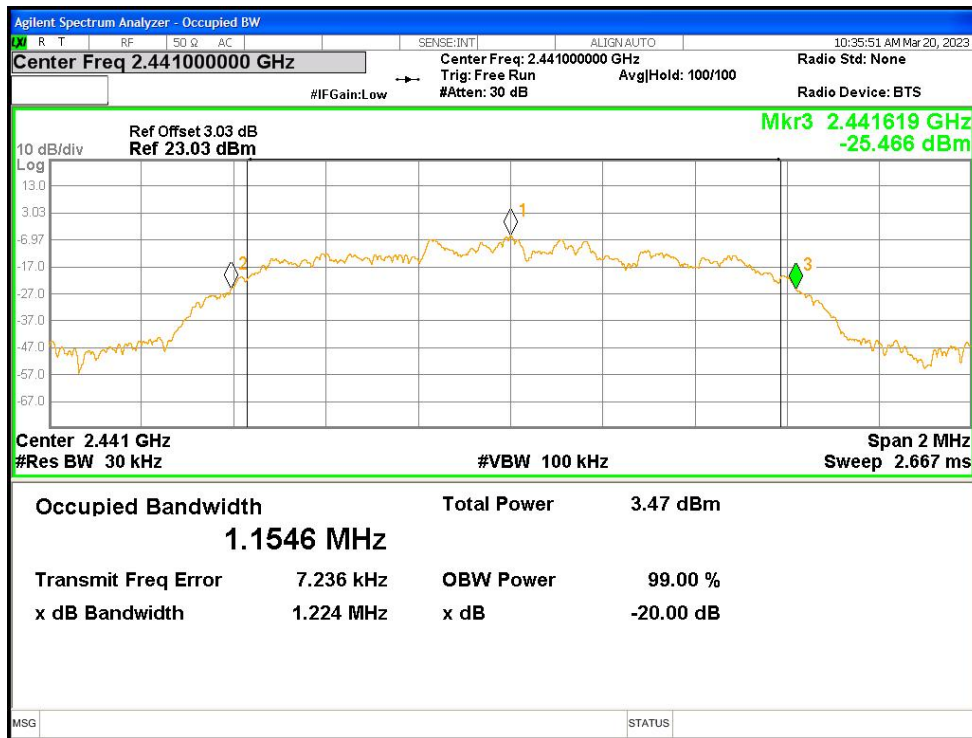



-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

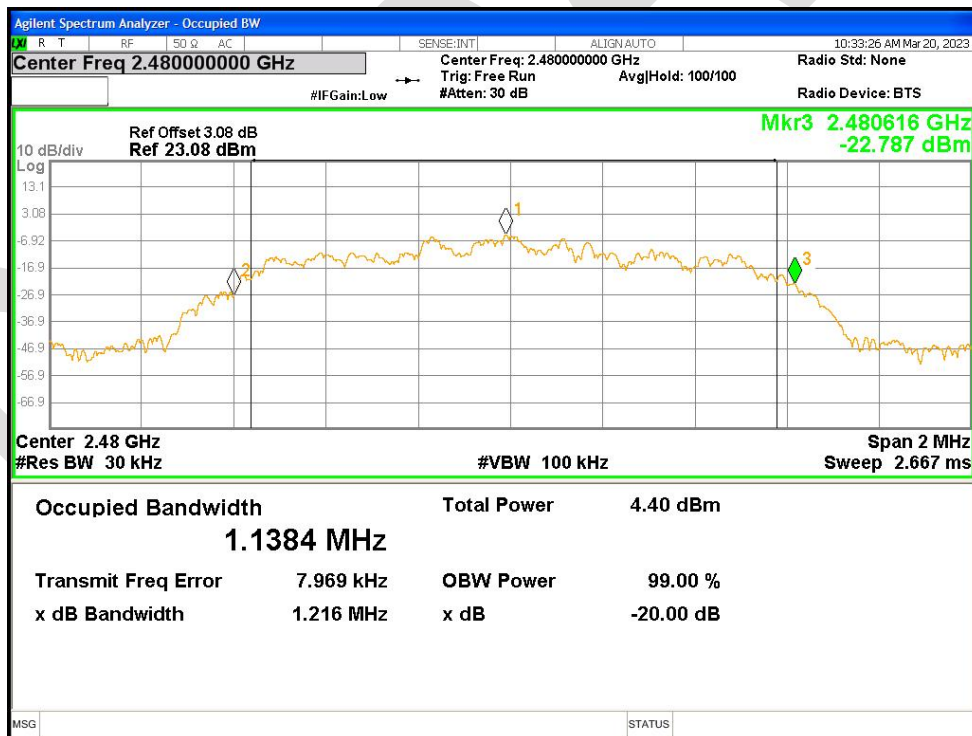


21.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVHT	1-DH1	2402	Ant1	0.80282
NVHT	1-DH1	2441	Ant1	0.83545
NVHT	1-DH1	2480	Ant1	0.79691
NVHT	2-DH1	2402	Ant1	1.14428
NVHT	2-DH1	2441	Ant1	1.13352
NVHT	2-DH1	2480	Ant1	1.15473
NVNT	3-DH1	2402	Ant1	1.14833
NVNT	3-DH1	2441	Ant1	1.14601
NVNT	3-DH1	2480	Ant1	1.14713

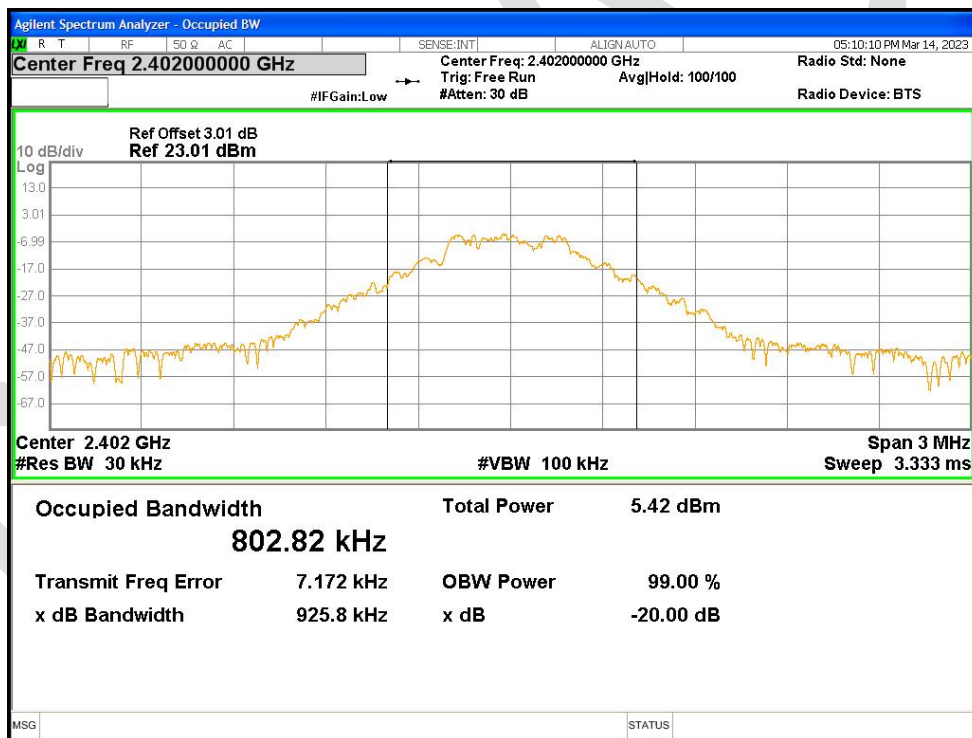
OBW NVHT 1-DH1 2402MHz Ant1

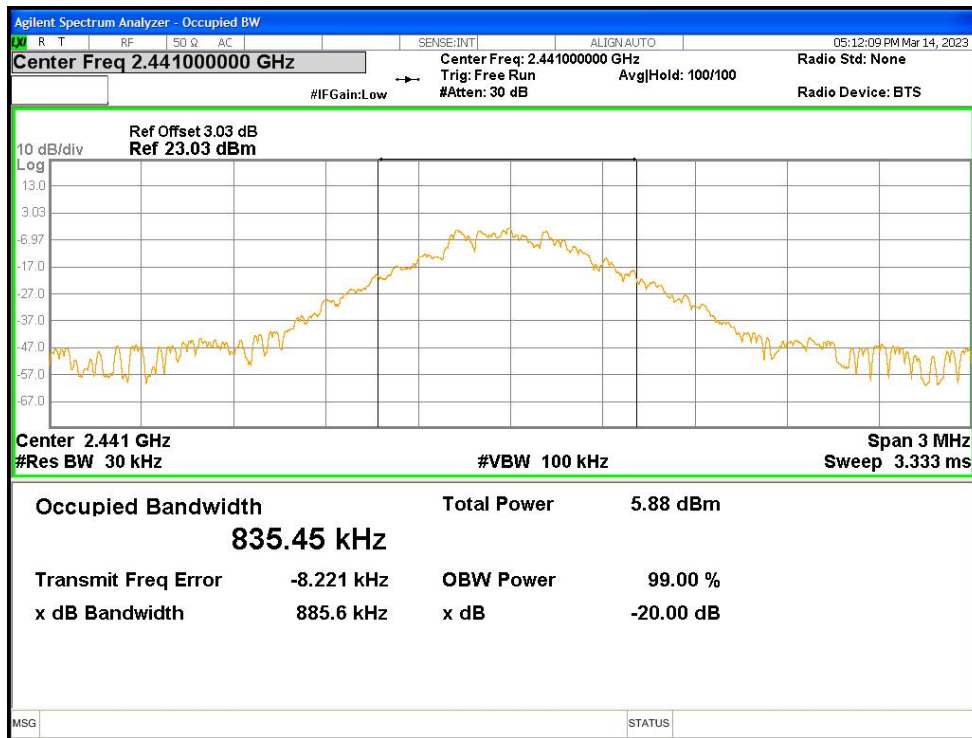OBW NVHT 1-DH1 2441MHz Ant1

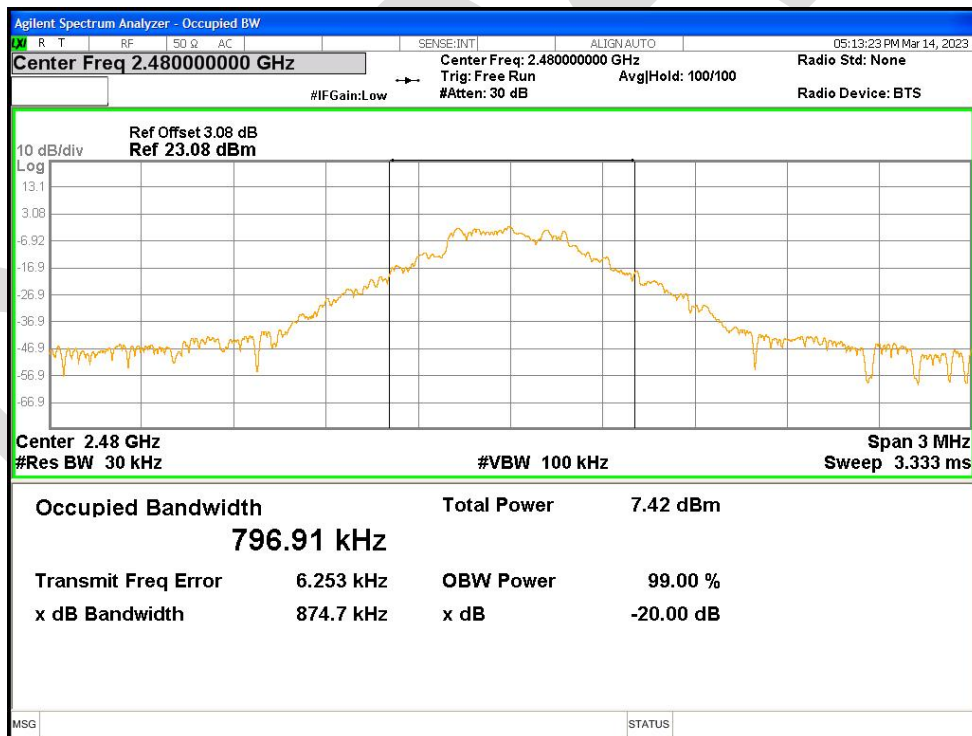


OBW NVHT 1-DH1 2480MHz Ant1

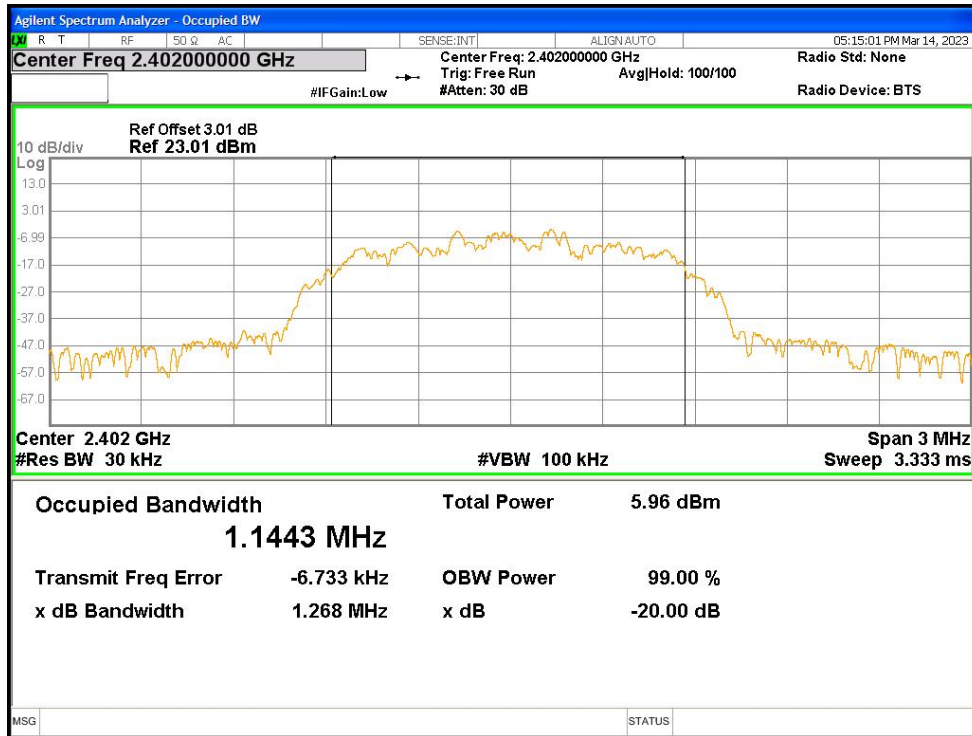

OBW NVHT 2-DH1 2402MHz Ant1



OBW NVHT 2-DH1 2441MHz Ant1

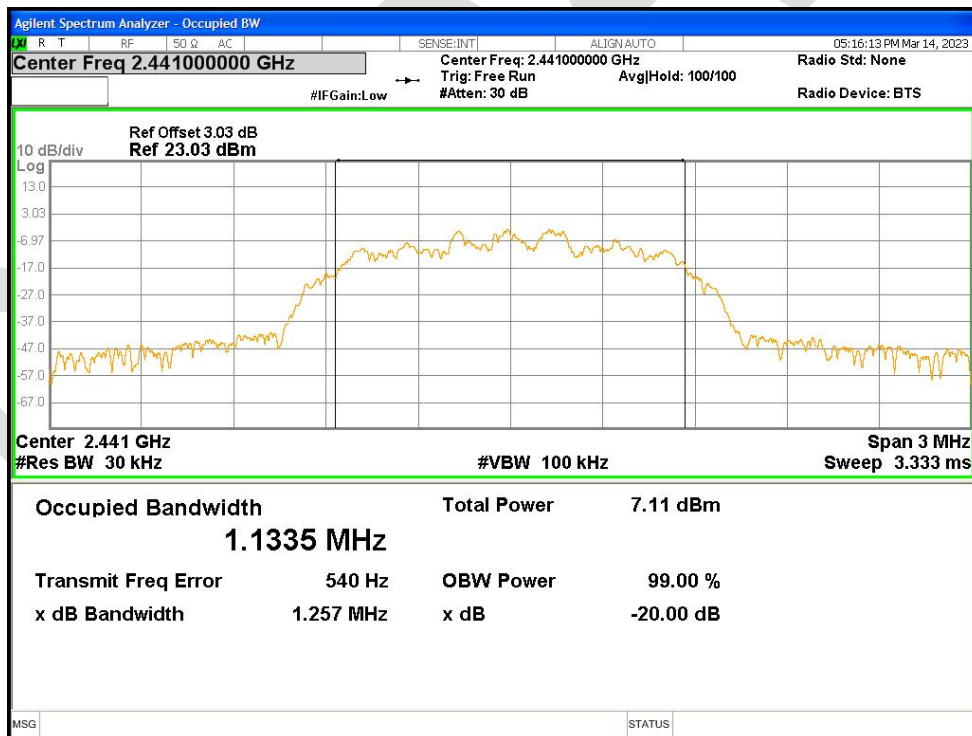

OBW NVHT 2-DH1 2480MHz Ant1