

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM121100616701 Page: 1 of 75

# FCC REPORT

Application No:	SZEM1211006167RF
Applicant:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Manufacturer:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Factory:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Product Name:	Bluetooth Headset
Model No.(EUT):	EM510
Add Model No.:	EM410, EM511, SBT511
FCC ID:	WSGEM510
Standards:	47 CFR Part 15, Subpart C (2011)
Date of Receipt:	2012-11-13
Date of Test:	2012-11-14 to 2012-11-23
Date of Issue:	2012-12-04
Test Result:	PASS *

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM121100616701 Page: 2 of 75

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Model No.: EM410, EM510, EM511, SBT511

Only the model EM510 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on item number.



Report No.: SZEM121100616701 Page: 3 of 75

# 3 Contents

1	cc	OVER PAGE	1
2	TE	EST SUMMARY	2
3	СС	ONTENTS	3
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	Test Environment	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	6
	4.6	TEST FACILITY	7
	4.7	DEVIATION FROM STANDARDS	7
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	Equipment List	8
5	TE	EST RESULTS AND MEASUREMENT DATA	11
5	<b>TE</b> 5.1		
5		EST RESULTS AND MEASUREMENT DATA Antenna Requirement Conducted Emissions	11
5	5.1	ANTENNA REQUIREMENT	11 12
5	5.1 5.2	Antenna Requirement Conducted Emissions	
5	5.1 5.2 5.3	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power	
5	5.1 5.2 5.3 5.4	Antenna Requirement Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth	
5	5.1 5.2 5.3 5.4 5.5	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth Carrier Frequencies Separation	
5	5.1 5.2 5.3 5.4 5.5 5.6	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Duty Cycle	
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time	
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20DB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Duty Cycle	
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Duty Cycle Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence	11 12 16 23 29 36 39 45 49 56 62
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Duty Cycle. Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	11 12 16 23 29 36 39 45 45 49 56 62 62 63
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12 5.12	ANTENNA REQUIREMENT CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 20DB OCCUPY BANDWIDTH CARRIER FREQUENCIES SEPARATION HOPPING CHANNEL NUMBER DWELL TIME DUTY CYCLE BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS PSEUDORANDOM FREQUENCY HOPPING SEQUENCE RADIATED SPURIOUS EMISSION 12.1 Radiated Emission below 1GHz	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
5	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.12 5.12	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Duty Cycle. Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	11 12 16 23 29 36 39 45 49 56 62 63 66 68



Report No.: SZEM121100616701 Page: 4 of 75

# 4 General Information

#### 4.1 Client Information

Applicant:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Address of Applicant:	No.63, Road 10th, Longyan, Humen town, Dongguan city.
Manufacturer:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Address of Manufacturer:	No.63, Road 10th, Longyan, Humen town, Dongguan city.
Factory:	SKYWING COMMUNICATION ELECTRONICS CO., LTD.
Address of Factory:	No.63, Road 10th, Longyan, Humen town, Dongguan city.

### 4.2 General Description of EUT

Name:	Bluetooth Headset
Model No.:	EM510, EM410, EM511, SBT511
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type	Integral
Antenna Gain	1.0dBi
Power Supply:	3.7V lithium battery
Test Voltage:	DC 5V charge by USB Port

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 5 of 75

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 6 of 75

### 4.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1015mbar	

# 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Mobile	НТС	G7
PC	DELL	DCSM
LCD-displaying	DELL	SP2208WFPt
KEYBOARD	DELL	SK-8115
MOUSE	Lenovo	MO28UOL
PC	IBM	8172
LCD-displaying	Lenovo	L1711pC
KEYBOARD	IBM	SK-8115
MOUSE	Lenovo	MO28UOA
Coder	HengTong ELECTRON	HT4000
Printer	Canon	BJC-1000SP

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM121100616701 Page: 7 of 75

### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM121100616701 Page: 8 of 75

# 4.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-5-17		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-5-17		
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 9 of 75

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24		
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59		
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29		
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29		
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29		
13	Band filter	Amindeon	82346	SEL0094	2013-05-17		
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17		
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24		
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 10 of 75

	RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24		
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24		
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29		
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29		
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24		
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17		
8	Band filter	amideon	82346	SEL0094	2013-05-17		
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24		
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17		
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24		

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 11 of 75

# 5 Test results and Measurement Data

#### 5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
-----------------------	--

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.0dBi.

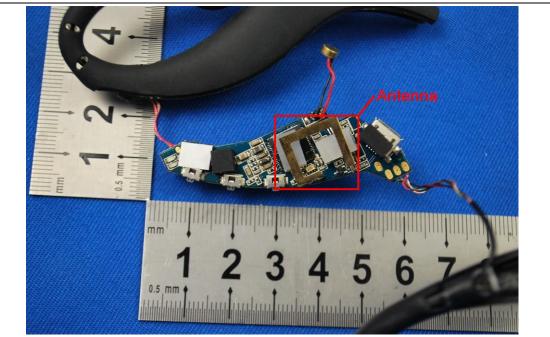



Report No.: SZEM121100616701 Page: 12 of 75


5.2 Conducted Emis				
Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:		Limit (d	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test Procedure:	<ol> <li>The mains terminal disturbation.</li> <li>The EUT was connected to Impedance Stabilization Nation produces. The power calconnected to a second LIS reference plane in the same measured. A multiple sock power cables to a single LI exceeded.</li> <li>The tabletop EUT was placed on the horizontal grading on the horizontal grading of the EUT shall be 0.4 m for vertical ground reference plane. The LISN unit under test and bonded mounted on top of the grout between the closest points the EUT and associated exceeded.</li> <li>In order to find the maximum equipment and all of the implication.</li> </ol>	bance voltage test was bance voltage test was bance voltage test was be AC power source thro etwork) which provides oles of all other units of N 2, which was bonder e way as the LISN 1 for et outlet strip was used SN provided the rating ced upon a non-metallion ound reference plane, tha vertical ground refer from the vertical ground and so placed 0.8 m fro lane was bonded to the 1 was placed 0.8 m fro to a ground reference and reference plane. The of the LISN 1 and the quipment was at least 0 m emission, the relative terface cables must be	bugh a LISN 1 (Line a $50\Omega/50\mu$ H + $5\Omega$ f the EUT were d to the ground or the unit being d to connect multiple of the LISN was no c table 0.8m above rangement, the EUT erence plane. The r d reference plane. The r d reference plane. The r d reference plane. The plane for LISNs his distance was EUT. All other units 0.8 m from the LISN e positions of	linear ot the Γ was ear The the the 2.

#### 5.2 Conducted Emissions





Report No.: SZEM121100616701 Page: 13 of 75

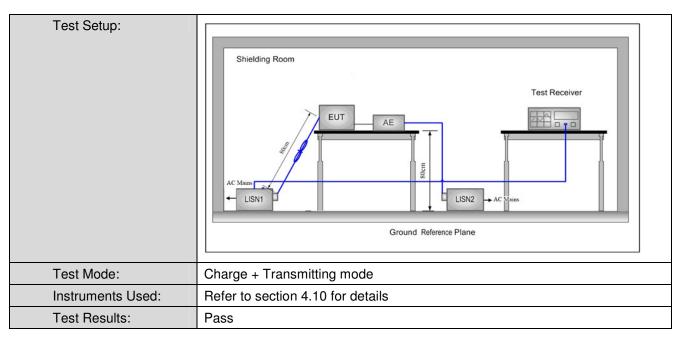


#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM121100616701 Page: 14 of 75

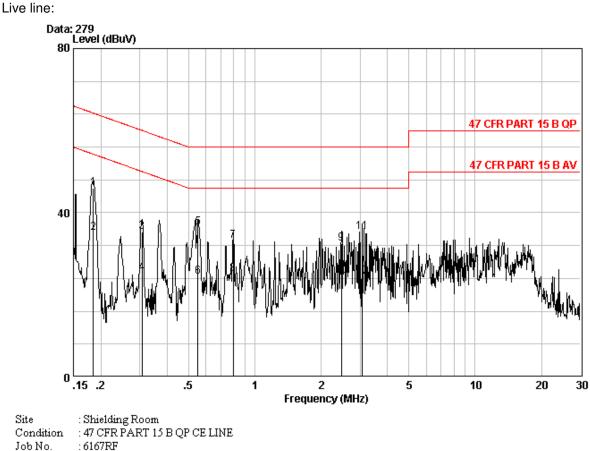

rge+Tx

Mode	: PC char


		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.18443	0.02	9.70	36.28	46.00	64.28	-18.28	QP
2	0.18443	0.02	9.70	25.28	35.00	54.28	-19.28	Average
3	0.30671	0.01	9.71	25.60	35.32	60.06	-24.74	QP
4	0.30671	0.01	9.71	15.60	25.32	50.06	-24.74	Average
5	0.55226	0.01	9.80	26.56	36.38	56.00	-19.62	QP
6	0.55226	0.01	9.80	14.56	24.38	46.00	-21.62	Average
7	0.79600	0.02	9.80	23.34	33.16	56.00	-22.84	QP
8	0.79600	0.02	9.80	15.34	25.16	46.00	-20.84	Average
9	2.474	0.02	9.82	22.71	32.55	56.00	-23.45	QP
10	2.474	0.02	9.82	14.71	24.55	46.00	-21.45	Average
11	3.074	0.02	9.85	25.47	35.34	56.00	-20.66	QP
12	3.074	0.02	9.85	14.47	24.34	46.00	-21.66	Average



Neutral line:

#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM121100616701 Page: 15 of 75

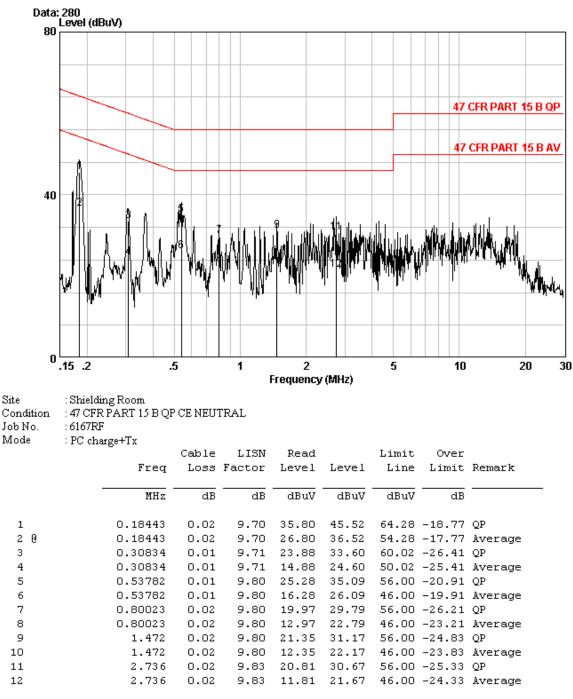

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM121100616701 Page: 16 of 75

#### 5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer         Image: E.U.T         Non-Conducted Table         Non-Conducted Table         Ground Reference Plane         Remark:         Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	30dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 17 of 75

Measurement Data					
	GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	4.29	30.00	Pass		
Middle	3.84	30.00	Pass		
Highest	3.67	30.00	Pass		
	π/4DQPSK mo	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.48	30.00	Pass		
Middle	2.86	30.00	Pass		
Highest	2.42	30.00	Pass		
	8DPSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	3.57	30.00	Pass		
Middle	3.01	30.00	Pass		
Highest	2.57	30.00	Pass		

#### Measurement Data




Report No.: SZEM121100616701 Page: 18 of 75

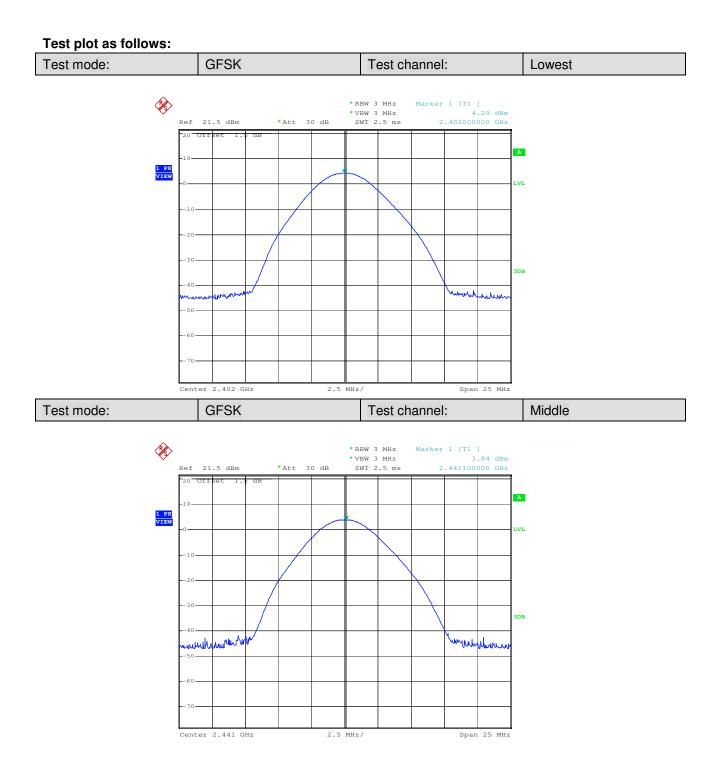




Report No.: SZEM121100616701 Page: 19 of 75

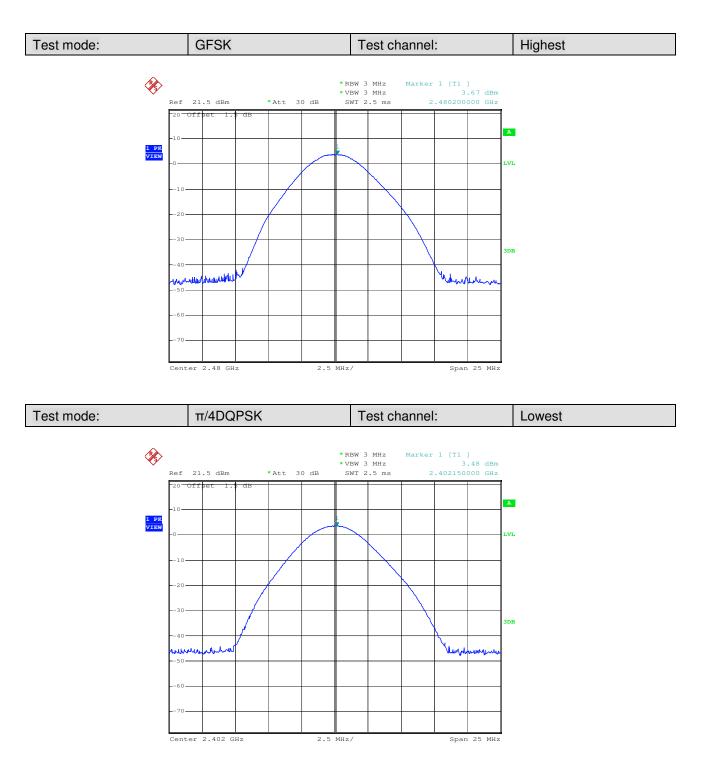




Report No.: SZEM121100616701 Page: 20 of 75

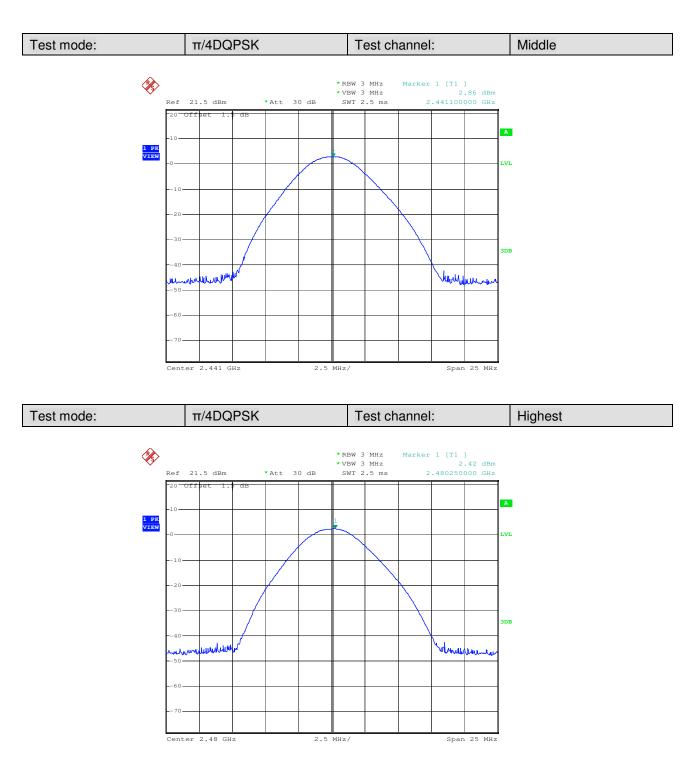




Report No.: SZEM121100616701 Page: 21 of 75

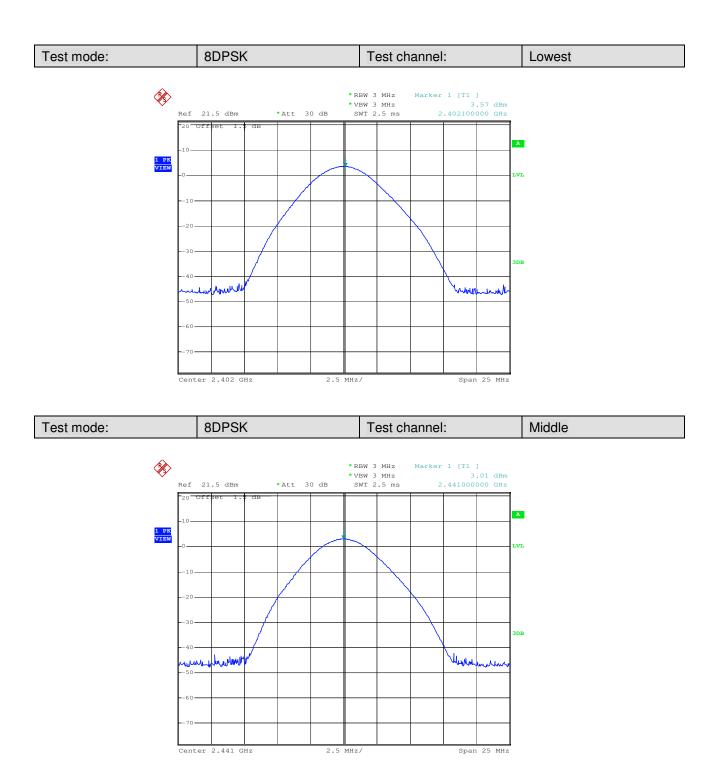



Report No.: SZEM121100616701 Page: 22 of 75

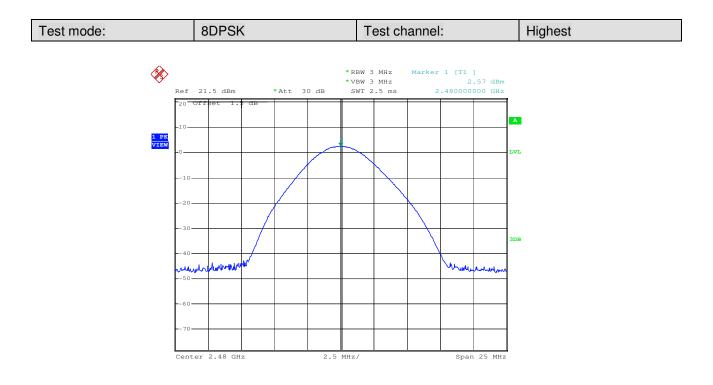





Report No.: SZEM121100616701 Page: 23 of 75

### 5.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	

#### **Measurement Data**

Test channel	20dB Occupy Bandwidth (kHz)		
rest channer	GFSK	π/4DQPSK	8DPSK
Lowest	804	1212	1206
Middle	798	1212	1206
Highest	774	1200	1206




Report No.: SZEM121100616701 Page: 24 of 75

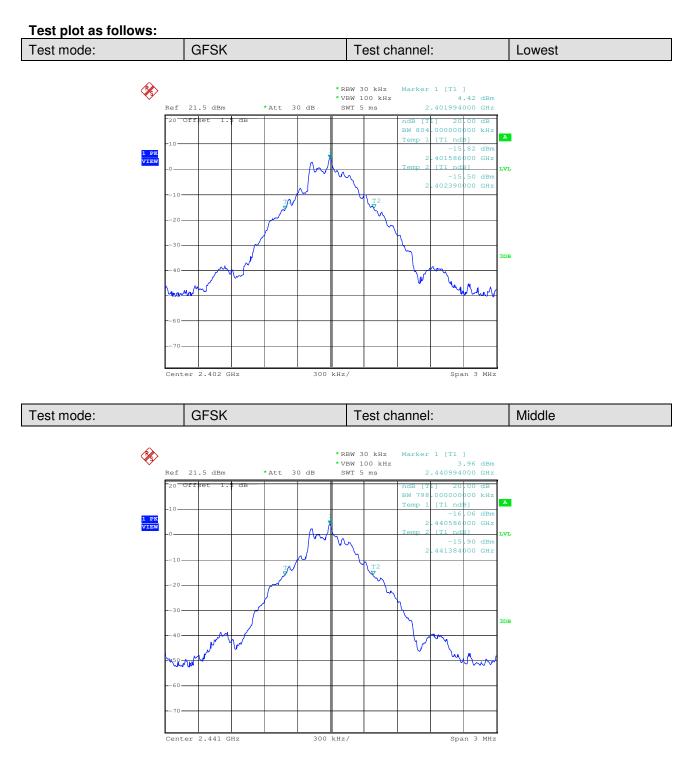




Report No.: SZEM121100616701 Page: 25 of 75

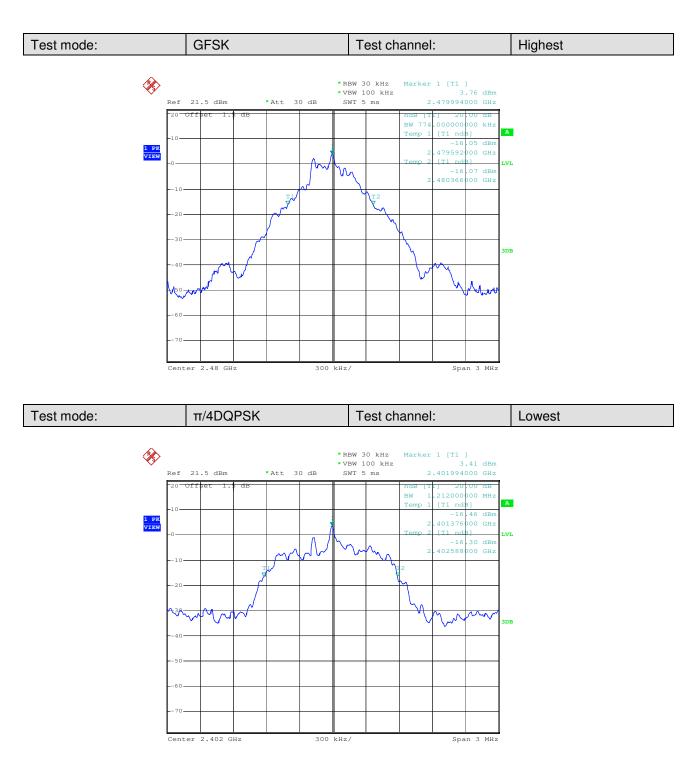




Report No.: SZEM121100616701 Page: 26 of 75

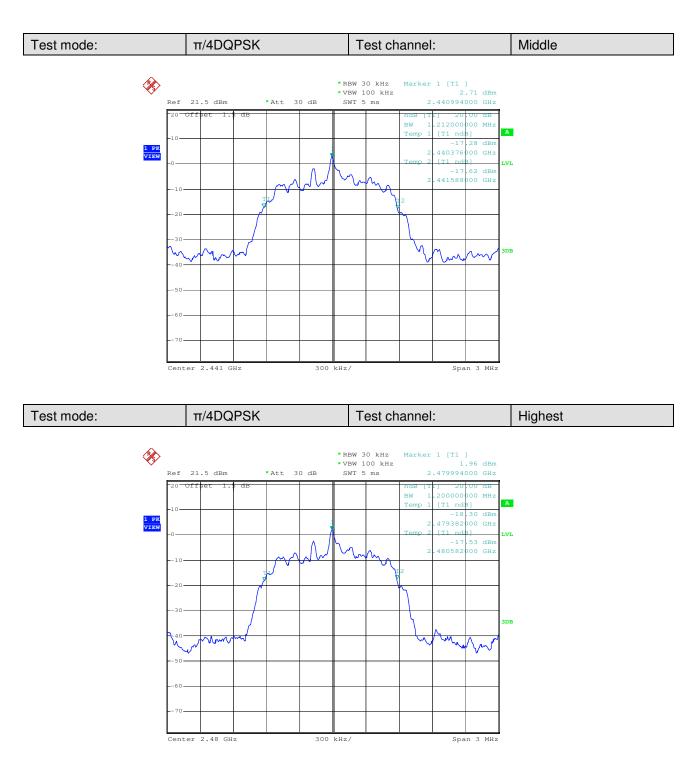




Report No.: SZEM121100616701 Page: 27 of 75

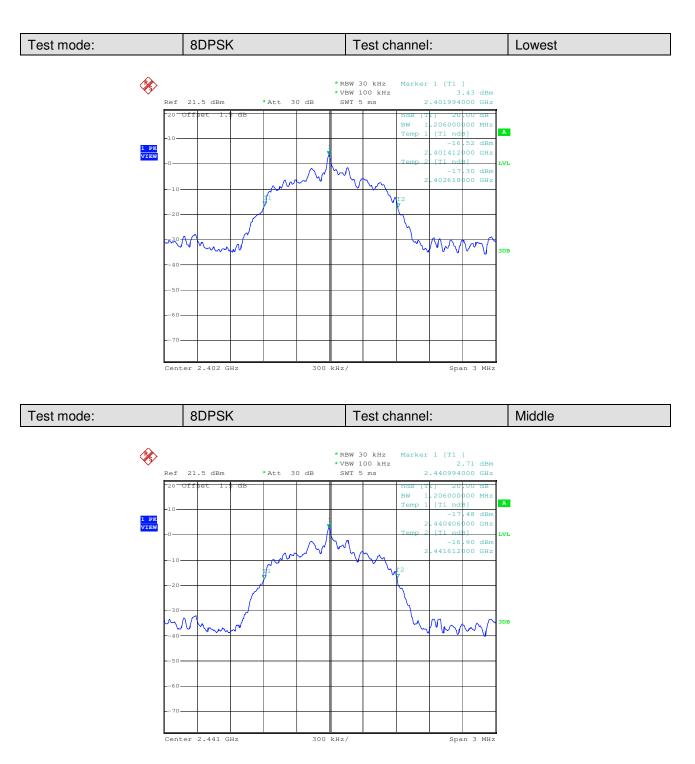



Report No.: SZEM121100616701 Page: 28 of 75

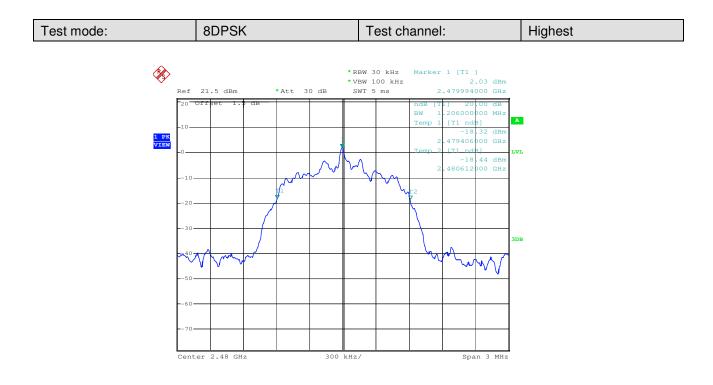



Report No.: SZEM121100616701 Page: 29 of 75

#### 5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 30 of 75

#### **Measurement Data**


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥808	Pass
Middle	1000	≥808	Pass
Highest	1000	≥808	Pass
	π/4DQPSK m	node	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥808	Pass
Middle	1005	≥808	Pass
Highest	1000	≥808	Pass
	8DPSK mo	de	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1000	≥808	Pass
Middle	1005	≥808	Pass
Highest	1005	≥808	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	804	536
π/4DQPSK	1212	808
8DPSK	1206	804




Report No.: SZEM121100616701 Page: 31 of 75

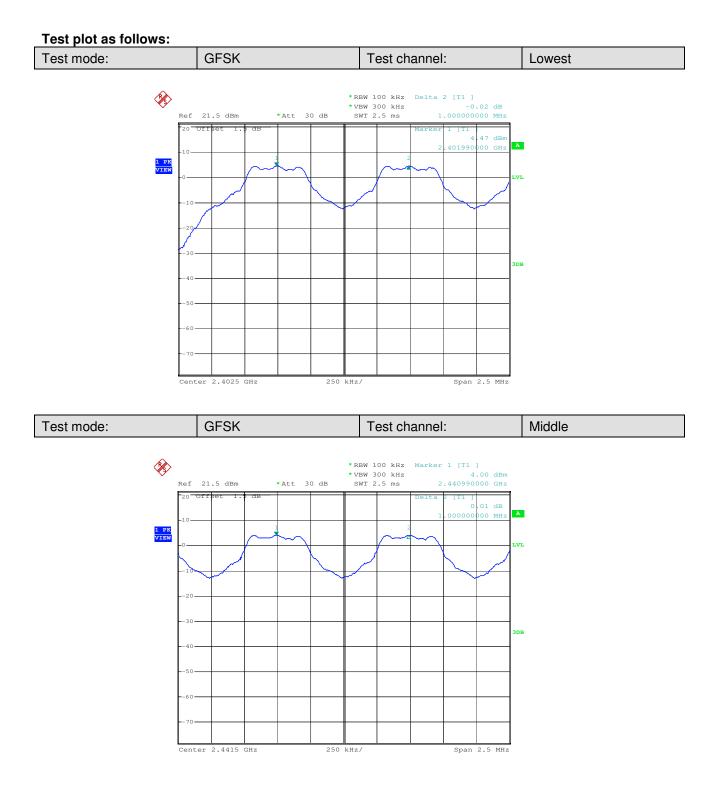




Report No.: SZEM121100616701 Page: 32 of 75

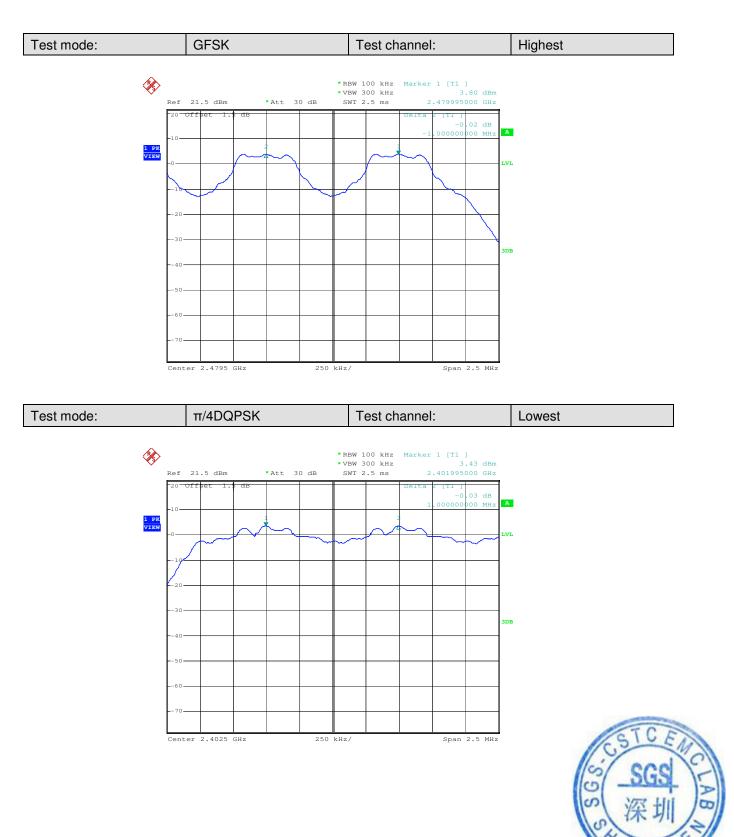




Report No.: SZEM121100616701 Page: 33 of 75

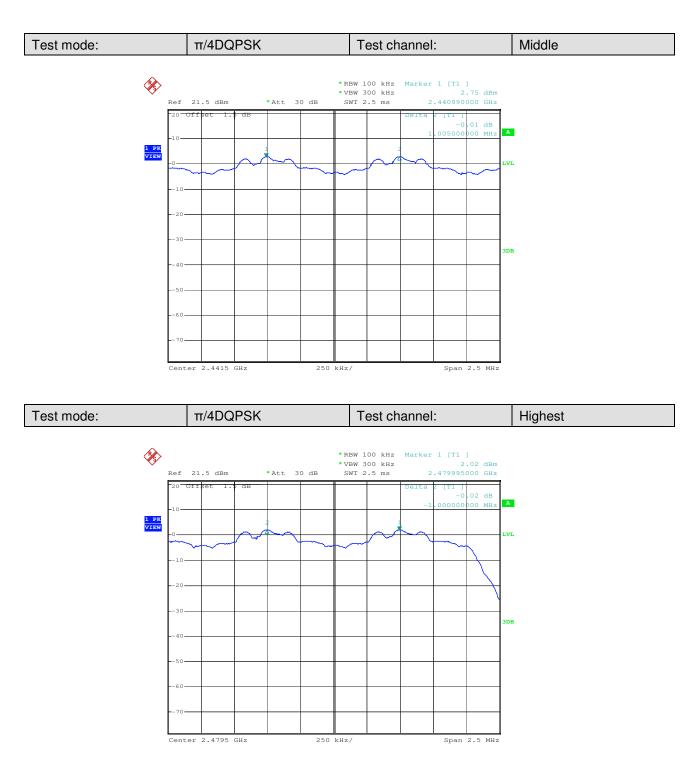




Report No.: SZEM121100616701 Page: 34 of 75

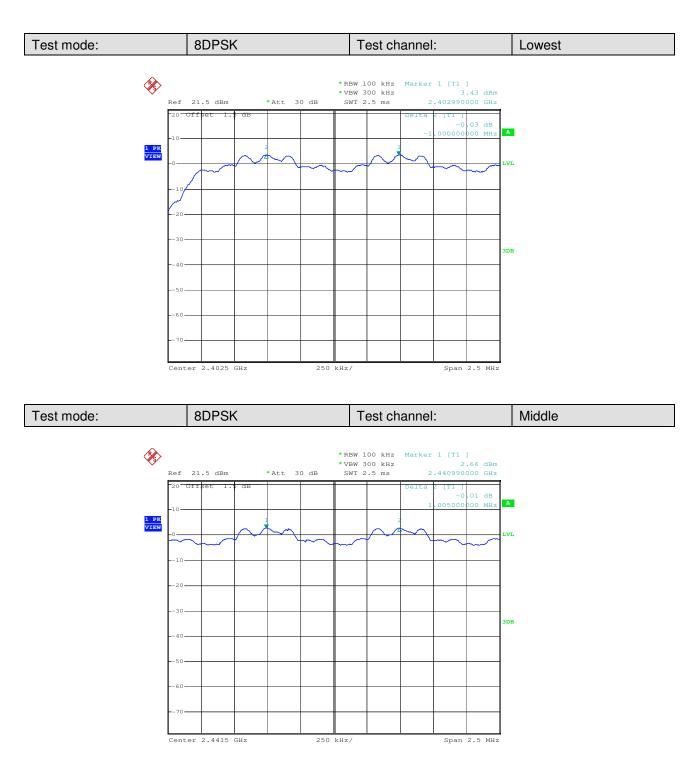



Report No.: SZEM121100616701 Page: 35 of 75

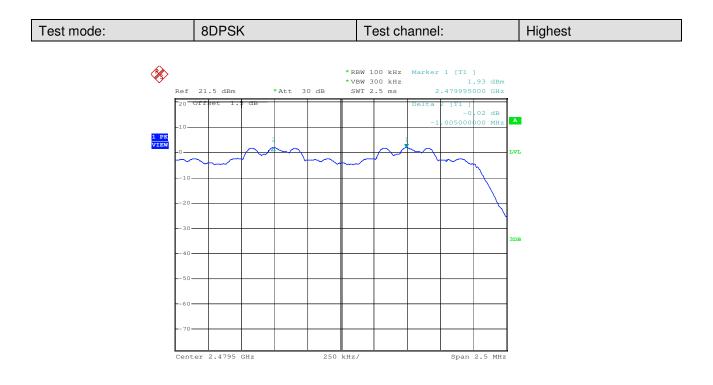



Report No.: SZEM121100616701 Page: 36 of 75

#### 5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	


#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 37 of 75

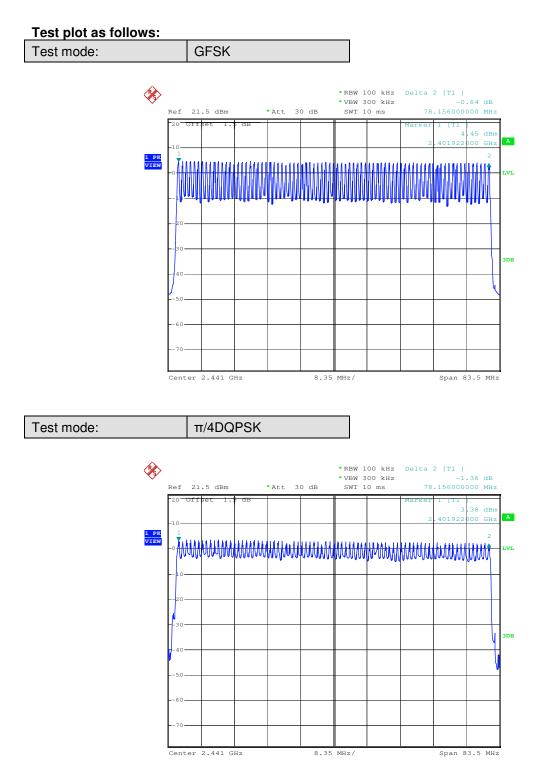



Report No.: SZEM121100616701 Page: 38 of 75

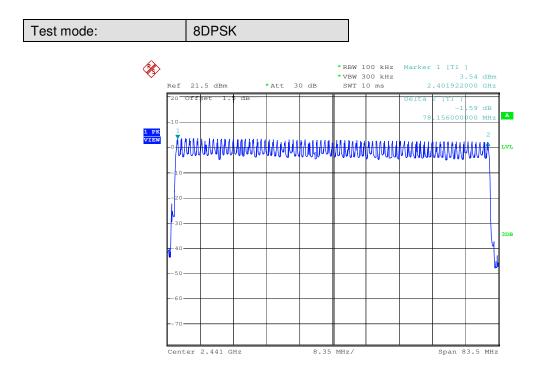



Report No.: SZEM121100616701 Page: 39 of 75

#### 5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table				
	Ground Reference Plane				
Instruments Used:	Refer to section 4.10 for details				
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.				
Limit:	0.4 Second				
Test Results:	Pass				

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)		
	DH1	0.1728	0.4		
GFSK		0.2888	0.4		
	DH5	0.3248	0.4		
	2-DH1	0.1792	0.4		
π/4DQPSK	2-DH3	0.1728           0.2888           0.3248           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.1792           0.12888           0.12888           0.12880	0.4		
	2-DH5	0.1989	0.4		
	3-DH1	0.1776	0.4		
8DPSK	DH1         0.1728           DH3         0.2888           DH5         0.3248           2-DH1         0.1792           2-DH3         0.2888           2-DH5         0.1989           3-DH1         0.1776           3-DH3         0.2880	0.4			
	3-DH5	0.3285	0.4		

#### **Test Result:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


DH1 time slot=0.540(ms)\*(1600/ (2\*79))\*31.6=172.8 ms

DH3 time slot=1.805(ms)\*(1600/ (4\*79))\*31.6=288.8ms

DH5 time slot=3.045(ms)\*(1600/ (6\*79))\*31.6=324.8ms




Report No.: SZEM121100616701 Page: 40 of 75

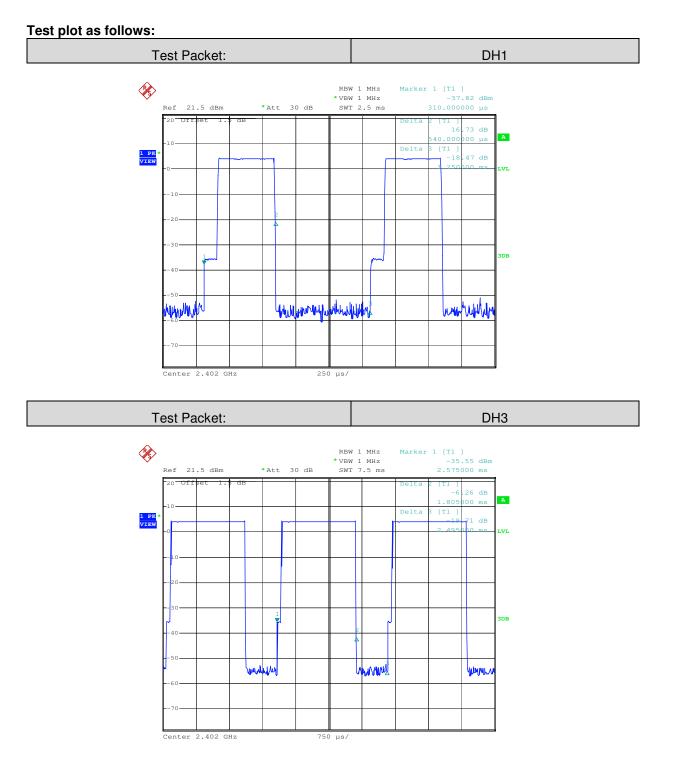




Report No.: SZEM121100616701 Page: 41 of 75

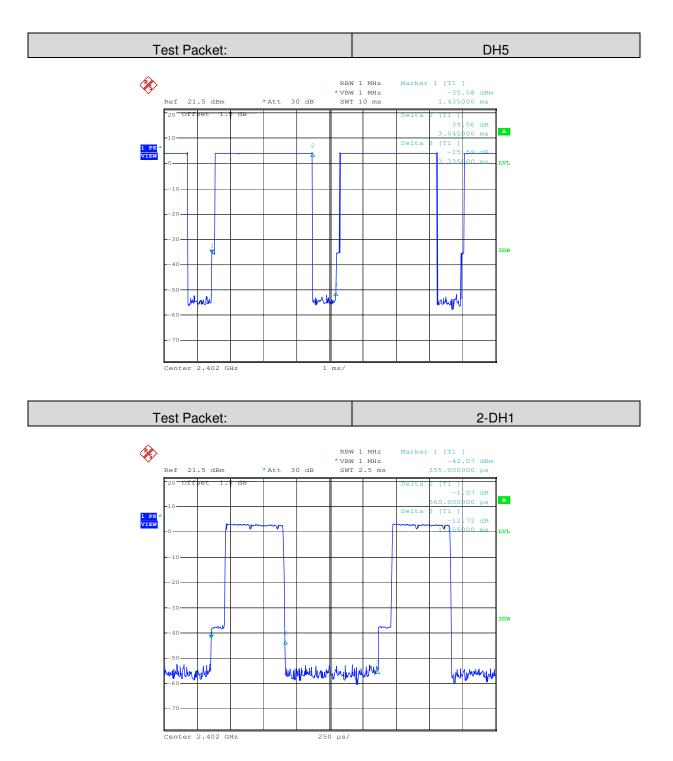




Report No.: SZEM121100616701 Page: 42 of 75

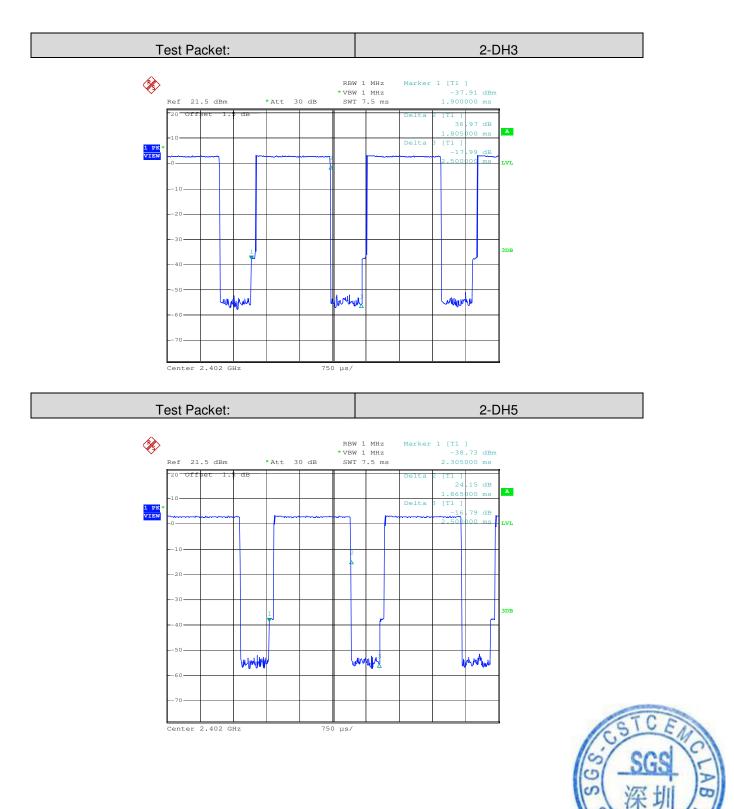




Report No.: SZEM121100616701 Page: 43 of 75

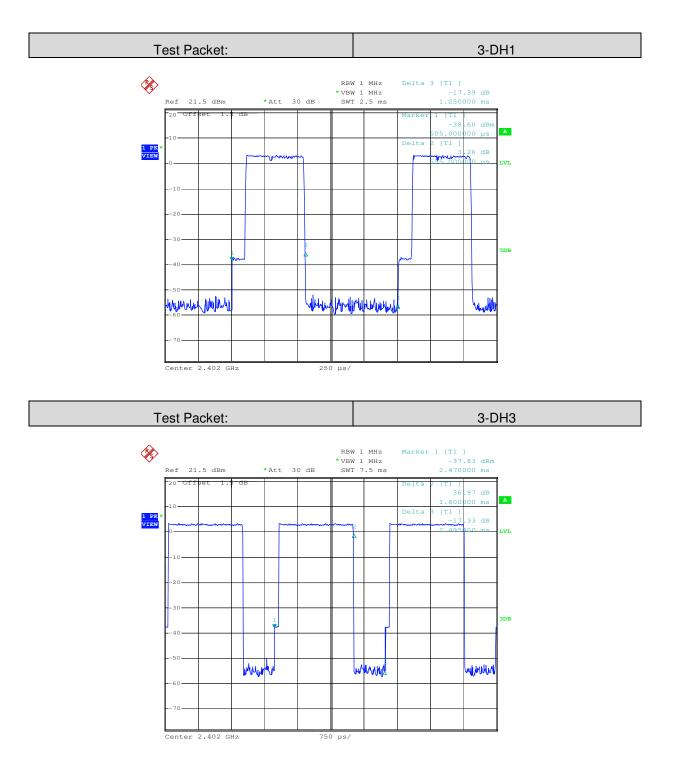



Report No.: SZEM121100616701 Page: 44 of 75

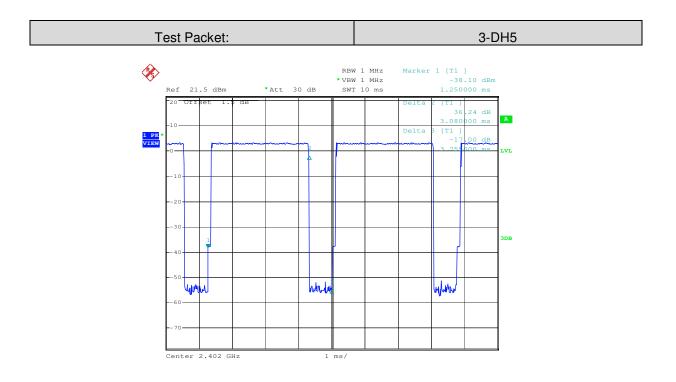

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 45 of 75

#### 5.8 Duty Cycle

Test Requirement:	FCC Part15 C Section 15.35
Test Method:	ANSI C63.10:2009
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Instruments Used:	Refer to section 4.10 for details
Limit:	N/A
Test Mode:	Through Pre-scan, find the worse case is GFSK modulation type $_{\circ}$

**Measurement Data** 

DH1
TX on: 408uS=0.408ms
Duty Cycle=T <sub>or</sub> /T <sub>period</sub> =0.408ms/100ms=0.00408ms
PDCF=20*Log(Duty Cycle)=-47.79dB
DH3
TX on:1.67ms
Duty Cycle=T <sub>on</sub> /T <sub>period</sub> =1.67ms/100ms=0.0167ms
PDCF=20*Log(Duty Cycle)=-35.55dB
DH5
TX on:2.93ms
Duty Cycle=T <sub>on</sub> /T <sub>period</sub> =2.93ms/100ms=0.0293ms
PDCF=20*Log(Duty Cycle)=-30.66dB


Remark:

Duty Cycle=On time ÷Period time or 100 milliseonds (Whichever is less)




Report No.: SZEM121100616701 Page: 46 of 75

#### Test plot as follows

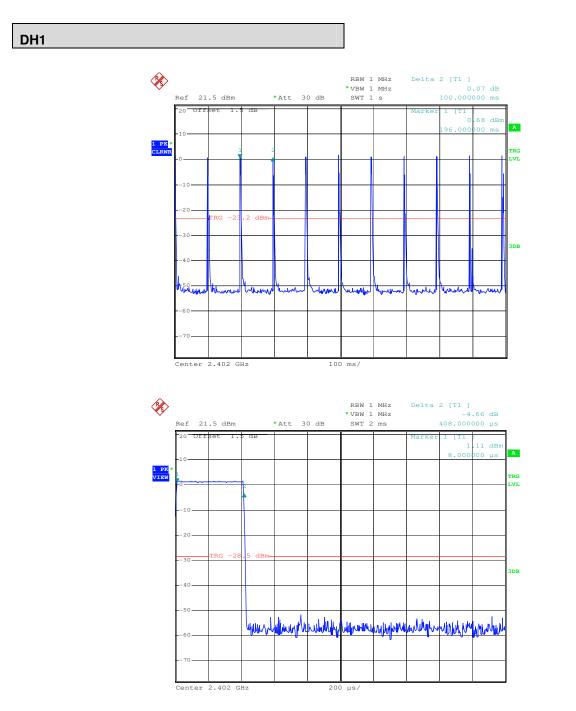




Report No.: SZEM121100616701 Page: 47 of 75

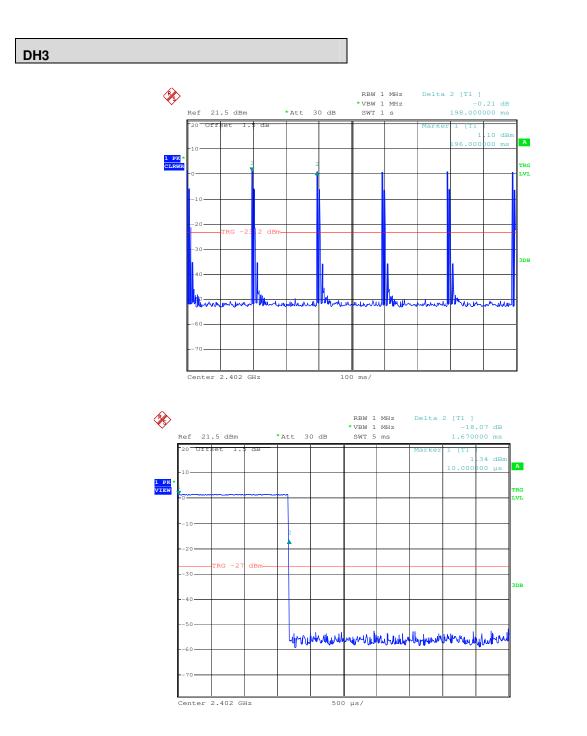



Report No.: SZEM121100616701 Page: 48 of 75

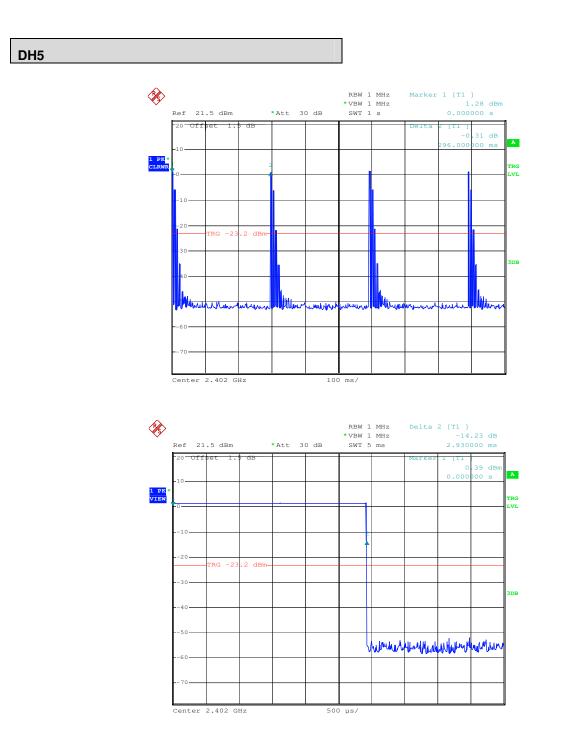



Report No.: SZEM121100616701 Page: 49 of 75


#### 5.9 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.				
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type				
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 50 of 75

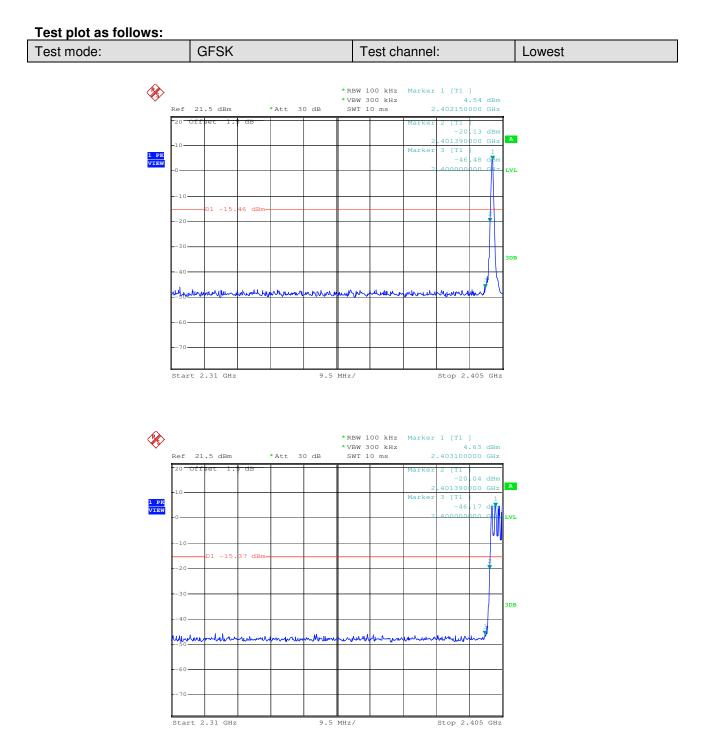




Report No.: SZEM121100616701 Page: 51 of 75

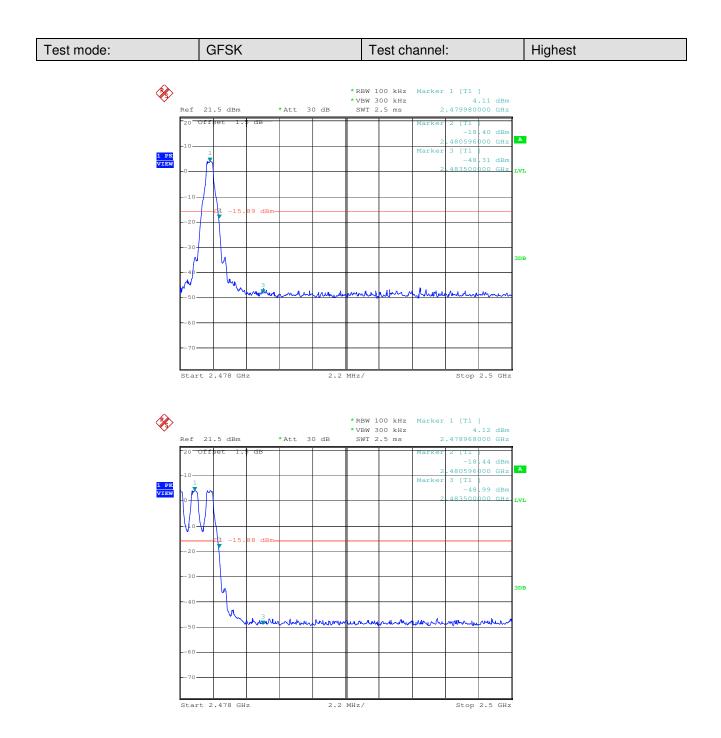

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 52 of 75

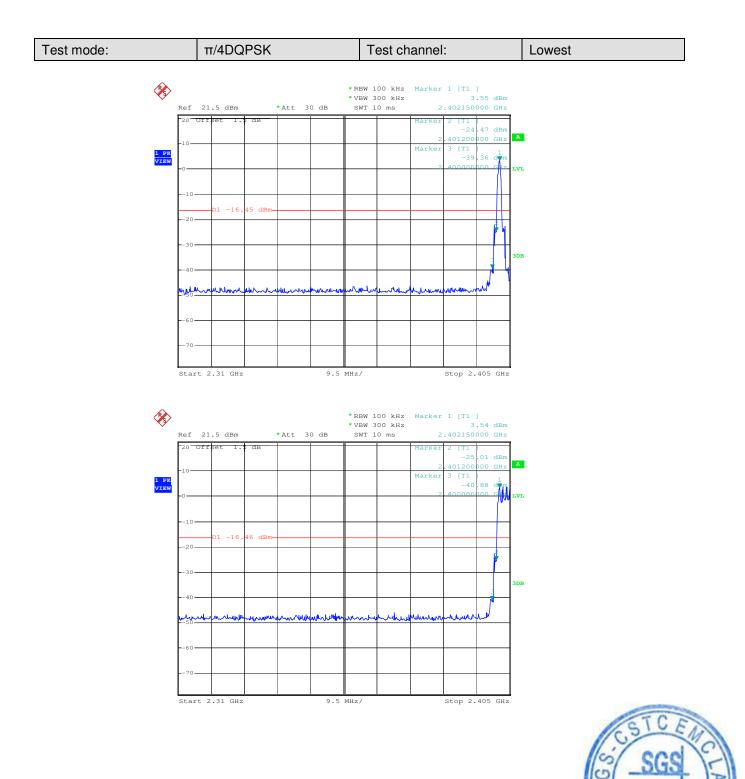




Report No.: SZEM121100616701 Page: 53 of 75

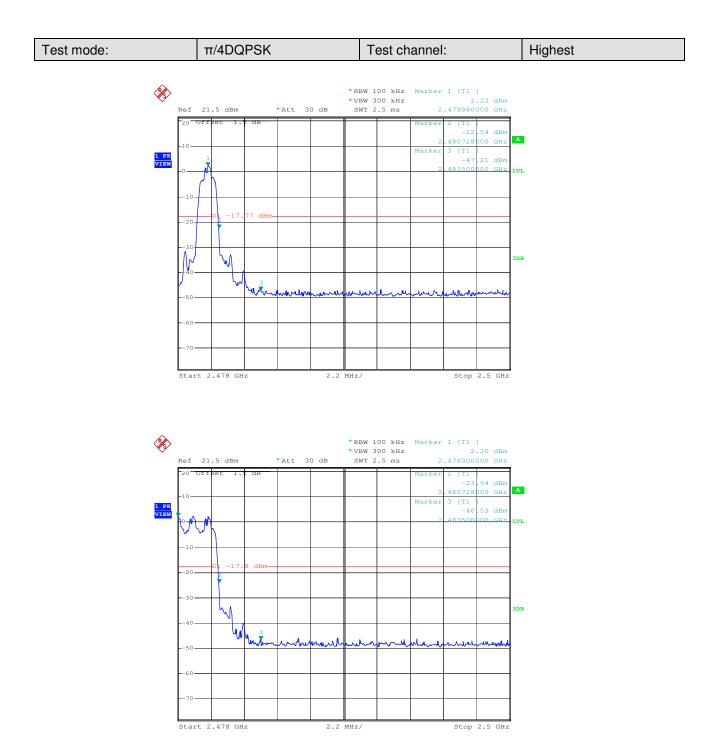

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 54 of 75

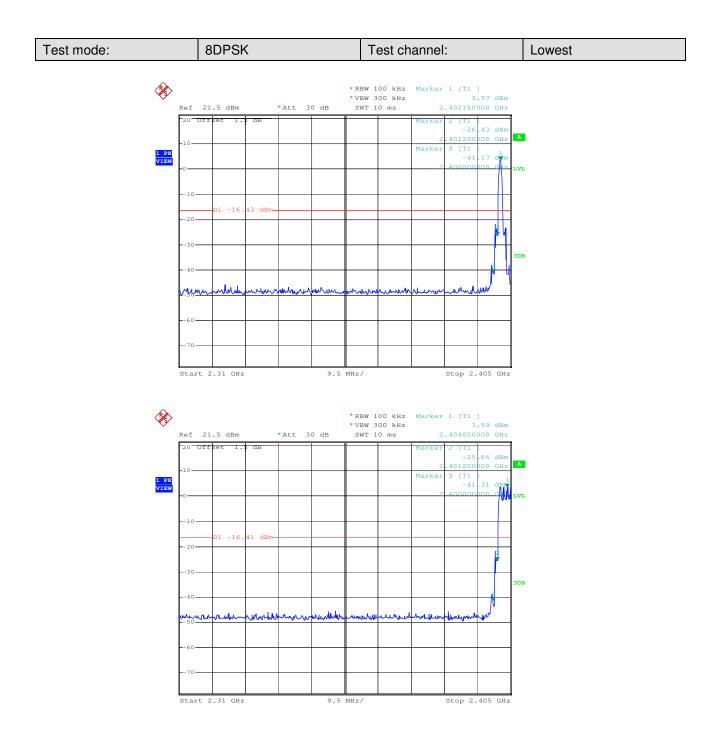



Report No.: SZEM121100616701 Page: 55 of 75

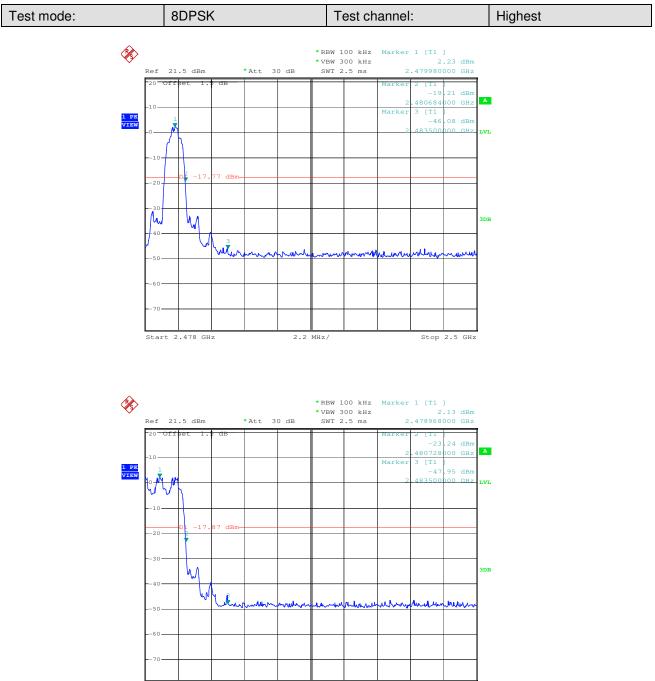

 Start 2.478 GHz
 2.2 MHz/
 Stop 2.5 GHz



Report No.: SZEM121100616701 Page: 56 of 75


### **5.10Spurious RF Conducted Emissions**

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type, 2-DH1 of date type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of date type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 57 of 75

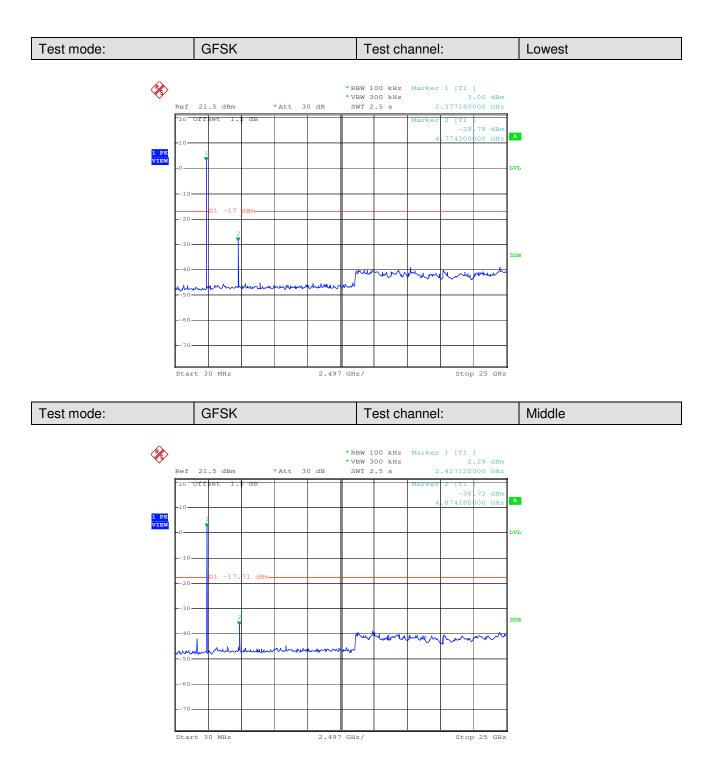




Report No.: SZEM121100616701 Page: 58 of 75

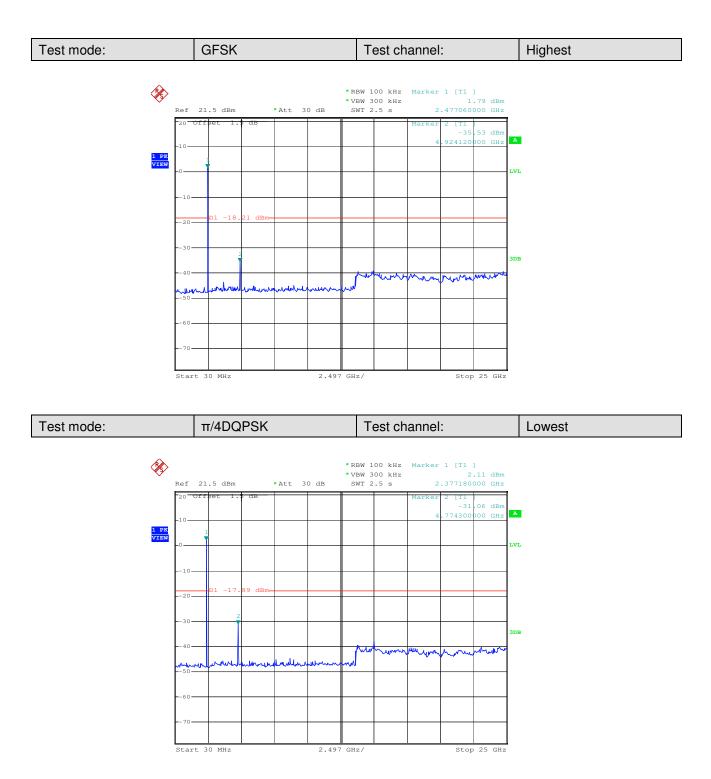




Report No.: SZEM121100616701 Page: 59 of 75

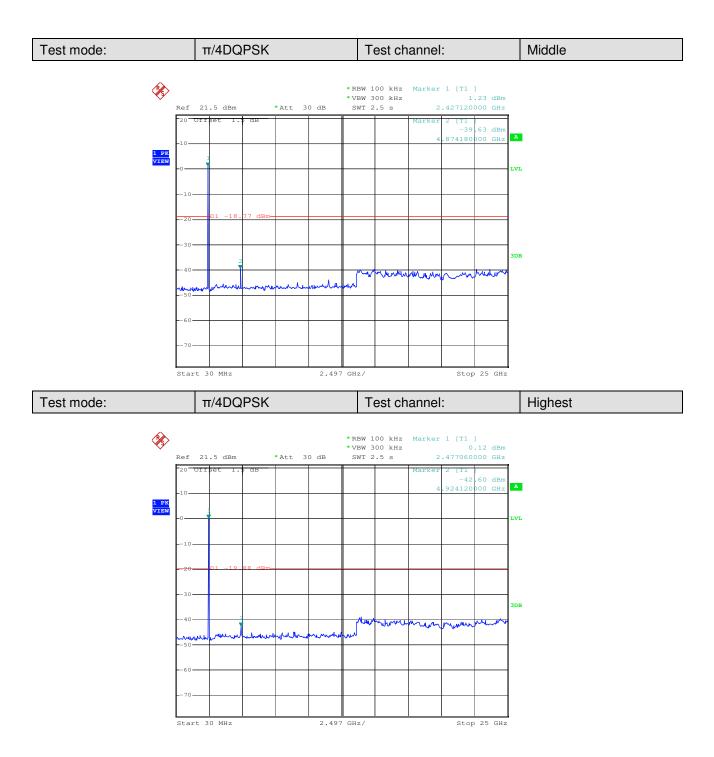

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM121100616701 Page: 60 of 75

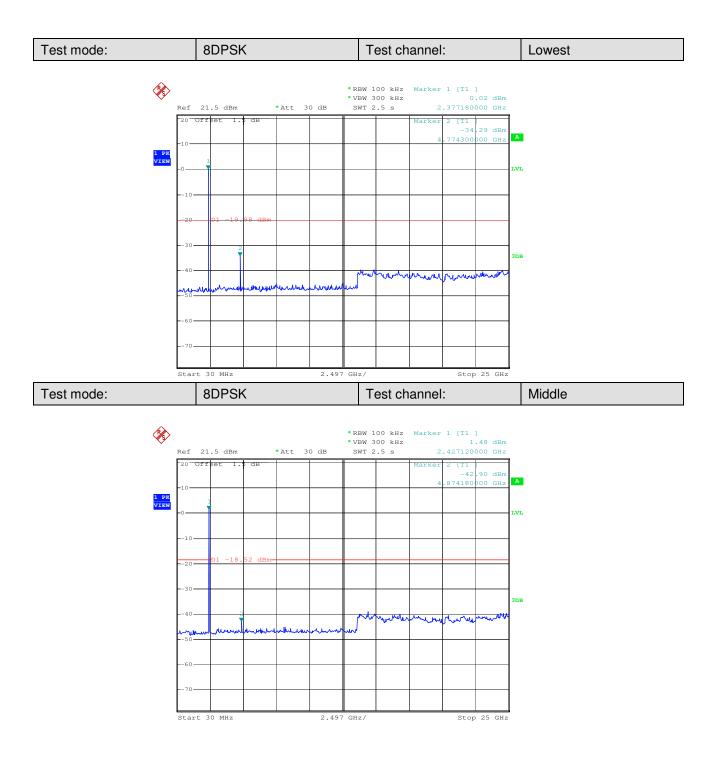




Report No.: SZEM121100616701 Page: 61 of 75

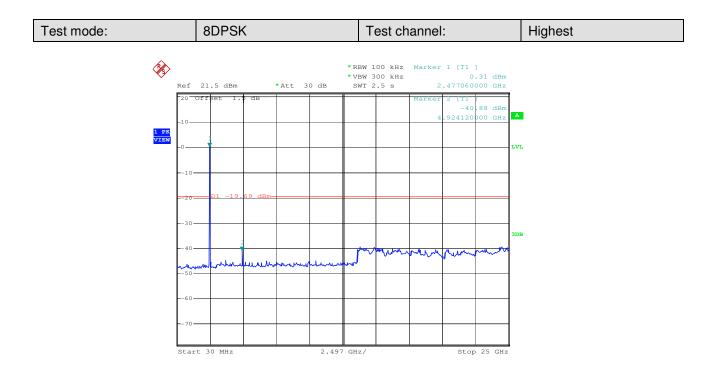



Report No.: SZEM121100616701 Page: 62 of 75

## 5.11 Pseudorandom Frequency Hopping Sequence

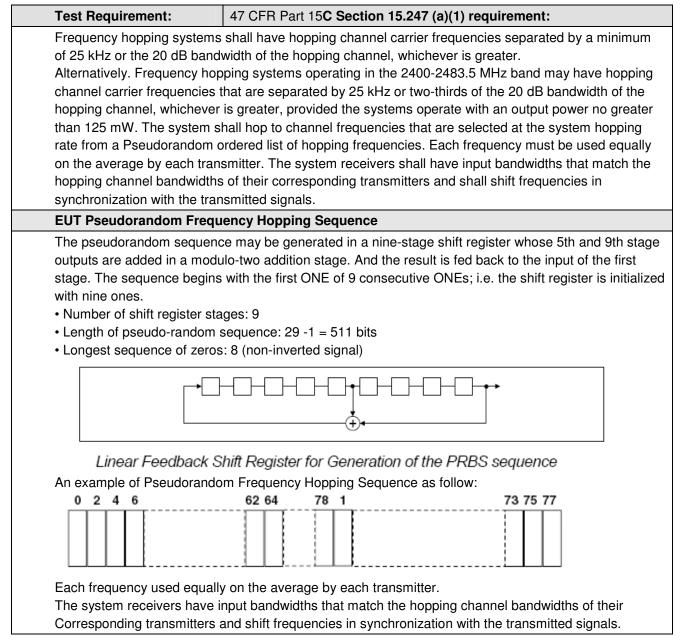





Report No.: SZEM121100616701 Page: 63 of 75


### **5.12 Radiated Spurious Emission**

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz	Peak		
			Peak	1MHz	10Hz	Average	Average	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz         500         54.0         Average         3           Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission lim applicable to the equipment under test. This peak limit applies to the tot peak emission level radiated by the device.							

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 64 of 75

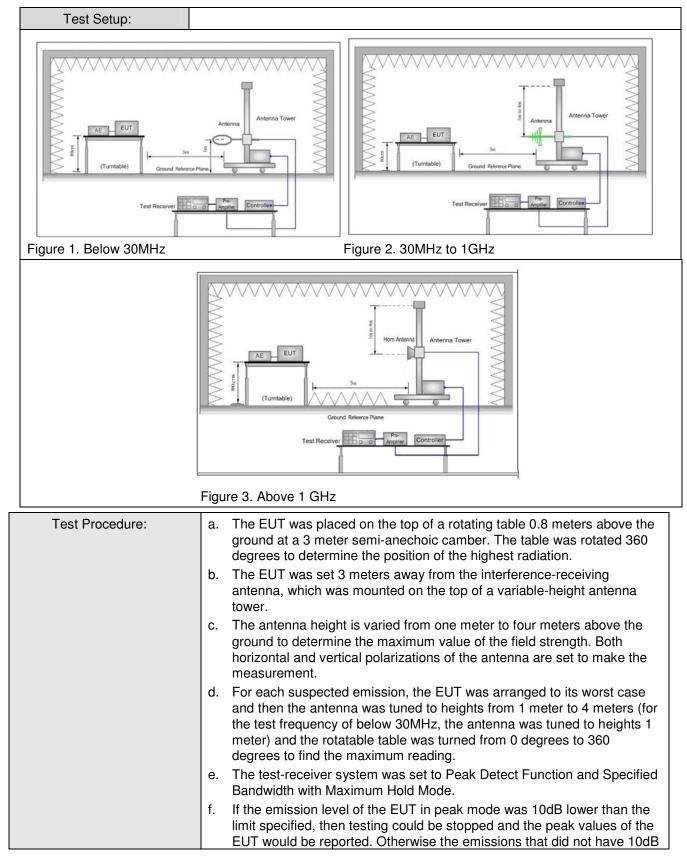



Report No.: SZEM121100616701 Page: 65 of 75

	<ul><li>margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</li></ul>
	<ul> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ul>
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Charge + Transmitting mode, Transmitting mode
Final Test Mode:	Through Pre-scan, find the Charge + Transmitting mode is the worse case as below 1GHz, the test worse case mode is recorded in the report.
	Through Pre-scan, find the DH1 of date type is the worse case of GFSK
	modulation type as above 1GHz, the test worse case mode is recorded in the report.
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM121100616701 Page: 66 of 75

#### 5.12.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

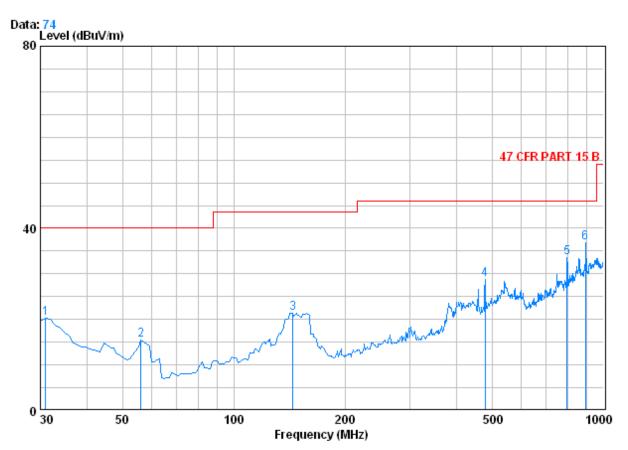


Condition : 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 6167RF

test mode : PC charge+Tx

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.970	0.60	17.15	27.35	29.80	20.20	40.00	-19.80
2	56.190	0.80	6.44	27.28	35.41	15.38	40.00	-24.62
3	144.460	1.31	8.96	26.93	38.11	21.45	43.50	-22.05
4	478.140	2.52	13.37	27.60	40.46	28.75	46.00	-17.25
50	797.270	3.20	17.93	27.30	39.74	33.58	46.00	-12.42
60	894.270	3.59	20.60	26.82	39.48	36.85	46.00	-9.15



Report No.: SZEM121100616701 Page: 67 of 75

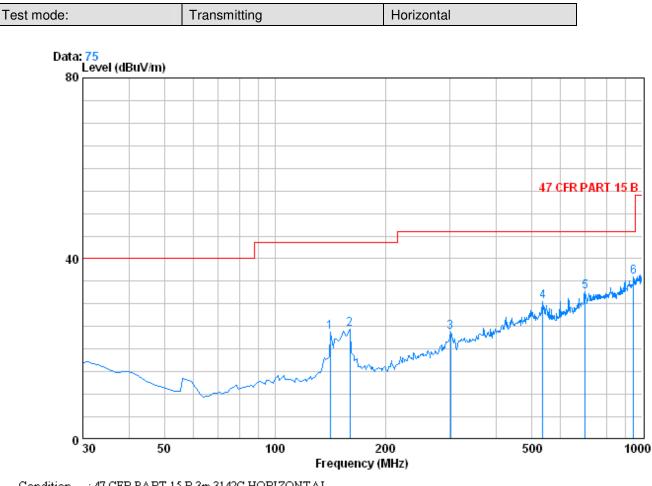

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL Job No. : 6167RF

test mode	: PC charge+Tx
-----------	----------------

	Freq		Antenna Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 0	141.550 159.980 300.630 536.340 699.300	1.30 1.34 1.90 2.64 2.90	8.24 9.60 13.90 18.68 21.60	26.95 26.86 26.40 27.64 27.41	41.06 40.28 34.41 36.94 35.64	24.36 23.81 30.62	43.50 46.00 46.00	-19.85 -19.14 -22.19 -15.38 -13.27
60	948.590	3.65	23.30	26.54	35.63	36.04	46.00	-9.96



Report No.: SZEM121100616701 Page: 68 of 75

Worse case i	mode:	GFSK(DH1)	Test	channel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1593.340	2.58	28.84	39.39	48.36	40.39	74	-33.61	Vertical
3184.250	3.47	33.33	40.44	47.61	43.97	74	-30.03	Vertical
4191.816	4.29	34.36	41.18	47.22	44.69	74	-29.31	Vertical
4785.075	4.68	34.73	41.61	63.48	61.28	74	-12.72	Vertical
6412.427	5.23	36.18	40.56	47.90	48.75	74	-25.25	Vertical
8725.477	6.17	36.37	38.55	46.28	50.27	74	-23.73	Vertical
1593.340	2.58	28.84	39.39	50.26	42.29	74	-31.71	Horizontal
2013.795	2.84	31.83	39.57	47.22	42.32	74	-31.68	Horizontal
3561.636	3.79	33.28	40.72	48.52	44.87	74	-29.13	Horizontal
4785.075	4.68	34.73	41.61	58.48	56.28	74	-17.72	Horizontal
6347.466	5.22	36.12	40.63	47.89	48.60	74	-25.40	Horizontal
9251.580	6.08	36.89	38.11	45.78	50.64	74	-23.36	Horizontal

#### 5.12.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1	) Tes	t channel:	Middle	Rem	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1746.251	2.67	29.95	39.46	44.46	37.62	74	-36.38	Vertical
2630.837	3.11	32.89	40.03	44.97	40.94	74	-33.06	Vertical
3588.939	3.81	33.30	40.73	46.12	42.50	74	-31.50	Vertical
4883.519	4.72	34.59	41.68	65.15	62.78	74	-11.22	Vertical
6187.929	5.18	35.92	40.76	46.51	46.85	74	-27.15	Vertical
7941.185	6.21	36.00	39.24	46.25	49.22	74	-24.78	Vertical
1621.985	2.59	29.09	39.41	49.94	42.21	74	-31.79	Horizontal
2754.185	3.18	33.05	40.12	47.26	43.37	74	-30.63	Horizontal
4065.707	4.21	33.99	41.08	47.47	44.59	74	-29.41	Horizontal
4883.519	4.72	34.59	41.68	67.69	65.32	74	-8.68	Horizontal
6696.01	5.31	36.11	40.31	47.78	48.89	74	-25.11	Horizontal
8725.477	6.17	36.37	38.55	46.93	50.92	74	-23.08	Horizontal



Report No.: SZEM121100616701 Page: 69 of 75

Worse case	mode:	GFSK(DH1	) Tes	t channel:	Highest	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1364.182	2.43	27.85	39.29	46.95	37.94	74	-36.06	Vertical
1764.123	2.69	30.07	39.46	53.87	47.17	74	-26.83	Vertical
3903.444	4.08	33.70	40.97	46.80	43.61	74	-30.39	Vertical
4971.316	4.76	34.43	41.75	67.58	65.02	74	-8.98	Vertical
6974.358	5.50	35.83	40.08	47.67	48.92	74	-25.08	Vertical
9251.580	6.08	36.89	38.11	44.67	49.53	74	-24.47	Vertical
1642.761	2.60	29.21	39.42	50.47	42.86	74	-31.14	Horizontal
3120.061	3.41	33.35	40.40	47.54	43.90	74	-30.10	Horizontal
4547.561	4.53	35.12	41.44	48.35	46.56	74	-27.44	Horizontal
4971.316	4.76	34.43	41.75	61.95	59.39	74	-14.61	Horizontal
6696.010	5.31	36.11	40.31	48.26	49.37	74	-24.63	Horizontal
8462.975	6.18	36.19	38.78	46.19	49.78	74	-24.22	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) Refer to section 5.9 for details, Average Value=Peak Value+PDCF; The worst PDCF is -30.66dB. So, only the peak measurements were shown in the report.



Report No.: SZEM121100616701 Page: 70 of 75

# 5.13Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
		74.0	Peak Value							
Test Setup:	Test Setup:									
Test Setup:         Image: Controller plane         <										
Figure 1. 30MHz to 1GHz	Fig	jure 2. Above 1 GHz								



Report No.: SZEM121100616701 Page: 71 of 75

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of date type is the worse case of
	GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM121100616701 Page: 72 of 75


Data: 29 Level (dBuV/m)								2	
								2	
								2	
								2	
								2	
								2	
								- 11	$\left\{ \cdot \right\}$
						FC	C PART1	<u>5(&gt;1G) P</u>	<u>IK</u>
									1
								- 11	
60									
									_
							1.		
mounder	man and a	al and the second second	un hale	Jer-raine-	man Shadan and	and the state of the state	www.www.	~~~	
									_
0 2310 2320		235	50					2	240
		Fi	requency	(MHz)					
Condition : FCC PART15(	(>1G) PK 3m VEI	RTICAL							
EUT : Bluetooth hea	adset								
Job No. : 6167RF test mode : 2402 BANDEI	DOF								
test mode 12402 DANDEL		eAntenna F	reamn	Read		Limit	Over	-	
		s Factor F							
	-								
	MHz di	B dB/m	dB	dBuV	dBuV/m	dBuV/m	dI	3	
1 2390	).085 2.9	3 32.51	39.85	46.06	41.71	74 00	-32.29	2	
	2.150 2.9		39.85 39.86	40.00 95.57	91.20	74.00			
5105				20.01			21.00		
								GT	C

CSTC EARCHAB SOS SGS AB 家山 AB 家山



Report No.: SZEM121100616701 Page: 73 of 75

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

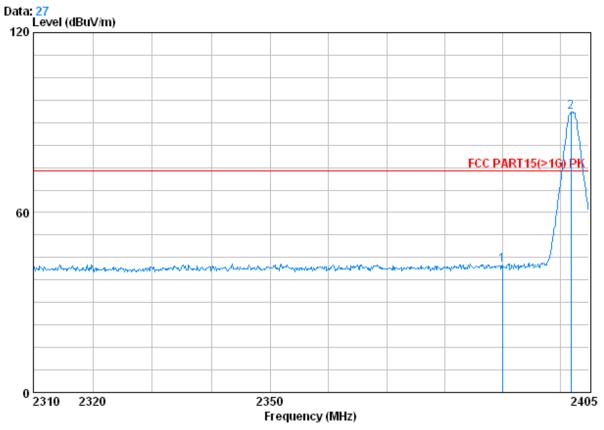

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

EUT : Bluetooth headset

Job No. : 6167RF


test mode : 2402 BANDEDGE

		Freq			Preamp Factor				Over Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2	x	2390.000 2401.865			39.85 39.86				



Report No.: SZEM121100616701 Page: 74 of 75

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
-----------------------------	---------------	---------	---------	------	----------

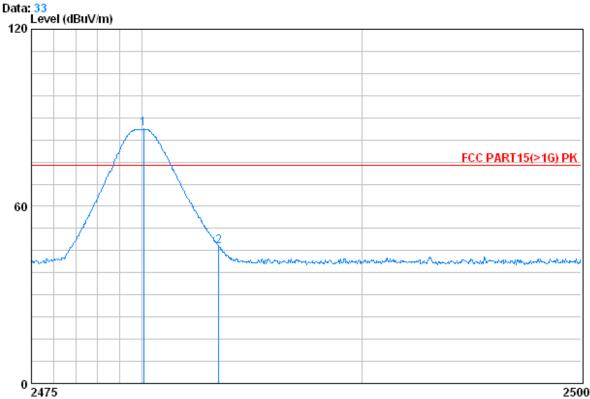

Frequency (MHz)

: FCC PART15(>1G) PK 3m VERTICAL Condition EUT : Bluetooth headset Job No. :6167RF


test mode : 2480 BANDEDGE

	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X 2				39.92 39.92				



Report No.: SZEM121100616701 Page: 75 of 75

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

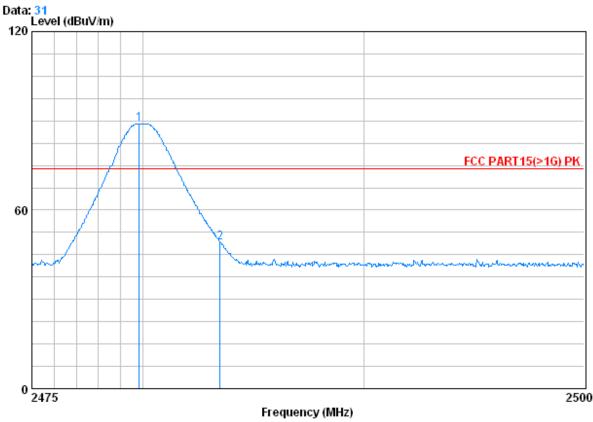

Condition : FCC PART15(>1G) PK 3m HORIZONTAL EUT : Bluetooth headset Job No. :6167RF test mode 2480 BANDEDGE CableAntenna Preamp Read Limit Over Loss Factor Factor Level Level Freq Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB dB 3.03 1 X 2479.850 32.67 39.92 93.27 89.05 74.00 15.05 3.03 32.67 2 2483.500 39.92 53.33 49.11 74.00 -24.89

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Refer to section 5.9 for details, Average Value=Peak Value+PDCF; The worst PDCF is -30.66dB. So, only the peak measurements were shown in the report.