

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM110800310301

Email: sgs_internet_operations@sgs.com Page : 1 of 70

FCC REPORT

Application No: SZEM1108003103RF

Applicant: SKY WING Communication Electronics Co., Ltd. **Manufacturer/Factory:** SKY WING Communication Electronics Co., Ltd.

Product Name: Bluetooth Headset

Operation Frequency: 2402MHz to 2480MHz

FCC ID: WSGSK-BH-M10B

Standards: FCC CFR Title 47 Part 15 Subpart C

Date of Receipt: 2011-08-19

Date of Test: 2011-08-19 to 2011-08-30

Date of Issue: 2011-09-16

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM110800310301

Page : 2 of 70

2 Contents

1	CC	OVER PAGE	Page 1
•			
2	CC	ONTENTS	2
3	TE	ST SUMMARY	3
4	GE	ENERAL INFORMATION	4
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF E.U.T.	4
	4.3	E.U.T OPERATION MODE	6
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST FACILITY	
	4.6	TEST LOCATION	
	4.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.8	TEST INSTRUMENTS LIST	8
5	TE	ST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna requirement:	10
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	14
	5.4	20DB OCCUPY BANDWIDTH	20
	5.5	CARRIER FREQUENCIES SEPARATION	26
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	
	5.8	BAND EDGE	42
	5.9	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	55
	5.11	RADIATED EMISSION	
	5.1	11.1 Radiated emission below 1GHz	
	•	11.2 Transmitter emission above 1GHz	
	5.1	11.3 Band edge (Radiated Emission)	63-70



Report No.: SZEM110800310301

Page : 3 of 70

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEM110800310301

Page : 4 of 70

4 General Information

4.1 Client Information

Applicant:	SKY WING Communication Electronics Co., Ltd.
Address of Applicant:	No.10 Road 63#, Long yan, Humen Town, Dongguan City
Manufacturer:	SKY WING Communication Electronics Co., Ltd.
Address of Manufacturer:	No.10 Road 63#, Long yan, Humen Town, Dongguan City
Factory:	SKY WING Communication Electronics Co., Ltd.
Address of Factory:	No.10 Road 63#, Long yan, Humen Town, Dongguan City

4.2 General Description of E.U.T.

Product Name:	Bluetooth Headset
Model No.:	SK-BH-M10B
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, π/4DQPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	1dBi
AC adapter:	AC 100-240V 50/60Hz
	DC 5.0V
EUT power supply:	DC 4.2V "JHY502030"
USB Cable:	100cm



Report No.: SZEM110800310301

Page : 5 of 70

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
Lowest channel	2402MHz
Middle channel	2441MHz
Highest channel	2480MHz



Report No.: SZEM110800310301

Page : 6 of 70

4.3 E.U.T Operation mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Bluetooth	Keep the EUT working in continuous transmission mode with 100% duty cycle and measuring in X, Y, Z axis positioning, power supplied by battery
Bluetooth + Charge	Keep the EUT working in continuous transmission mode with 100% duty cycle, power supplied by AC adapter.

4.4 Description of Support Units

The EUT was tested with associated equipment as below:

Description	Description Manufacturer	
Adapter	DYS	DYS051000

GS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800310301

Page : 7 of 70

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, March 16, 2011

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.



Report No.: SZEM110800310301

Page : 8 of 70

4.8 Test Instruments list

RE i	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2011-06-10	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2011-05-26	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2011-05-29	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2011-05-26	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
11	Band filter	Amindeon	82346	SEL0094	2011-05-26	2012-05-26

Con	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2011-06-10	2012-06-10	
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2010-10-27	2011-10-26	
3	Two-Line V-Network	ETS-LINDGREN	3816/2	SEL0021	2011-05-26	2012-05-26	
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2011-05-26	2012-05-26	
5	Coaxial Cable	SGS	N/A	SEL0024	2011-05-29	2012-05-29	

RF c	RF conducted						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2010-10-27	2011-10-27	
2	Coaxial cable	SGS	N/A	SEL0028	2011-05-29	2012-05-29	



Report No.: SZEM110800310301

Page : 9 of 70

General used equipment							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2010-11-04	2011-11-04	
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2011-03-10	2012-03-10	
3	Barometer	ChangChun	DYM3	SEL0088	2011-05-18	2012-05-18	



Report No.: SZEM110800310301

Page : 10 of 70

5 Test results and Measurement Data

5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 1dBi.

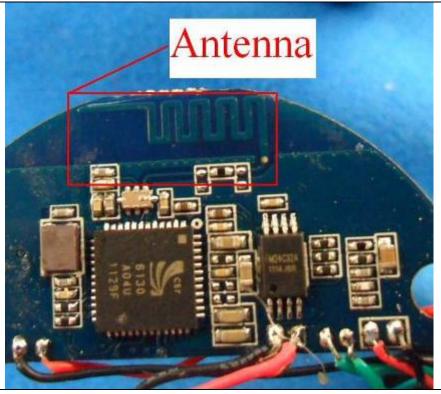



Report No.: SZEM110800310301

Page : 11 of 70

5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10: 2009		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (d	lBuV)
	1 , , ,	Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
Test procedure	* Decreases with the logarithm The E.U.T and simulators are		
	impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.		
Test setup:	Reference Plane		
	AUX Equipment E.U.T Filter AC power Remark: E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 4.8 for details		
Test mode:	Bluetooth + Charge mode		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEM110800310301

Page : 12 of 70

Live Line:

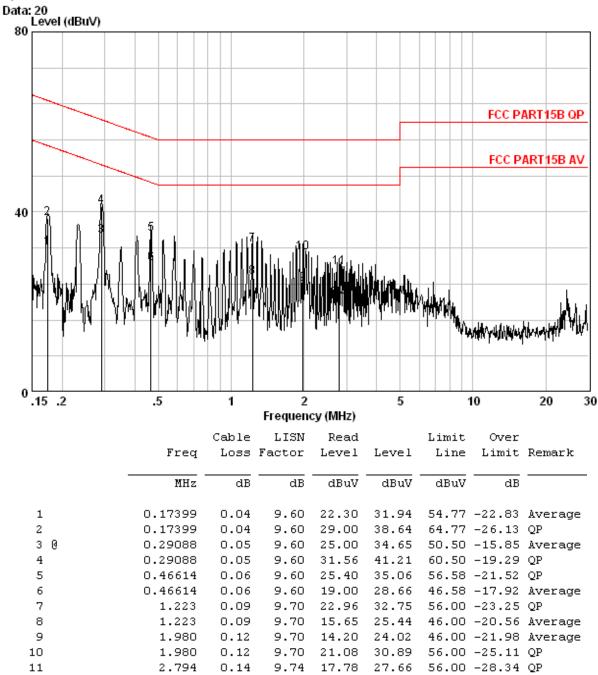

Notes:

12

1. The following Quasi-Peak and Average measurements were performed on the EUT:

9.74

11.30

21.17

46.00 -24.83 Average

0.14

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


2.794



Report No.: SZEM110800310301

Page : 13 of 70

Neutral Line:

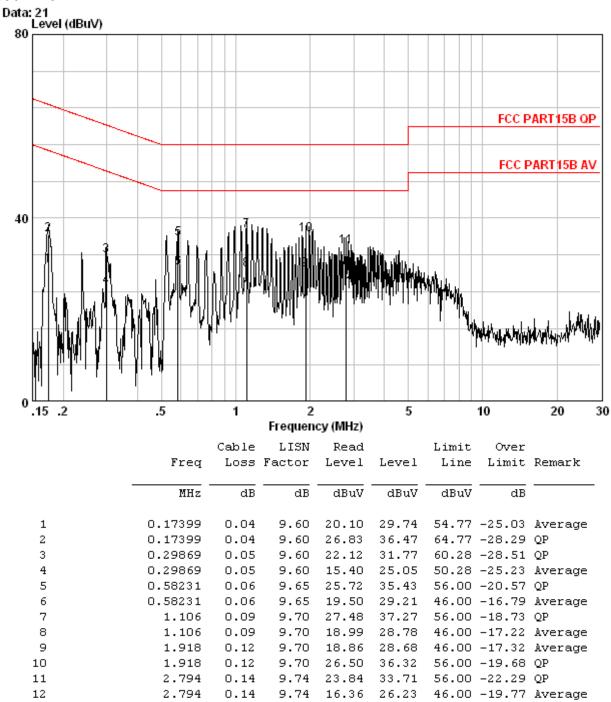

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800310301

Page : 14 of 70

5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	30dBm	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table	
	Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Bluetooth mode	
Test results:	Pass	

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	9.06	30.00	Pass
Middle	8.89	30.00	Pass
Highest	8.17	30.00	Pass
	π/4DQPSK m	node	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	7.74	30.00	Pass
Middle	7.71	30.00	Pass
Highest	7.23	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	8.06	30.00	Pass
Middle	7.97	30.00	Pass
Highest	7.50	30.00	Pass




Report No.: SZEM110800310301


Page : 15 of 70

Test plot as follows:

Test mode: GFSK Test channel: Lowest

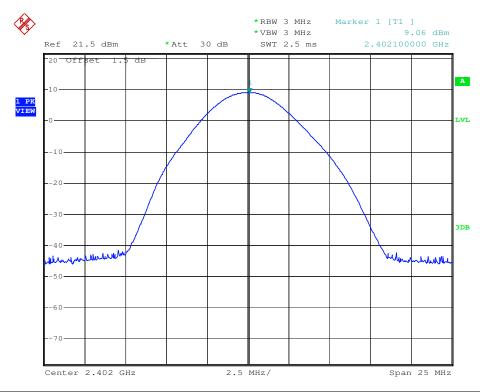



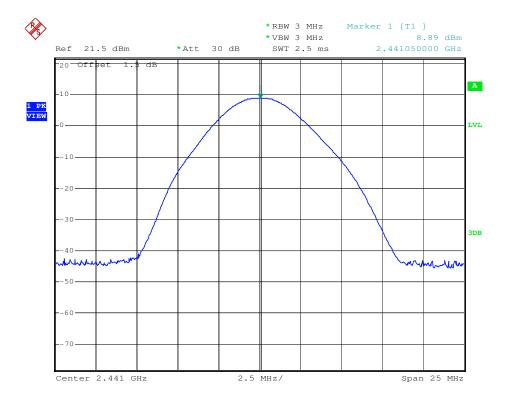





Report No.: SZEM110800310301

Page : 16 of 70

Test mode: GFSK Test channel: Highest

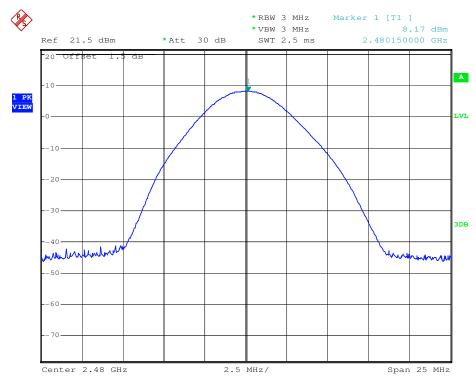

Test mode: π/4DQPSK Test channel: Lowest

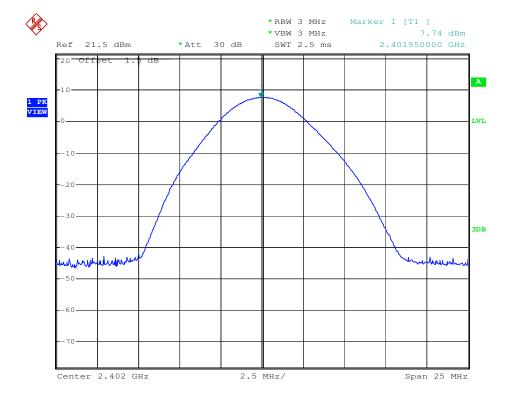





Report No.: SZEM110800310301

Page : 17 of 70

Test mode: π/4DQPSK Test channel: Middle

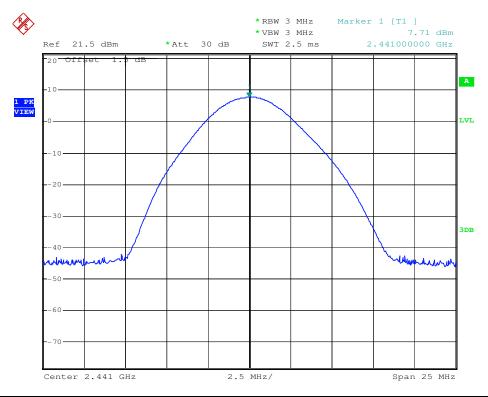

Test mode: π/4DQPSK Test channel: Highest

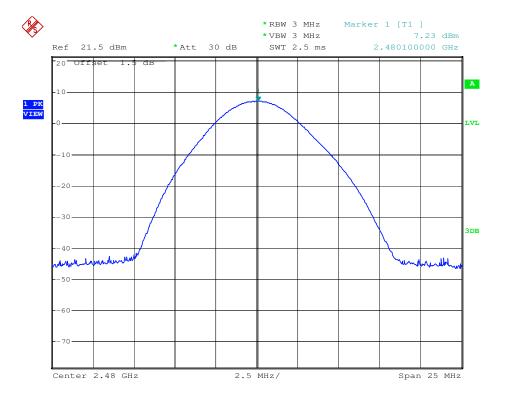





Report No.: SZEM110800310301

Page : 18 of 70

Test mode: 8DPSK Test channel: Lowest

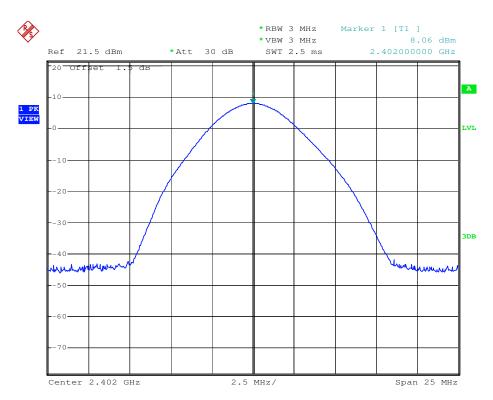



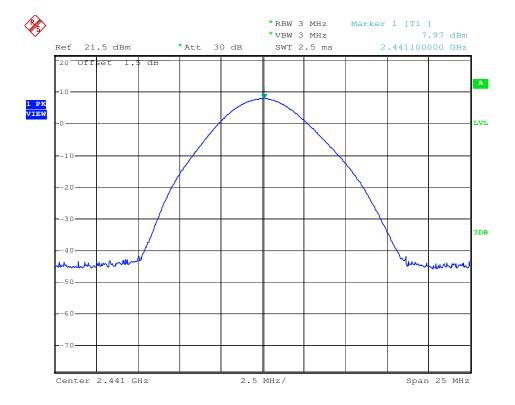




Report No.: SZEM110800310301

Page : 19 of 70

Test mode: 8DPSK Test channel: Highest

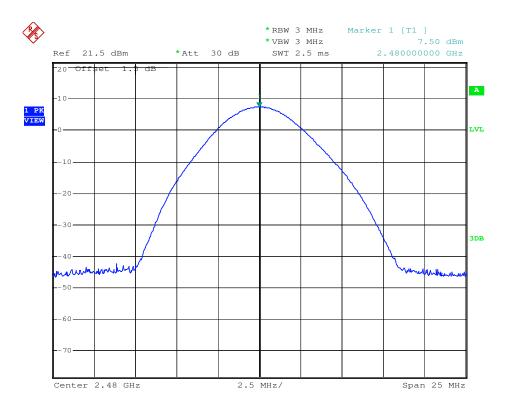

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 20 of 70

5.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Limit:	NA	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Test state:	Bluetooth mode	
Test results:	Pass	

Measurement Data


icasarchicht buta			
Total	20dB Occupy Bandwidth (KHz)		
Test channel	GFSK	π/4DQPSK	8DPSK
Lowest	822	1206	1206
Middle	822	1200	1212
Highest	822	1218	1206




Report No.: SZEM110800310301

Page : 21 of 70

Test plot as follows:

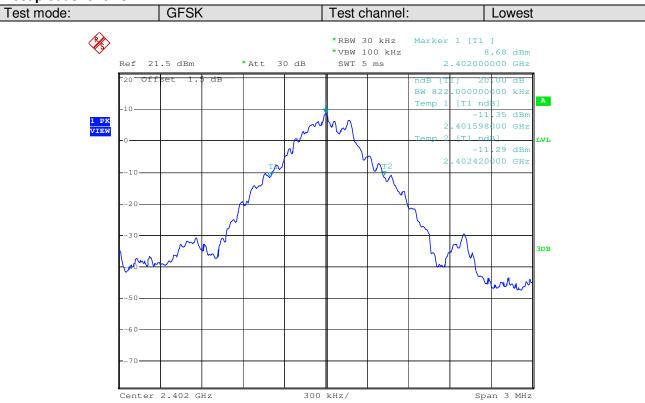

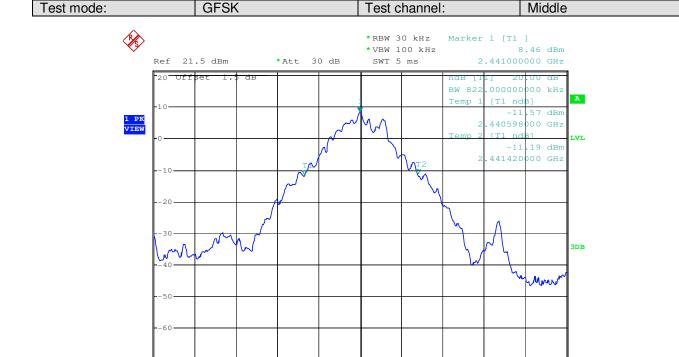

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

300 kHz/

Span 3 MHz


Center 2.441 GHz




Report No.: SZEM110800310301

Page : 22 of 70

Test mode: GFSK Test channel: Highest

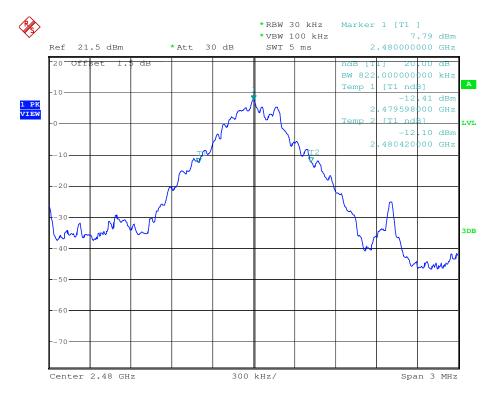

Test mode: π/4DQPSK Test channel: Lowest

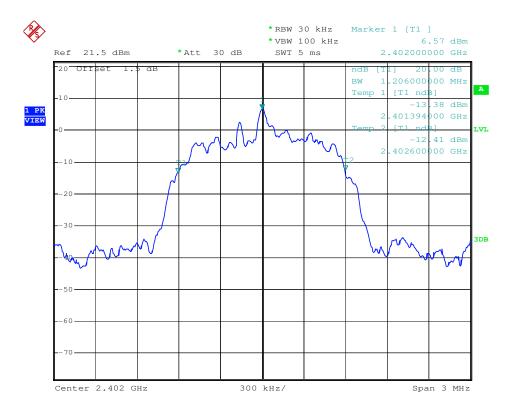





Report No.: SZEM110800310301

Page : 23 of 70

Test mode: $\pi/4DQPSK$ Test channel: Middle

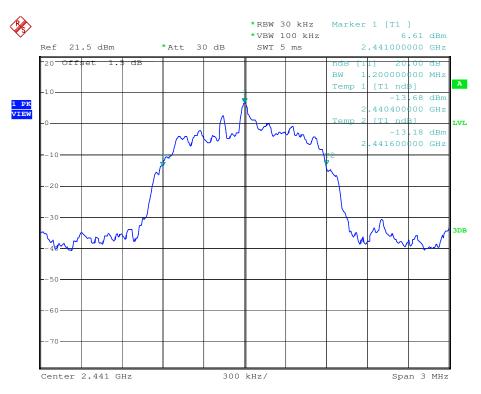


Test mode: π/4DQPSK Test channel: Highest

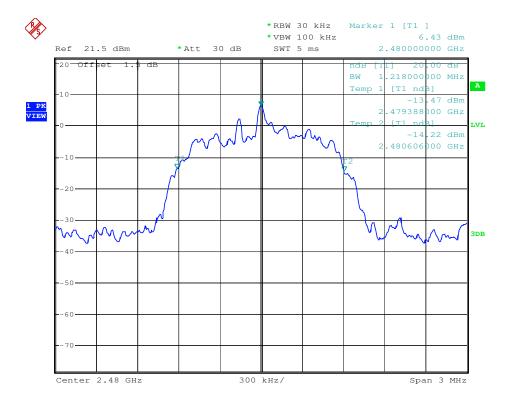




Report No.: SZEM110800310301

Page : 24 of 70

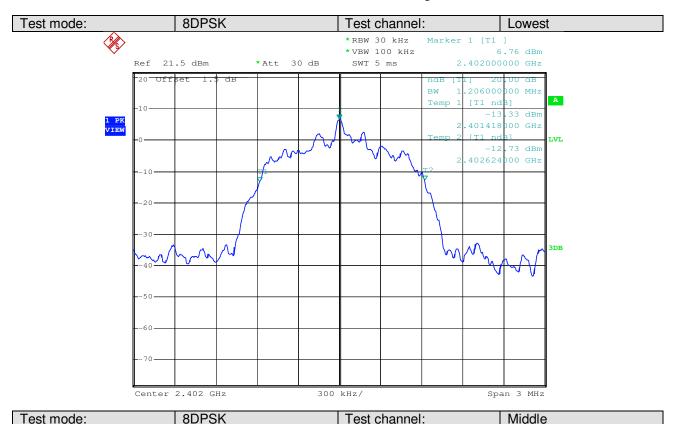

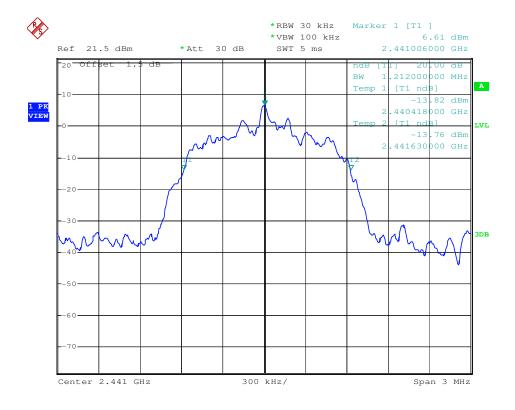




Report No.: SZEM110800310301

Page : 25 of 70

Test mode: 8DPSK Test channel: Highest

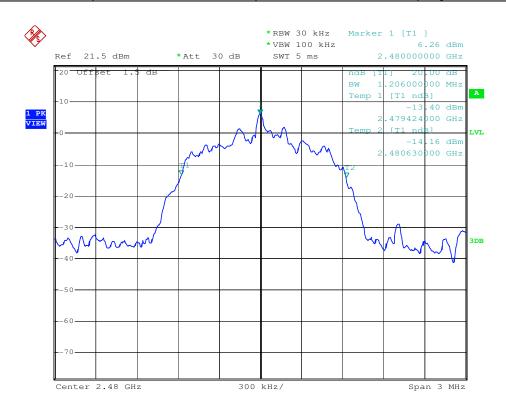



Report No.: SZEM110800310301

Page : 26 of 70

5.5 Carrier Frequencies Separation

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test state:	Bluetooth mode	
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Test Instruments:	Refer to section 4.8 for details	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test results:	Pass	



Report No.: SZEM110800310301

Page : 27 of 70

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1005	≥812	Pass
Middle	1000	≥812	Pass
Highest	1000	≥812	Pass
	π/4DQPSK m	rode	
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥812	Pass
Middle	1000	≥812	Pass
Highest	1005	≥812	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1005	≥812	Pass
Middle	1000	≥812	Pass
Highest	1000	≥812	Pass

Note: According to section 5.4,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	822	548
π/4DQPSK	1218	812
8DPSK	1212	808




Report No.: SZEM110800310301

Page : 28 of 70

Test plot as follows:

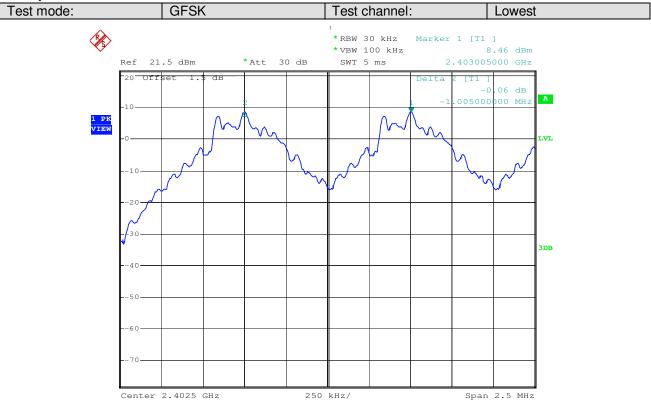

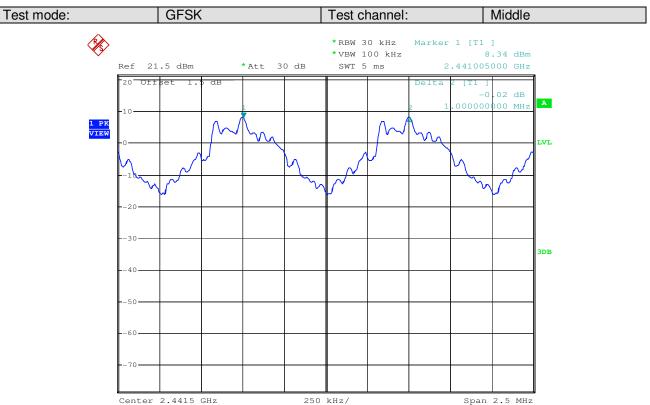





Report No.: SZEM110800310301

Page : 29 of 70

Test mode: GFSK Test channel: Highest

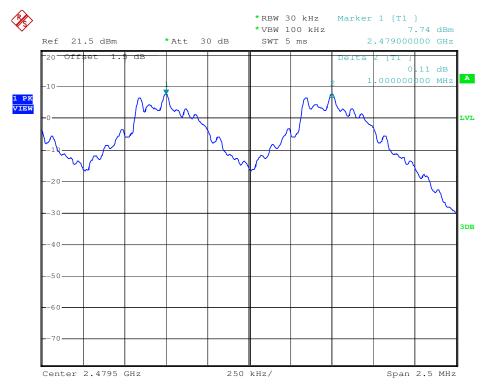

Test mode: π/4DQPSK Test channel: Lowest

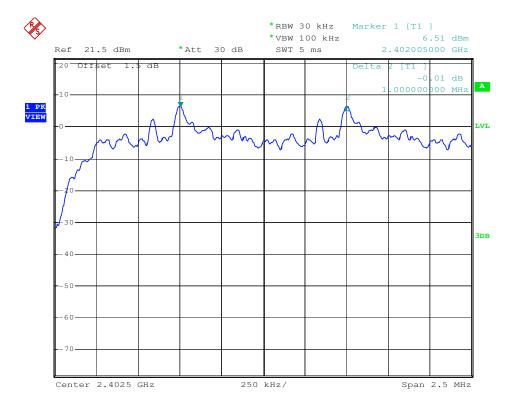





Report No.: SZEM110800310301

Page : 30 of 70

Test mode: π/4DQPSK Test channel: Middle

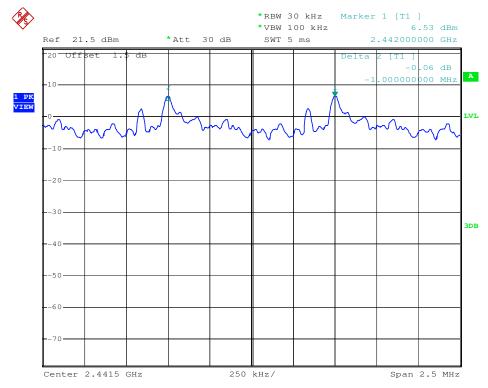



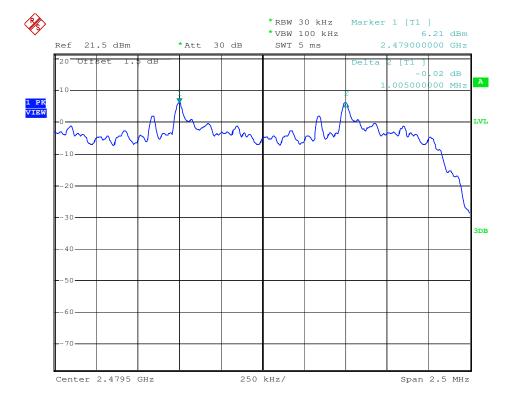





Report No.: SZEM110800310301

Page : 31 of 70

Test mode: 8DPSK Test channel: Lowest

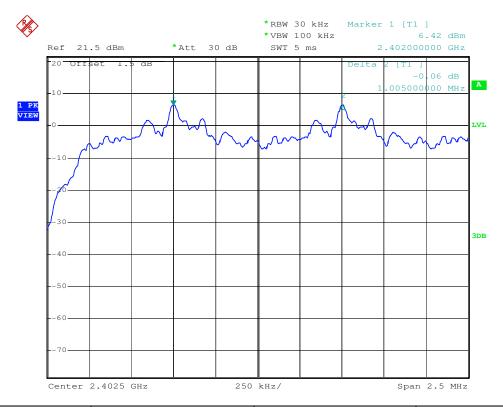



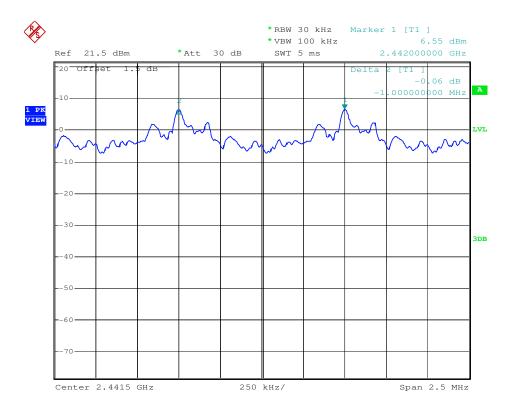




Report No.: SZEM110800310301

Page : 32 of 70

Test mode: 8DPSK Test channel: Highest

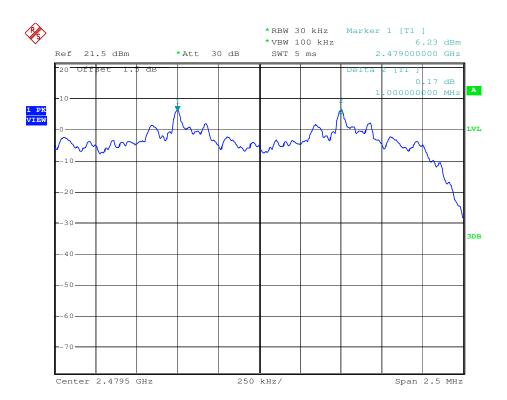

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 33 of 70

5.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Requirement:	≥75 channels
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 4.8 for details
Test state:	Bluetooth mode
Test results:	Pass

Measurement Data

Mode	Hopping channel	Requirement
GFSK	79	≥75
π/4DQPSK	79	≥75
8DPSK	79	≥75




Report No.: SZEM110800310301


Page : 34 of 70

Test plot as follows



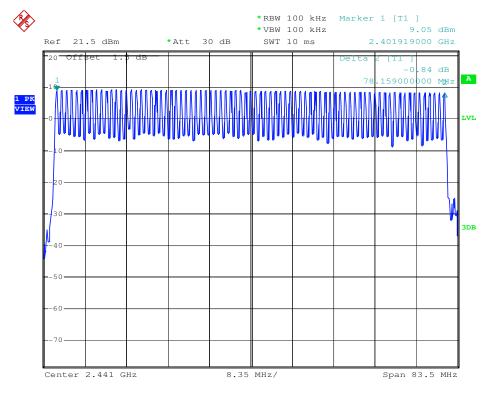



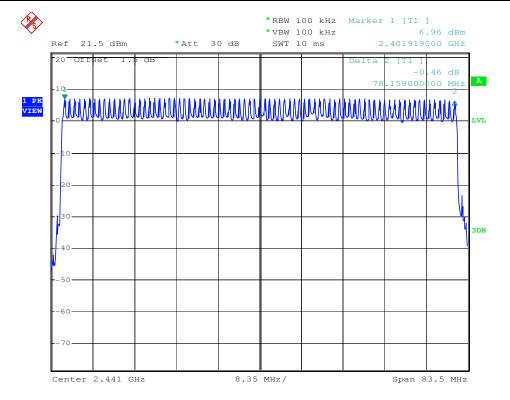




Report No.: SZEM110800310301

Page : 35 of 70

Test mode: 8DPSK

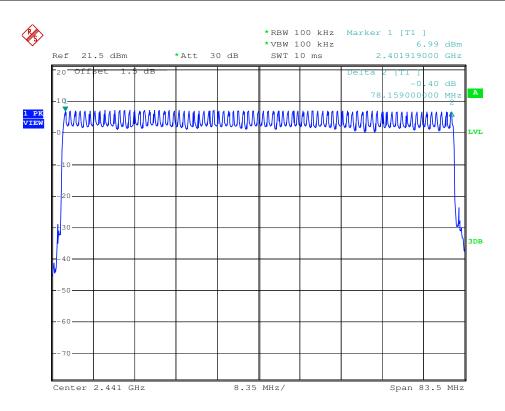

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 36 of 70

5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	≤ 0.4 Second
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
Test Instruments:	Refer to section 4.8 for details
Test state:	Bluetooth mode
Test results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1696	≤0.4
GFSK	DH3	0.2880	≤0.4
	DH5	0.3246	≤0.4
π/4DQPSK	2-DH1	0.1744	≤0.4
	2-DH3	0.2872	≤0.4
	2-DH5	0.1977	≤0.4
8DPSK	3-DH1	0.1712	≤0.4
	3-DH3	0.2872	≤0.4
	3-DH5	0.3241	≤0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot=0.530(ms)*(1600/ (2*79))*31.6=0.1696s

DH3 time slot=1.800(ms)*(1600/ (4*79))*31.6=0.2880s

DH5 time slot=3.045(ms)*(1600/ (6*79))*31.6=0.3246s




Report No.: SZEM110800310301


Page : 37 of 70

Test plot as follows



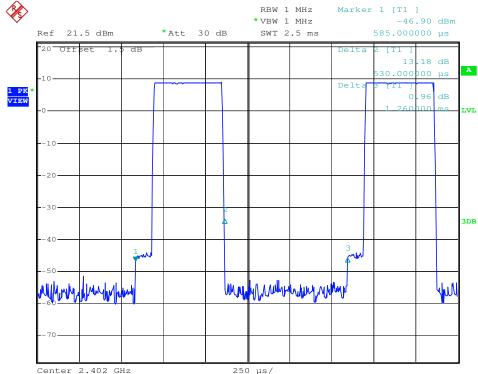

Test mode: GFSK Test Packet: DH3

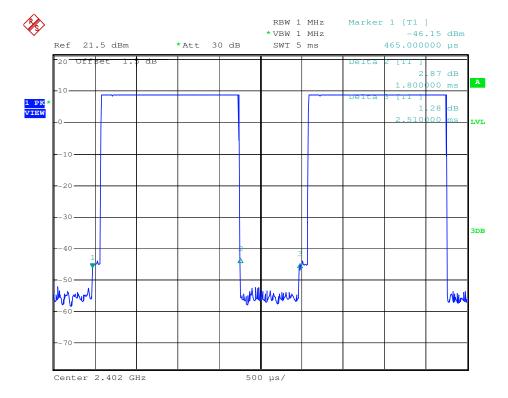





Report No.: SZEM110800310301

Page : 38 of 70

Test mode: GFSK Test Packet: DH5

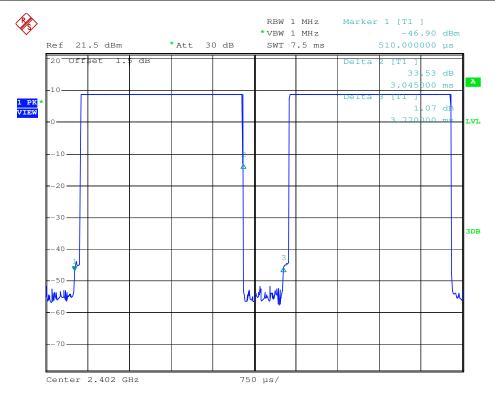

Test mode: π/4DQPSK Test Packet: 2-DH1

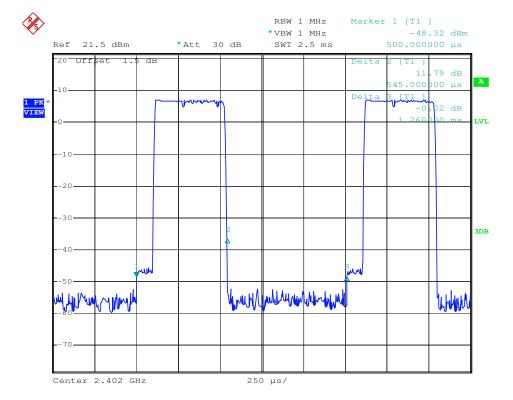





Report No.: SZEM110800310301

Page : 39 of 70

Test mode: π/4DQPSK Test Packet: 2-DH3

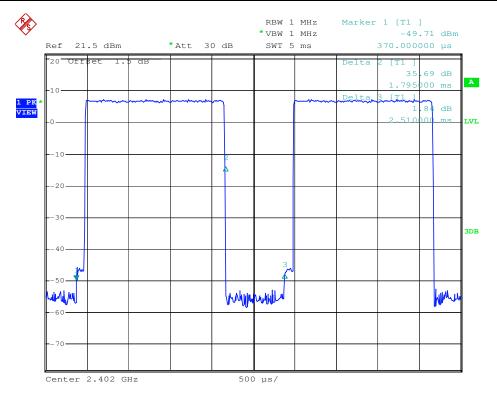



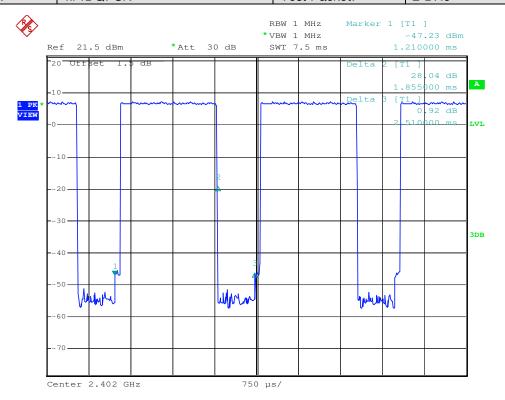





Report No.: SZEM110800310301

Page : 40 of 70

Test mode: 8DPSK Test Packet: 3-DH1

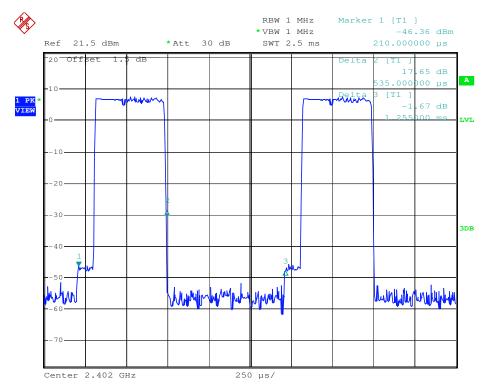



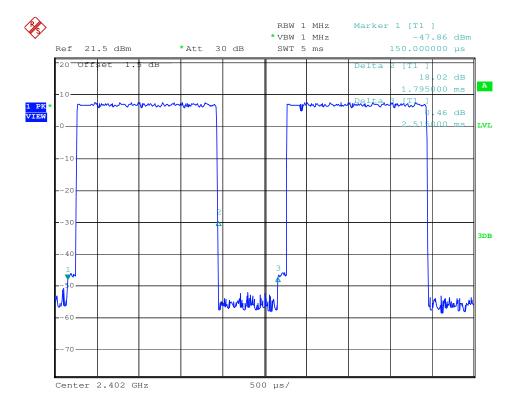




Report No.: SZEM110800310301

Page : 41 of 70

Test mode: 8DPSK Test Packet: 3-DH5

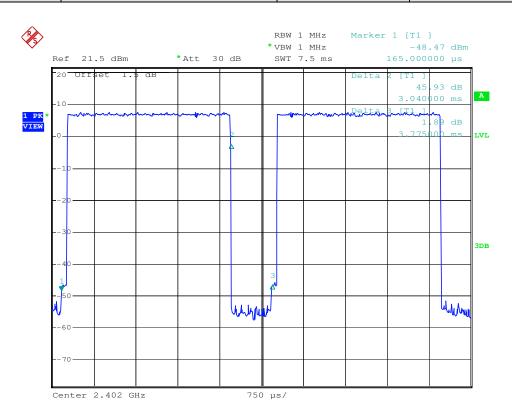

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 42 of 70

5.8 Band Edge

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.8 for details						
Test state:	Bluetooth mode						
Test results:	Pass						




Report No.: SZEM110800310301

Page : 43 of 70

Test plot as follows:



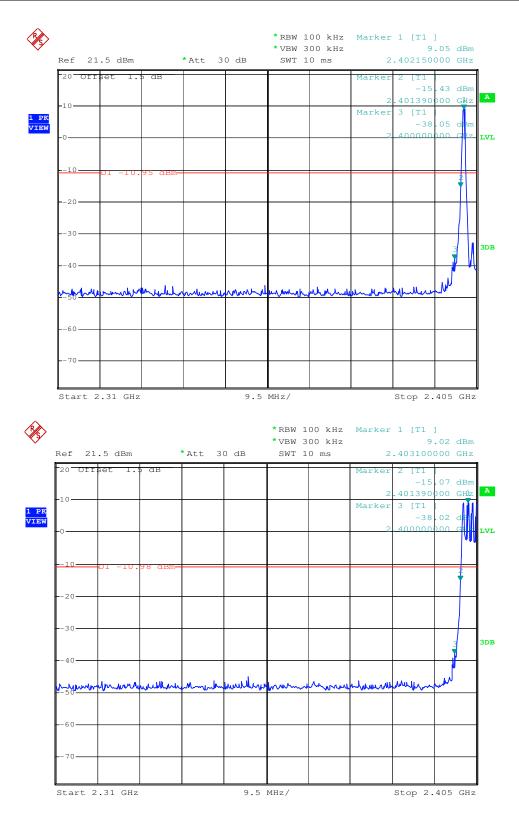




Report No.: SZEM110800310301

Page : 44 of 70



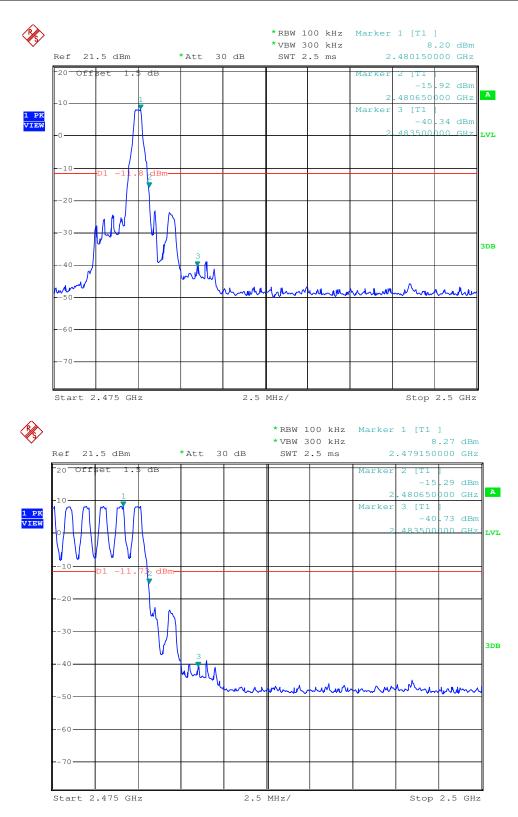




Report No.: SZEM110800310301

Page : 45 of 70



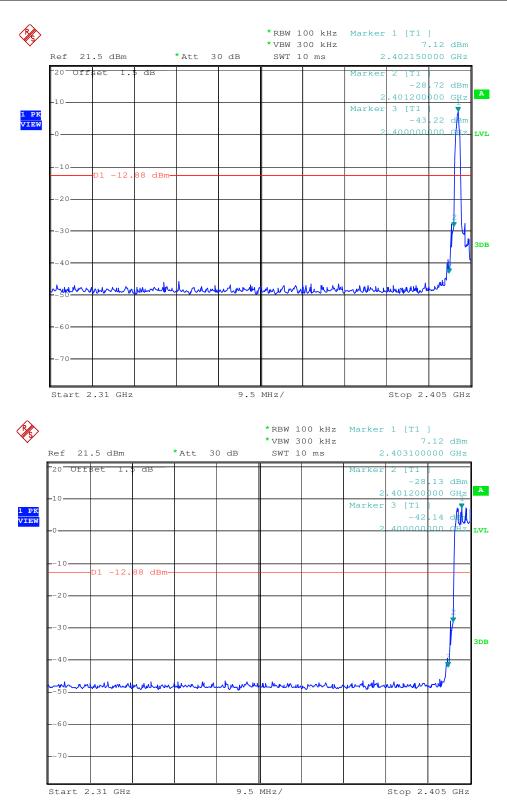




Report No.: SZEM110800310301

Page : 46 of 70


Test mode: π/4DQPSK Test channel: Highest

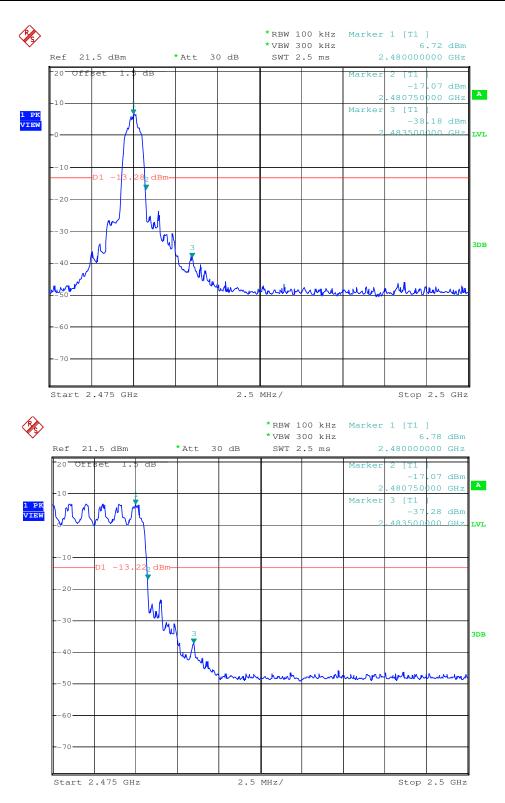



Report No.: SZEM110800310301

Page : 47 of 70

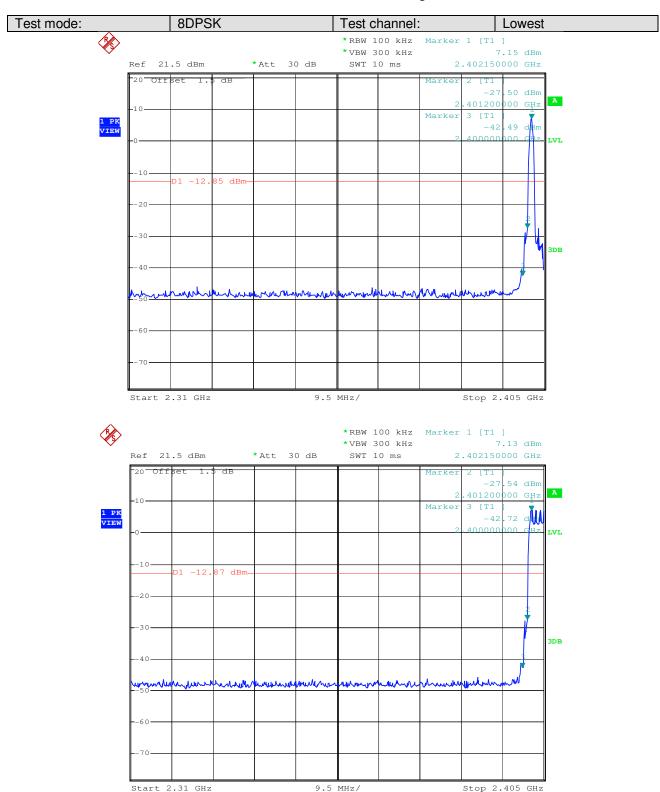




Report No.: SZEM110800310301

Page : 48 of 70

Test mode: 8DPSK Test channel: Highest

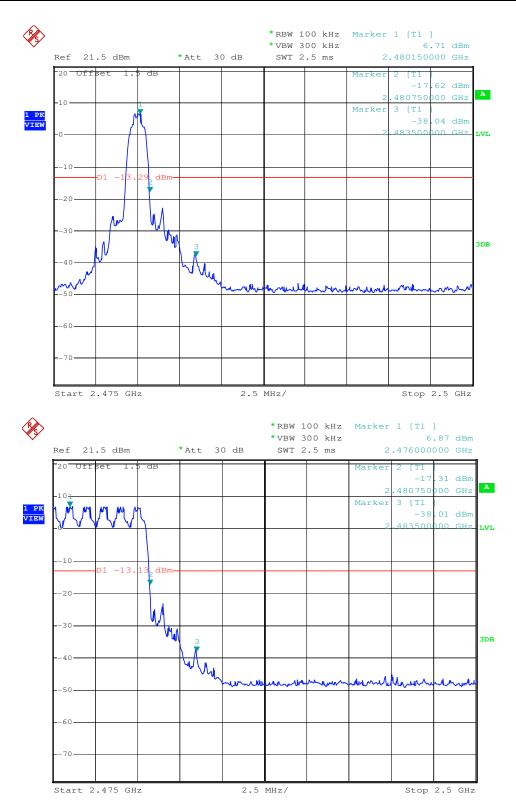



Report No.: SZEM110800310301

Page : 49 of 70

5.9 RF Antenna Conducted spurious emissions


Test Requirement:	FCC Part15 C Section 15.247 (d)							
Test Method:	ANSI C63.10:2009							
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.							
Test setup:	Spectrum Analyzer							
	Non-Conducted Table Ground Reference Plane							
	Remark:							
Test Instruments:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Refer to section 4.8 for details							
Test results:	Pass							




Report No.: SZEM110800310301

Page : 50 of 70

Worse case mode: GFSK Test channel: Lowest

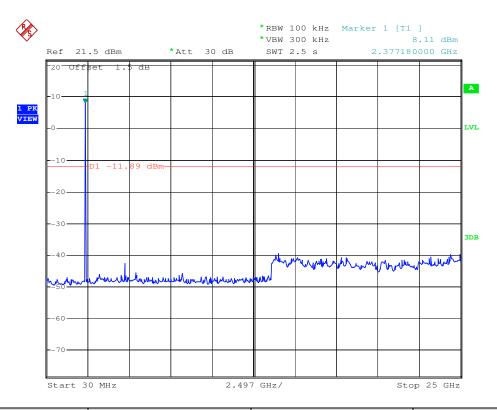

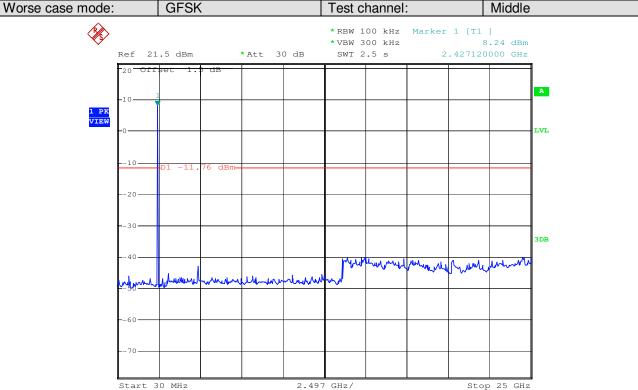





Report No.: SZEM110800310301

Page : 51 of 70

Worse case mode: GFSK Test channel: Highest

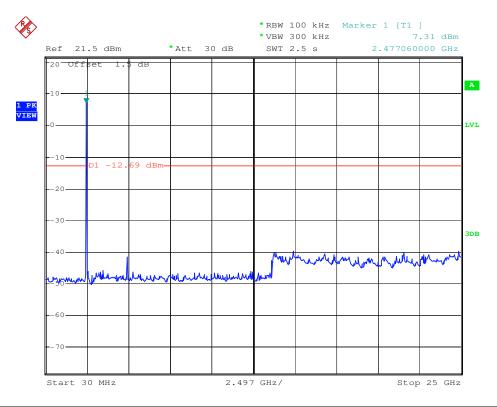

Test mode: π/4DQPSK Test channel: Lowest

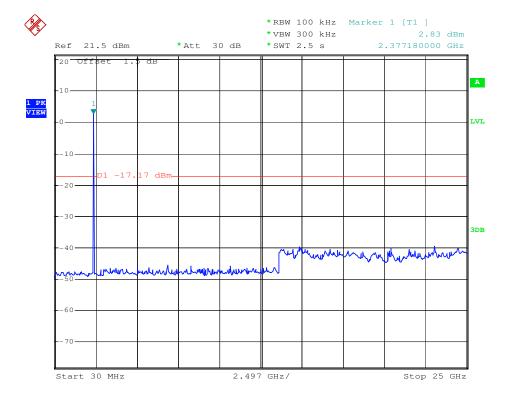





Report No.: SZEM110800310301

Page : 52 of 70

Test mode: π/4DQPSK Test channel: Middle

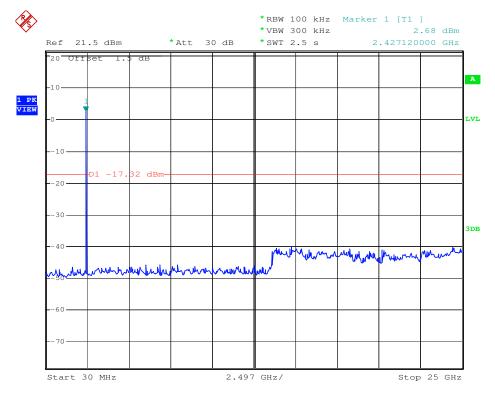



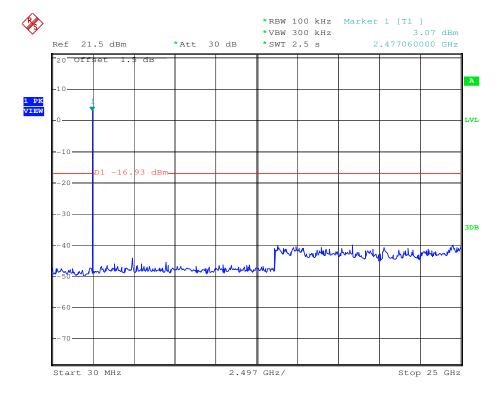





Report No.: SZEM110800310301

Page : 53 of 70

Worse case mode: 8DPSK Test channel: Lowest

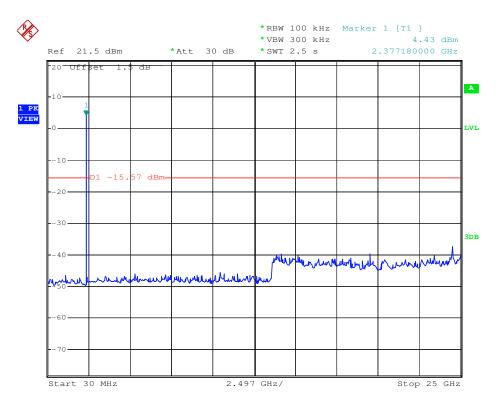

Worse case mode: 8DPSK Test channel: Middle

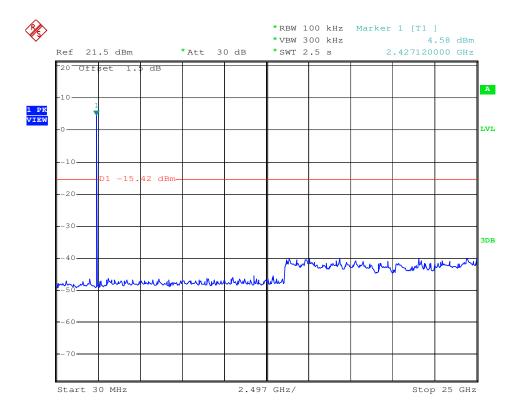




Report No.: SZEM110800310301

Page : 54 of 70

Worse case mode: 8DPSK Test channel: Highest

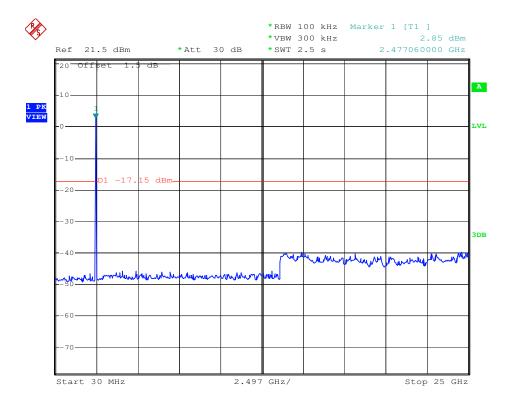

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 55 of 70

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM110800310301

Page : 56 of 70


5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Frequency Range:	30MHz to 25GHz									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
Receiver setup:	Modern Street Street Street (SSTM 7 West Note Street SST)									
riccoiver cotap.	Frequency	Detector	RBW	VBW	Remark					
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value					
	Above 1GHz	Peak	1MHz	3MHz	Peak Value					
	Above rariz	Peak	1MHz	10Hz	Average Value					
Limit:										
	Freque		Limit (dBuV/		Remark					
	30MHz-8		40.0		Quasi-peak Value					
	88MHz-21		43.5		Quasi-peak Value					
	216MHz-9 960MHz-		46.0 54.0		Quasi-peak Value Quasi-peak Value					
			54.0 54.0		Average Value					
	Above 1	GHz	74.0		Peak Value					
Test Procedure:	the ground a rotated 360 radiation. b. The EUT was antenna, what tower. c. The antenna ground to de horizontal at the measured. For each succase and the meters and degrees to degrees to degrees to degrees to degrees to degree	at a 3 meter sidegrees to degrees to degree the antender the rotatable find the maximal degree to degree the degree to degree the degree to degree the degree to degree to degree the degree to degree	semi-anechoice termine the pars away from the form one maximum valuations of table was turned table was set to Pero Maximum Hore EUT in peal testing could be orted. Otherwill be re-tested	c camber. Toosition of the interference of a varial meter to follow of the fiethe antennation heights fined from 0 ceak Detect Fold Mode. It may be mode was a se the emisone by one	he highest ence-receiving able-height antenna ur meters above the ald strength. Both a are set to make ged to its worst rom 1 meter to 4 degrees to 360					
Test Instruments:	Refer to section	4.8 for detail	S							
		3 . J. J. J. J. G.	-							



Report No.: SZEM110800310301

Page : 57 of 70

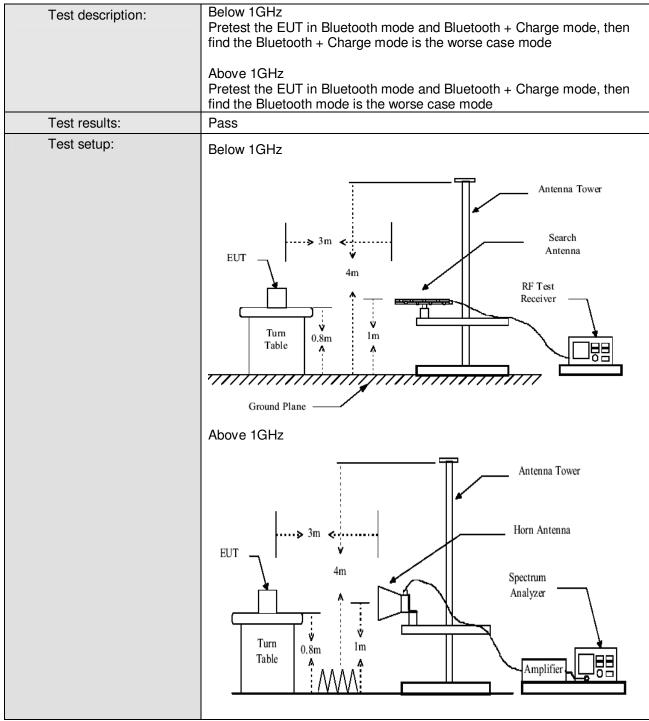

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Radiated emission below 1GHz

Report No.: SZEM110800310301

Page : 58 of 70

5.11.1 Radiated emission below 1GHz

Vertical

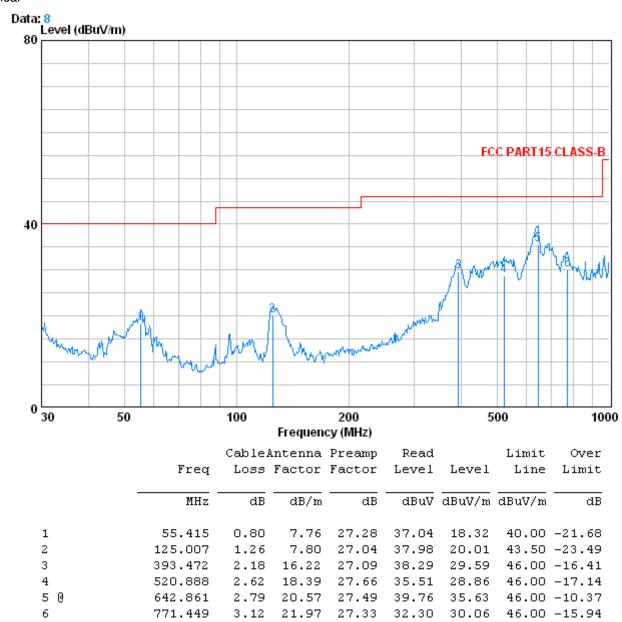


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 59 of 70

Horizontal

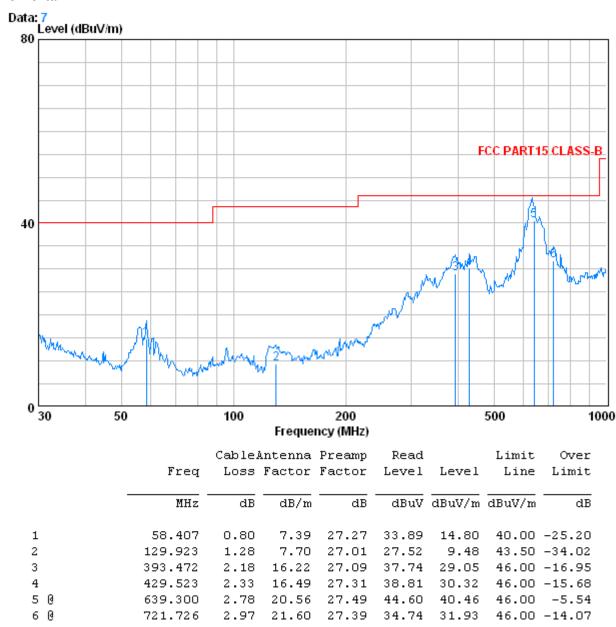

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 60 of 70

5.11.2 Transmitter emission above 1GHz

Worse case r	node:	GFSK	Test	channel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2116.250	4.42	32.02	39.65	48.21	45.00	74.00	-29.00	Vertical
3232.500	5.40	33.31	40.48	48.80	47.03	74.00	-26.97	Vertical
3667.250	6.00	33.41	40.79	49.31	47.93	74.00	-26.07	Vertical
4803.665	7.44	34.70	41.63	57.17	57.68	74.00	-16.32	Vertical
6569.500	8.17	36.23	40.43	50.51	54.48	74.00	-19.52	Vertical
8355.500	9.43	36.14	38.88	48.77	55.46	74.00	-18.54	Vertical
1822.500	4.18	30.44	39.49	50.01	45.14	74.00	-28.86	Horizontal
2962.250	5.04	33.33	40.27	49.43	47.53	74.00	-26.47	Horizontal
3667.250	6.00	33.41	40.79	50.53	49.15	74.00	-24.85	Horizontal
4783.500	7.42	34.73	41.61	51.43	51.97	74.00	-22.03	Horizontal
6428.500	8.12	36.20	40.55	50.97	54.74	74.00	-19.26	Horizontal
7744.500	9.25	36.00	39.41	50.50	56.34	74.00	-17.66	Horizontal

Worse case n	node:	GFSK	Test	channel:	Lowest	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2116.250	4.42	32.02	39.65	39.51	36.30	54.00	-17.70	Vertical
3232.500	5.40	33.31	40.48	39.36	37.59	54.00	-16.41	Vertical
3667.250	6.00	33.41	40.79	39.78	38.40	54.00	-15.60	Vertical
4803.665	7.44	34.70	41.63	50.01	50.52	54.00	-3.48	Vertical
6569.500	8.17	36.23	40.43	41.62	45.59	54.00	-8.41	Vertical
8355.500	9.43	36.14	38.88	39.35	46.04	54.00	-7.96	Vertical
1822.500	4.18	30.44	39.49	41.35	36.48	54.00	-17.52	Horizontal
2962.250	5.04	33.33	40.27	39.72	37.82	54.00	-16.18	Horizontal
3667.250	6.00	33.41	40.79	40.02	38.64	54.00	-15.36	Horizontal
4783.500	7.42	34.73	41.61	41.20	41.74	54.00	-12.26	Horizontal
6428.500	8.12	36.20	40.55	41.12	44.89	54.00	-9.11	Horizontal
7744.500	9.25	36.00	39.41	40.71	46.55	54.00	-7.45	Horizontal

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 61 of 70

Worse case	mode:	GFSK	Test	t channel:	Middle	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2433.500	4.61	32.58	39.88	49.51	46.82	74.00	-27.18	Vertical
3902.250	6.33	33.70	40.97	49.74	48.80	74.00	-25.20	Vertical
4884.040	7.48	34.59	41.68	55.13	55.52	74.00	-18.48	Vertical
6898.500	8.35	35.90	40.15	51.07	55.17	74.00	-18.83	Vertical
9354.250	9.65	37.01	38.01	46.93	55.58	74.00	-18.42	Vertical
11199.000	10.71	38.46	37.95	46.03	57.25	74.00	-16.75	Vertical
1822.500	4.18	30.44	39.49	49.53	44.66	74.00	-29.34	Horizontal
2962.250	5.04	33.33	40.27	49.76	47.86	74.00	-26.14	Horizontal
4043.250	6.53	33.94	41.07	49.02	48.42	74.00	-25.58	Horizontal
4877.500	7.48	34.59	41.68	51.03	51.42	74.00	-22.58	Horizontal
6522.500	8.15	36.28	40.46	50.59	54.56	74.00	-19.44	Horizontal
8508.250	9.48	36.21	38.75	48.34	55.28	74.00	-18.72	Horizontal

Worse case	mode:	GFSK	Tes	t channel:	Middle	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2433.500	4.61	32.58	39.88	39.77	37.08	54.00	-16.92	Vertical
3902.250	6.33	33.70	40.97	40.35	39.41	54.00	-14.59	Vertical
4884.040	7.48	34.59	41.68	48.13	48.52	54.00	-5.48	Vertical
6898.500	8.35	35.90	40.15	41.65	45.75	54.00	-8.25	Vertical
9354.250	9.65	37.01	38.01	38.92	47.57	54.00	-6.43	Vertical
11199.000	10.71	38.46	37.95	36.68	47.90	54.00	-6.10	Vertical
1822.500	4.18	30.44	39.49	39.88	35.01	54.00	-18.99	Horizontal
2962.250	5.04	33.33	40.27	39.73	37.83	54.00	-16.17	Horizontal
4043.250	6.53	33.94	41.07	40.14	39.54	54.00	-14.46	Horizontal
4877.500	7.48	34.59	41.68	40.05	40.44	54.00	-13.56	Horizontal
6522.500	8.15	36.28	40.46	40.55	44.52	54.00	-9.48	Horizontal
8508.250	9.48	36.21	38.75	37.98	44.92	54.00	-9.08	Horizontal

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 62 of 70

Worse case	mode:	GFSK	Test	t channel:	Highest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization
2750.750	4.87	33.05	40.12	47.50	45.30	74.00	-28.70	Vertical
3761.250	6.13	33.51	40.86	49.24	48.02	74.00	-25.98	Vertical
5582.500	7.79	35.04	41.29	50.34	51.88	74.00	-22.12	Vertical
6428.500	8.12	36.20	40.55	50.36	54.13	74.00	-19.87	Vertical
7744.500	9.25	36.00	39.41	49.80	55.64	74.00	-18.36	Vertical
10376.500	10.11	38.16	37.61	46.28	56.94	74.00	-17.06	Vertical
2116.250	4.42	32.02	39.65	48.58	45.37	74.00	-28.63	Horizontal
2880.000	4.97	33.24	40.21	48.19	46.19	74.00	-27.81	Horizontal
4125.500	6.61	34.17	41.12	49.77	49.43	74.00	-24.57	Horizontal
5688.250	7.84	35.20	41.19	50.64	52.49	74.00	-21.51	Horizontal
8179.250	9.38	36.07	39.03	49.32	55.74	74.00	-18.26	Horizontal
9307.250	9.65	36.97	38.06	48.71	57.27	74.00	-16.73	Horizontal

Worse case	mode:	GFSK	Tes	t channel:	Highest	Re	mark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)		Antenna polarization
2750.750	4.87	33.05	40.12	37.65	35.45	54.00	-18.55	Vertical
3761.250	6.13	33.51	40.86	39.86	38.64	54.00	-15.36	Vertical
5582.500	7.79	35.04	41.29	40.80	42.34	54.00	-11.66	Vertical
6428.500	8.12	36.20	40.55	40.84	44.61	54.00	-9.39	Vertical
7744.500	9.25	36.00	39.41	39.41	45.25	54.00	-8.75	Vertical
10376.500	10.11	38.16	37.61	37.07	47.73	54.00	-6.27	Vertical
2116.250	4.42	32.02	39.65	39.64	36.43	54.00	-17.57	Horizontal
2880.000	4.97	33.24	40.21	39.91	37.91	54.00	-16.09	Horizontal
4125.500	6.61	34.17	41.12	41.32	40.98	54.00	-13.02	Horizontal
5688.250	7.84	35.20	41.19	41.88	43.73	54.00	-10.27	Horizontal
8179.250	9.38	36.07	39.03	40.54	46.96	54.00	-7.04	Horizontal
9307.250	9.65	36.97	38.06	38.74	47.30	54.00	-6.70	Horizontal

Remark: The disturbance above 11GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 63 of 70

5.11.3 Band edge (Radiated Emission)

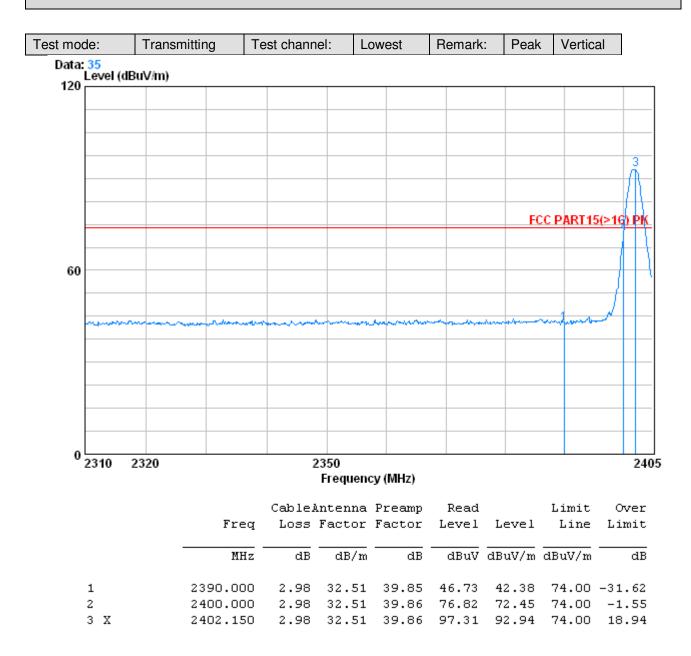


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM110800310301

Page : 64 of 70

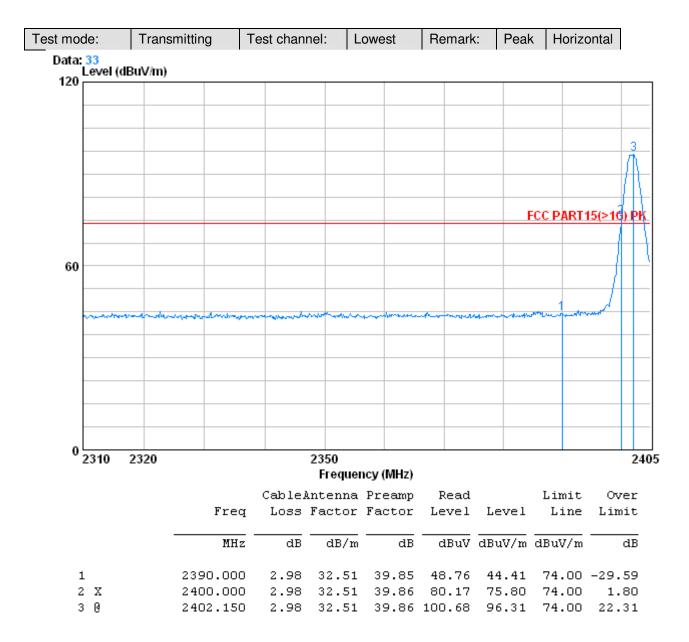


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 65 of 70

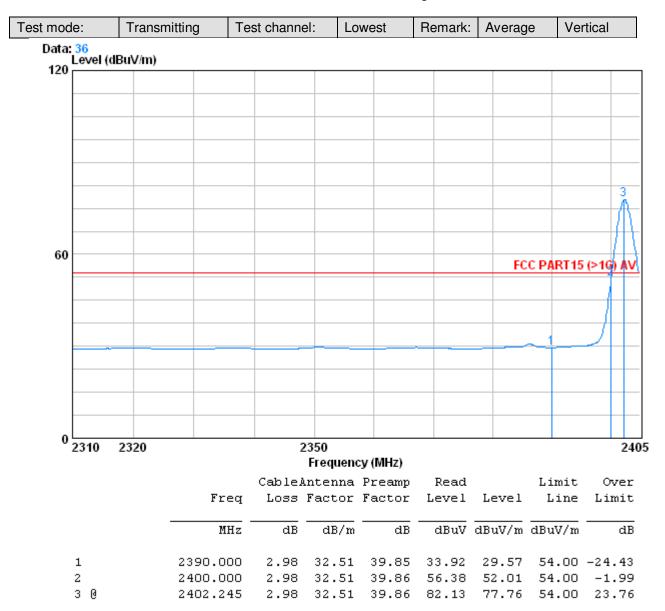


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 66 of 70

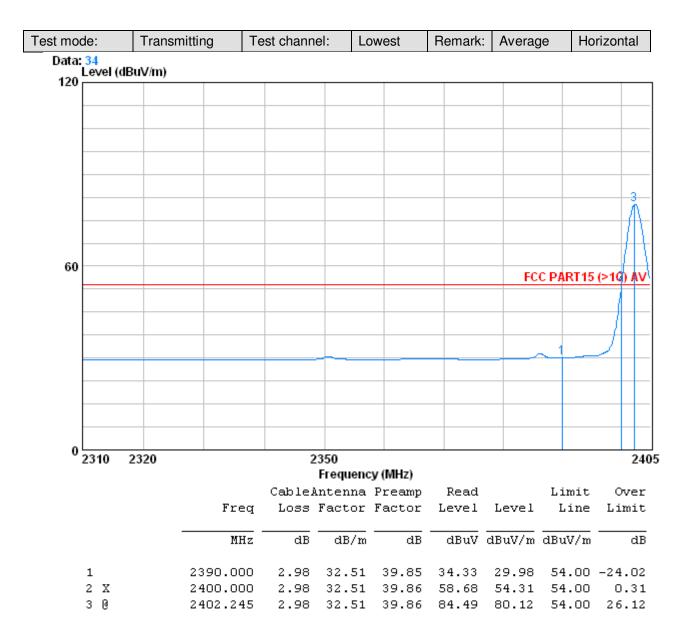


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 67 of 70

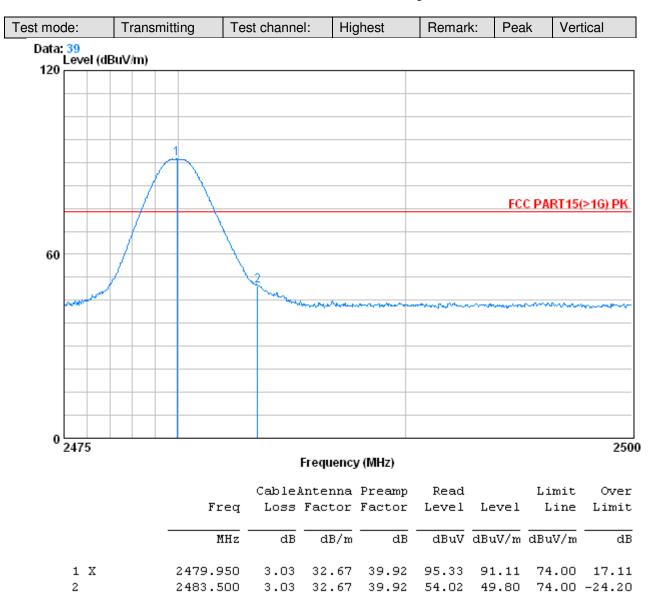


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 68 of 70

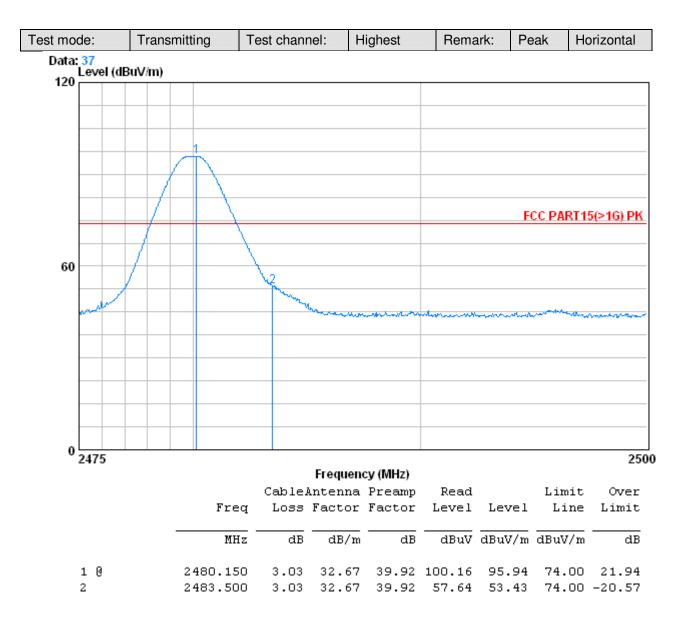


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM110800310301

Page : 69 of 70

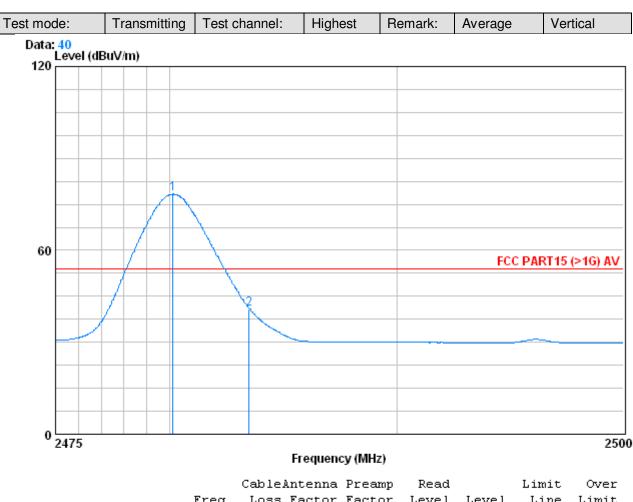


	Freq		Antenna Factor	Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @ 2	2480.150 2483.500			39.92 39.92				



Report No.: SZEM110800310301

Page : 70 of 70

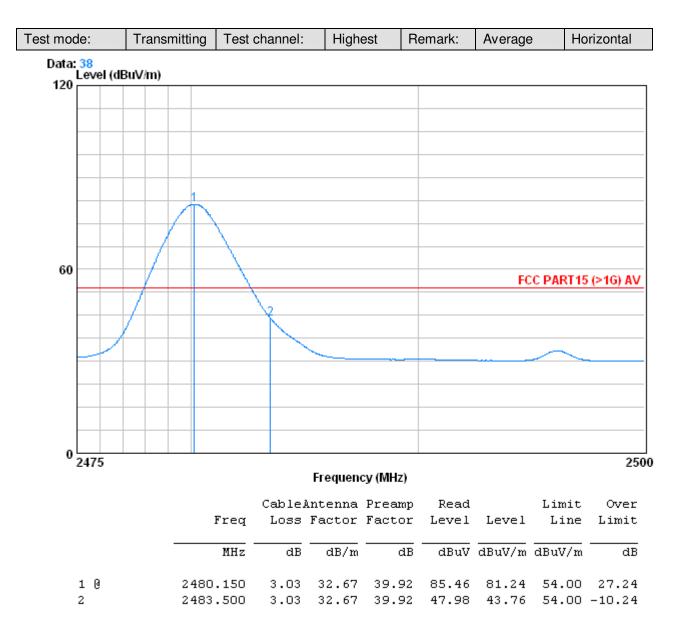

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."