

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM130700392401 Page: 1 of 76

# FCC REPORT

| Application No:  | SZEM1307003924RF                            |
|------------------|---|
| Applicant:       | Sky Wing Communication Electronic Co., Ltd. |
| Manufacturer:    | Sky Wing Communication Electronic Co., Ltd. |
| Factory:         | Sky Wing Communication Electronic Co., Ltd. |
| Product Name:    | Bluetooth Headphone                         |
| Model No.(EUT):  | SK-BH-M28                                   |
| Add Model No.:   | SK-BH-M28A                                  |
| FCC ID:          | WSGSK-BH-M28                                |
| Standards:       | 47 CFR Part 15, Subpart C (2012)            |
| Date of Receipt: | 2013-07-19                                  |
| Date of Test:    | 2013-07-23 to 2013-08-19                    |
| Date of Issue:   | 2013-08-27                                  |
| Test Result:     | PASS *                                      |

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130700392401 Page: 2 of 76

## 2 Test Summary

| Test Item                                  | Test Requirement  | Test method        | Result |
|--|---|--------------------|--------|
| Antenna Requirement                        | 47 CFR Part 15, Subpart C Section<br>15.203/15.247 (c)                                | ANSI C63.10 (2009) | PASS   |
| AC Power Line Conducted<br>Emission        | 47 CFR Part 15, Subpart C Section<br>15.207   | ANSI C63.10 (2009) | PASS   |
| Conducted Peak Output<br>Power             | 47 CFR Part 15, Subpart C Section<br>15.247 (b)(1)                                    | ANSI C63.10 (2009) | PASS   |
| 20dB Occupied Bandwidth                    | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Carrier Frequencies<br>Separation          | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Hopping Channel Number                     | 47 CFR Part 15, Subpart C Section<br>15.247 (b)                                       | ANSI C63.10 (2009) | PASS   |
| Dwell Time                                 | 47 CFR Part 15, Subpart C Section<br>15.247 (a)(1)                                    | ANSI C63.10 (2009) | PASS   |
| Pseudorandom Frequency<br>Hopping Sequence | 47 CFR Part 15, Subpart C Section<br>15.247(b)(4)&TCB Exclusion List<br>(7 July 2002) | ANSI C63.10 (2009) | PASS   |
| Band-edge for RF<br>Conducted Emissions    | 47 CFR Part 15, Subpart C Section<br>15.247(d)  | ANSI C63.10 (2009) | PASS   |
| RF Conducted Spurious<br>Emissions         | 47 CFR Part 15, Subpart C Section<br>15.247(d)  | ANSI C63.10 (2009) | PASS   |
| Radiated Spurious<br>emissions             | 47 CFR Part 15, Subpart C Section<br>15.205/15.209                                    | ANSI C63.10 (2009) | PASS   |
| Band Edge<br>(Radiated Emission)           | 47 CFR Part 15, Subpart C Section<br>15.205/15.209                                    | ANSI C63.10 (2009) | PASS   |

Remark:

Model No.: SK-BH-M28, SK-BH-M28A

Only the Model SK-BH-M28 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on the Item number.



Report No.: SZEM130700392401 Page: 3 of 76

## 3 Contents

| Page |
|------|
|------|

| 1 | CC  | OVER PAGE   | 1        |
|---|---|---|----------|
| 2 | TE  | EST SUMMARY   | 2        |
| 3 | cc  | ONTENTS   | 3        |
| 4 | GE  | ENERAL INFORMATION  | 4        |
|   | 4.1   | CLIENT INFORMATION  | 4        |
|   | 4.2   | GENERAL DESCRIPTION OF EUT  | 4        |
|   | 4.3   | TEST ENVIRONMENT  |          |
|   | 4.4   | DESCRIPTION OF SUPPORT UNITS  | 6        |
|   | 4.5   | TEST LOCATION   |          |
|   | 4.6   | TEST FACILITY   |          |
|   | 4.7   | DEVIATION FROM STANDARDS  |          |
|   | 4.8   | ABNORMALITIES FROM STANDARD CONDITIONS  |          |
|   | 4.9   | OTHER INFORMATION REQUESTED BY THE CUSTOMER   |          |
|   | 4.10  | EQUIPMENT LIST  | 8        |
|   |   |   |          |
| 5 | TE  | EST RESULTS AND MEASUREMENT DATA  | 11       |
| 5 | <b>TE</b><br>5.1  | EST RESULTS AND MEASUREMENT DATA  |          |
| 5 |   |   | 11       |
| 5 | 5.1   | ANTENNA REQUIREMENT   | 11<br>12 |
| 5 | 5.1<br>5.2  | ANTENNA REQUIREMENT<br>Conducted Emissions  | 11<br>   |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5   | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER   | 11<br>   |
| 5 | 5.1<br>5.2<br>5.3<br>5.4  | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER   |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7   | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME  |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8  | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS  |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8<br>5.9   | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS<br>SPURIOUS RF CONDUCTED EMISSIONS   |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8<br>5.9<br>5.10                                     | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS<br>SPURIOUS RF CONDUCTED EMISSIONS<br>PSEUDORANDOM FREQUENCY HOPPING SEQUENCE  |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8<br>5.9<br>5.10<br>5.11                             | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS<br>SPURIOUS RF CONDUCTED EMISSIONS<br>PSEUDORANDOM FREQUENCY HOPPING SEQUENCE<br>RADIATED SPURIOUS EMISSION                                      |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8<br>5.9<br>5.10<br>5.11<br><i>5</i> .11             | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS<br>SPURIOUS RF CONDUCTED EMISSIONS<br>PSEUDORANDOM FREQUENCY HOPPING SEQUENCE<br>RADIATED SPURIOUS EMISSION<br>11.1 Radiated Emission below 1GHz |          |
| 5 | 5.1<br>5.2<br>5.3<br>5.4<br>5.5<br>5.6<br>5.7<br>5.8<br>5.9<br>5.10<br>5.11<br><i>5.1</i><br><i>5.1</i> | ANTENNA REQUIREMENT<br>CONDUCTED EMISSIONS<br>CONDUCTED PEAK OUTPUT POWER<br>20DB OCCUPY BANDWIDTH<br>CARRIER FREQUENCIES SEPARATION<br>HOPPING CHANNEL NUMBER<br>DWELL TIME<br>BAND-EDGE FOR RF CONDUCTED EMISSIONS<br>SPURIOUS RF CONDUCTED EMISSIONS<br>PSEUDORANDOM FREQUENCY HOPPING SEQUENCE<br>RADIATED SPURIOUS EMISSION                                      |          |



Report No.: SZEM130700392401 Page: 4 of 76

## 4 General Information

#### 4.1 Client Information

| Applicant:  | Sky Wing Communication Electronic Co., Ltd.                               |
|---|---|
| Address of Applicant: No.63, 10 <sup>th</sup> Road, Longyan, Humen Town, Dongguan, China 523  |   |
| Manufacturer: Sky Wing Communication Electronic Co., Ltd.                                     |   |
| Address of Manufacturer: No.63, 10 <sup>th</sup> Road, Longyan, Humen Town, Dongguan, China 5 |   |
| Factory:  | Sky Wing Communication Electronic Co., Ltd.                               |
| Address of Factory:   | No.63, 10 <sup>th</sup> Road, Longyan, Humen Town, Dongguan, China 523920 |

## 4.2 General Description of EUT

| Name:                 | Bluetooth Headphone                       |                            |  |
|-----------------------|---|----------------------------|--|
| Model No.:            | SK-BH-M28, SK-BH-M28A                     |                            |  |
| Operation Frequency:  | 2402MHz~2480                              | MHz                        |  |
| Bluetooth Version:    | V2.1+EDR                                  |                            |  |
| Modulation Technique: | Frequency Hop                             | ping Spread Spectrum(FHSS) |  |
| Modulation Type:      | GFSK, π/4DQP                              | SK, 8DPSK                  |  |
| Number of Channel:    | 79  |                            |  |
| Hopping Channel Type: | Adaptive Freque                           | ency Hopping systems       |  |
| Sample Type:          | Portable production                       |                            |  |
| Test Power Grade:     | 255, 43 (manufacturer declare)            |                            |  |
| Test Software of EUT: | CSR blue suite                            | (manufacturer declare)     |  |
| Antenna Type          | Integral                                  |                            |  |
| Antenna Gain          | 2dBi                                      |                            |  |
| Power Supply:         | Adapter: USB Charge                       |                            |  |
|                       | Battery: 3.7V 400mAh rechargeable battery |                            |  |
| Test Voltage:         | AC 120V 60Hz                              |                            |  |
|                       | DC 3.7V battery fully charged             |                            |  |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 5 of 76

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1                                   | 2402MHz   | 21      | 2422MHz   | 41      | 2442MHz   | 61      | 2462MHz   |
| 2                                   | 2403MHz   | 22      | 2423MHz   | 42      | 2443MHz   | 62      | 2463MHz   |
| 3                                   | 2404MHz   | 23      | 2424MHz   | 43      | 2444MHz   | 63      | 2464MHz   |
| 4                                   | 2405MHz   | 24      | 2425MHz   | 44      | 2445MHz   | 64      | 2465MHz   |
| 5                                   | 2406MHz   | 25      | 2426MHz   | 45      | 2446MHz   | 65      | 2466MHz   |
| 6                                   | 2407MHz   | 26      | 2427MHz   | 46      | 2447MHz   | 66      | 2467MHz   |
| 7                                   | 2408MHz   | 27      | 2428MHz   | 47      | 2448MHz   | 67      | 2468MHz   |
| 8                                   | 2409MHz   | 28      | 2429MHz   | 48      | 2449MHz   | 68      | 2469MHz   |
| 9                                   | 2410MHz   | 29      | 2430MHz   | 49      | 2450MHz   | 69      | 2470MHz   |
| 10                                  | 2411MHz   | 30      | 2431MHz   | 50      | 2451MHz   | 70      | 2471MHz   |
| 11                                  | 2412MHz   | 31      | 2432MHz   | 51      | 2452MHz   | 71      | 2472MHz   |
| 12                                  | 2413MHz   | 32      | 2433MHz   | 52      | 2453MHz   | 72      | 2473MHz   |
| 13                                  | 2414MHz   | 33      | 2434MHz   | 53      | 2454MHz   | 73      | 2474MHz   |
| 14                                  | 2415MHz   | 34      | 2435MHz   | 54      | 2455MHz   | 74      | 2475MHz   |
| 15                                  | 2416MHz   | 35      | 2436MHz   | 55      | 2456MHz   | 75      | 2476MHz   |
| 16                                  | 2417MHz   | 36      | 2437MHz   | 56      | 2457MHz   | 76      | 2477MHz   |
| 17                                  | 2418MHz   | 37      | 2438MHz   | 57      | 2458MHz   | 77      | 2478MHz   |
| 18                                  | 2419MHz   | 38      | 2439MHz   | 58      | 2459MHz   | 78      | 2479MHz   |
| 19                                  | 2420MHz   | 39      | 2440MHz   | 59      | 2460MHz   | 79      | 2480MHz   |
| 20                                  | 2421MHz   | 40      | 2441MHz   | 60      | 2461MHz   |         |           |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2402MHz   |
| The Middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 6 of 76

#### 4.3 Test Environment

| Operating Environment: |           |  |
|------------------------|-----------|--|
| Temperature:           | 24.0 °C   |  |
| Humidity:              | 49 % RH   |  |
| Atmospheric Pressure:  | 1002 mbar |  |

#### 4.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer  | Model No.   |  |
|-------------|---------------|-------------|--|
| Adapter     | Supply by SGS | SKP0500500P |  |

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 7 of 76

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

#### 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130700392401 Page: 8 of 76

## 4.10 Equipment List

| Conducted Emission |                                       |  |                     |                  |                              |  |
|--------------------|---------------------------------------|--|---------------------|------------------|------------------------------|--|
| ltem               | Test Equipment                        | Manufacturer                             | Model No.           | Inventory<br>No. | Cal.Due date<br>(yyyy-mm-dd) |  |
| 1                  | Shielding Room                        | ZhongYu Electron                         | GB-88               | SEL0042          | 2014-06-10                   |  |
| 2                  | LISN                                  | Rohde & Schwarz                          | ENV216              | SEL0152          | 2013-10-24                   |  |
| 3                  | LISN                                  | ETS-LINDGREN                             | 3816/2              | SEL0021          | 2014-05-16                   |  |
| 4                  | 8 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T8-02 | SEL0162          | 2013-11-10                   |  |
| 5                  | 4 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T4-02 | SEL0163          | 2013-11-10                   |  |
| 6                  | 2 Line ISN                            | Fischer Custom<br>Communications<br>Inc. | FCC-TLISN-<br>T2-02 | SEL0164          | 2013-11-10                   |  |
| 7                  | EMI Test Receiver                     | Rohde & Schwarz                          | ESCI                | SEL0022          | 2014-05-16                   |  |
| 8                  | Coaxial Cable                         | SGS                                      | N/A                 | SEL0025          | 2014-05-29                   |  |
| 9                  | DC Power Supply                       | Zhao Xin                                 | RXN-305D            | SEL0117          | 2013-10-24                   |  |
| 10                 | Humidity/<br>Temperature<br>Indicator | Shanhai Qixiang                          | ZJ1-2B              | SEL0103          | 2013-10-24                   |  |
| 11                 | Barometer                             | Chang Chun                               | DYM3                | SEL0088          | 2014-05-24                   |  |





Report No.: SZEM130700392401 Page: 9 of 76

| RE in Chamber |                                    |  |           |                  |                              |  |
|---------------|------------------------------------|--|-----------|------------------|------------------------------|--|
| ltem          | Test Equipment                     | Manufacturer                             | Model No. | Inventory<br>No. | Cal.Due date<br>(yyyy-mm-dd) |  |
| 1             | 3m Semi-Anechoic<br>Chamber        | ETS-LINDGREN                             | N/A       | SEL0017          | 2014-06-10                   |  |
| 2             | EMI Test Receiver                  | Rohde & Schwarz                          | ESIB26    | SEL0023          | 2014-05-16                   |  |
| 3             | EMI Test software                  | AUDIX                                    | E3        | SEL0050          | N/A                          |  |
| 4             | BiConiLog Antenna<br>(26-3000MHz)  | ETS-LINDGREN                             | 3142C     | SEL0015          | 2013-10-24                   |  |
| 5             | Double-ridged horn<br>(1-18GHz)    | ETS-LINDGREN                             | 3117      | SEL0006          | 2013-10-24                   |  |
| 6             | Horn Antenna<br>(18-26GHz)         | ETS-LINDGREN                             | 3160      | SEL0076          | 2013-10-24                   |  |
| 7             | Pre-amplifier<br>(0.1-1300MHz)     | Agilent<br>Technologies                  | 8447D     | SEL0053          | 2014-05-16                   |  |
| 8             | Pre-Amplifier<br>(0.1-26.5GHz)     | Compliance<br>Directions Systems<br>Inc. | PAP-0126  | SEL0168          | 2013-10-24                   |  |
| 9             | Coaxial cable                      | SGS                                      | N/A       | SEL0027          | 2014-05-29                   |  |
| 10            | Coaxial cable                      | SGS                                      | N/A       | SEL0189          | 2014-05-29                   |  |
| 11            | Coaxial cable                      | SGS                                      | N/A       | SEL0121          | 2014-05-29                   |  |
| 12            | Coaxial cable                      | SGS                                      | N/A       | SEL0178          | 2014-05-29                   |  |
| 13            | Band filter                        | Amindeon                                 | 82346     | SEL0094          | 2014-05-16                   |  |
| 14            | Barometer                          | Chang Chun                               | DYM3      | SEL0088          | 2014-05-24                   |  |
| 15            | DC Power Supply                    | Zhao Xin                                 | RXN-305D  | SEL0117          | 2013-10-24                   |  |
| 16            | Humidity/<br>Temperature Indicator | Shanhai Qixiang                          | ZJ1-2B    | SEL0103          | 2013-10-24                   |  |
| 17            | Signal Generator<br>(10M-27GHz)    | Rohde & Schwarz                          | SMR27     | SEL0067          | 2014-05-16                   |  |
| 18            | Signal Generator                   | Rohde & Schwarz                          | SMY01     | SEL0155          | 2013-10-24                   |  |
| 19            | Loop Antenna                       | Beijing Daze                             | ZN30401   | SEL0203          | 2014-06-04                   |  |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 10 of 76

|      | RF connected test                     |                         |           |                  |                              |  |
|------|---------------------------------------|-------------------------|-----------|------------------|------------------------------|--|
| ltem | Test Equipment                        | Manufacturer            | Model No. | Inventory<br>No. | Cal.Due date<br>(yyyy-mm-dd) |  |
| 1    | DC Power Supply                       | Zhao Xin                | RXN-305D  | SEL0117          | 2013-10-24                   |  |
| 2    | Humidity/<br>Temperature<br>Indicator | HYGRO                   | ZJ1-2B    | SEL0033          | 2013-10-24                   |  |
| 3    | Spectrum Analyzer                     | Rohde & Schwarz         | FSP       | SEL0154          | 2013-10-24                   |  |
| 4    | Coaxial cable                         | SGS                     | N/A       | SEL0178          | 2014-05-29                   |  |
| 5    | Coaxial cable                         | SGS                     | N/A       | SEL0179          | 2014-05-29                   |  |
| 6    | Barometer                             | ChangChun               | DYM3      | SEL0088          | 2014-05-24                   |  |
| 7    | Signal Generator                      | Rohde & Schwarz         | SML03     | SEL0068          | 2014-05-16                   |  |
| 8    | Band filter                           | amideon                 | 82346     | SEL0094          | 2014-05-16                   |  |
| 9    | POWER METER                           | R & S                   | NRVS      | SEL0144          | 2013-10-24                   |  |
| 10   | Attenuator                            | Beijin feihang taida    | TST-2-6dB | SEL0205          | 2014-05-16                   |  |
| 11   | Power<br>Divider(splitter)            | Agilent<br>Technologies | 11636B    | SEL0130          | 2013-10-24                   |  |

Note: The calibration interval is one year, all the instruments are valid.

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 11 of 76

## 5 Test results and Measurement Data

#### 5.1 Antenna Requirement

| Standard requirement: | 47 CFR Part 15C Section 15.203 /247(c) |
|-----------------------|--|
|-----------------------|--|

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

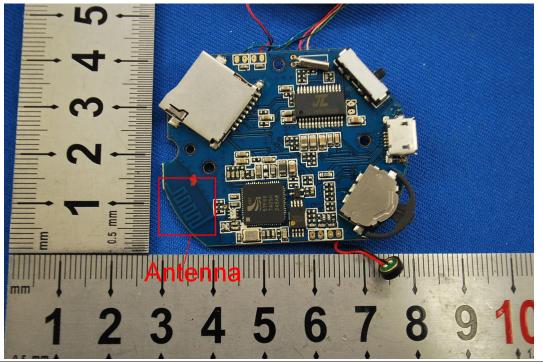




Report No.: SZEM130700392401 Page: 12 of 76

| Test Requirement:     | 47 CFR Part 15C Section 15.207   |                     |  |   |
|-----------------------|--|---------------------|--|---|
| Test Method:          | ANSI C63.10: 2009  |                     |  |   |
| Test Frequency Range: | 150kHz to 30MHz  |                     |  |   |
| Limit:                | Eroqueney renge (MHz)  | Limit (dBuV)        |  |   |
|                       | Frequency range (MHz)  | Quasi-peak          | Average  |   |
|                       | 0.15-0.5   | 66 to 56*           | 56 to 46*  |   |
|                       | 0.5-5  | 56                  | 46   |   |
|                       | 5-30   | 60                  | 50   |   |
|                       | * Decreases with the logarithn   | n of the frequency. |  | _ |
| Test Procedure:       | <ul> <li>5-30</li> <li>60</li> <li>50</li> <li>* Decreases with the logarithm of the frequency.</li> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to</li> </ul> |                     | inear<br>t<br>t<br>was<br>ear<br>he<br>the<br>2. |   |

#### 5.2 Conducted Emissions



Report No.: SZEM130700392401 Page: 13 of 76

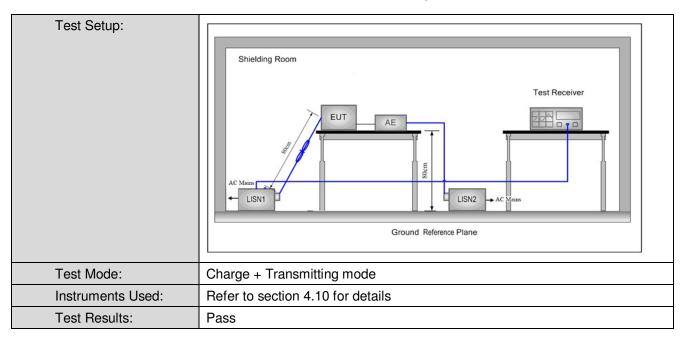

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 14 of 76

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

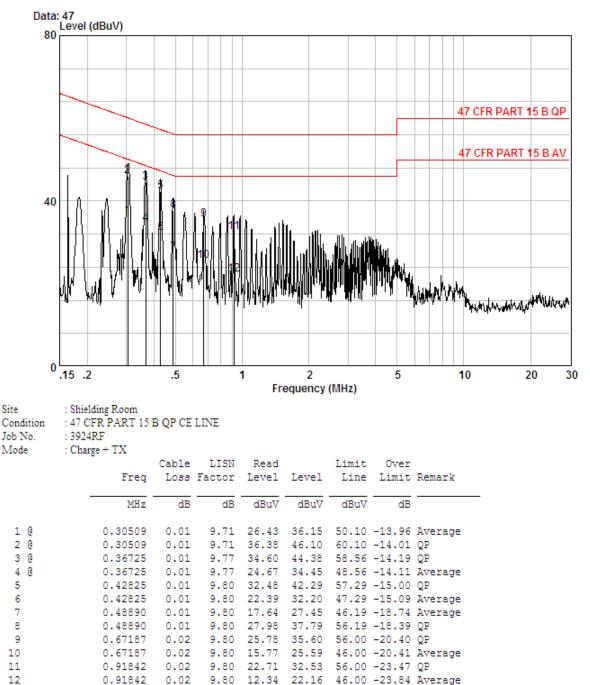



Report No.: SZEM130700392401 Page: 15 of 76

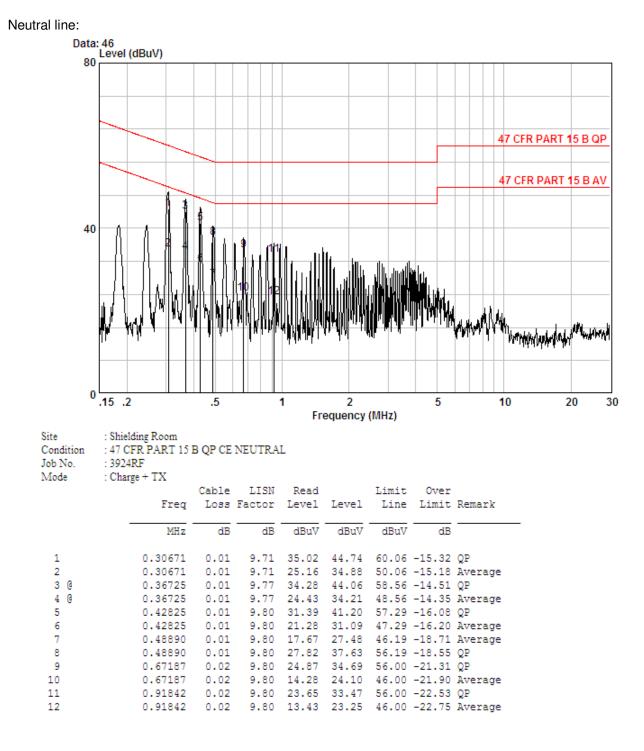

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130700392401 Page: 16 of 76

#### 5.3 Conducted Peak Output Power

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(1)   |  |  |
|------------------------|---|--|--|
| Test Method:           | ANSI C63.10:2009  |  |  |
| Test Setup:            | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane<br>Remark:<br>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.  |  |  |
| Limit:                 | 30dBm   |  |  |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type  |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type. |  |  |
| Instruments Used:      | Refer to section 4.10 for details   |  |  |
| Test Results:          | Pass  |  |  |




Report No.: SZEM130700392401 Page: 17 of 76

| measurement Data |                         |             |        |  |  |  |
|------------------|-------------------------|-------------|--------|--|--|--|
|                  | GFSK mode               |             |        |  |  |  |
| Test channel     | Peak Output Power (dBm) | Limit (dBm) | Result |  |  |  |
| Lowest           | 1.56                    | 30.00       | Pass   |  |  |  |
| Middle           | 2.73                    | 30.00       | Pass   |  |  |  |
| Highest          | 2.92                    | 30.00       | Pass   |  |  |  |
|                  | π/4DQPSK m              | ode         |        |  |  |  |
| Test channel     | Peak Output Power (dBm) | Limit (dBm) | Result |  |  |  |
| Lowest           | 1.61                    | 30.00       | Pass   |  |  |  |
| Middle           | 2.81                    | 30.00       | Pass   |  |  |  |
| Highest          | 2.60                    | 30.00       | Pass   |  |  |  |
|                  | 8DPSK mode              |             |        |  |  |  |
| Test channel     | Peak Output Power (dBm) | Limit (dBm) | Result |  |  |  |
| Lowest           | 1.83                    | 30.00       | Pass   |  |  |  |
| Middle           | 2.80                    | 30.00       | Pass   |  |  |  |
| Highest          | 2.71                    | 30.00       | Pass   |  |  |  |

#### Measurement Data




Report No.: SZEM130700392401 Page: 18 of 76

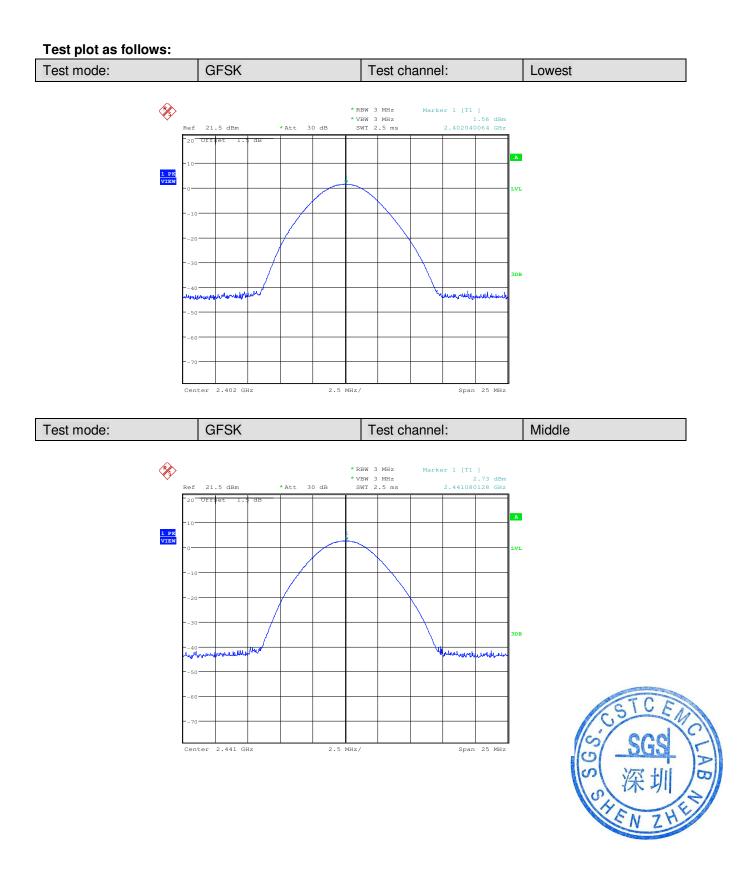




Report No.: SZEM130700392401 Page: 19 of 76

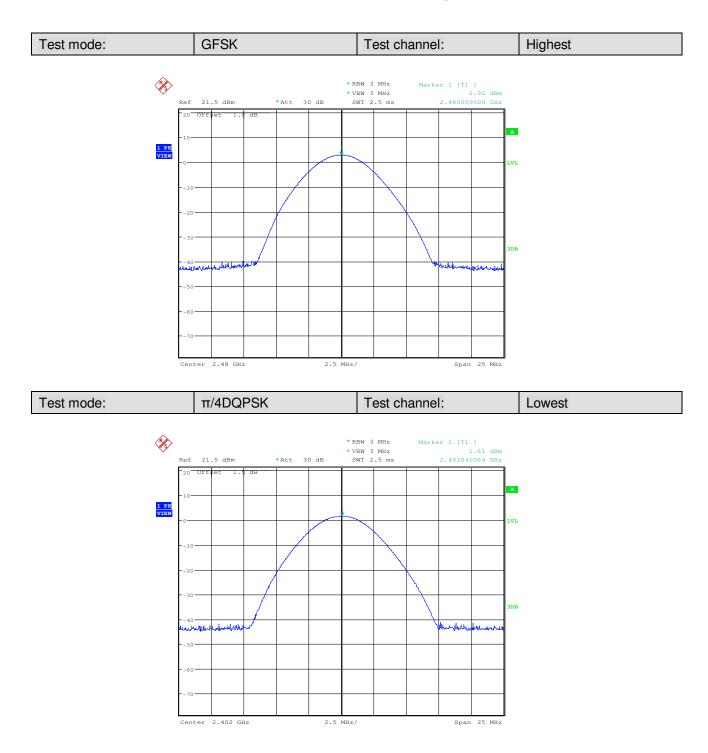




Report No.: SZEM130700392401 Page: 20 of 76

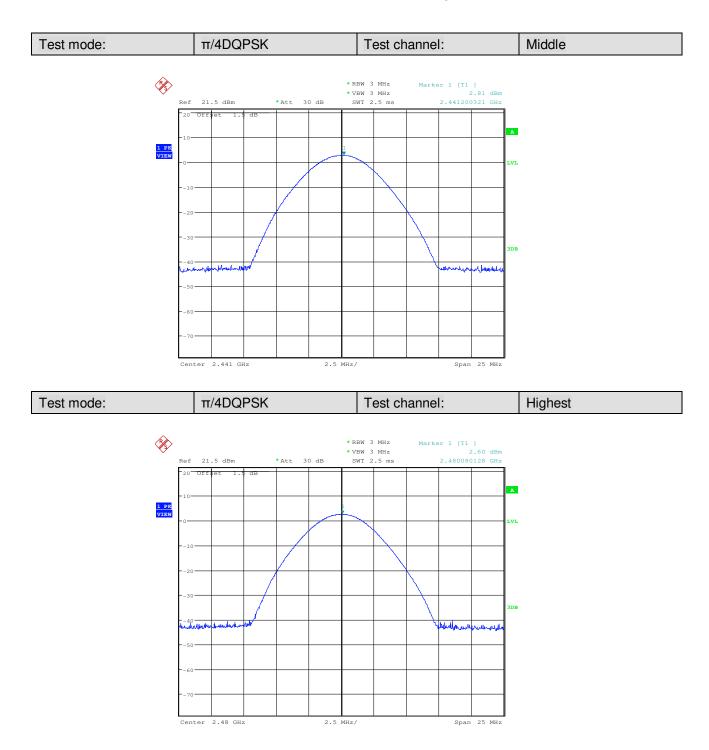




Report No.: SZEM130700392401 Page: 21 of 76

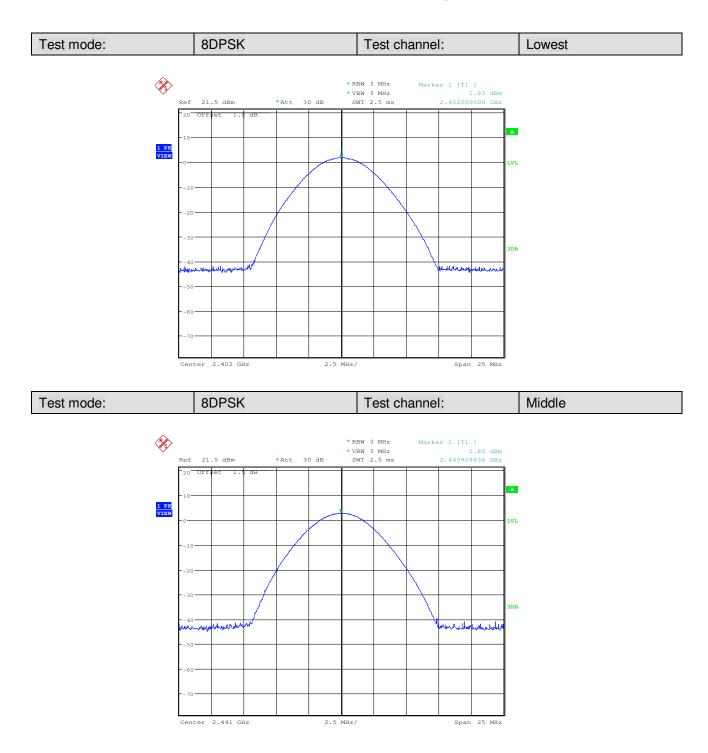



Report No.: SZEM130700392401 Page: 22 of 76

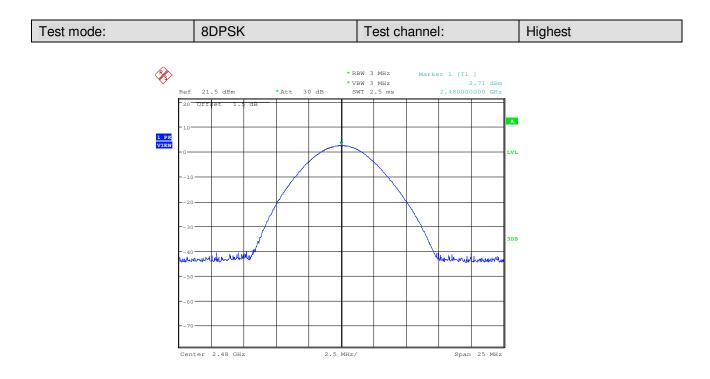



Report No.: SZEM130700392401 Page: 23 of 76

#### 5.4 20dB Occupy Bandwidth


| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(1)  |  |  |
|------------------------|--|--|--|
| Test Method:           | ANSI C63.10:2009   |  |  |
| Test Setup:            | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane  |  |  |
| Limit:                 | NA   |  |  |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type   |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type |  |  |
| Instruments Used:      | Refer to section 4.10 for details  |  |  |
| Test Results:          | Pass   |  |  |

#### **Measurement Data**

| Test shored  | 20dB Occupy Bandwidth (kHz) |             |             |
|--------------|-----------------------------|-------------|-------------|
| Test channel | GFSK                        | π/4DQPSK    | 8DPSK       |
| Lowest       | 774.038461.538              | 1221.153846 | 1216.346154 |
| Middle       | 831.730769231               | 1221.153846 | 1216.346154 |
| Highest      | 788.461538462               | 1216.346154 | 1211.539462 |




Report No.: SZEM130700392401 Page: 24 of 76

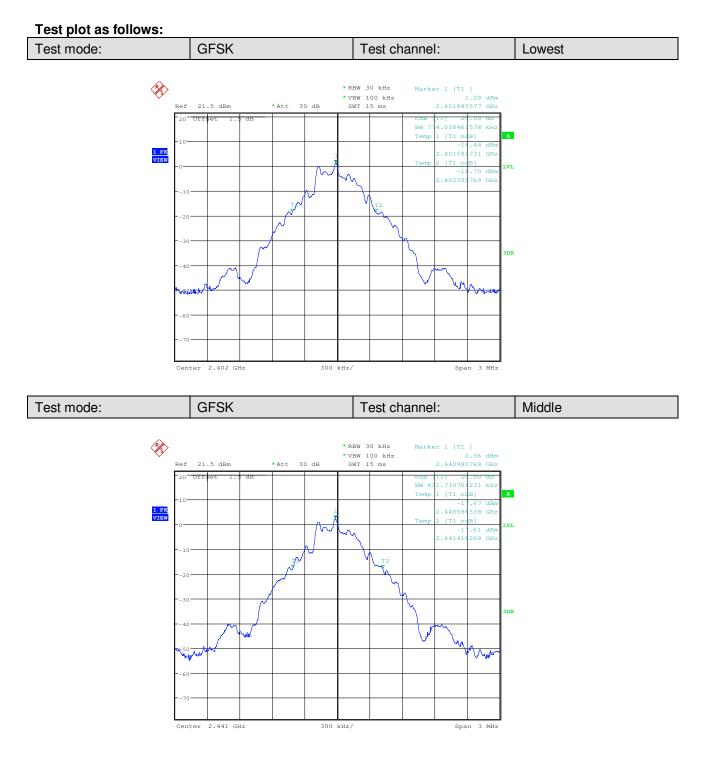




Report No.: SZEM130700392401 Page: 25 of 76

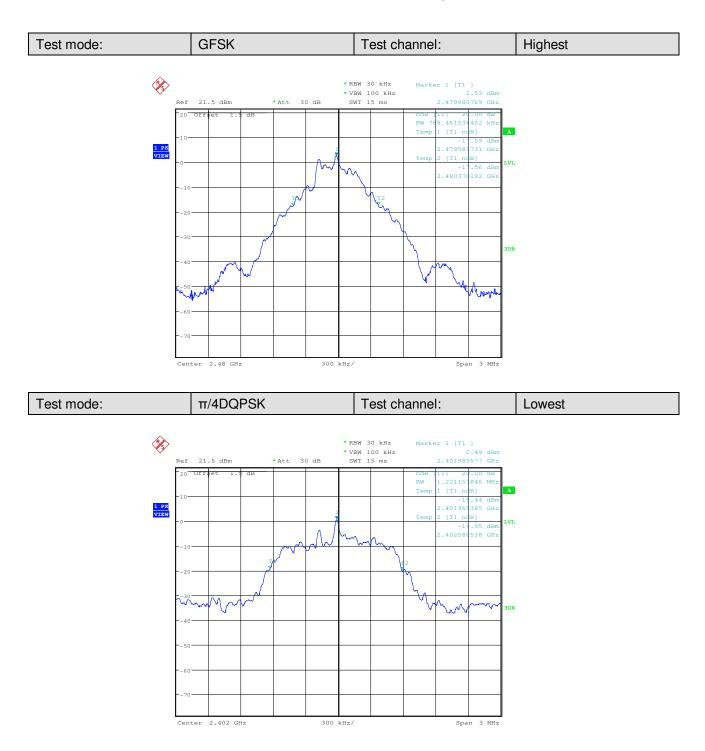




Report No.: SZEM130700392401 Page: 26 of 76

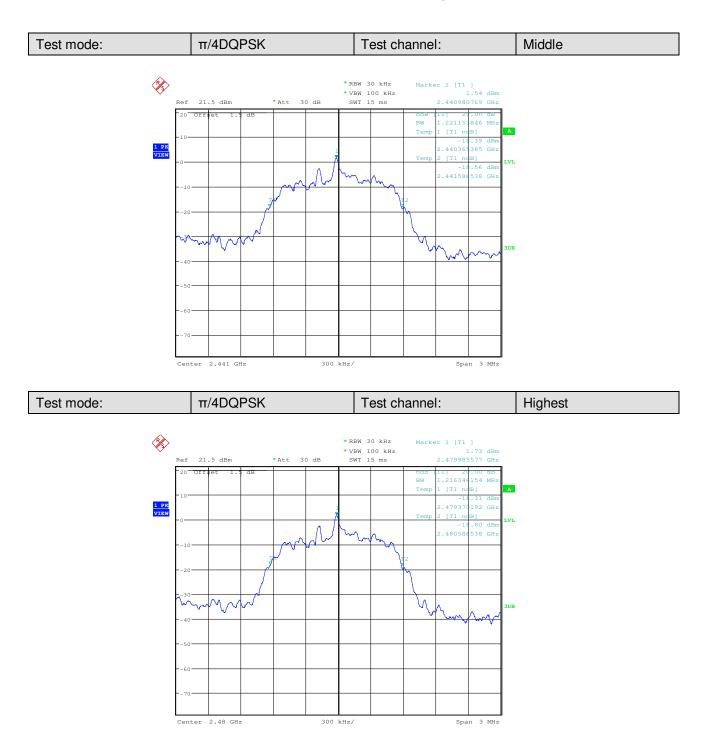




Report No.: SZEM130700392401 Page: 27 of 76

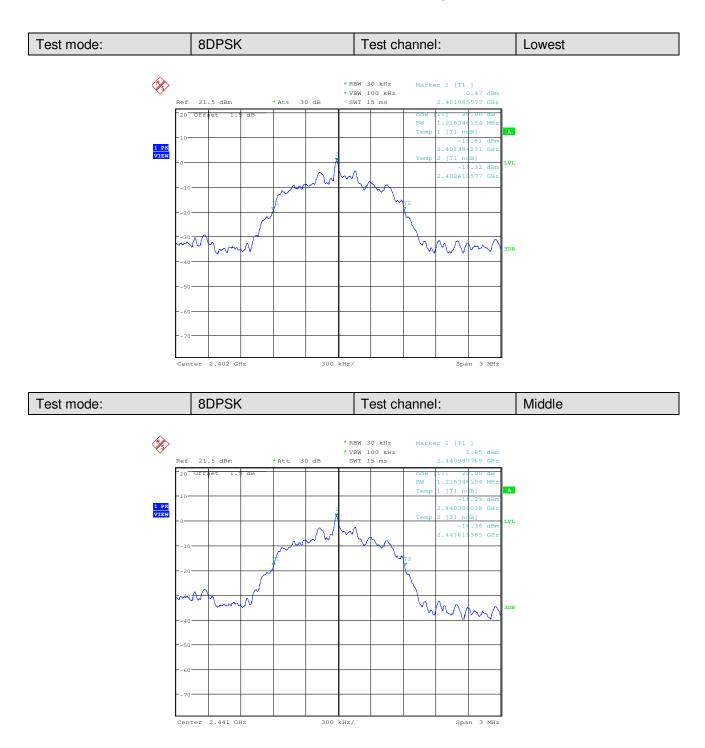



Report No.: SZEM130700392401 Page: 28 of 76

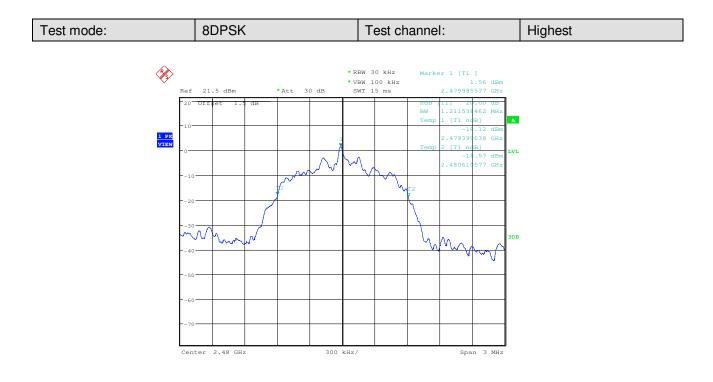





Report No.: SZEM130700392401 Page: 29 of 76

#### 5.5 Carrier Frequencies Separation

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(1)  |  |  |
|------------------------|--|--|--|
| Test Method:           | ANSI C63.10:2009   |  |  |
| Test Setup:            | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane  |  |  |
| Limit:                 | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)   |  |  |
| Exploratory Test Mode: |  |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi$ /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type. |  |  |
| Instruments Used:      | Refer to section 4.10 for details  |  |  |
| Test Results:          | Pass   |  |  |



Report No.: SZEM130700392401 Page: 30 of 76

#### **Measurement Data**

| GFSK mode    |   |             |        |  |  |
|--------------|---|-------------|--------|--|--|
| Test channel | Carrier Frequencies<br>Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1002                                    | ≥814        | Pass   |  |  |
| Middle       | 1006                                    | ≥814        | Pass   |  |  |
| Highest      | 1002                                    | ≥814        | Pass   |  |  |
|              | π/4DQPSK m                              | ode         |        |  |  |
| Test channel | Carrier Frequencies<br>Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1002                                    | ≥814        | Pass   |  |  |
| Middle       | 1010                                    | ≥814        | Pass   |  |  |
| Highest      | 1002                                    | ≥814        | Pass   |  |  |
|              | 8DPSK mode                              |             |        |  |  |
| Test channel | Carrier Frequencies<br>Separation (kHz) | Limit (kHz) | Result |  |  |
| Lowest       | 1006                                    | ≥814        | Pass   |  |  |
| Middle       | 1002                                    | ≥814        | Pass   |  |  |
| Highest      | 1002                                    | ≥814        | Pass   |  |  |


Note: According to section 5.4,

| Mode     | 20dB bandwidth (kHz)<br>(worse case) | Limit (kHz)<br>(Carrier Frequencies Separation) |
|----------|--------------------------------------|---|
| GFSK     | 831.730769231                        | 554   |
| π/4DQPSK | 1221.153846                          | 814   |
| 8DPSK    | 1216.346154                          | 811   |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 31 of 76

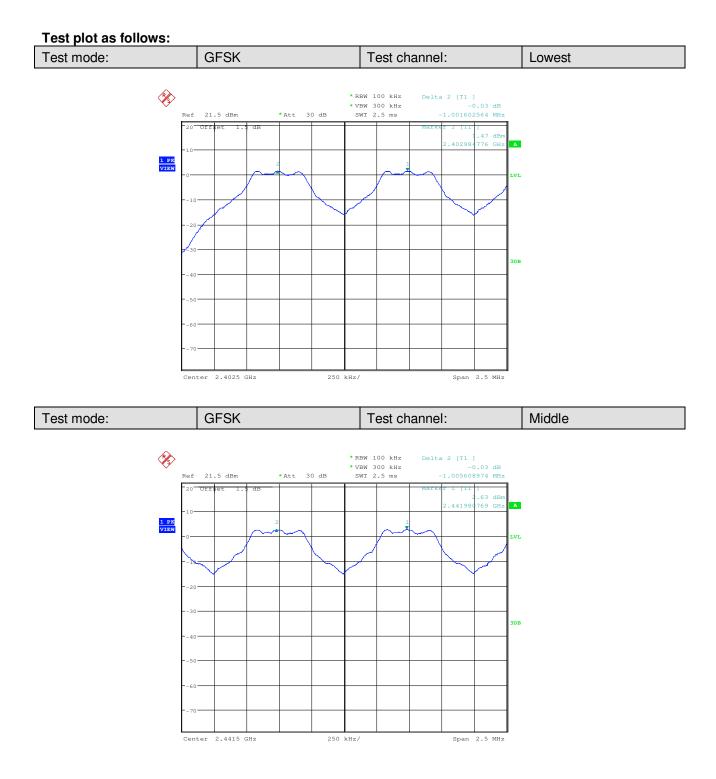




Report No.: SZEM130700392401 Page: 32 of 76

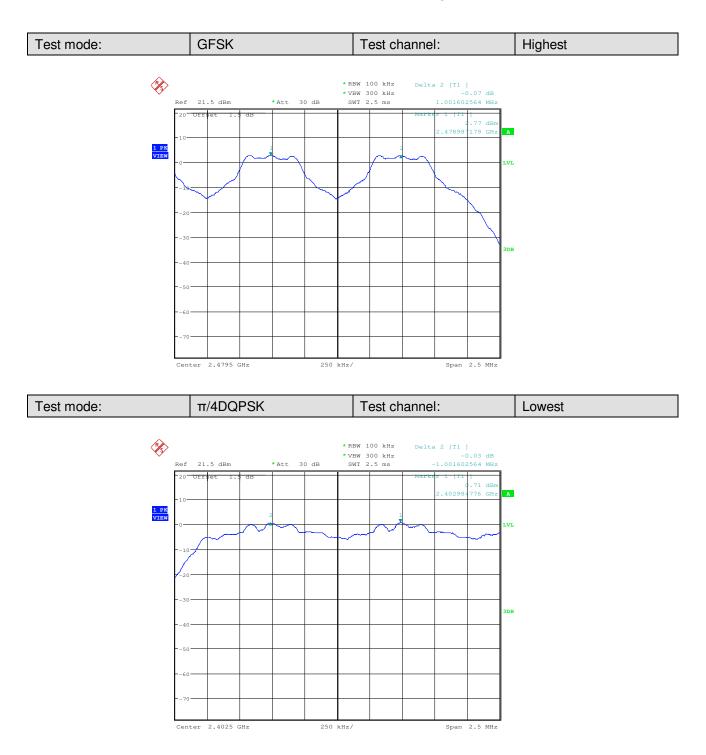




Report No.: SZEM130700392401 Page: 33 of 76

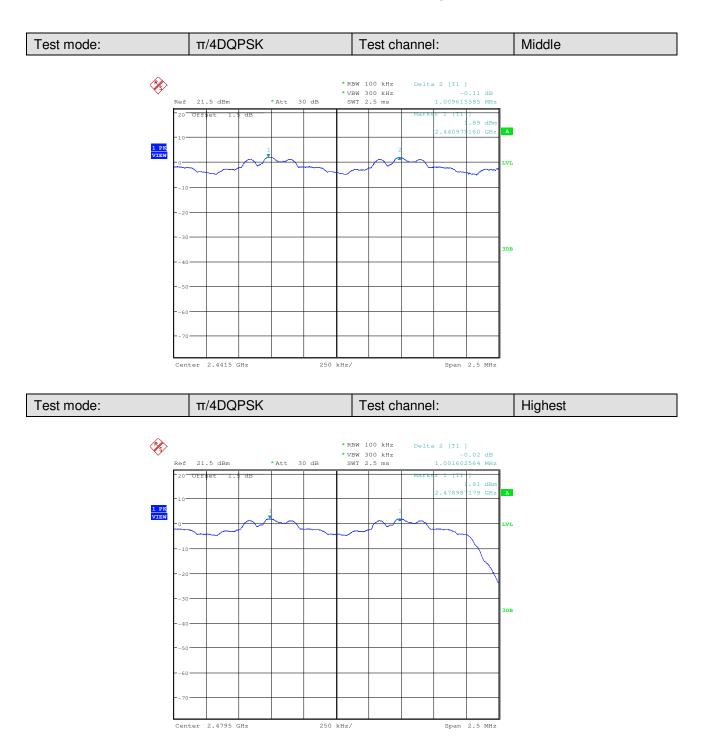




Report No.: SZEM130700392401 Page: 34 of 76

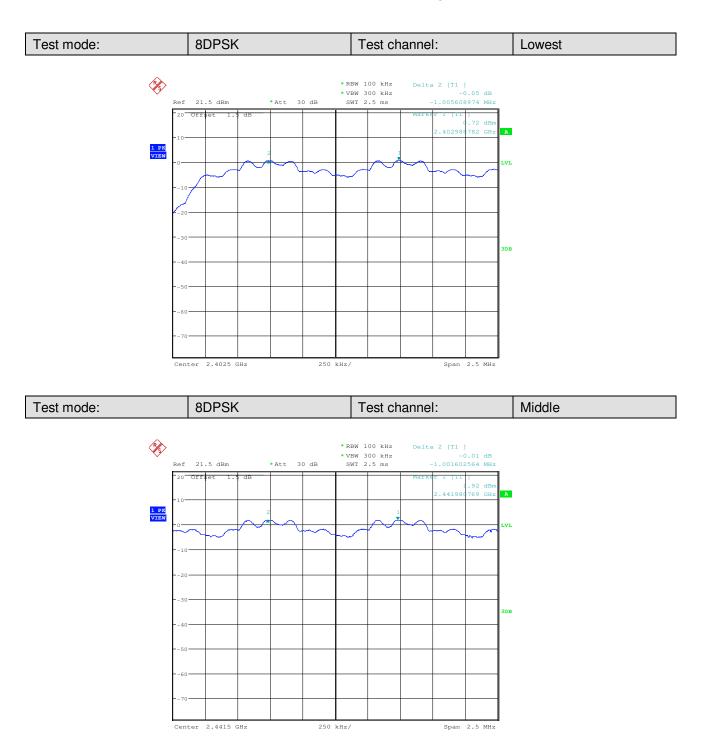



Report No.: SZEM130700392401 Page: 35 of 76

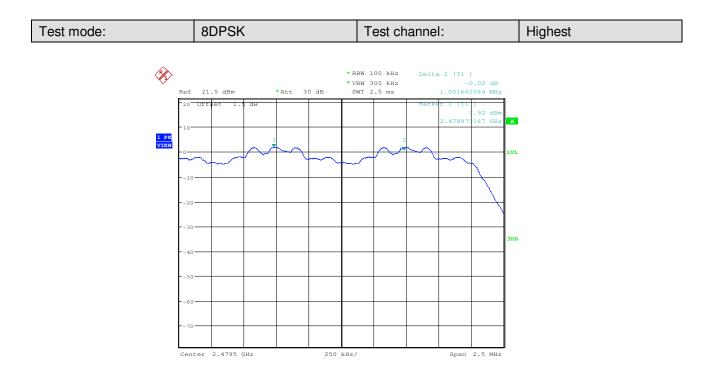



Report No.: SZEM130700392401 Page: 36 of 76

#### 5.6 Hopping Channel Number

| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)  |  |
|-------------------|---|--|
| Test Method:      | ANSI C63.10:2009  |  |
| Test Setup:       | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane |  |
| Limit:            | At least 15 channels  |  |
| Test Mode:        | Hopping transmitting with all kind of modulation                            |  |
| Instruments Used: | Refer to section 4.10 for details   |  |
| Test Results:     | Pass  |  |


#### **Measurement Data**

| Mode     | Hopping channel numbers | Limit |
|----------|-------------------------|-------|
| GFSK     | 79                      | ≥15   |
| π/4DQPSK | 79                      | ≥15   |
| 8DPSK    | 79                      | ≥15   |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 37 of 76

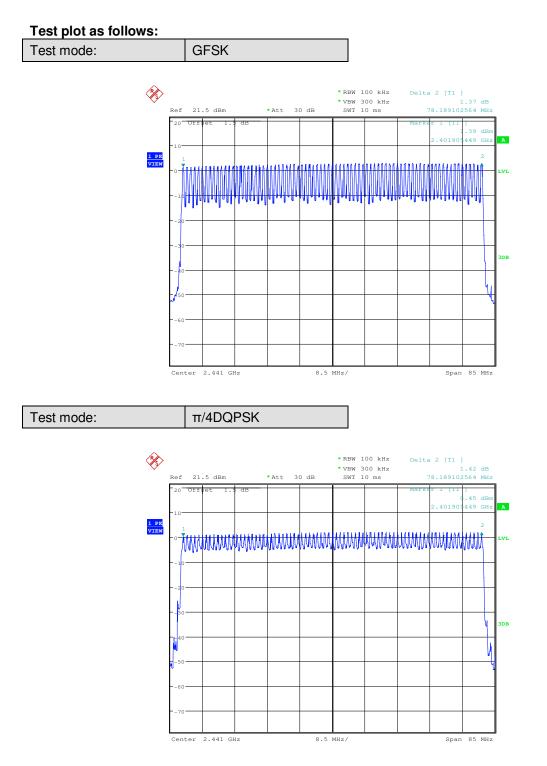



Report No.: SZEM130700392401 Page: 38 of 76

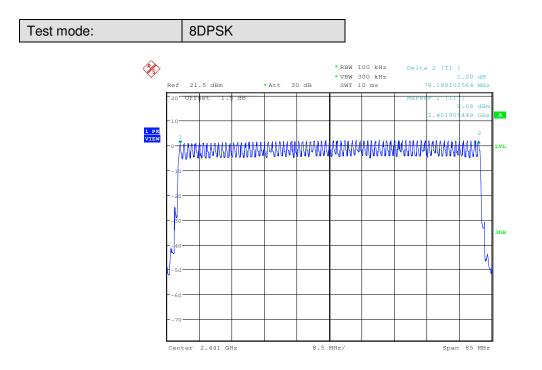





Report No.: SZEM130700392401 Page: 39 of 76

#### 5.7 Dwell Time

| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1)                                       |  |  |  |  |  |
|-------------------|---|--|--|--|--|--|
| Test Method:      | ANSI C63.10:2009  |  |  |  |  |  |
| Test Setup:       | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table                           |  |  |  |  |  |
|                   |   |  |  |  |  |  |
|                   | Ground Reference Plane  |  |  |  |  |  |
| Instruments Used: | Refer to section 4.10 for details   |  |  |  |  |  |
| Test Mode:        | Hopping transmitting with all kind of modulation and all kind of data type. |  |  |  |  |  |
| Limit:            | 0.4 Second  |  |  |  |  |  |
| Test Results:     | Pass  |  |  |  |  |  |

#### **Measurement Data**

| Mode     | Packet | Dwell time (second) | Limit (second) |
|----------|--------|---------------------|----------------|
|          | DH1    | 0.16416             | 0.4            |
| GFSK     | DH3    | 0.28592             | 0.4            |
|          | DH5    | 0.32394             | 0.4            |
|          | 2-DH1  | 0.17056             | 0.4            |
| π/4DQPSK | 2-DH3  | 0.28656             | 0.4            |
|          | 2-DH5  | 0.19616             | 0.4            |
|          | 3-DH1  | 0.16928             | 0.4            |
| 8DPSK    | 3-DH3  | 0.28592             | 0.4            |
|          | 3-DH5  | 0.32394             | 0.4            |

#### **Test Result:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s


The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.513(ms)\*(1600/ (2\*79))\*31.6=164.16 ms DH3 time slot=1.787(ms)\*(1600/ (4\*79))\*31.6=285.92ms DH5 time slot=3.037(ms)\*(1600/ (6\*79))\*31.6=323.94ms




Report No.: SZEM130700392401 Page: 40 of 76

#### Test plot as follows:

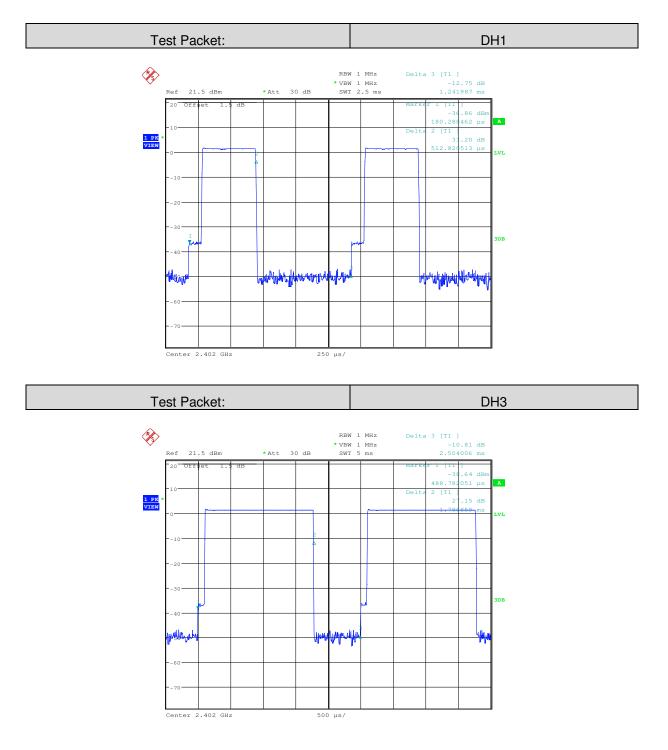




Report No.: SZEM130700392401 Page: 41 of 76

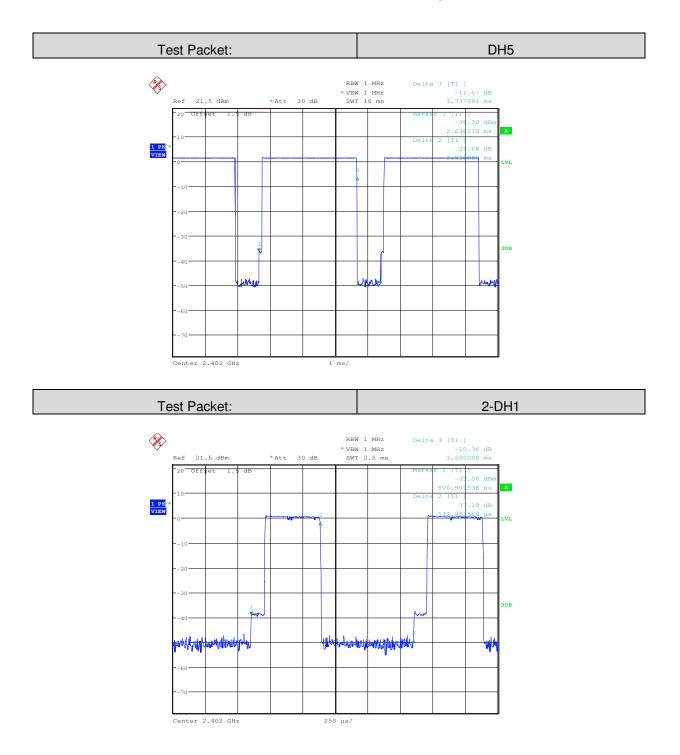




Report No.: SZEM130700392401 42 of 76 Page:

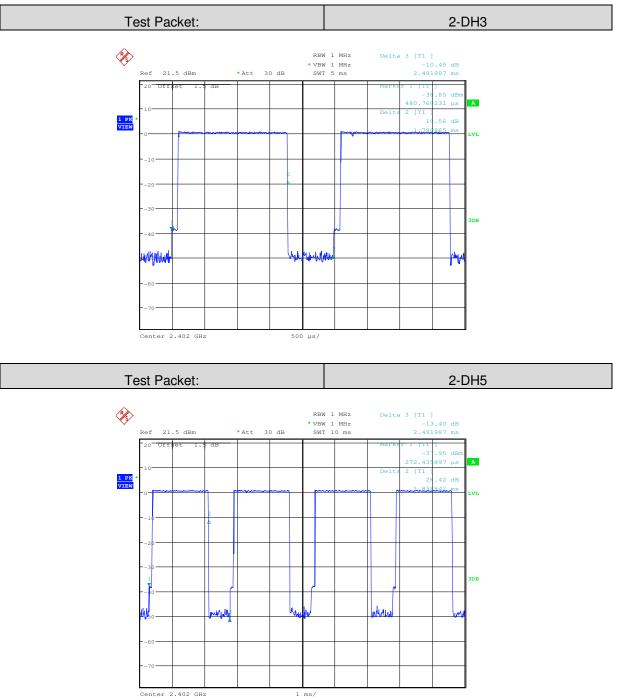

Center 2.402 GHz




Report No.: SZEM130700392401 Page: 43 of 76

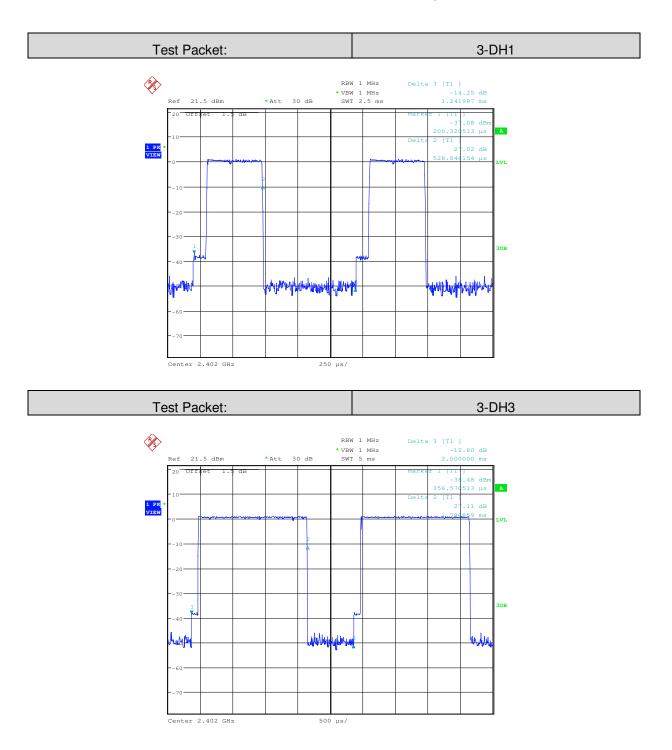



Report No.: SZEM130700392401 Page: 44 of 76

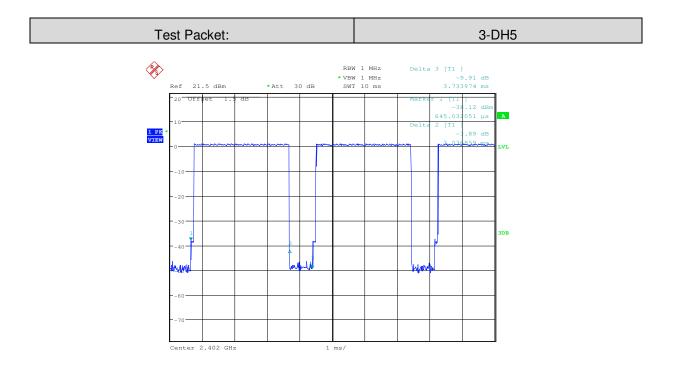



Report No.: SZEM130700392401 Page: 45 of 76


#### 5.8 Band-edge for RF Conducted Emissions

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)  |  |  |  |  |
|------------------------|---|--|--|--|--|
| Test Method:           | ANSI C63.10:2009  |  |  |  |  |
| Test Setup:            | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane   |  |  |  |  |
|                        | Remark:   |  |  |  |  |
| Limit:                 | Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.<br>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |  |  |  |  |
| Exploratory Test Mode: | Hopping transmitting with all kind of modulation and all kind of data type  |  |  |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.   |  |  |  |  |
| Instruments Used:      | Refer to section 4.10 for details   |  |  |  |  |
| Test Results:          | Pass  |  |  |  |  |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 46 of 76

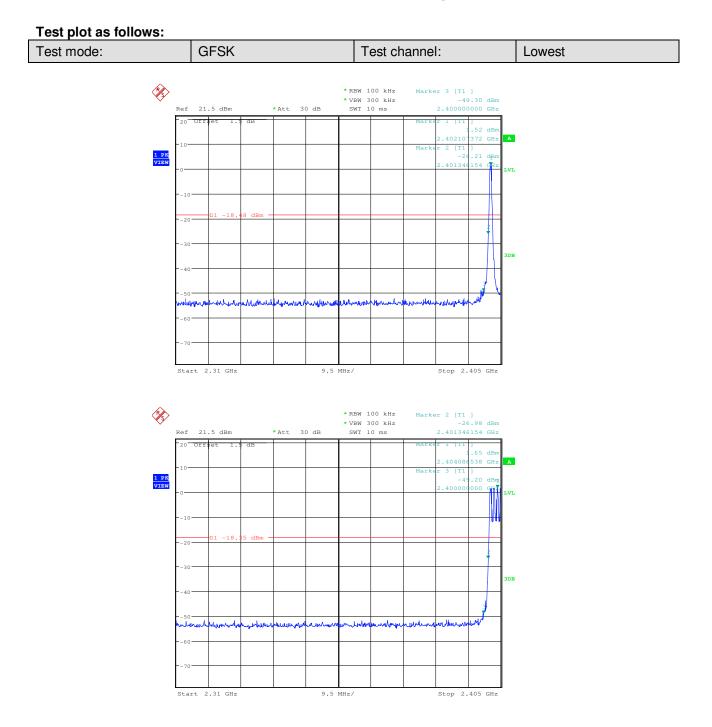




Report No.: SZEM130700392401 Page: 47 of 76

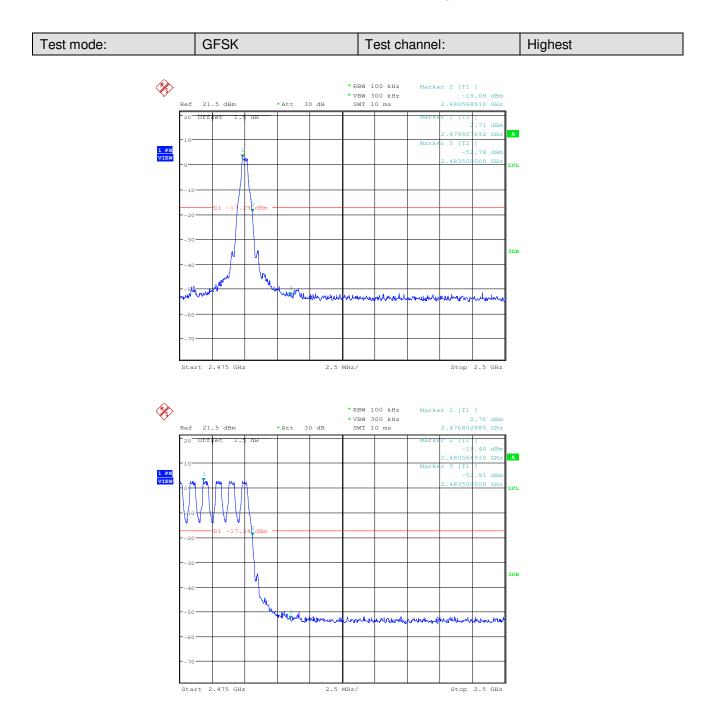

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 48 of 76

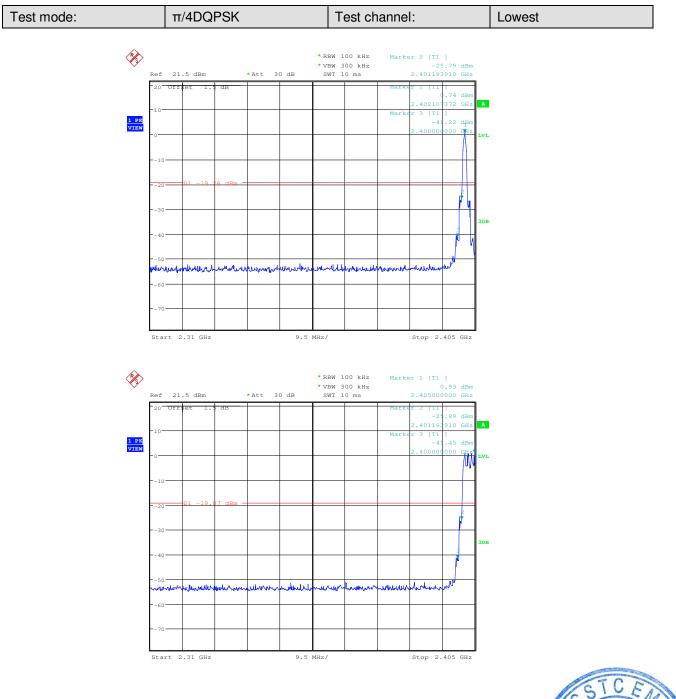






Report No.: SZEM130700392401 Page: 49 of 76

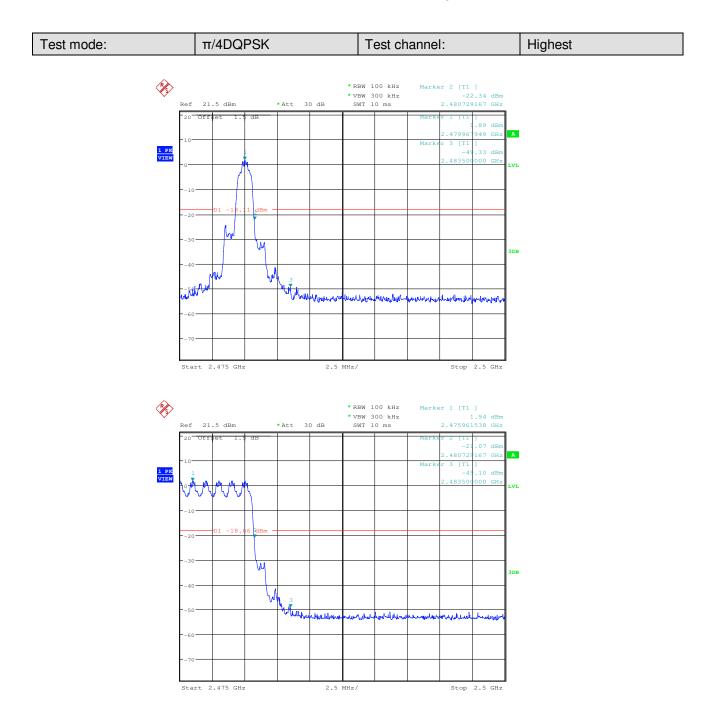




Report No.: SZEM130700392401 Page: 50 of 76

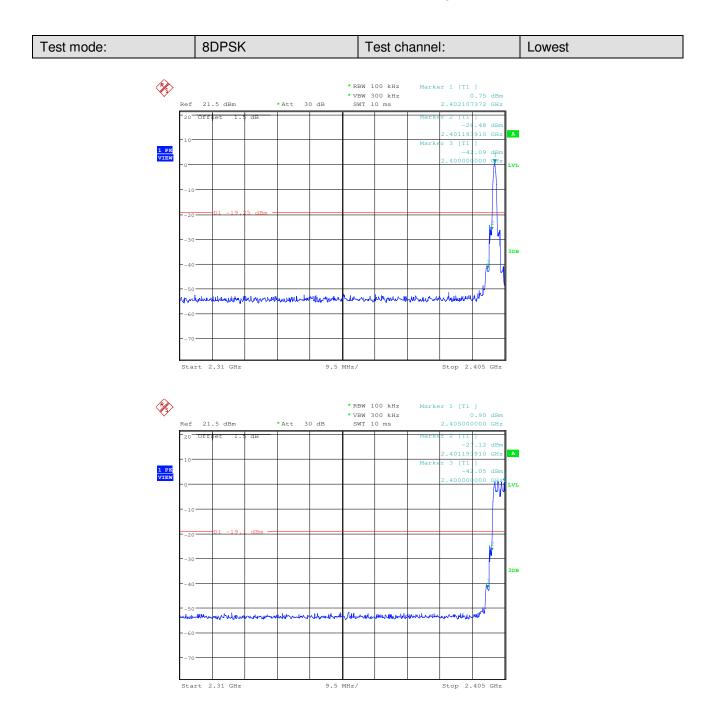



Report No.: SZEM130700392401 Page: 51 of 76

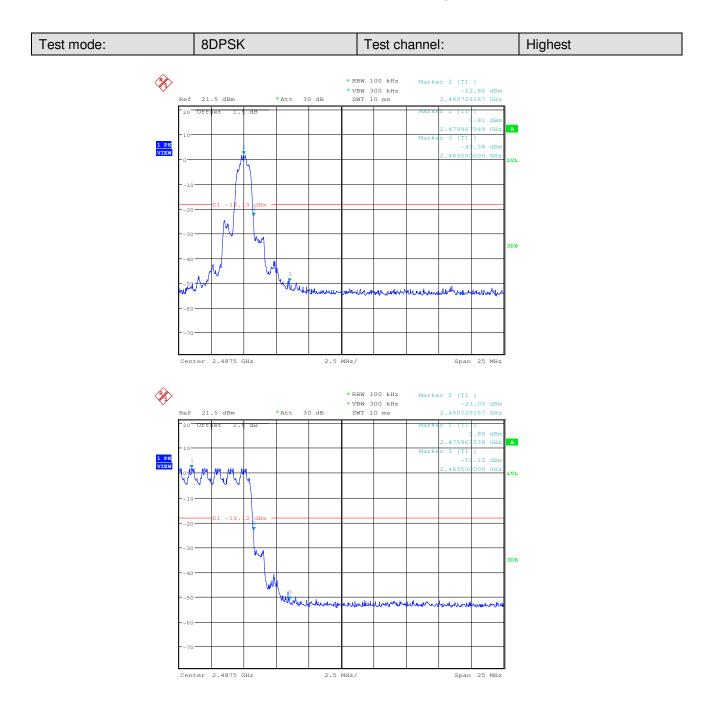



Report No.: SZEM130700392401 Page: 52 of 76


### 5.9 Spurious RF Conducted Emissions

| Test Requirement:      | 47 CFR Part 15C Section 15.247 (d)   |  |  |  |  |  |
|------------------------|--|--|--|--|--|--|
| Test Method:           | ANSI C63.10:2009   |  |  |  |  |  |
| Test Setup:            | Spectrum Analyzer<br>E.U.T<br>Non-Conducted Table<br>Ground Reference Plane<br>Remark:   |  |  |  |  |  |
| Limit:                 | Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.<br>In any 100 kHz bandwidth outside the frequency band in which the spread<br>spectrum intentional radiator is operating, the radio frequency power that is<br>produced by the intentional radiator shall be at least 20 dB below that in the<br>100 kHz bandwidth within the band that contains the highest level of the<br>desired power, based on either an RF conducted or a radiated<br>measurement. |  |  |  |  |  |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type   |  |  |  |  |  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.  |  |  |  |  |  |
| Instruments Used:      | Refer to section 4.10 for details  |  |  |  |  |  |
| Test Results:          | Pass   |  |  |  |  |  |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130700392401 Page: 53 of 76

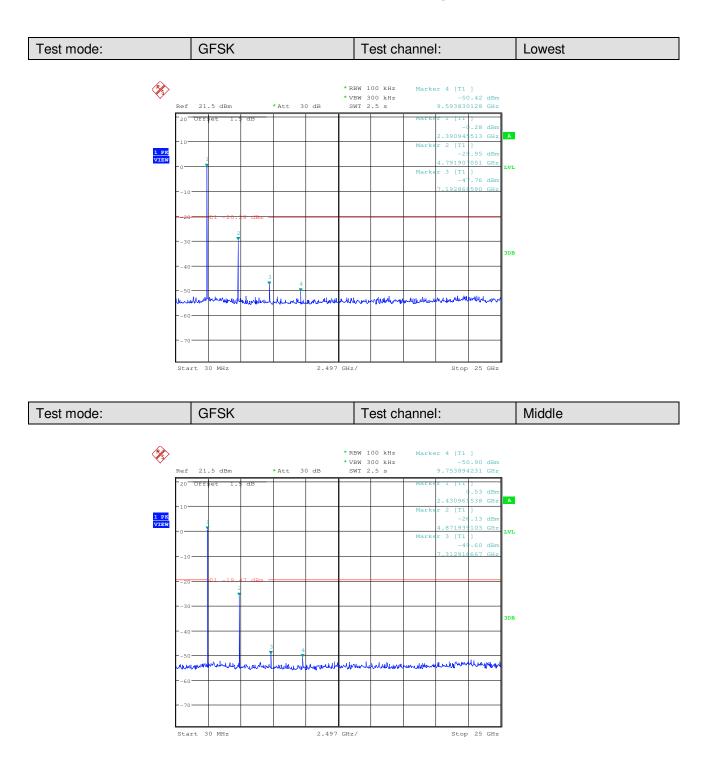




Report No.: SZEM130700392401 Page: 54 of 76

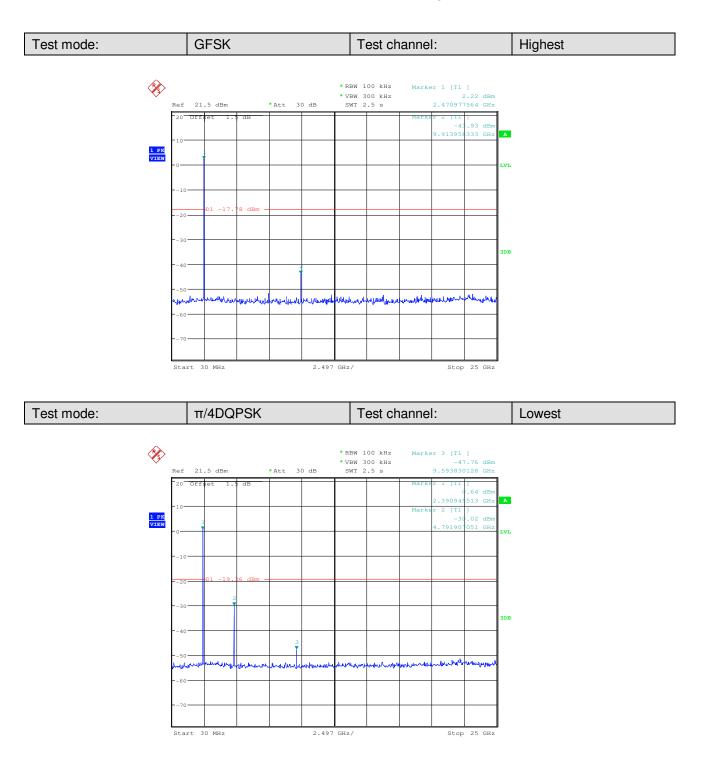




Report No.: SZEM130700392401 Page: 55 of 76

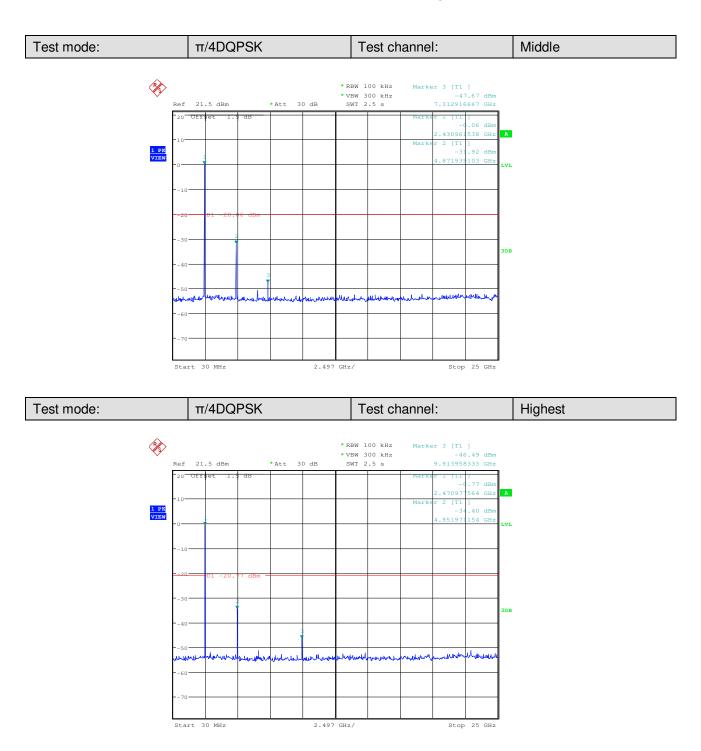




Report No.: SZEM130700392401 Page: 56 of 76

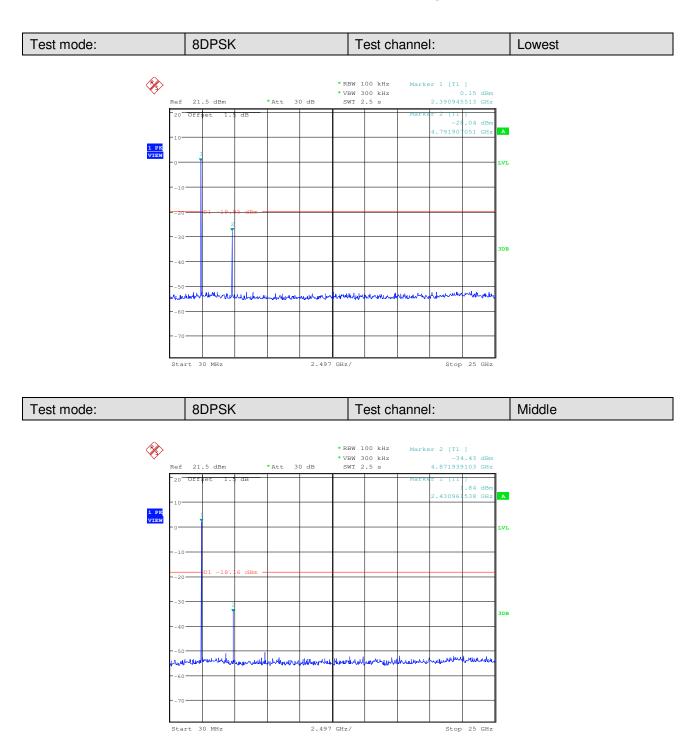



Report No.: SZEM130700392401 Page: 57 of 76

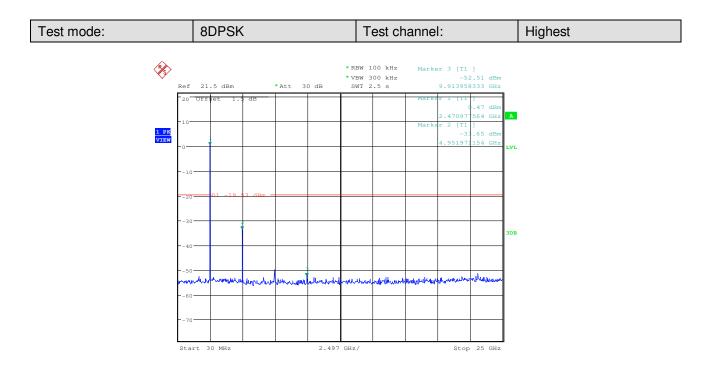



Report No.: SZEM130700392401 Page: 58 of 76

## 5.10Pseudorandom Frequency Hopping Sequence

| Test Requirement:  | 47 CFR Part 15C Section 15.247 (a)(1) requirement:   |
|--|--|
| of 25 kHz or the 20 dB bandw<br>Alternatively. Frequency hop<br>channel carrier frequencies th<br>hopping channel, whichever i<br>than 125 mW. The system sh<br>rate from a Pseudorandom o<br>on the average by each trans | shall have hopping channel carrier frequencies separated by a minimum width of the hopping channel, whichever is greater.<br>ping systems operating in the 2400-2483.5 MHz band may have hopping hat are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the is greater, provided the systems operate with an output power no greater hall hop to channel frequencies that are selected at the system hopping rdered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the of their corresponding transmitters and shall shift frequencies in smitted signals. |
| EUT Pseudorandom Freque  | ency Hopping Sequence  |
| outputs are added in a modu  | sequence: 29 -1 = 511 bits   |
|  |  |
|  | hift Register for Generation of the PRBS sequence  |
| •  | m Frequency Hopping Sequence as follow:  |
|  | 62 64 78 1 73 75 77  |
| The system receivers have in   | on the average by each transmitter.<br>Input bandwidths that match the hopping channel bandwidths of their<br>and shift frequencies in synchronization with the transmitted signals.   |





Report No.: SZEM130700392401 Page: 59 of 76


## 5.11 Radiated Spurious Emission

| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205  |      |                                |                   |            |                          |  |  |  |
|-------------------|--|------|--------------------------------|-------------------|------------|--------------------------|--|--|--|
| Test Method:      | ANSI C63.10: 2009  |      |                                |                   |            |                          |  |  |  |
| Test Site:        | Measurement Distance   | : 3m | n (Semi-Anech                  | oic Cham          | ber)       |                          |  |  |  |
| Receiver Setup:   | Frequency  |      | Detector                       | RBW               | VBW        | Remark                   |  |  |  |
|                   | 0.009MHz-0.090MH   | z    | Peak                           | 10kHz             | z 30kHz    | Peak                     |  |  |  |
|                   | 0.009MHz-0.090MH   | z    | Average                        | 10kHz             | z 30kHz    | Average                  |  |  |  |
|                   | 0.090MHz-0.110MH   | z    | Quasi-peak                     | 10kHz             | z 30kHz    | Quasi-peak               |  |  |  |
|                   | 0.110MHz-0.490MH   | Peak | 10kHz                          | z 30kHz           | Peak       |                          |  |  |  |
|                   | 0.110MHz-0.490MH   | z    | Average                        | 10kHz             | z 30kHz    | Average                  |  |  |  |
|                   | 0.490MHz -30MHz  |      | Quasi-peak                     | 10kHz             | z 30kHz    | Quasi-peak               |  |  |  |
|                   | 30MHz-1GHz   |      | Quasi-peak                     | 100 kH            | lz 300kHz  | Quasi-peak               |  |  |  |
|                   | Above 1GHz   |      | Peak                           | 1MHz              | z 3MHz     | Peak                     |  |  |  |
|                   | Above ronz   |      | Peak                           | 1MHz              | z 10Hz     | Average                  |  |  |  |
| Limit:            | Frequency  |      | eld strength<br>crovolt/meter) | Limit<br>(dBuV/m) | Remark     | Measureme<br>distance (m |  |  |  |
|                   | 0.009MHz-0.490MHz  | 2    | 400/F(kHz)                     | -                 | -          | 300                      |  |  |  |
|                   | 0.490MHz-1.705MHz  | 24   | 1000/F(kHz)                    | -                 | -          | 30                       |  |  |  |
|                   | 1.705MHz-30MHz   |      | 30                             | -                 | -          | 30                       |  |  |  |
|                   | 30MHz-88MHz  |      | 100                            | 40.0              | Quasi-peak | 3                        |  |  |  |
|                   | 88MHz-216MHz   |      | 150                            | 43.5              | Quasi-peak | 3                        |  |  |  |
|                   | 216MHz-960MHz  |      | 200                            | 46.0              | Quasi-peak | 3                        |  |  |  |
|                   | 960MHz-1GHz  |      | 500                            | 54.0              | Quasi-peak | 3                        |  |  |  |
|                   | Above 1GHz   |      | 500                            | 54.0              | Average    | 3                        |  |  |  |
|                   | Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency<br>emissions is 20dB above the maximum permitted average emission limit<br>applicable to the equipment under test. This peak limit applies to the total<br>peak emission level radiated by the device. |      |                                |                   |            |                          |  |  |  |

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 60 of 76

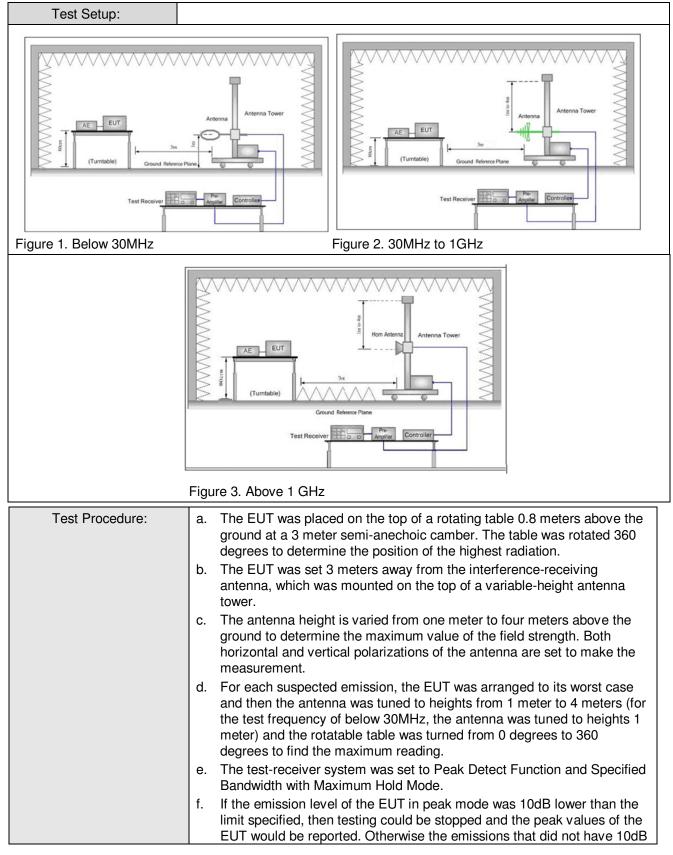



Report No.: SZEM130700392401 Page: 61 of 76

|                        | <ul><li>margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li><li>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</li></ul> |
|------------------------|--|
|                        | <ul> <li>The radiation measurements are performed in X, Y, Z axis positioning.<br/>And found the X axis positioning which it is worse case, only the test<br/>worst case mode is recorded in the report.</li> </ul>  |
|                        | i. Repeat above procedures until all frequencies measured was complete.  |
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type  |
| Final Test Mode:       | Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type  |
| Instruments Used:      | Refer to section 4.10 for details  |
| Test Results:          | Pass   |


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130700392401 Page: 62 of 76

#### 5.11.1 Radiated Emission below 1GHz

| 30MHz~1GHz (QP) |              |          |
|-----------------|--------------|----------|
| Test mode:      | Transmitting | Vertical |

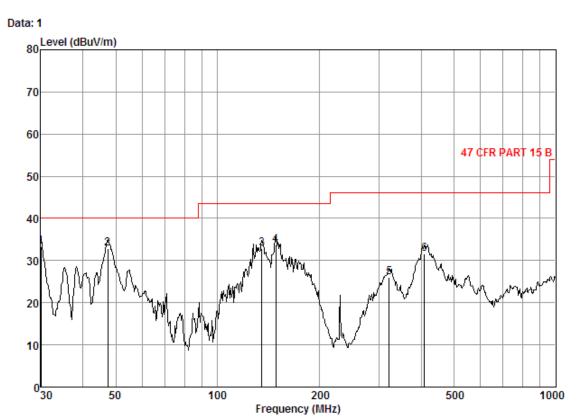


Condition: 47 CFR PART 15 B 3m 3142C VERTICAL Job No. : 3924RF Mode : Charge+TX mode

|                            |  |  | ntenna | Preamp<br>Factor                                   |  |                                  |        | Over<br>Limit |
|----------------------------|--|--|--------|--|--|----------------------------------|--------|---------------|
| -                          | MHz  | dB   | dB/m   | dB   | dBuV   | dBuV/m                           | dBuV/m | dB            |
| 1<br>2<br>3<br>4<br>5<br>6 | 30.00<br>47.33<br>135.03<br>148.96<br>322.19<br>408.95 | 0.60<br>0.75<br>1.29<br>1.32<br>1.97<br>2.24 | 8.30   | 27.36<br>27.30<br>26.98<br>26.91<br>26.58<br>27.19 | 42.12<br>51.13<br>50.24<br>50.15<br>40.78<br>44.97 | 32.95<br>32.85<br>33.79<br>26.10 | 46.00  | -7.05         |



Report No.: SZEM130700392401 Page: 63 of 76

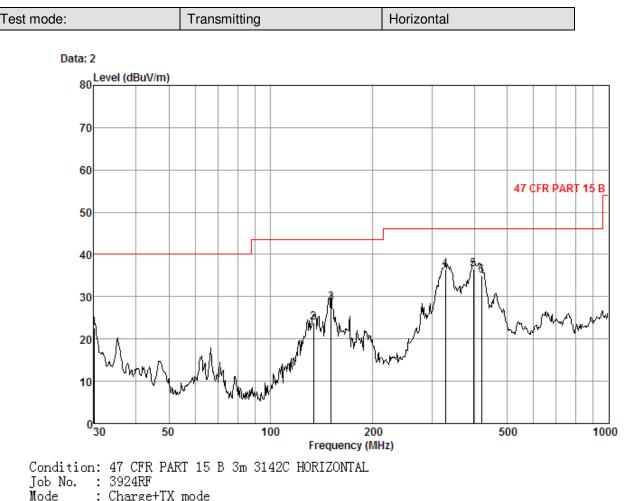

| oae                        |   |    | ntenna   | Preamp<br>Factor                                   | Read<br>Level                                      |  | Limit<br>Line                    | Over<br>Limit  |
|----------------------------|---|----|--|--|--|--|----------------------------------|--|
|                            | MHz   | dB | dB/m   | dB   | dBuV   | dBuV/m   | dBuV/m                           | dB   |
| 1<br>2<br>3<br>4<br>5<br>6 | 30.00<br>134.09<br>151.07<br>329.04<br>397.63<br>420.58 |    | 17.90<br>8.28<br>9.37<br>10.30<br>11.44<br>11.50 | 27.36<br>26.99<br>26.90<br>26.62<br>27.11<br>27.25 | 31.48<br>41.27<br>44.87<br>50.79<br>50.04<br>48.43 | 22.62<br>23.84<br>28.66<br>36.47<br>36.56<br>34.97 | 43.50<br>43.50<br>46.00<br>46.00 | -17.38<br>-19.66<br>-14.84<br>-9.53<br>-9.44<br>-11.03 |



Report No.: SZEM130700392401 Page: 64 of 76

| Worse case mode:   |                       | GFSK(DH1)                   | Test                     | st channel: Lowe        |                   | Rema                   | ark:                  | Peak         |
|--------------------|-----------------------|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Preamp<br>Factor<br>(dB) | Read<br>Level<br>(dBuV) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
| 3018.502           | 5.09                  | 33.39                       | 40.31                    | 49.47                   | 47.64             | 74                     | -26.36                | Vertical     |
| 4785.075           | 7.42                  | 34.73                       | 41.61                    | 63.32                   | 63.86             | 74                     | -10.14                | Vertical     |
| 5747.586           | 7.86                  | 35.29                       | 41.14                    | 49.85                   | 51.86             | 74                     | -22.14                | Vertical     |
| 6678.987           | 8.21                  | 36.13                       | 40.33                    | 50.16                   | 54.17             | 74                     | -19.83                | Vertical     |
| 7941.185           | 9.31                  | 36.00                       | 39.24                    | 48.92                   | 54.99             | 74                     | -19.01                | Vertical     |
| 9465.979           | 9.66                  | 37.16                       | 37.91                    | 47.30                   | 56.21             | 74                     | -17.79                | Vertical     |
| 3049.394           | 5.12                  | 33.38                       | 40.34                    | 50.52                   | 48.68             | 74                     | -25.32                | Horizontal   |
| 4785.075           | 7.42                  | 34.73                       | 41.61                    | 61.71                   | 62.25             | 74                     | -11.75                | Horizontal   |
| 6172.197           | 8.03                  | 35.90                       | 40.78                    | 50.60                   | 53.75             | 74                     | -20.25                | Horizontal   |
| 7721.909           | 9.25                  | 36.00                       | 39.43                    | 49.84                   | 55.66             | 74                     | -18.34                | Horizontal   |
| 8441.459           | 9.46                  | 36.18                       | 38.80                    | 48.68                   | 55.52             | 74                     | -18.48                | Horizontal   |
| 9538.543           | 9.67                  | 37.23                       | 37.86                    | 47.59                   | 56.63             | 74                     | -17.37                | Horizontal   |

#### 5.11.2 Transmitter Emission above 1GHz

| Worse case n       | node:                 | GFSK(DH1                     | ) Te                     | Test channel:  |                               | vest Remark:      |                       | Average      |
|--------------------|-----------------------|------------------------------|--------------------------|--|-------------------------------|-------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>loss<br>(dB) | Antenna<br>factors<br>(dB/m) | Preamp<br>factor<br>(dB) | <ul> <li>Reading</li> <li>Level</li> <li>(dBµV)</li> </ul> | Emission<br>Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Over<br>Limit<br>(dB) | Polarization |
| 3018.502           | 5.09                  | 33.39                        | 40.31                    | 29.00  | 27.17                         | 54                | -26.83                | Vertical     |
| 4785.075           | 7.42                  | 34.73                        | 41.61                    | 45.00  | 45.54                         | 54                | -8.46                 | Vertical     |
| 5747.586           | 7.86                  | 35.29                        | 41.14                    | 30.00  | 32.01                         | 54                | -21.99                | Vertical     |
| 6678.987           | 8.21                  | 36.13                        | 40.33                    | 30.29  | 34.30                         | 54                | -19.70                | Vertical     |
| 7941.185           | 9.31                  | 36.00                        | 39.24                    | 29.00  | 35.07                         | 54                | -18.93                | Vertical     |
| 9465.979           | 9.66                  | 37.16                        | 37.91                    | 27.40  | 36.31                         | 54                | -17.69                | Vertical     |
| 3049.394           | 5.12                  | 33.38                        | 40.34                    | 31.00  | 29.16                         | 54                | -24.84                | Horizontal   |
| 4785.075           | 7.42                  | 34.73                        | 41.61                    | 44.52  | 45.06                         | 54                | -8.94                 | Horizontal   |
| 6172.197           | 8.03                  | 35.90                        | 40.78                    | 30.81  | 33.96                         | 54                | -20.04                | Horizontal   |
| 7721.909           | 9.25                  | 36.00                        | 39.43                    | 30.00  | 35.82                         | 54                | -18.18                | Horizontal   |
| 8441.459           | 9.46                  | 36.18                        | 38.80                    | 28.00  | 34.84                         | 54                | -19.16                | Horizontal   |
| 9538.543           | 9.67                  | 37.23                        | 37.86                    | 27.60  | 36.64                         | 54                | -17.36                | Horizontal   |



Report No.: SZEM130700392401 Page: 65 of 76

| Worse case n       | rse case mode: GFSK(DH1) Test channel: |                             | Middle                   | Rem                     | ark:              | Peak                   |                       |              |
|--------------------|--|-----------------------------|--------------------------|-------------------------|-------------------|------------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB)                  | Antenna<br>Factor<br>(dB/m) | Preamp<br>Factor<br>(dB) | Read<br>Level<br>(dBuV) | Level<br>(dBuV/m) | Limit Line<br>(dBuV/m) | Over<br>Limit<br>(dB) | Polarization |
| 3561.636           | 5.85                                   | 33.28                       | 40.72                    | 49.90                   | 48.31             | 74                     | -25.69                | Vertical     |
| 4883.519           | 7.48                                   | 34.59                       | 41.68                    | 58.90                   | 59.29             | 74                     | -14.71                | Vertical     |
| 6032.401           | 7.99                                   | 35.74                       | 40.89                    | 50.84                   | 53.68             | 74                     | -20.32                | Vertical     |
| 6974.358           | 8.43                                   | 35.83                       | 40.08                    | 49.87                   | 54.05             | 74                     | -19.95                | Vertical     |
| 8527.851           | 9.49                                   | 36.23                       | 38.73                    | 48.44                   | 55.43             | 74                     | -18.57                | Vertical     |
| 9441.913           | 9.66                                   | 37.14                       | 37.94                    | 47.49                   | 56.35             | 74                     | -17.65                | Vertical     |
| 3709.691           | 6.05                                   | 33.45                       | 40.83                    | 49.53                   | 48.20             | 74                     | -25.80                | Horizontal   |
| 4883.519           | 7.48                                   | 34.59                       | 41.68                    | 60.37                   | 60.76             | 74                     | -13.24                | Horizontal   |
| 5850.919           | 7.91                                   | 35.45                       | 41.06                    | 49.90                   | 52.20             | 74                     | -21.80                | Horizontal   |
| 6478.053           | 8.14                                   | 36.26                       | 40.51                    | 49.48                   | 53.37             | 74                     | -20.63                | Horizontal   |
| 7566.249           | 9.17                                   | 36.00                       | 39.56                    | 49.37                   | 54.98             | 74                     | -19.02                | Horizontal   |
| 10036.730          | 9.88                                   | 37.76                       | 37.47                    | 47.04                   | 57.21             | 74                     | -16.79                | Horizontal   |

| Worse case n       | node:                 | GFSK(DH1)                    | ) Te                    | est channel: | Middle                        | Remark:           |                       | Average      |
|--------------------|-----------------------|------------------------------|-------------------------|--------------|-------------------------------|-------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>loss<br>(dB) | Antenna<br>factors<br>(dB/m) | Pream<br>factor<br>(dB) |              | Emission<br>Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Over<br>Limit<br>(dB) | Polarization |
| 3561.636           | 5.85                  | 33.28                        | 40.72                   | 30.01        | 28.42                         | 54                | -25.58                | Vertical     |
| 4883.519           | 7.48                  | 34.59                        | 41.68                   | 43.00        | 43.39                         | 54                | -10.61                | Vertical     |
| 6032.401           | 7.99                  | 35.74                        | 40.89                   | 30.99        | 33.83                         | 54                | -20.17                | Vertical     |
| 6974.358           | 8.43                  | 35.83                        | 40.08                   | 30.10        | 34.28                         | 54                | -19.72                | Vertical     |
| 8527.851           | 9.49                  | 36.23                        | 38.73                   | 28.49        | 35.48                         | 54                | -18.52                | Vertical     |
| 9441.913           | 9.66                  | 37.14                        | 37.94                   | 27.99        | 36.85                         | 54                | -17.15                | Vertical     |
| 3709.691           | 6.05                  | 33.45                        | 40.83                   | 30.00        | 28.67                         | 54                | -25.33                | Horizontal   |
| 4883.519           | 7.48                  | 34.59                        | 41.68                   | 43.40        | 43.79                         | 54                | -10.21                | Horizontal   |
| 5850.919           | 7.91                  | 35.45                        | 41.06                   | 30.01        | 32.31                         | 54                | -21.69                | Horizontal   |
| 6478.053           | 8.14                  | 36.26                        | 40.51                   | 29.80        | 33.69                         | 54                | -20.31                | Horizontal   |
| 7566.249           | 9.17                  | 36.00                        | 39.56                   | 30.00        | 35.61                         | 54                | -18.39                | Horizontal   |
| 10036.730          | 9.88                  | 37.76                        | 37.47                   | 28.00        | 38.17                         | 54                | -15.83                | Horizontal   |



Report No.: SZEM130700392401 Page: 66 of 76

| Worse case n       | node:                 | GFSK(DH1                    | (DH1) Test channel:    |       | Highest           | Highest Remark       |          | Peak         |
|--------------------|-----------------------|-----------------------------|------------------------|-------|-------------------|----------------------|----------|--------------|
| Frequency<br>(MHz) | Cable<br>Loss<br>(dB) | Antenna<br>Factor<br>(dB/m) | Pream<br>Facto<br>(dB) |       | Level<br>(dBuV/m) | Limit Lin<br>(dBuV/m | I I Imit | Polarization |
| 3738.129           | 6.11                  | 33.49                       | 40.84                  | 50.76 | 49.52             | 74                   | -24.48   | Vertical     |
| 4971.316           | 7.53                  | 34.43                       | 41.75                  | 60.50 | 60.71             | 74                   | -13.29   | Vertical     |
| 5674.896           | 7.83                  | 35.18                       | 41.20                  | 50.14 | 51.95             | 74                   | -22.05   | Vertical     |
| 6886.154           | 8.35                  | 35.92                       | 40.15                  | 49.86 | 53.98             | 74                   | -20.02   | Vertical     |
| 8703.294           | 9.54                  | 36.36                       | 38.59                  | 48.63 | 55.94             | 74                   | -18.06   | Vertical     |
| 10480.590          | 10.19                 | 38.28                       | 37.65                  | 41.20 | 52.02             | 74                   | -21.98   | Vertical     |
| 3026.195           | 5.09                  | 33.39                       | 40.33                  | 49.39 | 47.54             | 74                   | -26.46   | Horizontal   |
| 4971.316           | 7.53                  | 34.43                       | 41.75                  | 60.51 | 60.72             | 74                   | -13.28   | Horizontal   |
| 6428.771           | 8.12                  | 36.20                       | 40.55                  | 49.55 | 53.32             | 74                   | -20.68   | Horizontal   |
| 7585.533           | 9.19                  | 36.00                       | 39.54                  | 48.67 | 54.32             | 74                   | -19.68   | Horizontal   |
| 8441.459           | 9.46                  | 36.18                       | 38.80                  | 48.31 | 55.15             | 74                   | -18.85   | Horizontal   |
| 9490.104           | 9.66                  | 37.18                       | 37.89                  | 46.48 | 55.43             | 74                   | -18.57   | Horizontal   |

| Worse case n       | node:                 | GFSK(DH1                     | ) Te                     | est channel:   | Highest                       | Rem               | Remark:               |              |
|--------------------|-----------------------|------------------------------|--------------------------|--|-------------------------------|-------------------|-----------------------|--------------|
| Frequency<br>(MHz) | Cable<br>loss<br>(dB) | Antenna<br>factors<br>(dB/m) | Preamp<br>factor<br>(dB) | <ul><li>Reading</li><li>Level</li><li>(dBµV)</li></ul> | Emission<br>Level<br>(dBµV/m) | Limit<br>(dBµV/m) | Over<br>Limit<br>(dB) | Polarization |
| 3738.129           | 6.11                  | 33.49                        | 40.84                    | 30.19  | 28.95                         | 54                | -25.05                | Vertical     |
| 4971.316           | 7.53                  | 34.43                        | 41.75                    | 43.99  | 44.20                         | 54                | -9.80                 | Vertical     |
| 5674.896           | 7.83                  | 35.18                        | 41.20                    | 30.09  | 31.90                         | 54                | -22.10                | Vertical     |
| 6886.154           | 8.35                  | 35.92                        | 40.15                    | 30.00  | 34.12                         | 54                | -19.88                | Vertical     |
| 8703.294           | 9.54                  | 36.36                        | 38.59                    | 28.20  | 35.51                         | 54                | -18.49                | Vertical     |
| 10480.590          | 10.19                 | 38.28                        | 37.65                    | 23.20  | 34.02                         | 54                | -19.98                | Vertical     |
| 3026.195           | 5.09                  | 33.39                        | 40.33                    | 30.01  | 28.16                         | 54                | -25.84                | Horizontal   |
| 4971.316           | 7.53                  | 34.43                        | 41.75                    | 44.19  | 44.40                         | 54                | -9.60                 | Horizontal   |
| 6428.771           | 8.12                  | 36.20                        | 40.55                    | 30.01  | 33.78                         | 54                | -20.22                | Horizontal   |
| 7585.533           | 9.19                  | 36.00                        | 39.54                    | 32.54  | 38.19                         | 54                | -15.81                | Horizontal   |
| 8441.459           | 9.46                  | 36.18                        | 38.80                    | 29.00  | 35.84                         | 54                | -18.16                | Horizontal   |
| 9490.104           | 9.66                  | 37.18                        | 37.89                    | 26.30  | 35.25                         | 54                | -18.75                | Horizontal   |

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

 Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Report No.: SZEM130700392401 Page: 67 of 76

## 5.12Band edge (Radiated Emission)

| Test Requirement:                               | 47 CFR Part 15C Section 15.209 and 15.205        |  |                   |  |  |  |  |
|---|--|--|-------------------|--|--|--|--|
| Test Method:                                    | ANSI C63.10: 2009                                |  |                   |  |  |  |  |
| Test Site:                                      | Measurement Distance: 3m (Semi-Anechoic Chamber) |  |                   |  |  |  |  |
| Limit:  | Frequency  | Limit (dBuV/m @3m)   | Remark            |  |  |  |  |
|   | 30MHz-88MHz                                      | 40.0   | Quasi-peak Value  |  |  |  |  |
|   | 88MHz-216MHz                                     | 43.5   | Quasi-peak Value  |  |  |  |  |
|   | 216MHz-960MHz                                    | 46.0   | Quasi-peak Value  |  |  |  |  |
|   | 960MHz-1GHz                                      | 54.0   | Quasi-peak Value  |  |  |  |  |
|   | Above 1GHz                                       | 54.0   | Average Value     |  |  |  |  |
|   |  | 74.0   | Peak Value        |  |  |  |  |
|   |  |  |                   |  |  |  |  |
| Test Setup:                                     |  |  |                   |  |  |  |  |
| AE EUT<br>Ground Reference Pla<br>Test Receiver |  | AE EUT<br>(Turntable)<br>Ground Reterence Pit<br>Test Receiver | Hom Antenna Tower |  |  |  |  |
| Figure 1. 30MHz to 1GHz Figure 2. Above 1 GHz   |  |  |                   |  |  |  |  |




Report No.: SZEM130700392401 Page: 68 of 76

| Test Procedure:        | <ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>g. Test the EUT in the lowest channel , the Highest channel</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul> |
|------------------------|--|
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type  |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type is the worse case of   |
|                        | GFSK modulation type   |
| Instruments Used:      | Refer to section 4.10 for details  |
| Test Results:          | Pass   |
|                        |  |






Report No.: SZEM130700392401 Page: 69 of 76

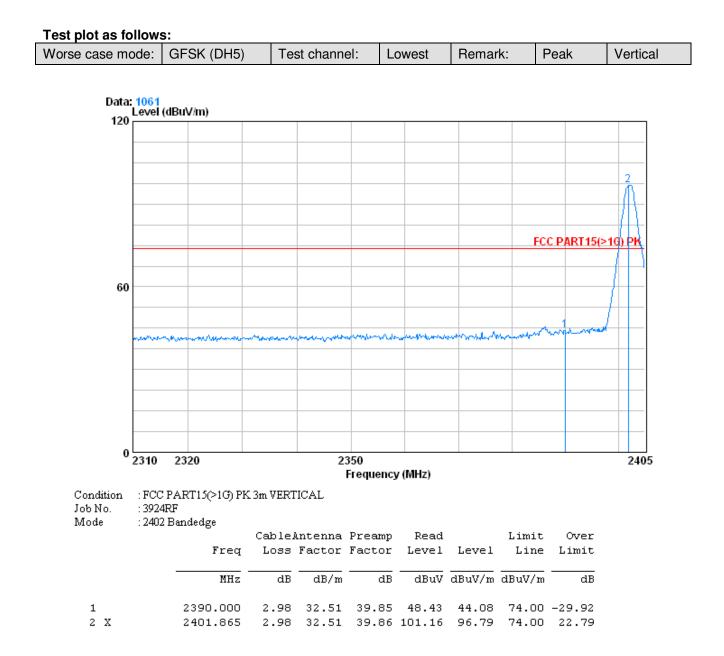



Report No.: SZEM130700392401 Page: 70 of 76


| Worse case mode: G | GFSK (DH5) | Test channel: | Lowest | Remark: | Peak | Horizontal |
|--------------------|------------|---------------|--------|---------|------|------------|
|--------------------|------------|---------------|--------|---------|------|------------|

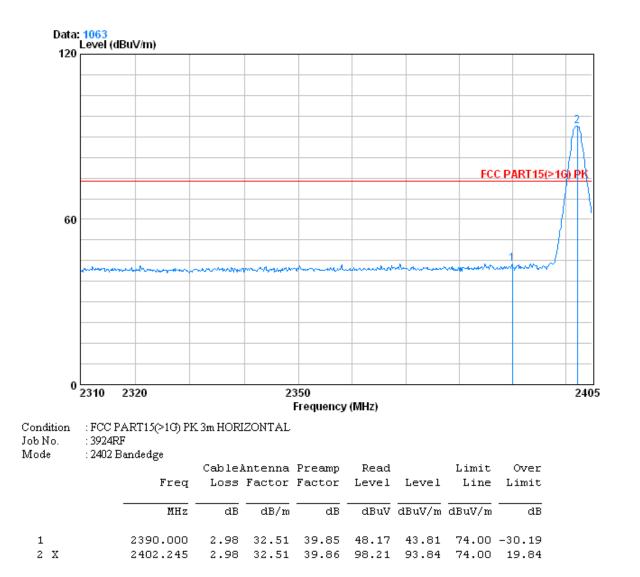



Report No.: SZEM130700392401 Page: 71 of 76


| Worse case mode: | GFSK (DH5) | Test channel: | Lowest | Remark: | Average | Vertical |
|------------------|------------|---------------|--------|---------|---------|----------|
|------------------|------------|---------------|--------|---------|---------|----------|

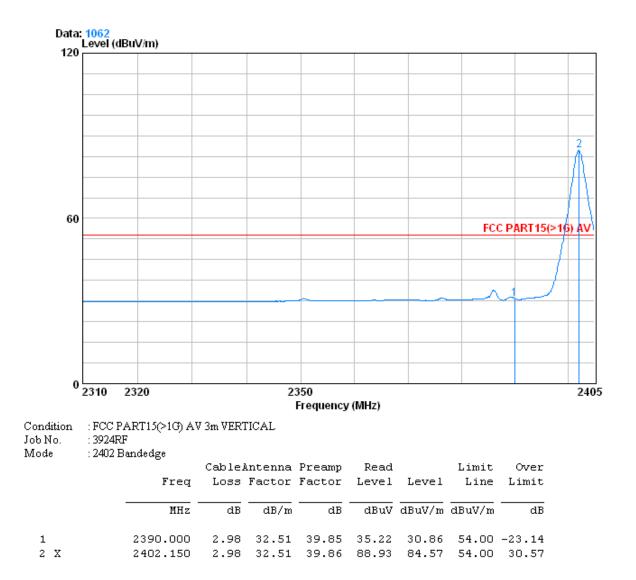



Report No.: SZEM130700392401 Page: 72 of 76


| Worse case mode: G | GFSK (DH5) | Test channel: | Lowest | Remark: | Average | Horizontal |  |
|--------------------|------------|---------------|--------|---------|---------|------------|--|
|--------------------|------------|---------------|--------|---------|---------|------------|--|

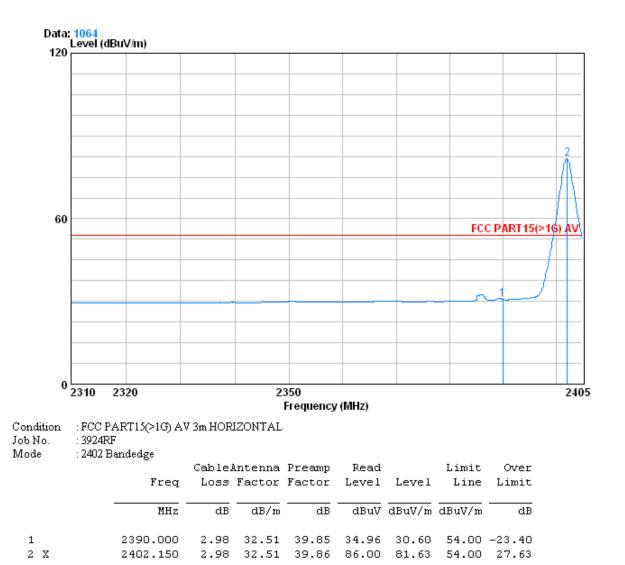



Report No.: SZEM130700392401 Page: 73 of 76

| Worse case mode: GFSK ( | 0H5) Test channel: | Highest | Remark: | Peak | Vertical |  |
|-------------------------|--------------------|---------|---------|------|----------|--|
|-------------------------|--------------------|---------|---------|------|----------|--|

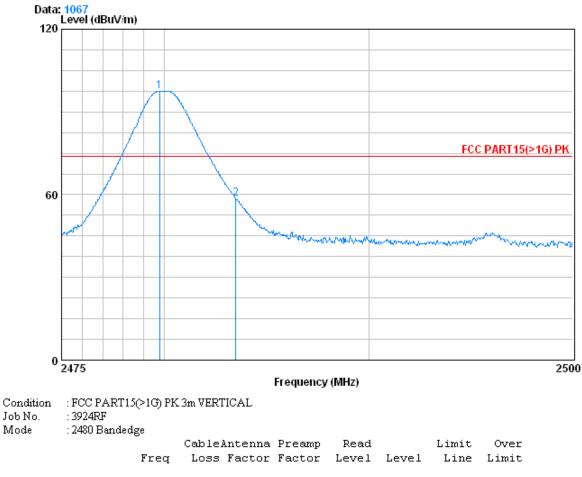


|     | MHz      | dB   | dB/m  | dB    | dBuV   | dBuV/m | dBuV/m | dB     |
|-----|----------|------|-------|-------|--------|--------|--------|--------|
| 1 X | 2479.775 | 3.03 | 32.67 | 39.92 | 101.82 | 97.60  | 74.00  | 23.60  |
| 2   | 2483.500 | 3.03 | 32.67 | 39.92 | 62.69  | 58.47  | 74.00  | -15.53 |



Report No.: SZEM130700392401 Page: 74 of 76

| Worse case mode: | GFSK (DH5) | Test channel: | Highest | Remark: | Peak | Horizontal |  |
|------------------|------------|---------------|---------|---------|------|------------|--|
|------------------|------------|---------------|---------|---------|------|------------|--|

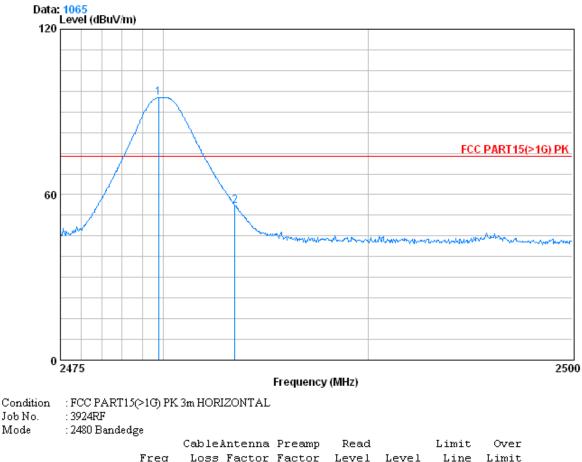


|          | rred                 | L022 | ractor | ractor | Pever | rever  | LINE   | LIMIC |
|----------|----------------------|------|--------|--------|-------|--------|--------|-------|
|          | MHz                  | dB   | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |
| 1 X<br>2 | 2479.775<br>2483.500 |      |        |        |       |        |        |       |



Report No.: SZEM130700392401 Page: 75 of 76

| Worse case mode: | GFSK (DH5) | Test channel: | Highest | Remark: | Average | Vertical |
|------------------|------------|---------------|---------|---------|---------|----------|
|------------------|------------|---------------|---------|---------|---------|----------|

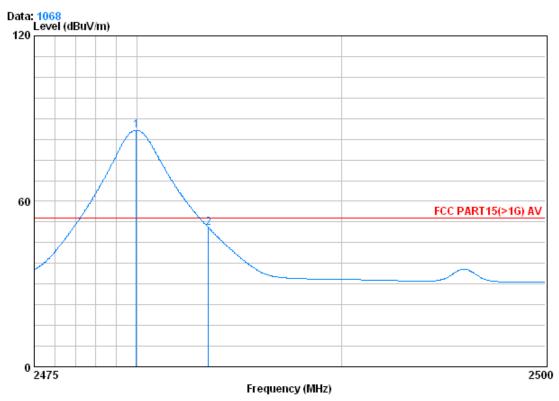

Condition : FCC PART15(>1G) AV 3m VERTICAL Job No. : 3924RF


JOUNO. : 3924RF Mode : 2480 Bandedge

|         | Freq                 |    |      | Preamp<br>Factor |      |        | Limit<br>Line  | Over<br>Limit |
|---------|----------------------|----|------|------------------|------|--------|----------------|---------------|
|         | MHz                  | dB | dB/m | dB               | dBuV | dBuV/m | dBuV/m         | dB            |
| 10<br>2 | 2479.975<br>2483.500 |    |      |                  |      |        | 54.00<br>54.00 |               |



Report No.: SZEM130700392401 Page: 76 of 76

| Worse case mode: | GFSK (DH5) | Test channel: | Highest | Remark: | Average | Horizontal |
|------------------|------------|---------------|---------|---------|---------|------------|
|------------------|------------|---------------|---------|---------|---------|------------|

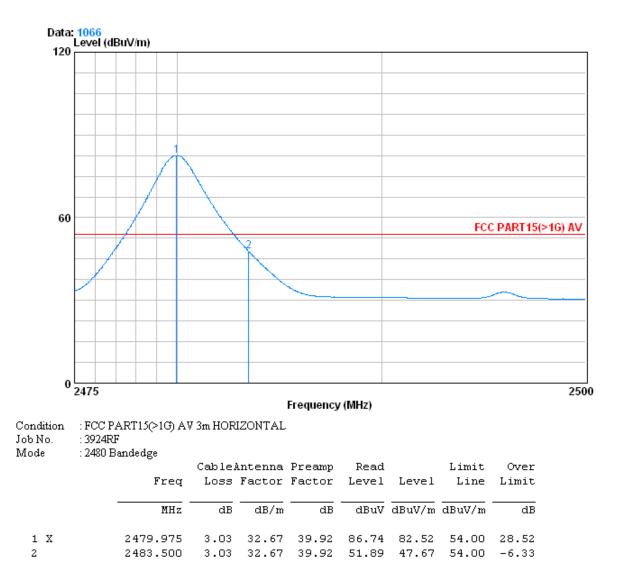

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor