



Informe de ensayo nº:
 Test report No:

NIE: 54008REM.002A3

Test report (Modification 3)

FCC Rules and Regulations CFR 47, Part 15, Subpart B (10-1-16 Edition)
 &
 ICES-003 ISSUE 6 (January 2016, updated April 2017)

Identificación del objeto ensayado	RF transceiver / Mast-mounted Base Station
Identification of item tested	
Marca	PowerTrunk
Trademark	
Modelo y/o referencia tipo	MBS Unit -1
Model and /or type reference	
Otra identificación del producto	Product code: D148101PT S/N: 915849 (MBS Unit -1 with DC power supply)
Other identification of the product	
Versión final del HW	CCP: 00.11.12.10
Final HW version	
Versión final del SW	CCP: 00.11.12.10
Final SW version	
FCC ID	WT7PTMBS450B
IC	8624A-PTMBS450B
Características	See page 4
Features	
Fabricante	TELTRONIC S.A.U. Polígono Malpica, C/F Oeste 50016 Zaragoza, SPAIN
Manufacturer	
Método de ensayo solicitado, norma	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition); ICES-003 ISSUE 6 (January 2016, updated April 2017) & ANSI C63.4 (2014)
Test method requested, standard	
Resultado	IN COMPLIANCE
Summary	
Aprobado por (nombre / cargo y firma)	Rafael López EMC Lab Manager
Approved by (name / position & signature)	
Fecha de realización	2019-02-14
Date of issue	
Formato de informe No.	FDT11_20
Report template No	

Index

Competences and guarantees.....	3
General conditions.....	3
Usage of samples.....	4
Test sample description.....	4
Identification of the client.....	5
Testing period.....	5
Environmental conditions.....	6
Modifications to the reference test report.....	7
Remarks and comments.....	7
Testing verdicts (Legend).....	7
List of equipment used during the test.....	7

Competences and guarantees

DEKRA Testing and Certification, S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification, S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification, S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification, S.A.U. at the time of performance of the test.

DEKRA Testing and Certification, S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification, S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification, S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification, S.A.U. internal document PODT000.

Usage of samples

Samples under test have been selected by: the Client.

Sample S/01 is composed of the following elements:

Control N°	Description	Model	Code	Serial number	Reception date
54008B/002	RF Transceiver / Mast-mounted Base Station 425-470MHz with DC power supply	MBS Unit -1	D148101PT	915849	2017-09-01
54008B/003	Ethernet cable	---	---	---	2017-09-01
54008B/004	POE/ETH cable	---	---	---	2017-09-01
54008B/005	POE cable	---	---	---	2017-09-01
54008B/006	SYNC cable	---	---	---	2017-09-01
54008B/007	DIV cable	---	---	---	2017-09-01
54008B/008	Power cable	---	---	---	2017-09-01

Test sample description

The MBS Unit is a TETRA and TI D-LMR single-carrier module (digital RF transceiver) that has been designed for indoor or outdoor installation in different locations such as walls, towers or masts. Up to two MBS Units can be interconnected to deploy a full-featured Mast-mounted Base Station (MBS). It can be either DC or AC power-supplied. The MBS Unit -1 operates and provides an RF output power of 10 W in the frequency bands 425-430 MHz and 450-470 MHz.

Power Supply:

MBS Unit -1 with DC power supply:

- Nominal voltage: 24 VDC
- Operational voltage range: [21.6 - 31.2 VDC]

Access scheme:

TDMA with 4 physical channels (time slots) per RF channel.

Modulation scheme:

$\pi/4$ -DQPSK with a modulation rate of 18 Ksym/s, equivalent to 36 Kbits/s. Based upon it, two digital communication systems are supported:

- TETRA:

Modulation low-pass filter: Square-root raised cosine filter with a roll-off factor of 0.35.

- TI D-LMR:

Modulation low-pass filter: Square-root raised cosine filter with a roll-off factor of 0.2.

RF channel bandwidth (channel spacing):

25 KHz

Spectral efficiency:

One voice & data physical channel with a rate of 9 Kbits/s is allocated a 6.25 KHz equivalent channel bandwidth.

Frequency band:

TX: 425-430 MHz, 450-470 MHz

RX: 425-430 MHz, 450-470 MHz

RF output power (nominal):

TETRA: 40 dBm (10 W)

TI D-LMR: 40 dBm (10 W)

RF authorized bandwidth:

TETRA: 22 KHz

TI D-LMR: 20 KHz

Emission designators:

TETRA: 22K0D7D, 22K0D7E, 22K0D7W

TI D-LMR: 20K0D7D, 20K0D7E, 20K0D7W

Additional features:

Audio low-pass filter (root-raised cosine filter).

Options:

EQUIPMENT	CODE + OPTIONS	SERIAL NUMBER
MBS Unit -1 Vdc.	D148101PT O148018PT O148015PT O148032PT O148016PT O148014PT O148057PT O485002PT	915849

- D148101PT - MBS 425-470 MHz POWERTRUNK-T
- O148018PT - VDC OPTION (power supply: 24 VDC)
- O148015PT - SUBBAND MBS TX450-RX460-BW5 OPTION
- O148032PT - SUBBAND MBS TX453-RX459-BW2 OPTION
- O148016PT - SUBBAND MBS TX455-RX465-BW5 OPTION
- O148014PT - SUBBAND MBS TX465-RX455-BW5 OPTION
- O148057PT - LITE OPTION
- O485002PT - TETRA CARRIER AIR INTERFACE ENCRYPTION OPTION

Note: Four subband options have been considered to cover all test frequencies being required by FCC and ISED, but some more are also available. Only one of them can be chosen for a single MBS Unit to operate in a real in-field application.

Identification of the client

TELTRONIC S.A.U.
Polígono Malpica, C/F Oeste
50016 Zaragoza, SPAIN

Testing period

The performed test started on 2017-09-01 and finished on 2017-09-01.
The tests have been performed at DEKRA Testing and Certification, S.A.U.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 30 % Max. = 60 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

Modifications to the reference test report

It was introduced the following modifications in respect to the test report number 54008REM.002 related with the same samples, in the next clauses and sub-clauses:

By client requirement it was modified some typos in the test report.

By client requirement it was modified the operation mode indicating IDLE and RX mode.

This modification test report cancels and replaces the test reports 54008REM.002; 54008REM.002A1 & 54008REM.002A2.

Remarks and comments

The tests have been performed by the technical personnel: Alberto Parada.

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 1000 MHz is $I = \pm 4,9$ dB for quasi-peak measurements, $I = \pm 4,6$ dB for peak measurements ($k = 2$)

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 1000 MHz to 18 GHz is $I = \pm 2,6$ dB for peaks and average measurements ($k = 2$)

Testing verdicts (Legend)

Not applicable	N/A
Pass	P
Fail	F
Not measured	N/M

List of equipment used during the test

CONTROL NUMBER	DESCRIPTION	MANUFACTURER	MODEL	LAST CALIBRATION	NEXT CALIBRATION
2942	EMI TEST Receiver	ROHDE & SCHWARZ	ESU40	2016-06-14	2017-10-09
4578	Bilog Antenna	ETS LINDGREN	3142E	2017-04-03	2020-04-03
2933	Preamplifier	A.H Systems	PAM-0207	2016-09-19	2017-09-19
4612	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2016-12-19	2019-12-19
3783	Preamplifier	BONN ELEKTRONIK	BLMA 0118-3A	2017-05-03	2018-05-03
4656	Horn Antenna	SCHWARZBECK	BBHA 9170	2017-03-24	2020-03-24
1975	Preamplifier	MITEQ	JS4-12002600-30-5A	2015-10-06	2017-10-06
4570	Thermohigrometer	HW GROUP	HWg-STE	2017-04-25	2018-04-25
4567	Thermohigrometer	HW GROUP	HWg-STE	2017-04-25	2018-04-25
4522	EMC measurement software	ROHDE & SCHWARZ	EMC32 V9.01	---	---

Appendix A – Test result

APPENDIX A CONTENT

DESCRIPTION OF THE OPERATION MODES	10
RADIATED EMISSION, ELECTROMAGNETIC FIELD MEASURE	11

DESCRIPTION OF THE OPERATION MODES

The operation modes described in this paragraph constitute a functionality of the sample under test for itself. The operation modes used by the samples to which the present report refers, are shown in the following table:

OPERATION MODE	DESCRIPTION
OM#01	EUT ON. IDLE & RX mode 450 MHz – 470 MHz. Power Supply: 24 Vdc


RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE

LIMITS:	Product standard:	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition), Secs. 15.109; ICES-003 Issue 6 (January 2016, updated April 2017) & ANSI C63.4 (2014)
	Test standard:	FCC CFR 47, Part 15, Subpart B (10-1-16 Edition), Secs. 15.109; ICES-003 Issue 6 (January 2016, updated April 2017) & ANSI C63.4 (2014)


Limits of interference Class B

The applied limit for radiated emissions, 3 m distance, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-16 Edition), Secs. 15.109 & ICES-003 Issue 6 (January 2016, updated April 2017) in the frequency range 30 MHz to 18 GHz for class B equipments.

Frequency range (MHz)	QP Limit for 3 m		PK Limit for 3 m
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30 to 88	100	40	---
88 to 216	150	43.5	---
216 to 960	200	46	---
Above 960	500	54	74

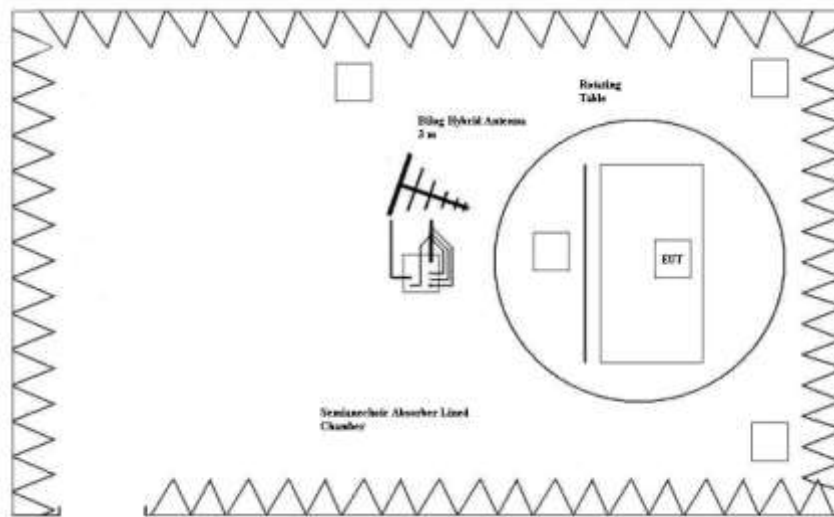

Setup for measurements < 1GHz.

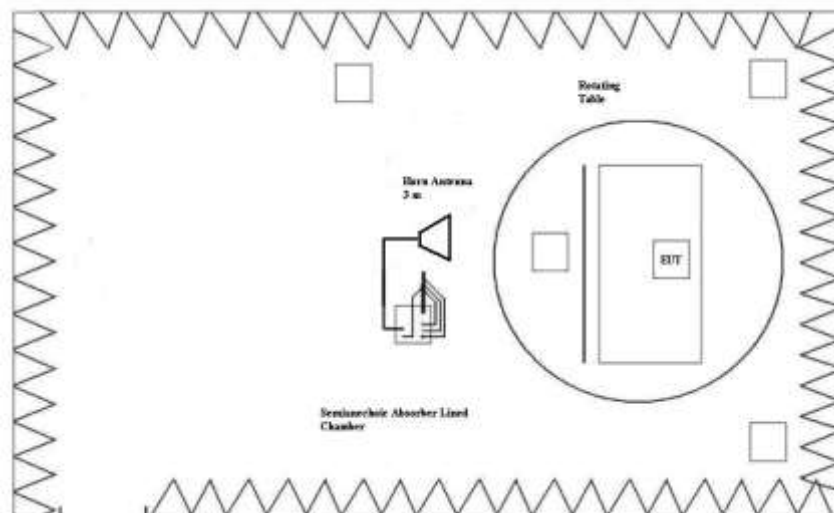


Setup for measurements > 1GHz.

TESTED SAMPLE:	S/01												
TESTED OPERATION MODES:	OM#01												
TEST RESULTS:	CRmmnnRRPP: CR, Radiated Condition; mm: Sample number; nn: Operation mode; RR: Range; PP: Polarization.												
<table border="1"><thead><tr><th>CRmmnnRRPP</th><th>Description</th><th>Result</th></tr></thead><tbody><tr><td>CR0101LR</td><td>Range: 30 MHz - 1000 MHz.</td><td>P</td></tr><tr><td>CR0101HR1_PH</td><td>Range: 1 GHz - 18 GHz. Horizontal Polarization.</td><td>P</td></tr><tr><td>CR0101HR1_PV</td><td>Range: 1 GHz - 18 GHz. Vertical Polarization.</td><td>P</td></tr></tbody></table>		CRmmnnRRPP	Description	Result	CR0101LR	Range: 30 MHz - 1000 MHz.	P	CR0101HR1_PH	Range: 1 GHz - 18 GHz. Horizontal Polarization.	P	CR0101HR1_PV	Range: 1 GHz - 18 GHz. Vertical Polarization.	P
CRmmnnRRPP	Description	Result											
CR0101LR	Range: 30 MHz - 1000 MHz.	P											
CR0101HR1_PH	Range: 1 GHz - 18 GHz. Horizontal Polarization.	P											
CR0101HR1_PV	Range: 1 GHz - 18 GHz. Vertical Polarization.	P											

Radiated Emission. CR0101LR

Project: 54008REM.002
 Company: TELTRONIC S.A.U.
 Sample: S/01
 Operation mode: OM#01
 Description: EUT ON. IDLE & RX mode 450 MHz – 470 MHz. Power supply: 24Vdc.

FCC class B

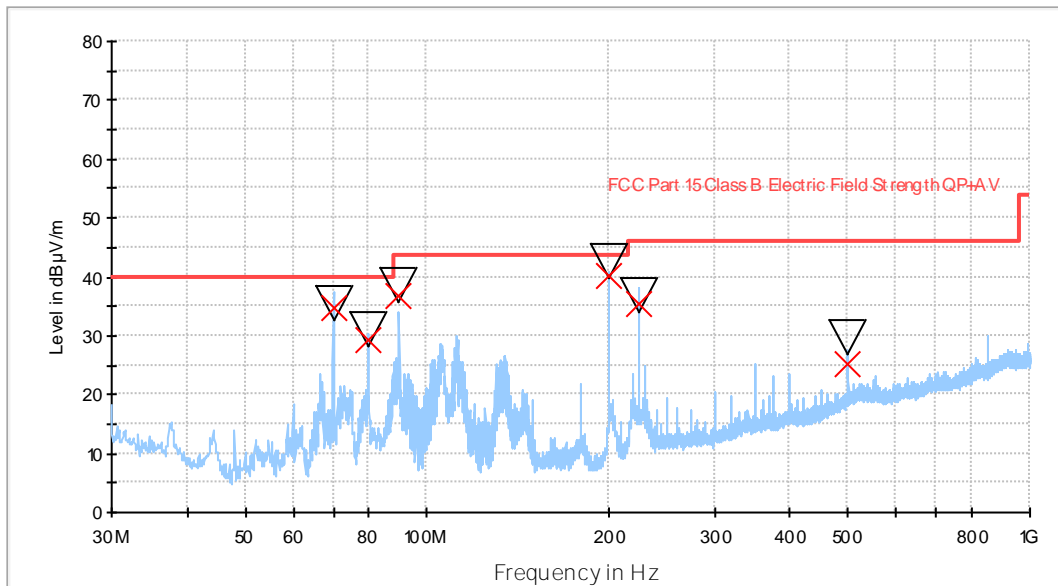

— FCC Part 15 Class B Electric Field Strength QP+AV
— Peak Preview
▽ MaxPeak × QuasiPeak

Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)
69.986974	35.4	34.8	252.0	H	206.0
79.984970	31.1	29.4	106.0	V	163.0
90.001002	38.5	36.6	116.0	V	257.0
200.001002	42.4	40.3	98.0	H	193.0
224.998998	36.7	35.3	144.0	V	267.0
499.992986	29.7	25.3	174.0	V	316.0

