



# FCC PART 90

## TEST AND MEASUREMENT REPORT

For

### Teltronic S.A.U.

Poligono Malpica, Calle F Oeste, Parcela 12,  
50057 Zaragoza, Spain

**FCC ID: WT7PTRNKTBSR75800**

<b>Report Type:</b> CIIPC	<b>Product Type:</b> Digital RF Transceiver
<b>Test Engineer:</b> <u>Wei Sun</u>	<i>Wei Sun</i>
<b>Report Number:</b> <u>R1204244-90</u>	
<b>Report Date:</b> <u>2013-01-22</u>	
<b>Reviewed By:</b> <u>Victor Zhang</u>	<i>Victor Zhang</i>
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”

## TABLE OF CONTENTS

<b>1. General Information.....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
1.2 MECHANICAL DESCRIPTION .....	5
1.3 OBJECTIVE .....	5
1.4 RELATED SUBMITTAL(S)/GRANT(S) .....	6
1.5 TEST METHODOLOGY .....	6
1.6 MEASUREMENT UNCERTAINTY .....	6
1.7 TEST FACILITY .....	6
<b>2 System Test Configuration.....</b>	<b>7</b>
2.1 JUSTIFICATION .....	7
2.2 EUT EXERCISE SOFTWARE .....	7
2.3 EQUIPMENT MODIFICATIONS .....	7
2.4 INTERNAL CONFIGURATION .....	7
2.5 LOCAL SUPPORT EQUIPMENT .....	7
2.6 EXTERNAL I/O CABLING LIST AND DETAILS .....	8
<b>3 Summary of Test Results .....</b>	<b>9</b>
<b>4 FCC §2.1091 - RF Exposure Information .....</b>	<b>10</b>
4.1 APPLICABLE STANDARDS .....	10
4.2 MPE PREDICTION .....	10
4.3 CONCLUSION .....	10
<b>5 FCC §2.1046 &amp; §90.205 – RF Output Power .....</b>	<b>11</b>
5.1 APPLICABLE STANDARD .....	11
5.2 TEST PROCEDURE .....	11
5.3 TEST EQUIPMENT LIST AND DETAILS .....	11
5.4 TEST ENVIRONMENTAL CONDITIONS .....	11
5.5 TEST RESULTS .....	12
<b>6 FCC §2.1047 &amp; §90.207 – Modulation Characteristic.....</b>	<b>13</b>
6.1 APPLICABLE STANDARD .....	13
6.2 TEST PROCEDURE .....	13
6.3 TEST RESULTS .....	13
<b>7 FCC §2.1049, §90.210, §90.209 &amp; §90.691 – Occupied Bandwidth &amp; Emission Mask.....</b>	<b>14</b>
7.1 APPLICABLE STANDARD .....	14
7.2 TEST PROCEDURE .....	17
7.3 TEST EQUIPMENT LIST AND DETAILS .....	17
7.4 TEST ENVIRONMENTAL CONDITIONS .....	17
7.5 TEST RESULTS .....	17
<b>8 FCC §90.210 &amp; §90.221 – Adjacent Channel Power .....</b>	<b>24</b>
8.1 APPLICABLE STANDARD .....	24
8.2 TEST PROCEDURE .....	24
8.3 TEST EQUIPMENT LIST AND DETAILS .....	24
8.4 TEST RESULTS .....	24
<b>9 FCC §2.1051, §90.210 &amp; §90.669 - Spurious Emissions at Antenna Terminals .....</b>	<b>27</b>
9.1 APPLICABLE STANDARD .....	27
9.2 TEST PROCEDURE .....	27
9.3 TEST PROCEDURE .....	27
9.4 TEST EQUIPMENT LIST AND DETAILS .....	27

9.5	TEST ENVIRONMENTAL CONDITIONS .....	27
9.6	TEST RESULTS.....	27
<b>10</b>	<b>FCC §2.1055 &amp; §90.213 - Frequency Stability .....</b>	<b>29</b>
10.1	APPLICABLE STANDARD .....	29
10.2	TEST PROCEDURE.....	30
10.3	TEST RESULTS.....	31
<b>11</b>	<b>FCC §2.1053, §90.210 &amp; §90.669 – Field Strength of Spurious Radiation .....</b>	<b>32</b>
11.1	APPLICABLE STANDARD .....	32
11.2	TEST PROCEDURE.....	32
11.3	TEST EQUIPMENT LIST AND DETAILS .....	32
11.4	TEST ENVIRONMENTAL CONDITIONS .....	32
11.5	TEST RESULTS.....	33
<b>12</b>	<b>Exhibit A - FCC Labeling Requirements .....</b>	<b>34</b>
12.1	FCC ID LABEL REQUIREMENTS .....	34
12.2	FCC ID CONTENTS AND LOCATION .....	34
<b>13</b>	<b>Exhibit B - Test Setup Photographs.....</b>	<b>35</b>
13.1	RADIATED EMISSION BELOW 1 GHZ – FRONT VIEW .....	35
13.2	RADIATED EMISSION BELOW 1 GHZ – REAR VIEW .....	35
13.3	RADIATED EMISSION ABOVE 1 GHZ – FRONT VIEW.....	36
13.4	RADIATED SPURIOUS EMISSION ABOVE 1 GHZ - REAR VIEW .....	36
<b>14</b>	<b>Exhibit C - EUT Photographs .....</b>	<b>37</b>
14.1	EUT – FRONT VIEW .....	37
14.2	EUT – REAR VIEW .....	37
14.3	EUT – TOP VIEW .....	38
14.4	EUT – BOTTOM VIEW .....	38
14.5	EUT BACKPLANE PCB – TOP VIEW.....	39
14.6	EUT BACKPLANE PCB – BOTTOM VIEW .....	39
14.7	EUT BSYNC – FRONT VIEW .....	40
14.8	EUT BSYNC PCB – TOP VIEW .....	40
14.9	EUT BSYNC PCB – BOTTOM VIEW.....	41
14.10	EUT RCPU – TOP VIEW .....	41
14.11	EUT RCPU PCB – TOP VIEW .....	42
14.12	EUT RCPU PCB – BOTTOM VIEW .....	42
14.13	EUT RPA75 – FRONT VIEW.....	43
14.14	EUT RPA75 PCB – TOP VIEW (1) .....	43
14.15	EUT RPA75 PCB – TOP VIEW (2) .....	44
14.16	EUT RPA75 PCB – BOTTOM VIEW .....	44
14.17	EUT INPUT PCB – TOP VIEW (1) .....	45
14.18	EUT INPUT PCB – TOP VIEW (2) .....	45
14.19	EUT INPUT PCB – BOTTOM VIEW .....	46
14.20	EUT OUTPUT PCB – TOP VIEW (1).....	46
14.21	EUT OUTPUT PCB – TOP VIEW (2).....	47
14.22	EUT OUTPUT PCB – BOTTOM VIEW (1) .....	47
14.23	EUT OPEN CASE VIEW .....	48
14.24	EUT RPS75 – FRONT VIEW .....	48
14.25	EUT RPS75 PCB – TOP VIEW .....	49
14.26	EUT RPS75 PCB – BOTTOM VIEW .....	49
14.27	EUT RRX – FRONT VIEW .....	50
14.28	EUT RRX PCB – TOP VIEW (1).....	50
14.29	EUT RRX PCB – TOP VIEW (2).....	51
14.30	EUT RRX PCB – BOTTOM VIEW.....	51
14.31	EUT RTX 75 – FRONT VIEW.....	52
14.32	EUT RTX 75 PCB – TOP VIEW (1) .....	52
14.33	EUT RTX 75 PCB – TOP VIEW (2) .....	53
14.34	EUT RTX 75 PCB – BOTTOM VIEW (1).....	53
14.35	EUT RTX 75 PCB – BOTTOM VIEW (2).....	53

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R1204244-90	Original Report	2013-01-22

## 1. General Information

### 1.1 Product Description for Equipment under Test (EUT)

This test and measurement report was prepared on behalf of *TeltronicS.A.U.* and their product, FCC ID: WT7PTRNKTBSR75800, model: BSR75 -N, which will henceforth be referred to as the EUT (Equipment Under Test). The EUT is a Digital RF Transceiver.

Specifications	
Frequency Band (FCC pt 90)	851-854 MHz, 854-869 MHz
Modulation Type	$\pi/4$ -DQPSK
Emission Designator	20K0D7W, 20K0D7E, 20K0D7D 22K0D7W, 22K0D7E, 22K0D7D
RF Output Power	Low: 0.6 Watts High: 75 Watts
Channel Spacing	25 kHz
Necessary/Authorized Bandwidth	20 kHz, 22 kHz
Power Supply	AC, DC

TDMA access scheme with 4 physical channels per carrier. The channel bandwidth is 25 KHz. As a result, the equipment meets the narrowbanding spectrum efficiency standard of one voice channel per 6.25 KHz of channel bandwidth. Modulation is  $\pi/4$ -DQPSK with 18 Ksym/sec. This modulation is based on transmitting two bits per symbol, so the data rate for each physical channel is 9000 bits per second (higher than narrowbanding standard of 4800 bps per 6.25 KHz of channel bandwidth).

### 1.2 Mechanical Description

The EUT measures approximately 43cm (L) x 34cm (W) x 13cm (H) and weighs 10887 g.

*The data gathered are from a production sample provided by the manufacturer, serial number: 828448.*

### 1.3 Objective

This type approval report is prepared on behalf of *Teltronic S.A.U.* in accordance with Part 22 and Part 90 of the Federal Communication Commissions rules.

This is class II permissive change report is based on the new mode adding with no hardware change, only 25KHz Channel Spacing 22KHz Bandwidth Mode was added with the s/w modification.

This test and measurement report only pertains to the new Mode: 25KHz Channel Spacing 22KHz Bandwidth.

The objective was to determine the RF output power, Occupied Bandwidth and Emission Masks, conducted and Radaited Spurious Emissions, Frequency Stability, Modulation Characteristic and Adjacent Channel Power are in compliance with the FCC rules.

## 1.4 Related Submittal(s)/Grant(s)

FCC ID: WT7PTRNKTBSR75800.

## 1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA603-C and ANSI 63.4-2003, American National Standard for Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed by Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2003, The Treatment of Uncertainty in EMC Measurements, the values ranging from  $\pm 2.0$  dB for Conducted Emissions tests and  $\pm 4.0$  dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

## 1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The EUT was tested in the normal (native) operating mode to represent *worst*-case results during the final qualification test.

### 2.2 EUT Exercise Software

The software used was HyperTerminal.

### 2.3 Equipment Modifications

No modifications were made to the EUT.

### 2.4 Internal Configuration

Manufacturer	Description	Model No	Serial No.
Teltronic, S.A.U.	Repeater Power Supply 75W (RPS75)	PE138059PT	-
Teltronic, S.A.U.	Repeater Power Amplifier 75W (RPA75)	PE138N19PT	-
Teltronic, S.A.U.	Repeater Transmitter 75W (RTX75)	PE138N18PT	-
Teltronic, S.A.U.	Repeater Receiver (RRX)	PE138N40PT	-
Teltronic, S.A.U.	BSR75 Synchronism (BSYNC)	PE138051PT	-
Teltronic, S.A.U.	Repeater Control Processing Unit (RCPU)	PE138020PT	-
Teltronic, S.A.U.	Rack BSR75	D485009PT	-

### 2.5 Local Support Equipment

Manufacturer	Description	Model No.	Serial No.
Dell	Laptop	PP05L	7T390 A02
Electronic Measurements Inc.	TCR power supply	TCR 80S34-2-0V	92D-6839

## 2.6 External I/O Cabling List and Details

Cable Description	Length (m)	From	To
Maintenance cable (only used when setting up EUT)	<1.0	Laptop Serial port	EUT Maintenance Port
Power Supply Cable	>1.0	Power Supply	EUT
Ethernet Cable<1.0EUT Ethernet PortEUT Ethernet PortEthernet Cable>1.0EUT Ethernet PortEUT Ethernet PortEthernet Cable	<1.0	EUT Ethernet Port	EUT Ethernet Port
Power Supply Cable	>1.0	Power Supply	EUT



### 3 Summary of Test Results

FCC Rules	Description of Tests	Results
§1.1310, §2.1091	RF Exposure	Compliant
§2.1046, §90.205	RF Output Power	Compliant
§2.1047, §90.207	Modulation Characteristics	Compliant
§2.1049, §90.209 §90.210, §90.691	Occupied Bandwidth and Emission Mask	Compliant
§2.1051, §90.210	Spurious Emissions at Antenna Terminals	Compliant
§2.1055, §90.213	Frequency Stability	Compliant
§2.1053, §90.210	Field Strength of Spurious Radiation	Compliant
§90.210, §90.221	Adjacent Channel Power	Compliant <sup>1</sup>
§90.214	Transient Frequency Behavior	N/A

*Note 1: This test was completed by Teltronic with test report D138N010PT\_REPO16ed0200\_ACP\_FCC\_12-114  
N/A: Not applicable.*

## 4 FCC §2.1091 - RF Exposure Information

### 4.1 Applicable Standards

FCC §2.1091, (a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

*f* = frequency in MHz, \* = Plane-wave equivalent power density

### 4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: *S* = power density

*P* = power input to antenna

*G* = power gain of the antenna in the direction of interest relative to an isotropic radiator

*R* = distance to the center of radiation of the antenna

25 kHz Channel Spacing, 22 kHz Bandwidth

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>48.75</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>74990</u>
<u>Prediction distance (cm):</u>	<u>200</u>
<u>Prediction frequency (MHz):</u>	<u>868.975</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>20</u>
<u>Coax cable loss taken (dB):</u>	<u>2.0</u>
<u>Duty Cycle:</u>	<u>25%</u>
<u>Maximum Antenna Net Gain (numeric):</u>	<u>63.1</u>
<u>Power density of prediction frequency at 200 cm (mW/cm<sup>2</sup>):</u>	<u>2.35</u>
<u>MPE limit for Controlled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>2.897</u>

### 4.3 Conclusion

The device complies with the MPE requirements by providing a safe separation distance of at least 2 m between the antenna with maximum 20 dBi gain, including any radiating structure, and any persons when normally operated.

## 5 FCC §2.1046 & §90.205 – RF Output Power

### 5.1 Applicable Standard

According to FCC §2.1046 and §90.205, 806-824 and 851-869 MHz. Power and antenna height limitations are specified in §90.635.

§90.635 Limitations on power and antenna height.

(a) The effective radiated power and antenna height for base stations may not exceed 1 kilowatt (30 dBw) and 304 m. (1,000 ft.) above average terrain (AAT), respectively, or the equivalent thereof as determined from the Table. These are maximum values, and applicants will be required to justify power levels and antenna heights requested.

(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

### 5.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

### 5.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09	2 years

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

### 5.4 Test Environmental Conditions

<b>Temperature:</b>	21 °C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.8 kPa

*The testing was performed by Wei Sun on 2012-05-15 on the RF Site.*

## 5.5 Test Results

Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth

Rated Power Setting (Watt)	Channel	Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
High (75 Watts)	Lower Edge	854.0125	48.74	74.82
	Low	854.025	48.71	74.30
	Middle	862.025	48.69	73.96
	High	868.975	48.75	74.99
	Higher Edge	868.9875	48.72	74.47
Low (0.6 Watt)	Lower Edge	854.0125	27.42	0.55
	Low	854.025	27.45	0.56
	Middle	862.025	27.61	0.58
	High	868.975	27.83	0.61
	Higher Edge	868.9875	27.61	0.58

## 6 FCC §2.1047 & §90.207 – Modulation Characteristic

### 6.1 Applicable Standard

FCC §2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

### 6.2 Test Procedure

ETSI EN 300 394-1 clause 10.1

### 6.3 Test Results

Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth

Temperature (°C)	Vdc (V)	Frequency (MHz)	Result (%)	Limit (%)
15°C - 35 °C	26.4	851.0125	2.4	10
		862.0.25	2.5	10
		868.9875	2.7	10
60 °C	26.4	851.0125	3.1	10
		862.0.25	3.2	10
		868.9875	3.5	10
-30 °C	26.4	851.0125	4.3	10
		862.0.25	4.6	10
		868.9875	4.5	10

Note: Testing was done by Denny Soto & Alfonso Perez from Teltronic.

## 7 FCC §2.1049, §90.210, §90.209 & §90.691 – Occupied Bandwidth & Emission Mask

### 7.1 Applicable Standard

#### §90.209 Bandwidth Limitation

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

(b) The maximum authorized single channel bandwidth of emission corresponding to the type of emission specified in §90.207 is as follows:

- (1) For A1A or A1B emissions, the maximum authorized bandwidth is 0.25 kHz. The maximum authorized bandwidth for type A3E emission is 8 kHz.
- (2) For operations below 25 MHz utilizing J3E emission, the bandwidth occupied by the emission shall not exceed 3000 Hz. The assigned frequency will be specified in the authorization. The authorized carrier frequency will be 1400 Hz lower in frequency than the assigned frequency. Only upper sideband emission may be used. In the case of regularly available double sideband radiotelephone channels, an assigned frequency for J3E emissions is available either 1600 Hz below or 1400 Hz above the double sideband radiotelephone assigned frequency.
- (3) For all other types of emissions, the maximum authorized bandwidth shall not be more than that normally authorized for voice operations.
- (4) Where a frequency is assigned exclusively to a single licensee, more than a single emission may be used within the authorized bandwidth. In such cases, the frequency stability requirements of §90.213 must be met for each emission.
- (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table.

**Standard Channel Spacing/Bandwidth**

Frequency Band (MHz)	Channel Spacing (kHz)	Authorized Bandwidth (kHz)
Below 25 <sup>2</sup>		
25-50	20	20
72-76	20	20
150-174	<sup>1</sup> 7.5	<sup>1,3</sup> 20/11.25/6
216-220 <sup>5</sup>	6.25	20/11.25/6
220-222	5	4
406-512 <sup>2</sup>	<sup>1</sup> 6.25	<sup>1,3</sup> 20/11.25/6
806-809/851-854	12.5	20
809-824/854-869 <sup>3</sup>	25	20
896-901/935-940	12.5	13.6
902-928		
929-930	25	20
1427-1432 <sup>5</sup>	12.5	12.5
<sup>3</sup> 2450-2483.5 <sup>2</sup>		
Above 2500 <sup>2</sup>		

1 For stations authorized on or after August 18, 1995.

2 Bandwidths for radiolocation stations in the 420–450 MHz band and for stations operating in bands subject to this footnote will be reviewed and authorized on a case-by-case basis.

3 Operations using equipment designed to operate with a 25 kHz channel bandwidth will be authorized a 20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized a 11.25 kHz bandwidth. Operations using equipment designed to operate with a 6.25 kHz channel bandwidth will be authorized a 6 kHz bandwidth. All stations must operate on channels with a bandwidth of 12.5 kHz or less beginning January 1, 2013, unless the operations meet the efficiency standard of §90.203(j)(3).

4 The maximum authorized bandwidth shall be 12 MHz for non-multilateration LMS operations in the band 909.75–921.75 MHz and 2 MHz in the band 902.00–904.00 MHz. The maximum authorized bandwidth for multilateration LMS operations shall be 5.75 MHz in the 904.00–909.75 MHz band; 2 MHz in the 919.75–921.75 MHz band; 5.75 MHz in the 921.75–927.25 MHz band and its associated 927.25–927.50 MHz narrowband forward link; and 8.00 MHz if the 919.75–921.75 MHz and 921.75–927.25 MHz bands and their associated 927.25–927.50 MHz and 927.50–927.75 MHz narrowband forward links are aggregated.

5 See §90.259.

(6)(i) Beginning January 1, 2011, no new applications for the 150–174 MHz and/or 421–512 MHz bands will be acceptable for filing if the applicant utilizes channels with an authorized bandwidth exceeding 11.25 kHz, unless specified elsewhere or the operations meet the efficiency standards of §90.203(j)(3).

(ii) Beginning January 1, 2011, no modification applications for stations in the 150–174 MHz and/or 421–512 MHz bands that increase the station's authorized interference contour, will be acceptable for filing if the applicant utilizes channels with an authorized bandwidth exceeding 11.25 kHz, unless specified elsewhere or the operations meet the efficiency standards of §90.203(j)(3). See §90.187(b)(2)(iii) and (iv) for interference contour designations and calculations. Applications submitted pursuant to this paragraph must comply with frequency coordination requirements of §90.175.

[60 FR 37263, July 19, 1995, as amended at 67 FR 41860, June 20, 2002; 68 FR 42314, July 17, 2003; 68 FR 54769, Sept. 18, 2003; 69 FR 39867, July 1, 2004; 69 FR 67837, Nov. 22, 2004; 70 FR 21661, Apr. 27, 2005; 70 FR 34693, June 15, 2005; 72 FR 35194, June 27, 2007; 73 FR 34201, June 17, 2008]

## §90.210 Emission Masks

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

Frequency Band (MHz)	Mask Equipment with Audio Low Pass Filter	Mask Equipment without Audio Low Pass Filter
Below 25 <sup>1</sup>	A or B	A or C
25-50	B	C
72-76	B	C
150-174	B,D,or E	C,D, or E
150 Paging Only	B	C
220-222	F	F
421-512 <sup>2</sup>	B,D, or E	C,D, or E
450 Paging Only	B	G
806-809/851-854	B	H
809-824/854-869 <sup>3</sup>	B	G
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990	L or M	L or M
5850-5950 <sup>4</sup>		
All other bands	B	C

## §90.691 Emission Masks Requirements for EA-based systems

a) Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.



## 7.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band  $\pm 50$  KHz from the carrier frequency.

## 7.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09	2 years

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

## 7.4 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	60 %
<b>ATM Pressure:</b>	101.6 kPa


*The testing was performed by Wei Sun on 2012-05-16 on the RF Site.*

## 7.5 Test Results


Please refer to the following plots.

### Occupied Bandwidth


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 0.6 Watt, Low Channel

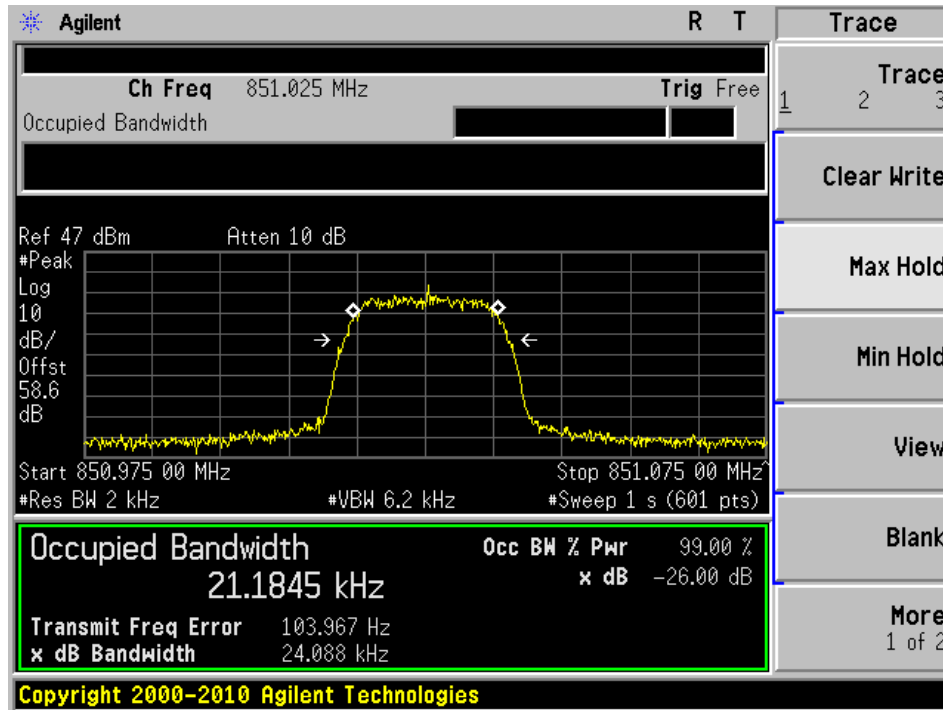


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 0.6 Watt, Middle Channel

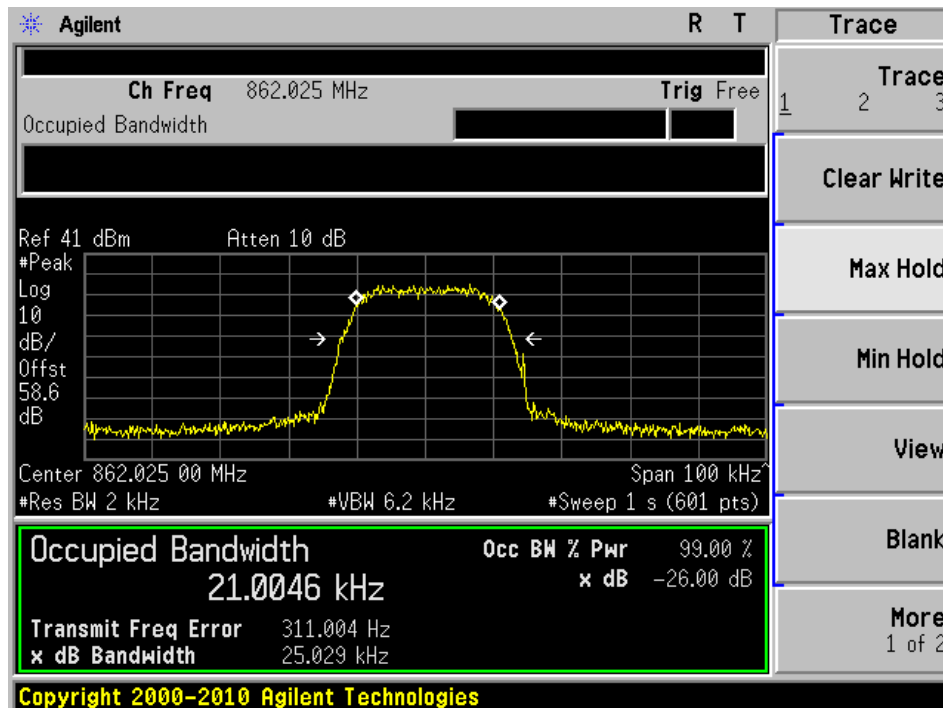


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 0.6 Watt, High Channel

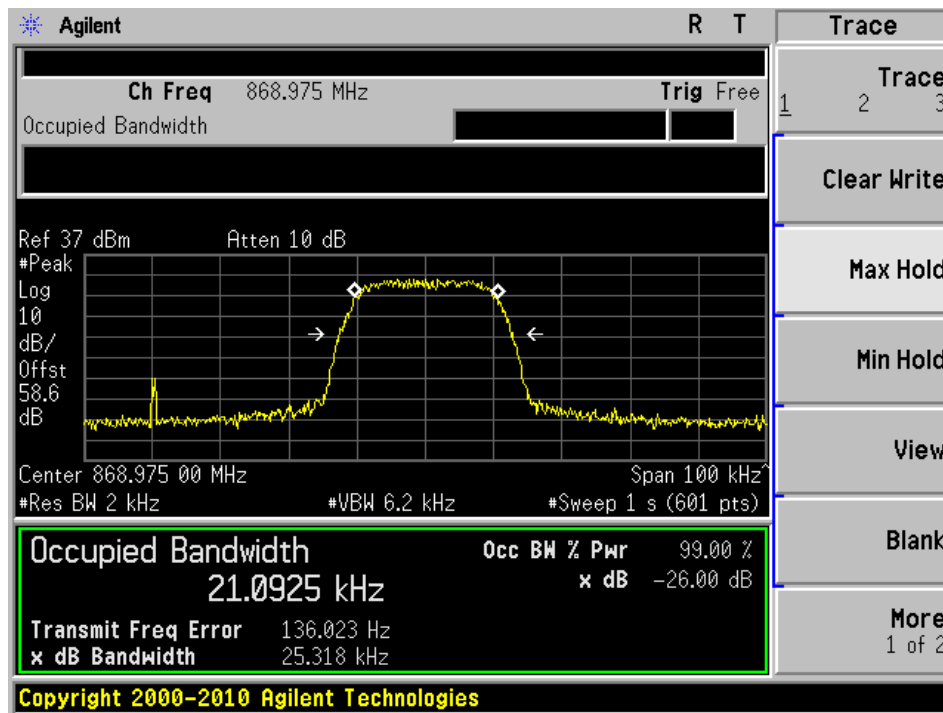


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, Low Channel

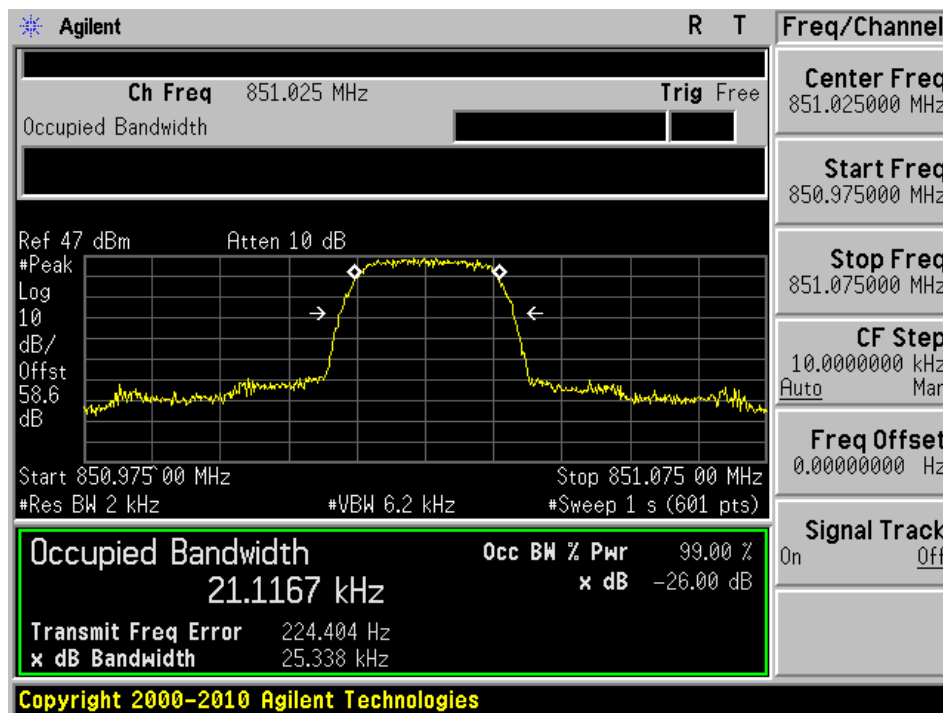

Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, Middle Channel

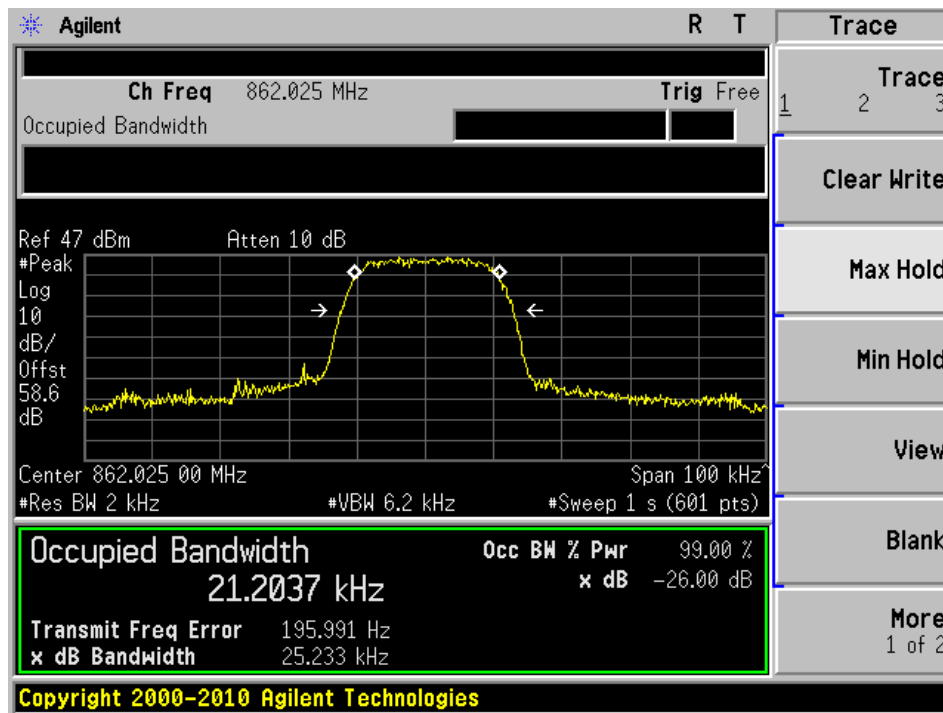


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, High Channel

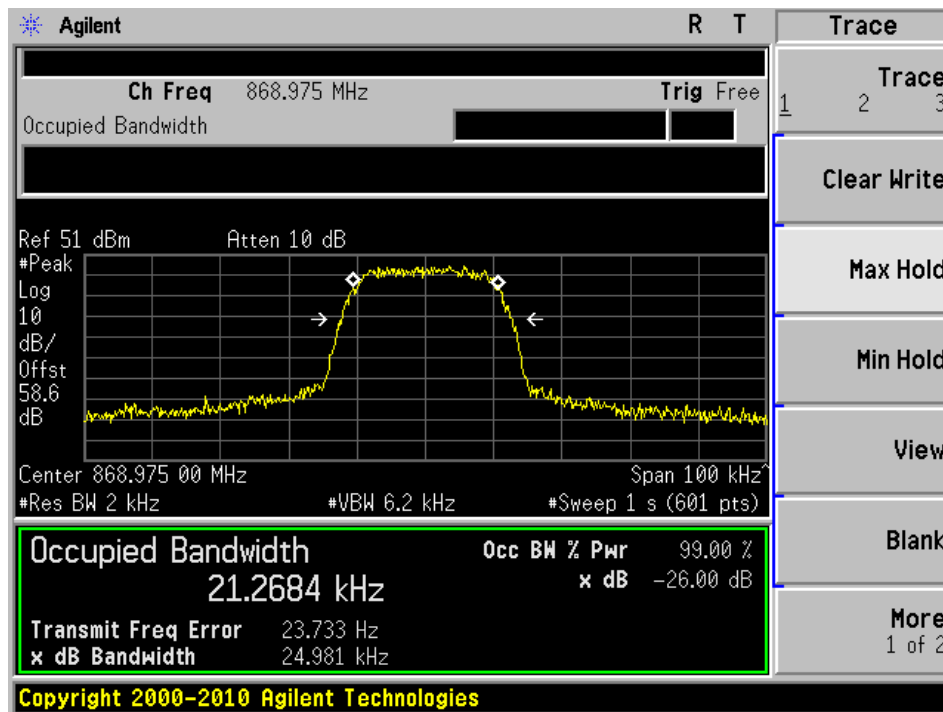


### Response of Audio Frequency Low Pass filter

22 kHz Bandwidth Modulation

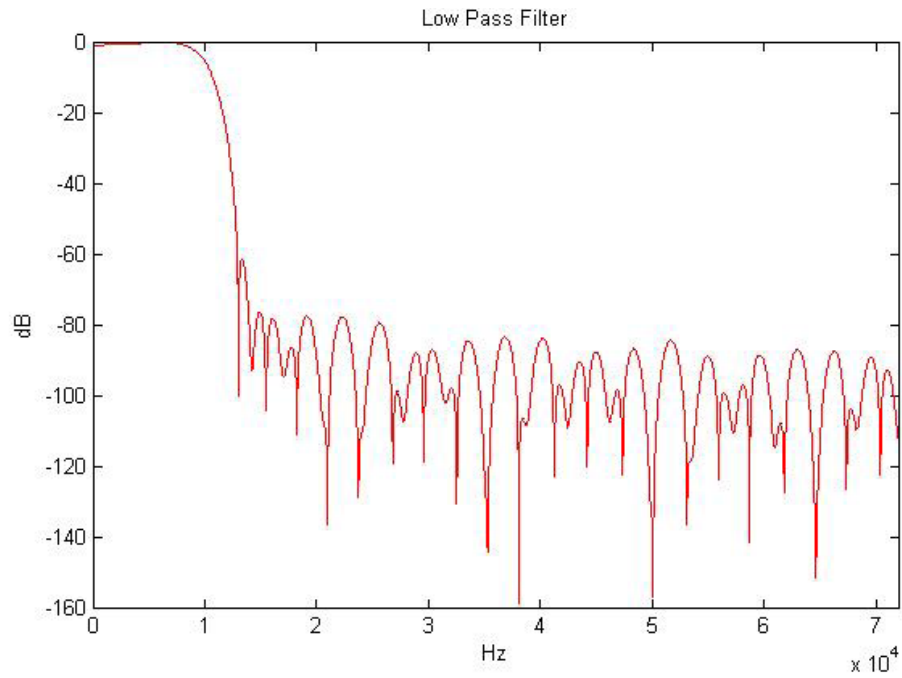


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 0.6 Watt, Low Outer Channel

**Emission Mask EA (Low Channel = 851.0125 MHz)**

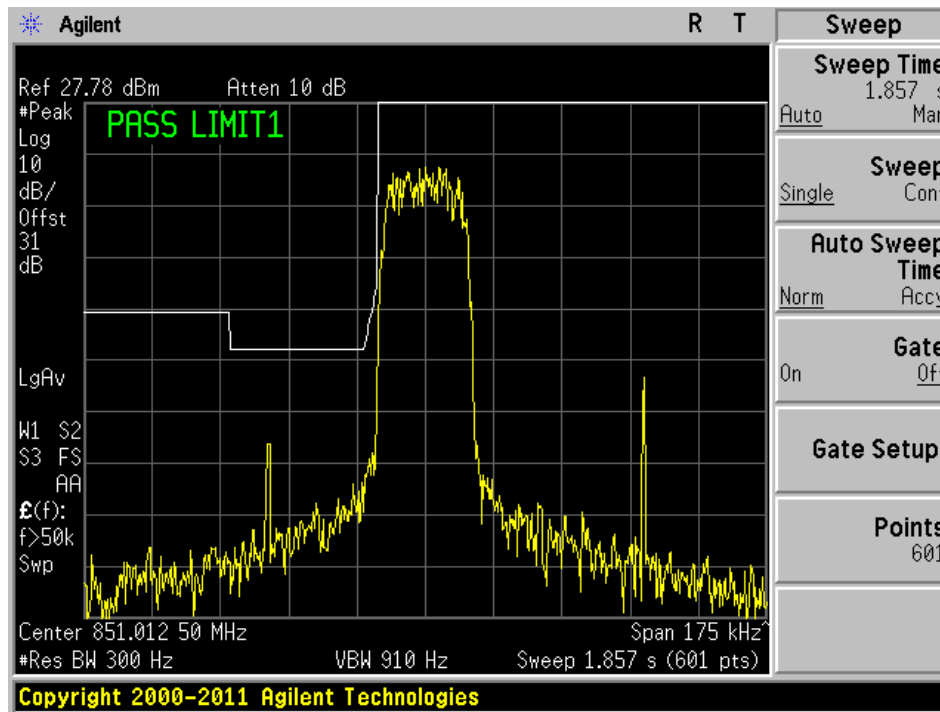


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 0.6 Watt, High Outer Channel

**Emission Mask EA (High Outer Channel = 868.9875 MHz)**

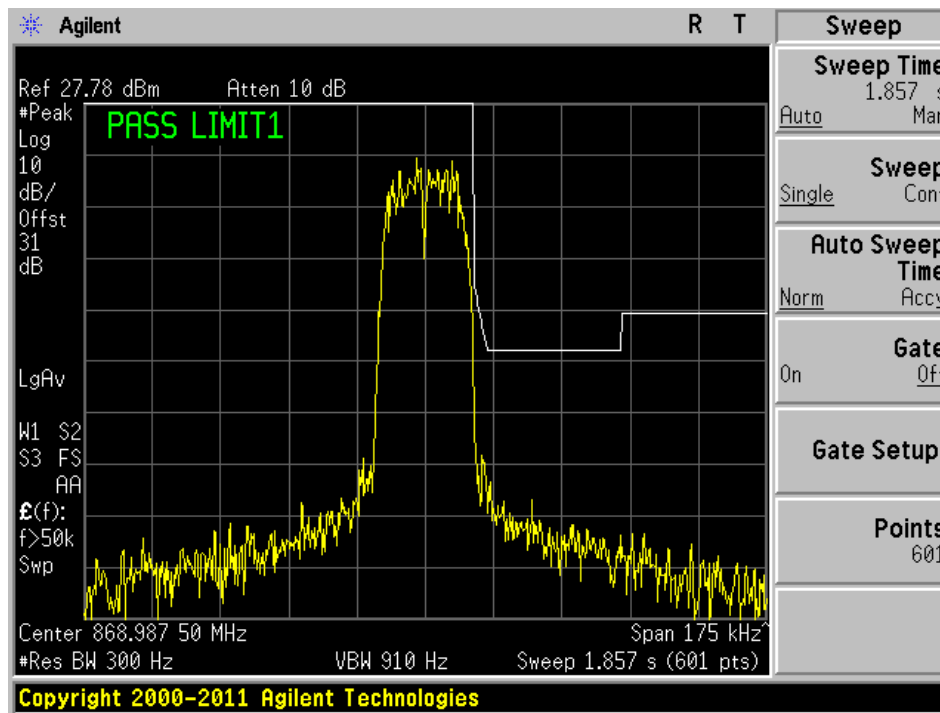


Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, Low Outer Channel

**Emission Mask EA (Low Outer Channel = 851.0125 MHz)**

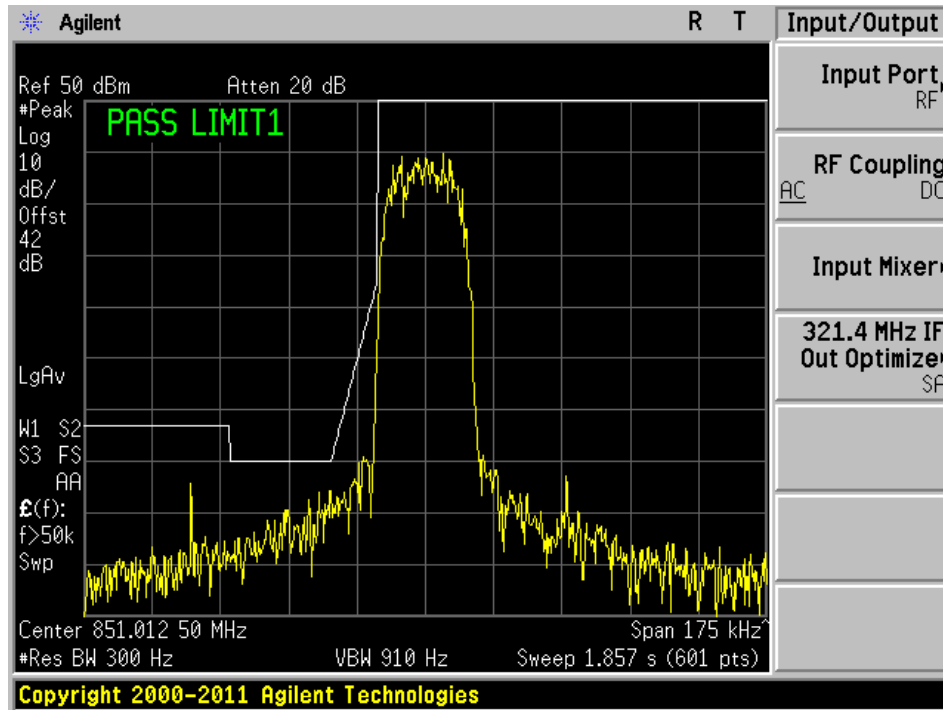

Test Mode: 25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, High Outer Channel

**Emission Mask EA (High Outer Channel = 868.9875 MHz)**

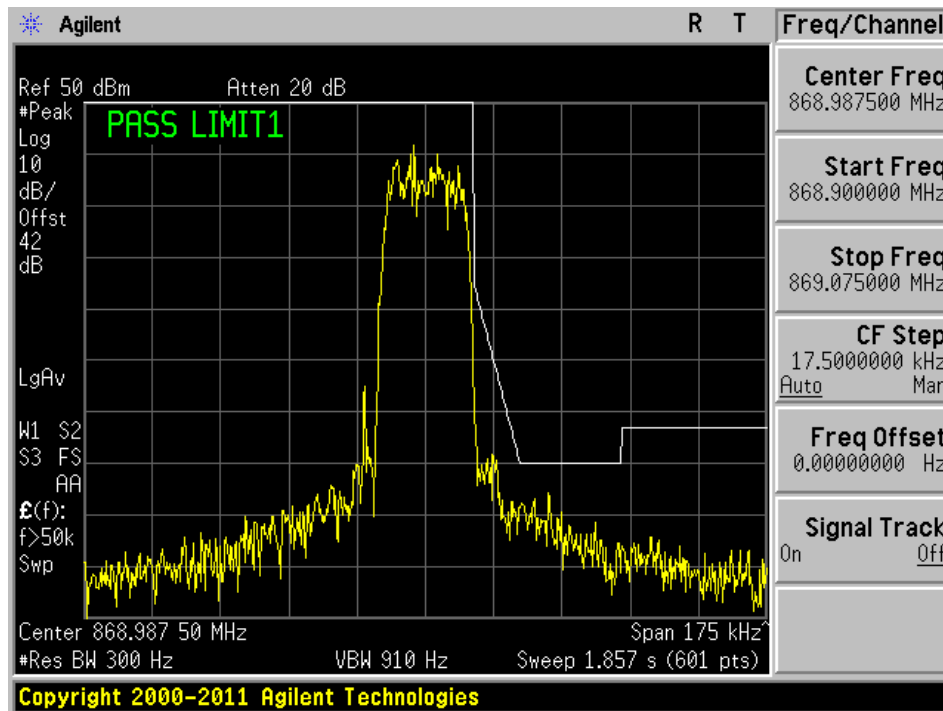

## 8 FCC §90.210 & §90.221 – Adjacent Channel Power

### 8.1 Applicable Standard

According to FCC Report and Order (FCC 12-114) adopted on Sept 19, 2012.

As per FCC Part 90.221,

(a) For the frequency bands indicated below, operations using equipment designed to operate with a 25 kHz channel bandwidth may be authorized up to a 22 kHz bandwidth if the equipment meets the adjacent channel power (ACP) limits below. The table specifies a value for the ACP as a function of the displacement from the channel center frequency and a measurement bandwidth of 18 kHz.

(c)(1) Maximum adjacent power levels for frequencies in the 809-824/854-869 MHz band:

Frequency offset	Maximum ACP (dBc) for devices less than 15 watts	Maximum ACP (dBc) for devices 15 watts and above
25 kHz	-55 dBc	-55 dBc
50 kHz	-65 dBc	-65 dBc
75 kHz	-65 dBc	-70 dBc

(2) In any case, no requirement in excess of -36 dBm shall apply.

(d) On any frequency removed from the assigned frequency by more than 75 kHz, the attenuation of any emission must be at least  $43 + 10 \log(P_{\text{watts}})$  dB.

### 8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 8.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent Technologies	PXA Signal Analyzer	N9030A	MY49430122	24-03-2012
BIRD	30 dB Attenuator 300W	300-WA-FFN-30	0902	N/A


### 8.4 Test Results

Please refer to the following table and plots.




ADJACENT CHANNEL POWER					
48,75 dBm (75 W)	Low Channel	Middle Channel	High Channel	Limit	
	854,0125 MHz	861,5 MHz	868,9875 MHz		
- 75 kHz	-77.38	-77.61	-77.26	-70	dBc
- 50 kHz	-71.99	-71.91	-72.01	-65	dBc
- 25 kHz	-59.89	-60.15	-60.49	-55	dBc
+ 25 kHz	-60.25	-61.62	-62.02	-55	dBc
+ 50 kHz	-71.99	-72.11	-71.91	-65	dBc
+ 75 kHz	-76.77	-77.90	-77.48	-70	dBc


High Power, Low Channel 854.0125 MHz

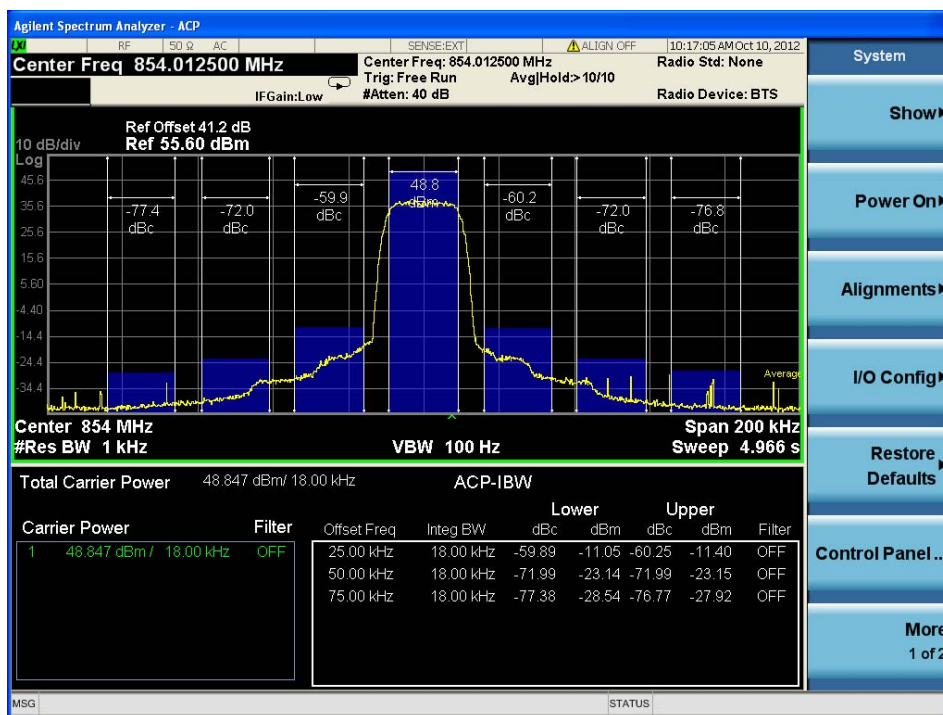

### High Power, Middle Channel 861.5 MHz

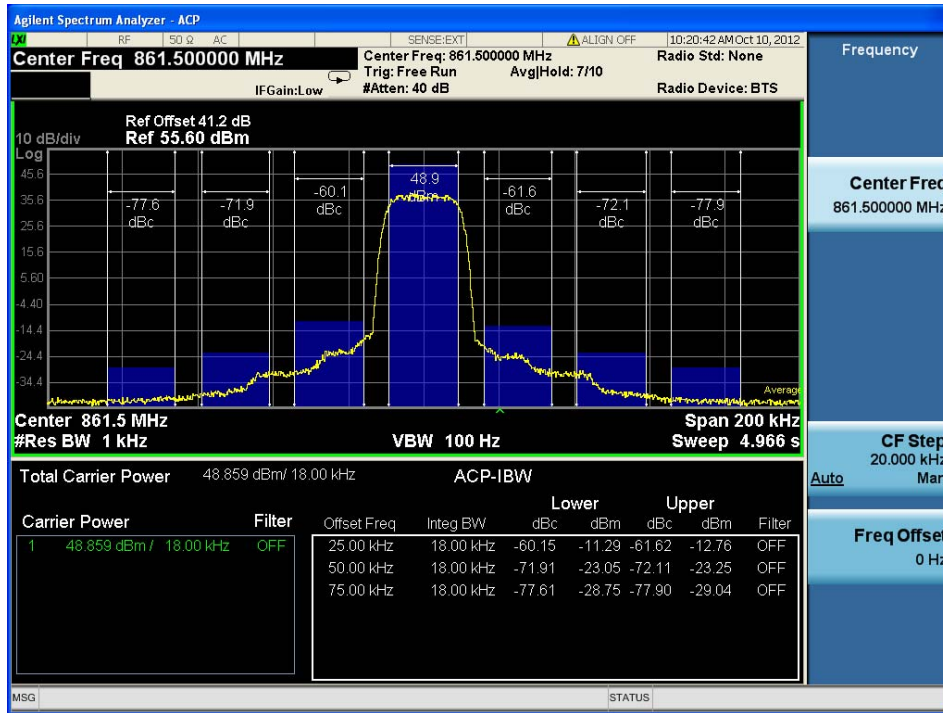

### High Power, High Channel 868.9875 MHz

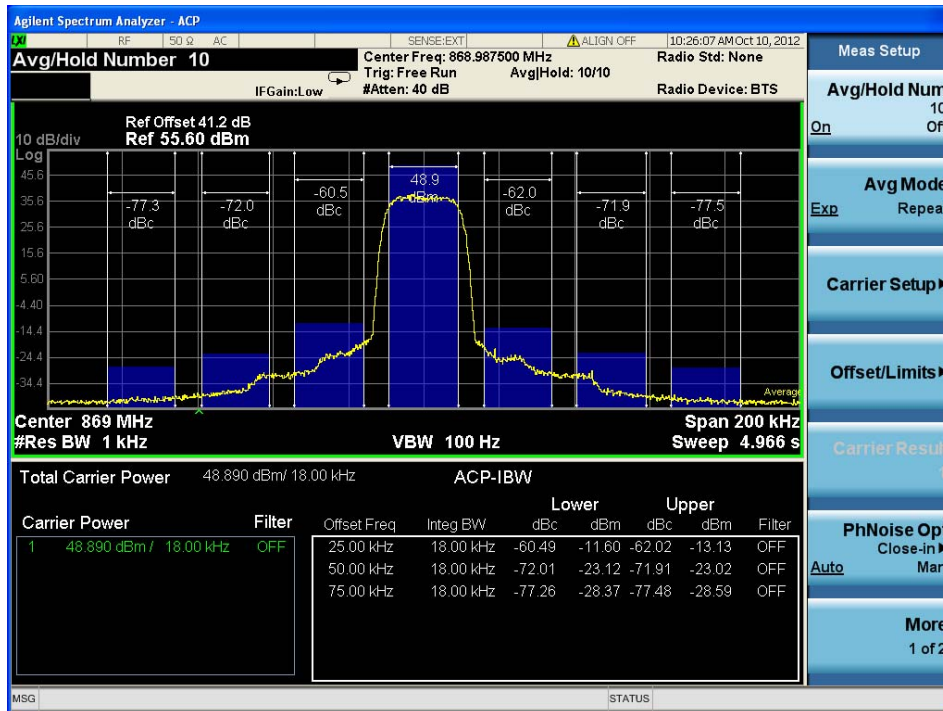

## 9 FCC §2.1051, §90.210 & §90.669 - Spurious Emissions at Antenna Terminals

### 9.1 Applicable Standard

FCC Part 90.210, 90.669

### 9.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 9.3 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### 9.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09	2 years

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

### 9.5 Test Environmental Conditions


Temperature:	22 °C
Relative Humidity:	60 %
ATM Pressure:	101.6 kPa

*The testing was performed by Wei Sun on 2012-05-23 on the RF Site.*


### 9.6 Test Results

Please refer to the following plots.

25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, Middle Channel  
30 MHz – 1GHz

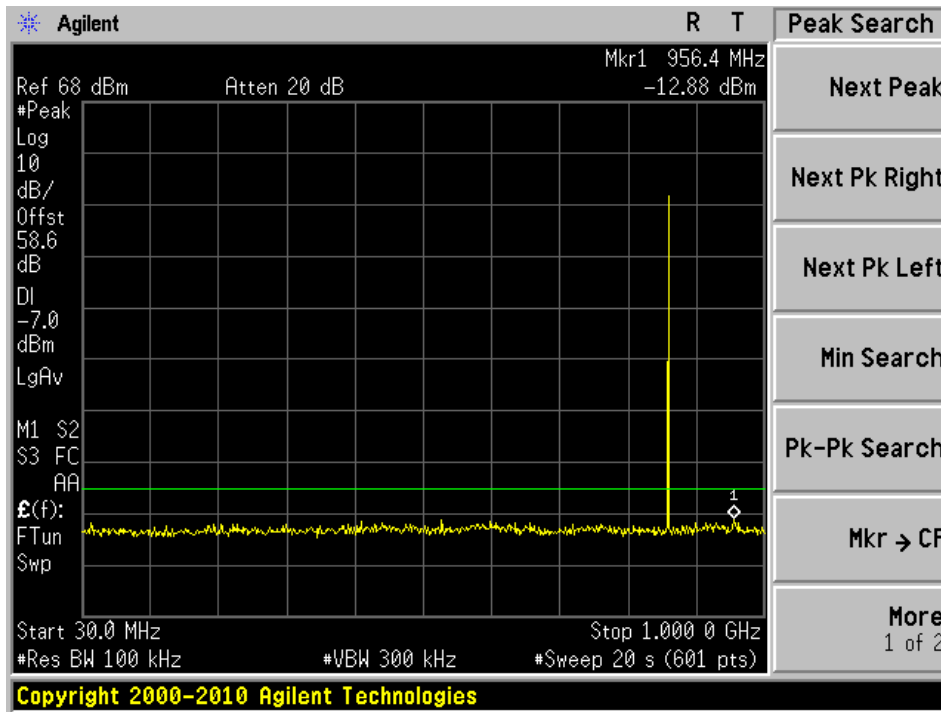

1 – 9 GHz

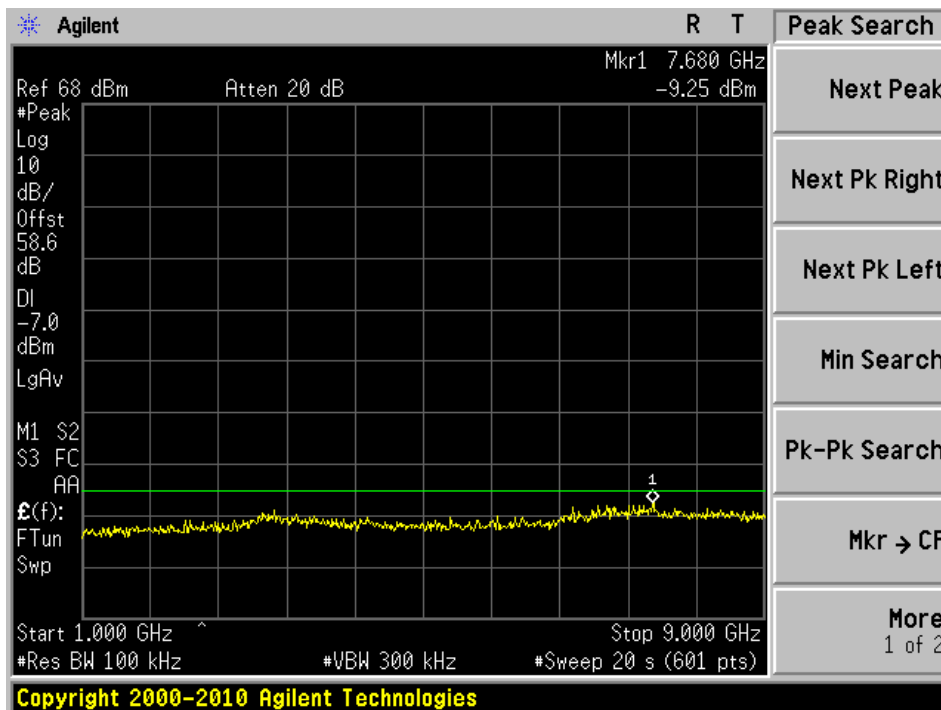

## 10 FCC §2.1055 & §90.213 - Frequency Stability

### 10.1 Applicable Standard

As per FCC §90.213 Frequency Stability

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have minimum frequency stability as specified in the following table.

#### Minimumus Frequency Stability

[Parts per Million (ppm)]

Frequency Range (MHz)	Fixed and Based Stations	Mobile Stations	
		Over 2 watts output power	2 watts or less output power
Below 25	<sup>1,2,3</sup> 100	100	200
25-50	20	20	50
72-76	5		50
150-174	<sup>5,11</sup> 5	<sup>6</sup> 5	<sup>4,6</sup> 50
216-220	1.0		1.0
220-222 <sup>12</sup>	0.1	1.5	1.5
421-512	<sup>7,11,14</sup> 2.5	<sup>8</sup> 5	<sup>8</sup> 5
806-809	<sup>14</sup> 1.0	1.5	1.5
809-824	<sup>14</sup> 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	<sup>14</sup> 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 <sup>13</sup>	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	<sup>9</sup> 300	300	300
Above 2450 <sup>10</sup>			

<sup>1</sup>Fixed and base stations with over 200 watts transmitter power must have a frequency stability of 50 ppm except for equipment used in the Public Safety Pool where the frequency stability is 100 ppm.

<sup>2</sup>For single sideband operations below 25 MHz, the carrier frequency must be maintained within 50 Hz of the authorized carrier frequency.

<sup>3</sup>Travelers information station transmitters operating from 530–1700 kHz and transmitters exceeding 200 watts peak envelope power used for disaster communications and long distance circuit operations pursuant to §§90.242 and 90.264 must maintain the carrier frequency to within 20 Hz of the authorized frequency.

<sup>4</sup>Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.

- <sup>5</sup>In the 150–174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- <sup>6</sup>In the 150–174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.
- <sup>7</sup>In the 421–512 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 1.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 0.5 ppm.
- <sup>8</sup>In the 421–512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.
- <sup>9</sup>Fixed stations with output powers above 120 watts and necessary bandwidth less than 3 kHz must operate with a frequency stability of 100 ppm. Fixed stations with output powers less than 120 watts and using time-division multiplex, must operate with a frequency stability of 500 ppm.
- <sup>10</sup>Except for DSRCS equipment in the 5850–5925 MHz band, frequency stability is to be specified in the station authorization. Frequency stability for DSRCS equipment in the 5850–5925 MHz band is specified in subpart M of this part.
- <sup>11</sup>Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150–174 MHz band and 2.5 ppm in the 421–512 MHz band.
- <sup>12</sup>Mobile units may utilize synchronizing signals from associated base stations to achieve the specified carrier stability.
- <sup>13</sup>Fixed non-multilateration transmitters with an authorized bandwidth that is more than 40 kHz from the band edge, intermittently operated hand-held readers, and mobile transponders are not subject to frequency tolerance restrictions.
- <sup>14</sup>Control stations may operate with the frequency tolerance specified for associated mobile frequencies.
- (b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated output power as specified by the manufacturer.

## 10.2 Test Procedure

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to the Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

**Frequency Stability vs. Voltage:** An external variable DC power supply Source. The voltage was set to 115% and 85% of the nominal value. The output frequency was recorded for each voltage.

**10.3 Test Results**

25 kHz Channel Spacing, 22 kHz Bandwidth

Test Condition		Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vdc)	Temperature (°C)			
20.4	15°C - 35 °C	854.025	-0.052	1.0
24		862.025	-0.052	1.0
27.6		868.975	-0.051	1.0
24	60 °C	854.025	-0.053	1.0
24	-30 °C	868.975	-0.050	1.0

*Note: Testing was done by Denny Soto & Alfonso Perez from Teltronic.*

## 11 FCC §2.1053, §90.210 & §90.669 – Field Strength of Spurious Radiation

### 11.1 Applicable Standard

FCC Part 90.210, Part 90.669

### 11.2 Test Procedure

The transmitter was placed on Styrofoam on the turntable, and it was normal transmitting with 50ohm termination which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 11.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	-
Sunol Science Corp	Combination Antenna	JB3	A020106-2	2011-08-10	1 year
EMCO	Horn Antenna	3115	9511-4627	2011-10-03	1 year
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2011-06-09	1 year
A.R.A	Horn antenna	DRG-118/A	1132	2012-01-04	1 year
HP	Signal Generator	83650B	3614A00276	2010-06-21	2 years
Mini-Circuits	Pre-amplifier	ZVA-183-S	667400960	2011-08-10	1 year
Agilent	Spectrum Analyzer	E4440A	US42221851	2012-02-28	1 year

**Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed according to A2LA requirements, traceable to the NIST.

### 11.4 Test Environmental Conditions

<b>Temperature:</b>	21 °C
<b>Relative Humidity:</b>	40 %
<b>ATM Pressure:</b>	101.6 kPa

*The testing was performed by Wei Sun on 2012-05-26 in 5 meters chamber 3.*



**11.5 Test Results**

25 kHz Channel Spacing, 22 kHz Bandwidth, Rated Power Setting: 75 Watts, Middle Channel

Indicated		Turntable Azimuth Degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)		Height (cm)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Ant Cord. (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
192	47.39	172	155	V	192	-69.67	0	0.59	-70.26	-13	-49.26
192	46.06	84	202	H	192	-74.96	0	0.59	-75.55	-13	-54.55
1724	60.21	211	155	V	1724	-59.93	9.38	2.21	-52.76	-13	-31.76
1724	59.84	198	155	H	1724	-60	9.38	2.21	-52.83	-13	-31.83