



FCC PART 90
IC RSS-119, ISSUE 11, JUNE 2011
TEST AND MEASUREMENT REPORT
 For
Teltronic S.A.U.

Poligono Malpica, Calle F Oeste, Parcela 12,
 50057 Zaragoza, Spain

FCC ID: WT7PTRNKTMB410
IC: 8624A-PTMBS410
Model: MBS Unit 409-430MHz

Report Type: Original Report	Product Type: Power Trunk
Test Engineer: <u>Ning Ma</u> <i>NM</i>	
Report Number: <u>R1110131-90</u>	
Report Date: <u>2012-01-04</u>	
Reviewed By: <u>EMC/RF Lead</u> <i>Victor Zhang</i>	
Prepared By: <u>Bay Area Compliance Laboratories Corp.</u> (RZ) 1274 Anvilwood Avenue, Sunnyvale, CA 94085, U.S.A. Tel: (408) 732-9162 Fax: (408) 732 9164 www.baclcorp.com	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" ...

TABLE OF CONTENTS

1. General Information.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	6
1.2 MECHANICAL DESCRIPTION	6
1.3 OBJECTIVE.....	6
1.4 RELATED SUBMITTAL(S)/GRANT(S)	6
1.5 TEST METHODOLOGY	7
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST FACILITY	7
2 System Test Configuration.....	8
2.1 JUSTIFICATION.....	8
2.2 EQUIPMENT MODIFICATIONS	8
2.3 LOCAL SUPPORT EQUIPMENT	8
2.4 INTERNAL CONFIGURATION.....	8
2.5 INTERFACE PORTS AND CABLING	8
2.6 TEST SETUP BLOCK DIAGRAM.....	9
3 Summary of Test Results	10
4 FCC §2.1091 & IC RSS-102 - RF Exposure Information	11
4.1 APPLICABLE STANDARDS	11
5 FCC §2.1046, §90.205 & IC RSS-119 §5.4 – Conducted Output Power	14
5.1 APPLICABLE STANDARD	14
5.2 TEST PROCEDURE	14
5.3 TEST ENVIRONMENTAL CONDITIONS.....	14
5.4 TEST EQUIPMENT LIST AND DETAILS	14
5.5 TEST RESULT.....	14
6 FCC §2.1047, §90.207 & IC RSS-119 §5.2 – Modulation Characteristic.....	15
6.1 APPLICABLE STANDARD	15
6.2 TEST PROCEDURE	15
6.3 TEST RESULT.....	15
7 FCC §2.1049, §90.209, §90.210 & IC RSS-119 §5.8 – Occupied Bandwidth & Emission Mask.....	17
7.1 APPLICABLE STANDARD.....	17
7.2 TEST PROCEDURE	18
7.3 TEST ENVIRONMENTAL CONDITIONS.....	18
7.4 TEST EQUIPMENT LIST AND DETAILS	19
7.5 TEST RESULT.....	19
8 FCC §2.1051, §90.210 & IC RSS-119 §5.8 - Spurious Emissions at Antenna Terminals	21
8.1 APPLICABLE STANDARD	21
8.2 TEST PROCEDURE	21
8.3 TEST ENVIRONMENTAL CONDITIONS.....	21
8.4 TEST EQUIPMENT LIST AND DETAILS	21
8.5 TEST RESULTS	21
9 FCC §2.1055 (d), §90.213 & IC RSS-119 §5.3 - Frequency Stability	24
9.1 APPLICABLE STANDARD.....	24
9.2 TEST PROCEDURE	26
9.3 TEST ENVIRONMENTAL CONDITIONS.....	26
9.4 TEST EQUIPMENT LIST AND DETAILS	26

9.5	TEST RESULT	27
10	FCC §2.1053, §90.210 & IC RSS-119 §5.8 – Field Strength of Spurious Radiation	28
10.1	APPLICABLE STANDARD	28
10.2	TEST PROCEDURE	28
10.3	TEST ENVIRONMENTAL CONDITIONS	28
10.4	TEST EQUIPMENT LIST AND DETAILS	29
10.5	TEST RESULT	29
11	FCC §90.214 & IC RSS-119 §5.9 - Transient Frequency Behavior	30
11.1	APPLICABLE STANDARD	30
11.2	TEST PROCEDURE	31
11.3	TEST SETUP BLOCK DIAGRAM	31
11.4	TEST ENVIRONMENTAL CONDITIONS	31
11.5	TEST EQUIPMENT LIST AND DETAILS	31
11.6	TEST RESULTS	31
12	IC RSS-119 §5.11 & IC RSS-310 §3.1 - Receiver Spurious Radiated Emissions	33
12.1	APPLICABLE STANDARD	33
12.2	TEST BLOCK DIAGRAM	33
12.3	TEST EQUIPMENT LISTS AND DETAILS	34
12.4	TEST ENVIRONMENTAL CONDITIONS	34
12.5	TEST PROCEDURE	34
12.6	CORRECTED AMPLITUDE & MARGIN CALCULATION	34
12.7	SUMMARY OF TEST RESULTS	35
12.8	RADIATED SPURIOUS EMISSIONS PLOT & DATA	36
13	EXHIBIT A - FCC ID & IC Labeling Requirements	38
13.1	FCC ID LABEL REQUIREMENT	38
13.2	IC LABELING REQUIREMENTS	38
13.3	FCC AND IC LABEL CONTENT	39
13.4	FCC ID AND IC LABEL LOCATION ON EUT	39
14	EXHIBIT B - Test Setup Photographs	40
14.1	RADIATED EMISSION – FRONT VIEW	40
14.2	RADIATED EMISSION BELOW 1 GHZ – REAR VIEW	40
14.3	RADIATED EMISSION ABOVE 1 GHZ – REAR VIEW	41
14.4	FREQUENCY STABILITY TEST VIEW	41
14.5	RECEIVER RADIATED EMISSION – FRONT VIEW	42
14.6	RECEIVER RADIATED EMISSION BELOW 1 GHZ – REAR VIEW	42
14.7	RECEIVER RADIATED EMISSION ABOVE 1 GHZ – REAR VIEW	43
15	EXHIBIT C - EUT Photographs	44
15.1	EUT FRONT VIEW	44
15.2	EUT REAR VIEW	44
	EUT SIDE VIEW - 1	45
15.3	45
15.4	EUT SIDE VIEW - 2	45
	EUT TOP VIEW	46
15.5	46
15.6	EUT BOTTOM VIEW	46
15.7	EUT- OPEN CASE VIEW 1	47
15.8	EUT- OPEN CASE VIEW 2	47
15.9	EUT- BACK PLANE PCB TOP VIEW	48
15.10	EUT- BACK PLANE PCB BOTTOM VIEW	48
15.11	EUT - ENCRYPTION PCB TOP VIEW	48
15.12	EUT - ENCRYPTION PCB BOTTOM VIEW	49
15.13	EUT-MINI PCB TOP VIEW	49
15.14	EUT- MINI PCB BOTTOM VIEW	49

15.15	EUT-MULTICOUPLER PCB TOP VIEW	50
15.16	EUT- MULTICOUPLER PCB BOTTOM VIEW	50
15.17	EUT- RCPU PCB TOP VIEW	51
15.18	EUT- RCPU PCB BOTTOM VIEW	51
15.19	EUT- RPA PCB TOP VIEW	51
15.20	EUT- RPA PCB BOTTOM VIEW	52
15.21	EUT- RRX PCB TOP VIEW	52
15.22	EUT- RRX PCB BOTTOM VIEW	52
15.23	EUT- RTX PCB TOP VIEW	53
15.24	EUT-RTX PCB BOTTOM VIEW	53
15.25	EUT- SWITCH PCB TOP VIEW	53
15.26	EUT-SWITCH PCB BOTTOM VIEW	54

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
2	R1110131-90	Updated Report	2012-01-04

1. General Information

1.1 Product Description for Equipment under Test (EUT)

The report has been prepared on behalf of Teltronic S.A.U. and their product FCC ID: WT7PTRNKTMB410, IC: 8624A-PTMBS410, model: MBS Unit 409-430 MHz. The EUT is a 409-430 MHz Transceiver that operates under FCC Part 90 and IC RSS-119.

Specifications	
Frequency Band	409-430 MHz
Emission designator	20K0D7W, 20K0D7E, 20K0D7D
Modulation	$\pi/4$ -DQPSK
RF Output Power	12.36 Watts
RF Channel Spacing	25 kHz (Spectrum Efficiency 6.25 kHz) ^{Note 1}
Necessary/Authorized Bandwidth	20 kHz
Power Supply	110/220 VAC (90-264 VAC), 50/60 Hz.

Note 1: TETRA access scheme is TDMA with 4 physical channels per carrier. The channel bandwidth is 25 kHz. As a result, the equipment meets a spectrum efficiency standard of one voice channel per 6.25 kHz of channel bandwidth. Modulation is $\pi/4$ -DQPSK with 18 Ksym/sec. This modulation is based on transmitting two bits per symbol, so the data rate on each sub-carrier is 9000 bits/sec (higher than 4800 bits per second per 6.25 kHz of channel bandwidth).

1.2 Mechanical Description

The EUT measures approximately 68cm (L) x 27.8cm (W) x 37cm (H) and weighs 28 kg.

The test data gathered are from production sample. Serial number: R1110131-1 provided by the BACL.

1.3 Objective

This Type approval report is prepared on behalf of *Teltronic S.A.U.* in accordance with Part 90 of the Federal Communication Commissions rules, Industry Canada RSS-119 Issue 11, June 2011.

1.4 Related Submittal(s)/Grant(s)

N/A

1.5 Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

And IC RSS-119, Issue 11, June 2011- Land Mobile and Fixed Radio Transmitters and Receivers Operating in the Frequency Range 27.41-960 MHz.

Applicable Standards: TIA603-C and ANSI 63.4-2003, American National Standard for Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed by Bay Area Compliance Laboratories Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

Detailed instrumentation measurement uncertainties can be found in BACL Corp. report QAP-018.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: C-2463 and R-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2001670.htm>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA/EIA-603-C.

The EUT was tested in the normal (native) operating mode to represent *worst*-case results during the final qualification test.

2.2 Equipment Modifications

No modifications were made to the EUT.

2.3 Local Support Equipment

Manufacturer	Description	Model	Serial Number
IBM	Laptop	T3	-

2.4 Internal Configuration


Manufacturer	Description	Model No.	Serial No.
Teltronic S.A.U.	Repeater Control Processing Unit (RCPU)	PE148021	-
XPOWER	Power Supply	ACC400PS24L	-
Teltronic S.A.U.	Backplane	PE485022	-
Teltronic S.A.U.	Repeater Power Amplifier (RPA)	E148711	
Teltronic S.A.U.	Multicoupler	E480000	
Teltronic S.A.U.	Repeater Transmitter (RTX)	PE148710	
Teltronic S.A.U.	Repeater Receiver (RRX)	PE148740	

2.5 Interface Ports and Cabling


Cable Description	Length (m)	From	To
Ethernet cables	1.0	EUT	EUT
Ethernet cable	1.0	EUT	Laptop
RF coaxial cable	1.0	EUT	EUT
RF coaxial cable	1.0	EUT	PSA

2.6 Test Setup Block Diagram

Radiated Test

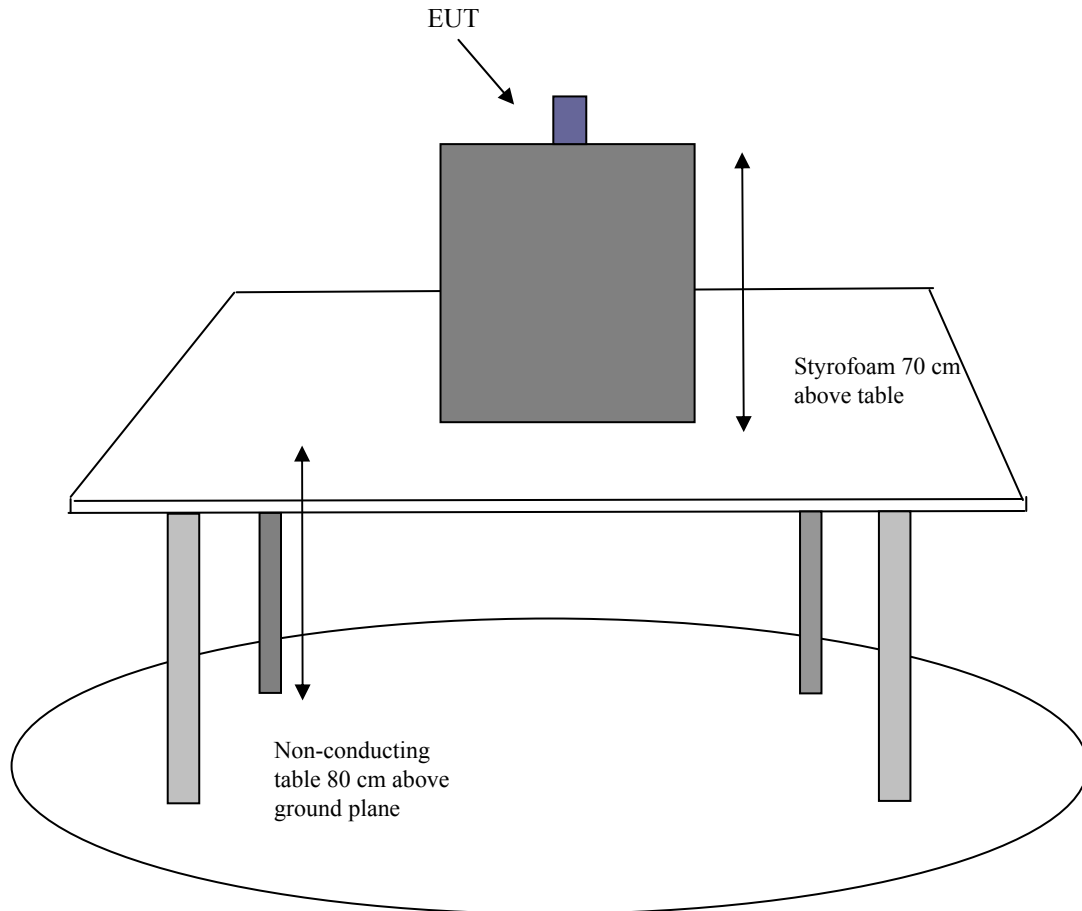

Conducted Test

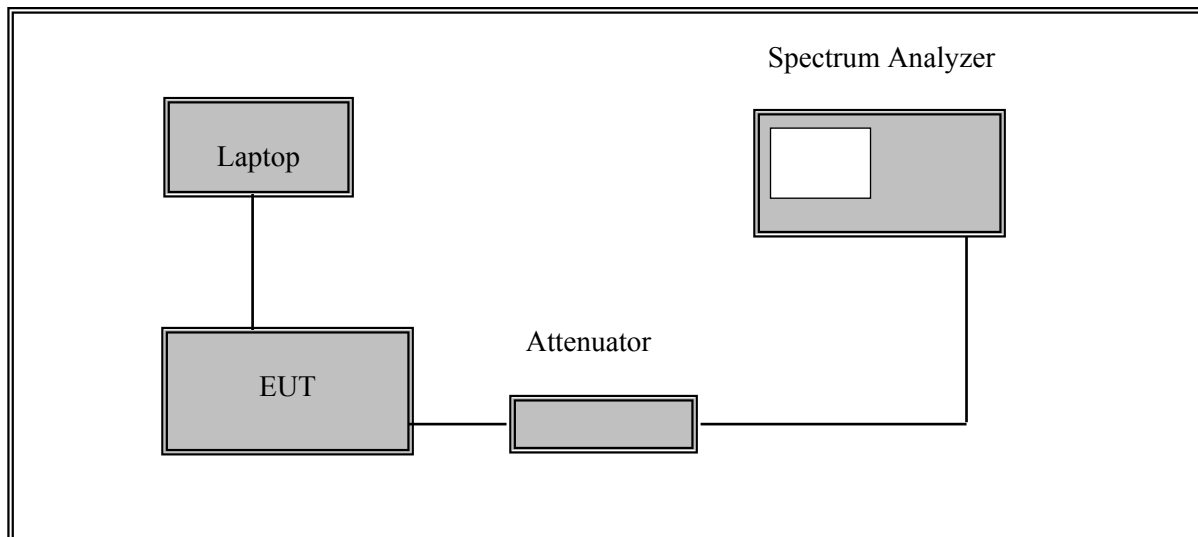

3 Summary of Test Results

FCC and IC Rules	Description of Test	Result
FCC§1.1310, §2.1091 IC RSS-102	RF Exposure	Compliant
FCC§2.1046, §90.205 IC RSS-119 §5.4	RF Output Power	Compliant
FCC§2.1047, §90.207 IC RSS-119 §5.2	Modulation Characteristics, Audio Frequency Response and Audio Filter Response	Compliant
FCC §2.1049, §90.210 IC RSS-119 §5.8	Occupied Bandwidth and Emission Mask	Compliant
FCC §2.1051, §90.210 IC RSS-119 §5.8	Spurious Emissions at Antenna Terminals	Compliant
FCC §2.1055, §90.213 IC RSS-119 §5.3	Frequency stability	Compliant
FCC §2.1053, §90.210 IC RSS-119 §5.8	Field strength of spurious radiation	Compliant
FCC §90.214 IC RSS-119 §5.9	Transient Frequency Behavior	Compliant
IC RSS-119 §5.11 RSS-310 §3.1	Receiver Spurious Emission	Compliant

4 FCC §2.1091 & IC RSS-102 - RF Exposure Information

4.1 Applicable Standards

FCC §2.1091

(a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

Limits for Exposures

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	842/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1	30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

According to IC RSS-102 Issue 2 section 4.4, RF Field Strength Limits for Controlled Use Devices (Controlled Environment).

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Time Averaging (min)
0.003 - 1	600	2.19	-	6
1 - 10	600 / f	4.9 / f	-	6
10 - 30	60	4.9 / f	-	6
30 – 300	60	0.163	10*	6
300 – 1 500	3.54 f ^{0.5}	0.0094f ^{0.5}	f/30	6
1 500 – 15 000	137	0.364	50	6
15 000 – 150 000	137	0.364	50	616000 / f ^{1.2}
150 000- 300 000	0.354f ^{0.5}	9.4 x10 ⁻⁴ f ^{0.5}	3.33 x 10 ⁻⁴ f	616000 / f ^{1.2}

Note: *f* is frequency in MHz

* = Power density limit is applicable at frequencies greater than 100 MHz

MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal (dBm):	<u>40.92</u>
Maximum peak output power at antenna input terminal (mW):	<u>12359.47</u>
Prediction distance (cm):	<u>20</u>
Prediction frequency (MHz):	<u>420</u>
Maximum Antenna Gain, typical (dBi):	<u>17</u>
Maximum Antenna Gain (numeric):	<u>50.12</u>
Power density of prediction frequency at 20 cm (W/m ²):	<u>12.3237</u>
Power density of prediction frequency at 20 cm (mW/cm ²):	<u>1.23237</u>
MPE limit for uncontrolled exposure at prediction frequency (W/m ²):	<u>14</u>
MPE limit for uncontrolled exposure at prediction frequency (mW/cm ²):	<u>1.4</u>

Conclusion

The device complies with MPE requirements by providing a safe separation distance of 20 cm between the antenna, which have a maximum gain of 17 dBi, including any radiating structure, and any person when normally operated.

Proposed RF exposure safety information to include in User's Manual:


“FCC RF Exposure Requirements”:

CAUTION:

The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter:

- Antennas used for this transmitter must not exceed an antenna gain of 17 dBi
- For rear deck trunk and roof top installations, the antenna must be located at least 20 cm away from rear-seat passengers and bystanders in order to comply with the FCC RF exposure requirements.

The following label will be mounted in conspicuous view on the radio.



5 FCC §2.1046, §90.205 & IC RSS-119 §5.4 – Conducted Output Power

5.1 Applicable Standard

According to FCC §2.1046, and §90.205, 806–824 MHz, 851–869 MHz, 896–901 MHz and 935–940 MHz. Power and height limitations are specified in §90.635

According to IC RSS-119 §5.4, the output power should be within ± 1.0 dB of the manufacture's rated power.

5.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

RBW	Video BW
100 kHz	300 kHz

5.3 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2010-11-05 ~ 2010-11-09.

5.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*

*Note: Based on two year calibration cycle

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

5.5 Test Result

Test Mode: Transmitting

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Conducted Output Power (Watt)
Middle	420	40.92	12.359

6 FCC §2.1047, §90.207 & IC RSS-119 §5.2 – Modulation Characteristic

6.1 Applicable Standard

FCC §2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

IC RSS-119 §5.2

Equipment that operates in frequency bands other than 746-770 MHz and 794-800 MHz may employ any type of modulation. The type of modulation used shall be reported.

6.2 Test Procedure

Test Method: TIA/EIA-603-C 2.2.3

6.3 Test Result

Please refer to the hereinafter plots.

Transmitter Low Pass Filter

Type of Emission: 20K0D7E, 20K0D7D, 20K0D7W, 22K0D7E, 22K0D7D, 22K0D7W,
The modulation used is $\pi/4$ -shifted Differential Quaternary Phase Shift Keying ($\pi/4$ -DQPSK), with a modulation rate of 18k symbol/sec. (36k bit/sec).

A root-raised-cosine filter (RRC) is used as transmitting and receiving filter in this digital communication system to perform matched filtering.

The combined response of two such filters is that of the raised-cosine filter.


The raised-cosine filter is a filter frequently used for pulse-shaping in digital modulation known for its ability to minimize intersymbol interference (ISI).

The access scheme is TDMA with 4 physical channels per carrier.


The following graph is the transfer function of the aforementioned filter.

Plot provided by manufacturer

20K0D7W

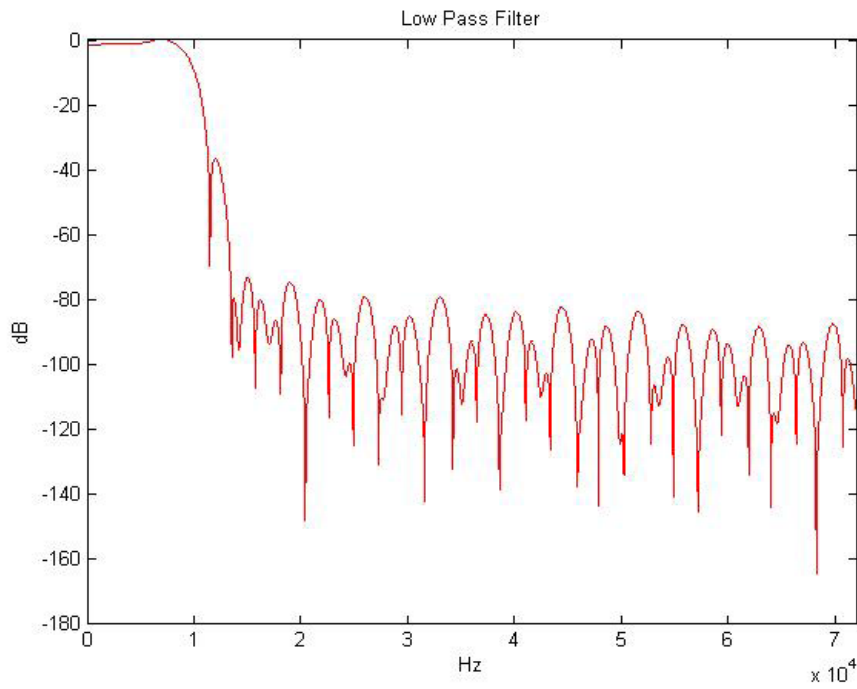

22K0D7W

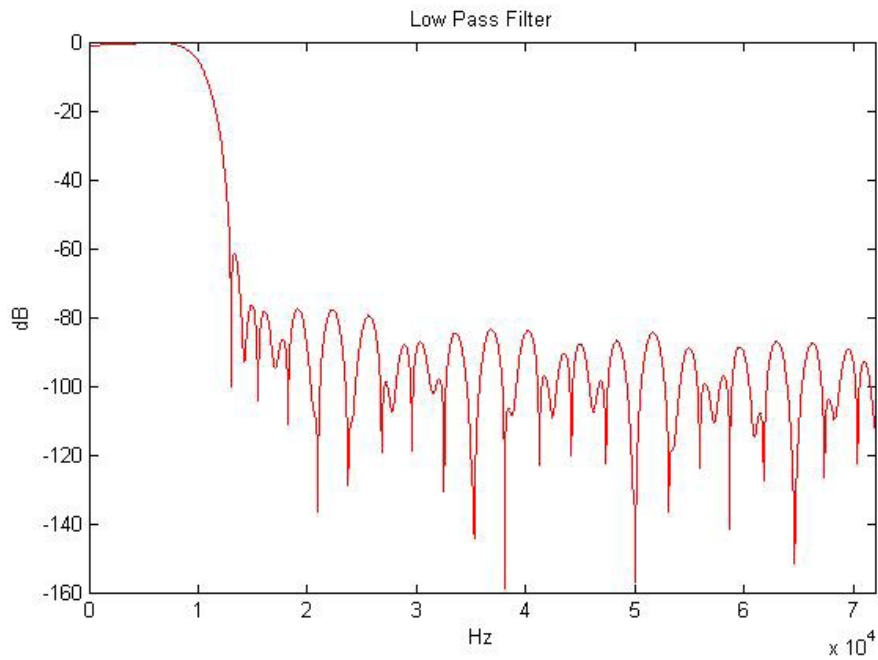

7 FCC §2.1049, §90.209, §90.210 & IC RSS-119 §5.8 – Occupied Bandwidth & Emission Mask

7.1 Applicable Standard

FCC §90.209

b(5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table.

Standard Channel Spacing/Bandwidth

Frequency band (MHz)	Channel spacing (kHz)	Authorized bandwidth (kHz)
Below 25 ²		
25–50	20	20
72–76	20	20
150–174	17.5	20/11.25/6
216–220 ⁵	6.25	20/11.25/6
220–222	5	4
406–512 ²	16.25	120/11.25/6
806–809/851–854	12.5	20
809–824/854–869	25	20
896–901/935–940	12.5	13.6
902–928 ⁴		
929–930	25	20
1427–1432 ⁵	12.5	12.5
³ 2450–2483.5 ²		
Above 2500		

As per FCC §2.1049, §90.210

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10\log(P)$ dB

The resolution bandwidth was 100Hz or greater for measuring up to 250 kHz from the edge of the authorized frequency segment, and 30 kHz or greater for measuring more than 250 kHz from the authorized frequency segment.

As per IC RSS-119 §5.8**5.8.2 Emission Mask C for Transmitters not Equipped with and Audio Low-pass Filter**

The power of any emission shall be attenuated below the transmitter output power P (dBW) as specified in the table below:

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$5 < f_d \leq 10$	$83 \log_{10}(f_d/5)$	300
$10 < f_d \leq 50$	whichever is the lesser attenuation: 50 or $29 \log_{10}(f_d^2/11)$	300
$f_d > 50$	$43 + 10 \log_{10}(p)$	Specified in Section 4.2.1

5.8.10 Emission Mask Y for Equipment with a 25 kHz Channel Spacing and an Occupied Bandwidth greater than 20 kHz

Equipment with a 25 kHz channel spacing and an occupied bandwidth greater than 20 kHz shall have the power of any emission attenuated below the transmitter output power P (dBW) as specified in the table below:

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$12.375 < f_d \leq 13.975$	whichever is the lesser attenuation: $30 + 16.67(f_d - 12.375)$ or $55 + 10 \log_{10}(p)$	Specified in Section 4.2.2
$f_d > 13.975$	whichever is the lesser attenuation: 57 or $55 + 10 \log_{10}(p)$	Specified in Section 4.2.2

7.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band ± 50 KHz from the carrier frequency.

7.3 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2010-11-05 ~ 2010-11-09.

7.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*

**Note: Based on two year calibration cycle*


Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.5 Test Result


Please refer to the plots below.

Occupied Bandwidth

High Power Middle Channel – 420 MHz

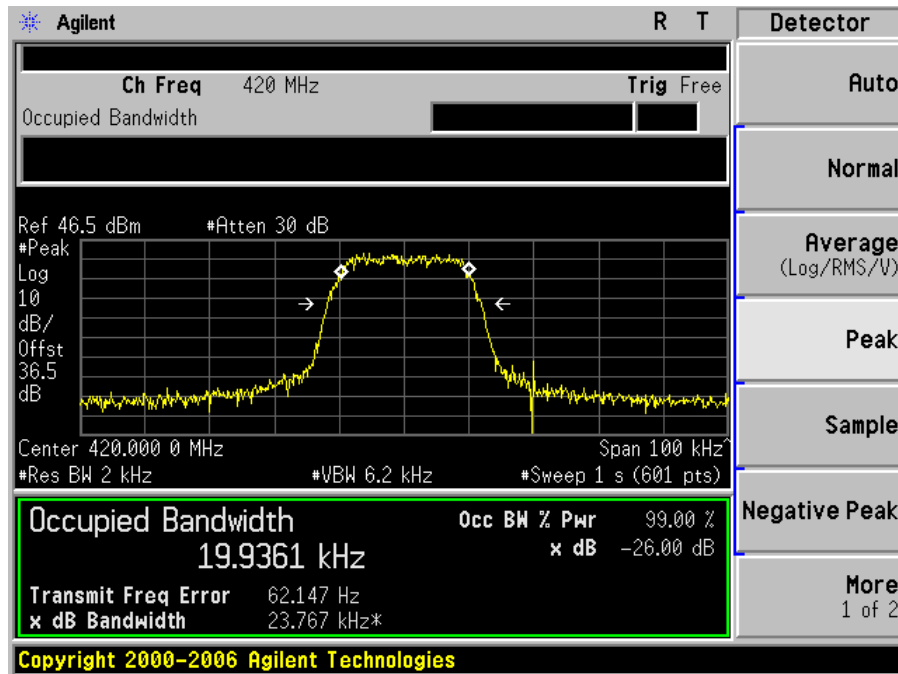

High Power Middle Channel

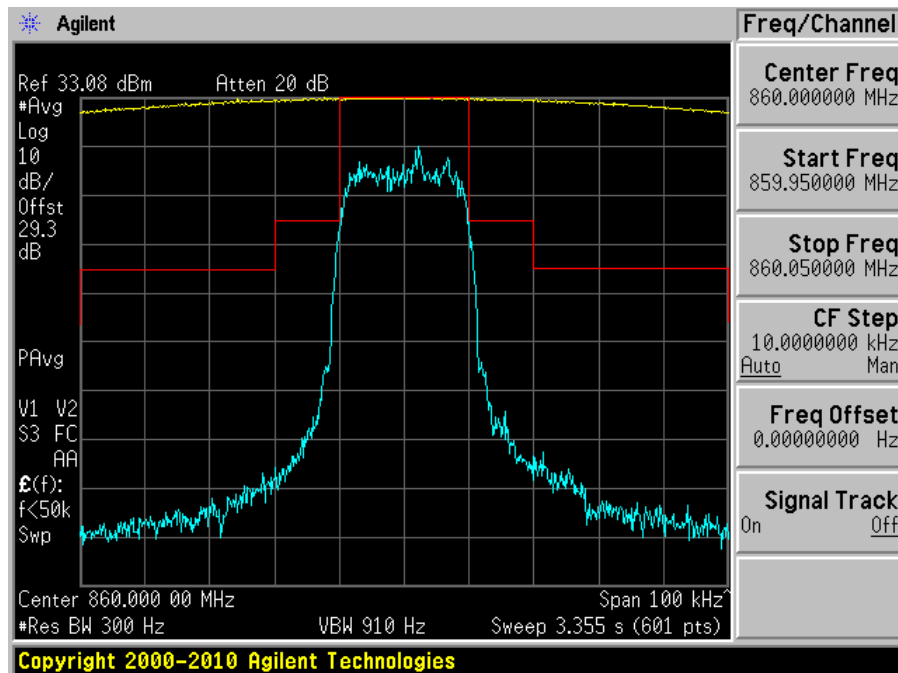

Emission Mask C

8 FCC §2.1051, §90.210 & IC RSS-119 §5.8 - Spurious Emissions at Antenna Terminals

8.1 Applicable Standard

FCC §2.1051 and §90.210 (25 kHz bandwidth and 20 kHz bandwidth)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$43+10\log(P)$

IC RSS-119 §5.8

8.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

8.3 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2011-11-05 ~ 2010-11-09.

8.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*


**Note: Based on two year calibration date*

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


8.5 Test Results

Please refer to the hereinafter plots.


Middle channel High Power

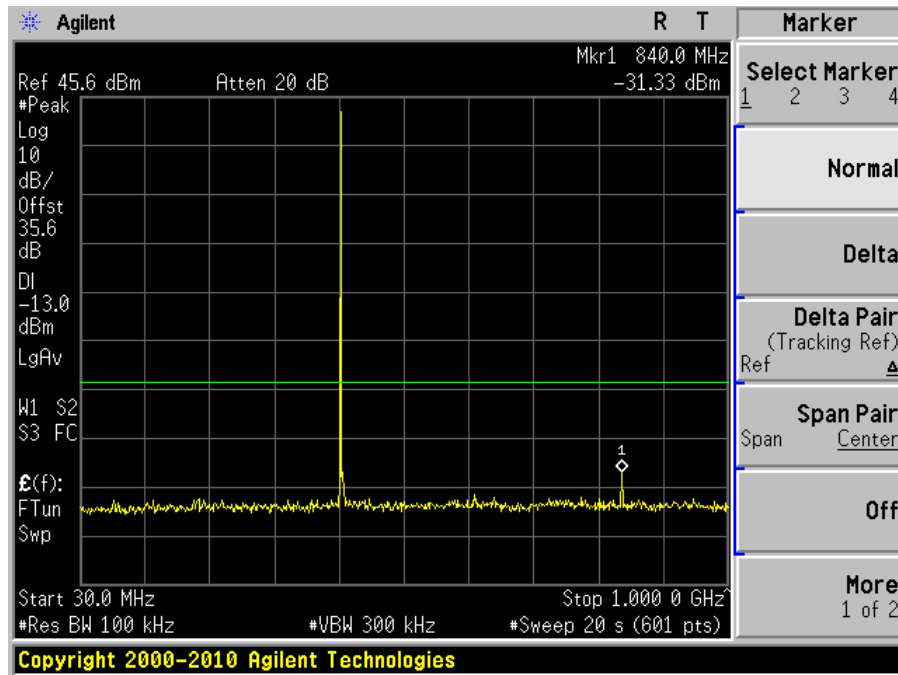

30 MHz to 1 GHz

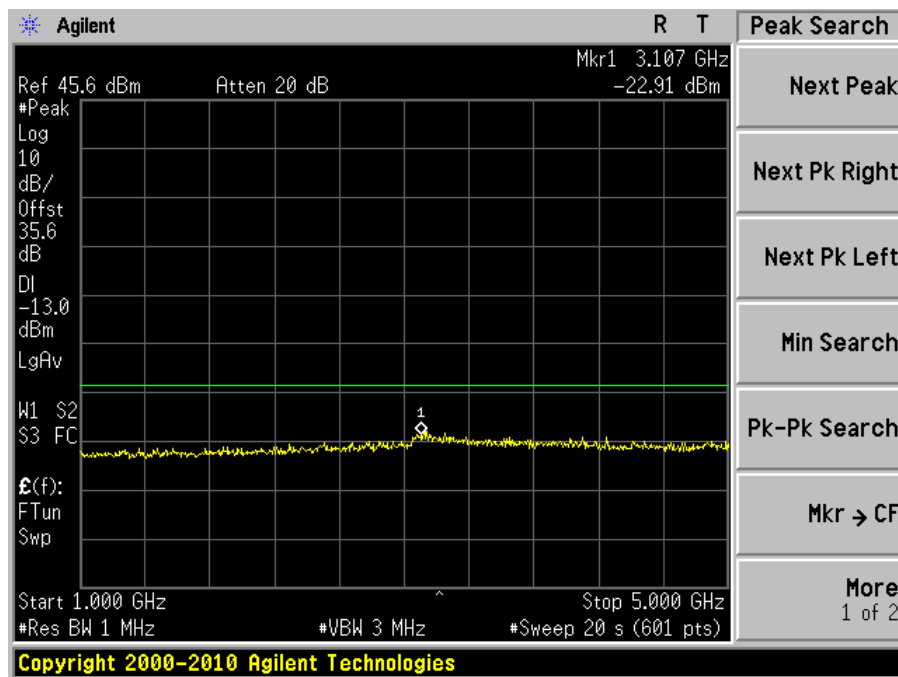

1 GHz to 5 GHz

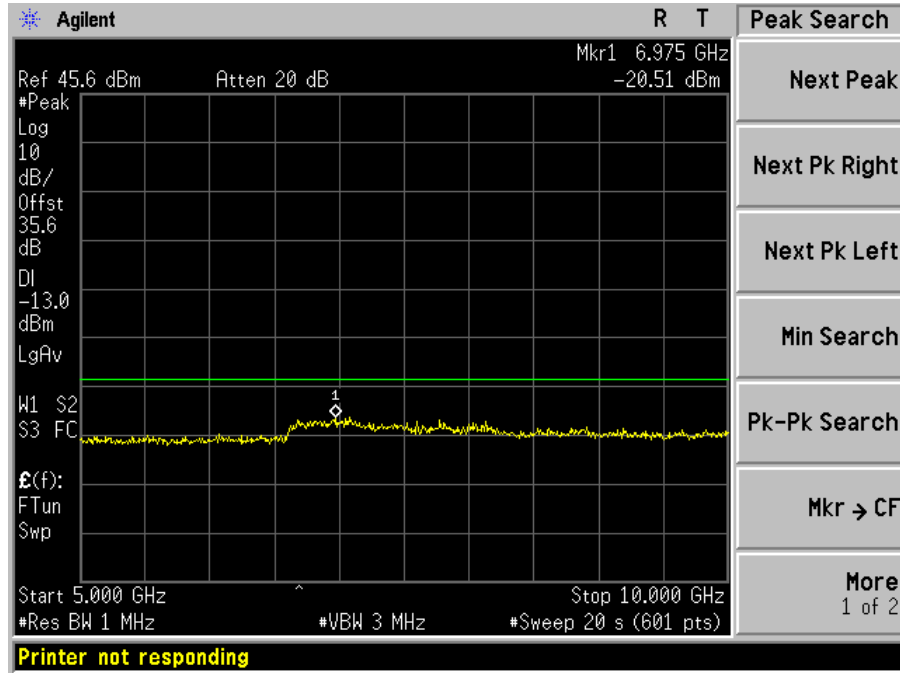

5 GHz to 10 GHz

9 FCC §2.1055 (d), §90.213 & IC RSS-119 §5.3 - Frequency Stability

9.1 Applicable Standard

FCC §2.1055 (d), §90.213

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

Minimum Frequency Stability

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1,2,3 ¹⁰⁰	100	200
25-50	20	20	50
72-76	5		50
150-174	5,11 ⁵	6 ⁵	4,6 ⁵⁰
216-220	1.0		1.0
220-222 ¹²	0.1	1.5	1.5
421-512	7,11,14 ^{2.5}	8 ⁵	8 ⁵
806-809	14 ^{1.0}	1.5	1.5
809-824	14 ^{1.5}	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	14 ^{0.1}	1.5	1.5
902-928	2.5	2.5	2.5
902-928 ¹³	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 ³⁰⁰	300	300
Above 2450 ¹⁰			

¹⁴Control stations may operate with the frequency tolerance specified for associated mobile frequencies.

(b) For the purpose of determining the frequency stability limits, the power of a transmitter is considered to be the maximum rated output power as specified by the manufacturer.

IC RSS-119 §5.3

Frequency Band (MHz)	Channel Spacing (kHz)	Frequency Stability (ppm)		
		Base/Fixed	Mobile Station	
			>2 watts	≤ 2 watts
27.41-28 and 29.7-50	20	20	20	50
72-76	20	5	20	50
138-174	30	5	5	5
	15	2.5	5	5
	7.5	1	2	5
217-218 and 219-220	12.5	1	5	5
220-222 (Note 1)	5	0.1	1.5	1.5
406.1-430 and 450-470 (Note 6)	25 (Note 2)	0.5	1	1
	25	2.5	5	5
	12.5	1.5	2.5	2.5
	6.25	0.5	1	1
764-776 and 794-806 (Note 3)	6.25	0.1	0.4 (Note 4)	0.4 (Note 4)
	12.5			
	25			
	50	1	1.25 (Note 5)	1.25 (Note 5)
806-821/851-866 and 821-824/866-869 (Note 6)	25 (Note 2)	0.1	0.1	0.1
	25	1.5	2.5	2.5
	12.5	1	1.5	1.5
896-901/935-940 (Note 6)	12.5	0.1	1.5	1.5
929-930/931-932	25	1.5	N/A	N/A
928-929/952-953 and 932-932.5/941-941.5	25	1.5	N/A	N/A
	12.5	1	³ (for remote station)	N/A
932.5-935/941.5-944	25	2.5	N/A	N/A
	12.5	2.5	N/A	N/A

Note 1: Mobile units may use synchronizing signals from associated base stations to achieve the specified carrier stability.

Note 2: This provision is for digital equipment with a channel spacing of 25 kHz and an occupied bandwidth greater than 20 kHz.

9.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to the Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 110% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

9.3 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2011-11-05 ~ 2011-11-09.

9.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*
ESPEC	Oven, Temperature	ESL-4CA	18010	2011-01-28

**Note: Based on two year calibration cycle*

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.5 Test Result

High Power, Middle Channel 420 MHz, 409~430 MHz Band:

Test Condition		Reference Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (PPM)	Limit (PPM)
Voltage (Vdc)	Temperature (°C)				
Frequency vs. Temperature					
120	50	420	420.000031	0.073810	± 0.5
120	40	420	420.000020	0.047619	± 0.5
120	30	420	420.000030	0.071428	± 0.5
120	20	420	420.000028	0.066667	± 0.5
120	10	420	420.000033	0.078571	± 0.5
120	0	420	419.999966	-0.080852	± 0.5
120	-10	420	419.999970	-0.071429	± 0.5
120	-20	420	419.999973	-0.064286	± 0.5
Frequency vs. Voltage					
108	20	420	420.000036	0.085714	± 0.5
132	20	420	420.000039	0.092857	± 0.5

10 FCC §2.1053, §90.210 & IC RSS-119 §5.8 – Field Strength of Spurious Radiation

10.1 Applicable Standard

FCC §2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of §2.1049, as appropriate, and §90.210(b),(d): Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

IC RSS-119 §5.8

10.2 Test Procedure

The transmitter was placed on a Styrofoam with wooden turntable, and it was normal transmitting with 50ohm termination which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001) – the absolute level

10.3 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2011-11-05 ~ 2011-11-09.

10.4 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-3	2011-06-29
Hewlett Packard	Pre amplifier	8447D	2944A06639	2011-06-09
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

*Note: Based on two year calibration cycle

Statement of Traceability: BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

10.5 Test Result

Below 1GHz:

Indicated		Turntable Azimuth degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Freq. (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Antenna Cord. (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
840	49.6	140	168	H	840	-45.8	0	0.5	-46.3	-13	-33.3
840	56.13	68	156	V	840	-39.27	0	0.5	-39.77	-13	-26.77

Above 1GHz:

Indicated		Turntable Azimuth degrees	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Freq. (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Antenna Cord. (dBi)	Cable Loss (dB)	Absolute Level (dBm)		
-	-	-	-	-	-	-	-	-	-	-	-

Note: All emission levels are at the noise floor and/or more than 20 dB below the limit.

11 FCC §90.214 & IC RSS-119 §5.9 - Transient Frequency Behavior

11.1 Applicable Standard

FCC §90.214: Transmitters designed to operate in the 150–174 MHz and 421–512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1,2}	Maximum frequency difference ³	All equipment
		421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels		
t_1^4	± 25.0 kHz	10.0 ms
t_2	± 12.5 kHz	25.0 ms
t_3^4	± 25.0 kHz	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels		
t_1^4	± 12.5 kHz	10.0 ms
t_2	± 6.25 kHz	25.0 ms
t_3^4	± 12.5 kHz	10.0 ms

When a transmitter is turned on, the radio frequency may take some time to stabilize. During this initial period, the frequency error or frequency difference (i.e. between the instantaneous and the steady state frequencies) must not exceed the limits specified in Table 16.

Table 16 - Transient Frequency Behaviour

Channel Spacing (kHz)	Time Intervals ^{1,2}	Maximum Frequency Difference (kHz)	Transient Duration Limit (ms)	
			138-174 MHz	406.1-512 MHz
25	t_1	±25	5	10
	t_2	±12.5	20	25
	t_3	±25	5	10
12.5	t_1	±12.5	5	10
	t_2	±6.25	20	25
	t_3	±12.5	5	10
6.25	t_1	±6.25	5	10
	t_2	±3.125	20	25
	t_3	±6.25	5	10

¹ t_{on} : the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 : the time period immediately following t_{on} .

t_2 : the time period immediately following t_1 .

t_3 : the time period from the instant when the transmitter is turned off until t_{off} .


t_{off} : the instant when the 1 kHz test signal starts to rise.

² If the transmitter carrier output power rating is 6 W or less, the frequency difference during the time periods t_1 and t_3 may exceed the maximum frequency difference for these time periods. The corresponding plot of frequency versus time during t_1 and t_3 shall be recorded in the test report.

11.2 Test Procedure

TIA/EIA-603-C 2.2.19

11.3 Test Setup Block Diagram

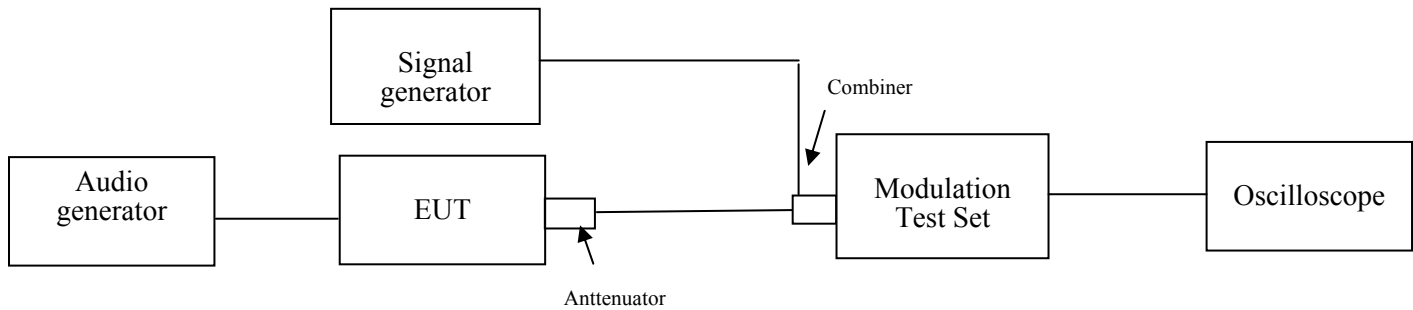

11.4 Test Environmental Conditions

Temperature:	22 °C
Relative Humidity:	47 %
ATM Pressure:	102.5 kPa

The testing was performed by Ning Ma on 2011-11-07 in RF site.

11.5 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
HP	Modulation Analyzer	8901A	2026A00847	2011-08-09
Tektronix	Digital Phosphor Oscilloscope	TDS7104	B020557	2011-06-09
HP	Generator, Signal	83650B	3614A00276	2010-06-21*
Chroma	Programmable AC source	6430	D185052265	N/R
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*
HP	Test Set, RF Communications	8920A	3438A05338	2010-05-18*

*Note: Based on two year calibration cycle


Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST

11.6 Test Results


Please refer to the following plots.

25 kHz Channel Spacing

Powering Down

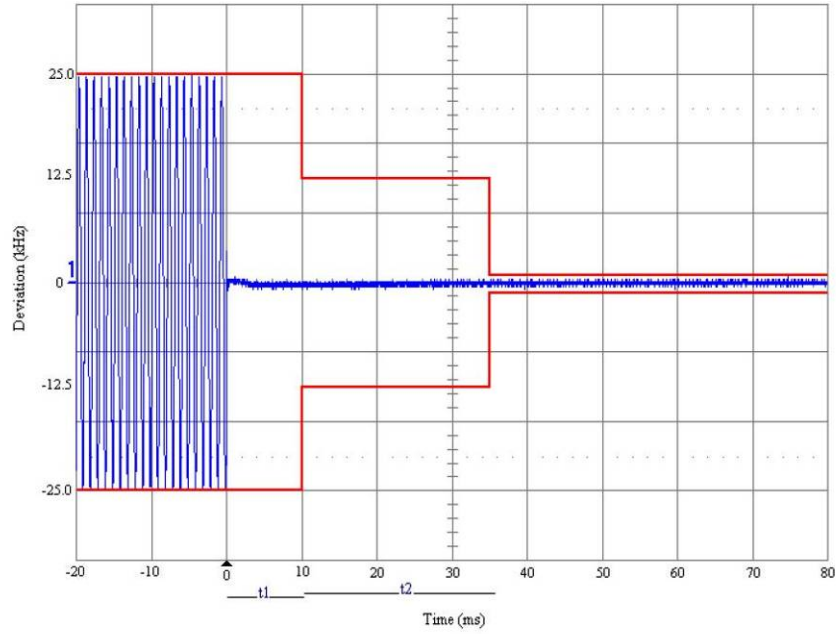

Powering Up

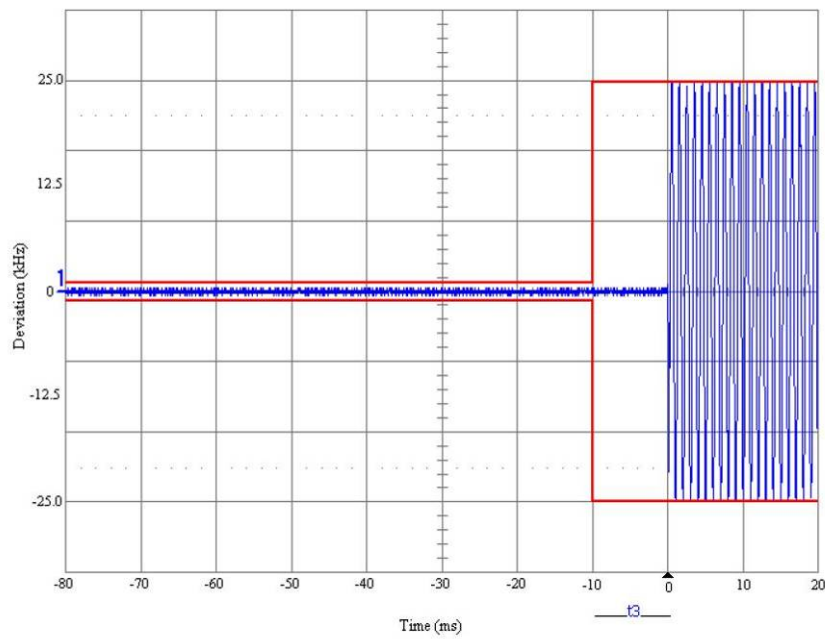

12 IC RSS-119 §5.11 & IC RSS-310 §3.1 - Receiver Spurious Radiated Emissions

12.1 Applicable Standard

IC RSS-119 §5.11, IC RSS-310 §3.1 and RSS-Gen §6

The following receiver spurious emission limits shall be complied with:


(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

Table 1 - Spurious Emission Limits for Receivers

Frequency (MHz)	Field Strength Microvolts/m at 3 meters
	Receivers
30-88	100
88-216	150
216-960	200
Above 960	500

12.2 Test Block Diagram

RX Spurious Emissions

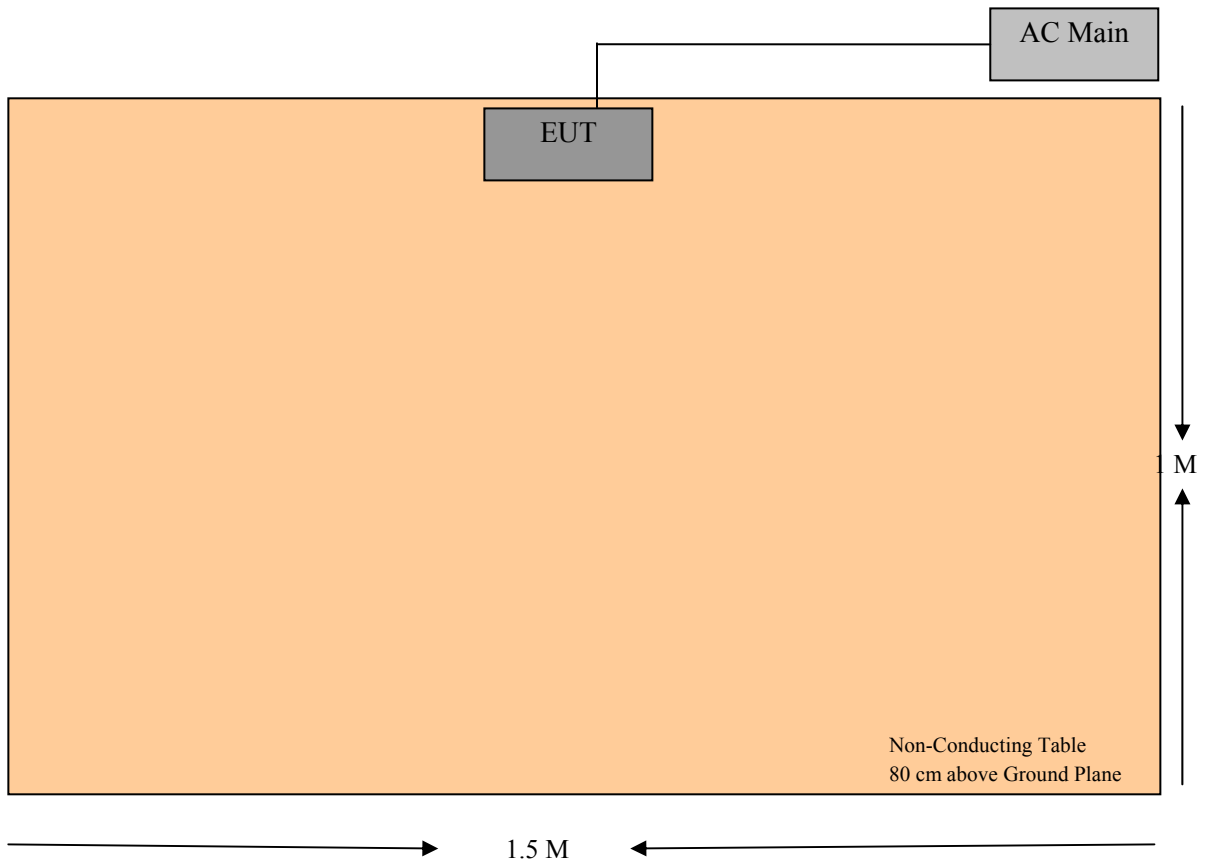

12.3 Test Equipment Lists and Details

Manufacturer	Description	Model	Serial Number	Calibration Date
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2011-03-21
Agilent	Spectrum Analyzer	E4440A	US45303156	2010-08-09*
Sunol Science Corp	System Controller	SC99V	122303-1	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-3	2011-06-29
Hewlett Packard	Pre amplifier	8447D	2944A06639	22011-06-09
A.R.A Inc	Horn antenna	DRG-1181A	1132	2010-11-29
Mini-Circuits	Pre Amplifier	ZVA-183-S	570400946	2011-05-09

**Note: Based on two year calibration cycle*

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

12.4 Test Environmental Conditions

Temperature:	18~24 °C
Relative Humidity:	40~55 %
ATM Pressure:	101.3~102.3 kPa

The testing was performed by Ning Ma on 2011-11-05 ~ 2011-11-07.

12.5 Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations.

12.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emissions are 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

12.7 Summary of Test Results

According to the test data, the EUT complied RSS Gen, with the worst margins from the limit listed below:

RX Spurious Emission:

Measure at 3 Meters (30 MHz – 1 GHz)


Model: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Test Range
-9.13	373.9933	Horizontal	30 MHz - 1 GHz

Measure at 3 Meters (Above 1 GHz)

Mode: Receiving			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Test Range
-27.92	5127.539	Horizontal	1 GHz – 6 GHz


12.8 Radiated Spurious Emissions Plot & Data

1) Measured at 3 Meter Distance (30 MHz – 1 GHz)

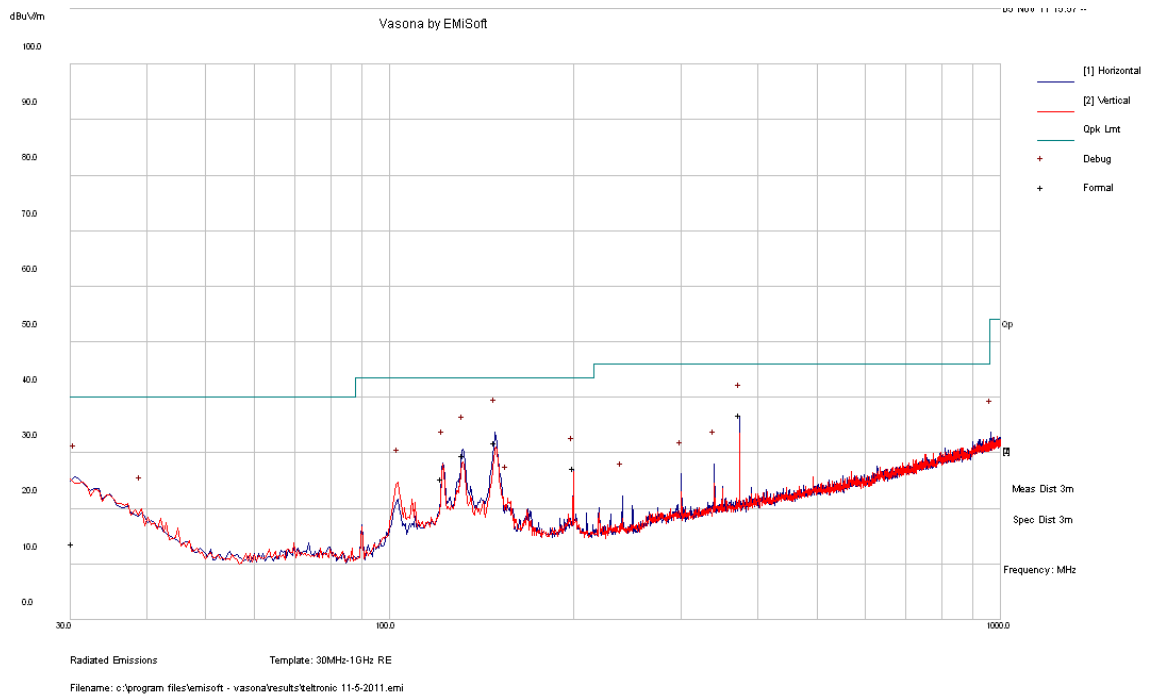

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)
373.9933	36.87	101	H	22	46	-9.13
148.7948	31.83	215	H	291	43.5	-11.67
132.0288	29.62	220	H	301	43.5	-13.88
199.9855	27.22	131	H	148	43.5	-16.28
121.9265	25.44	145	H	79	43.5	-18.06
30.2535	13.63	129	H	212	40	-26.37

2) Measured at 3 Meter Distance (1 – 6 GHz)

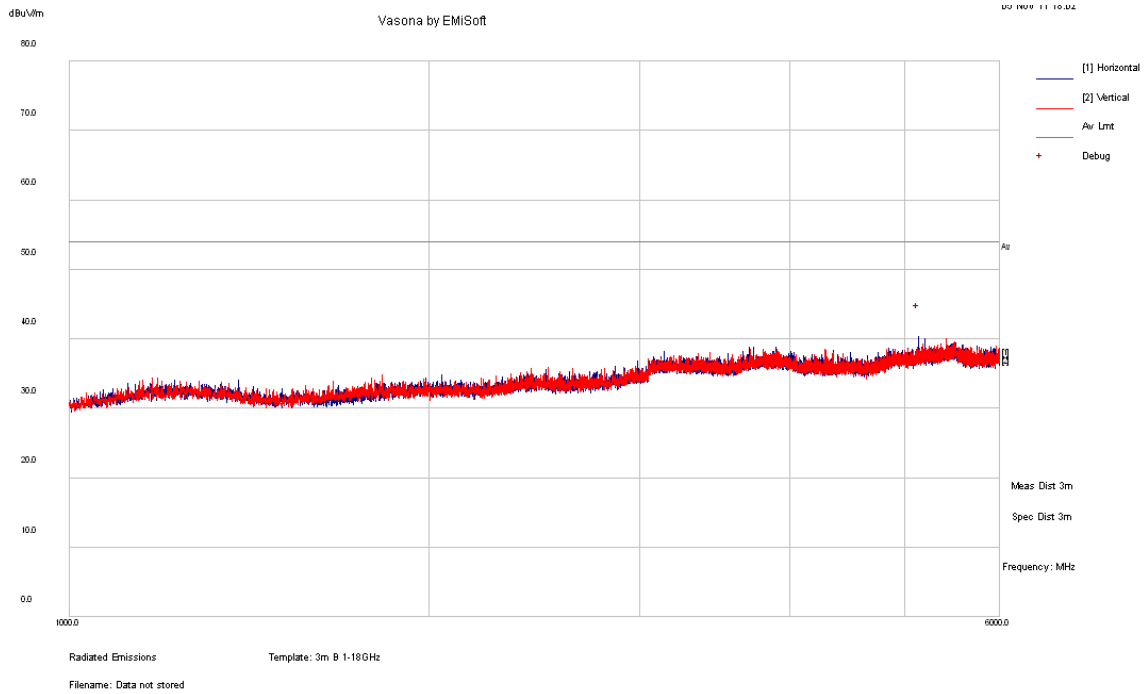

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB μ V/m)	Margin (dB)
5127.539	26.08	191	H	159	54	-27.92