
FCC Test Report

Report No.: AGC02039150904FE03

FCC ID : WTDG13
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : Sporty Stereo Bluetooth Headset
BRAND NAME : DACOM
MODEL NAME : G13, F10, G13B,G08
CLIENT : Shenzhen Sande Dacom Electronics Co., Ltd
DATE OF ISSUE : Oct.08,2015
STANDARD(S) : FCC Part 15 Rules
TEST PROCEDURE(S)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct.08,2015	Valid	Original Report

TABLE OF CONTENTS


- 1. VERIFICATION OF CONFORMITY 4**
- 2. GENERAL INFORMATION 5**
 - 2.1. PRODUCT DESCRIPTION.....5
 - 2.2. TABLE OF CARRIER FREQUENCYS.....5
- 3. MEASUREMENT UNCERTAINTY..... 7**
- 4. DESCRIPTION OF TEST MODES..... 7**
- 5. SYSTEM TEST CONFIGURATION 8**
 - 5.1. CONFIGURATION OF EUT SYSTEM8
 - 5.2. EQUIPMENT USED IN EUT SYSTEM8
 - 5.3. SUMMARY OF TEST RESULTS8
- 6. TEST FACILITY 9**
- 7 ALL TEST EQUIPMENT LIST 9**
- 8. RADIATED EMISSION 10**
 - 8.1TEST LIMIT..... 10
 - 8.2. MEASUREMENT PROCEDURE 11
 - 8.3. TEST SETUP..... 13
 - 8.4. TEST RESULT 15
- 9. BAND EDGE EMISSION 41**
 - 9.1. MEASUREMENT PROCEDURE41
 - 9.2 TEST SETUP41
 - 9.3 RADIATED TEST RESULT42
- 10. 20DB BANDWIDTH..... 50**
 - 10.1. MEASUREMENT PROCEDURE50
 - 10.2. TEST SET-UP50
 - 10.3. LIMITS AND MEASUREMENT RESULTS.....50
- 11. FCC LINE CONDUCTED EMISSION TEST 59**
 - 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST59
 - 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....59
 - 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST60
 - 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....60
 - 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....60
- APPENDIX A: PHOTOGRAPHS OF TEST SETUP 61**
- APPENDIX B: PHOTOGRAPHS OF EUT 62**


1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Sande Dacom Electronics Co., Ltd
Address	Building E, East District No.8, Shangxue Technolog ShenZhen,China
Manufacturer	Shenzhen Sande Dacom Electronics Co., Ltd
Address	Building E, East District No.8, Shangxue Technolog ShenZhen,China
Product Designation	Sporty Stereo Bluetooth Headset
Brand Name	DACOM
Test Model	G13
Serial Model	F10, G13B,G08
Difference	All the same except the model name and color.
Date of test	Sep.25,2015 to Sep.28,2015
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.249.

Tested By 
Time Huang(Huang Nanhui) Oct.08,2015

Reviewed By 
Forrest Lei(Lei Yonggang) Oct.08,2015

Approved By 
Solger Zhang(Zhang Hongyi)
Authorized Officer Oct.08,2015

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	2.25dBm(Max)
Bluetooth Version	V4.1
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR, 40 for BLE
Hardware Version	V3
Software Version	V1
Antenna Designation	PCB Antenna (Met 15.203 Antenna requirement)
Antenna Gain	2dBi
Power Supply	DC 3.7V by battery
Note: The USB port only used for charging and can't be used to transfer data with PC. The BT is not active when charging	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2403MHZ
	:	:
	38	2440 MHZ
	39	2441 MHZ
	40	2442 MHZ
	:	:
	77	2479 MHZ
	78	2480 MHZ

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHZ	0	2402MHZ
	1	2404MHZ
	:	:
	38	2478 MHZ
	39	2480 MHZ

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

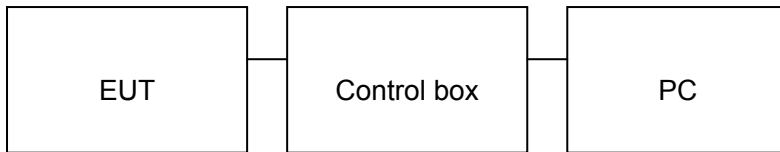

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Sporty Stereo Bluetooth Headset	DACOM	G13	EUT
2	PC	Lenovo	SL410K	A.E
3	Control box	N/A	N/A	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.207	Conduction Emission	N/A
N/A	BANDWIDTH	Compliant

Note: N/A means not applicable

6. TEST FACILITY

Site	Compliance Certification Service(Shenzhen) Inc.
Location	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr
FCC Registration No.	441872
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009.

7 ALL TEST EQUIPMENT LIST

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

8. RADIATED EMISSION

8.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1.5MHz VBW and RBW for peak reading. Then 1.5MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1.5MHz/1.5MHz for Peak, 1.5MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

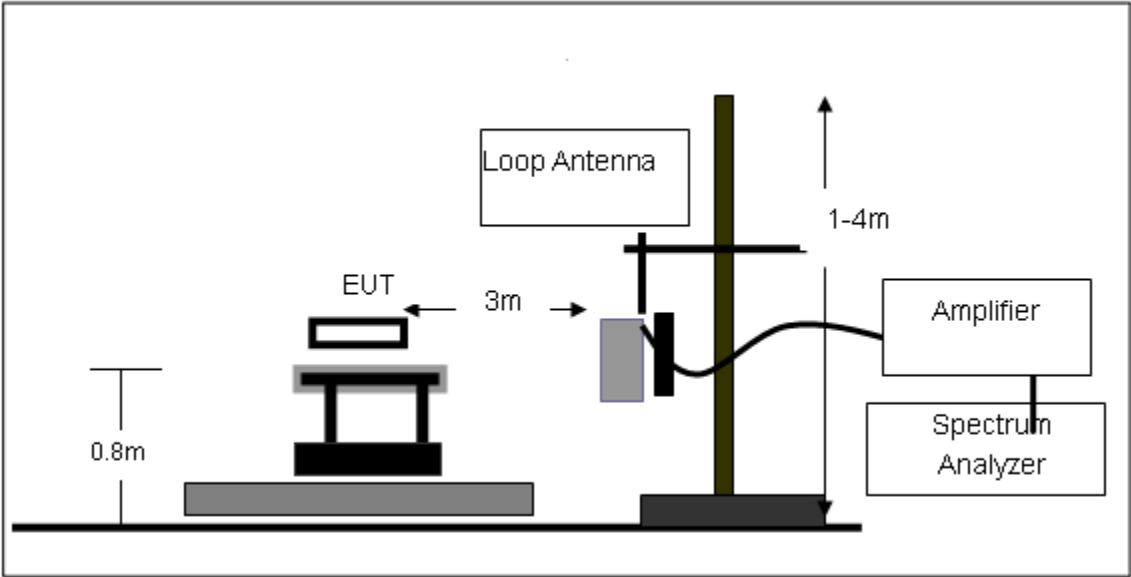

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

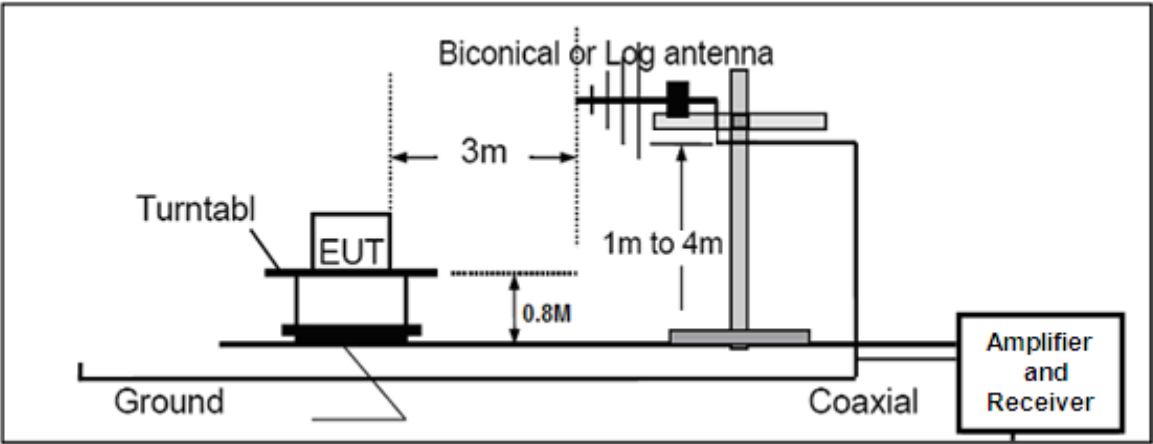

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

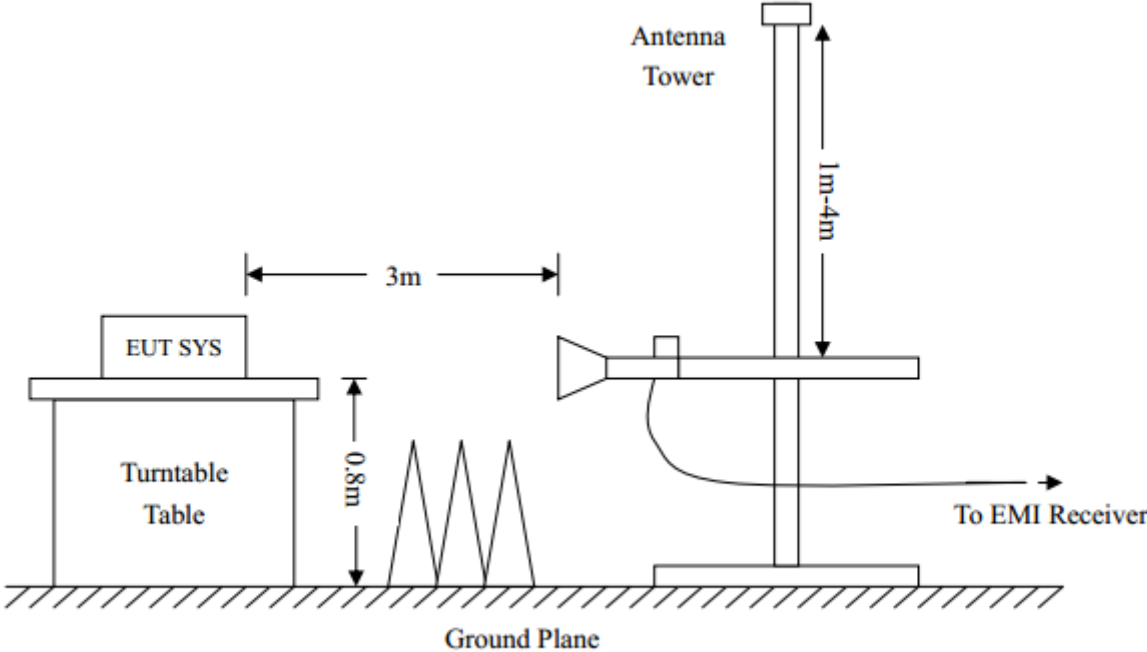

8.4. TEST RESULT


**(Worst modulation:GFSK)
 FOR BR/EDR**

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

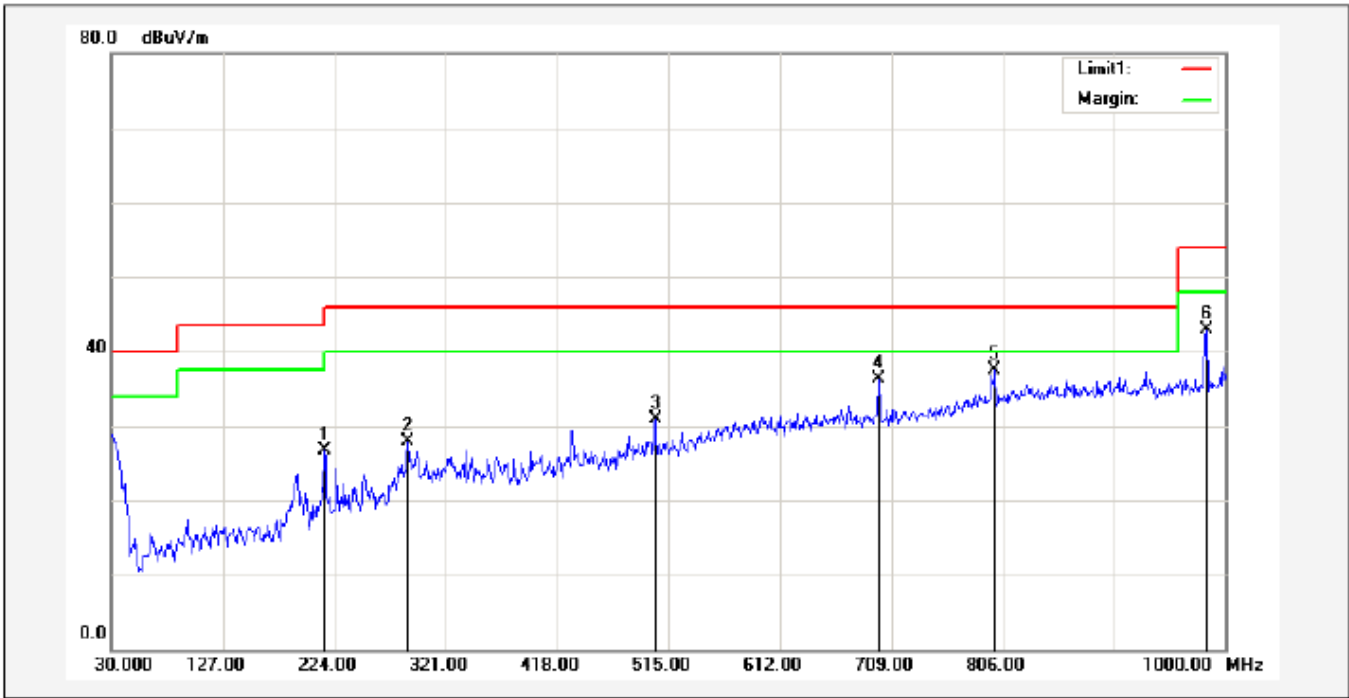

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	215.2700	39.86	-13.14	26.72	43.50	-16.78			peak
2	288.0200	40.02	-12.16	27.86	46.00	-18.14			peak
3	503.3600	36.01	-5.18	30.83	46.00	-15.17			peak
4	697.3600	37.64	-1.25	36.39	46.00	-9.61			peak
5*	799.2100	36.18	1.25	37.43	46.00	-8.57			peak
6	983.5100	40.69	2.16	42.85	54.00	-11.15			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

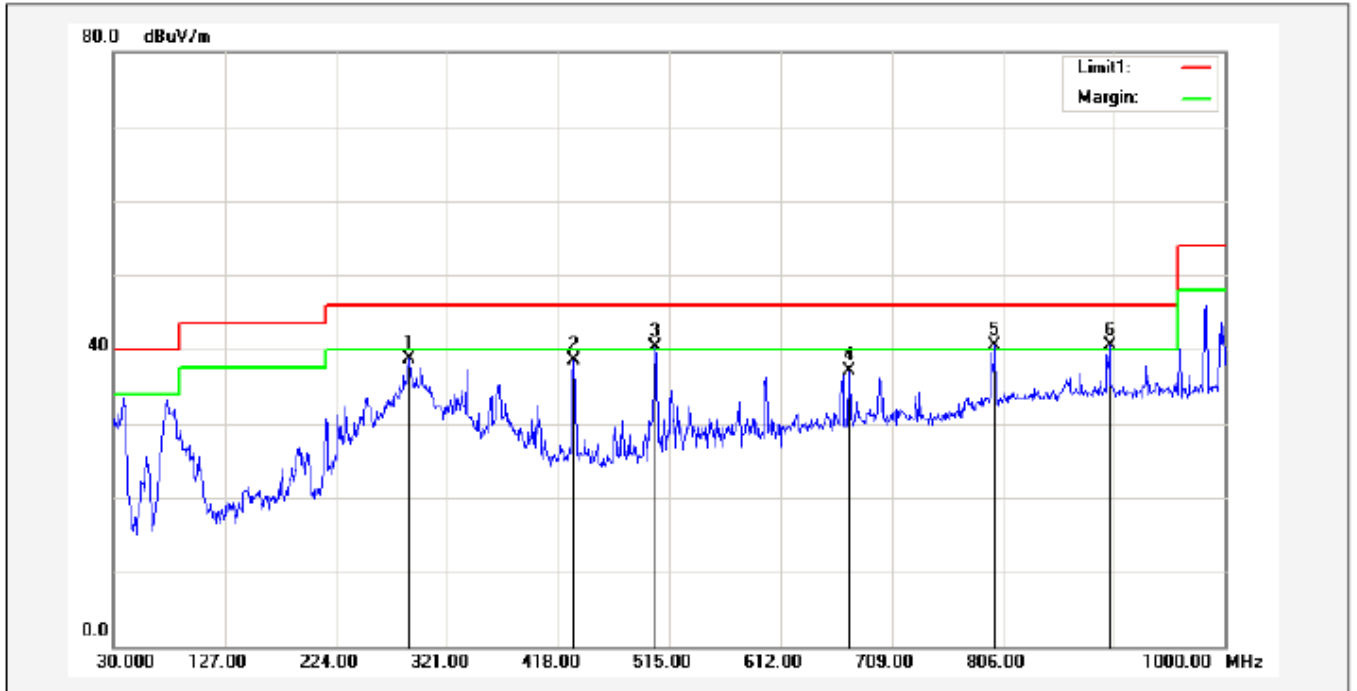


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	50.85	-12.16	38.69	46.00	-7.31			peak
2	431.5800	45.83	-7.26	38.57	46.00	-7.43			peak
3!	502.3900	45.48	-5.18	40.30	46.00	-5.70			peak
4	672.1400	38.67	-1.47	37.20	46.00	-8.80			peak
5!	799.2100	39.16	1.25	40.41	46.00	-5.59			peak
6*	899.1200	38.77	1.79	40.56	46.00	-5.44			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

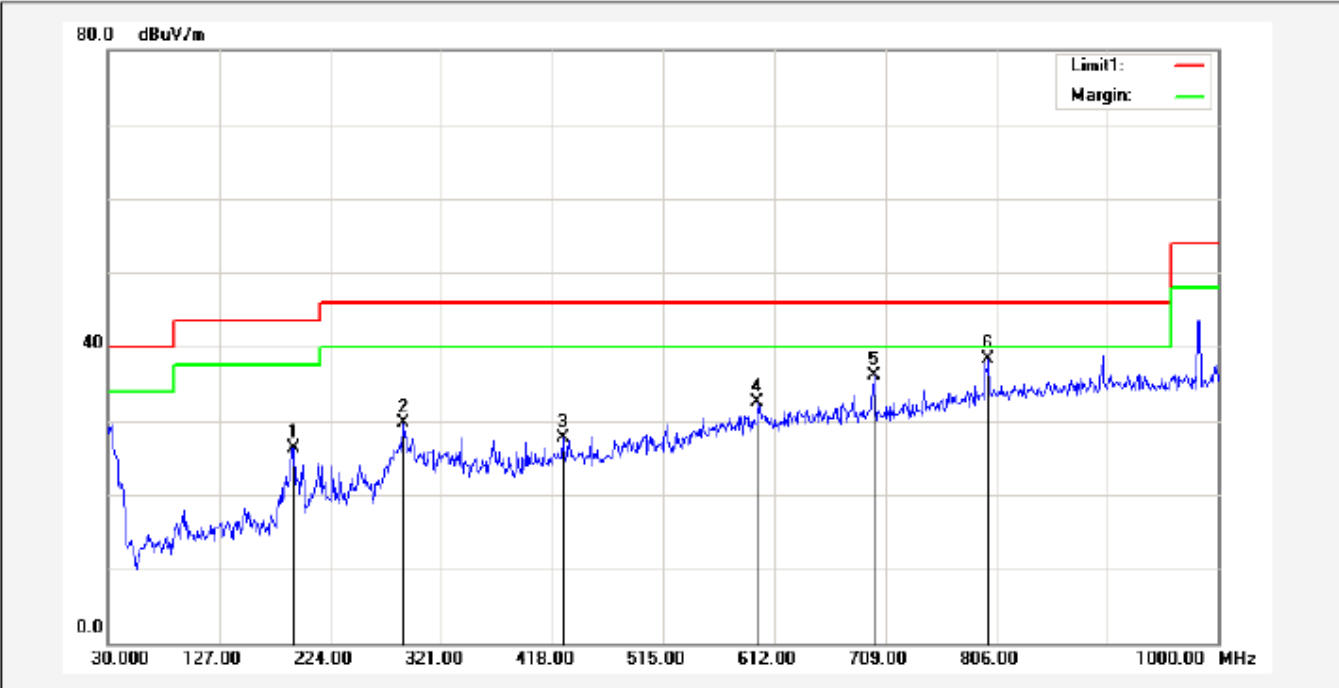

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	191.9900	41.80	-15.47	26.33	43.50	-17.17			peak
2	288.0200	41.79	-12.16	29.63	46.00	-16.37			peak
3	427.7000	35.00	-7.27	27.73	46.00	-18.27			peak
4	597.4500	34.90	-2.48	32.42	46.00	-13.58			peak
5	699.3000	37.40	-1.24	36.16	46.00	-9.84			peak
6*	799.2100	37.11	1.25	38.36	46.00	-7.64			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

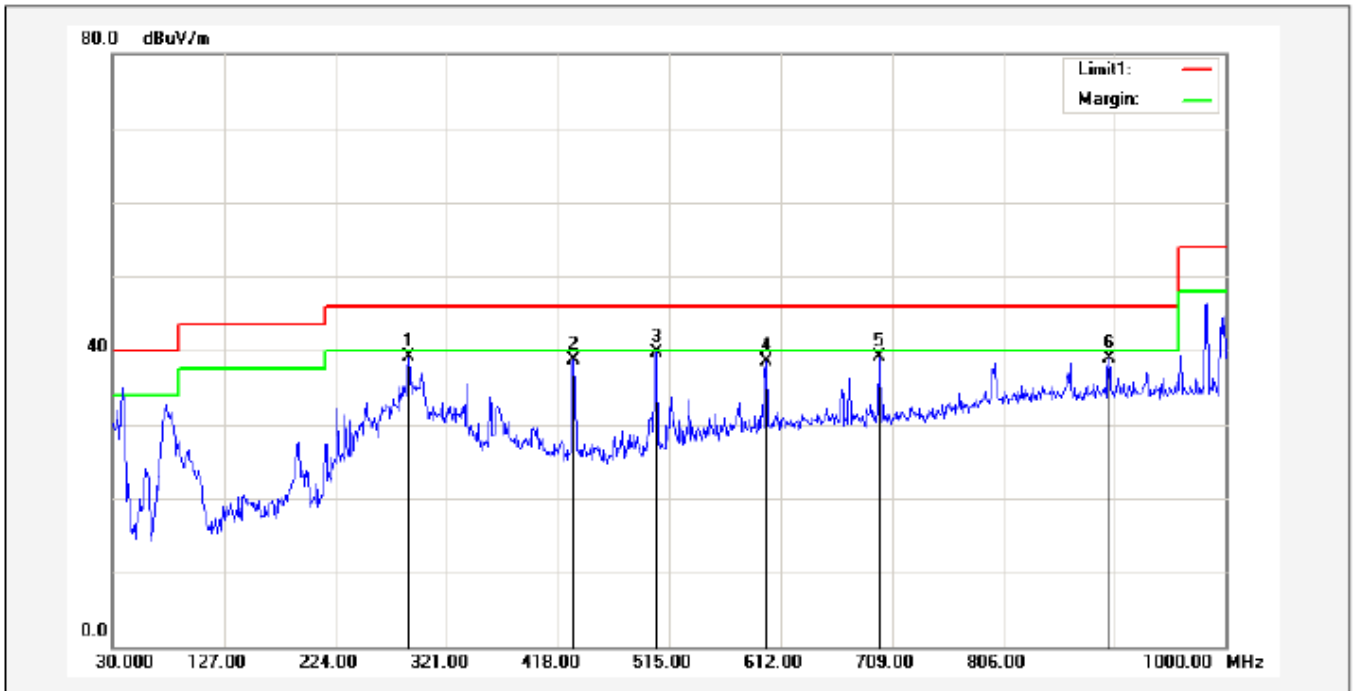


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	51.27	-12.16	39.11	46.00	-6.89			peak
2	431.5800	45.89	-7.26	38.63	46.00	-7.37			peak
3*	503.3600	44.97	-5.18	39.79	46.00	-6.21			peak
4	599.3900	40.88	-2.45	38.43	46.00	-7.57			peak
5	697.3600	40.37	-1.25	39.12	46.00	-6.88			peak
6	898.1500	37.12	1.78	38.90	46.00	-7.10			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

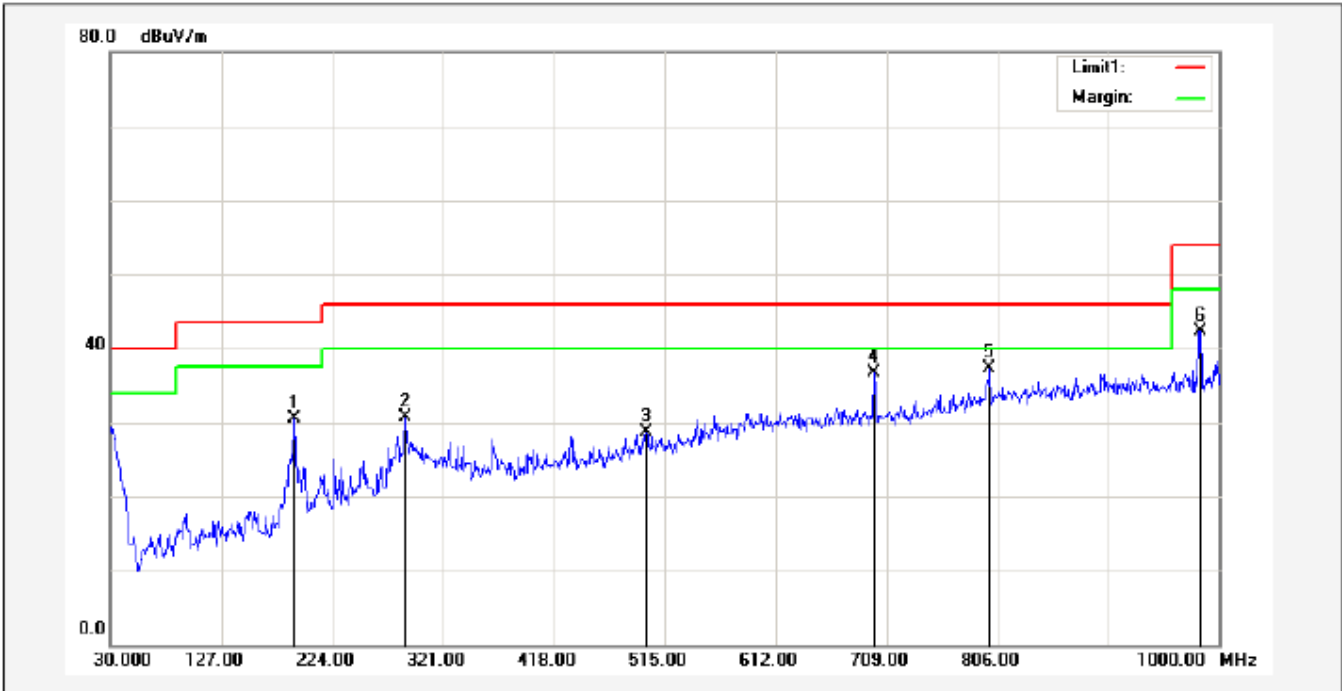

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	191.0200	46.04	-15.55	30.49	43.50	-13.01			peak
2	288.0200	42.93	-12.16	30.77	46.00	-15.23			peak
3	498.5100	33.90	-5.22	28.68	46.00	-17.32			peak
4	697.3600	37.92	-1.25	36.67	46.00	-9.33			peak
5*	799.2100	36.02	1.25	37.27	46.00	-8.73			peak
6	983.5100	40.14	2.16	42.30	54.00	-11.70			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

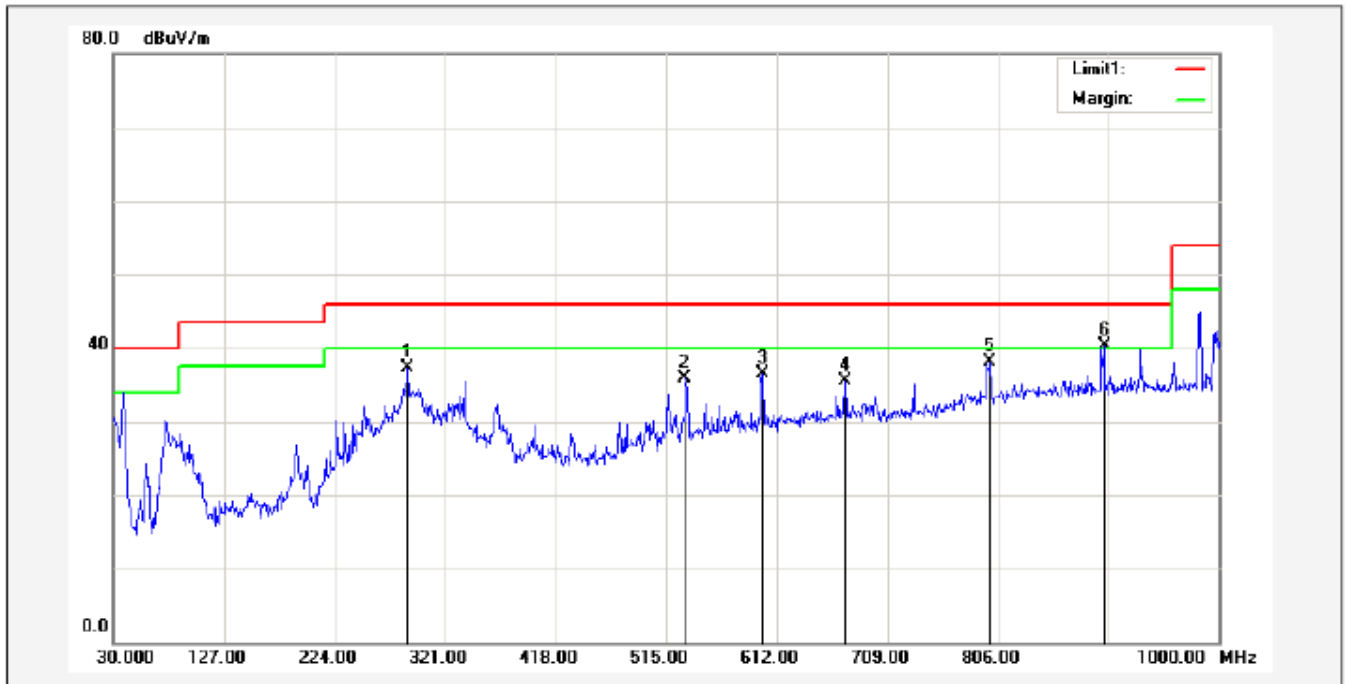

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	49.43	-12.16	37.27	46.00	-8.73			peak
2	531.4900	40.22	-4.28	35.94	46.00	-10.06			peak
3	599.3900	39.01	-2.45	36.56	46.00	-9.44			peak
4	672.1400	36.98	-1.47	35.51	46.00	-10.49			peak
5	799.2100	36.93	1.25	38.18	46.00	-7.82			peak
6*	899.1200	38.50	1.79	40.29	46.00	-5.71			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ


RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL-HORIZONTAL

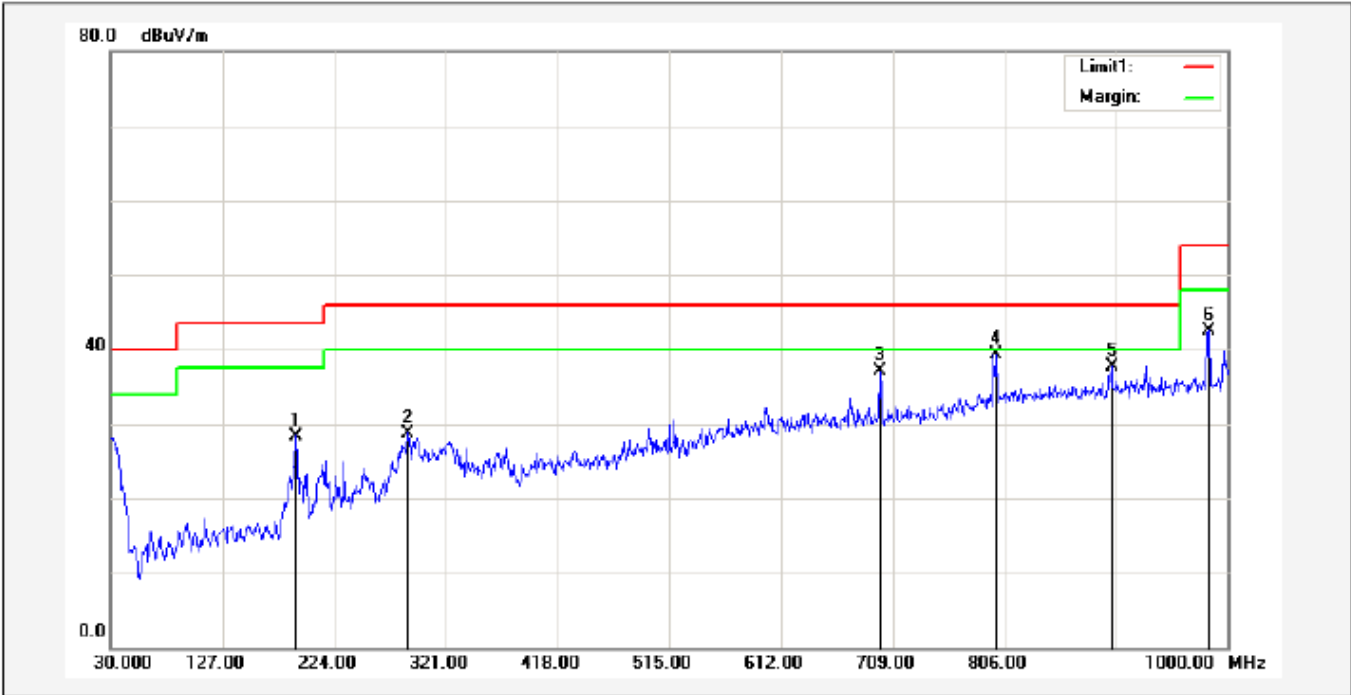

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	191.0200	43.95	-15.55	28.40	43.50	-15.10			peak
2	288.0200	40.96	-12.16	28.80	46.00	-17.20			peak
3	697.3600	38.28	-1.25	37.03	46.00	-8.97			peak
4*	799.2100	38.10	1.25	39.35	46.00	-6.65			peak
5	899.1200	36.00	1.79	37.79	46.00	-8.21			peak
6	983.5100	40.28	2.16	42.44	54.00	-11.56			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

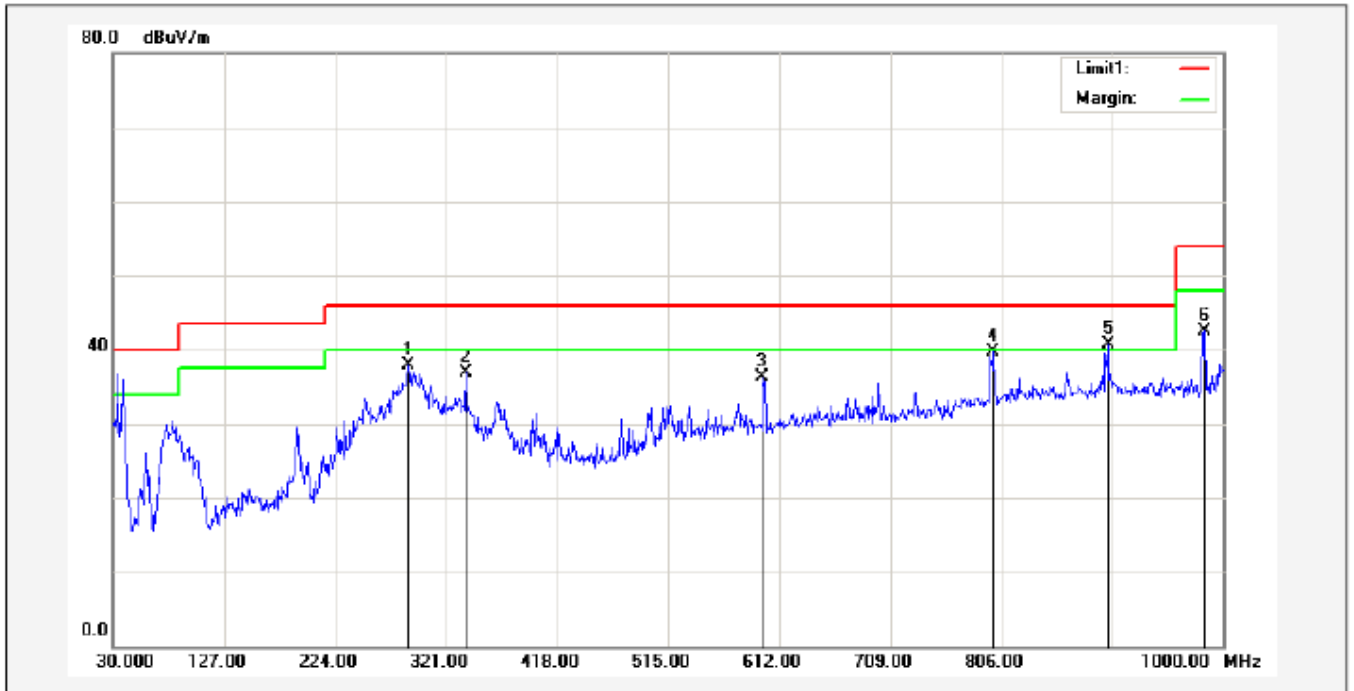


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	50.12	-12.16	37.96	46.00	-8.04			peak
2	338.4600	46.81	-9.81	37.00	46.00	-9.00			peak
3	597.4500	38.69	-2.48	36.21	46.00	-9.79			peak
4	799.2100	38.39	1.25	39.64	46.00	-6.36			peak
5*	899.1200	38.91	1.79	40.70	46.00	-5.30			peak
6	983.5100	40.28	2.16	42.44	54.00	-11.56			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

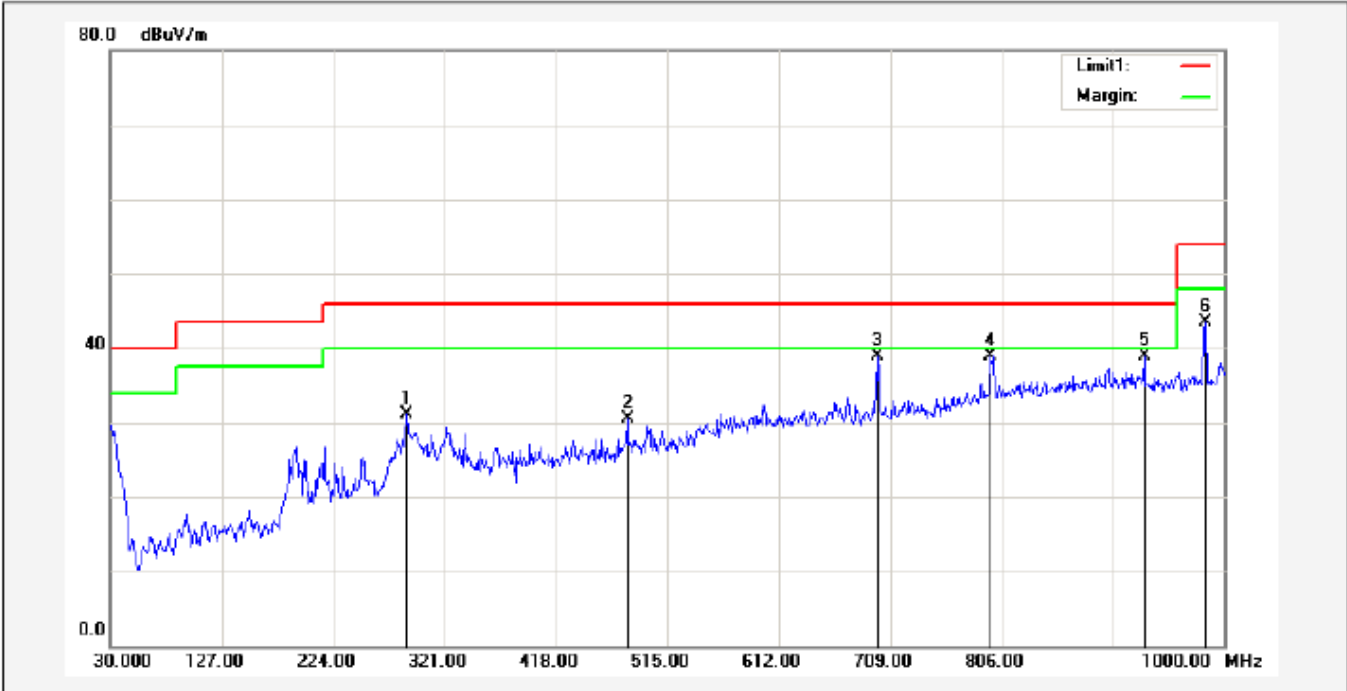

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	43.32	-12.16	31.16	46.00	-14.84			peak
2	480.0800	36.28	-5.73	30.55	46.00	-15.45			peak
3	697.3600	40.06	-1.25	38.81	46.00	-7.19			peak
4*	796.3000	37.81	1.15	38.96	46.00	-7.04			peak
5	930.1600	37.02	1.92	38.94	46.00	-7.06			peak
6	983.5100	41.36	2.16	43.52	54.00	-10.48			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

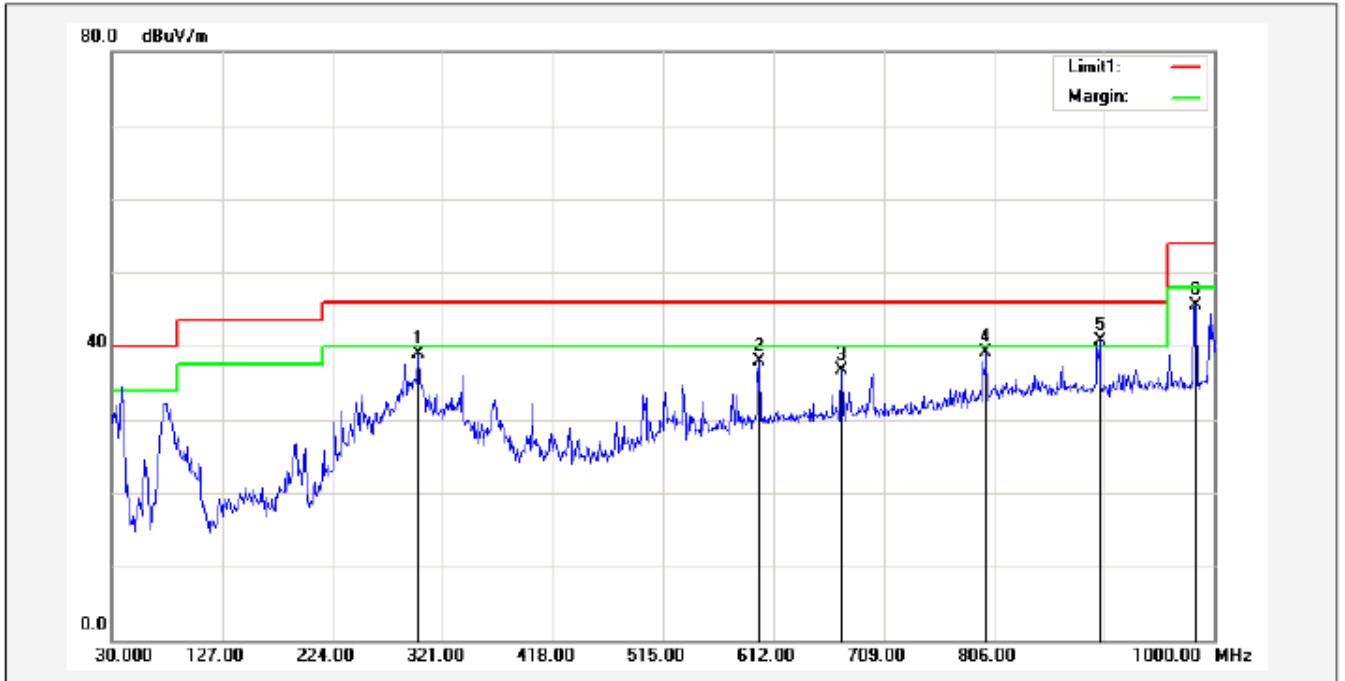


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	299.6600	50.81	-11.85	38.96	46.00	-7.04			peak
2	599.3900	40.38	-2.45	37.93	46.00	-8.07			peak
3	672.1400	38.23	-1.47	36.76	46.00	-9.24			peak
4	799.2100	37.95	1.25	39.20	46.00	-6.80			peak
5*	899.1200	38.98	1.79	40.77	46.00	-5.23			peak
6	983.5100	43.44	2.16	45.60	54.00	-8.40			peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

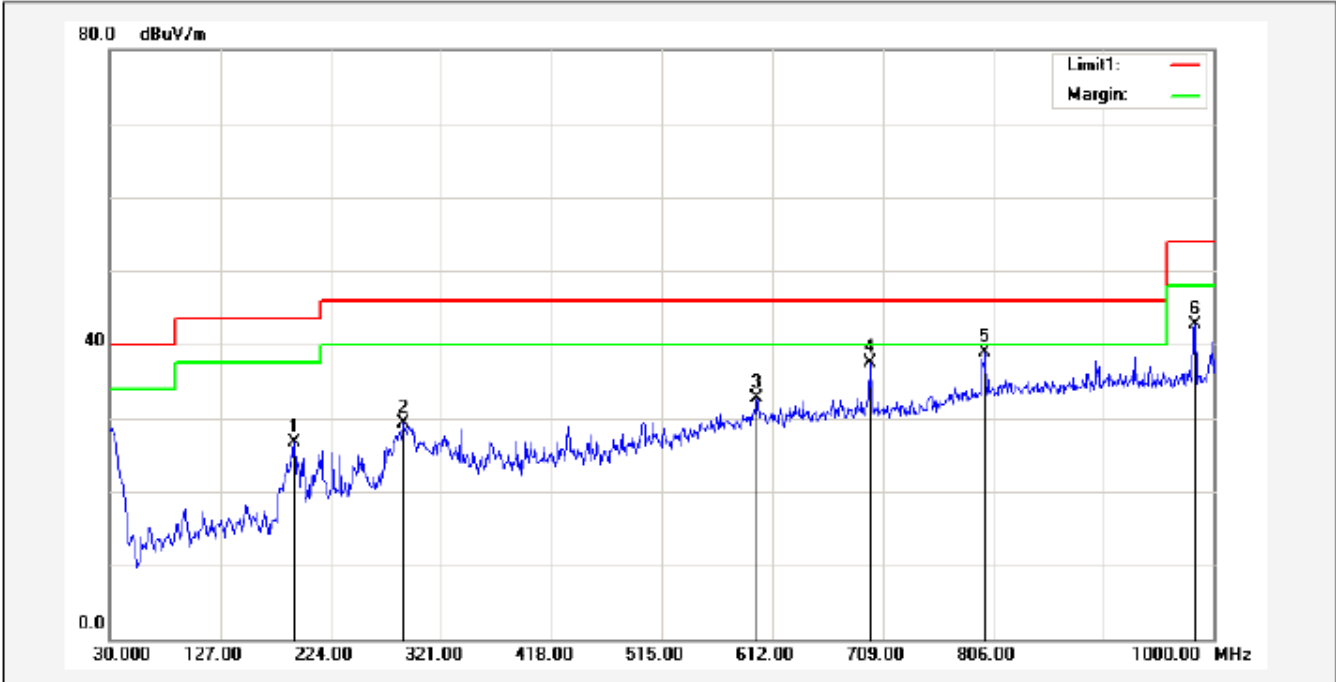

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	191.9900	42.12	-15.47	26.65	43.50	-16.85			peak
2	288.0200	41.53	-12.16	29.37	46.00	-16.63			peak
3	598.4200	35.14	-2.46	32.68	46.00	-13.32			peak
4	697.3600	38.67	-1.25	37.42	46.00	-8.58			peak
5*	799.2100	37.73	1.25	38.98	46.00	-7.02			peak
6	983.5100	40.61	2.16	42.77	54.00	-11.23			peak

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL -VERTICAL

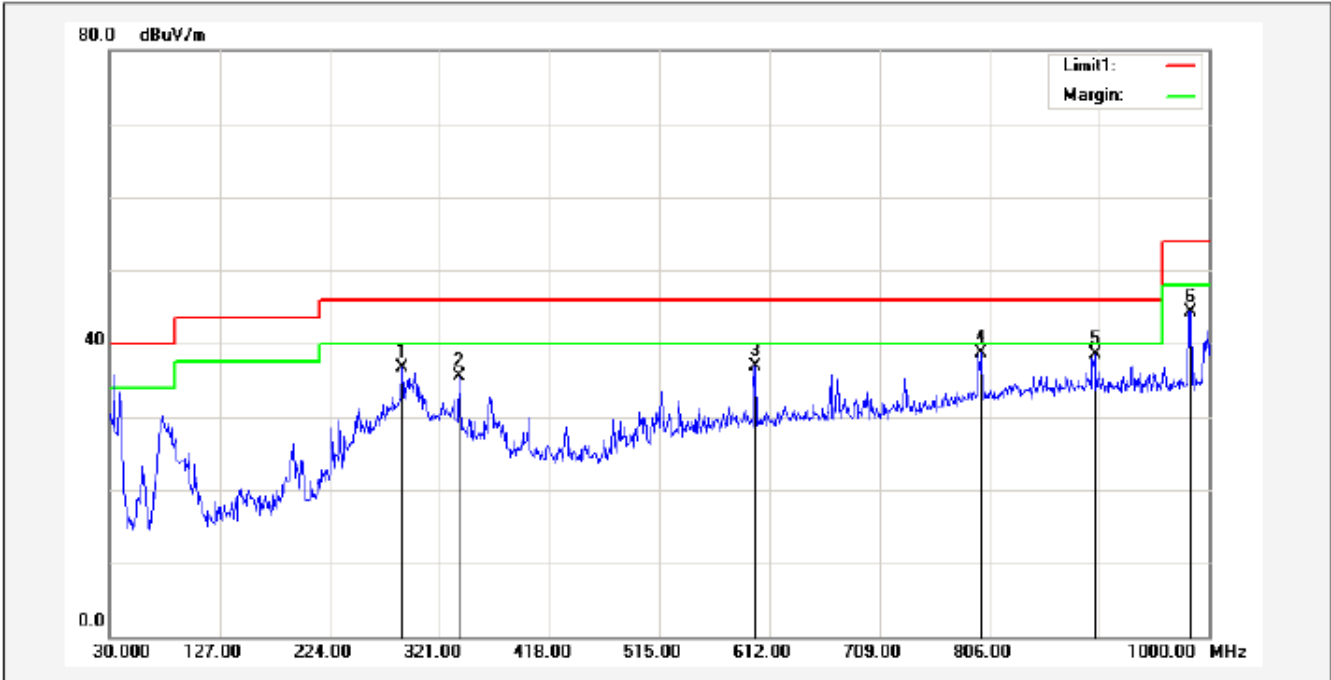

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	288.0200	48.85	-12.16	36.69	46.00	-9.31			peak
2	338.4600	45.28	-9.81	35.47	46.00	-10.53			peak
3	599.3900	39.30	-2.45	36.85	46.00	-9.15			peak
4*	799.2100	37.55	1.25	38.80	46.00	-7.20			peak
5	899.1200	36.72	1.79	38.51	46.00	-7.49			peak
6	983.5100	42.15	2.16	44.31	54.00	-9.69			peak


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHZ
 FOR BR/EDR**


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

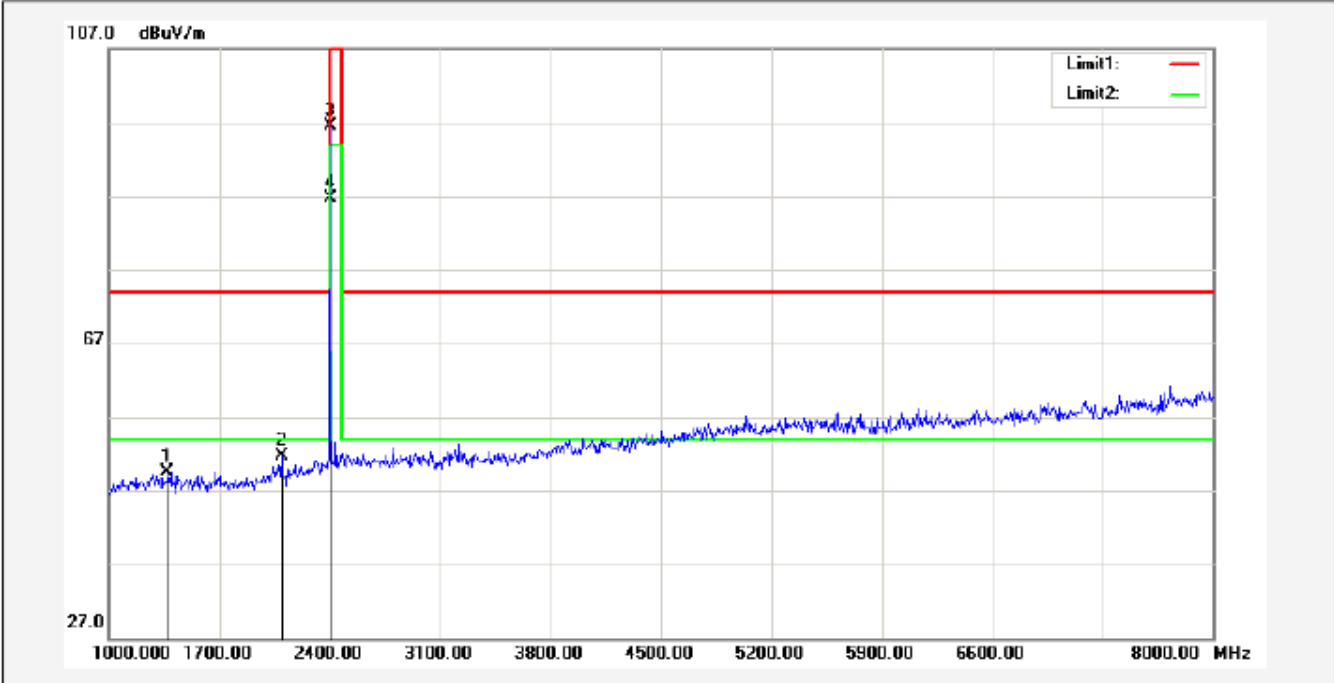

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1371.000	56.69	-7.17	49.52	74.00	-24.48			peak
2	2092.000	56.12	-4.50	51.62	74.00	-22.38			peak
3X	2402.000	99.41	-2.81	96.60	114.00	-17.40			peak
4*	2402000	89.53	-2.81	86.72	94.00	-7.28			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

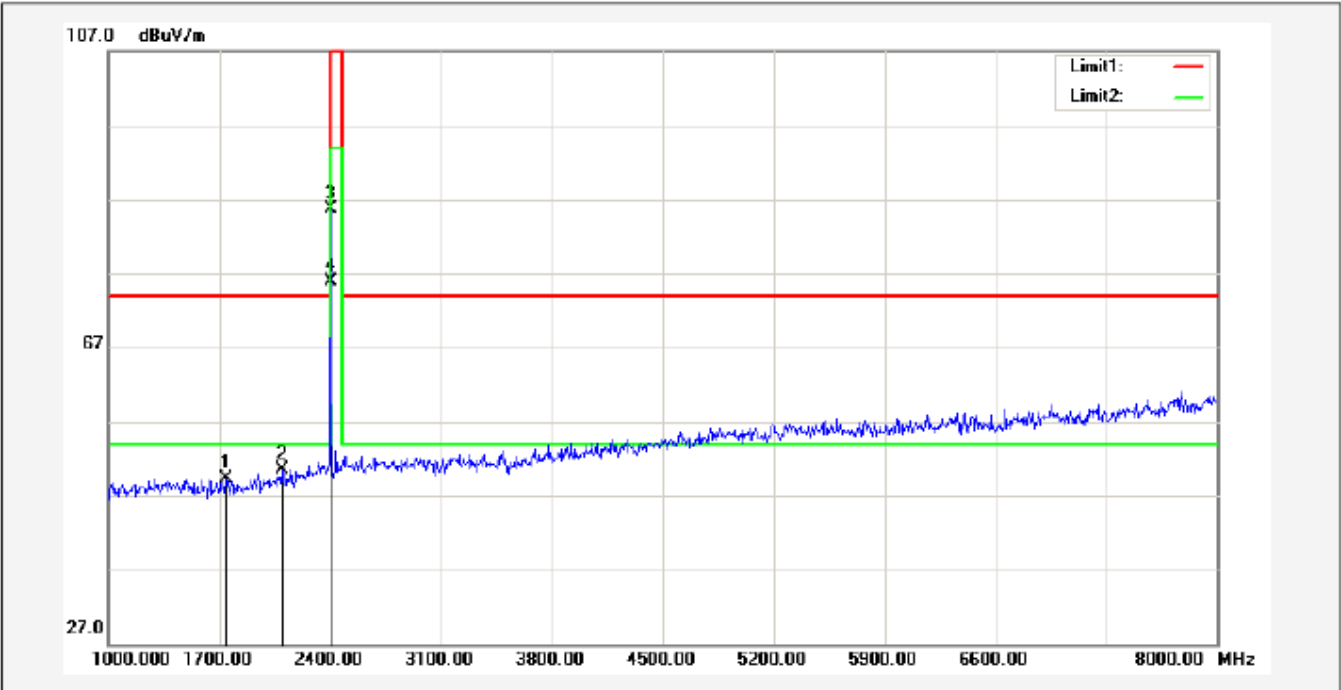

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1742.000	55.75	-6.39	49.36	74.00	-24.64			peak
2	2092.000	55.03	-4.50	50.53	74.00	-23.47			peak
3X	2402.000	88.48	-2.81	85.67	114.00	-28.33			peak
4*	2402.000	78.67	-2.81	75.86	94.00	-18.14			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

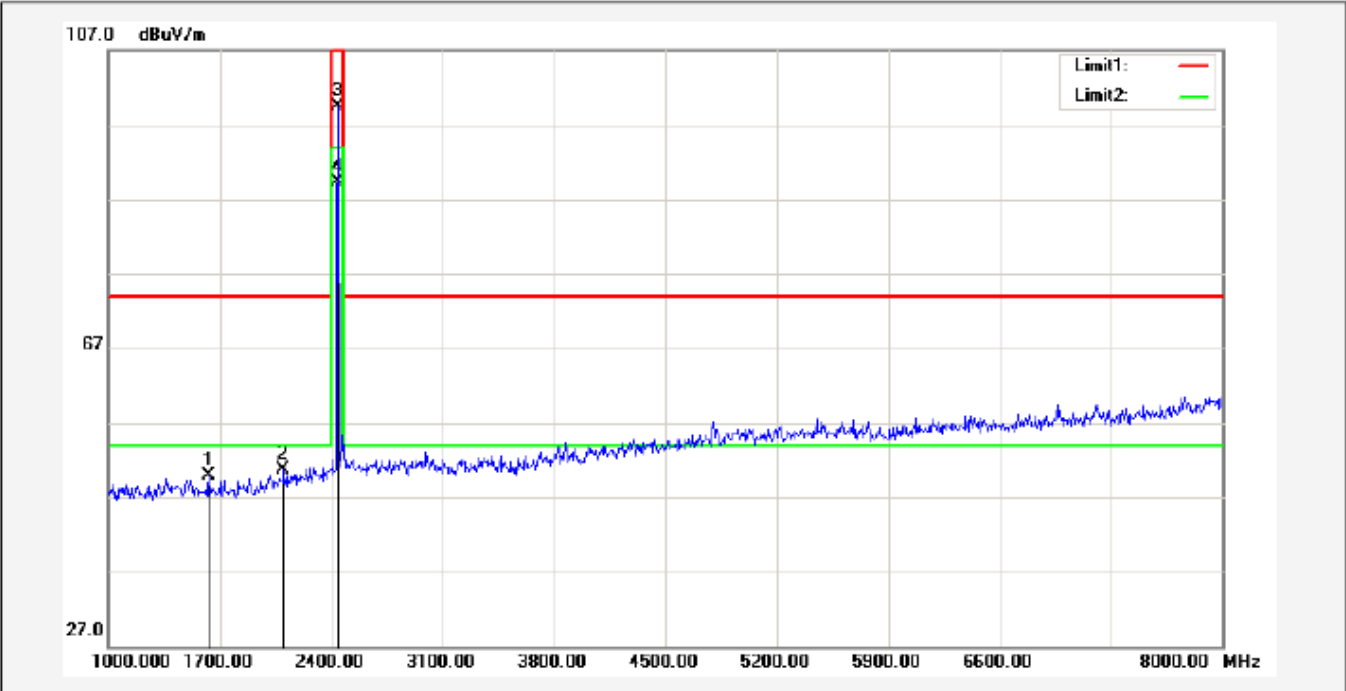

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1630.000	56.47	-6.64	49.83	74.00	-24.17			peak
2	2099.000	55.11	-4.46	50.65	74.00	-23.35			peak
3	2441.000	102.07	-2.58	99.49	114.00	-14.51			peak
4*	2441.000	91.82	-2.58	89.24	94.00	-4.76			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

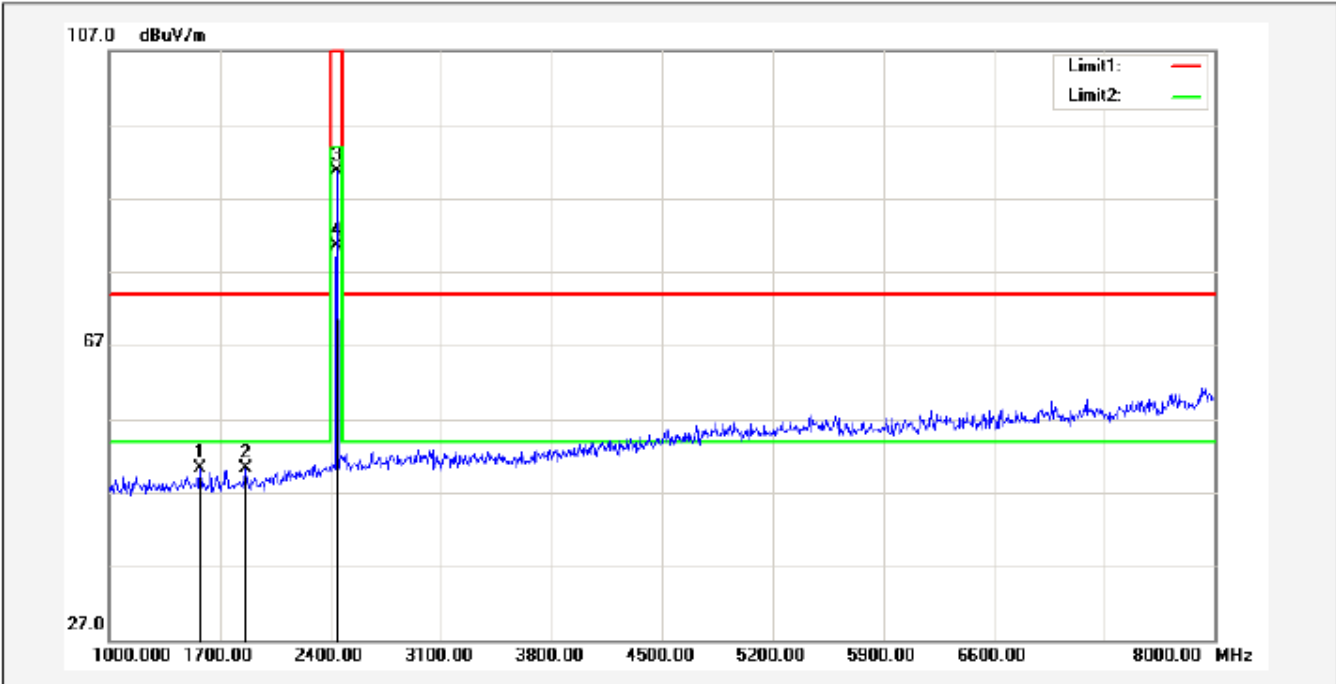

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1574.000	57.10	-6.75	50.35	74.00	-23.65			peak
2	1861.000	56.21	-5.88	50.33	74.00	-23.67			peak
3	2441.000	93.23	-2.58	90.65	114.00	-23.35			peak
4*	2441.000	83.16	-2.58	80.58	94.00	-13.42			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

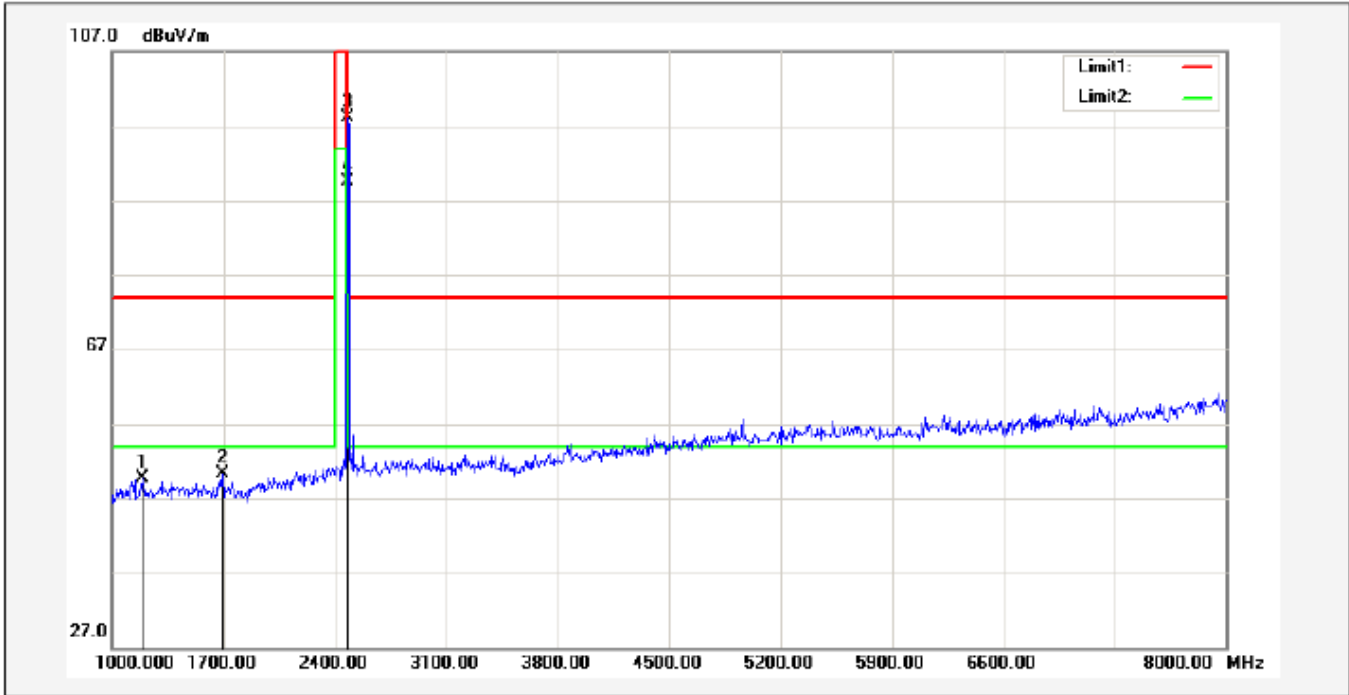

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1189.000	57.62	-7.83	49.79	74.00	-24.21			peak
2	1693.000	56.86	-6.50	50.36	74.00	-23.64			peak
3	2480.000	100.56	-2.39	98.17	114.00	-15.83			peak
4*	2480.000	91.98	-2.39	89.59	94.00	-4.41			AVG

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

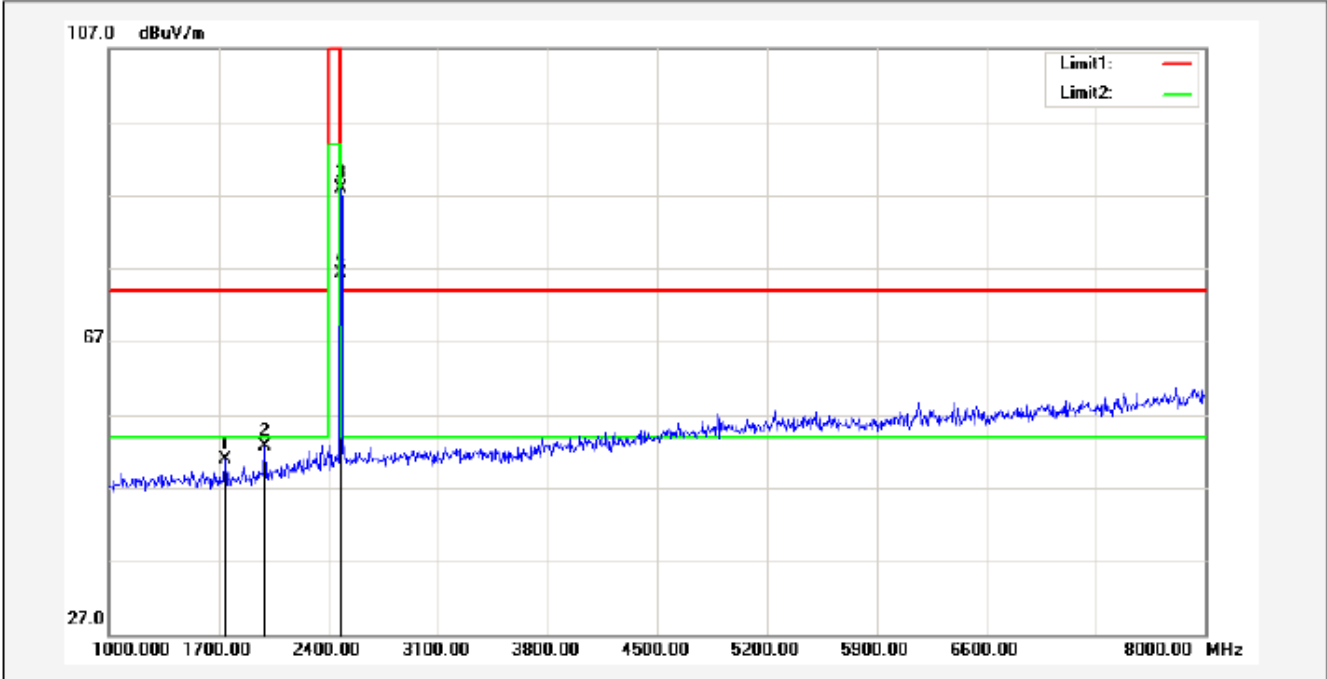

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1742.000	57.22	-6.39	50.83	74.00	-23.17			peak
2	1994.000	57.80	-5.04	52.76	74.00	-21.24			peak
3	2480.000	90.20	-2.39	87.81	114.00	-26.19			peak
4*	2480.000	78.75	-2.39	76.36	94.00	-17.64			AVG

RESULT: PASS

Note: 8~25GHz at least have 20dB margin. No recording in the test report.
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

Peak value


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	99.41	-2.81	96.60	114	-17.40	Horizontal
2402	88.48	-2.81	85.67	114	-28.33	Vertical
2441	102.07	-2.58	99.49	114	-14.51	Horizontal
2441	93.23	-2.58	90.65	114	-23.35	Vertical
2480	100.56	-2.39	98.17	114	-15.83	Horizontal
2480	90.20	-2.39	87.81	114	-26.19	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	89.53	-2.81	86.72	94	-7.28	Horizontal
2402	78.67	-2.81	75.86	94	-18.14	Vertical
2441	91.82	-2.58	89.24	94	-4.76	Horizontal
2441	83.16	-2.58	80.58	94	-13.42	Vertical
2480	91.98	-2.39	89.59	94	-4.41	Horizontal
2480	78.75	-2.39	76.36	94	-17.64	Vertical

FOR BLE


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

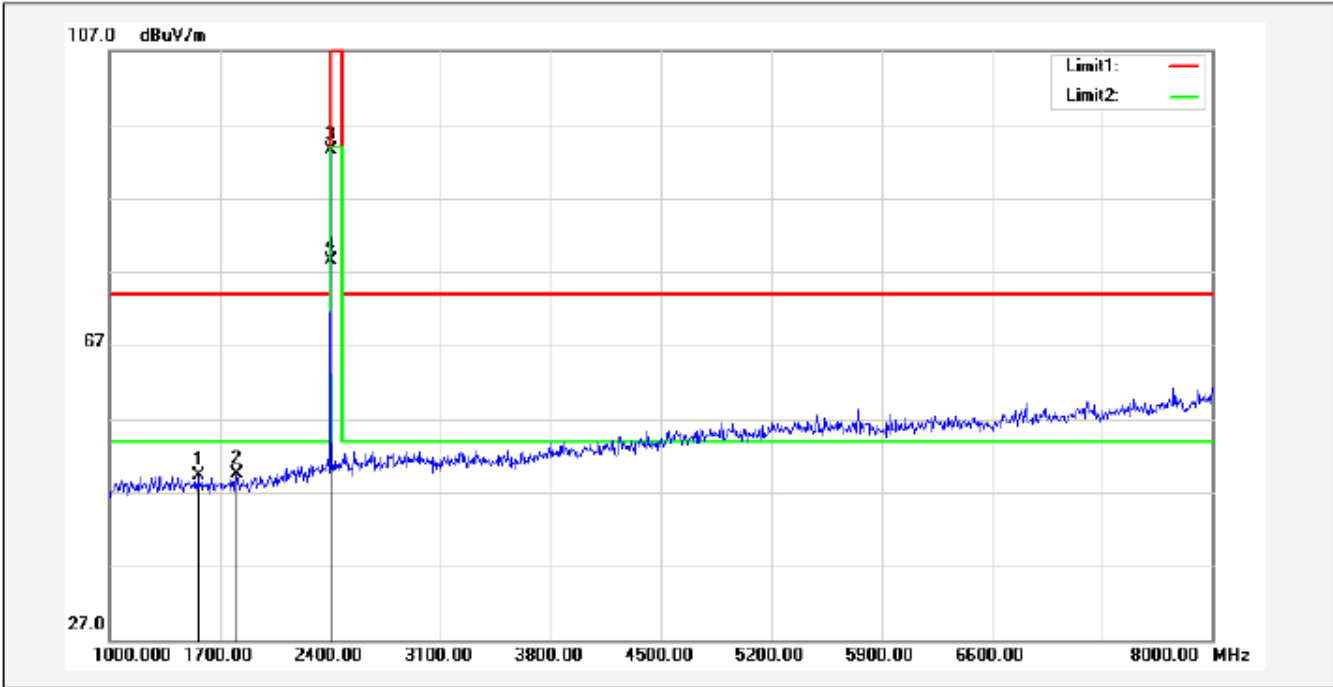

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1560.000	56.06	-6.77	49.29	74.00	-24.71			peak
2	1805.000	55.80	-6.24	49.56	74.00	-24.44			peak
3X	2402.000	96.27	-2.81	93.46	114.00	-20.54			peak
4*	2402.000	81.41	-2.81	78.60	94.00	-15.40			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL- VERTICAL

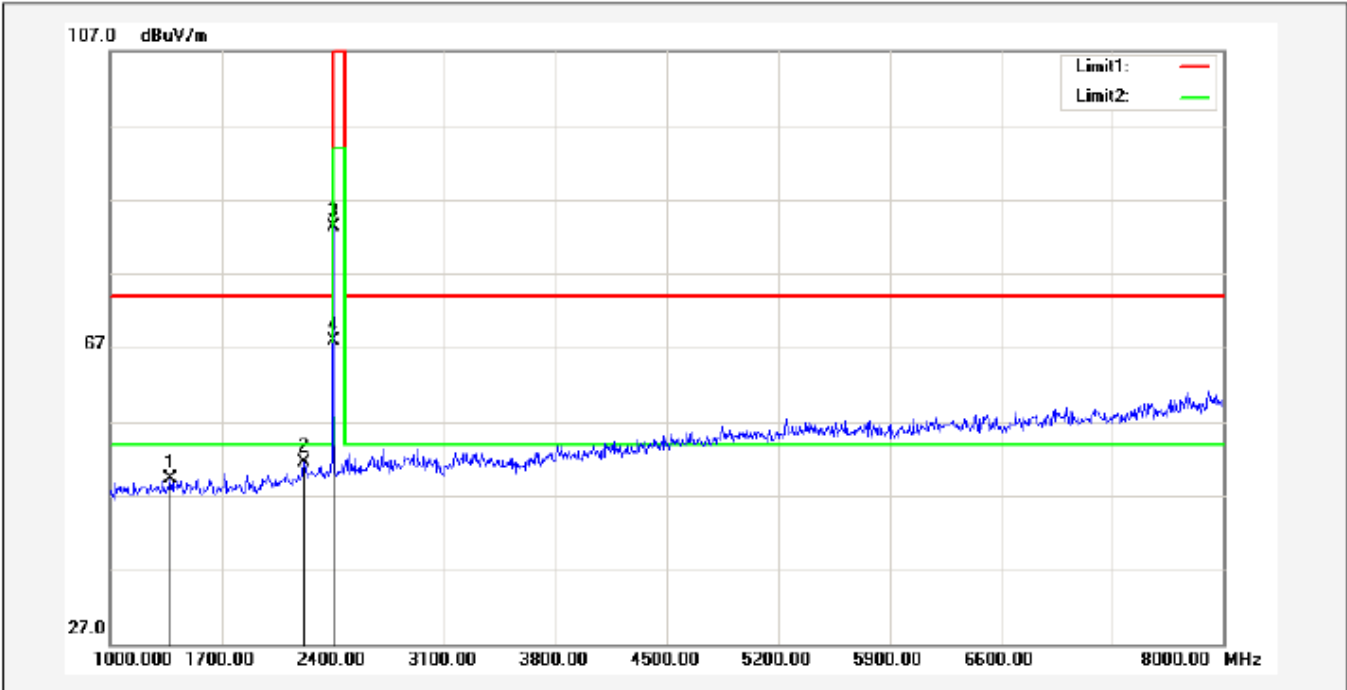

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1378.000	56.45	-7.14	49.31	74.00	-24.69			peak
2	2218.000	55.28	-3.81	51.47	74.00	-22.53			peak
3X	2402.000	86.10	-2.81	83.29	114.00	-30.71			peak
4*	2402.000	70.63	-2.81	67.82	94.00	-26.18			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

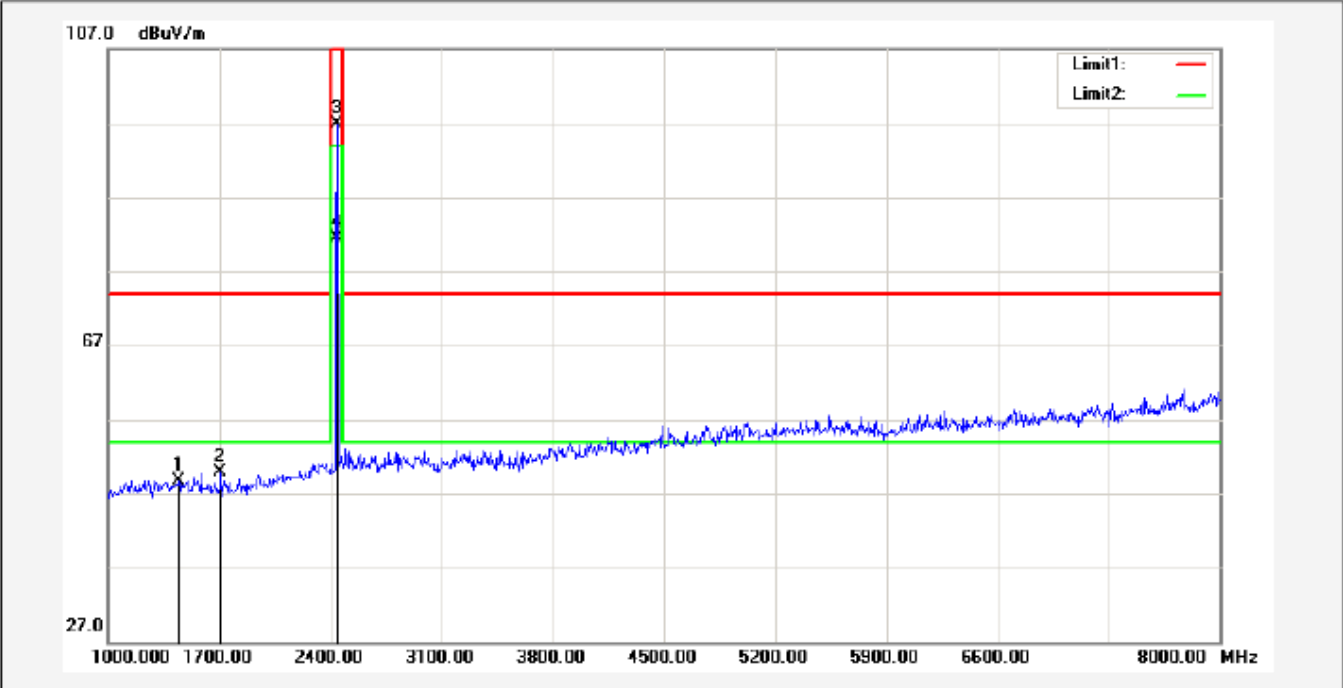

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1441.000	55.77	-6.99	48.78	74.00	-25.22			peak
2	1707.000	56.37	-6.47	49.90	74.00	-24.10			peak
3	2440.000	99.58	-2.58	97.00	114.00	-17.00			peak
4*	2440.000	84.16	-2.58	81.58	94.00	-12.42			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL- VERTICAL

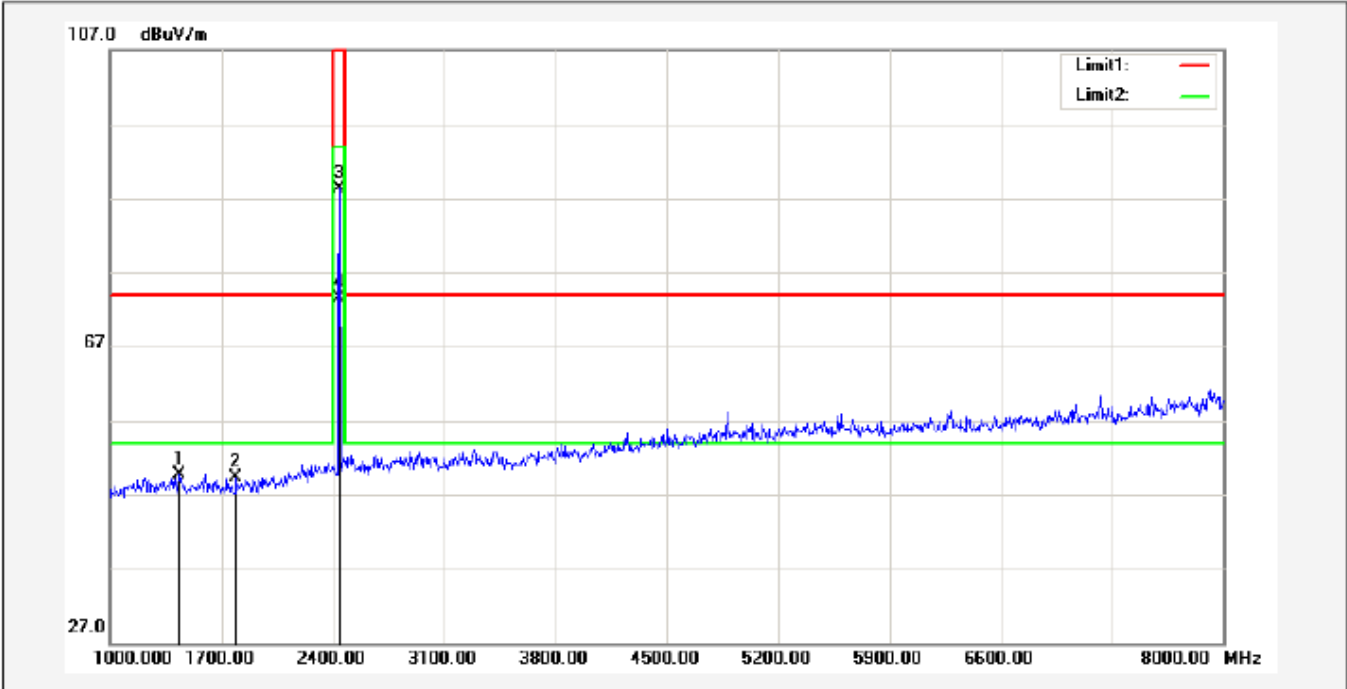

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1434.000	56.78	-7.00	49.78	74.00	-24.22			peak
2	1791.000	55.59	-6.29	49.30	74.00	-24.70			peak
3	2440.000	90.98	-2.58	88.40	114.00	-25.60			peak
4*	2440.000	76.06	-2.58	73.48	94.00	-20.52			AVG

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL-HORIZONTAL

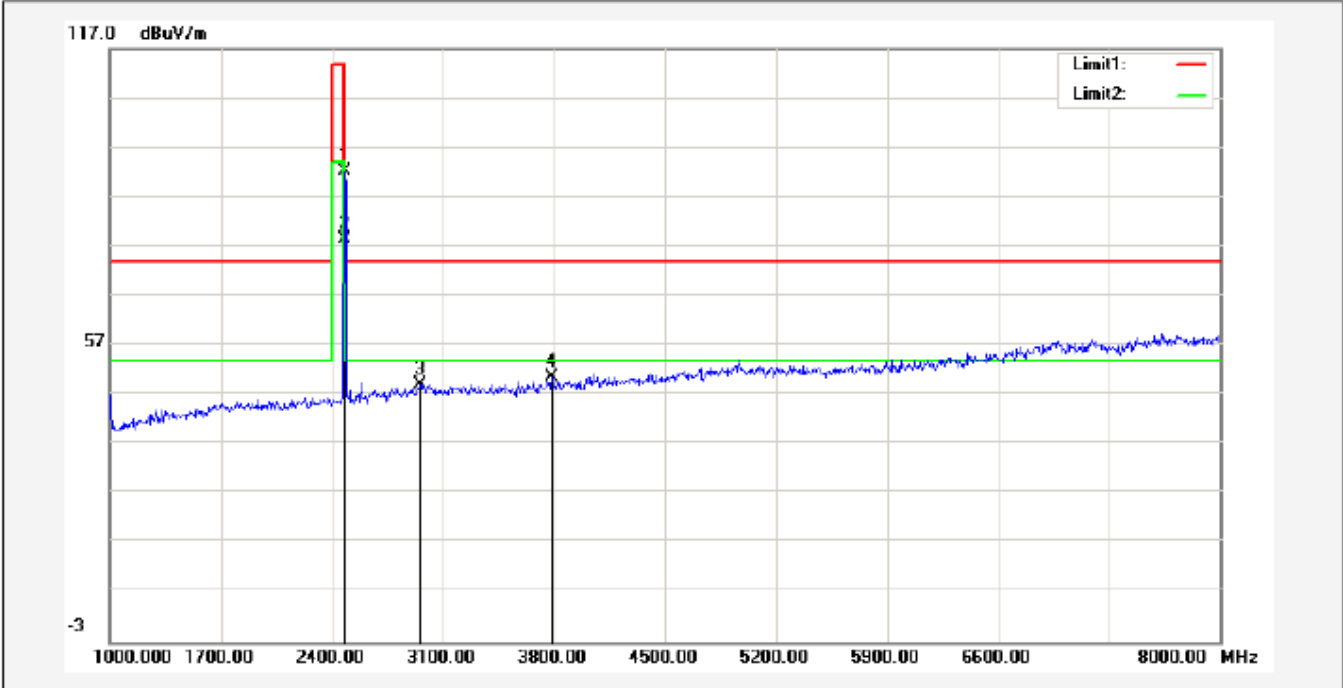

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2480.000	95.58	-2.39	93.19	114.00	-20.81			peak
2*	2480.000	80.60	-2.39	78.21	94.00	-15.79			AVG
3	2953.000	53.19	-4.03	49.16	74.00	-24.84			peak
4	3786.000	52.38	-1.83	50.55	74.00	-23.45			peak

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHZ)-HIGH CHANNEL- VERTICAL

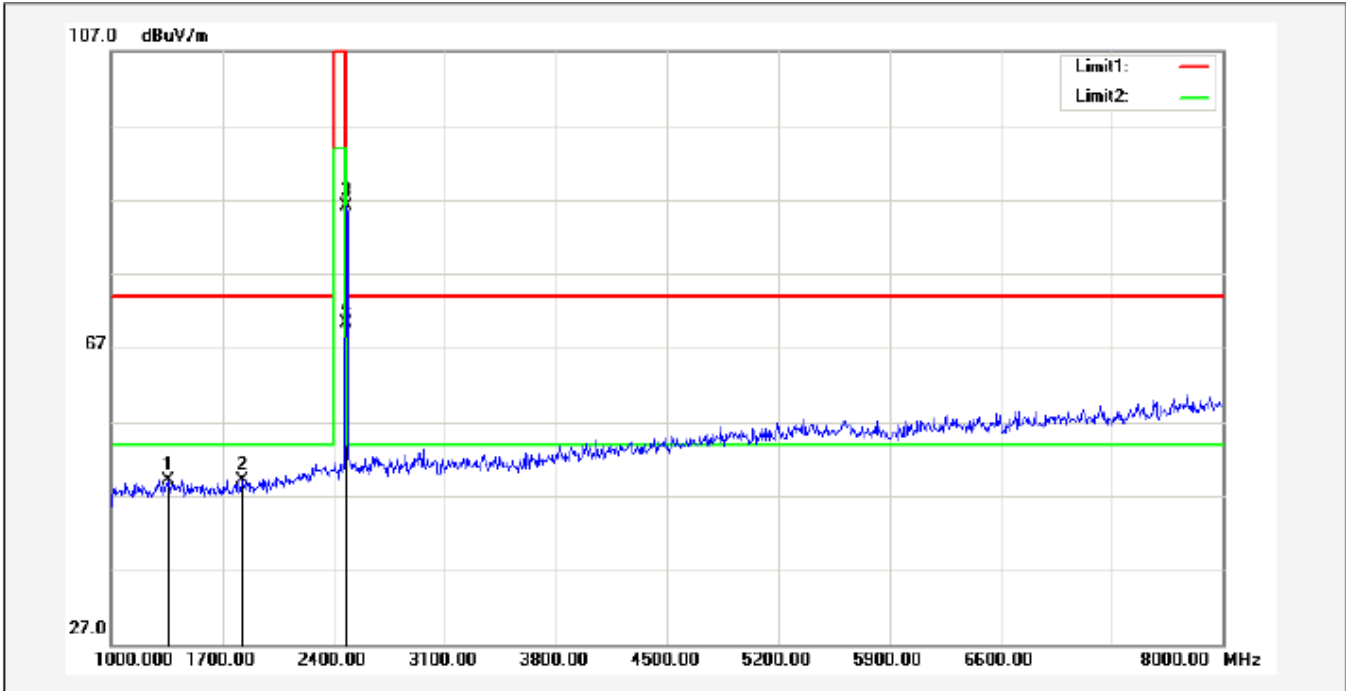

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	1357.000	56.41	-7.22	49.19	74.00	-24.81			peak
2	1826.000	55.29	-6.10	49.19	74.00	-24.81			peak
3	2480.000	88.54	-2.39	86.15	114.00	-27.85			peak
4*	2480.000	72.75	-2.39	70.36	94.00	-23.64			AVG

RESULT: PASS

Note: 8~25GHz at least have 20dB margin. No recording in the test report.
 Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
 The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	96.27	-2.81	93.46	114	-20.54	Horizontal
2402	86.10	-2.81	83.29	114	-30.71	Vertical
2440	99.58	-2.58	97.00	114	-17.00	Horizontal
2440	90.98	-2.58	88.40	114	-25.60	Vertical
2480	95.58	-2.39	93.19	114	-20.81	Horizontal
2480	88.54	-2.39	86.15	114	-27.85	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.41	-2.81	78.60	94	-15.40	Horizontal
2402	70.63	-2.81	67.82	94	-26.18	Vertical
2440	84.16	-2.58	81.58	94	-12.42	Horizontal
2440	76.06	-2.58	73.48	94	-20.52	Vertical
2480	80.60	-2.39	78.21	94	-15.79	Horizontal
2480	72.75	-2.39	70.39	94	-23.64	Vertical

9. BAND EDGE EMISSION

9.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.


3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=VBW=1.5MHz / Sweep=AUTO

9.2 TEST SETUP

RADIATED EMISSION TEST SETUP

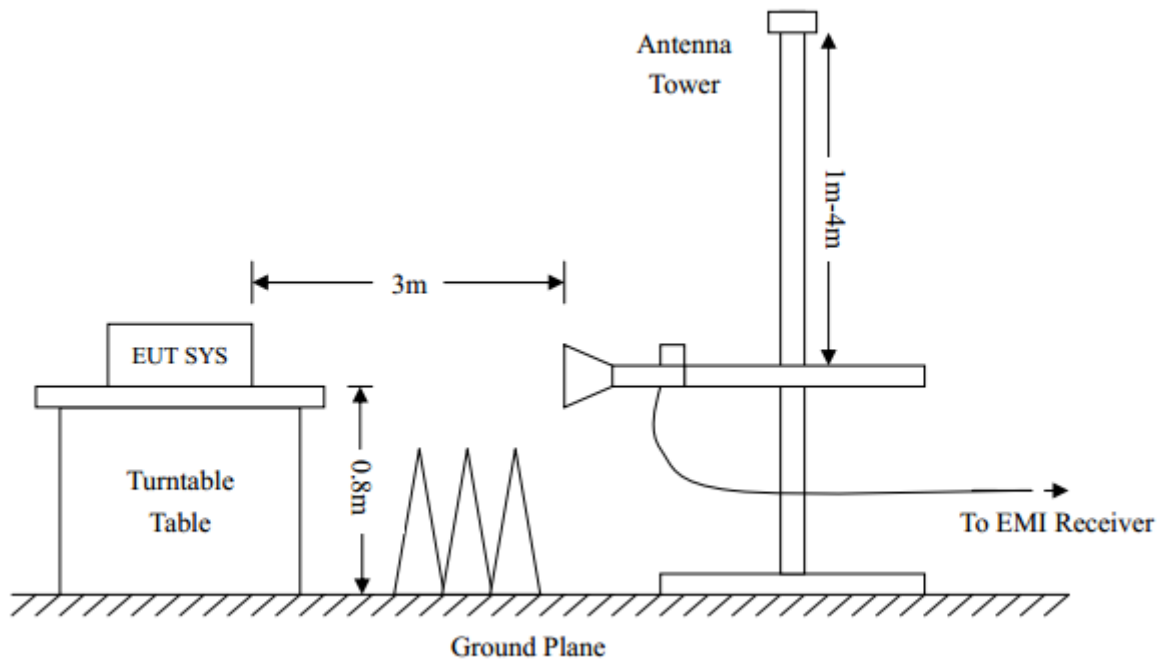


CONDUCTED TEST SETUP

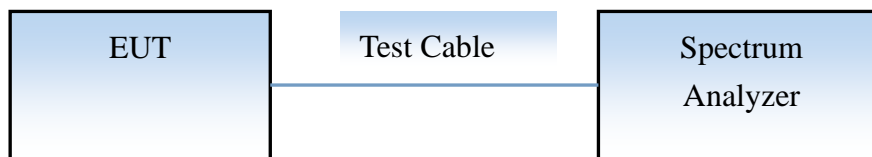


9.3 RADIATED TEST RESULT
(Worst modulation:GFSK)
FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

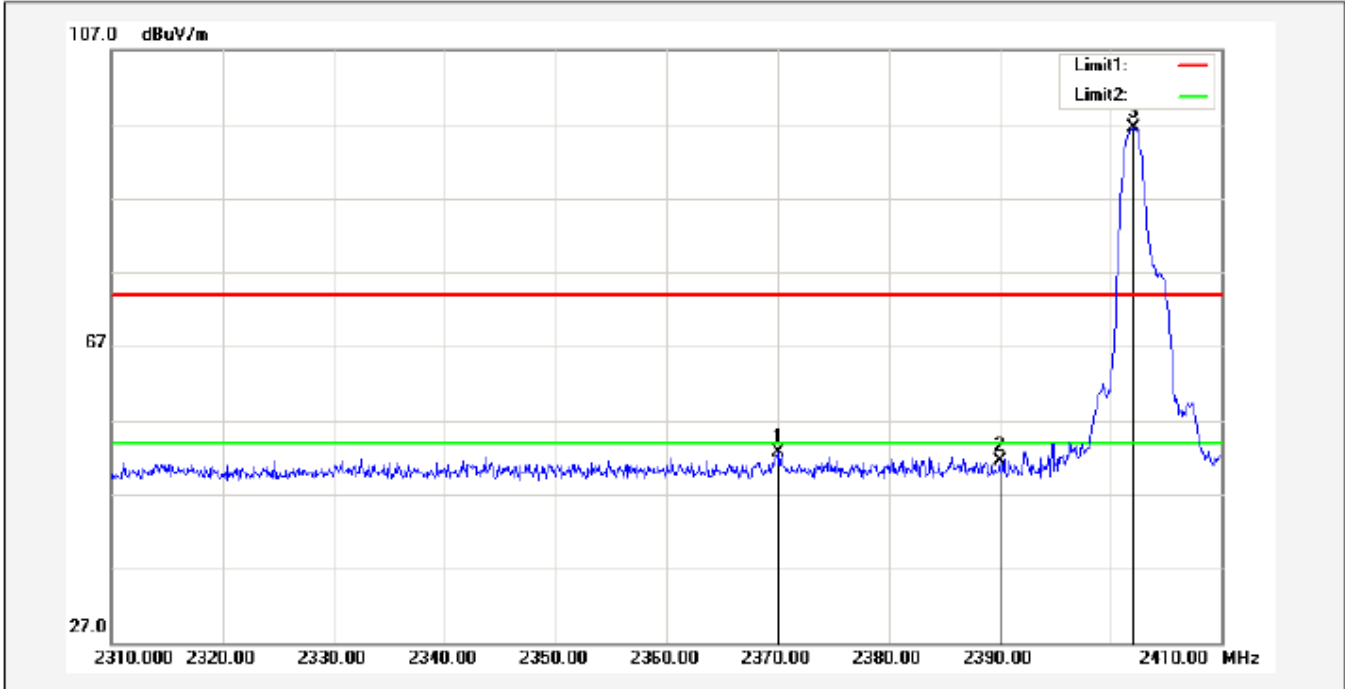


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2370.000	55.76	-2.97	52.79	74.00	-21.21			peak
2	2390.000	54.36	-2.86	51.50	74.00	-22.50			peak
3*	2402.100	99.25	-2.80	96.45	74.00	22.45			peak

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

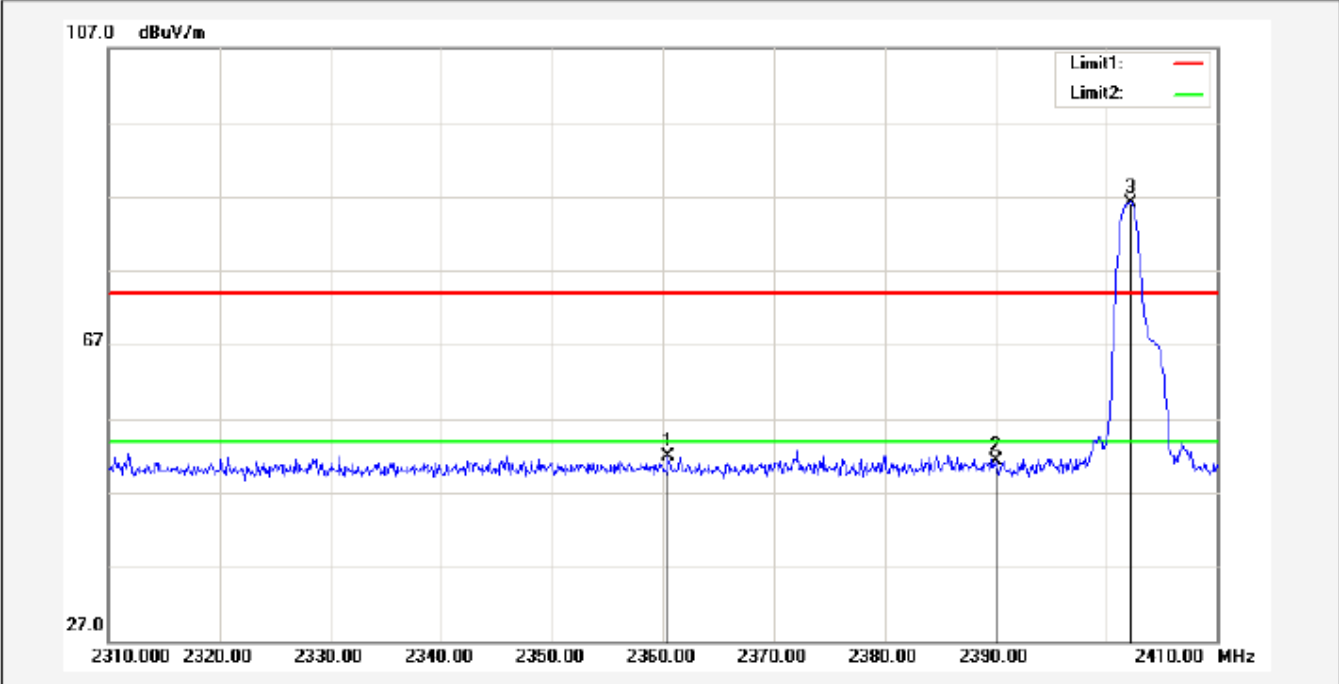


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2360.500	54.84	-3.02	51.82	74.00	-22.18			peak
2	2390.000	54.10	-2.86	51.24	74.00	-22.76			peak
3*	2402.200	89.00	-2.80	86.20	74.00	12.20			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

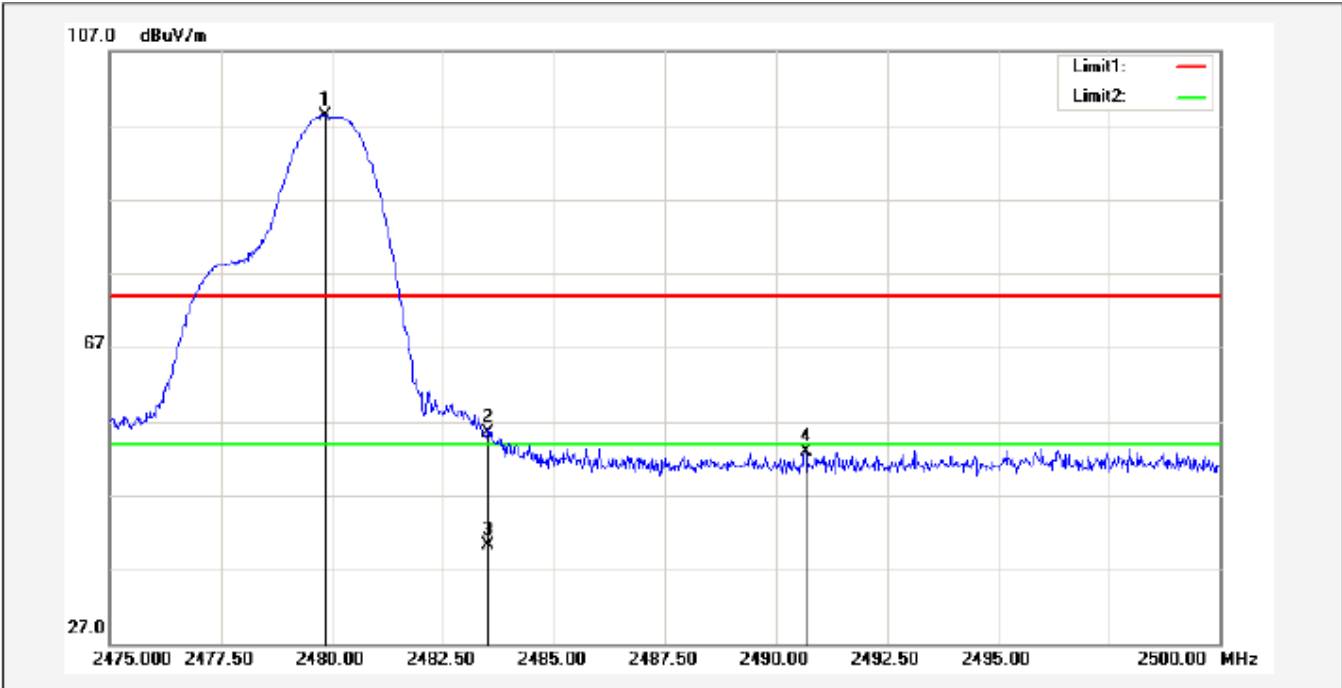

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.850	100.73	-2.37	98.36	74.00	24.36			peak
2	2483.500	57.95	-2.35	55.60	74.00	-18.40			peak
3	2483.500	42.63	-2.35	40.28	54.00	-13.72			AVG
4	2490.675	55.14	-2.31	52.83	74.00	-21.17			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

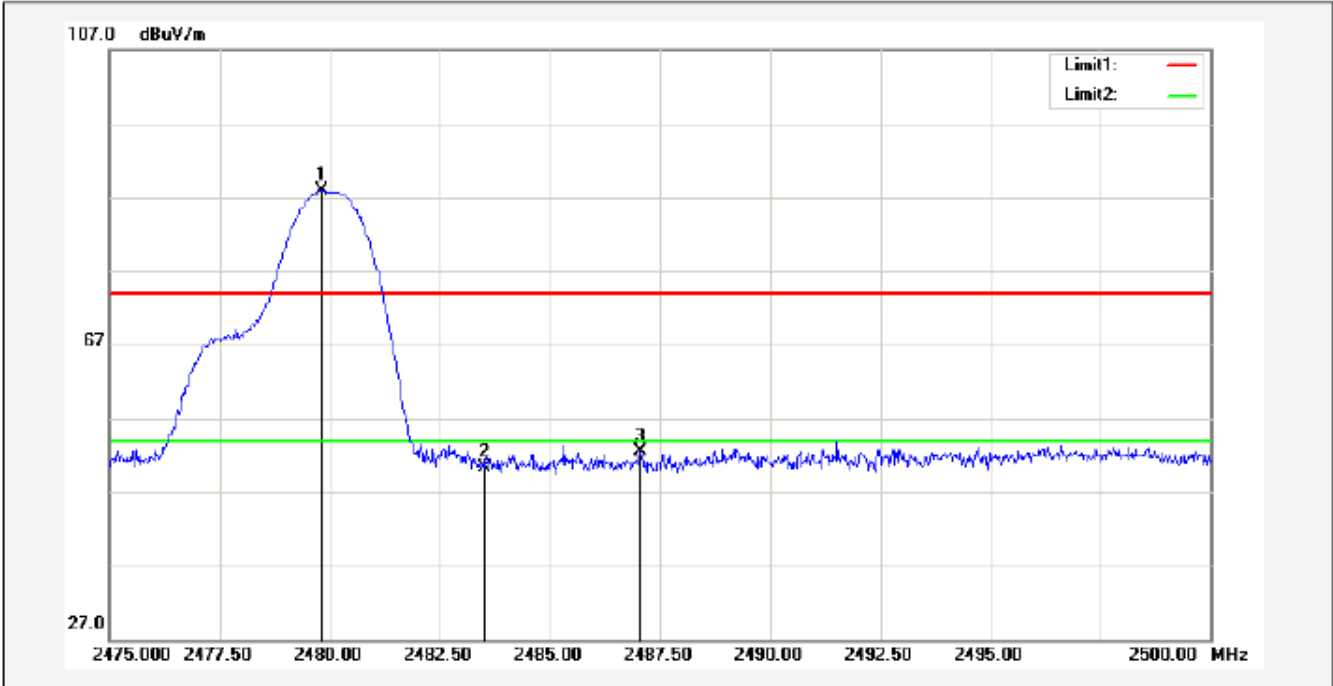

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.825	90.29	-2.37	87.92	74.00	13.92			peak
2	2483.500	52.63	-2.35	50.28	74.00	-23.72			peak
3	2487.050	54.75	-2.33	52.42	74.00	-21.58			peak

RESULT: PASS


Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

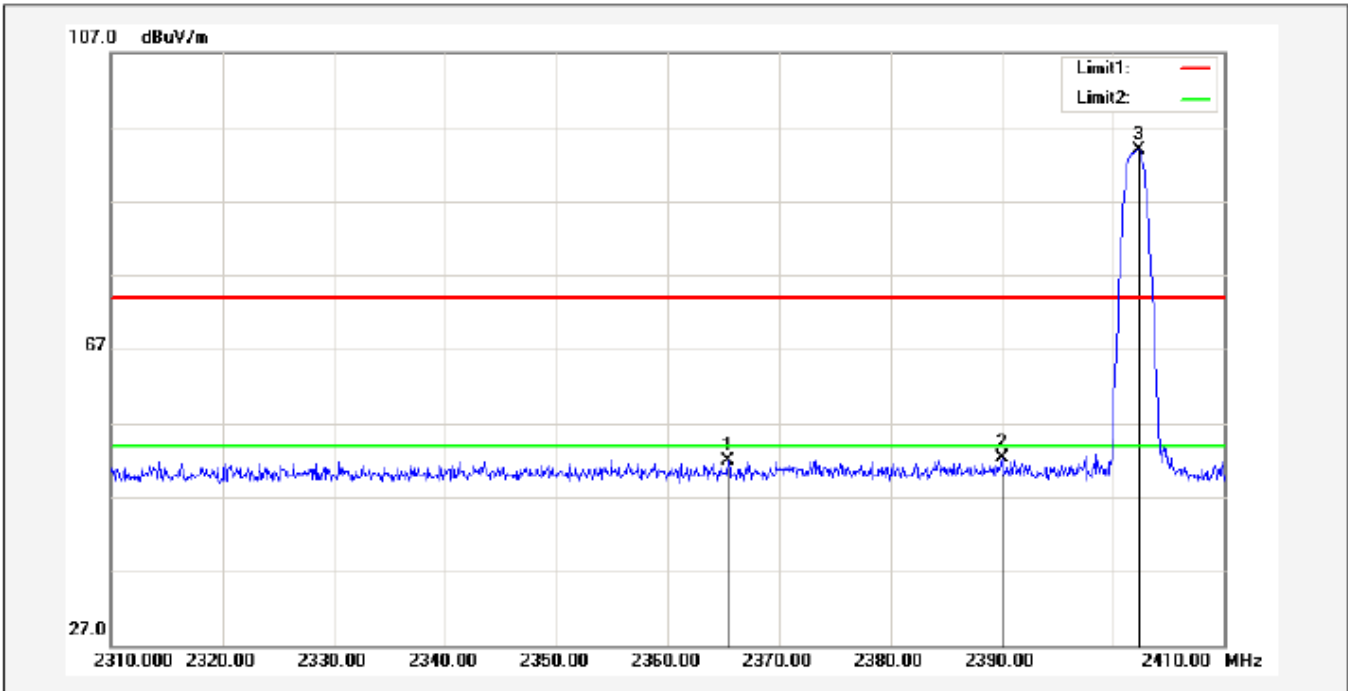


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2365.400	54.88	-3.00	51.88	74.00	-22.12			peak
2	2390.000	55.16	-2.86	52.30	74.00	-21.70			peak
3*	2402.300	96.70	-2.80	93.90	74.00	19.90			peak

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

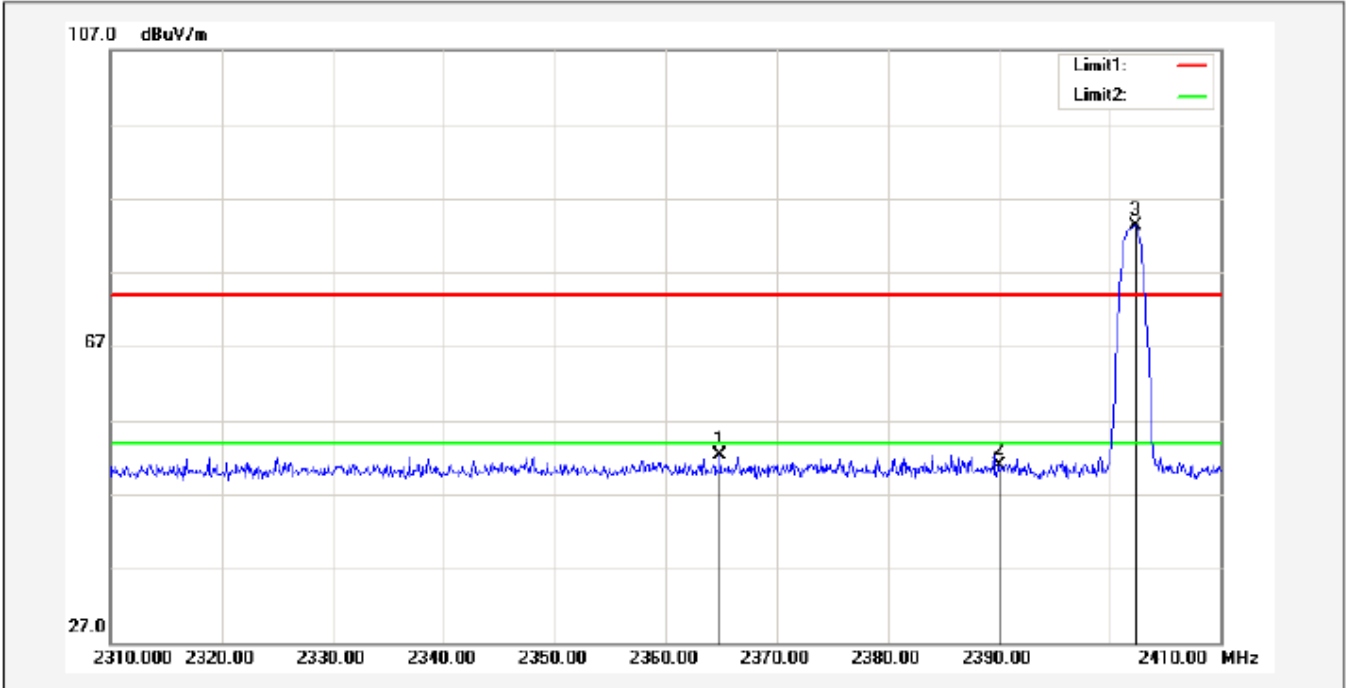


No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	2364.900	55.29	-3.00	52.29	74.00	-21.71			peak
2	2390.000	53.75	-2.86	50.89	74.00	-23.11			peak
3*	2402.300	86.17	-2.80	83.37	74.00	9.37			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

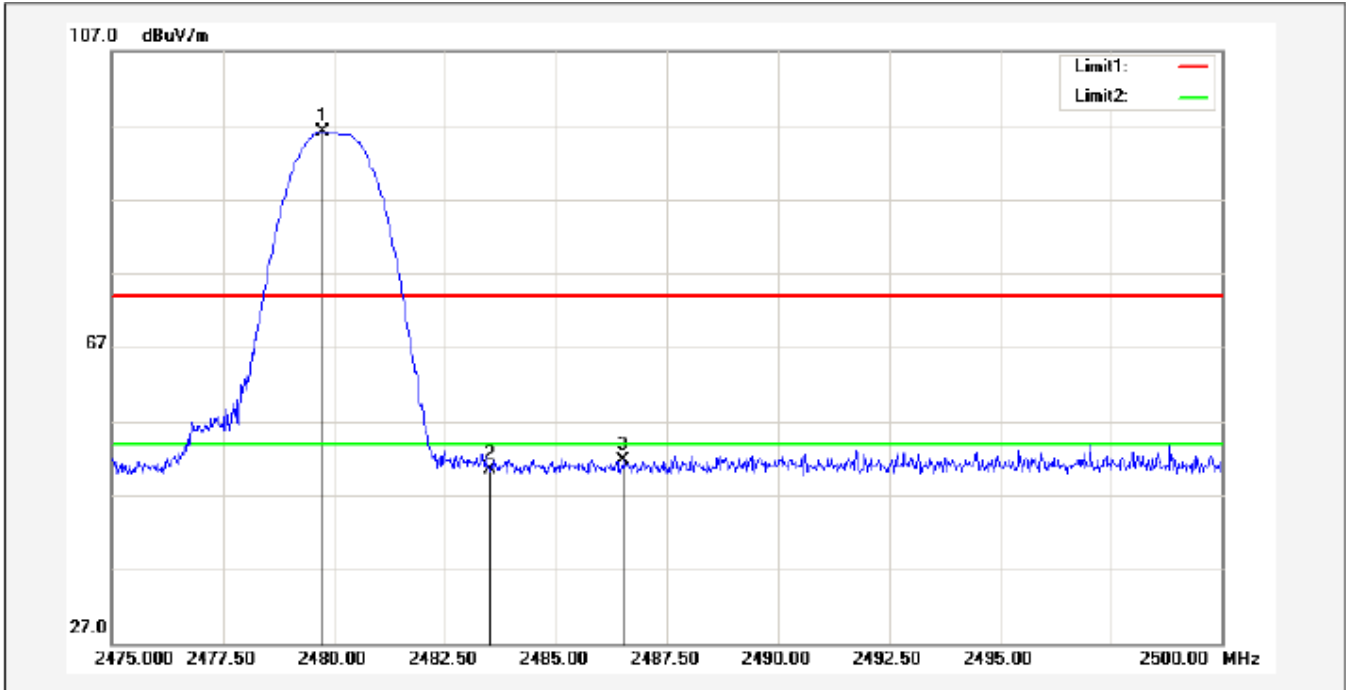

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.750	98.53	-2.37	96.16	74.00	22.16			peak
2	2483.500	52.80	-2.35	50.45	74.00	-23.55			peak
3	2486.525	53.99	-2.33	51.66	74.00	-22.34			peak

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

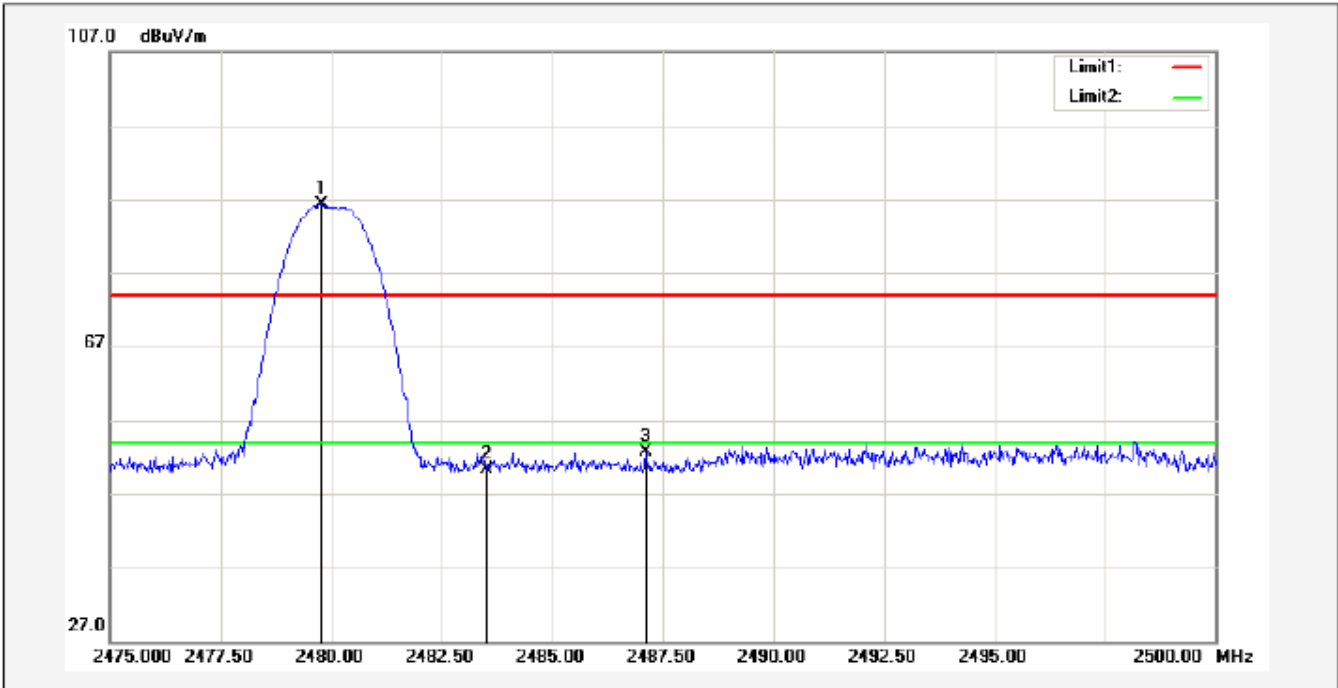

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	2479.775	88.67	-2.37	86.30	74.00	12.30			peak
2	2483.500	52.73	-2.35	50.38	74.00	-23.62			peak
3	2487.100	55.10	-2.33	52.77	74.00	-21.23			peak

RESULT: PASS

Note: The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


10. 20DB BANDWIDTH

10.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP

(BLOCK DIAGRAM OF CONFIGURATION)

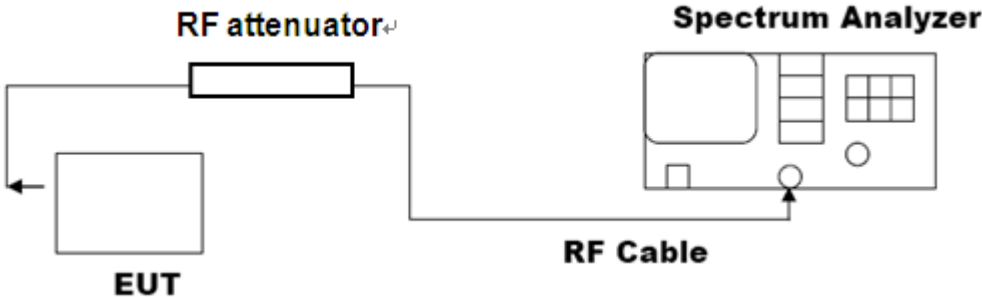

10.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.132	PASS
	Middle Channel	1.130	PASS
	High Channel	1.124	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

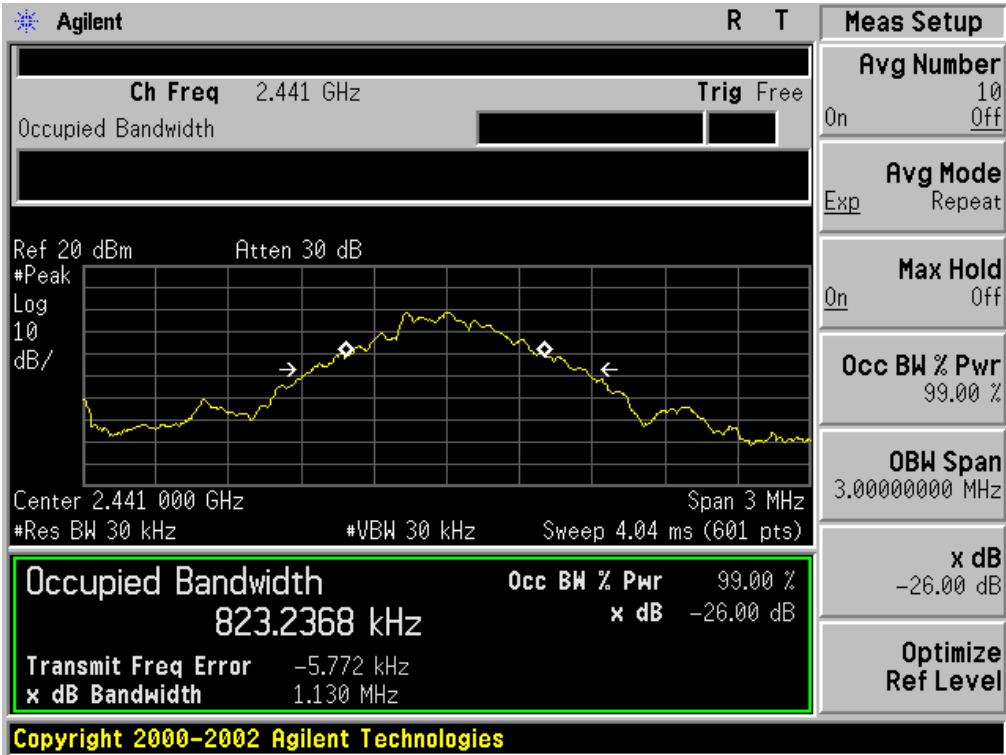


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

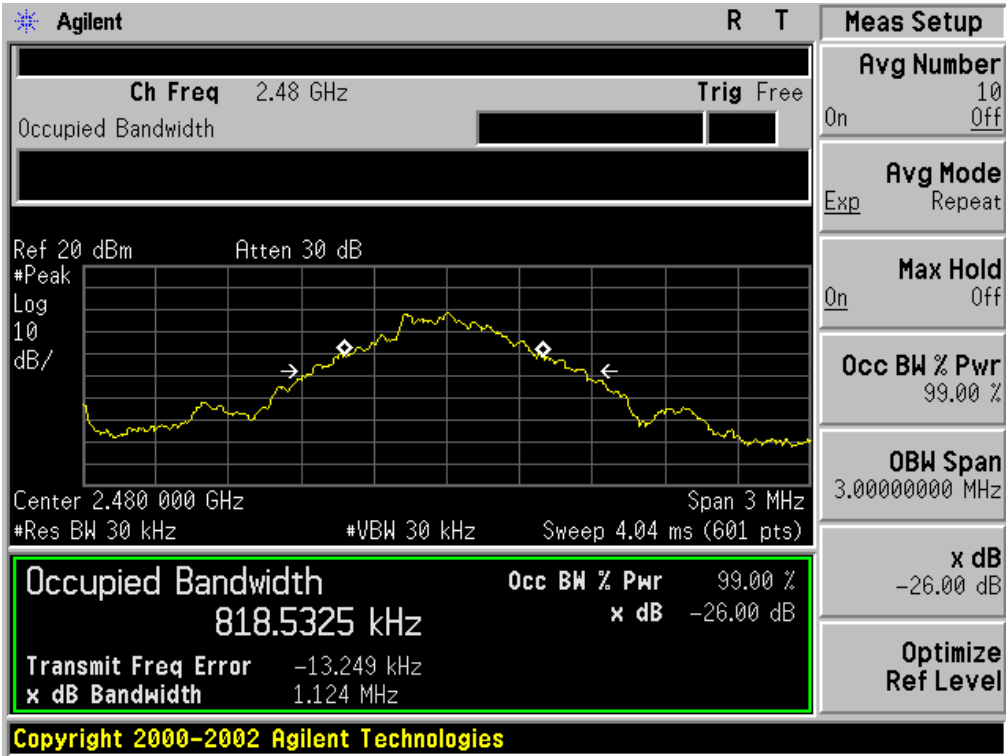


BLUETOOTH 2Mbps LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.366	PASS
	Middle Channel	1.375	PASS
	High Channel	1.377	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

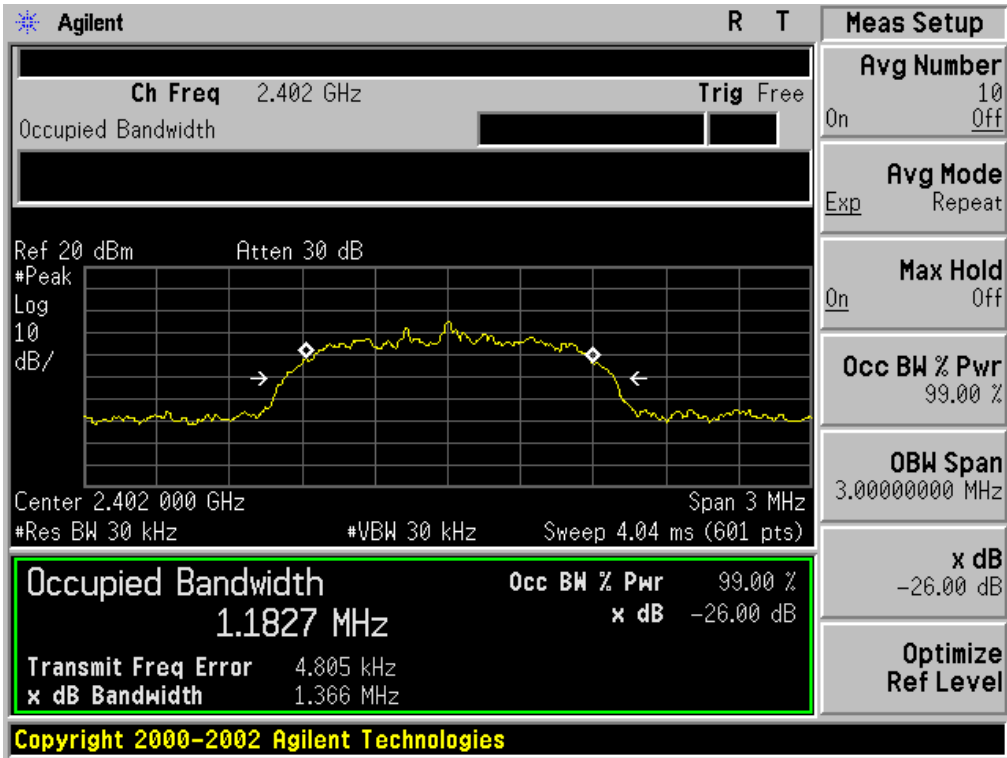

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

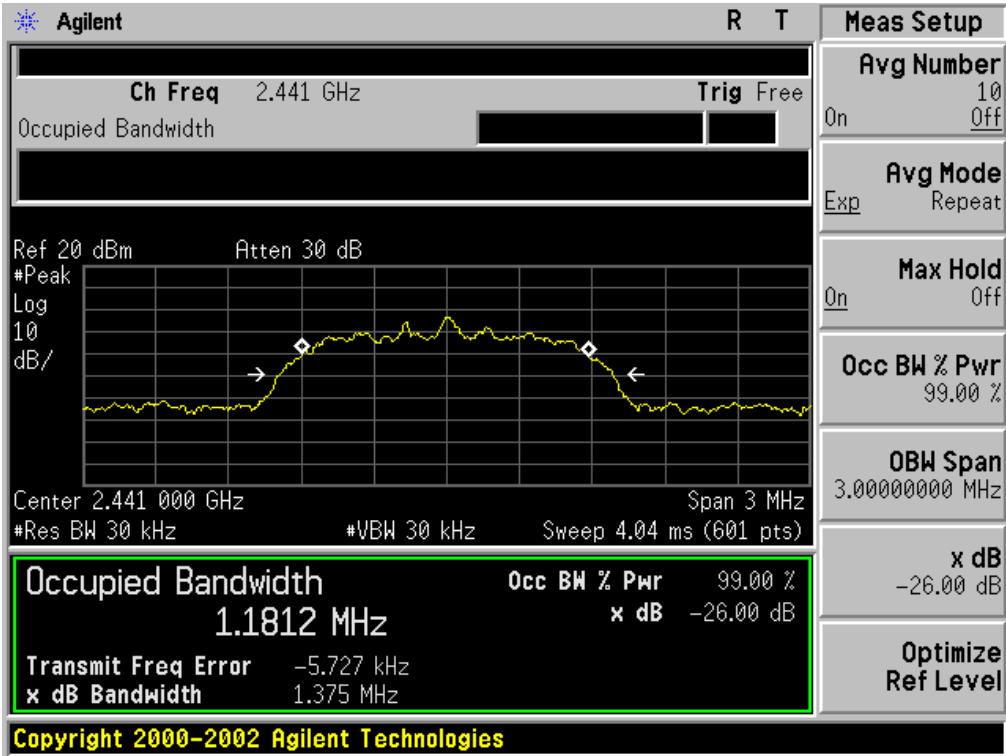


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

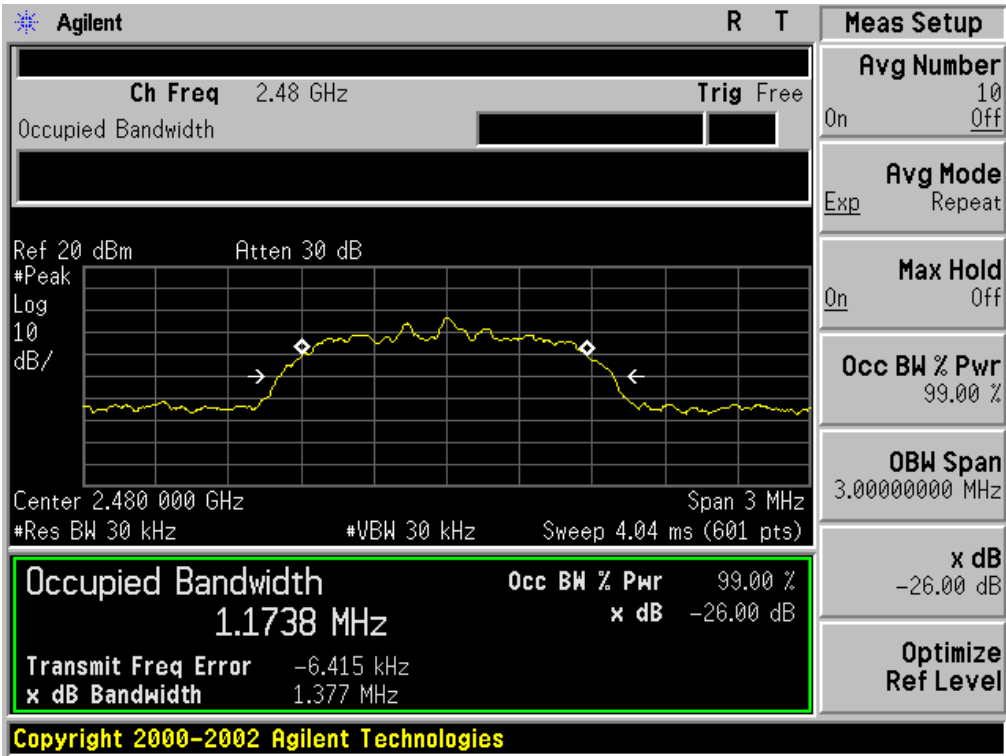


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.358	PASS
	Middle Channel	1.390	PASS
	High Channel	1.358	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

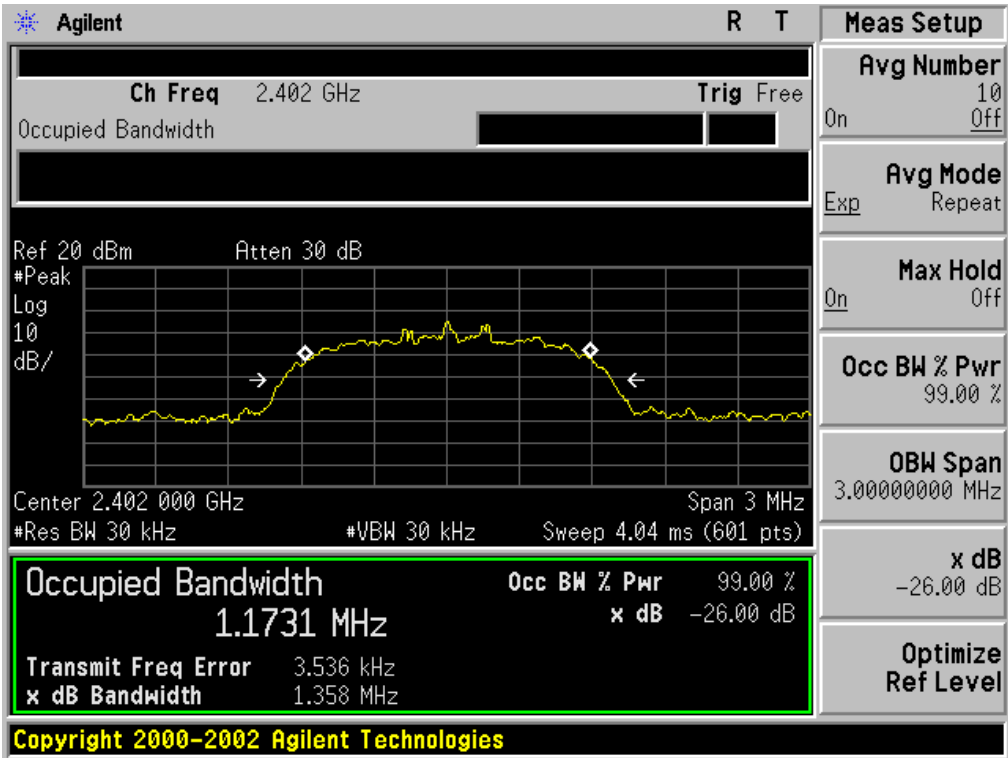

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

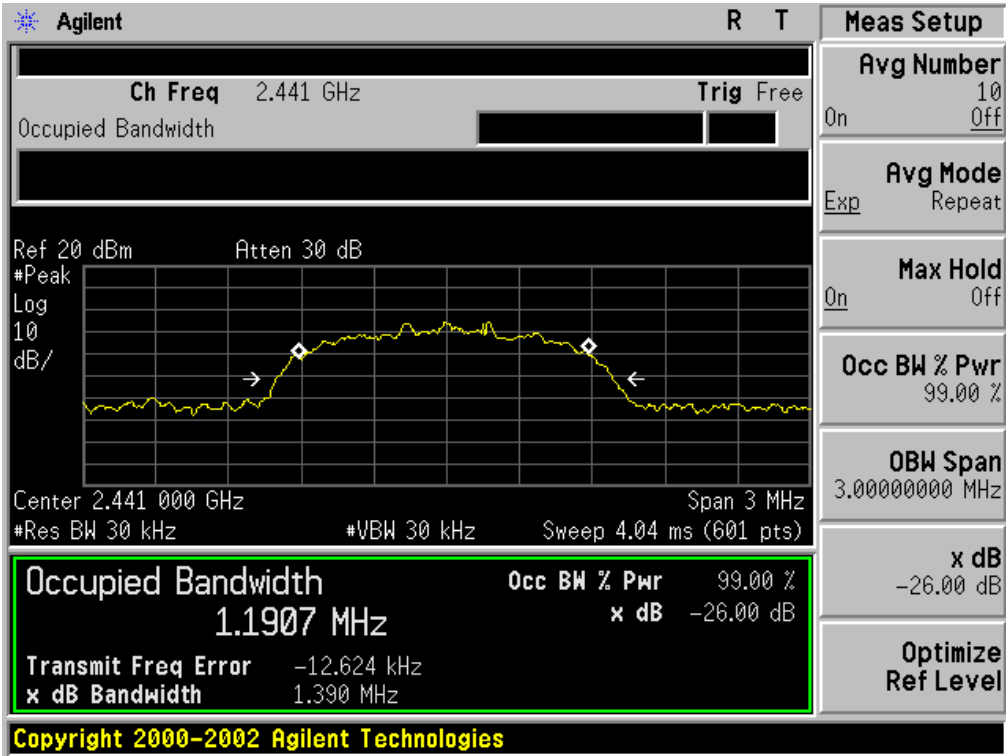


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

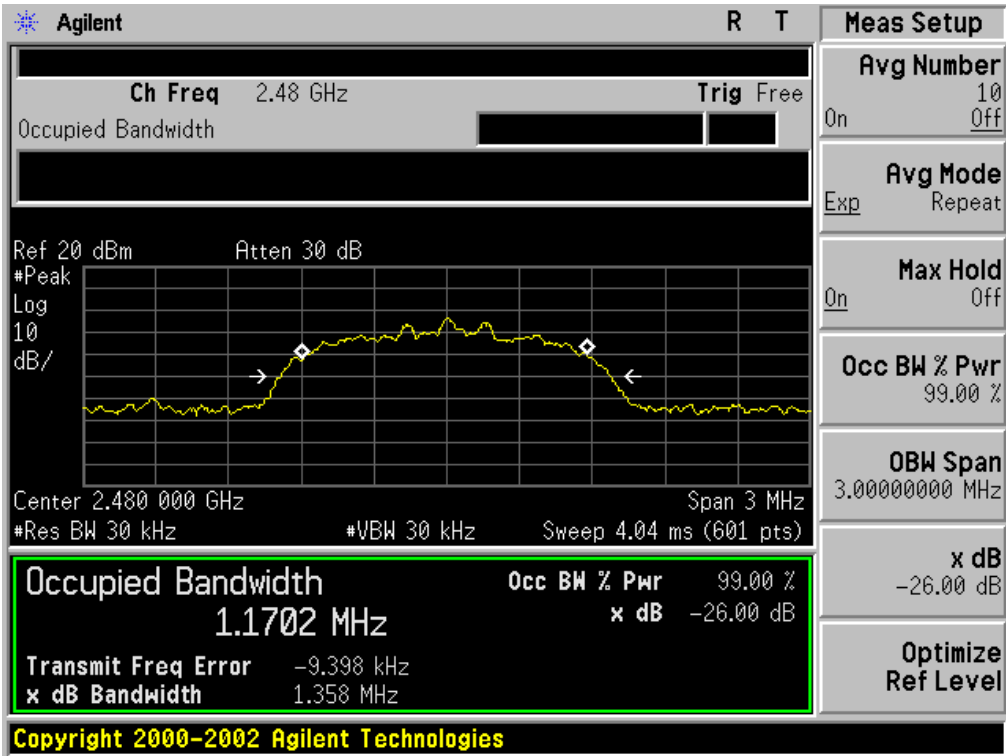


FOR BLE

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT			
Applicable Limits	Measurement Result		
	Test Data (MHz)		Criteria
N/A	Low Channel	1.208	PASS
	Middle Channel	1.204	PASS
	High Channel	1.197	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

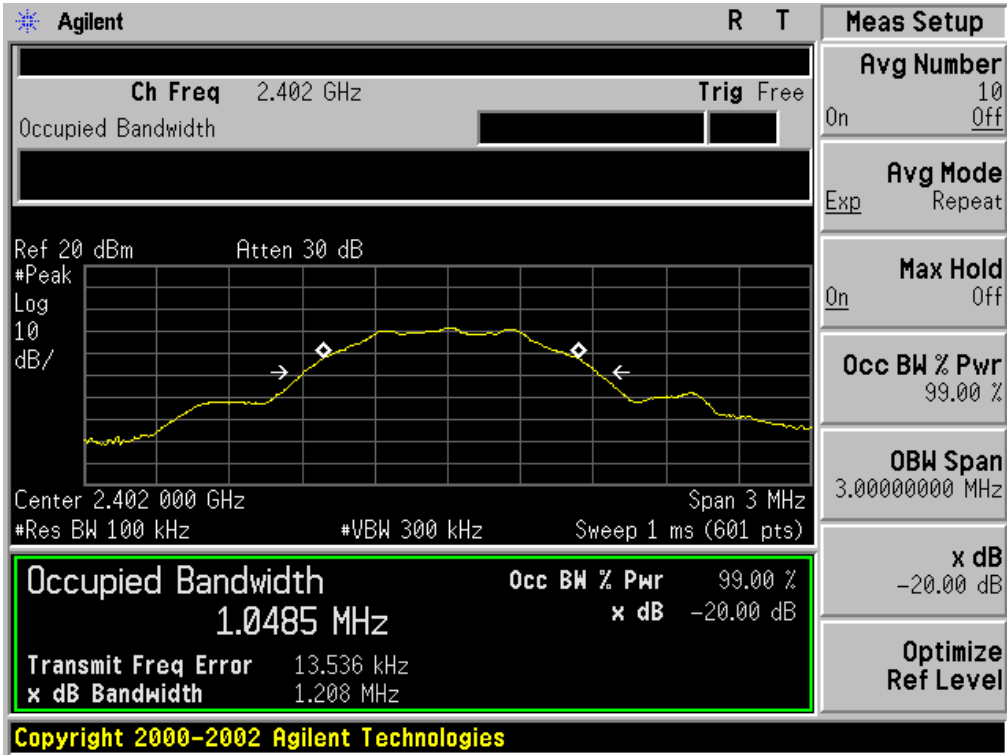

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

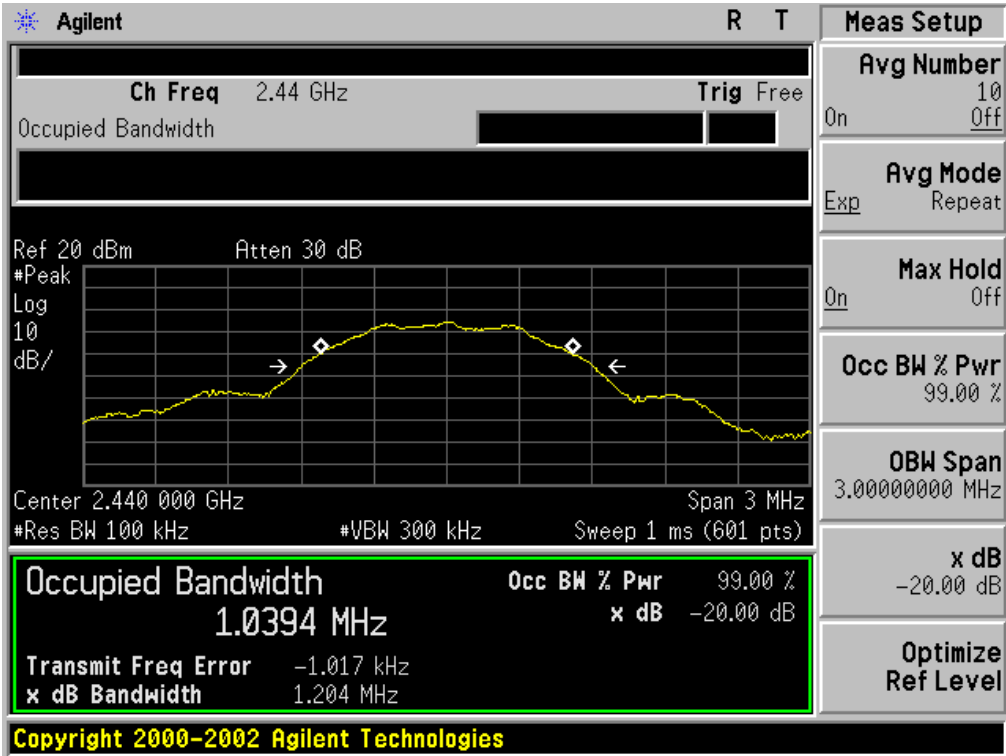

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

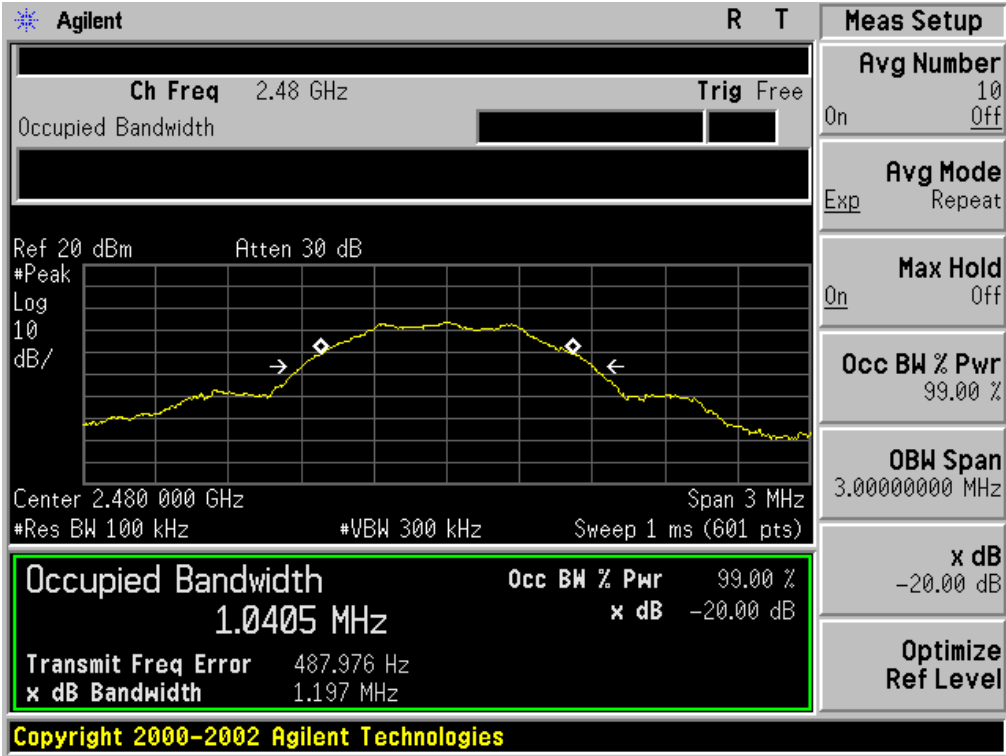

11. FCC LINE CONDUCTED EMISSION TEST


11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

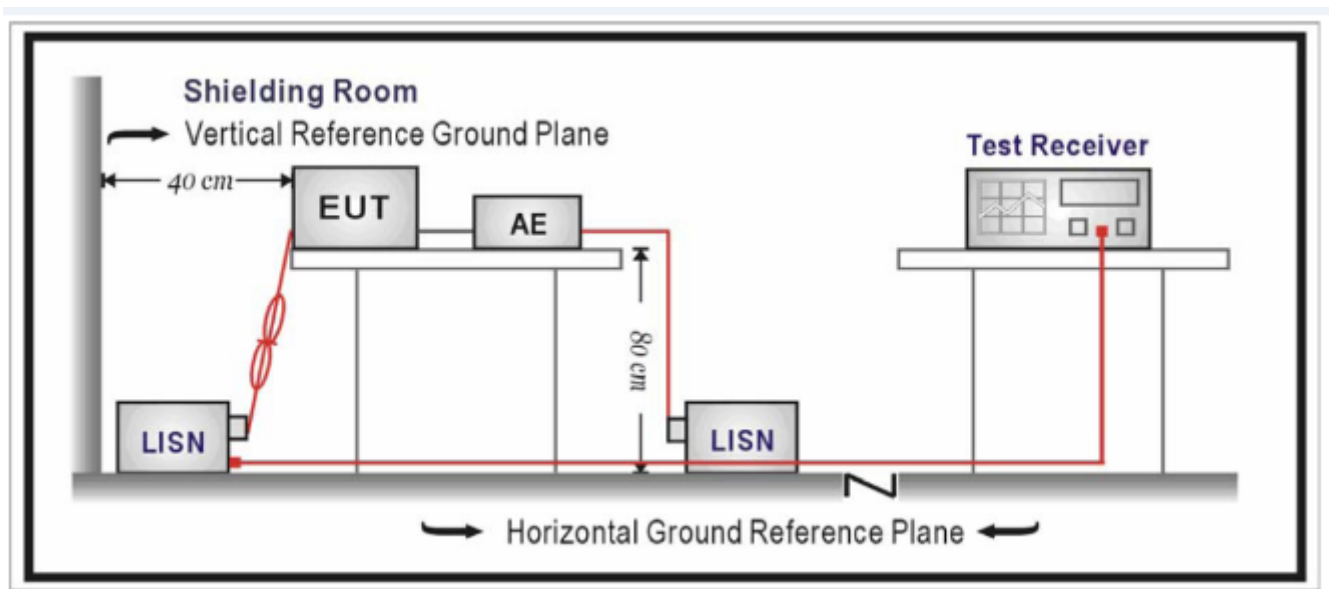

11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by PC which received 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC RADIATED EMISSION TEST SETUP

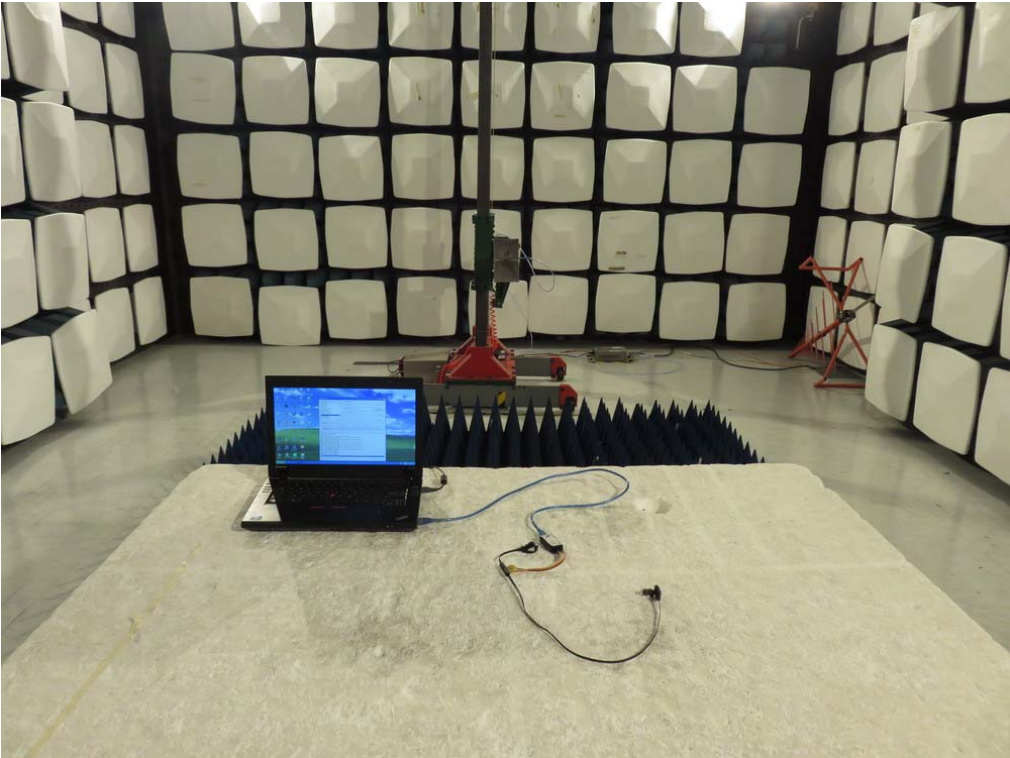

APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT

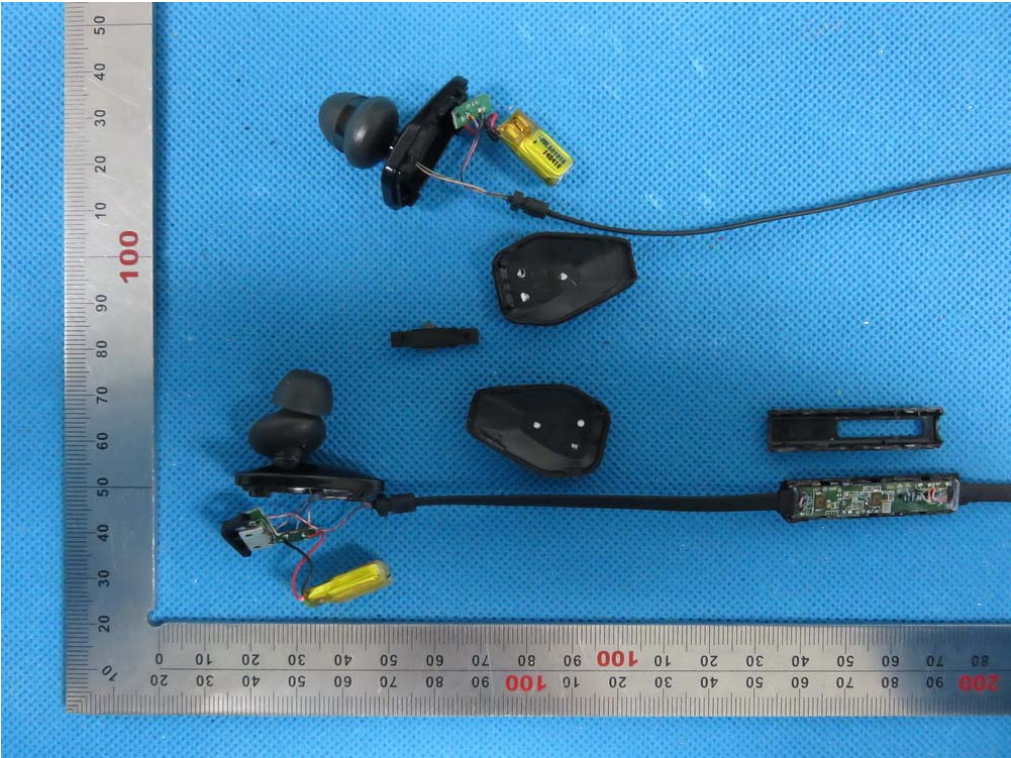


INTERNAL VIEW OF EUT-1

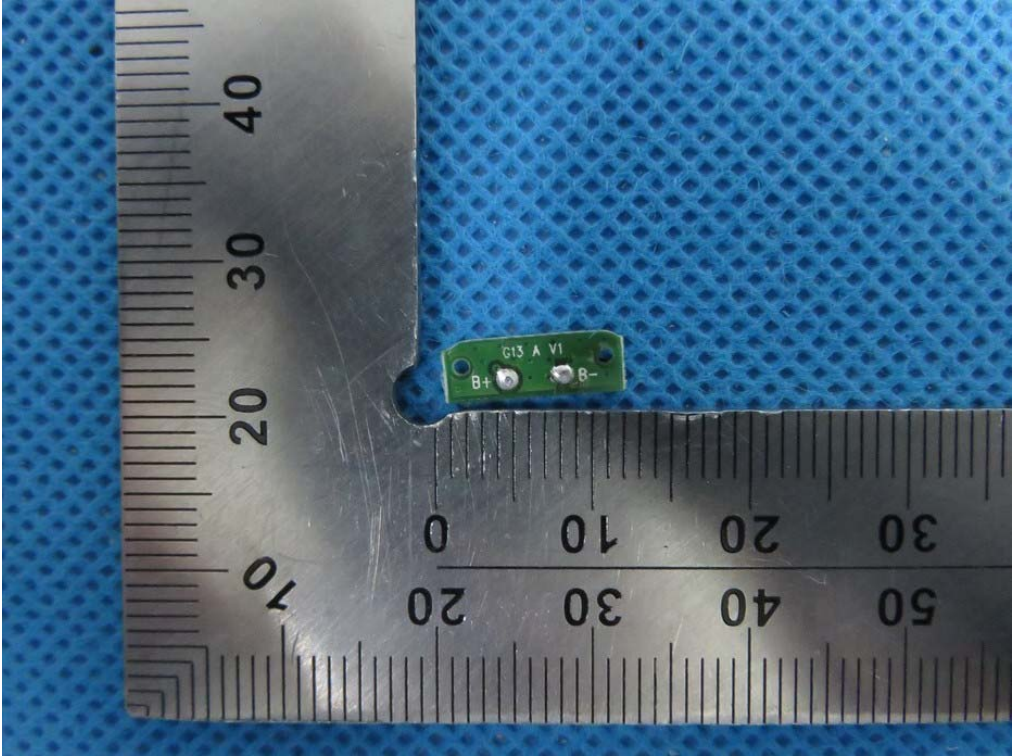


INTERNAL VIEW OF EUT-2

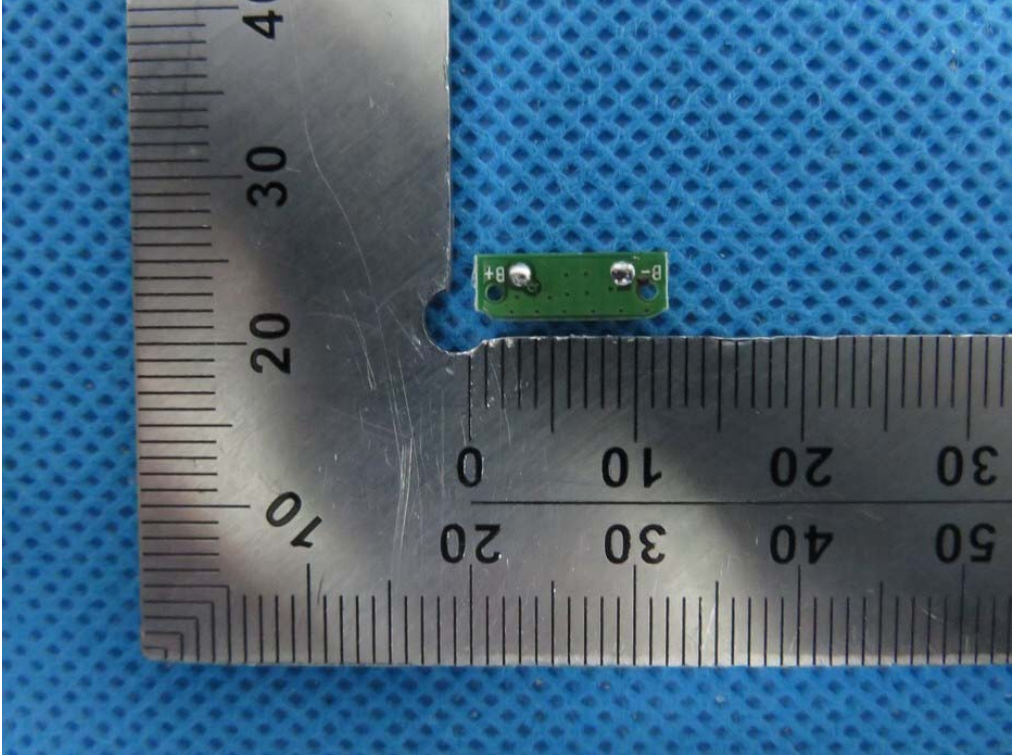


INTERNAL VIEW OF EUT-3

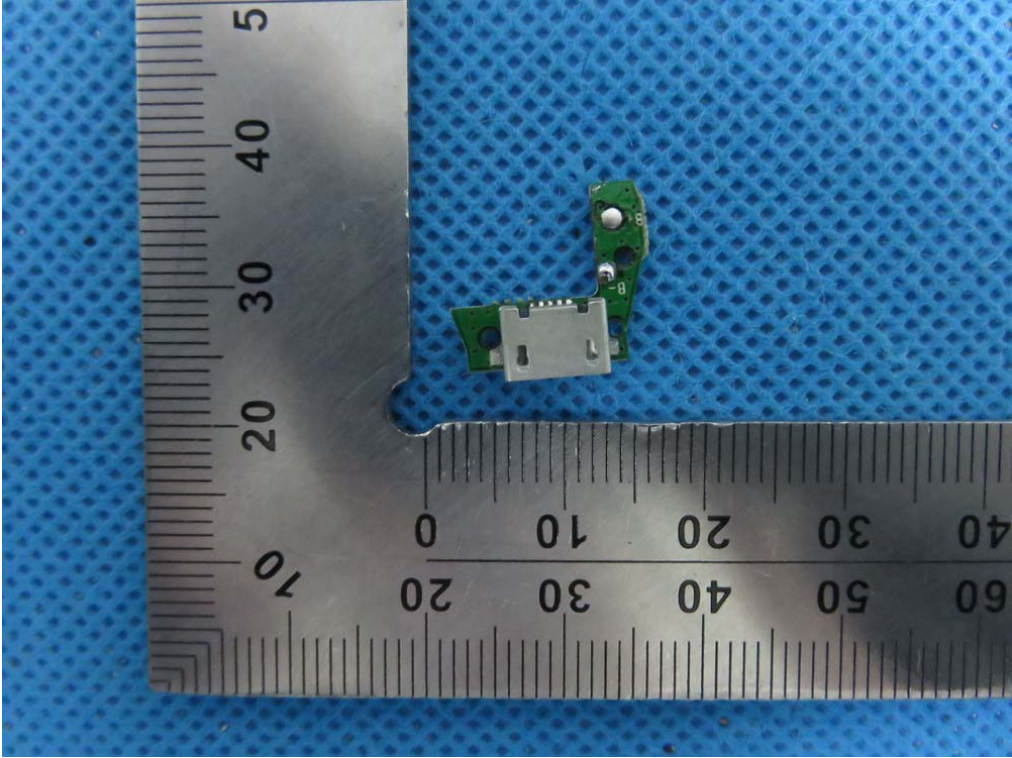


INTERNAL VIEW OF EUT-4

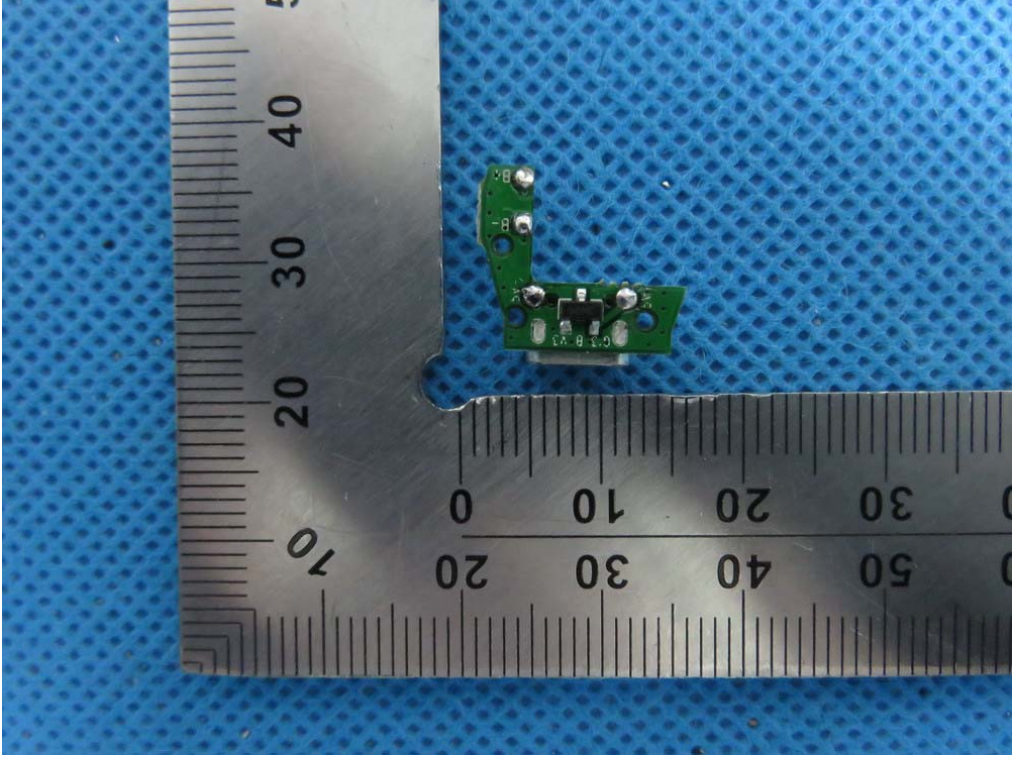

INTERNAL VIEW OF EUT-5

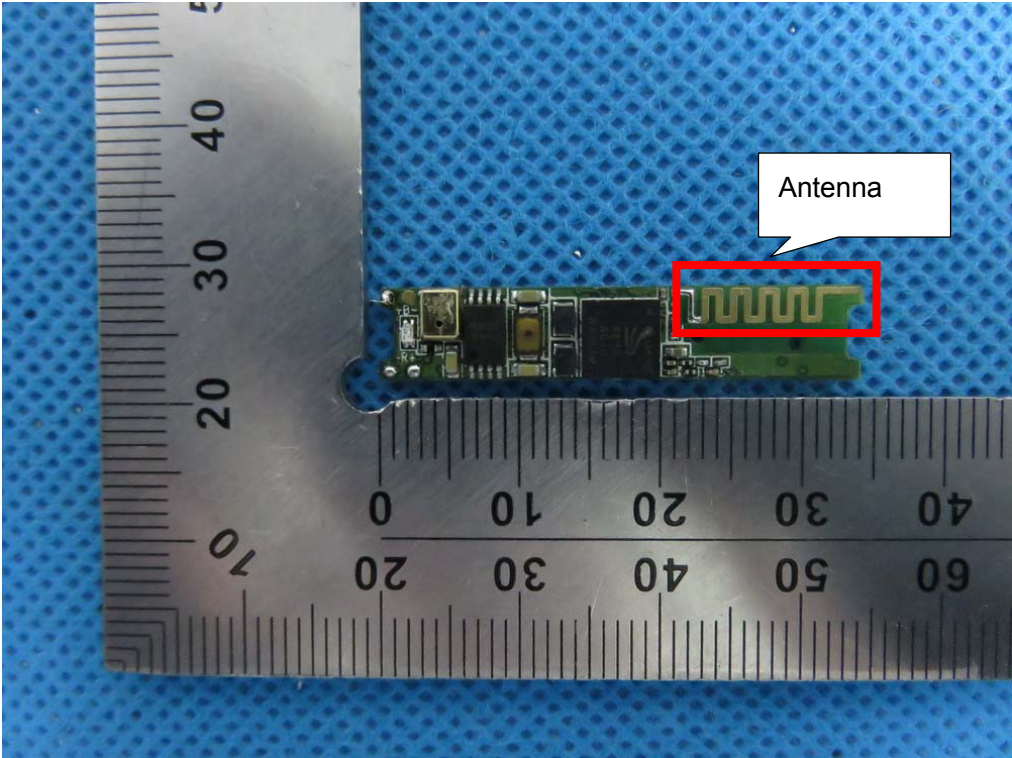

INTERNAL VIEW OF EUT-6

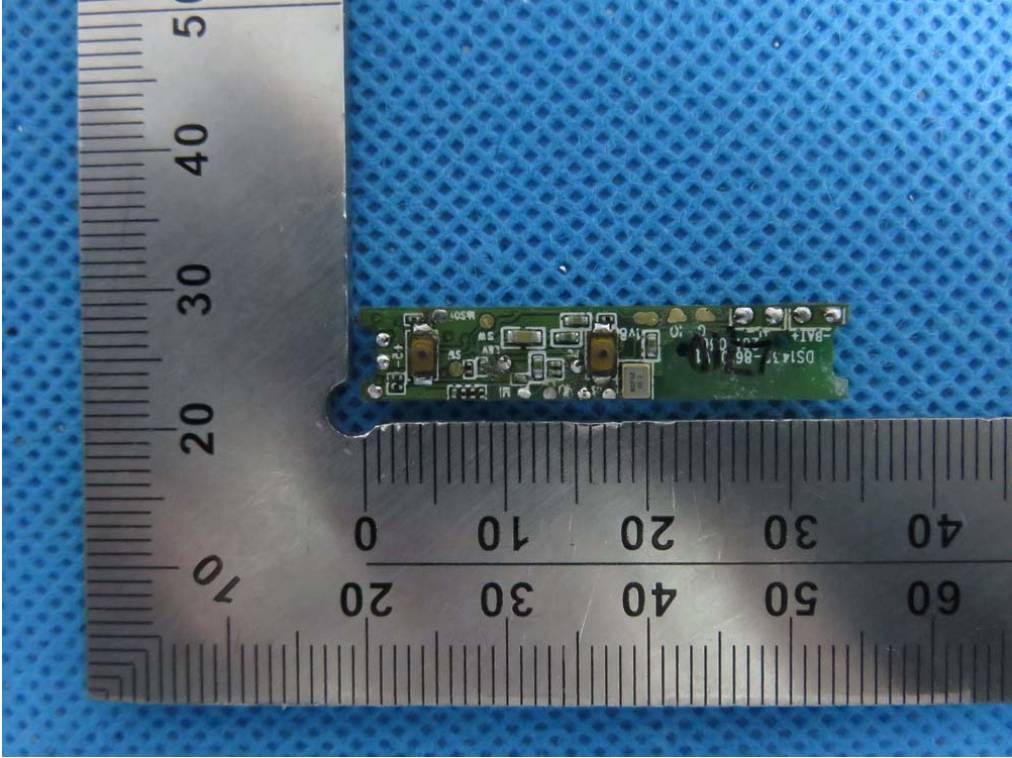

-----END OF REPORT-----