

Test Report

Customer:

DESKO GmbH

Gottlieb-Keim-Str. 56
95448 Bayreuth
Germany

Phone ++49 (0)921 79279 0

Fax ++49 (0)921 79279 14

RF test report

140372-AU01+W02



DESKO GmbH

Dual-Antenna-RFID-Module

RFID-Dual-IVG



The test result refers exclusively
to the tested model.
This test report may not be copied or
published in a part without the written
authorization
of the accreditation agency and/or
EMV **TESTHAUS** GmbH
Revision: 1.0



EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: company@emv-testhaus.com

Accreditation:



Registration number: DGA-PL-224/95-03
CAB (EMC) registration number: BNetzA-CAB-02/21-02/3
FCC facility registration number: 221458
MRA US-EU, FCC designation number: DE0010

Test Laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of the
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 2 of 32

Table of contents

1	Test regulations	5
2	Equipment under Test (EUT)	6
3	AC power line conducted emissions	9
4	Radiated emission measurement (<1 GHz)	17
5	Radiated emission measurement (>1 GHz)	28
6	Equipment calibration status	29
7	Measurement uncertainty	30
8	Summary	31
9	Revision History	32



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 3 of 32

List of pictures

Picture 1: Outline of conducted emission test setup	10
Picture 2: Graphic - Conducted emission on mains, phase 1 (continuous RFID reading)	11
Picture 3: Table - Conducted emission on mains, phase 1 (continuous RFID reading).....	12
Picture 4: Graphic - Conducted emission on mains, neutral (continuous RFID reading)	13
Picture 5: Table - Conducted emission on mains, neutral (continuous RFID reading).....	14
Picture 6: Graphic - Conducted emission on mains, phase 1 (antenna deactivated).....	15
Picture 7: Graphic - Conducted emission on mains, neutral (antenna deactivated)	16
Picture 8: Test setup for radiated emission measurement (< 30 MHz).....	20
Picture 9: Test setup for radiated emission measurement (< 1 GHz).....	20
Picture 10: Radiated emission 9 kHz – 30 MHz @ 3m distance (13.56 MHz).....	22
Picture 11: Radiated emission trace 30 MHz – 1000MHz @ 3m distance	23
Picture 12: Radiated emission table 30 MHz – 1000MHz @ 10m distance.....	23
Picture 13: Spectrum mask at 13.56 MHz @ 3m distance	25

List of tables

Table 1: Equipment Calibration status	29
Table 2: Measurement uncertainty	30



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 4 of 32

1 Test regulations

47 CFR Part 2: 10-2013	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
47 CFR Part 15: 10-2013	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.4: September 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Summary of test results

Standard	Test result
47 CFR Part 15, sections 15.207 and 15.225	Passed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 5 of 32

2 Equipment under Test (EUT)

Product type: Dual-Antenna-RFID-Module
Model Name: RFID-Dual-IVG
Manufacturer: DESKO GmbH
Serial number: Sample1
FCC ID: WTM-RFID-DUAL-IVG
Application freq. band: N/A
Frequency range: 13,56MHz
Operating frequency: 13,56MHz
Number of RF-channels: 1
Modulation: ASK
Antenna types: PCB antenna
 detachable not detachable
frame antenna (47-0464-01REV A)
 detachable not detachable

Power supply: External power source
nominal: 5.0 VDC

Temperature range: -20°C to +50°C

Remark:
The tests were performed with 120V AC / 60Hz.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 6 of 32

Photo documentation

For photos of the EUT, see annex B.

For photos taken during testing and the EUT-positions, see annex A.

Short description of the EUT

RFID reader 13,56MHz with integrated PCB and detachable frame antenna.

Operation mode

During the pre-measurements it was observed that the “continuous-tag-reading-mode” is the respective worst- case.

It was also investigate whether the PCB- or the detachable frame antenna is the worst-case-setup:

- PCB-antenna for.
 - ~ Spectrum mask (radiated)
- detachable frame antenna for:
 - ~ radiated spurious emissions (< 30 MHz)
 - ~ radiated spurious emissions (> 30 MHz)

EUT positions

The EUT was tested in the 3 orthogonal positions. This is documented in annex A.



Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	S/N
Dual-Antenna-RFID-Module	RFID-Dual-IVG	Sample1
RFID tag	Desko GmbH	6507143F1812121CAN
FUJITSU Notebook	Lifebook A531	YLDS013094
Transceiver optoUSB-2.0	GS18E12	121680
Transceiver optoUSB-2.0	GS18E12	121679
Power Supply	Statron 3231.1	E00017

Used cables

Numbers:	Description: (type / lengths / remarks)	Serial No
1	USB-2.0-cable, 50 cm	n/a
1	LWL, 10m	n/a

Applied Software: Interface to EUT via Mozilla Firefox



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 8 of 32

3 AC power line conducted emissions

according to 47 CFR Part 15, section 15.207

Test location

Description	Manufacturer	Inventory No.
Shielded chamber	Siemens - Matsushita	E00107

Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI	Rohde & Schwarz	E00001
<input type="checkbox"/>	ESH3 Z2	Rohde & Schwarz	E00028
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00004
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00005

Limits

Frequency [MHz]	Quasi-peak [dB μ V]	Average [dB μ V]
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02


Page 9 of 32

Test procedure

1. The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50 Ohms and an EMI test receiver.
2. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz.
3. The EUT was placed on a wooden table and connected to the LISN.
4. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range from 0.15 MHz to 30 MHz were scanned.
5. After that all peaks values with fewer margins than 10 dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector.
6. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit than these values were re-measured again with an average detector.
7. These measurements were done on all current carrying conductors.

According to ANSI C63.4, section 13.1.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.

Test setup

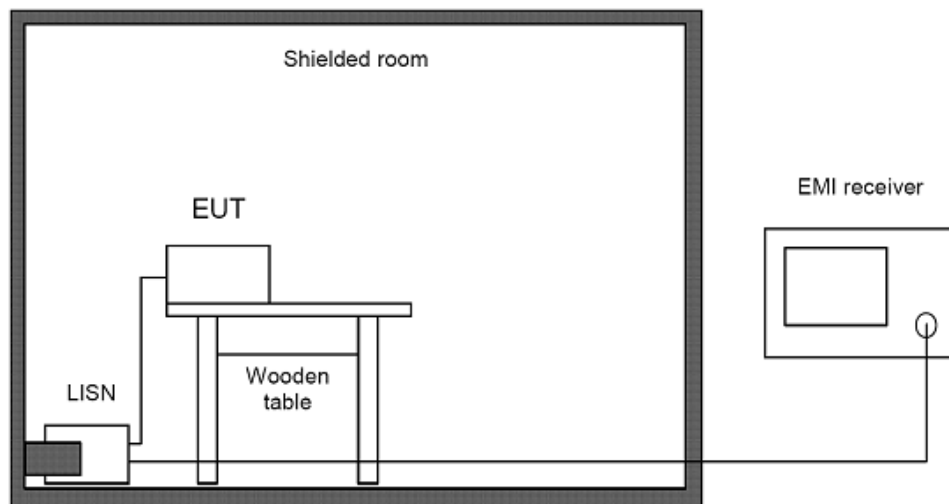


Picture 1: Outline of conducted emission test setup

Comments: All peripheral devices were additionally decoupled by means of a line stabilization network.

Test results

Temperature:	26°C	Humidity:	53%
Tested by:	Martin Müller	Test date:	2014-07-23

Interference Voltage Test

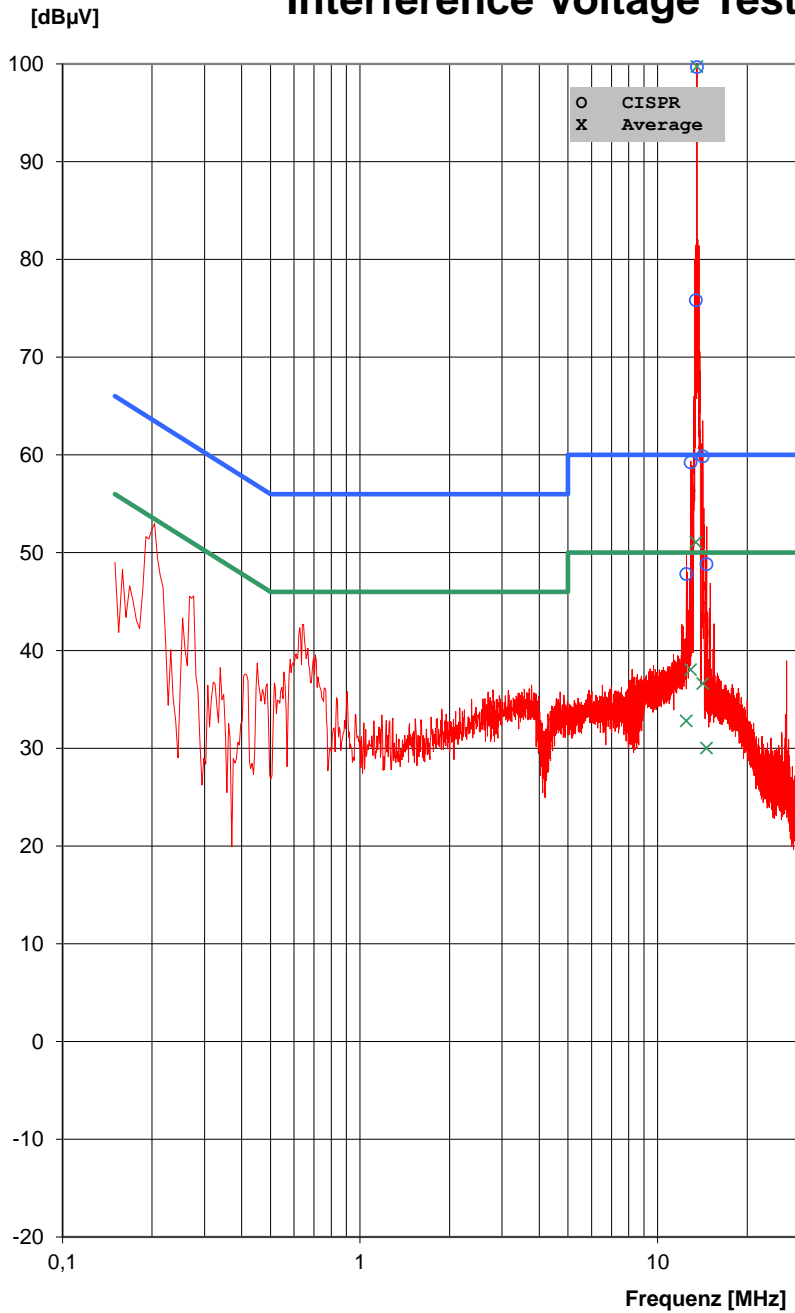

REGULATIONS:
EN 55022 Class B
PEAK / CISPR / AV

TEST EQUIPMENT:
R&S ESCS30 (E00003)
R&S ESH2-Z5 (E00004)

ORDER NO.:
140372-AU01+W02

EUT:
DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG
Sample1

OPERATION MODE:
continuous RFID reading
penta scanner as auxillary
equipment

Mains 120V AC /60Hz
Phase

TEST FACILITY:
EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:
2014-07-23 09:55:46
26°C 53% 98kPa

TEST ENGINEER:
Martin Müller

StSp L1 active Ant.E10

Picture 2: Graphic - Conducted emission on mains, phase 1 (continuous RFID reading)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 11 of 32

Interference Voltage Test

Freq. [MHz]	U_CISPR [dBµV]	Limit [dBµV]	delta_U [dB]	U_AV [dBµV]	Limit [dBµV]	delta_U [dB]	Corr. [dB]	Remark
12,50	47,8	60,0	12,2	32,8	50,0	17,2	0,0	StSp.1.1 active Ant. F10
12,93	59,2	60,0	0,8	38,0	50,0	12,0	0,0	
13,45	75,8	60,0	-15,8	51,1	50,0	-1,1	0,0	
13,56	99,7	60,0	-39,7	99,7	50,0	-49,7	0,0	
14,19	59,9	60,0	0,1	36,6	50,0	13,4	0,0	
14,62	48,8	60,0	11,2	30,0	50,0	20,0	0,0	

Picture 3: Table - Conducted emission on mains, phase 1 (continuous RFID reading)




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

140372-AU01+W02

Page 12 of 32

Interference Voltage Test

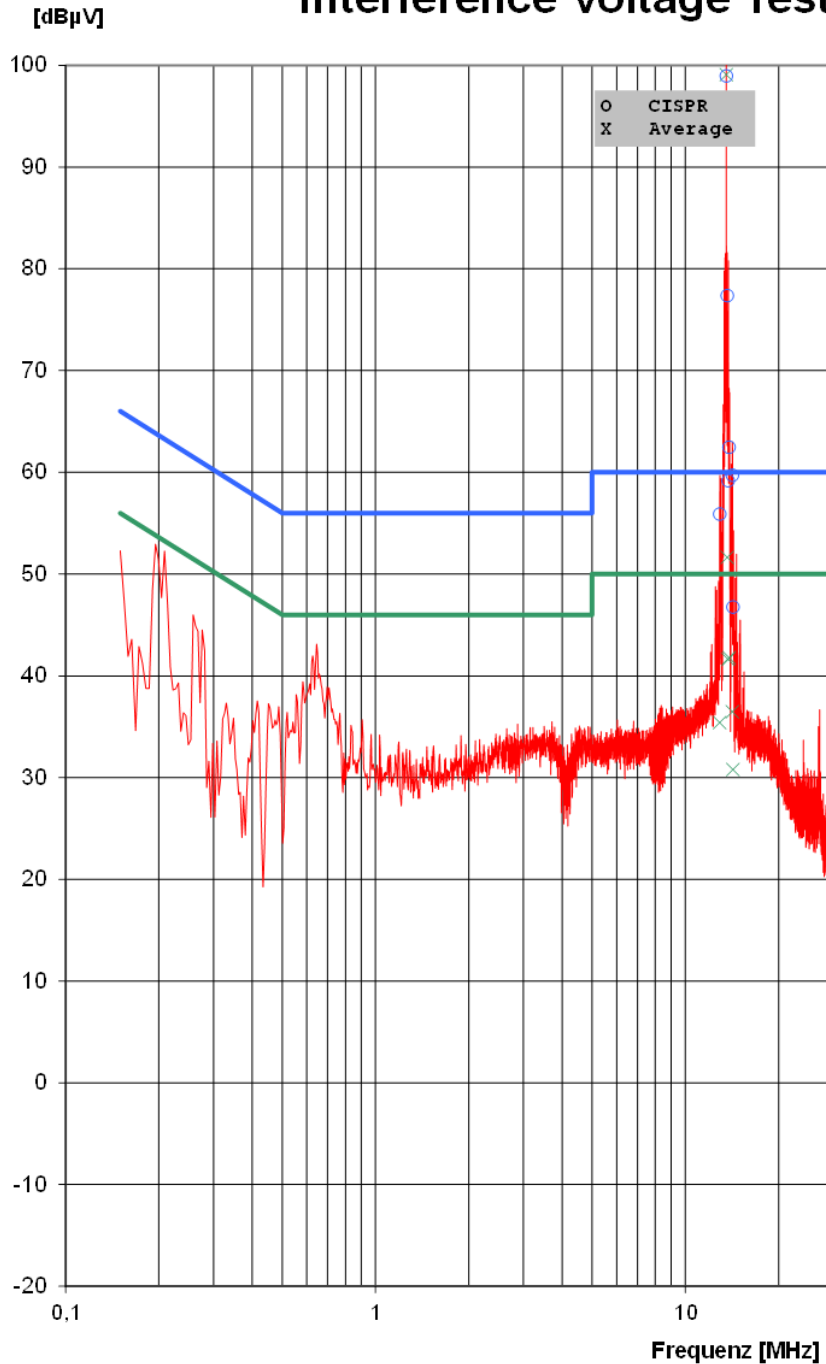

REGULATIONS:
EN 55022 Class B
PEAK / CISPR / AV

TEST EQUIPMENT:
R&S ESCS30 (E00003)
R&S ESH2-Z5 (E00004)

ORDER NO.:
140372-AU01+W02

EUT:
DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG
Sample1

OPERATION MODE:
continuous RFID reading
penta scanner as auxillary
equipment

Mains 120V AC /60Hz
Neutral

TEST FACILITY:
EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:
2014-07-23 09:55:03
26°C 53% 98kPa

TEST ENGINEER:
Martin Müller

Picture 4: Graphic - Conducted emission on mains, neutral (continuous RFID reading)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 13 of 32


Interference Voltage Test

Freq. [MHz]	U_CISPR [dBµV]	Limit [dBµV]	delta_U [dB]	U_AV [dBµV]	Limit [dBµV]	delta_U [dB]	Corr. [dB]	Remark
12,93	55,9	60,0	4,1	35,4	50,0	14,6	0,0	StSp-N active Ant. F10
13,56	99,0	60,0	-39,0	99,1	50,0	-49,1	0,0	
13,66	77,4	60,0	-17,4	51,6	50,0	-1,6	0,0	
13,74	59,2	60,0	0,8	41,6	50,0	8,4	0,0	
13,85	62,5	60,0	-2,5	41,8	50,0	8,2	0,0	
14,19	59,7	60,0	0,3	36,5	50,0	13,5	0,0	
14,26	46,7	60,0	13,3	30,8	50,0	19,2	0,0	

Picture 5: Table - Conducted emission on mains, neutral (continuous RFID reading)



Interference Voltage Test

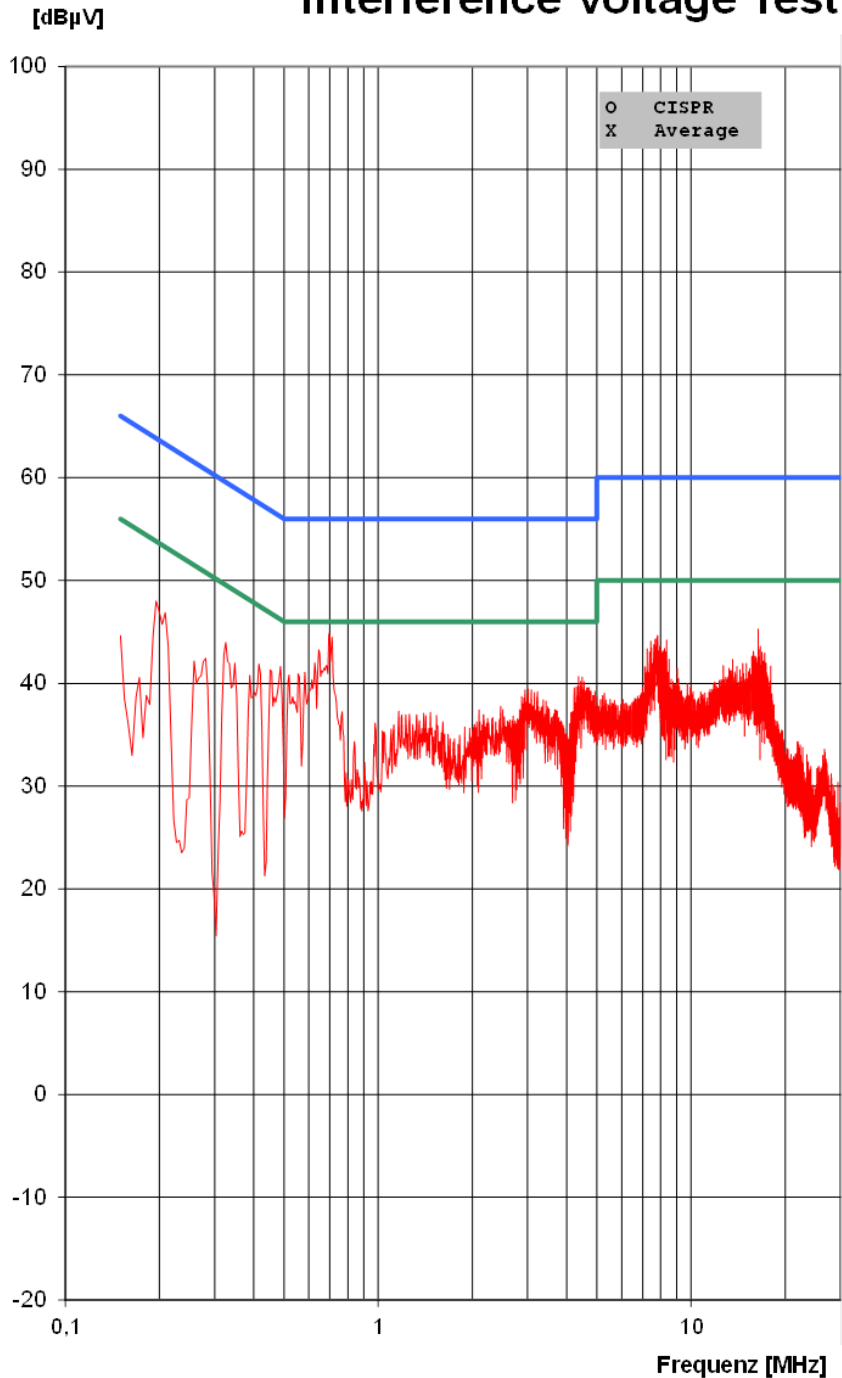

REGULATIONS:
EN 55022 Class A
PEAK / CISPR / AV

TEST EQUIPMENT:
R&S ESCS30 (E00003)
R&S ESH2-Z5 (E00004)

ORDER NO.:
140372-AU01+W02

EUT:
DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG
Sample1

OPERATION MODE:
antenna deactivated
penta scanner as auxillary
equipment

Mains 120V AC /60Hz
Phase

TEST FACILITY:
EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:
2014-07-23 08:20:46
26°C 53% 98kPa

TEST ENGINEER:
Martin Müller

StSp L1 inactive Ant.E10

Picture 6: Graphic - Conducted emission on mains, phase 1 (antenna deactivated)

Note: "Antenna deactivated" means replaced by 50 ohms termination (dummy load).




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 15 of 32

Interference Voltage Test

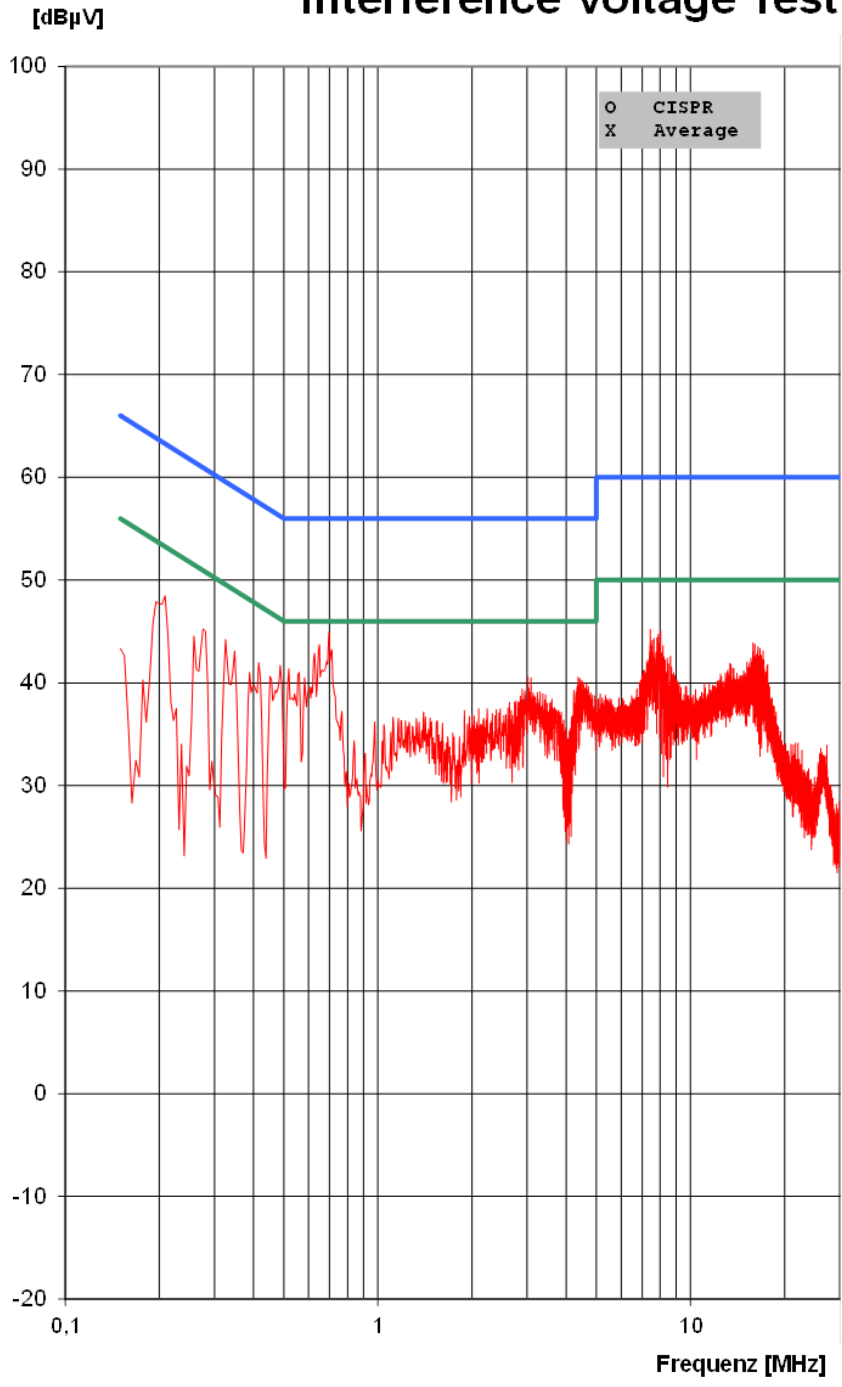

REGULATIONS:
 EN 55022 Class A
 PEAK / CISPR / AV

TEST EQUIPMENT:
 R&S ESCS30 (E00003)
 R&S ESH2-Z5 (E00004)

ORDER NO.:
 140372-AU01+W02

EUT:
 DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG
 Sample1

OPERATION MODE:
 antenna deactivated
 penta scanner as auxillary
 equipment

Mains 120V AC /60Hz
 Neutral

TEST FACILITY:
 EMV TESTHAUS GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing

DATE / TIME:
 2014-07-23 08:21:01
 26°C 53% 98kPa

TEST ENGINEER:
 Martin Müller

StSp N inactive Ant.E10

Picture 7: Graphic - Conducted emission on mains, neutral (antenna deactivated)

Note: "Antenna deactivated" means replaced by 50 ohms termination (dummy load).



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

4 Radiated emission measurement (<1 GHz)

according to 47 CFR Part 15, section 15.205(a), 15.209(a),
15.225(a d, e)

Test Location

- Scan with peak detector in 3 m CDC.
- Final CISPR measurement with quasi peak detector on 3 m open area test site.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open site area	EMV TESTHAUS GmbH	E00354

Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input checked="" type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011
<input checked="" type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 17 of 32

Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [dB $\mu\text{V/m}$]	Measurement distance d [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

In case the emission fall within the restricted band specified on 15.225 limit in the table below has to be followed.

Frequency [MHz]	Field strength Fs [$\mu\text{V/m}$]	Field strength [dB $\mu\text{V/m}$]	Measurement distance d [m]
13.553 - 13.567	15,848	84	30
13.410 - 13.553	334	50.47	30
13.567 - 13.710	334	50.47	30
13.110 - 13.410	106	40.51	30
13.710 - 14.010	106	40.51	30
f < 13.110	according to limits in §15.209		
f > 14.010			




Test procedure


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a compact diagnostic chamber.
2. Power on the EUT and all peripherals.
3. The broadband antenna was set to vertical polarization.
4. The EMI receiver performed a scan from 30MHz to 1000MHz with the detector set to peak and the measurement bandwidth to 120 kHz.
5. The turn table was rotated to 6 different positions ($360^\circ / 6$) and the antenna polarization was changed to horizontal.
6. Repeat the test procedure at step 4 and 5.
7. The test setup was then placed in an OATS at 3 m distance and all peak values over or with less distance to limit then 6dB were marked and re-measured with a quasi-peak detector.
8. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization. The highest value was recorded.
10. For emissions below 30MHz, measurements were done with a loop antenna. The recorded data were measured in QP mode of the receiver. Antenna height was not changed during this test. Appropriate CISPR bandwidths of 200 Hz up to 150 kHz and 9 or 10 kHz above were used.



Test setup

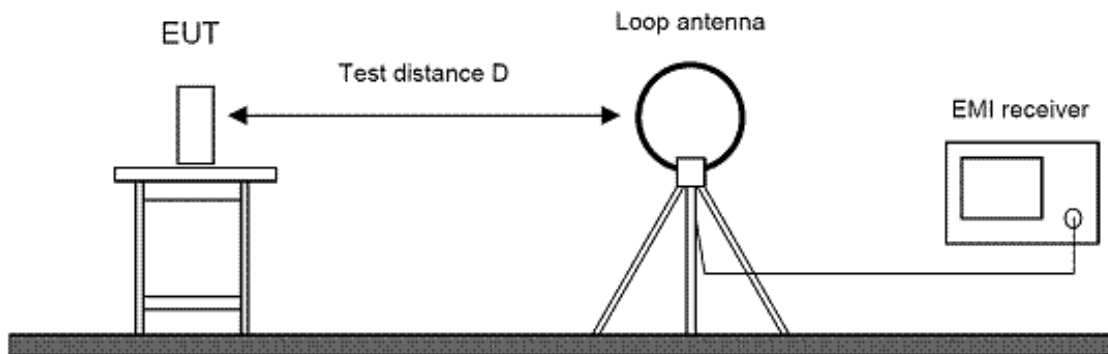

Picture 8: Test setup for radiated emission measurement (< 30 MHz)

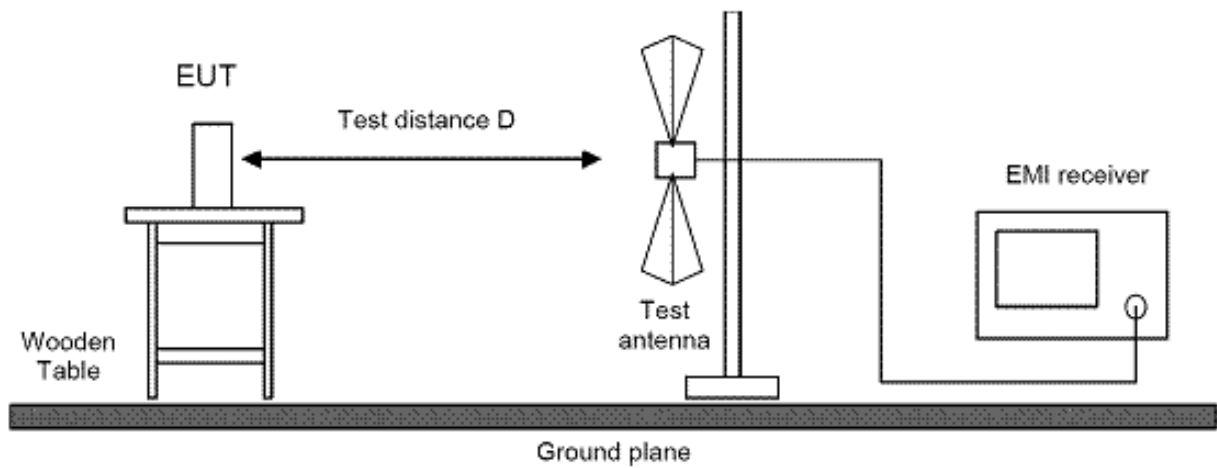

Picture 9: Test setup for radiated emission measurement (< 1 GHz)

Test deviation

There is no deviation with the original standard.

Test results

Temperature:	22°C	Humidity:	46%
Tested by:	Martin Müller	Test date:	2014-07-16

Radiated Emission Measurement 9 kHz – 30 MHz

Test procedure

The EUT was placed in a full anechoic chamber and the spurious emissions testing was performed in accordance with ANSI C63.4, FCC Part 15, Subpart C. The measurement distance was 3 m.

The following picture shows the worst-case-emissions at EUT-position 2 and the loop-antenna polarised to "I".




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 21 of 32

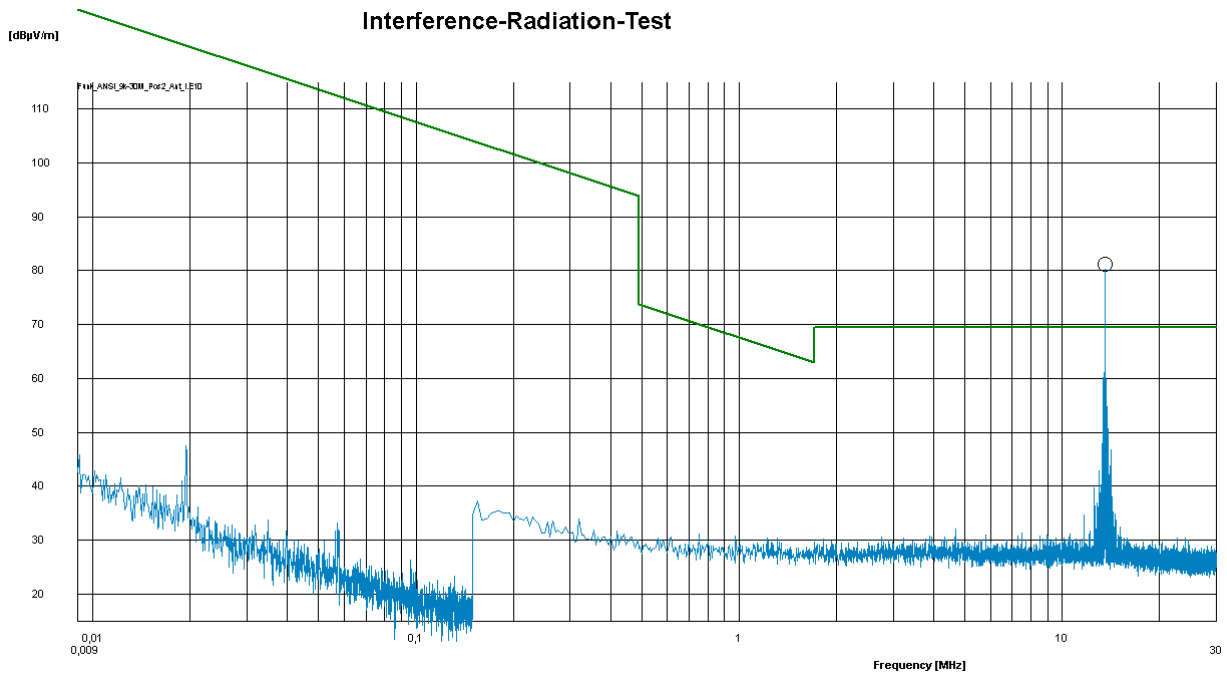

M.	Freq [M...]	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr ...
<input checked="" type="checkbox"/>	13,56	81,2	0,0	69,5	11,6	H	100	86	2014-07-16 09:02...		80,2	0,0

Picture 10: Radiated emission 9 kHz – 30 MHz @ 3m distance (13.56 MHz)




EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

Radiated Emission Measurement 30 MHz – 1000 MHz

The following pictures show the worst-case-emissions at EUT-position 3.

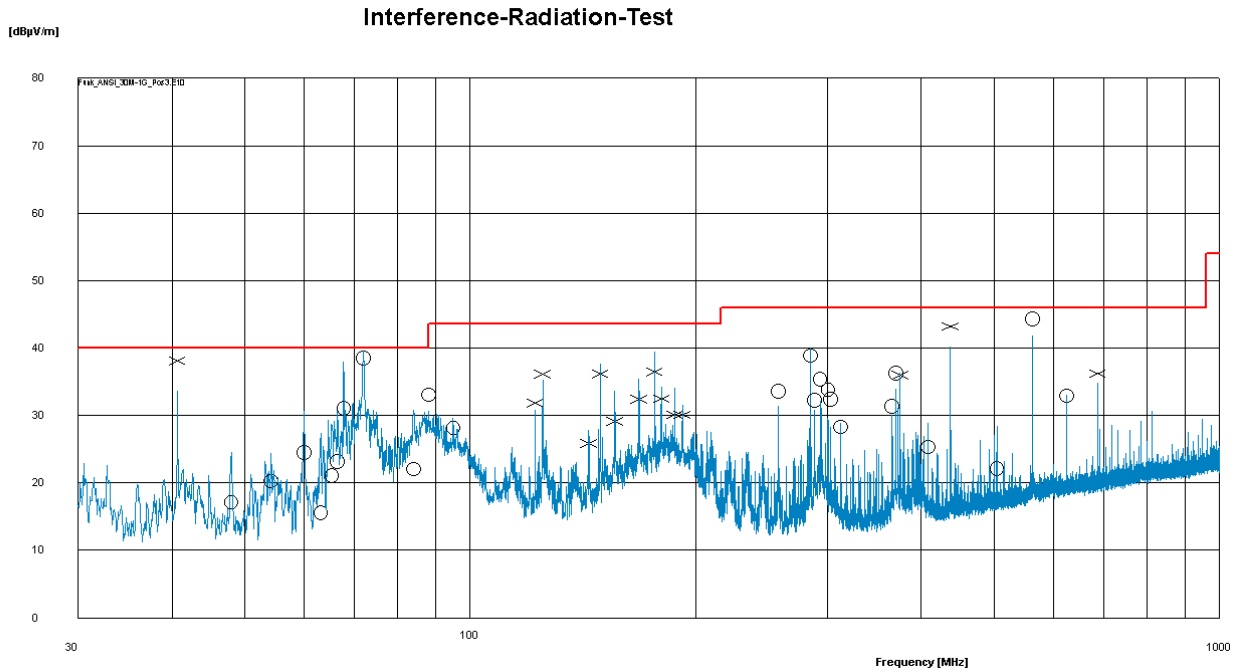

Picture 11: Radiated emission trace 30 MHz – 1000MHz @ 3m distance

M	Freq [M...]	VMaxC...	Corr...	Limit	dLimit	Pol	Ant	TT	Date	Remarks	VScal...	Corr...
✓	48	17.2	14.6	40.0	- 22.9	H	100	6	2014-07-16 14:38...		24.5	0,0
✓	54.24	20.3	14.6	40.0	- 19.7	H	100	359	2014-07-16 14:40...		24.3	0,0
✓	60	24.5	13.6	40.0	- 15.5	H	100	12	2014-07-16 14:41...		30.6	0,0
✓	63.18	15.6	12.7	40.0	- 24.4	H	100	15	2014-07-16 14:42...		27.3	0,0
✓	65.34	21.1	11.9	40.0	- 19.0	H	100	12	2014-07-16 14:43...		28.7	0,0
✓	66.42	23.2	11.5	40.0	- 16.8	H	100	11	2014-07-16 14:44...		30.7	0,0
✓	67.8	31.0	11.1	40.0	- 9.0	H	100	203	2014-07-16 14:46...		38.0	0,0
✓	72	38.5	9.9	40.0	- 1.5	H	261	14	2014-07-16 15:17...		39.5	0,0
✓	84	22.1	9.4	40.0	- 17.9	H	100	8	2014-07-16 14:48...		30.7	0,0
✓	88.02	33.1	10.7	43.5	- 10.5	H	100	191	2014-07-16 14:49...		30.6	0,0
✓	94.92	28.2	10.1	43.5	- 15.4	H	100	22	2014-07-16 15:37...		29.5	0,0
✓	122.04	31.8	10.5	43.5	- 11.7	V	100	218	2014-07-16 14:22...		30.7	0,0
✓	124.98	36.1	10.2	43.5	- 7.4	V	100	345	2014-07-16 14:23...		35.2	0,0
✓	144	25.9	9.2	43.5	- 17.6	V	100	321	2014-07-16 14:25...		27.8	0,0
✓	149.16	36.2	9.4	43.5	- 7.4	V	100	187	2014-07-16 14:26...		37.7	0,0
✓	156	29.2	9.7	43.5	- 14.3	V	100	97	2014-07-16 14:27...		33.6	0,0
✓	168	32.4	10.2	43.5	- 11.2	V	100	252	2014-07-16 14:28...		35.4	0,0
✓	176.28	36.5	10.7	43.5	- 7.1	V	100	119	2014-07-16 14:30...		39.3	0,0
✓	180	32.5	11.0	43.5	- 11.1	V	100	333	2014-07-16 14:31...		34.3	0,0
✓	187.5	30.1	11.7	43.5	- 13.4	V	100	128	2014-07-16 14:32...		34.1	0,0
✓	192	30.1	12.2	43.5	- 13.4	V	100	350	2014-07-16 14:33...		31.5	0,0
✓	257.64	33.6	14.4	46.0	- 12.4	H	100	94	2014-07-16 14:52...		31.4	0,0
✓	284.76	38.9	15.0	46.0	- 7.2	H	100	270	2014-07-16 14:53...		40.0	0,0
✓	288.3	32.3	15.1	46.0	- 13.8	H	100	87	2014-07-16 14:54...		30.7	0,0
✓	293.1	35.4	15.2	46.0	- 10.7	H	100	81	2014-07-16 14:56...		32.1	0,0
✓	300.3	33.8	15.4	46.0	- 12.2	H	100	90	2014-07-16 14:57...		29.5	0,0
✓	302.76	32.4	15.5	46.0	- 13.6	H	100	85	2014-07-16 14:58...		28.3	0,0
✓	311.88	28.3	15.7	46.0	- 17.7	H	100	288	2014-07-16 14:59...		28.8	0,0
✓	365.22	31.4	17.1	46.0	- 14.7	H	100	124	2014-07-16 15:00...		30.0	0,0
✓	370.02	36.3	17.2	46.0	- 9.8	H	100	136	2014-07-16 15:02...		33.9	0,0
✓	375	36.0	17.3	46.0	- 10.0	V	100	55	2014-07-16 14:34...		36.3	0,0
✓	408.48	25.3	18.2	46.0	- 20.7	H	100	61	2014-07-16 15:03...		28.8	0,0
✓	437.52	43.2	19.0	46.0	- 2.8	V	108	45	2014-07-16 15:13...		40.2	0,0
✓	504.54	22.1	20.8	46.0	- 23.9	H	100	44	2014-07-16 15:04...		28.4	0,0
✓	562.5	44.4	21.9	46.0	- 1.7	H	108	89	2014-07-16 15:22...		41.8	0,0
✓	625.02	33.0	18.8	46.0	- 13.1	H	100	261	2014-07-16 15:38...		32.9	0,0
✓	687.48	36.2	23.2	46.0	- 9.8	V	100	21	2014-07-16 14:37...		34.8	0,0

Picture 12: Radiated emission table 30 MHz – 1000MHz @ 10m distance



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

Spectrum Mask

Test procedure

The EUT was placed in a full anechoic chamber and the emission bandwidth testing was performed in accordance with ANSI C63.4 and 47 CFR Part 15, section 15.225 (a) - (d). The measurement distance was 3 m. To find the closest margin of the spectrum to the limit mask adapted to the test distance the EUT was rotated by 360 degrees with detector of the test receiver set to peak. The loop antenna placed in a fixed height of 1 meter was rotated by 360 degrees to get the maximum of emission. In case of exceeding the limits the detector is switched to quasi peak for final testing in position of maximum emission.




EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

Test result

Temperature:	22°C	Humidity:	46%
Tested by:	Martin Müller	Test date:	2014-07-16

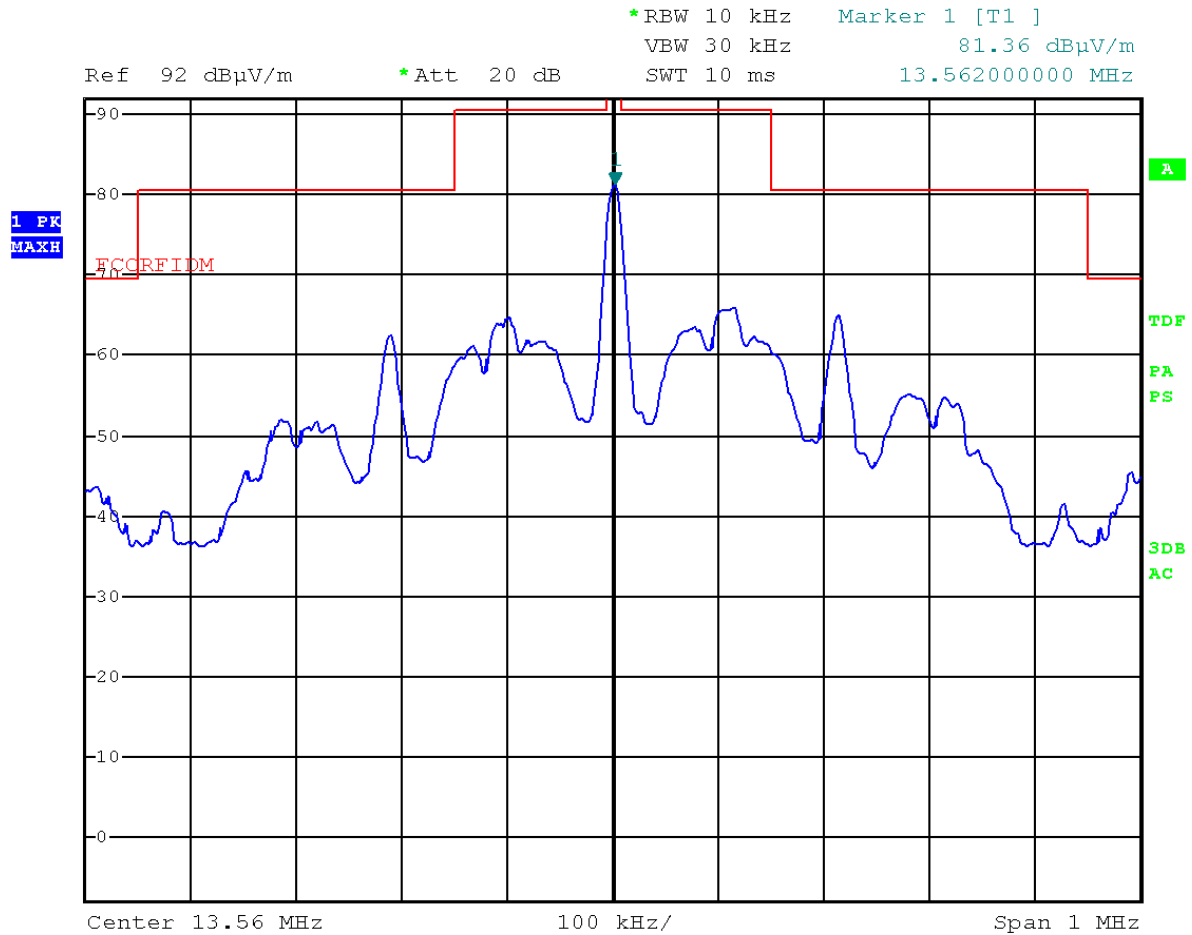

Picture 13: Spectrum mask at 13.56 MHz @ 3m distance

f _{meas} [MHz]	E _{meas} @ 3m [dBµV/m]	Correction 3m -> 30m	Calc. Value [dBµV/m]	Limit @ 30m	Result
13.562	81.36	-40 dB	41.36	84 dBµV/m	Pass



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

Frequency Stability

Test procedure

The EUT was placed in a climatic chamber and the emission bandwidth testing was performed in accordance with ANSI C63.4 and 47 CFR Part 15, section 15.225 (e). The Frequency Stability was measured using the radiated signals from the EUT so that the measurement equipment would not load the radio frequency circuits. A frequency counter was used for the frequency stability measurements. A close field probe was attached to the counter and placed near the antenna of the reader for measurement. The Reader was put into a continuous output mode through instructions from the host computer. The frequency was measured while the input DC Power to the intentional radiator was varied over the required input range.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

Test result

Temperature:	20°C	Humidity:	41%
Tested by:	Martin Müller	Test date:	2014-07-18

Temperature: 20° C		
Carrier Frequency	Voltage range	Frequency change
13,56 MHz	Nominal: 5.0 V DC	--
13,56 MHz	4.25 V DC (85%)	< 0.01 %
13,56 MHz	5.75 V DC (115%)	< 0.01 %

Voltage 24 V DC:		
Carrier Frequency	Temperature range	Frequency change
13,56 MHz	-20 °C	< 0.01 %
13,56 MHz	-10 °C	< 0.01 %
13,56 MHz	0 °C	< 0.01 %
13,56 MHz	10 °C	< 0.01 %
13,56 MHz	20 °C	---
13,56 MHz	30 °C	< 0.01 %
13,56 MHz	40 °C	< 0.01 %
13,56 MHz	50°C	< 0.01 %



5 Radiated emission measurement (>1 GHz)

according to 47 CFR Part 15, section 15.205(a), 15.209(a)

Remark:

This measurement does not need to be applied because there are no internal frequencies higher than 108 MHz (see 47 CFR Part 15, section 15.209 (f)).



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 28 of 32

6 Equipment calibration status

Description	Modell Number	Serial number	Inventory number	Next calibration
Spectrum analyzer	ESCI 1166.5950.03	100013	E00001	2015-01
Broadband antenna	VULB9163	9163-114	E00012	2015-09
Loop antenna	HFH2-Z2	871398/0050	E00004	2015-03
OATS			E00354	
Compact Diagnostic Chamber (CDC)	VK041.0174	D62128-A502-A69-2-0006	E00026	
Climatic chamber 990 Liter	VC 4100	59566102680010	C00014	2015-01

Table 1: Equipment Calibration status



7 Measurement uncertainty

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	± 3,8 dB	2
Radiated emission open field (3 m) (30 MHz to 300 MHz) (300MHz to 1 GHz)	± 5,4 dB ± 5,9 dB	2
Radiated emission absorber chamber (> 1000 MHz)	± 4.5 dB	2

Table 2: Measurement uncertainty

The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany
 Revision: 1.0

DESKO GmbH
 Dual-Antenna-RFID-Module
 RFID-Dual-IVG

140372-AU01+W02

Page 30 of 32

8 Summary

The EMC Regulations according to the marked specifications are


KEPT

The EUT does fulfill the general approval requirements mentioned.

NOT KEPT

The EUT does not fulfill the general approval requirements mentioned.

Place, Date: Straubing, July30th, 2014



Martin Müller

Test engineer

EMV **TESTHAUS** GmbH



Rainer Heller

Head of EMC / radio department

EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 31 of 32

9 Revision History

Date	Description	Person	Revision
2014-07-30	First edition	M. Müller	----



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany
Revision: 1.0

DESKO GmbH
Dual-Antenna-RFID-Module
RFID-Dual-IVG

140372-AU01+W02

Page 32 of 32