

TEST REPORT

Reference No. : WTS16S0652874E
FCC ID : WUI-LM55811
Applicant : Winplus Co., Ltd.
Address : Suites 6-11, 7th Floor, Corporation Park, 11 On La, Shatin, Hong Kong.
Manufacturer : Winplus Co., Ltd.
Address : Suites 6-11, 7th Floor, Corporation Park, 11 On La, Shatin, Hong Kong.
Product Name : LED Utility Light
Model No. : LM55970, LM55971, LM55972, LM55811, LM55860, LM55861
Standards : FCC CFR47 Part 15 Section 15.249: 2015
Date of Receipt sample : Jun. 12, 2016
Date of Test : Jun. 13 – 16, 2016
Date of Issue : Jun. 20, 2016
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Lake Xie

Lake Xie / Test Engineer

Approved by:



Philo Zhong / Manager

2 Revision History

Test report #	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S0140852E	Jan. 6, 2016	Jan. 8 - 11, 2016	Feb. 15, 2016	original		Valid
WTS16S0652874E	Jun. 12, 2016	Jun. 13 – 16, 2016	Jun. 20, 2016	Supplement	Adding model: LM55970, LM55971, LM55972, (1)	Valid
Remark: (1) This report (WTS16S0652874E) is based on Project No. WTS16S0140852E for Updated Product model and change the location of the RF module, but RF module is same.						

3 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emission	15.249(a) 15.209 15.205(a)	PASS
Periodic Operation	15.35(c)	PASS
Outside Restricted band	15.249 15.205 15.209	PASS
20dB Bandwidth	15:215(c)	PASS
Antenna Requirement	15.203	PASS

4 Contents

	Page
1 COVER PAGE	1
2 REVISION HISTORY	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF E.U.T.	5
5.2 DETAILS OF E.U.T.	5
5.3 CHANNEL LIST	5
5.4 TEST FACILITY	5
6 EQUIPMENT USED DURING TEST	6
6.1 EQUIPMENTS LIST	6
6.2 MEASUREMENT UNCERTAINTY	7
6.3 TEST EQUIPMENT CALIBRATION	7
7 CONDUCTED EMISSION	8
7.1 E.U.T. OPERATION	8
7.2 EUT SETUP	8
7.3 MEASUREMENT DESCRIPTION	8
7.4 CONDUCTED EMISSION TEST RESULT	9
8 RADIATION EMISSION TEST	11
8.1 EUT OPERATION	11
8.2 TEST SETUP	12
8.3 SPECTRUM ANALYZER SETUP	13
8.4 TEST PROCEDURE	14
8.5 TEST RESULT	15
9 PERIODIC OPERATION	17
10 RESTRICTED BAND	18
10.1 REQUIMENTS:	18
10.2 TEST RESULT	18
11 20 DB BANDWIDTH MEASUREMENT	20
11.1 TEST PROCEDURE	20
11.2 TEST RESULT	20
12 ANTENNA REQUIREMENT	21
13 PHOTOGRAPHS- MODEL LM55970 TEST SETUP	22
13.1 PHOTOGRAPH –CONDUCTED EMISSIONS	22
13.2 PHOTOGRAPH – RADIATION EMISSION	22
14 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	24
14.1 MODEL LM55970- EXTERNAL PHOTOS	24
14.2 MODEL LM55970- INTERNAL PHOTOS	27

5 General Information

5.1 General Description of E.U.T.

Product Name:	LED Utility Light
Model No.:	LM55811, LM55860, LM55861, LM55970, LM55971, LM55972
Model Differences:	Only for Model name model and change the location of the RF module, but RF module is same. The LM55970 is the tested sample.
Type of Modulation:	FSK
Frequency Range:	5775MHz
The Lowest Oscillator:	N/A
Antenna installation:	Integrated Antenna

5.2 Details of E.U.T.

Technical Data:	AC 120V 60Hz 49W
-----------------	------------------

5.3 Channel List

Channel No.	Frequency (MHz)
1	5775

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **IC – Registration No.:7760A-1**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A-1, Oct 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5.4.1 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Lower channel	Middle channel	Upper channel
Transmitting	N/A	5775MHz	N/A

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2016	Apr.17,2017
7	Broadband Pre-amplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.16,2016	Mar.15,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016
4.	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	Sep.14,2015	Sep.13,2016

6.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)

6.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI 63.10: 2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The EUT was placed on the test table in shielding room.

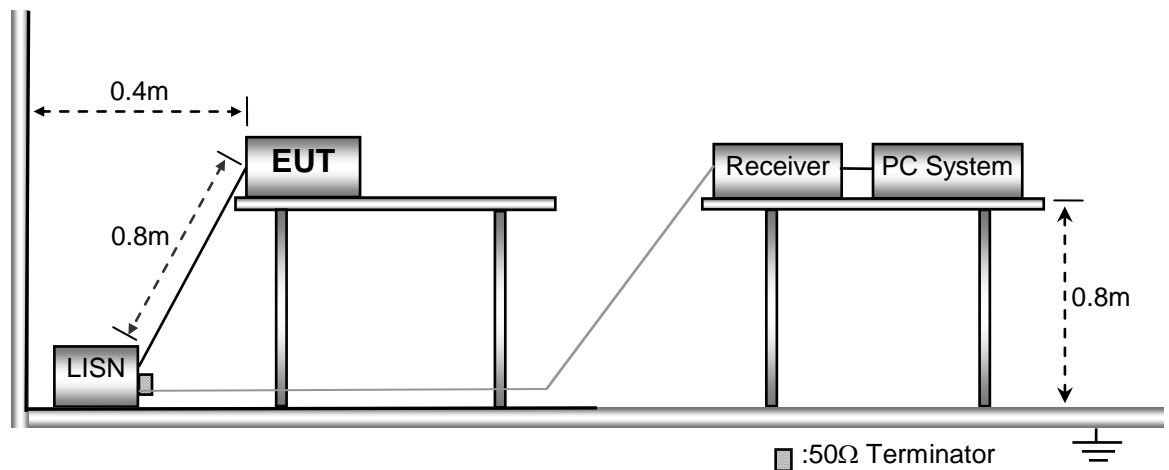


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

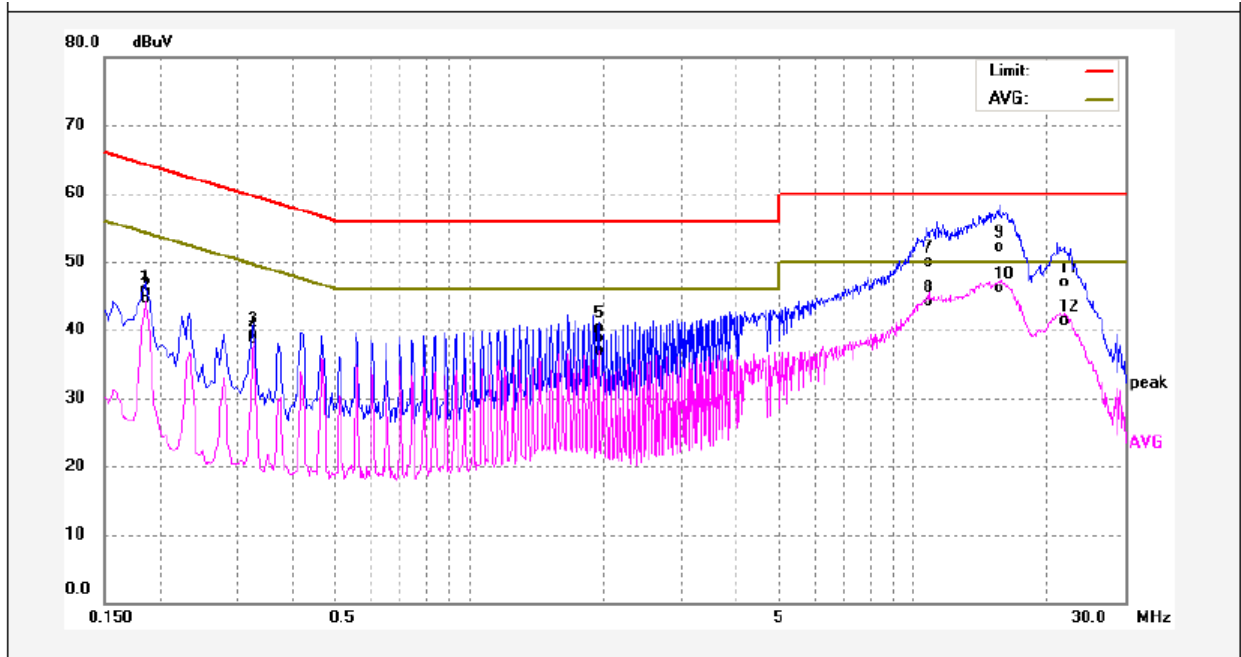

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1860	35.33	10.27	45.60	64.21	-18.61	QP	
2	0.1860	34.30	10.27	44.57	54.21	-9.64	AVG	
3	0.3260	29.14	10.28	39.42	59.55	-20.13	QP	
4	0.3260	28.48	10.28	38.76	49.55	-10.79	AVG	
5	1.9500	29.87	10.47	40.34	56.00	-15.66	QP	
6	1.9500	26.39	10.47	36.86	46.00	-9.14	AVG	
7	10.8580	39.14	10.73	49.87	60.00	-10.13	QP	
8	10.8580	33.39	10.73	44.12	50.00	-5.88	AVG	
9	15.6420	41.18	10.96	52.14	60.00	-7.86	QP	
10	15.6420	35.18	10.96	46.14	50.00	-3.86	AVG	
11	21.9340	35.87	11.12	46.99	60.00	-13.01	QP	
12	21.9340	30.25	11.12	41.37	50.00	-8.63	AVG	

Neutral line:

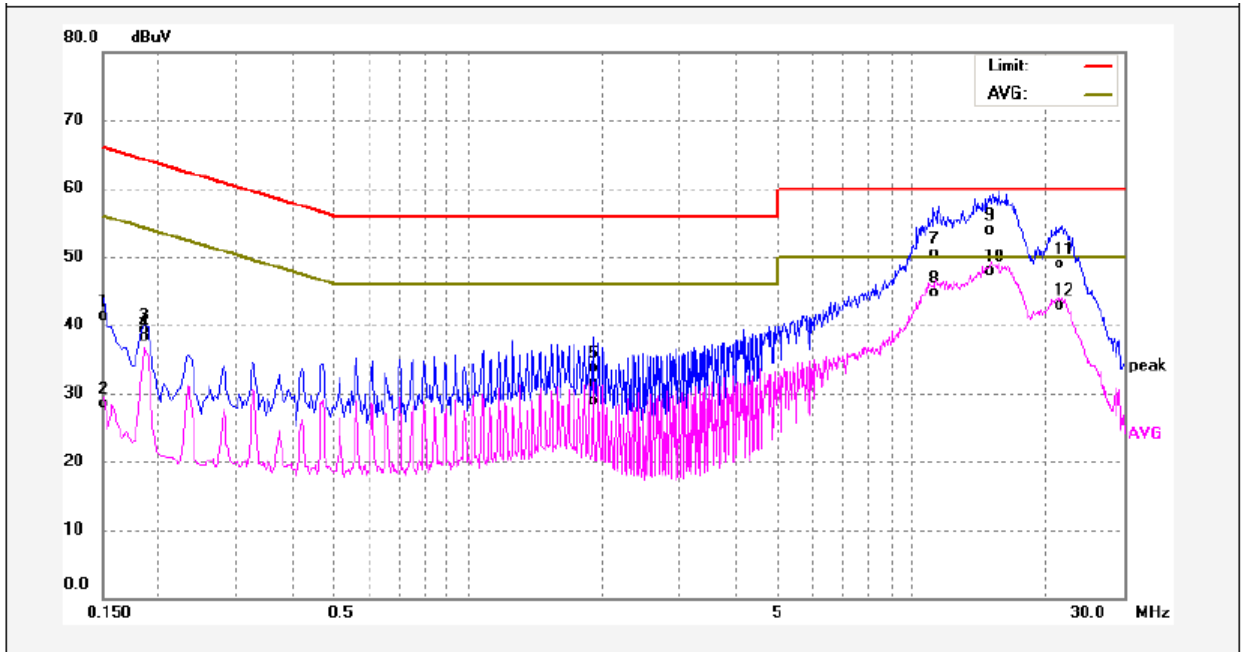

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	30.96	10.29	41.25	65.99	-24.74	QP	
2	0.1500	18.26	10.29	28.55	55.99	-27.44	AVG	
3	0.1860	29.09	10.27	39.36	64.21	-24.85	QP	
4	0.1860	27.94	10.27	38.21	54.21	-16.00	AVG	
5	1.9180	23.21	10.46	33.67	56.00	-22.33	QP	
6	1.9180	18.46	10.46	28.92	46.00	-17.08	AVG	
7	11.2620	39.67	10.75	50.42	60.00	-9.58	QP	
8	11.2620	33.86	10.75	44.61	50.00	-5.39	AVG	
9	15.0700	42.92	10.94	53.86	60.00	-6.14	QP	
10	15.0700	36.99	10.94	47.93	50.00	-2.07	AVG	
11	21.3900	37.79	11.10	48.89	60.00	-11.11	QP	
12	21.3900	31.75	11.10	42.85	50.00	-7.15	AVG	

8 Radiation Emission Test

Test Requirement: FCC Part15 Paragraph 15.249&15.209&15.205

Test Method: ANSI 63.10: 2013

Measurement Distance: 3m

Test Result: PASS

15.249(a)Limit:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

15.209 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note: RF Voltage(dBuV)=20 log₁₀ RF Voltage(uV)

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

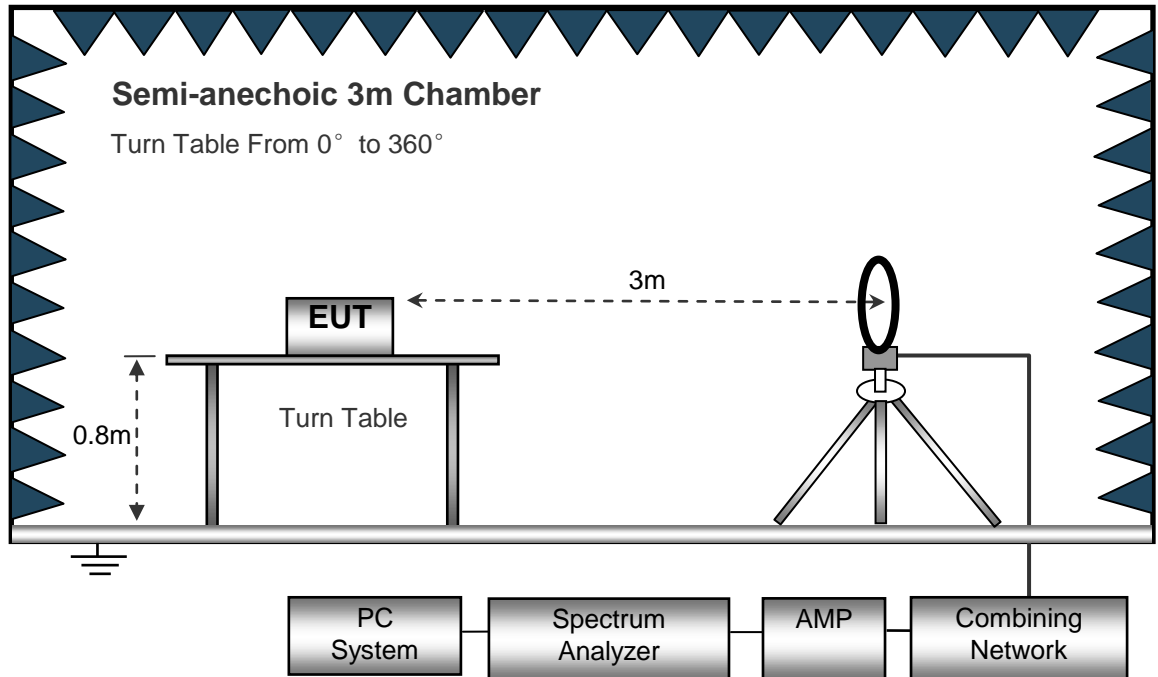

The test setup for emission measurement from 30MHz to 1GHz.

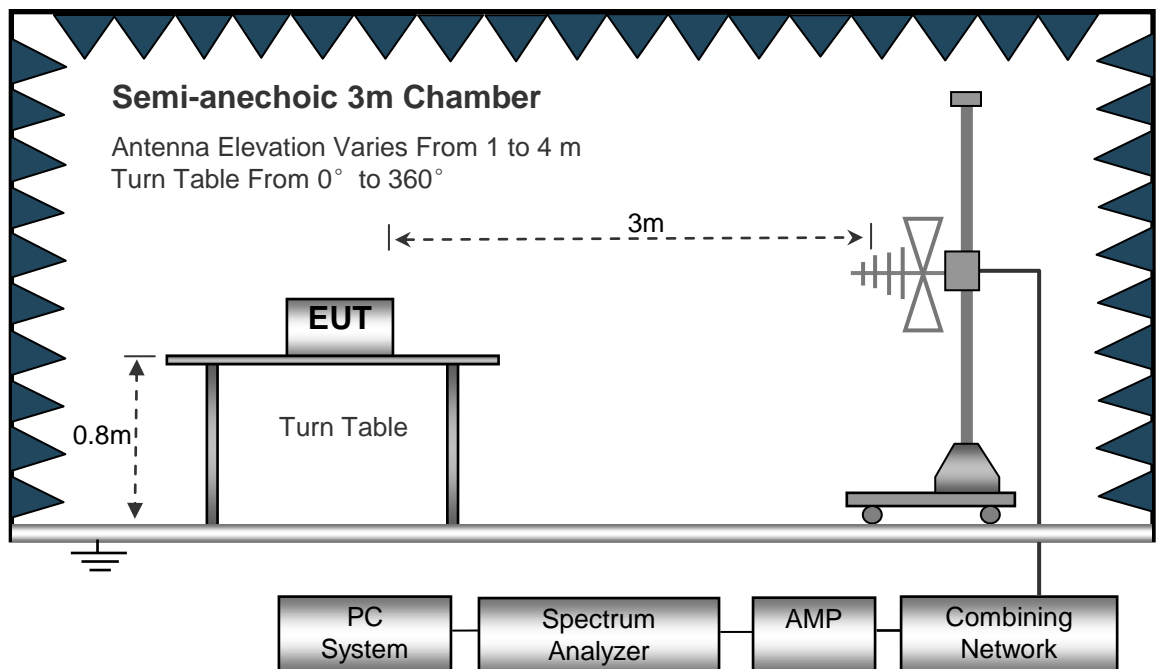

The test setup for emission measurement above 1 GHz.

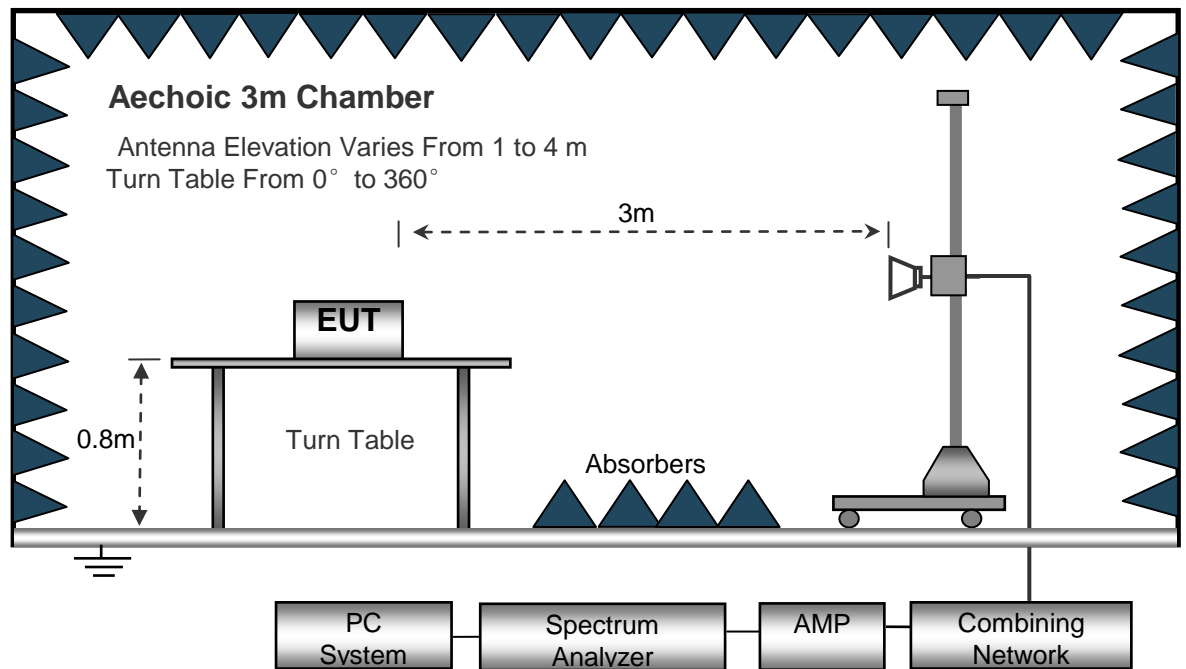

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth 10kHz
 Video Bandwidth 10kHz
 Resolution Bandwidth 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 100kHz
 Video Bandwidth 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth 1MHz
 Video Bandwidth 3MHz
 Detector Ave.
 Resolution Bandwidth 1MHz
 Video Bandwidth 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Test Result

Test Frequency : Below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.231/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB/m)	(dB μ V/m)	(dB μ V/m)	(dB)
2479.61	74.25	PK	300	1.6	H	-13.08	61.17	114.00	-52.83
2479.61	62.28	PK	146	1.8	V	-13.08	49.20	114.00	-64.80
4959.22	59.27	PK	274	1.9	H	0.09	59.36	74.00	-14.64
4959.22	53.14	PK	115	1.2	V	0.09	53.23	74.00	-20.77
7438.83	55.31	PK	33	1.4	H	3.01	58.32	74.00	-15.68
7438.83	48.25	PK	331	1.6	V	3.01	51.26	74.00	-22.74
9918.44	44.23	PK	308	1.2	H	5.39	49.62	74.00	-24.38
9918.44	26.40	PK	279	1.2	V	5.39	31.79	74.00	-42.21

AV = Peak +20Log10(duty cycle) =PK+(-0.72) [refer to section 8 for more detail]

Frequency	PK	Turn table Angle	RX Antenna		Duty cycle Factor	AV	FCC Part 15.231/209/205	
			Height	Polar			Limit	Margin
(MHz)	(dBμV/m)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2479.61	61.17	300	1.6	H	-9.27	51.90	94.00	-42.10
2479.61	49.20	146	1.8	V	-9.27	39.93	94.00	-54.07
4959.22	59.36	274	1.9	H	-9.27	50.09	54.00	-3.91
4959.22	53.23	115	1.2	V	-9.27	43.96	54.00	-10.04
7438.83	58.32	33	1.4	H	-9.27	49.05	54.00	-4.95
7438.83	51.26	331	1.6	V	-9.27	41.99	54.00	-12.01
9918.44	49.62	308	1.2	H	-9.27	40.35	54.00	-13.65
9918.44	31.79	279	1.2	V	-9.27	22.52	54.00	-31.48

9 Periodic Operation

The duty cycle was determined by the following equation:


To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

$$\text{Duty Cycle(\%)} = \frac{\text{Total On interval in a complete pulse train}}{\text{Length of a complete pulse train}} * \%$$

$$\text{Duty Cycle Correction Factor(dB)} = 20 * \text{Log}_{10}(\text{Duty Cycle})$$

Total transmission time(ms)	59
Length of a complete transmission period(ms)	59
Duty Cycle(%)	1
Duty Cycle Correction Factor(dB)	0

Refer to the duty cycle plot (as below)

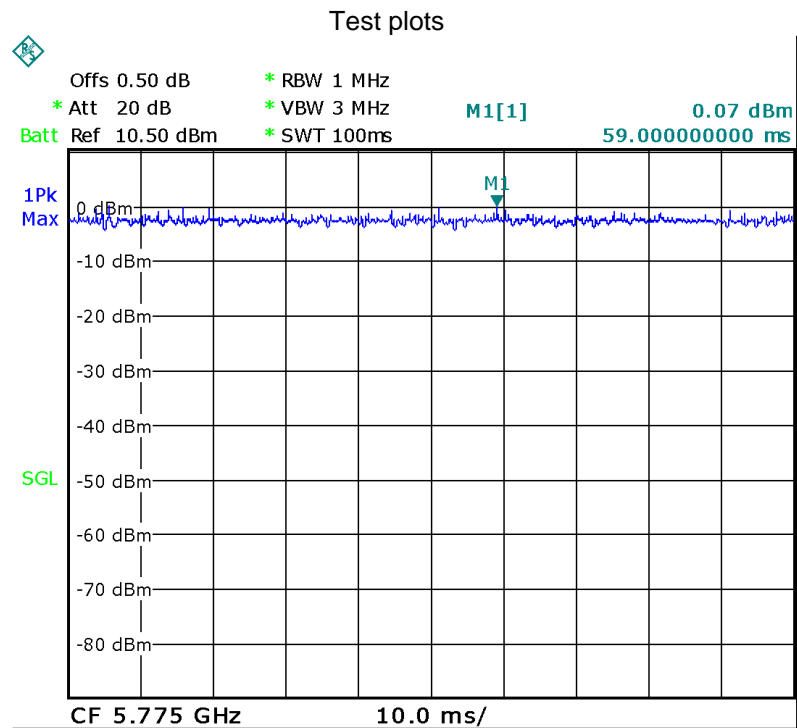

10 Restricted band

Test Requirement: FCC Part15 Paragraph 15.205
 Test Method: ANSI C63.10: 2013
 Test Result: N/A


10.1 Requirements:

emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35apply to these measurements.

10.2 Test Result


Mode: Continuously Transmitting

Antenna Polarization: Vertical

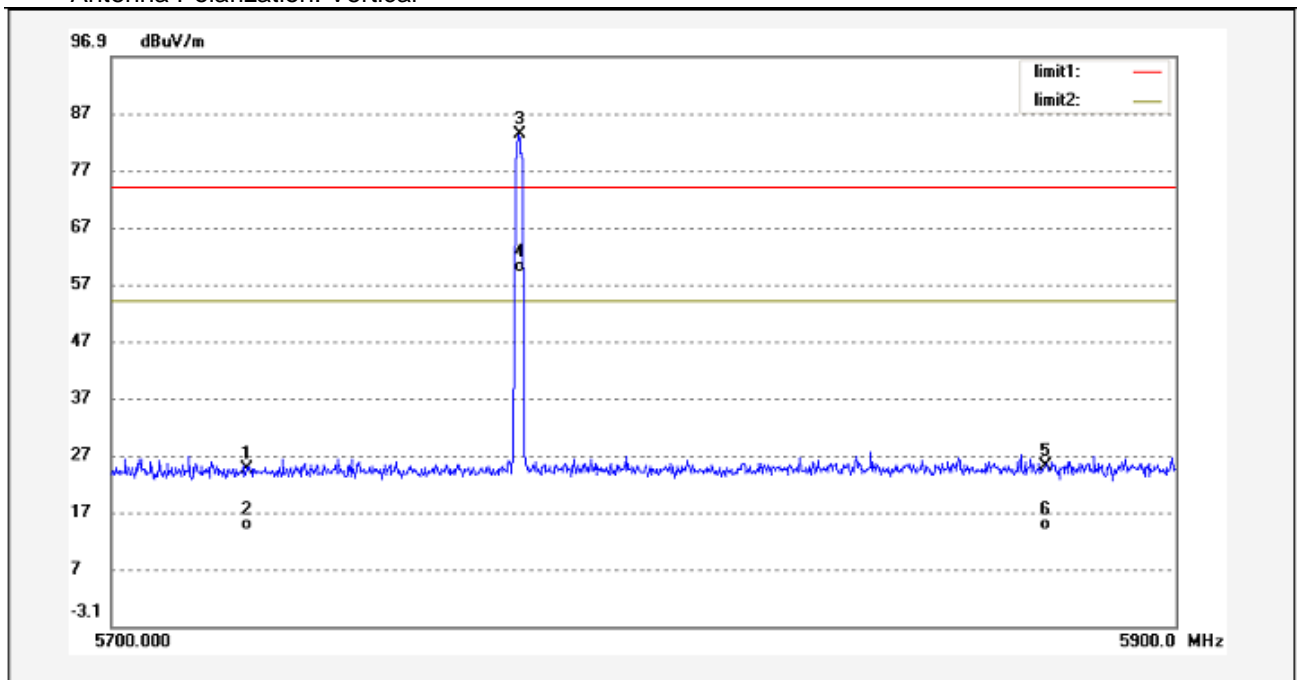

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5725.000	35.90	-11.31	24.59	74.00	-49.41	peak	
2	5725.000	25.01	-11.31	13.70	54.00	-40.30	AVG	
3	5775.540	94.38	-11.12	83.26	114.00	-30.74	peak	fundamental
4	5775.540	70.03	-11.12	58.91	94.0	-35.09	AVG	
5	5875.000	35.74	-10.82	24.92	74.00	-49.08	peak	
6	5875.000	24.62	-10.82	13.80	54.00	-40.20	AVG	

Antenna Polarization: Horizontal

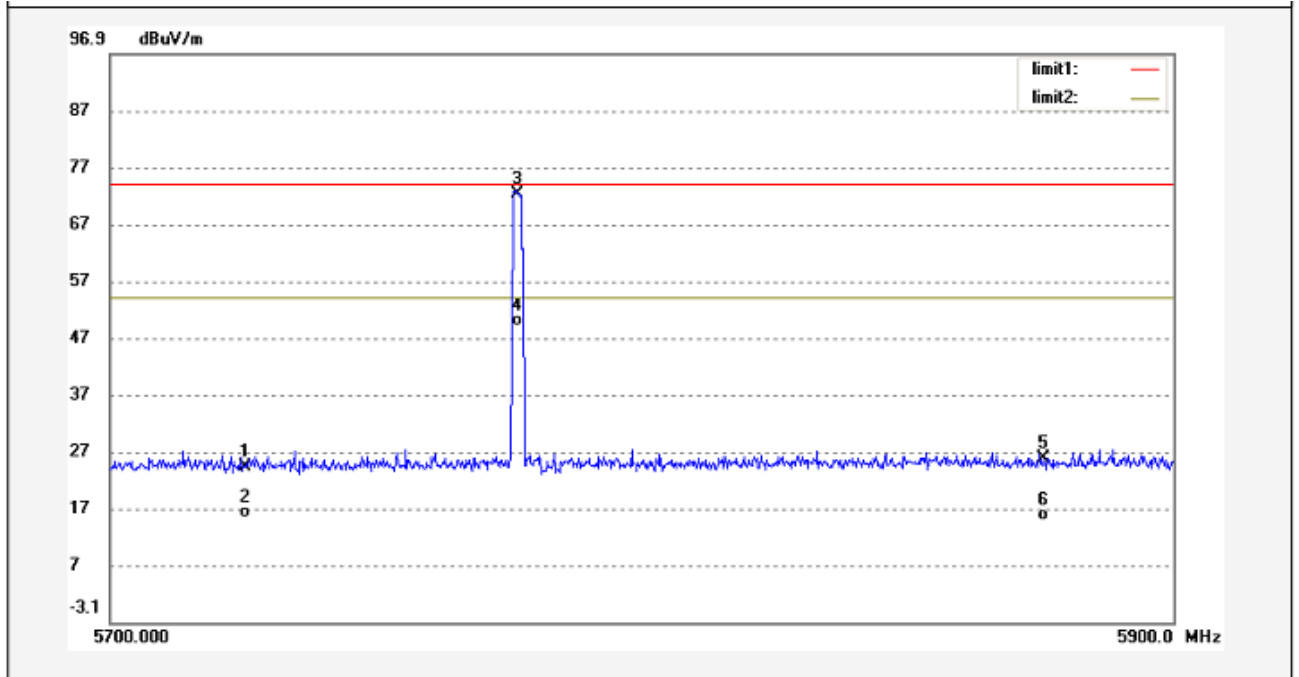

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5725.000	35.47	-11.31	24.16	74.00	-49.84	peak	
2	5725.000	26.54	-11.31	15.23	54.00	-38.77	AVG	
3	5775.540	83.39	-11.12	72.27	114.00	-37.73	peak	fundamental
4	5775.540	60.11	-11.12	48.99	94.00	-45.01	AVG	
5	5875.000	36.62	-10.82	25.80	74.00	-48.20	peak	
6	5875.000	25.63	-10.82	14.81	54.00	-39.19	AVG	

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.215(c)

Test Method: ANSI C63.10:2013

Test Mode: Transmitting


11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1MHz, VBW = 3MHz

11.2 Test Result

Frequency (MHz)	Bandwidth Emission (MHz)
5775.00	12.18

Test plots

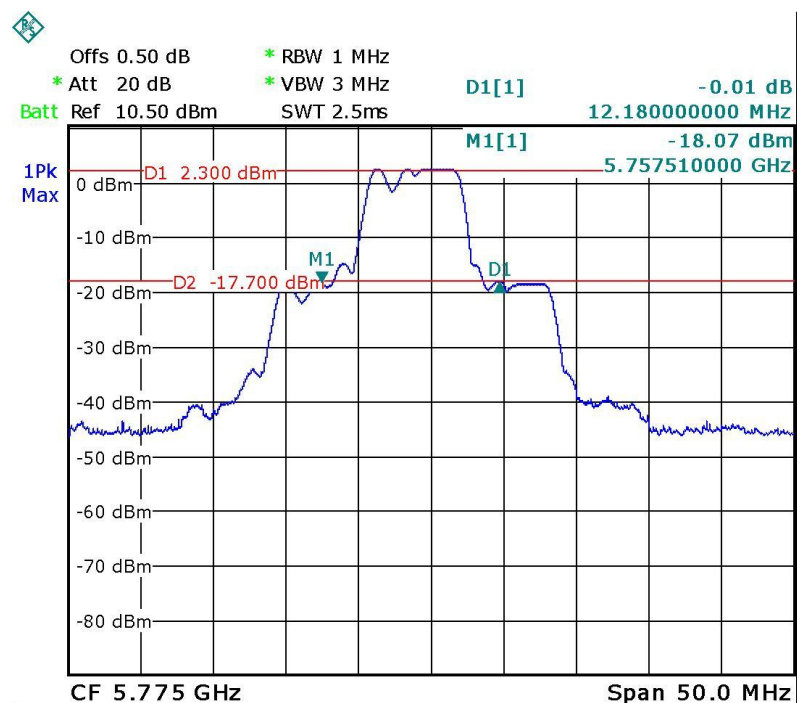


12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Integrated Antenna , fulfil the requirement of this section.


13 Photographs- Model LM55970 Test Setup

13.1 Photograph –Conducted Emissions

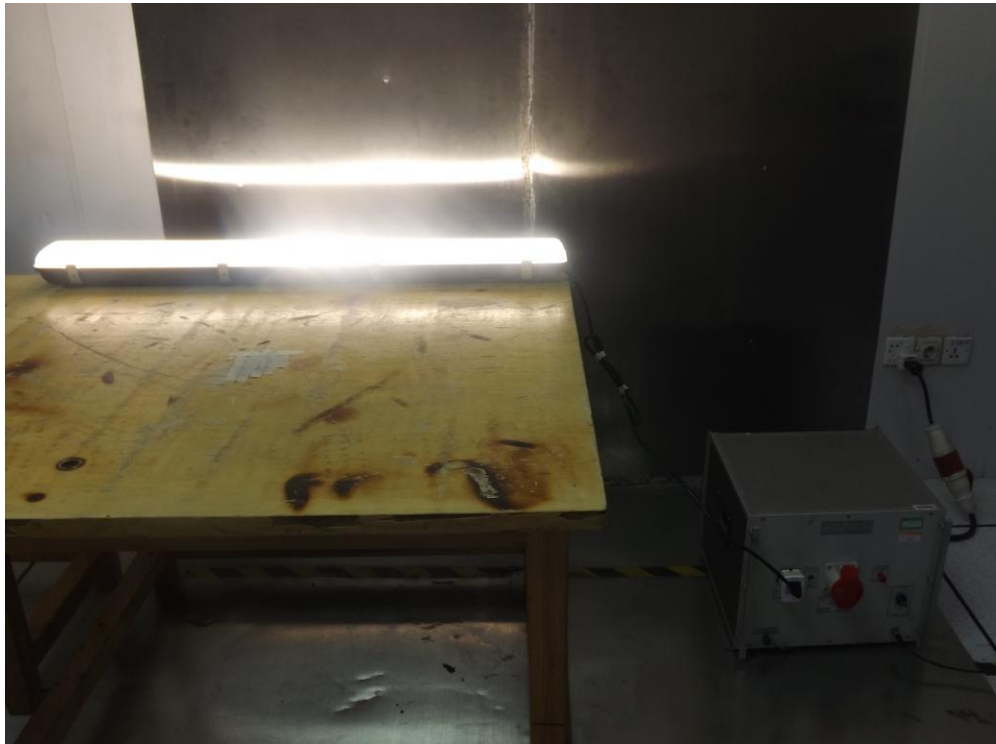


13.2 Photograph – Radiation Emission

Test frequency from 9KHz to 30MHz at test site 2#

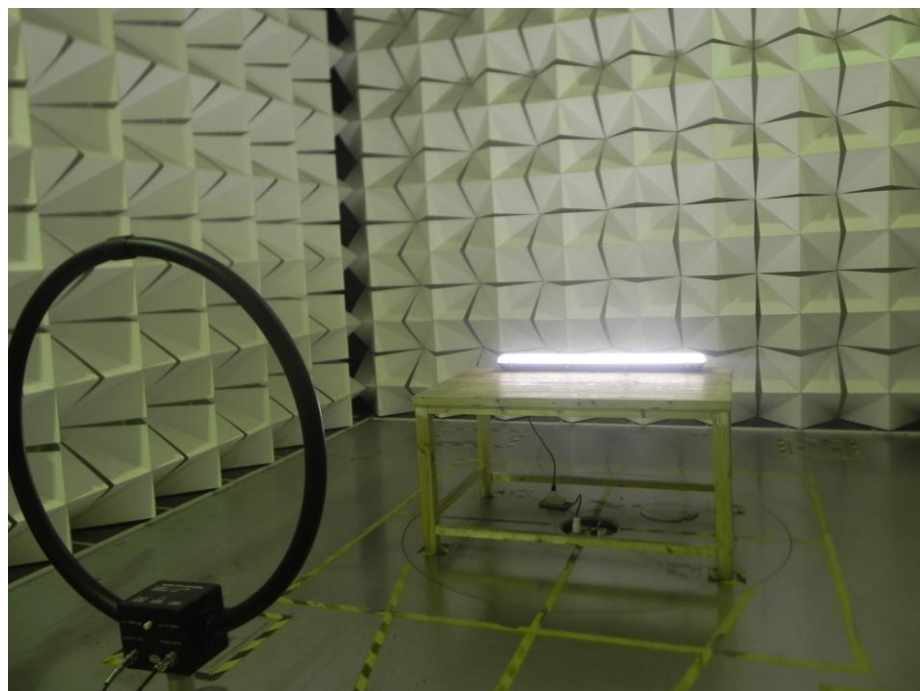

Test frequency from 30MHz to 1GHz at test site 2#


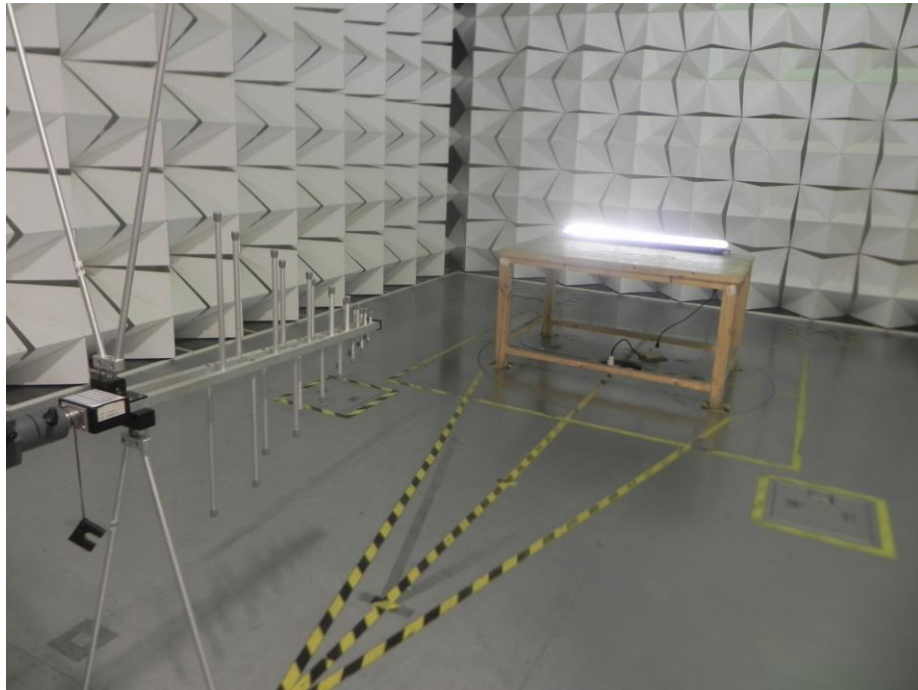



Test frequency above 1GHz at test site 1#



14 Photographs - Constructional Details


14.1 Model LM55970- External Photos

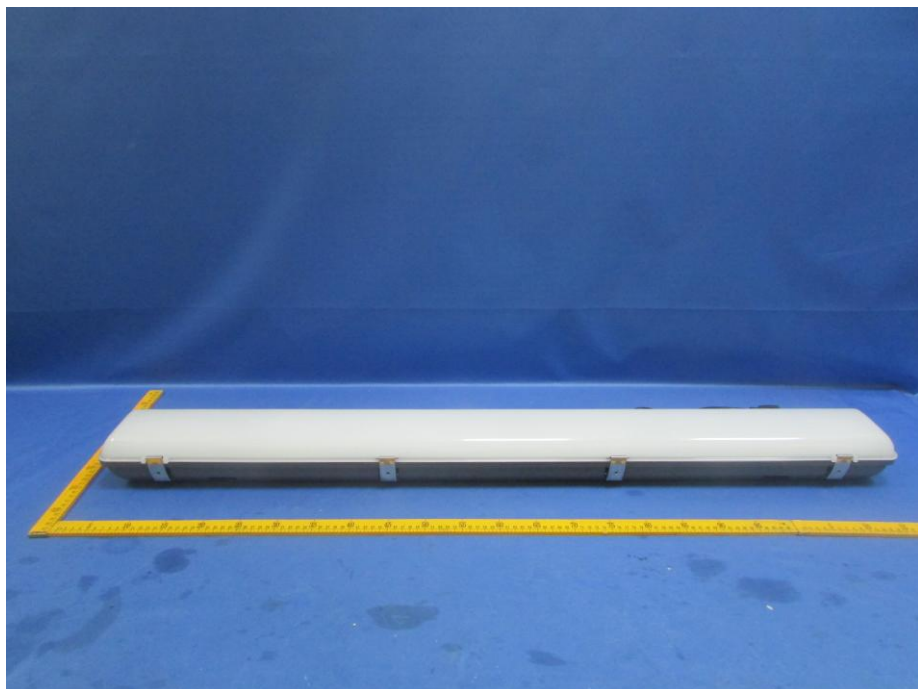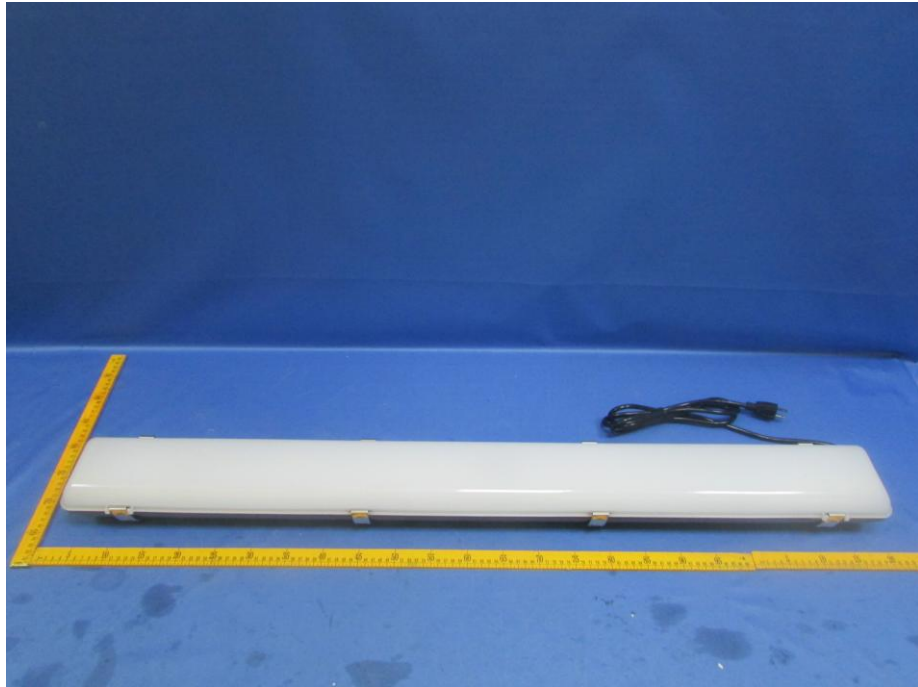



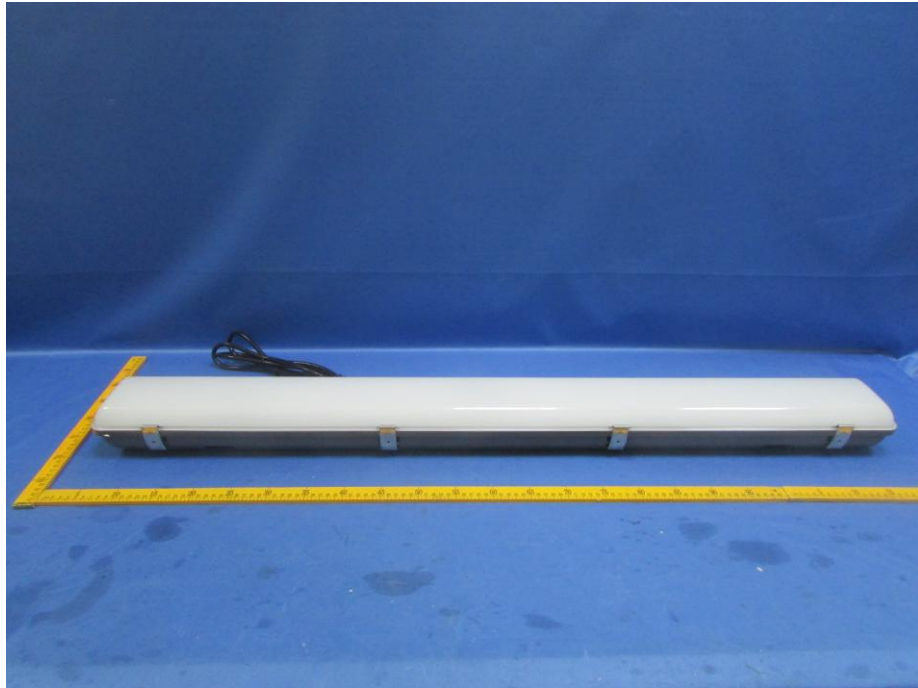








14.2 Model LM55970- Internal Photos


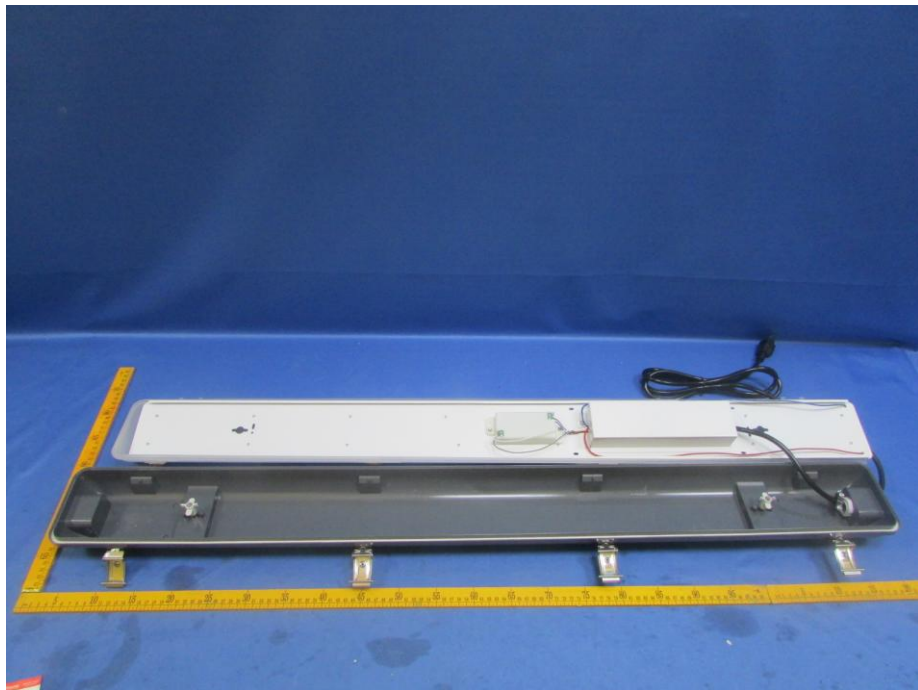


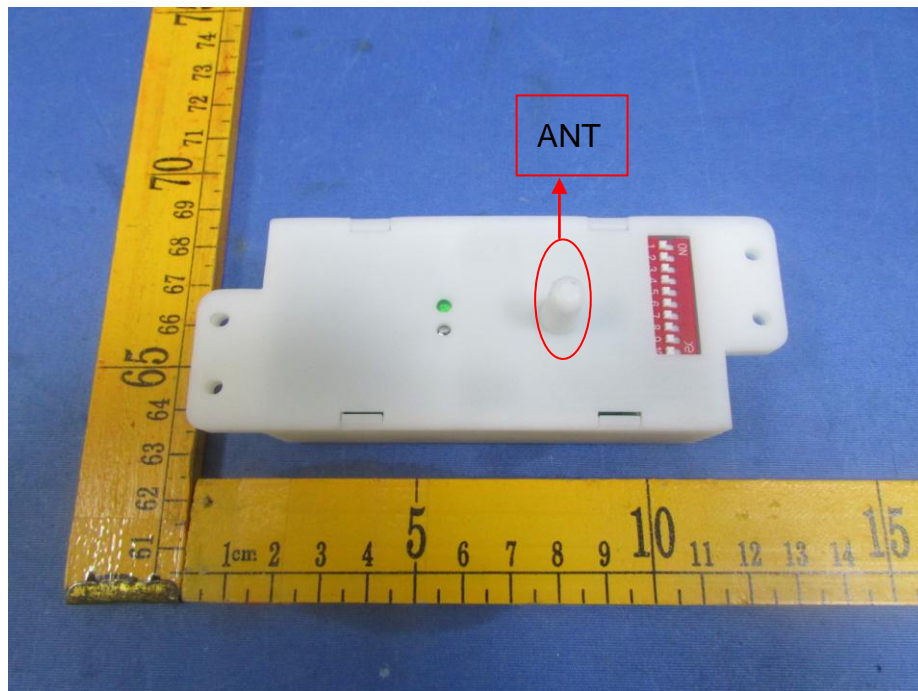

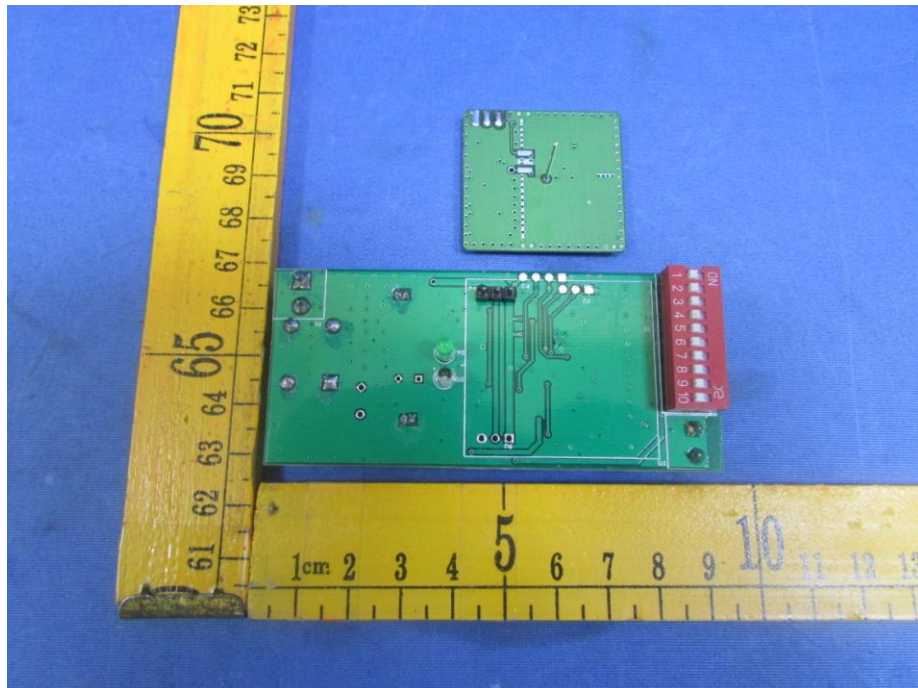
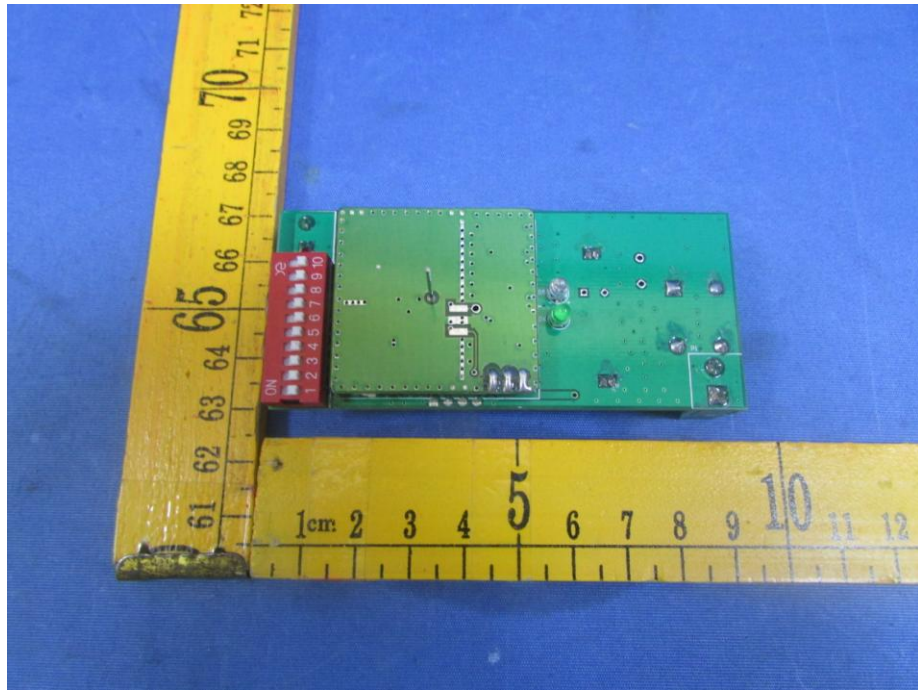


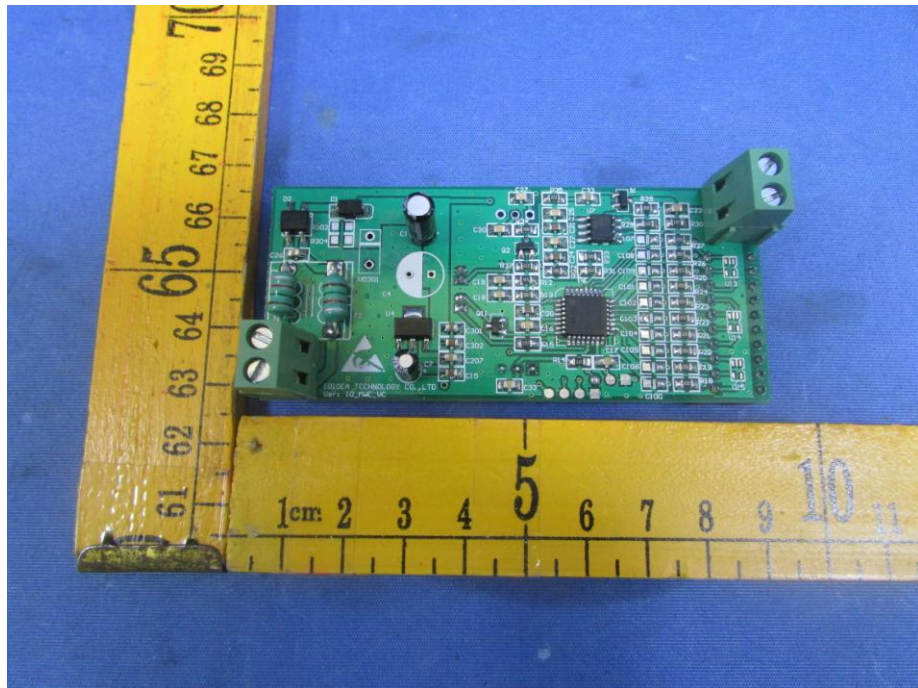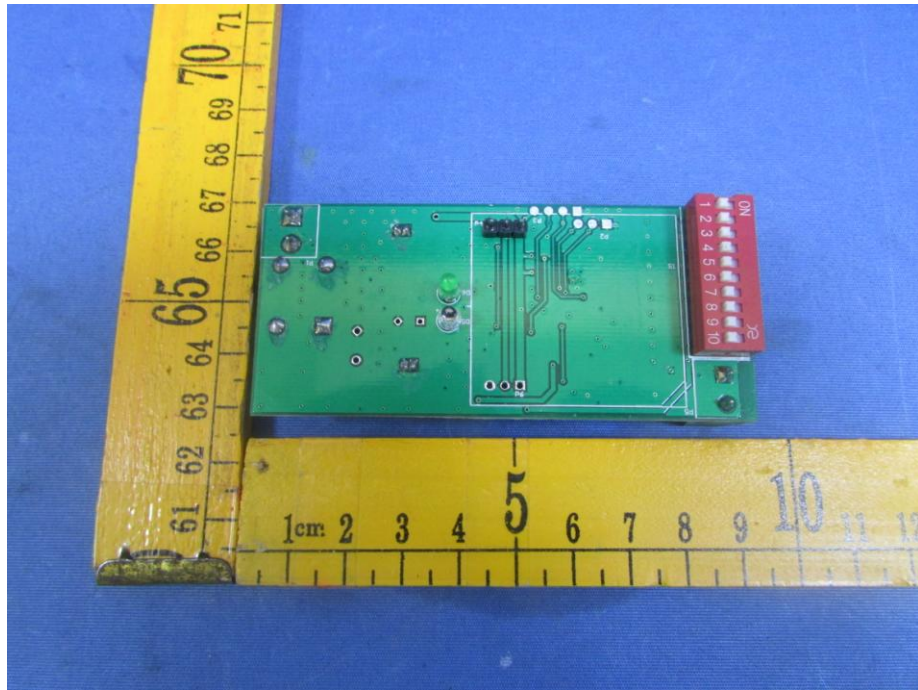


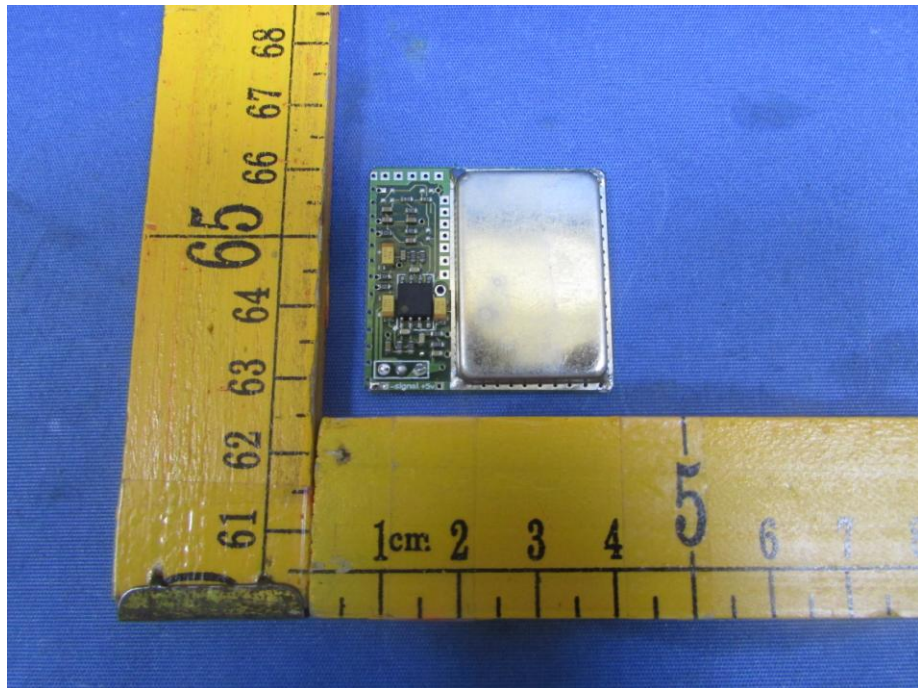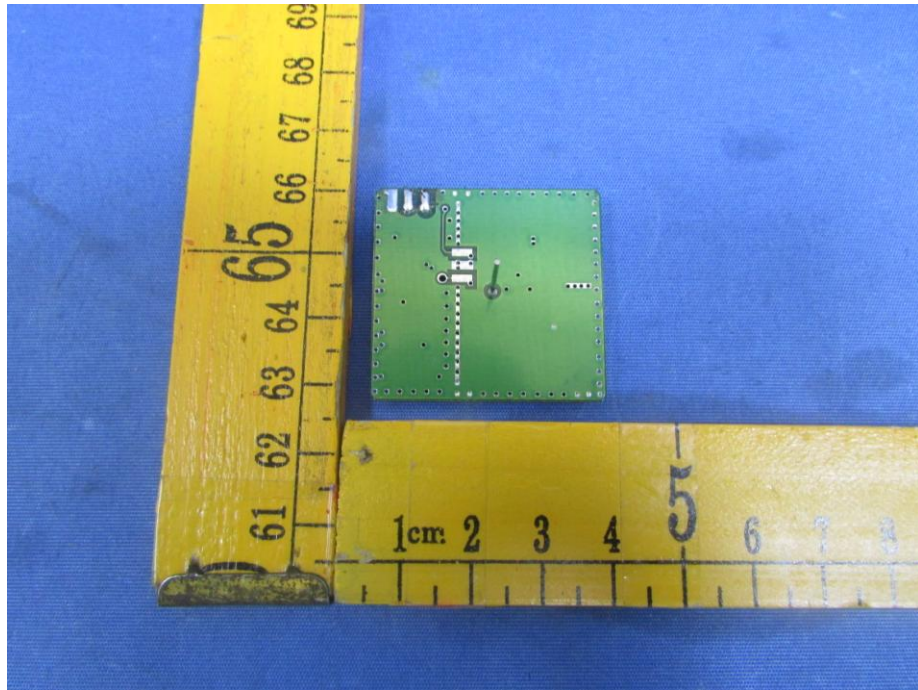

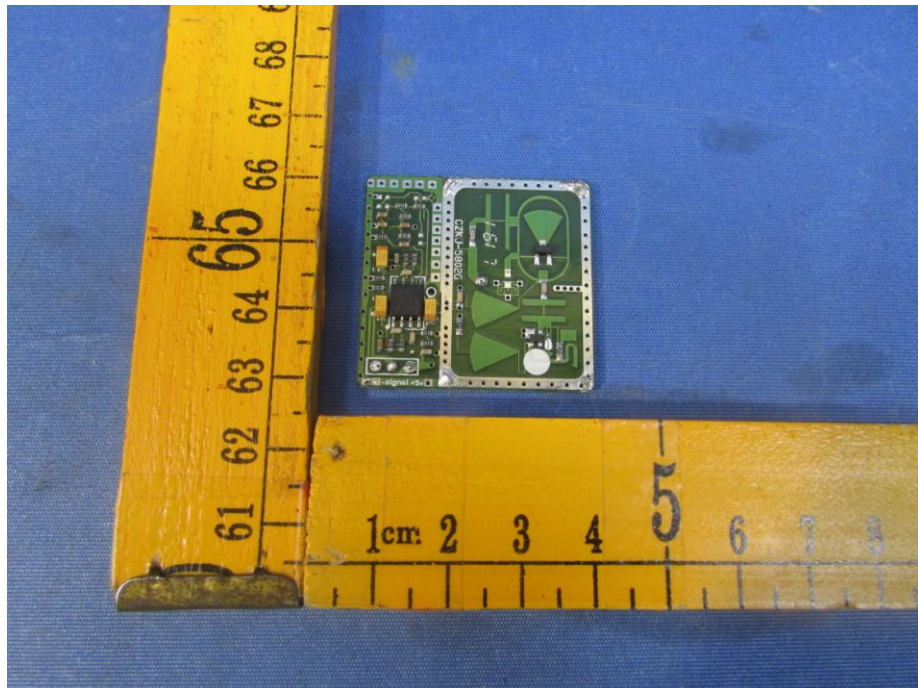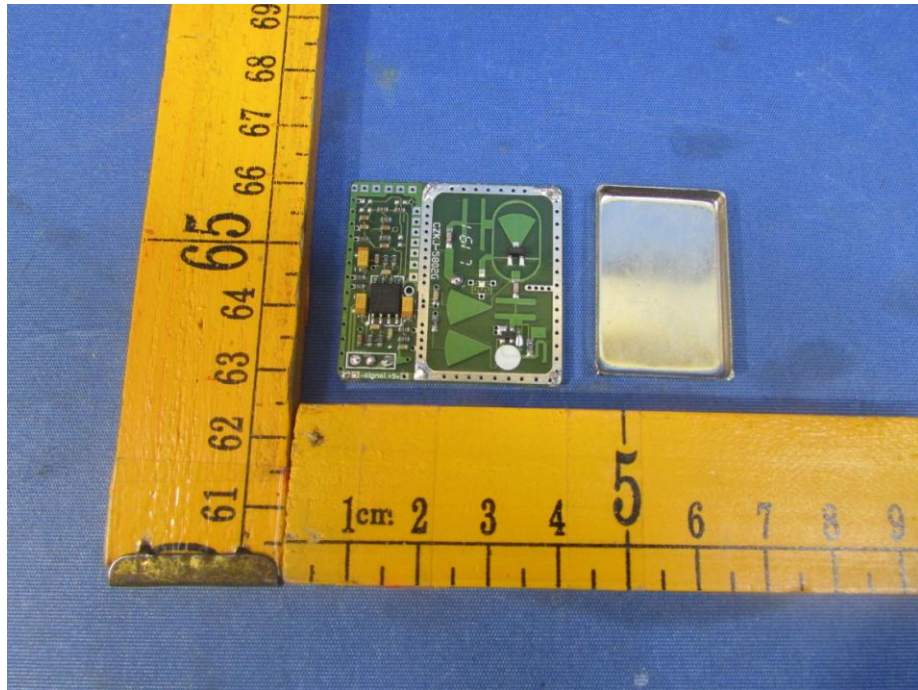



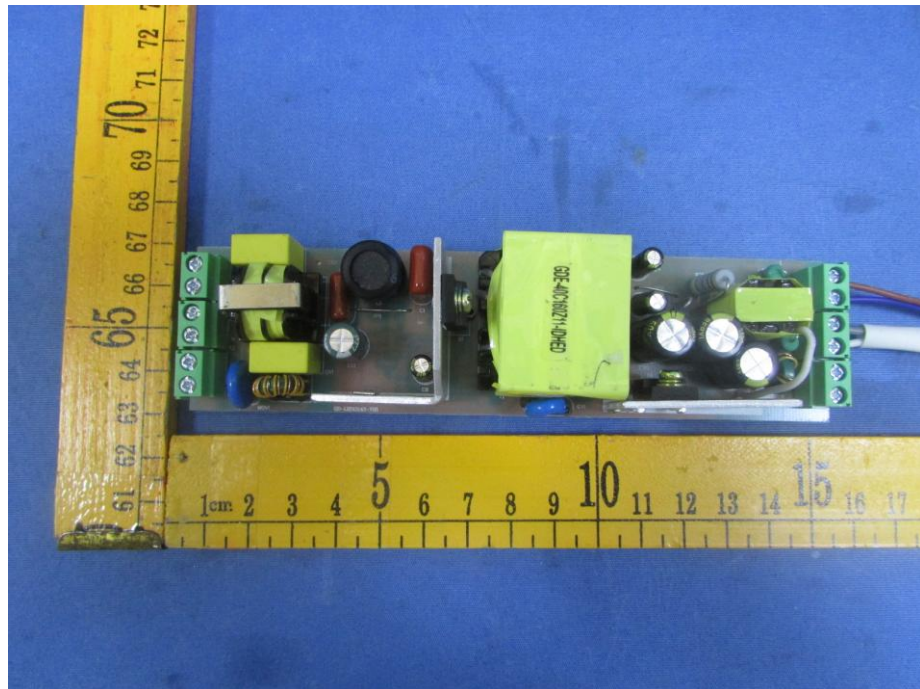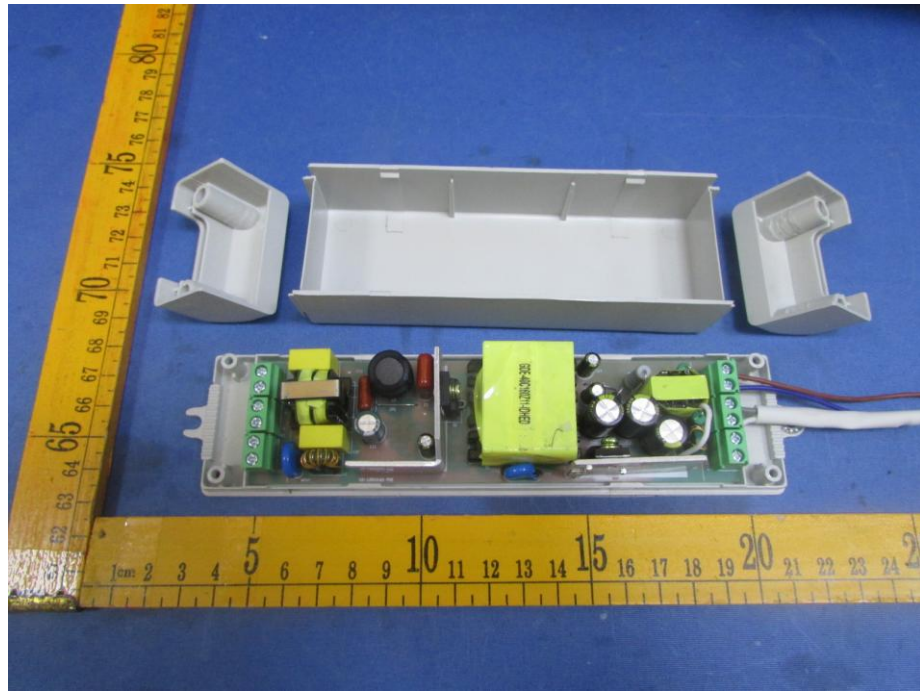

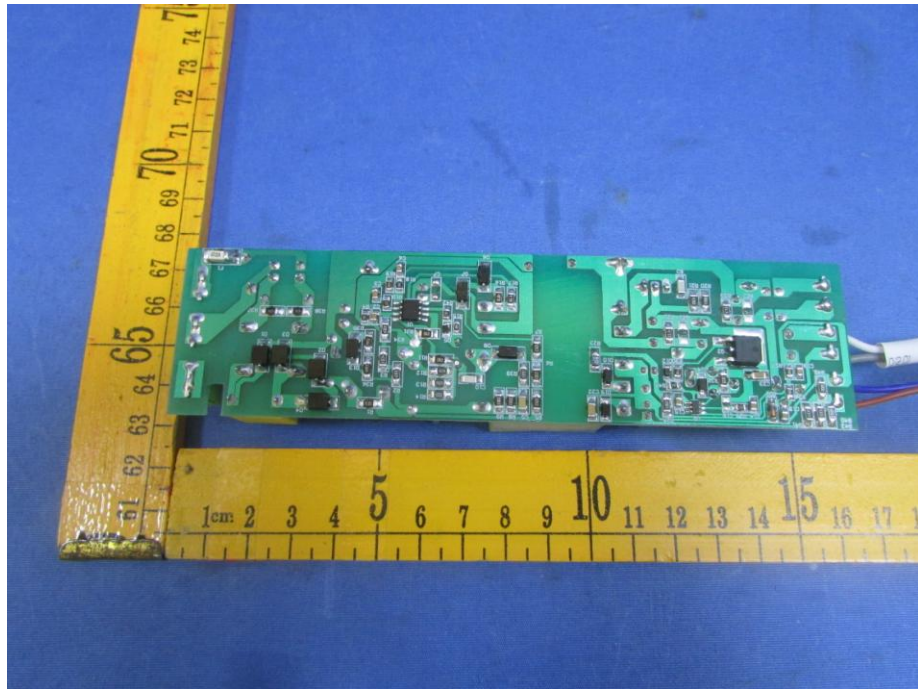

====End of Report====