



FCC/IC - TEST REPORT

Report Number : **68.940.17.01812.01** Date of Issue: May 23, 2018

Model : **LM56387**

Product Type : Microwave Sensor

Applicant : Winplus Co., Ltd.

Address : Suites 6-11, 7th Floor, Corporation Park, 11 On La Shatin, Hong Kong

Manufacture : Winplus Co., Ltd.

Address : Suites 6-11, 7th Floor, Corporation Park, 11 On La Shatin, Hong Kong

Test Result : **Positive** **Negative**

Total pages including Appendices : 27

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval



1 Table of Contents

| | |
|---|----|
| 1 Table of Contents..... | 2 |
| 2 Details about the Test Laboratory..... | 3 |
| 3 Description of the Equipment Under Test..... | 4 |
| 4 Summary of Test Standards..... | 5 |
| 5 Summary of Test Results..... | 6 |
| 6 General Remarks..... | 7 |
| 7 Test setups..... | 8 |
| 8 Technical Requirement..... | 9 |
| 8.1 Conducted Emission..... | 9 |
| 8.2 Field strength of emissions and Restricted bands..... | 12 |
| Field strength of emissions and Restricted bands..... | 13 |
| 8.3 Out of Band Emissions..... | 17 |
| 8.4 20dB Bandwidth & 99% Occupied Bandwidth..... | 22 |
| 9 Test equipment list..... | 26 |
| 10 System Measurement Uncertainty..... | 27 |



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

FCC Registration Number: 514049

IC Registration Number: 10320A-1

Telephone: 86 755 8828 6998
Fax: 86 755 8828 5299

3 Description of the Equipment Under Test

Description of the Equipment Under Test

| | |
|----------------------------|--|
| Product: | Microwave Sensor |
| Model no.: | LM56387 |
| FCC ID: | WUI-LM56387 |
| IC: | 7297A-LM56387 |
| Options and accessories: | NIL |
| Ratings: | 8-12VDC |
| RF Transmission Frequency: | 5771MHz - 5872MHz |
| Modulation: | Unmodulated |
| Antenna Type: | PCB |
| Antenna Gain: | 0dBi |
| Description of the EUT: | The product is a Microwave Sensor that operated at 5.8GHz, The TX and RX range is 5771MHz-5872MHz. |

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURER | MODEL NO.(SHIELD) | S/N(LENGTH) |
|-------------|--------------|-------------------|-------------|
| --- | --- | --- | --- |

4 Summary of Test Standards

| Test Standards | |
|--|---|
| FCC Part 15 Subpart C 10-1-2017 Edition | PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators |
| RSS-Gen Issue 5 April 2018 | General Requirements and Information for the Certification of Radio Apparatus |
| RSS-210 Issue 9 August 2016 | RSS-210 — Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment |

All the test methods were according to ANSI C63.10-2013.

5 Summary of Test Results

| Technical Requirements | | | | | |
|--|------------|-----------|-------------------------------------|--------------------------|--------------------------|
| FCC Part 15 Subpart C 15.249, RSS-Gen, RSS-210 | | | | | |
| Test Condition | Pages | Test Site | Test Result | | |
| | | | Pass | Fail | N/A |
| 15.207 & RSS-Gen A8.8 Conducted emission AC power port | 9 | Site 1 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| §15.205(a), §15.209(a), §15.249(a), §15.249(c) & RSS-210 B.10 Field strength of emissions and Restricted bands | 12 | Site 1 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| §15.249(d), RSS-210 B.10 Out of band emissions | 21 | Site 1 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC §15.215(c) 20dB bandwidth & RSS-Gen 6.7 99% Occupied Bandwidth | 26 | Site 1 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| §15.203 Antenna requirement | See note 1 | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Remark 1: N/A- Not Applicable;

Note 1: The EUT used an integral PCB antenna, which gain is 0 dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID:WUI-LM56387 and IC:7297A-LM56387 complies with Section 15.205, 15.209, 15.249 of the FCC Part 15, Subpart C Rules; RSS-Gen Issue 5 and RSS-210 issue 9.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment Under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: May 03, 2018


Testing Start Date: May 03, 2018

Testing End Date: May 10, 2018

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -

Reviewed by:

Prepared by:




Laurent Yuan
EMC Project Manager



Henry Chen
EMC Project Engineer


7 Test setups

7.1 AC Power Line Conducted Emission test setups

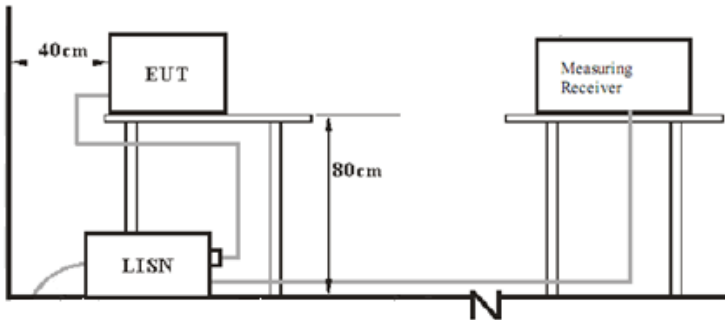


7.2 Radiated test setups

Below 1GHz

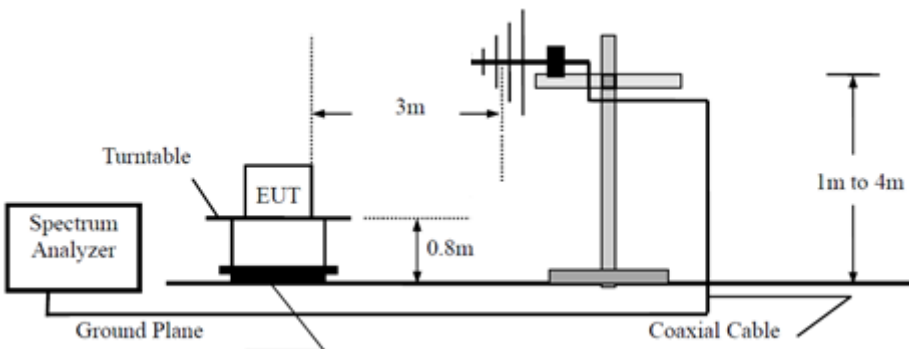

Above 1GHz

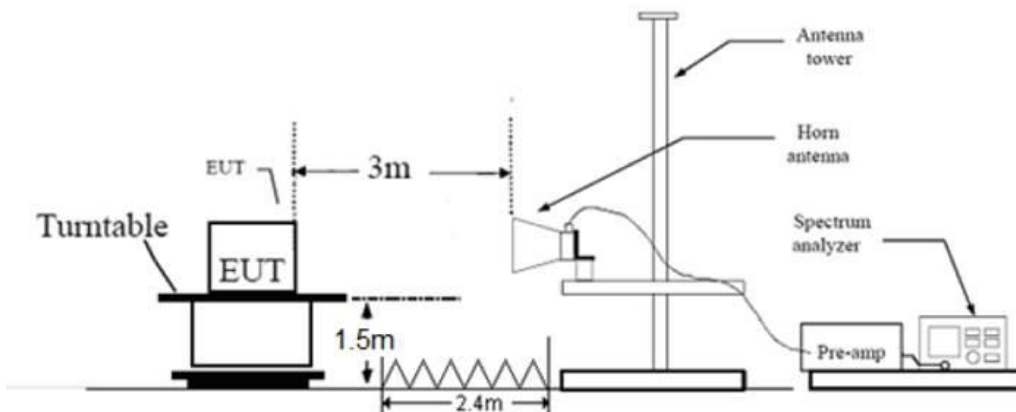

8 Technical Requirement

8.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

| Frequency MHz | QP Limit dB μ V | AV Limit dB μ V |
|------------------|------------------------|------------------------|
| 0.150-0.500 | 66-56* | 56-46* |
| 0.500-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreasing linearly with logarithm of the frequency.

Conducted Emission


Product Type : Mircowave Sensor
 M/N : LM56387
 Operating Condition : Normal working with transmitting
 Test specification : Positive
 Comment : 12VDC

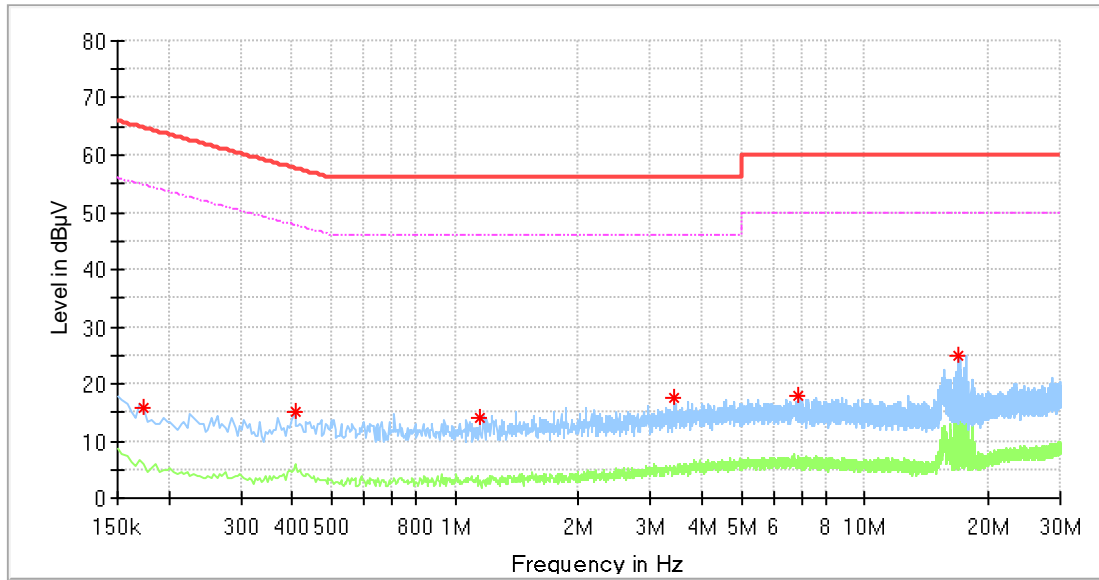

| Frequency (MHz) | MaxPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.174000 | 15.83 | --- | 64.77 | 48.94 | L1 | 10.2 |
| 0.406000 | 15.22 | --- | 57.73 | 42.51 | L1 | 11.6 |
| 1.150000 | 14.10 | --- | 56.00 | 41.90 | L1 | 10.2 |
| 3.410000 | 17.61 | --- | 56.00 | 38.39 | L1 | 10.3 |
| 6.850000 | 17.87 | --- | 60.00 | 42.13 | L1 | 10.5 |
| 16.838000 | 24.89 | --- | 60.00 | 35.11 | L1 | 10.8 |

Conducted Emission

Product Type : Mircowave Sensor
 M/N : LM56387
 Operating Condition : Normal working with transmitting
 Test specification : Negative
 Comment : 12VDC

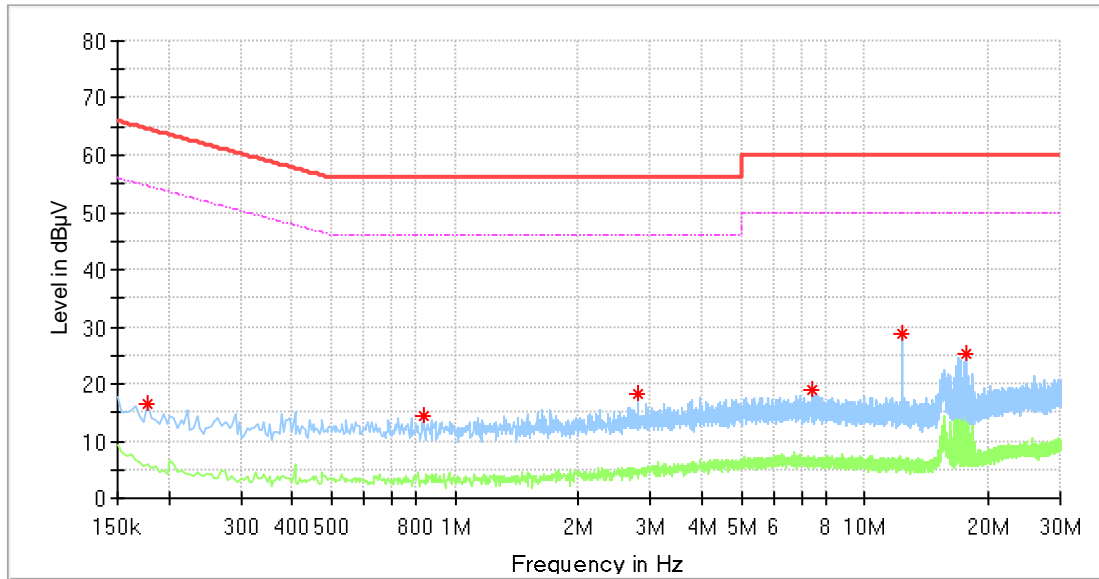

| Frequency (MHz) | MaxPeak (dBµV) | Average (dBµV) | Limit (dBµV) | Margin (dB) | Line | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------|------------|
| 0.178000 | 16.37 | --- | 64.58 | 48.21 | N | 10.3 |
| 0.834000 | 14.23 | --- | 56.00 | 41.77 | N | 10.4 |
| 2.794000 | 18.41 | --- | 56.00 | 37.59 | N | 10.5 |
| 7.418000 | 18.95 | --- | 60.00 | 41.05 | N | 10.7 |
| 12.278000 | 28.79 | --- | 60.00 | 31.21 | N | 11.0 |
| 17.694000 | 25.26 | --- | 60.00 | 34.74 | N | 11.4 |

8.2 Field strength of emissions and Restricted bands

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log (1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Field strength of emissions and Restricted bands

Limits

According to §15.249 (a) & RSS-210 A2.9(a) , the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

| Fundamental frequency | Field strength of fundamental (millivolts/meter) | Field strength of harmonics (microvolts/meter) |
|-----------------------|--|--|
| 902–928 MHz | 50 | 500 |
| 2400–2483.5 MHz | 50 | 500 |
| 5725–5875 MHz | 50 | 500 |
| 24.0–24.25 GHz | 250 | 2500 |

According to §15.249 (c)& RSS-210 B.10, Field strength limits are specified at a distance of 3 meters.

According to §15.249 (d)& RSS-210 B.10, Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209& RSS-Gen, whichever is the lesser attenuation.

According to §15.205 and RSS-GEN 8.10 Unwanted emissions falling into restricted bands in §15.205 (a) and RSS-GEN 8.10 Table 7 shall comply with the limits specified in §15.209 and RSS-Gen.

| Frequency MHz | Field Strength uV/m | Field Strength dB μ V/m | Detector |
|------------------|------------------------|--------------------------------|----------|
| 30-88 | 100 | 40 | QP |
| 88-216 | 150 | 43.5 | QP |
| 216-960 | 200 | 46 | QP |
| 960-1000 | 500 | 54 | QP |
| Above 1000 | 500 | 54 | AV |
| Above 1000 | 5000 | 74 | PK |

Field strength of emissions and Restricted bands

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

EUT: Mircowave Sensor
 M/N: LM56387
 Operating Condition: Tx; 5771MHz

Below 1GHz

| Frequency (MHz) | Emission Level (dBµV/m) | E-Field Polarity | Limits (dBµV/m) | Margin (dB) | Value Type | Corr. (dB) | Emission Type |
|--|----------------------------|---------------------|--------------------|----------------|---------------|---------------|------------------|
| 164.284375* | 23.31 | H | 43.5 | 20.19 | QP | 13.2 | Spurious |
| 30.242500 | 33.80 | V | 40.0 | 6.20 | QP | 15.1 | Spurious |
| Remark: | | | | | | | |
| Corrector Factor = Antenna Factor + Cable Loss | | | | | | | |

Above 1GHz

| Frequency (MHz) | Maximum Emission (dBµV) | Factor (dB) | E-Field Polarity | Limits (dBµV/m) | Margin (dB) | Corr. (dB) | Value Type | Emission Type |
|--|-------------------------------|----------------|---------------------|--------------------|----------------|---------------|---------------|------------------|
| 5771.87 | 82.11 | 0.00 | H | 114.00 | 31.89 | 3.4 | Peak | Fundamental |
| 5771.87 | 81.72 | 0.00 | H | 94.00 | 12.28 | 3.4 | AV | Fundamental |
| 5771.68 | 80.23 | 0.00 | V | 114.00 | 33.77 | 3.5 | Peak | Fundamental |
| 5771.68 | 80.98 | 0.00 | V | 94.00 | 13.02 | 3.5 | AV | Fundamental |
| / | / | 0.00 | H | 74.00 | / | / | Peak | Spurious |
| / | / | 0.00 | V | 74.00 | / | / | Peak | Spurious |
| Remark: | | | | | | | | |
| Corrector Factor = Antenna Factor + Cable Loss – Amplifier Gain Factor=20log(dutycycle), dutycycle=100% | | | | | | | | |

Remark

- 1: AV Emission Level= PK Emission Level+20log(dutycycle)
- 2: Data of measurement within this frequency range shown “/” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- 3: “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- 4: Below 1GHz: Corrector factor=Antenna Factor + Cable loss
- 5: Above 1GHz: Corrector factor=Antenna Factor + Cable loss-Amplifier Gain

Field strength of emissions and Restricted bands

EUT: Microwave Sensor

M/N: LM56387

Operating Condition: Tx; 5818MHz

Above 1GHz

| Frequency (MHz) | Maximum Emission (dB μ V) | Factor (dB) | E-Field Polarity | Limits (dB μ V/m) | Margin (dB) | Corr. (dB) | Value Type | Emission Type |
|---|-------------------------------------|----------------|---------------------|--------------------------|----------------|---------------|---------------|------------------|
| 5818.18 | 81.06 | 0.00 | H | 114.00 | 32.94 | 3.5 | Peak | Fundamental |
| 5818.18 | 79.80 | 0.00 | H | 94.00 | 14.20 | 3.5 | AV | Fundamental |
| 5817.62 | 79.07 | 0.00 | V | 114.00 | 32.46 | 3.6 | Peak | Fundamental |
| 5817.62 | 79.75 | 0.00 | V | 94.00 | 14.25 | / | AV | Fundamental |
| / | / | 0.00 | H | 74.00 | / | / | Peak | Spurious |
| / | / | 0.00 | V | 74.00 | / | / | Peak | Spurious |
| Remark: | | | | | | | | |
| Corrector Factor = Antenna Factor + Cable Loss – Amplifier Gain | | | | | | | | |
| Factor=20log(dutycycle), dutycycle=100% | | | | | | | | |

Remark

- 1: AV Emission Level= PK Emission Level+20log(dutycycle)
- 2: Data of measurement within this frequency range shown “/” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- 3: “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- 4: Below 1GHz: Corrector factor=Antenna Factor + Cable loss
- 5: Above 1GHz: Corrector factor=Antenna Factor + Cable loss-Amplifier Gain

Field strength of emissions and Restricted bands

EUT: Microwave Sensor

M/N: LM56387

Operating Condition: Tx; 5872MHz

Above 1GHz

| Frequency (MHz) | Maximum Emission (dB μ V) | Factor (dB) | E-Field Polarity | Limits (dB μ V/m) | Margin (dB) | Corr. (dB) | Value Type | Emission Type |
|--|-------------------------------------|----------------|---------------------|--------------------------|----------------|---------------|---------------|------------------|
| 5872.37 | 74.66 | 0.00 | H | 114.00 | 39.34 | 3.5 | Peak | Fundamental |
| 5872.37 | 74.85 | 0.00 | H | 94.00 | 19.15 | 3.5 | AV | Fundamental |
| 5872.75 | 75.24 | 0.00 | V | 114.00 | 38.76 | 3.6 | Peak | Fundamental |
| 5872.75 | 72.66 | 0.00 | V | 94.00 | 21.34 | 3.6 | AV | Fundamental |
| / | / | 0.00 | H | 74.00 | / | / | Peak | Spurious |
| / | / | 0.00 | V | 74.00 | / | / | Peak | Spurious |
| Remark: | | | | | | | | |
| Corrector Factor = Antenna Factor + Cable Loss – Amplifier Gain Factor=20log(dutycycle), dutycycle=100% | | | | | | | | |

Remark

- 1: AV Emission Level= PK Emission Level+20log(dutycycle)
- 2: Data of measurement within this frequency range shown “/” in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.
- 3: “*” means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- 4: Below 1GHz: Corrector factor=Antenna Factor + Cable loss
- 5: Above 1GHz: Corrector factor=Antenna Factor + Cable loss-Amplifier Gain

8.3 Out of Band Emissions

Test Method


- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limits

According to §15.249(d) & RSS-210 B.10 Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 and RSS-Gen, whichever is the lesser attenuation.

Out of Band Emissions


EUT: Microwave Sensor
 M/N: LM56387
 Operating Condition: Tx; 5771MHz
 Polarization: Horizontal

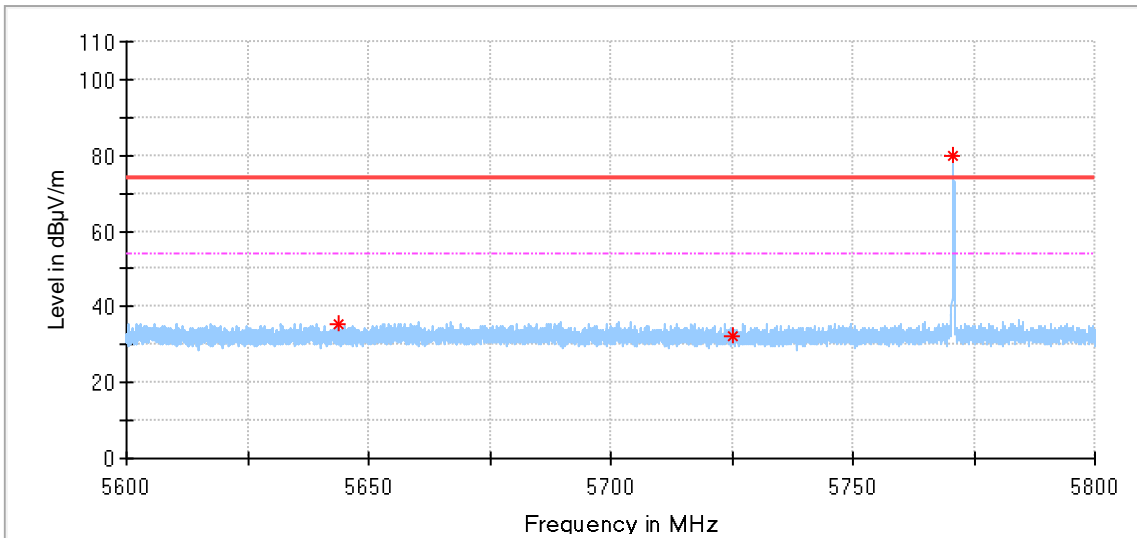

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 5643.681250 | 35.62 | 74.00 | 38.38 | --- | --- | 154.0 | H | 130.0 | 3.3 |
| 5725.000000 | 32.12 | 74.00 | 41.88 | --- | --- | 154.0 | H | 204.0 | 3.2 |
| 5770.743750 | 79.97 | 74.00 | -5.97 | --- | --- | 154.0 | H | 61.0 | 3.4 |

Out of Band Emissions


EUT: Microwave Sensor
 M/N: LM56387
 Operating Condition: Tx; 5771MHz
 Polarization: Vertical

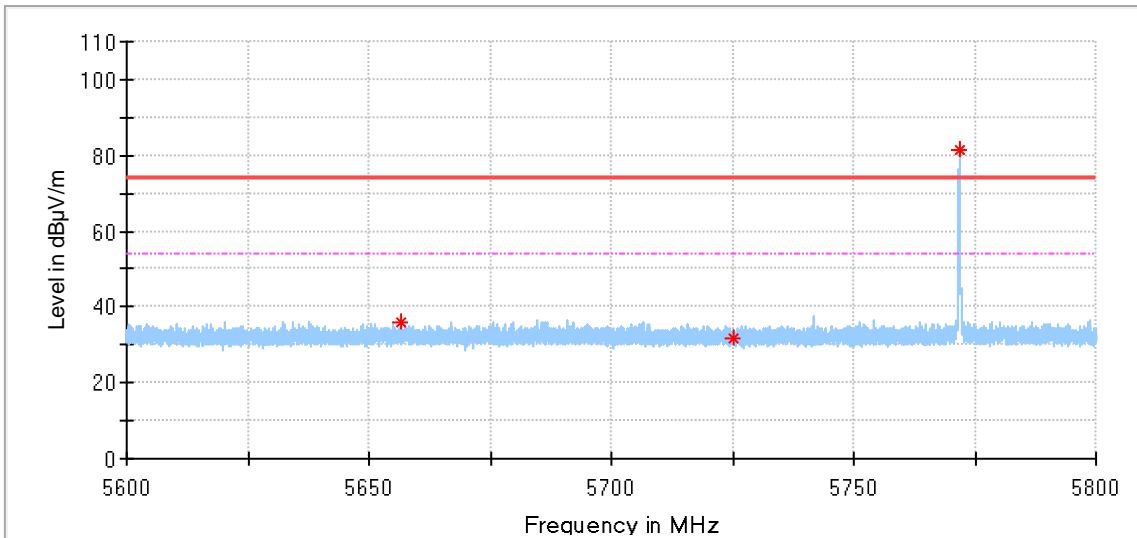

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 5656.637500 | 35.79 | 74.00 | 38.21 | --- | --- | 154.0 | V | 146.0 | 3.3 |
| 5725.000000 | 31.98 | 74.00 | 42.02 | --- | --- | 154.0 | V | 228.0 | 3.3 |
| 5771.837500 | 81.30 | 74.00 | -7.30 | --- | --- | 154.0 | V | 95.0 | 3.5 |

Out of Band Emissions


EUT: Microwave Sensor
 M/N: LM56387
 Operating Condition: Tx; 5872MHz
 Polarization: Horizontal

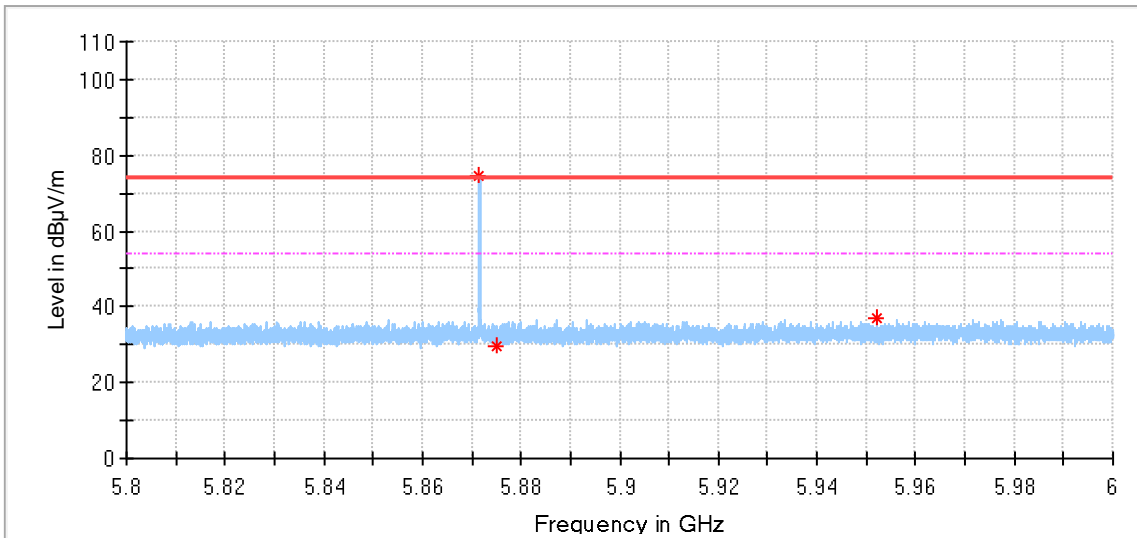

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 5871.575000 | 74.76 | 74.00 | -0.76 | --- | --- | 154.0 | H | 95.0 | 3.5 |
| 5872.000000 | 29.86 | 74.00 | 44.14 | --- | --- | 154.0 | H | 351.0 | 3.5 |
| 5952.118750 | 37.24 | 74.00 | 36.76 | --- | --- | 154.0 | H | 4.0 | 3.9 |

Out of Band Emissions

EUT: Microwave Sensor
 M/N: LM56387
 Operating Condition: Tx; 5872MHz
 Polarization: Vertical

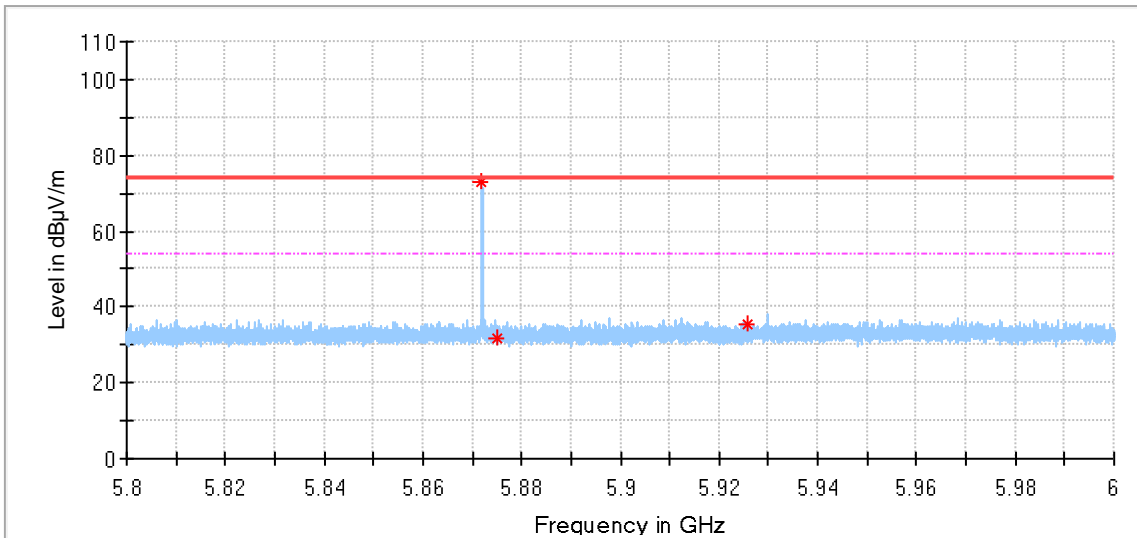

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|------------|
| 5871.962500 | 73.15 | 74.00 | 0.85 | --- | --- | 154.0 | V | 25.0 | 3.6 |
| 5872.000000 | 31.82 | 74.00 | 42.18 | --- | --- | 154.0 | V | 62.0 | 3.6 |
| 5925.587500 | 35.64 | 74.00 | 38.36 | --- | --- | 154.0 | V | 0.0 | 3.8 |

8.4 20dB Bandwidth & 99% Occupied Bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


Limits:

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

According to RSS-Gen 6.7 when an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

20dB Bandwidth & 99% Occupied Bandwidth

| Frequency | 20dB Bandwidth | 99% Bandwidth | Limit |
|-----------|----------------|---------------|-------|
| MHz | KHz | kHz | kHz |
| 5771 | 414.67 | 333.58 | -- |

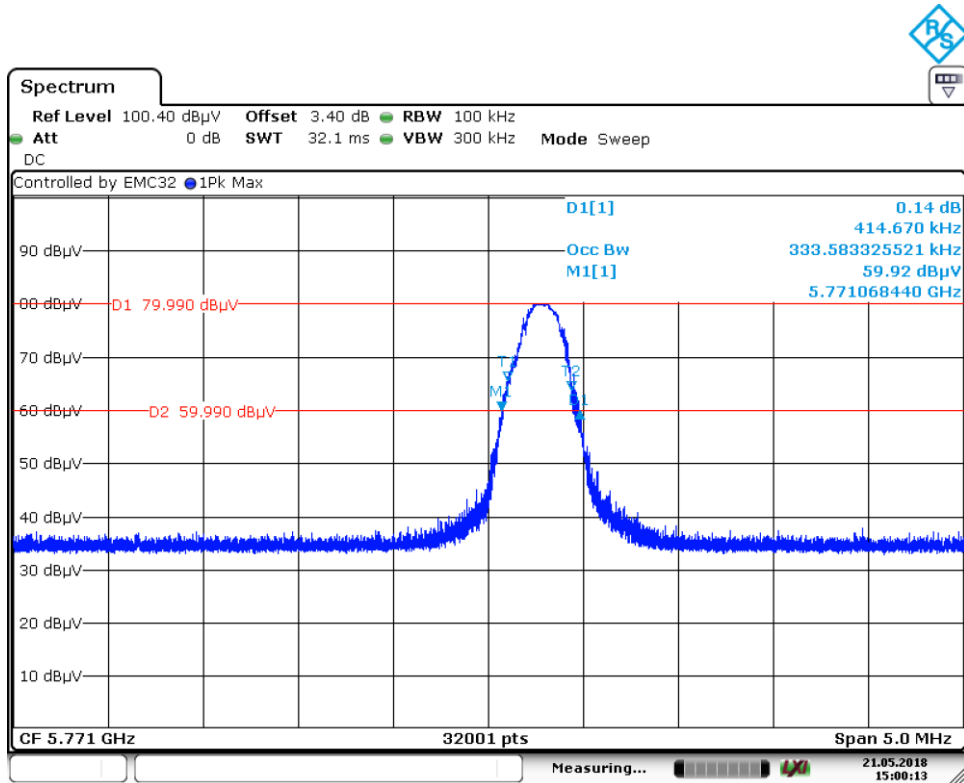


Date: 21.MAY.2018 15:00:12

5771MHz

20dB Bandwidth & 99% Occupied Bandwidth

| Frequency MHz | 20dB Bandwidth KHz | 99% Bandwidth kHz | Limit kHz |
|------------------|-----------------------|----------------------|--------------|
| 5818 | 328.74 | 282.80 | -- |

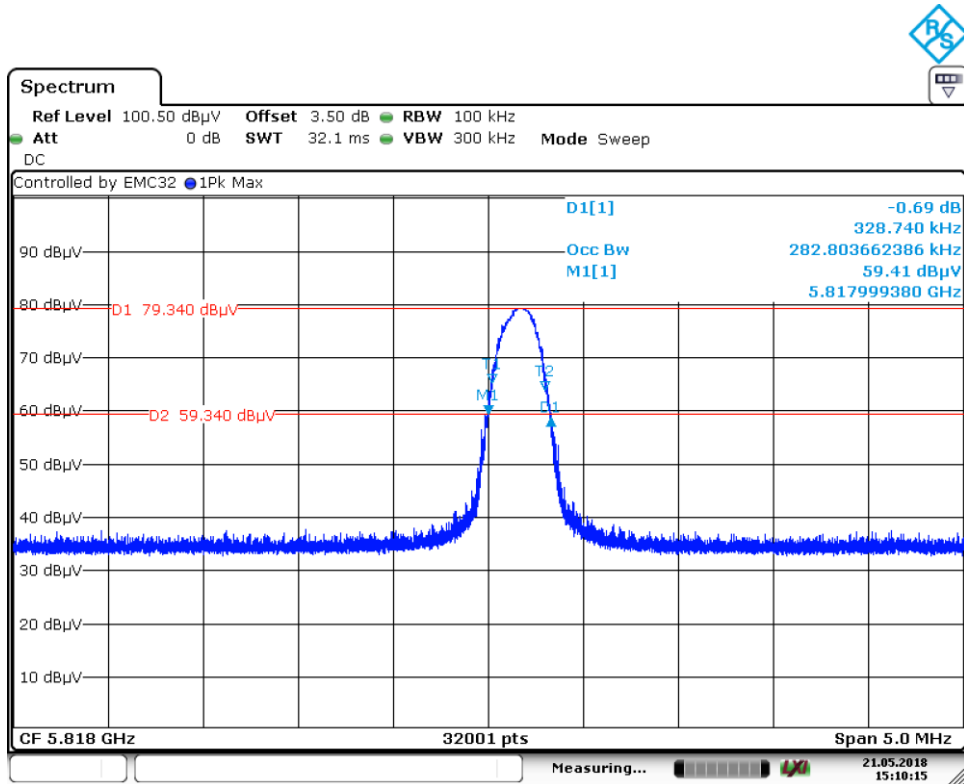


Date: 21.MAY.2018 15:10:15

5818MHz

20dB Bandwidth & 99% Occupied Bandwidth

| Frequency | 20dB Bandwidth | 99% Bandwidth | Limit |
|-----------|----------------|---------------|-------|
| MHz | KHz | kHz | kHz |
| 5872 | 305.93 | 275.14 | -- |

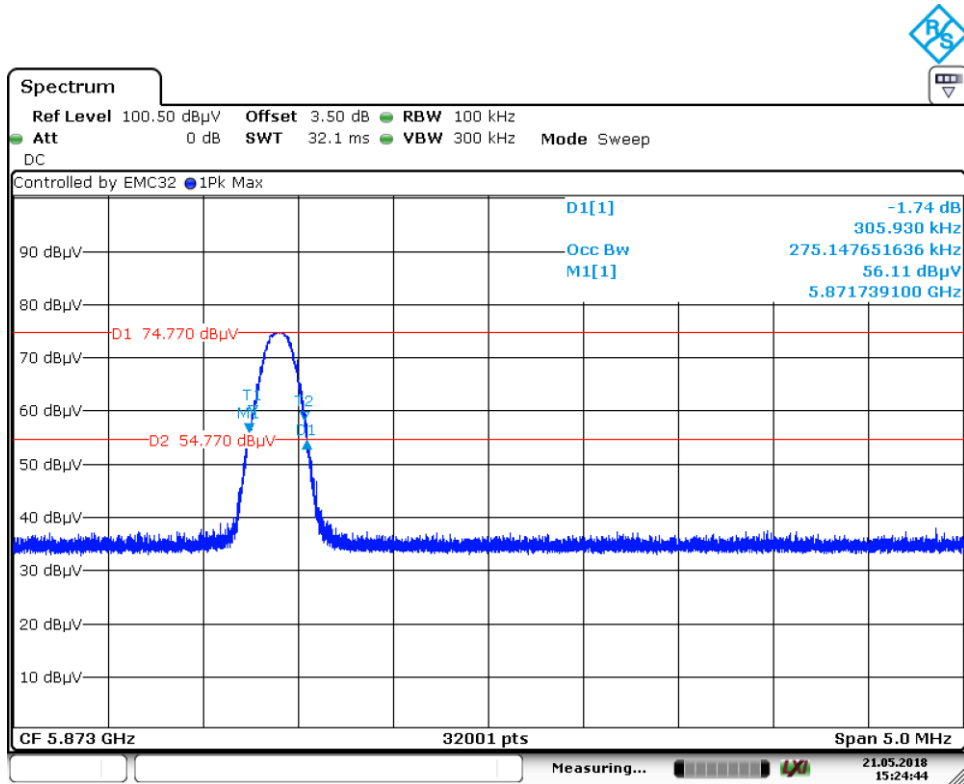

Date: 21.MAY.2018 15:24:44

5872MHz

9 Test equipment list

List of Test Instruments

Radiated Spurious Emission Test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------|-----------------|-------------------|------------|---------------|
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101031 | 2018-7-7 |
| Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9163 | 708 | 2018-7-5 |
| Horn Antenna | Rohde & Schwarz | HF907 | 102295 | 2018-7-5 |
| Wideband Horn Antenna | Q-PAR | QWH-SL-18-40-K-SG | 12827 | 2018-7-5 |
| Pre-amplifier | Rohde & Schwarz | SCU 18 | 102230 | 2018-7-14 |
| Pre-amplifier | Rohde & Schwarz | SCU 40A | 100432 | 2018-7-5 |
| Fully Anechoic Chamber | TDK | 8X4X4 | -- | 2020-7-7 |

Radiated Emission Test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------|-----------------|-----------|------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 26 | 101269 | 2018-7-14 |
| Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9163 | 707 | 2018-7-14 |
| Horn Antenna | Rohde & Schwarz | HF907 | 102294 | 2018-7-14 |
| Pre-amplifier | Rohde & Schwarz | SCU 18 | 102230 | 2018-7-14 |
| Signal Generator | Rohde & Schwarz | SMY01 | 839369/005 | 2018-7-7 |
| Attenuator | Agilent | 8491A | MY39264334 | 2018-7-7 |
| 3m Semi-anechoic chamber | TDK | 9X6X6 | ---- | 2020-7-7 |

Conducted Emission Test

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|--------------------|-------------------|----------------|------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 3 | 101782 | 2018-7-14 |
| LISN | Rohde & Schwarz | ENV4200 | 100249 | 2018-7-14 |
| LISN | Rohde & Schwarz | ENV432 | 101318 | 2018-7-14 |
| LISN | Rohde & Schwarz | ENV216 | 100326 | 2018-7-14 |
| ISN | Rohde & Schwarz | ENY81 | 100177 | 2018-7-14 |
| ISN | Rohde & Schwarz | ENY81-CA6 | 101664 | 2018-7-14 |
| High Voltage Probe | Rohde & Schwarz | TK9420(VT9420) | 9420-584 | 2018-7-14 |
| RF Current Probe | Rohde & Schwarz | EZ-17 | 100816 | 2018-7-14 |
| Attenuator | Shanghai Huaxiang | TS2-26-3 | 080928189 | 2018-7-7 |

10 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| System Measurement Uncertainty | |
|--|--|
| Test Items | Extended Uncertainty |
| Uncertainty for Radiated Spurious Emission 30MHz-3000MHz | Horizontal: 4.98dB; Vertical: 5.06dB; |
| Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz | Horizontal: 4.95dB; Vertical: 4.94dB; |
| Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz | Horizontal: 5.14dB; Vertical: 5.12dB; |
| Uncertainty for Conducted Emission 150kHz-30MHz (for test using AMN ENV216 or ENV4200) | 3.46dB |