

Global EMC Inc. Labs

MPE Evaluation

As per

Industry Canada Safety Code 6

EMC

FCC Part 15 Subpart C: 2007 15.247i

FCC Part 1, Section 1.1310 Table 1 (B)

On the

Audio frequency wireless Transmitter / Receiver

770102



Ashwani Malhotra

Global EMC Inc.
180 Brodie Dr, Unit 2
Richmond Hill, ON L4B 3K8
Canada
Ph: (905) 883-3919

Testing produced for

SONAUOX
Audio Solution

See Appendix A for full customer & EUT details.



LAB REGISTRATION #6844A-1



FCC REGISTRATION
#612361



Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Table of Contents

Table of Contents.....	2
Report Scope.....	3
Summary	4
Test Results Summary	5
Justifications, Descriptions, or Deviations.....	5
Applicable Standards, Specifications and Methods.....	6
Sample calculation(s).....	7
Sample calculation(s).....	7
Document Revision Status.....	7
Definitions and Acronyms	8
Testing Facility	9
Calibrations and Accreditations.....	9
Testing Environmental Conditions and Dates	10
Detailed Test Results Section	11
Maximum Permissible Exposure	12
Appendix A – EUT Summary.....	14
Appendix B – EUT and Test Setup Photographs.....	16

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Report Scope

This report addresses the EMC verification testing and test results of the 770102 Wireless audio frequency transmitter / receiver, herein referred to as EUT (Equipment Under Test) performed at Global EMC Labs.

The EUT was evaluated for compliance against the following standards:

IC Safety Code 6 & FCC Part 1, Section 1.1310 Table 1 (B)

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report. The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by A2LA or any other accreditation agency, any government, or Global EMC Inc.

Opinions/interpretations expressed in this report, if any, are outside the scope of Global EMC Inc accreditation. Any opinions expressed do not necessarily reflect the opinions of Global EMC Inc, unless otherwise stated.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Summary

The results contained in this report relate only to the item(s) tested.

EUT FCC Certification #, FCC ID:	WUO - 770102
EUT Industry Canada Certification #, IC:	7985A-770102
EUT Passed all tests performed.	Yes (see test results summary)
Tests conducted by	Ashwani Malhotra

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.247(i) IC Safety code 6	Maximum Permissible Exposure	> 20 cm separation.	Pass See justification and calculations
Overall Result			PASS

All tests were performed by Ashwani Malhotra

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Justifications, Descriptions, or Deviations

The following justifications for tests not performed or deviations from the above listed specifications apply:

For maximum permissible exposure, this device operates at less than 1 Watt at 2400 – 2480.0 MHz and is designed to operate greater than 20 cm from personnel during normal operation. No testing is required, however worst case calculated exposure compliance follows later in this report.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Applicable Standards, Specifications and Methods

ANSI C63.4:2003 - Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

CFR 47 FCC 15 - Code of Federal Regulations – Radio Frequency Devices

CISPR 22:1997 - Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement

ICES-003:2004 - Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

ISO 17025:2005 - General Requirements for the competence of testing and calibration laboratories

RSS 210:2005 - Issue 6: Spectrum Management and Telecommunications Policy. Radio Standards Specification Low Power Licence-Exempt Radiocommunication Devices

IC Safety Code 6 - Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 KHZ to 300 GHZ

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Sample calculation(s)

Margin = limit – (received signal + antenna factor + cable loss – pre-amp gain)

Margin = 50.5dBuV/m – (50dBuV + 10dB + 2.5dB – 20dB)

Margin = 8.5 dB

Document Revision Status

Revision 1 - First issue – Nov 7, 2008

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

AE – Auxillary Equipment.

BW – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility

EMI – Electro-Magnetic Immunity

EUT – Equipment Under Test

ITE – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

LISN – Line impedance stabilization network

NCR – No Calibration Required

RF – Radio Frequency

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Testing Facility

Testing for EMC on the EUT was carried out at Global EMC labs in Toronto, Ontario, Canada. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT with a maximum width or length of up to 2m and height up to 3m. The chamber is equipped with a turn table that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120 Vac and 240Vac single phase, or 208 Vac 3 phase input. DC capability is also available. The chamber is equipped with an antenna mast that controls polarization and height from the control room adjoining the shielded chamber. Radiated emissions measurements are performed using a Bilog, and Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN.

Calibrations and Accreditations

The measurement site used is registered with Federal Communications Commission (FCC) and Industry Canada (IC). This site is calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 “Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”. The semi-anechoic chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Testing Environmental Conditions and Dates

Following were the environmental conditions in the facility during time of testing –

Date	Test	Init.	Temperature (°C)	Humidity (%)	Pressure (kPa)
Oct 25 – 31, 2008	All	AM	22-25°C	41-45%	100.2 - 100.5kPa

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Detailed Test Results Section

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Maximum Permissible Exposure

Purpose

The purpose of this test is to ensure that the RF energy intentionally transmitted, in terms of power density emitted from the EUT at a stated operating distance does not exceed the limits listed below as defined in the applicable test standard, as calculated based upon readings obtained during testing. This helps protect human exposure to excessive RF fields.

Limit(s) and Method

The limits, as defined in FCC 15.247(i) and FCC 1.1310 Table 1 (B) limits for residential / uncontrolled exposure was applied. The limit for the frequency range of < 1500 MHz to 100,000 MHz is 1.0 mW/cm². The distance used for calculations was 20.0 cm, as this is the minimum distance an operator will be from the EUT during normal operation.

Measurement Uncertainty

Measurement uncertainty does not apply to this requirement, as this is a calculated result based upon readings obtained. The measurement uncertainty of this calculation can be approximated by the measurement uncertainty of the peak power, combined with the measurement uncertainty of the antenna gain, which was not available at the time of evaluation.

Results

The EUT passed the requirements. The worst case calculated power density was 0.018 mW/cm² this is under the 1.0 mW/cm² requirement.

Calculations

Method 1 (conducted power)

$$P_d = (P_t * G) / (4 * \pi * R^2)$$

Where Pt = 15.45 dBm or 35.5 mW as per Peak power conducted output

Where G = 4.0 dBi, or numerically 2.51

Where R = 20.0 cm

$$P_d = (35.5 \text{ mW} * 2.51) / (4 * \pi * 20.0 \text{ cm}^2)$$

$$P_d = 89.1 \text{ mW} / 78.53 \text{ cm}^2$$

$$P_d = 0.018 \text{ mW/cm}^2$$

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	8566B	HP	2006-08-09	2008-12-09	GEMC 6
Quasi Peak Adapter	85650A	HP	2006-08-07	2008-012-07	GEMC 7
Attenuator 3 dB	FP-50-3	Trilithic	NCR	NCR	GEMC 40
Pre-Amplifier	PA-2.5-26	Vican	2006-09-12	2008-09-12	GEMC 9
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	NCR	NCR	GEMC 31

This report module is based on GEMC template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Appendix A – EUT Summary

For further details for filing purposes, refer to filing package.

General EUT Description

Manufacturer	Sonavox Canada Inc. 10 Konrad Crescent, Markham, Ontario, Canada L3R 8T7
EUT Name	770102
Equipment Category (Commercial / Residential / Medical)	Residential audio frequency wireless transmitter
Input Voltage and Frequency	120V 60Hz
Intentional RF (If yes describe)	Yes – 2404 – 2475 MHz FHSS
Table Top / Wall mount / Floor standing (choose table top if unsure)	Table top
I/O Connectors available on EUT	RCA audio connectors
Peripherals required for test	No peripherals are needed to exercise the EUT.
Minimum Separation distance from operator	20.0 cm

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT & Test Setup Photographs'.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



EUT Functional Description

EUT Configuration

The unit is mains operated and communicates with a receiver in the vicinity. During all testing a link was established between the transmitter and the receiver. Both units were placed in the chamber at the same time such that data was transferred between the units. The receiver sends an acknowledgment to the transmitter during the communication process. The peak output power from the receiver is the same and this was verified during the spurious emission plots. The only difference between the two is the duty cycle of operation with the receiver having an on time of only 80 uS compared to 1.2 ms of transmitter. Because of this all testing was performed on the transmitter with spurious and channel occupancy time verified on the receiver.

Operational Setup

For medium, low and high channel measurements software was available such that the transmitter could to be tuned to those frequencies.

For spurious emissions, number of channels occupied, frequency allocation radiated tests were performed. For all other tests an SMA connector was provided by the manufacturer on the output of the antenna port and all other tests were carried out using conducted measurements.

Test Signals Required For Test

The following patterns or signals were generated during test by the peripherals as described above to exercise the EUT during testing.

None required.

Modifications Required for Compliance

No modifications were required.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Appendix B – EUT and Test Setup Photographs

Note: These photos are for information purposes only. Also refer to PDF files that are separate from this test report.

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Figure 1: EUT conducted emissions

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006

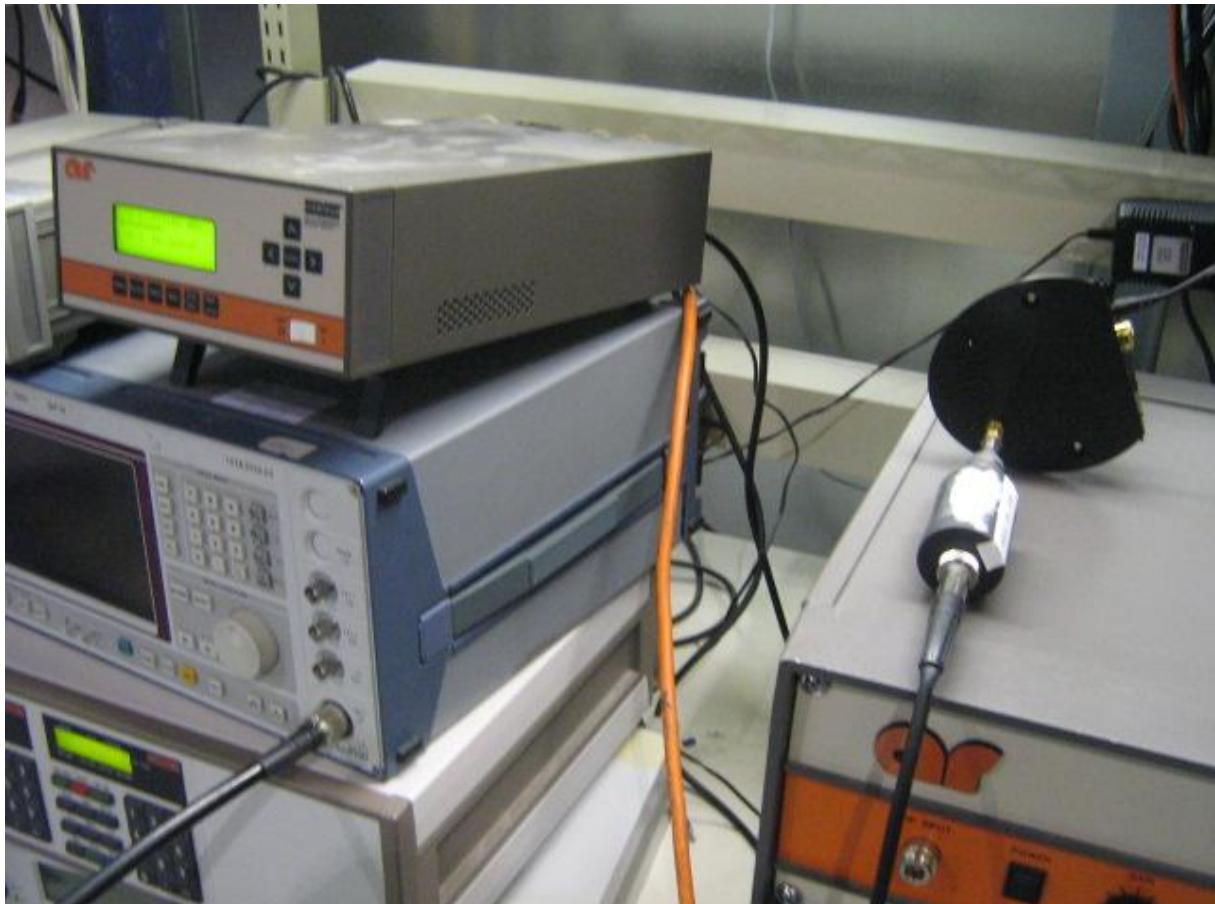


Figure 2: Conducted test setup

Client	Sonavox Canada Inc.
Product	770102
Standard(s)	RSS 210 Issue 6:2005 / FCC Part 15 Subpart C 15:2006



Figure 3: Radiated emissions