




Test report No:  
 NIE: 51929RRF.037

**Partial Test Report**  
 USA FCC Part 15.407, 15.209  
 CANADA RSS-247, RSS-Gen  
 Unlicensed National Information Infrastructure (U-NII) Devices.  
 General technical requirements.  
 Radiated emission limits; general requirements.  
 Digital Transmission Systems (DTSs), Frequency Hopping Systems  
 (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.  
 General Requirements and Information for the Certification of Radio  
 Apparatus.

(*) Identification of item tested	Headunit with radio and Bluetooth
(*) Trademark	Panasonic
(*) Model and /or type reference	MIB3E_MQB_BTWIFI
Other identification of the product	HW version: X40 SW version: X820 Part number: 575.035.869 FCC ID: WUQ-MIB3HBTWIFI IC: 216R-MIB3HBTWIFI
(*) Features	Bluetooth, WLAN, FM, AM, DAB, USB
Applicant	PANASONIC AUTOMOTIVE SYSTEMS EUROPE GMBH Robert Bosch Str. 27-29, 63225, Langen, Germany
Test method requested, standard	USA FCC Part 15.407 (10-1-19) Edition: Unlicensed National Information Infrastructure (U-NII) Devices. General technical requirements. USA FCC Part 15.209 (10-1-19) Edition: Radiated emission limits; general requirements. <ul style="list-style-type: none"> <li>- FCC 15.407 (b)(1)(6) / RSS-247 6.2.1.2 Transmitter Out of Band Radiated Emissions</li> <li>- FCC 15.407 (b)(1) / RSS-247 6.2.1.2 Transmitter Band Edge Radiated Emissions</li> <li>- FCC 15.407 (b)(4) / RSS-247 6.2.4.2 Transmitter Band Edge Radiated Emissions</li> <li>- FCC 15.407 (b)(4)(6) / RSS-247 6.2.4.2 Transmitter Out of Band Radiated Emissions</li> </ul> CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (March 2019). Guidance for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager 
Date of issue	2020-05-07
Report template No	FDT08_22

RAFAEL LÓPEZ MARTÍN  
 2020.05.07 13:54:34  
 +02'00'

(\*) "Data provided by the client"

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	3
Data provided by the client .....	3
Usage of samples .....	4
Test sample description .....	4
Identification of the client .....	5
Testing period and place .....	5
Document history .....	5
Environmental conditions .....	6
Remarks and comments .....	6
Testing verdicts .....	7
Summary .....	7
Appendix A: Tests results for the U-NII-1 Band 5.15 – 5.25 GHz .....	8
Appendix B: Test results for the U-NII-3 Band 5.725 – 5.85 GHz .....	29

## Competences and guarantees

---

DEKRA Testing and Certification is a testing laboratory accredited by the National Accreditation Body (ENAC - Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification at the time of performance of the test.

DEKRA Testing and Certification is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model MIB3E\_MQB\_BTWIFI is an Automotive Head Unit to be installed in cars with the following features: Bluetooth, WLAN, FM, AM, DAB, USB.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

## Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
51929B/634	Automotive Head Unit Var 5_Ateca BTWIFI	MIB3E_MQB_BT WIFI	PM6- 00124.10.19413F04 47	2019/12/27
51929B/228	Harness	--	--	2019/01/24

- Sample S/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Date of reception
51929B/639	Automotive Head Unit Var 5_Ateca BTWIFI	MIB3E_MQB_BT WIFI	PM6- 00124.10.19413F04 42	2020/03/17
51929B/228	Harness	--	--	2019/01/24

Samples S/01 and S/02 have undergone the following test(s): All RADIATED tests indicated in Appendix B.

## Test sample description

Ports..... :	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
-			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
-			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports..... :	-				
Rated power supply .....	Voltage and Frequency				
	<input checked="" type="checkbox"/>	DC: 12 Vdc			
Rated Power .....	-				
Clock frequencies..... :	-				
Other parameters .....	-				
Software version .....	X820				

Hardware version .....	X40		
Dimensions in cm (W x H x D) .....	-		
Mounting position .....	<input checked="" type="checkbox"/>	Other: Vehicle.	
Modules/parts.....	Module/parts of test item	Type	Manufacturer
	-		
	-		
Accessories (not part of the test item) .....	Description	Type	Manufacturer
	-		
Documents as provided by the applicant .....	Description	File name	Issue date
	-		
	-		

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

PANASONIC AUTOMOTIVE SYSTEMS EUROPE GMBH  
 Robert Bosch Str. 27-29, 63225, Langen, Germany

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2020-01-20
Date (finish)	2020-03-27

## Document history

Report number	Date	Description
51929RRF.037	2020-05-07	First release

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %
Air pressure	Min. = 860 mbar Max. = 1060 mbar

## Remarks and comments

The tests have been performed by the technical personnel: José Manuel Jiménez and Miguel Ángel Torres.

Used instrumentation:

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ETS LINDGREN FACT 3 200 STP	N.A.	N.A.
2. Shielded Room ETS LINDGREN S101	N.A.	N.A.
3. Biconical/Log Antenna 30 MHz - 6 GHz ETS LINDGREN 3142E	2017/04	2020/04
4. Pre-Amplifier G>40dB 10MHz-6GHz, BONN ELEKTRONIK, BLNA 0160-01N	2020/02	2021/02
5. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2019/10	2021/10
6. EMI Test Receiver 7 GHz ROHDE AND SCHWARZ ESR7	2018/10	2020/10
7. Antenna Mast ETS LINDGREN 2175 MiniMast	N.A.	N.A.
8. Horn antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2018/01	2021/01
9. Broadband Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2018/07	2021/07
10. RF Pre-amplifier G>30dB, 1-18GHz BONN ELEKTRONIK BLMA 0118-3A	2019/11	2020/11
11. Low Noise Amplifier G>30dB, 18 – 40 GHz BONN ELEKTRONIK BLMA 1840-1M	2019/02	2021/02
12. Signal and Spectrum Analyzer ROHDE AND SCHWARZ FSV40	2020/03	2022/03
13. DC Power Supply 30V/5A KEYSIGHT TECHNOLOGIES, U8002A	N.A.	N.A.
14. Multimeter FLUKE 179	2019/06	2020/06

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

### A. U-NII-1 Band: 5.15 - 5.25 GHz

FCC PART 15 PARAGRAPH / RSS-247		Verdict	Remark
Requirement – Test case			
FCC 15.407 (a)(1)(iv)	Transmitter Maximum conducted Output Power	N/M	
RSS-247 6.2.1.1	Transmitter Maximum Equivalent Isotropically Radiated Power EIRP	N/M	
FCC 15.407 (a)(1)(iv)	Transmitter Maximum Power Spectral Density	N/M	
RSS-247 6.2.1.1	Transmitter EIRP Spectral Density	N/M	
FCC 15.407 (b)(1)(6) / RSS-247 6.2.1.2	Transmitter Out of Band Radiated Emissions	P	
FCC 15.407 (b)(1) / RSS-247 6.2.1.2	Transmitter Band Edge Radiated Emissions	P	
FCC 15.407 (h)(1) / RSS-247 6.2.1.1	Transmitter Power Control	N/M	
<u>Supplementary information and remarks:</u>			
None.			

### B. U-NII-3 Band: 5.725 - 5.85 GHz

FCC PART 15 PARAGRAPH / RSS-247		Verdict	Remark
Requirement – Test case			
FCC 15.407 (a)(3) / RSS-247 6.2.4.1	Transmitter Maximum conducted Output Power	N/M	
FCC 15.407 (e) / RSS-247 Clause 6.2.4.1	6 dB bandwidth.	N/M	
FCC 15.407 (a)(3) / RSS-247 Clause 6.2.4.1	Transmitter Maximum Power Spectral Density	N/M	
FCC 15.407 (b)(4) / RSS-247 6.2.4.2	Transmitter Band Edge Radiated Emissions	P	
FCC 15.407 (b)(4)(6) / RSS-247 6.2.4.2	Transmitter Out of Band Radiated Emissions	P	
FCC 15.40 (h)(1) / RSS-247 6.2.4.1	Transmitter Power Control	N/A	
<u>Supplementary information and remarks:</u>			
None			

## Appendix A: Tests results for the U-NII-1 Band 5.15 – 5.25 GHz



## INDEX

TEST CONDITIONS .....	10
FCC 15.407 (b)(1)(6) / RSS-247 6.2.1.2. Transmitter Out of Band Radiated Emissions .....	13
FCC 15.407 (b)(1) / RSS-247 6.2.1.2. Transmitter Band Edge Radiated Emissions.....	20

## TEST CONDITIONS

### POWER SUPPLY (V):

Vnominal: 12 Vdc  
 Type of Power Supply: DC External (Vehicle battery).

### ANTENNA:

Type of Antenna: Integral.  
 Maximum Declared Assembly Antenna Gain: +0.7 dBi

### TEST FREQUENCIES:

Technology Tested:	WLAN (IEEE 802.11 a,n,ac) / U-NII-1	
Modes:	802.11a20: 6, 9, 12, 18, 24, 36, 48 & 54 Mbps	
	802.11n HT20: MCS0 to MCS7	
	802.11n HT40: MCS0 to MCS7	
	802.11ac VHT20: MCS0 to MCS9	
	802.11ac VHT40: MCS0 to MCS9	
	802.11ac VHT80: MCS0 to MCS9	
Setting of cores / ports:	One port.	
Beamforming:	No.	
Frequency Range:	5150 MHz to 5250 MHz	
Channel Spacing:	20 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Lowest: 36	5180
	Middle: 40	5200
	Highest: 48	5240
Channel Spacing:	40 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Lowest: 38	5190
	Highest: 46	5230
Channel Spacing:	80 MHz	
Transmit Channels	Middle: 42	5210

The test set-up was made in accordance to the general provisions of FCC Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017.

The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulations types.

The field strength at the band edges was evaluated for each mode on the lowest and highest channels at the rated power for the channel under test.

For all modes, the EUT was configured in test mode using a software application. The application was used to enable a continuous transmission and to select the test channels as required. The client supplied instructions to configure the EUT. The customer supplied a document containing the setup instructions.

The worst cases for testing were identified for output power and spurious levels at the band edges which were selected based on preliminary testing that correspond to next data rates:

- 802.11a20: 6 Mbits
- 802.11n HT20: MCS0
- 802.11n HT40: MCS0
- 802.11ac VHT20: MCS0
- 802.11ac VHT40: MCS0
- 802.11ac VHT80: MCS0

### RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 1 m for the frequency range 1 GHz-40 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 1 GHz-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The EUT was placed at a height of 80 cm above the reference ground plane in the center of the chamber turntable to perform the measurements below 1GHz and the EUT was placed at a height of 1.5 meters above the test chamber floor in the center of the chamber turntable to perform the measurements above 1GHz. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

The final measured value, for the given emission, in the tables below incorporates the calibrated antenna factor and cable loss.


Radiated measurements setup  $f < 1$  GHz.

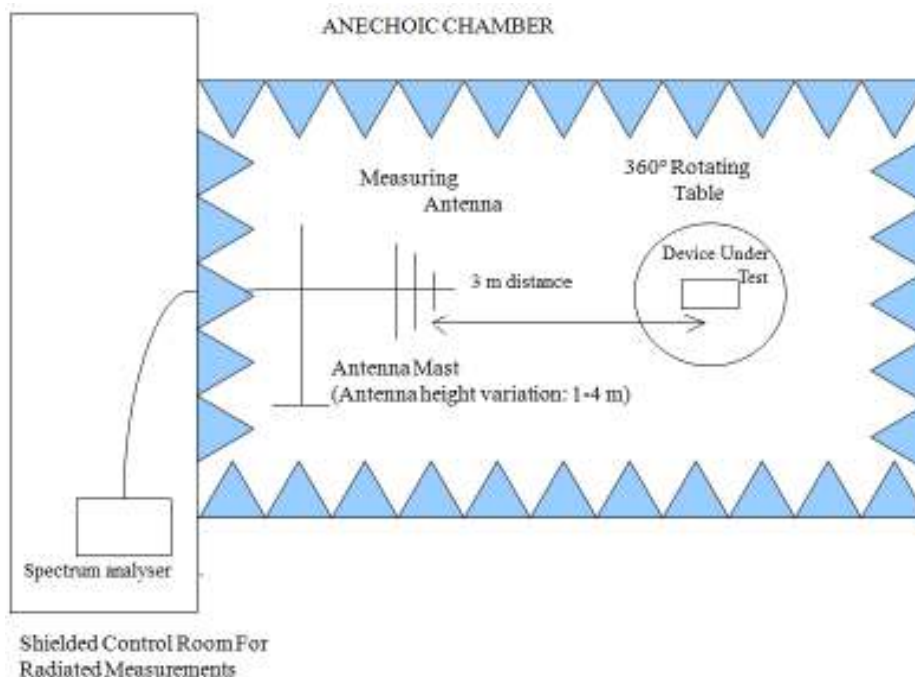

Radiated measurements setup  $f > 1$  GHz up to 18 GHz.

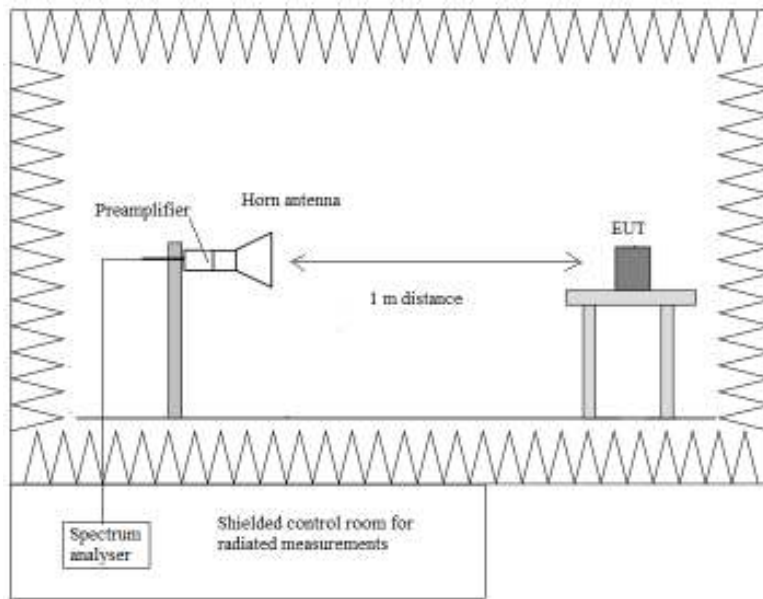

Radiated measurements setup  $f > 18$  GHz up to 40 GHz.

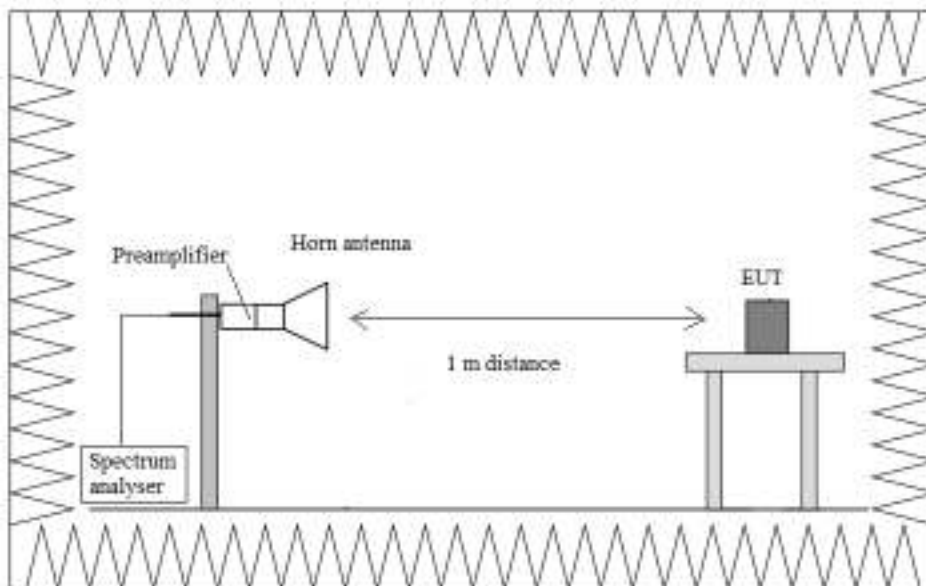

## FCC 15.407 (b)(1)(6) / RSS-247 6.2.1.2. Transmitter Out of Band Radiated Emissions

### SPECIFICATION:

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.23 dBμV/m at 3 m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 1m for the frequency range 1 GHz-40 GHz and a distance of 3m for frequency range 30MHz-1GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Test performed on the following worst case: 802.11a20: 6 Mbits. The worst case was determined by measuring the eirp density (radiated).

### Frequency range 30 MHz - 1 GHz

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

No spurious frequencies detected at less than 20 dB below the limit.

Measurement Uncertainty (dB)
<±3.81

### Frequency range 1 - 40 GHz

The results in the next tables show the maximum measured levels in the 1-40 GHz frequency range.

The Low, Middle and High Channels were measured for out-of-band emissions for the worst mode.

Spurious frequencies in the restricted bands with peak levels above the average limit (54 dBµV/m at 3 m) are measured with an average detector for checking compliance with the average limit.

- 802.11 a20 (worst case):**

- LOW CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.39636	57.91	68.23	V	Peak	<±3.04
	38	54		Average	<±3.04
3.97596	56.54	68.23	V	Peak	<±3.04
	38.62	54		Average	<±3.04
4.30449	50.51	68.23	V	Peak	<±3.04
2.37693	55.31	68.23	H	Peak	<±3.04
	36.2	54		Average	<±3.04
4.00181	56	68.23	H	Peak	<±3.04
	39.46	54		Average	<±3.04
7.05528	45.59	68.23	H	Peak	<±4.88
7.93693	45.4	68.23	V	Peak	<±4.88
8.81893	44.65	68.23	H	Peak	<±4.88
10.35998	47.16	68.23	V	Peak	<±4.88

- MIDDLE CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.39196	58.23	68.23	V	Peak	<±3.04
	38.43	54		Average	<±3.04
3.96716	55.71	68.23	V	Peak	<±3.04
	37.91	54		Average	<±3.04
4.30431	50.6	68.23	V	Peak	<±3.04
2.38499	55.4	68.23	H	Peak	<±3.04
	36.88	54		Average	<±3.04
3.99869	55.13	68.23	H	Peak	<±3.04
	38.11	54		Average	<±3.04
7.05528	46.18	68.23	V	Peak	<±4.88
7.93728	44.29	68.23	V	Peak	<±4.88


- HIGH CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.37601	58.38	68.23	V	Peak	<±3.04
	38.82	54		Average	<±3.04
3.95854	58.15	68.23	V	Peak	<±3.04
	38.38	54		Average	<±3.04
4.30449	52	68.23	V	Peak	<±3.04
2.399948	56.19	68.23	H	Peak	<±3.04
	36.31	54		Average	<±3.04
3.97541	54.82	68.23	H	Peak	<±3.04
	38.61	54		Average	<±3.04
7.05528	44.93	68.23	V	Peak	<±4.88
7.93693	41.78	68.23	V	Peak	<±4.88
8.81928	45.96	68.23	H	Peak	<±4.88

Verdict: PASS


### FREQUENCY RANGE 30 MHz - 1 GHz

This plot is valid for the Low, Middle and High Channels and all the modulation modes.

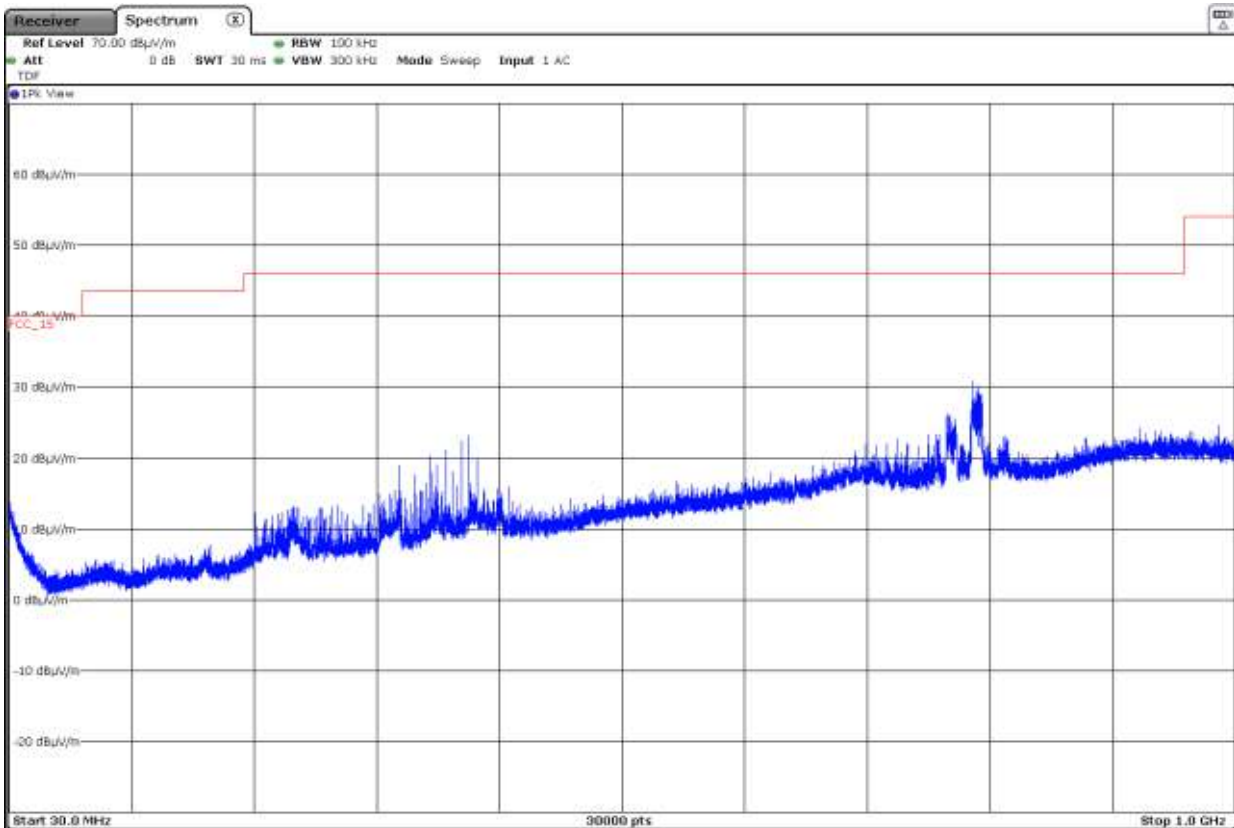


### FREQUENCY RANGE 1 – 6.5 GHz (worst mode)

- Low Channel:

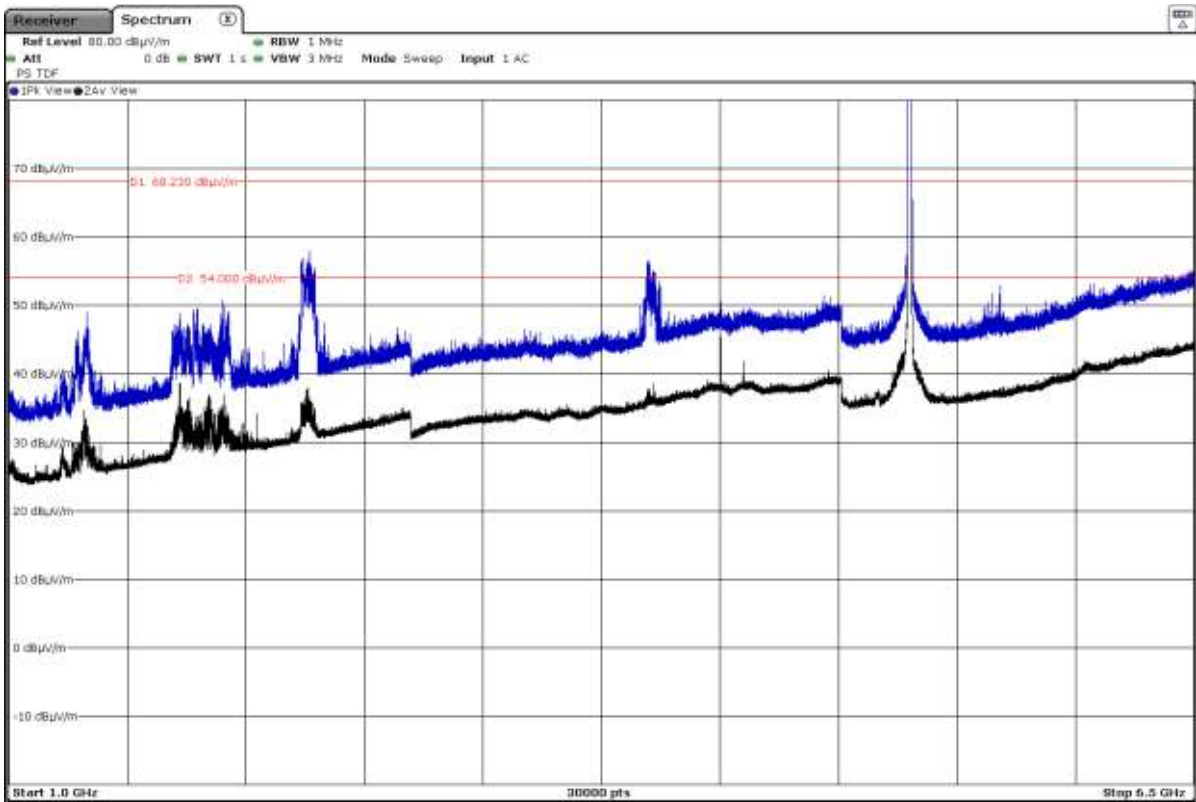

The peak above the limit is the carrier frequency.


- Middle Channel:

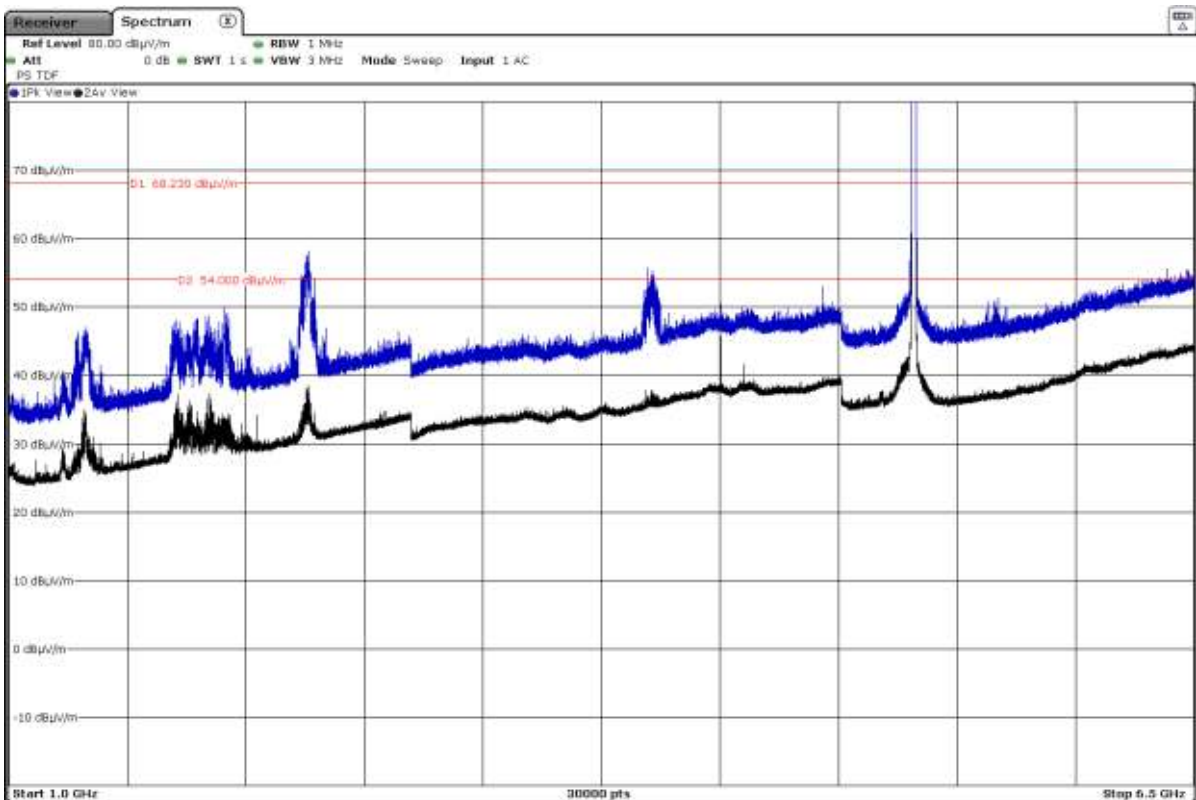

The peak above the limit is the carrier frequency.




- High Channel:

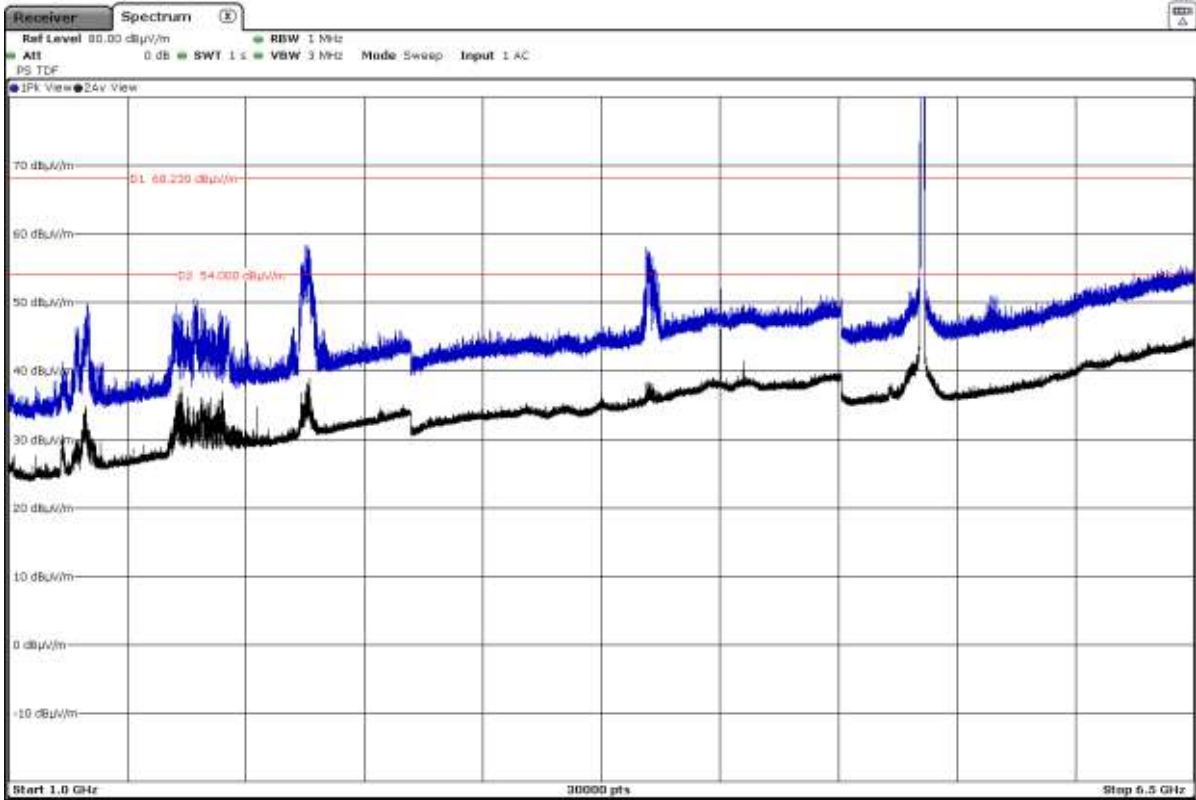


The peak above the limit is the carrier frequency.

**FREQUENCY RANGE 6.5 - 17 GHz. (worst mode)**


- Low Channel:

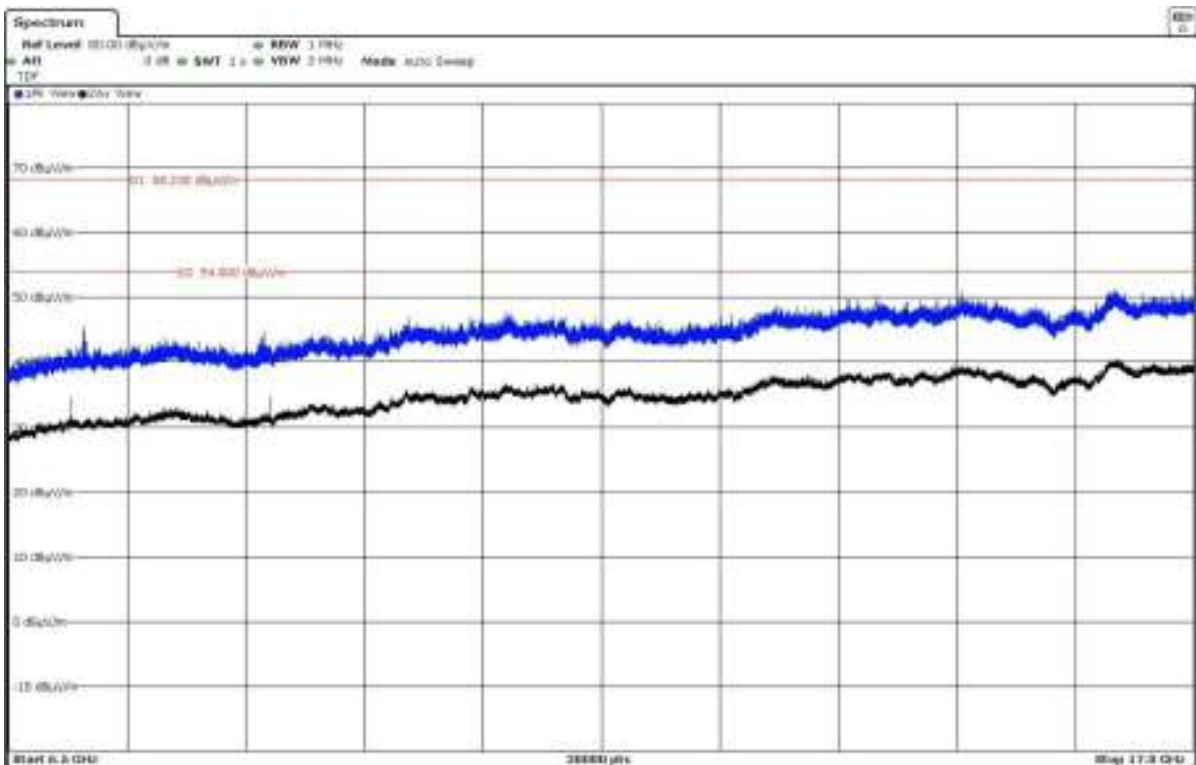

- Middle Channel:

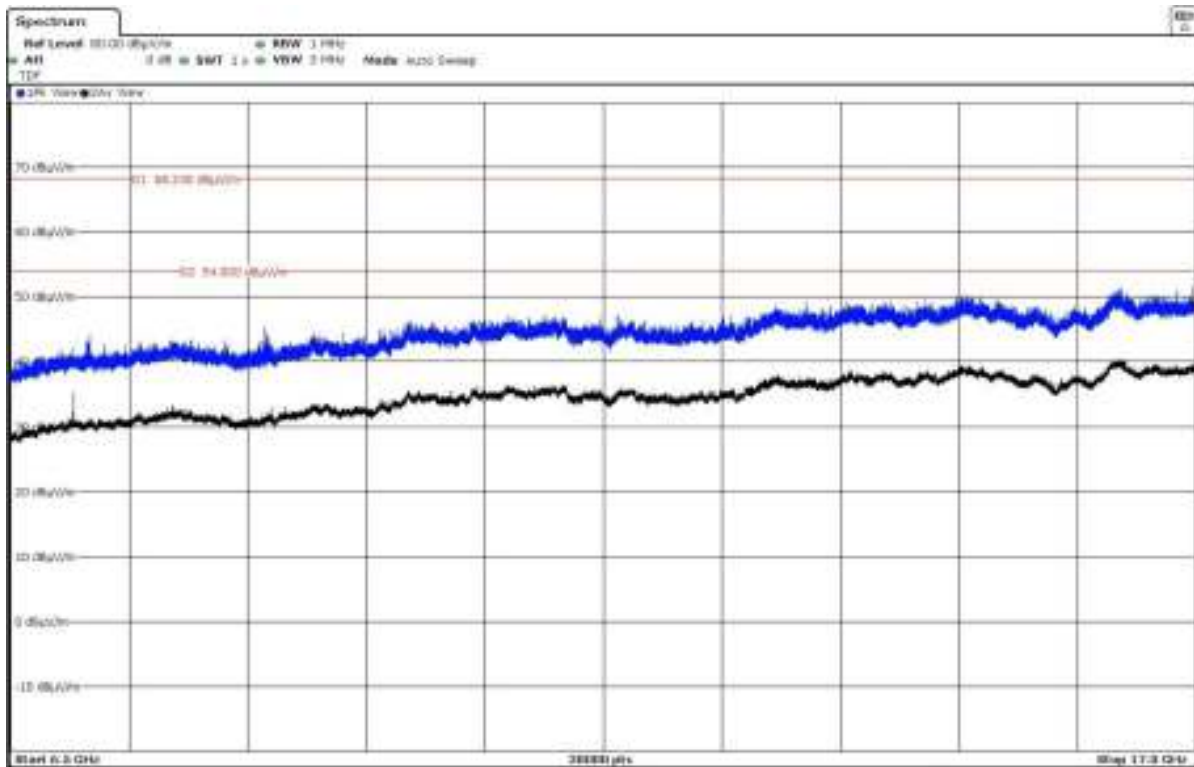


- High Channel:

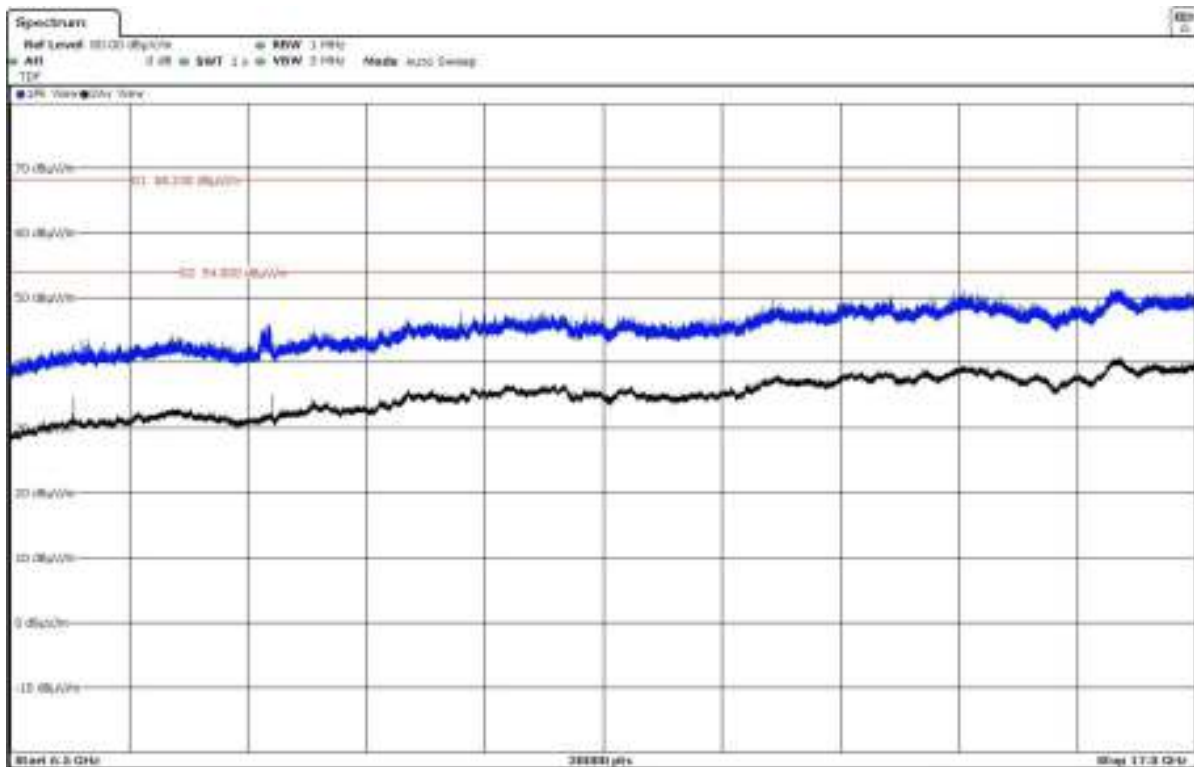


### FREQUENCY RANGE 17 - 26 GHz

This plot is valid for all the modulation modes and the Low, Middle and High Channels.

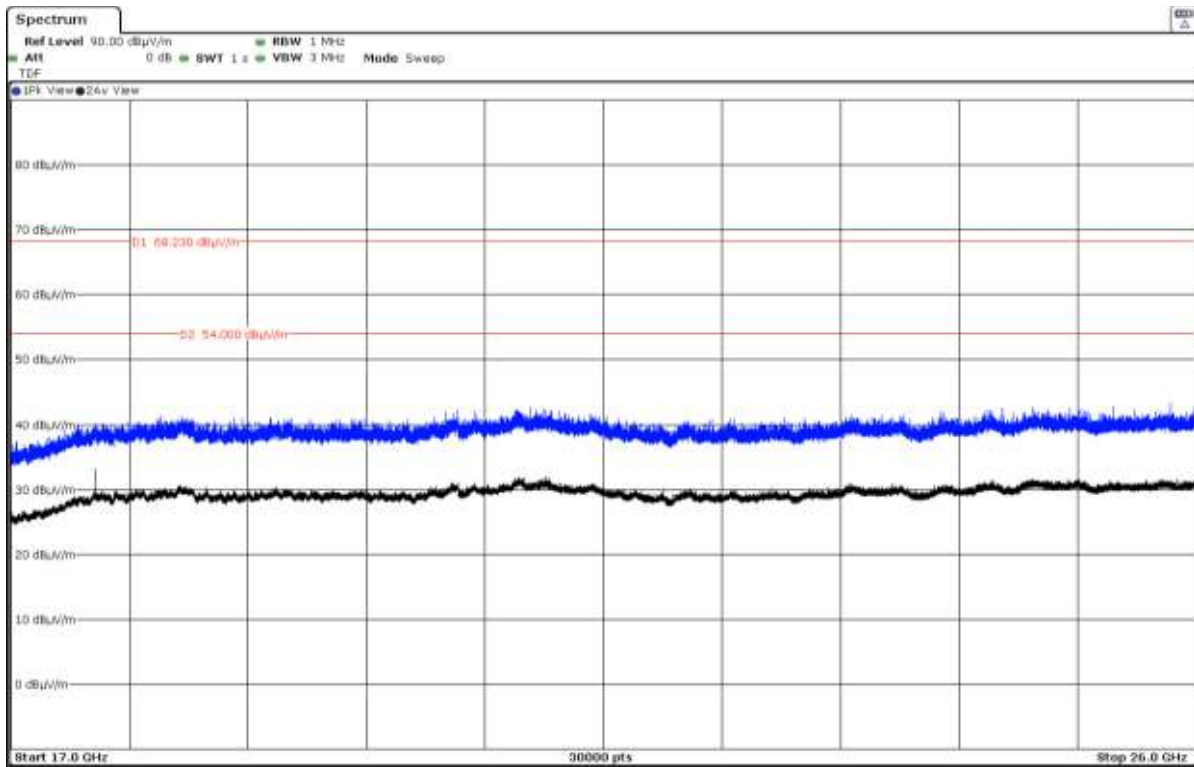

### FREQUENCY RANGE 26 - 40 GHz

This plot is valid for all the modulation modes and the Low, Middle and High Channels.

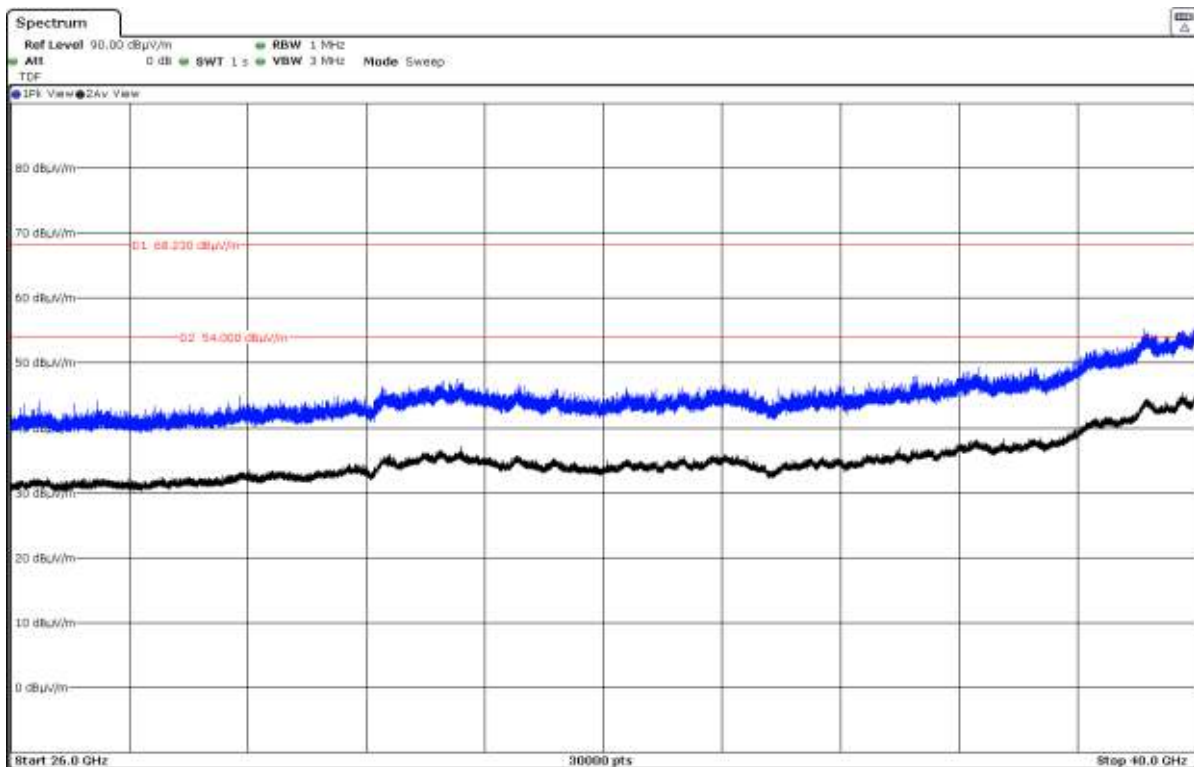

## FCC 15.407 (b)(1) / RSS-247 6.2.1.2. Transmitter Band Edge Radiated Emissions.

### SPECIFICATION:

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz (68.23 dBμV/m at 3 m distance).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Measurements were made in both horizontal and vertical planes of polarization.

All emissions outside of the 5.15-5.35GHz band shall not exceed an EIRP of -27dBm/MHz. There are restricted bands of operation below band edge at 4.5-5.15 GHz also above the upper band edge at 5.35-5.46GHz therefore the provision of FCC Part 15.205 apply.

Field strength measurements using peak and average detector performed in the restricted bands below 5.15GHz and above 5.35 GHz.

Test performed on the following worst cases modes in all relevant tests channels:

- 802.11a: 6 Mbit/s.
- 802.11n HT20: MCS0.
- 802.11ac VHT20: MCS0.
- 802.11n HT40: MCS0.
- 802.11ac VHT40: MCS0.
- 802.11ac VHT80: MCS0.

- **802.11 a20:**

- Lower Band Edge Channel 36 (5180 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.14881	52.69	74	V	Peak	<±3.04

- Upper Band Edge Channel 48 (5240 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.358195	49.7	74	V	Peak	<±3.04
5.444508	50.02	74	H	Peak	<±3.04

- **802.11 n20 (HT20):**

- Lower Band Edge Channel 36 (5180 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.14881	53.83	74	V	Peak	<±3.04

- Upper Band Edge Channel 48 (5240 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.385842	48.46	74	V	Peak	<±3.04
5.429952	48.64	74	H	Peak	<±3.04

- **802.11 ac20 (HT20):**

- Lower Band Edge Channel 36 (5180 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.13516	52.76	74	H	Peak	<±3.04
5.14231	53.28	74	V	Peak	<±3.04

- Upper Band Edge Channel 48 (5240 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.396072	48.72	74	V	Peak	<±3.04
5.440108	48.29	74	H	Peak	<±3.04

• **802.11 n40 (HT40):**

- Lower Band Edge Channel 38 (5190 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.14989	58.4	74	V	Peak	<±3.04
	48.2	54		Average	<±3.04

- Upper Band Edge Channel 46 (5230 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.367032	48.4	74	H	Peak	<±3.04
5.457012	48.81	74	V	Peak	<±3.04

• **802.11 ac40 (VHT40):**

- Lower Band Edge Channel 38 (5190 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.14599	58.66	74	H	Peak	<±3.04
	46.34	54		Average	<±3.04

- Upper Band Edge Channel 46 (5230 MHz): Inside band 5.35-5.46 GHz.

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.363035	48.3	74	V	Peak	<±3.04
5.424342	48.3	74	H	Peak	<±3.04

• **802.11 ac80 (VHT80):**

- Lower Band Edge Channel 42 (5210 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.14838	58.38	74	V	Peak	<±3.04
	49.07	54		Average	<±3.04


- Upper Band Edge Channel 42 (5210 MHz):

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
5.357865	49.27	74	V	Peak	<±3.04
5.373228	48.63	74	H	Peak	<±3.04


Verdict: PASS

- **802.11 a20:**

- Lower Band Edge Channel 36 (4500 to 5150 MHz)

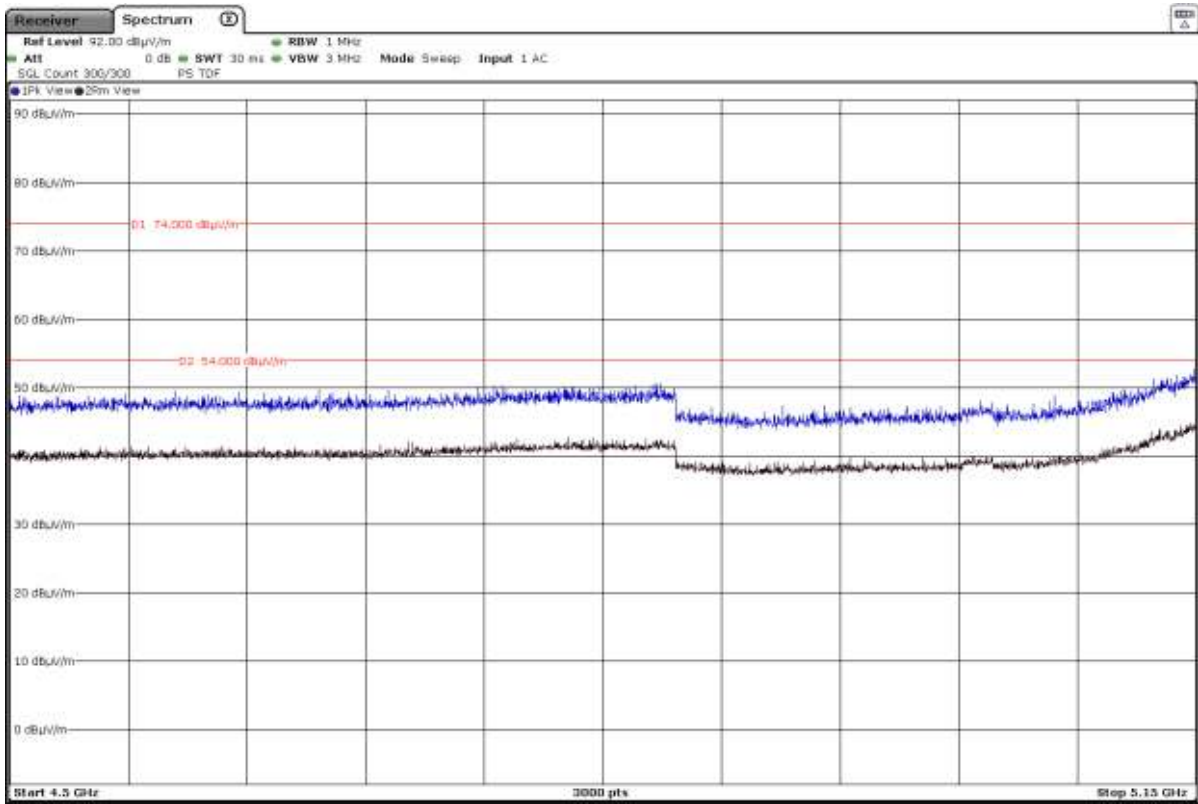


- Upper Band Edge Channel 48 (5350 to 5460 MHz)

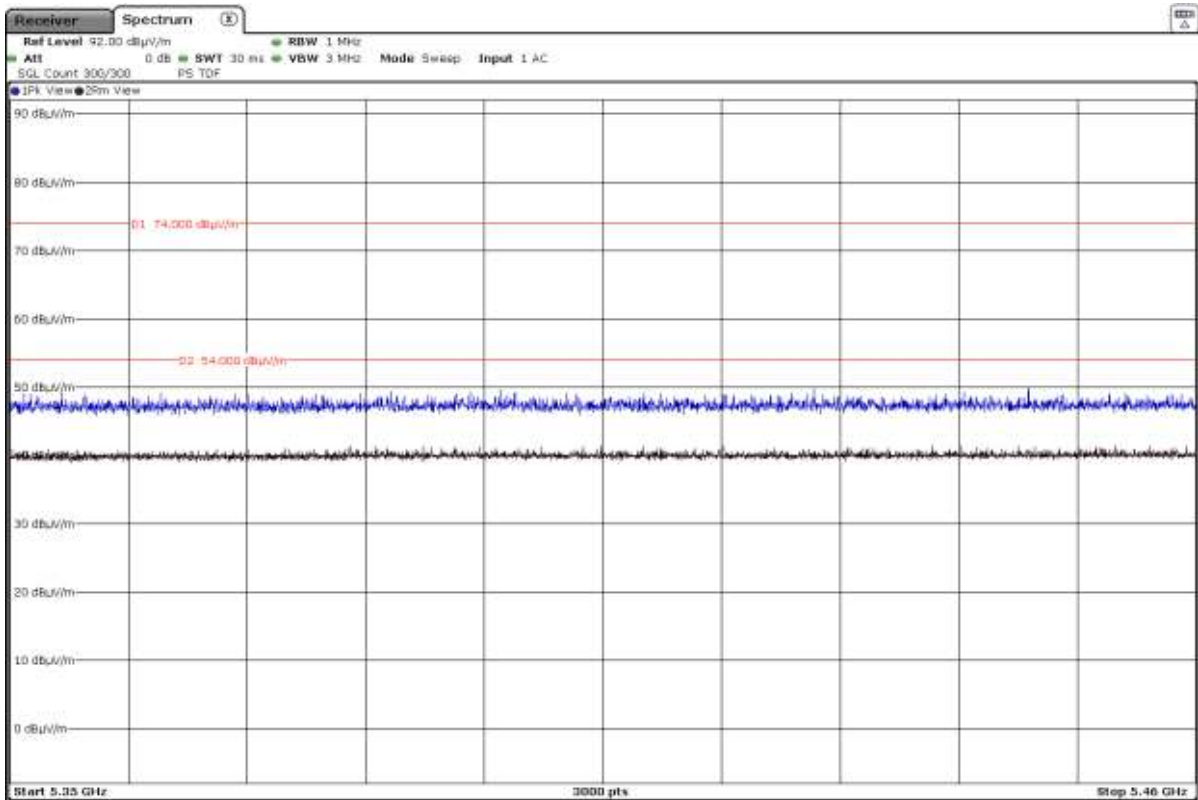


- **802.11 n20 (HT20):**

- Lower Band Edge Channel 36 (4500 to 5150 MHz)

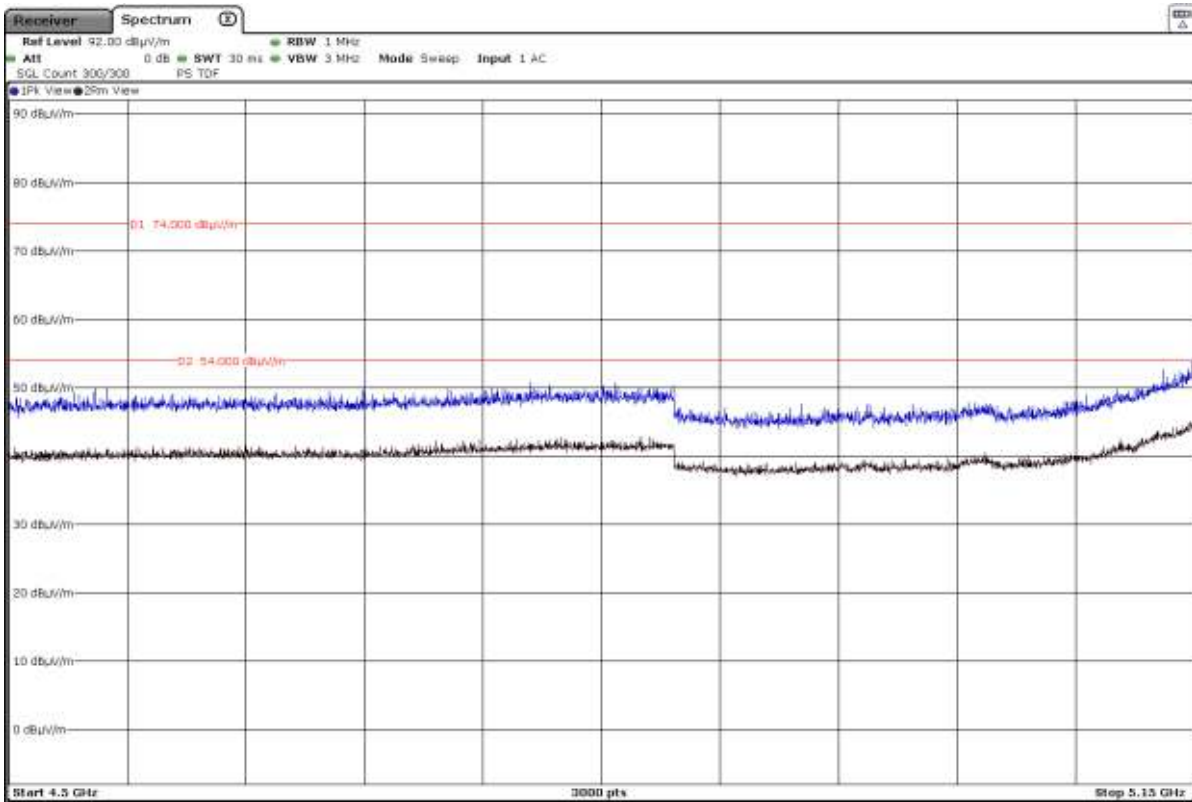


- Upper Band Edge Channel 48 (5350 to 5460 MHz)

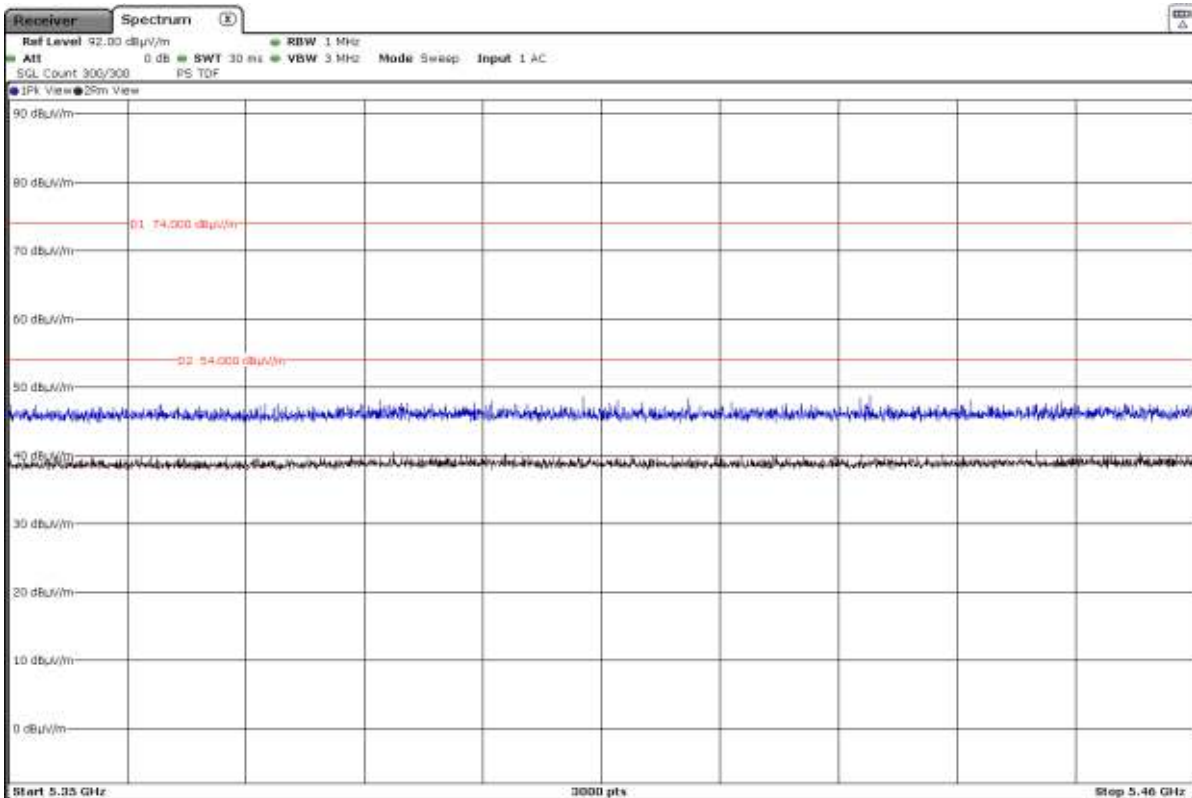




- **802.11 ac20 (VHT20):**

- Lower Band Edge Channel 36 (4500 to 5150 MHz)

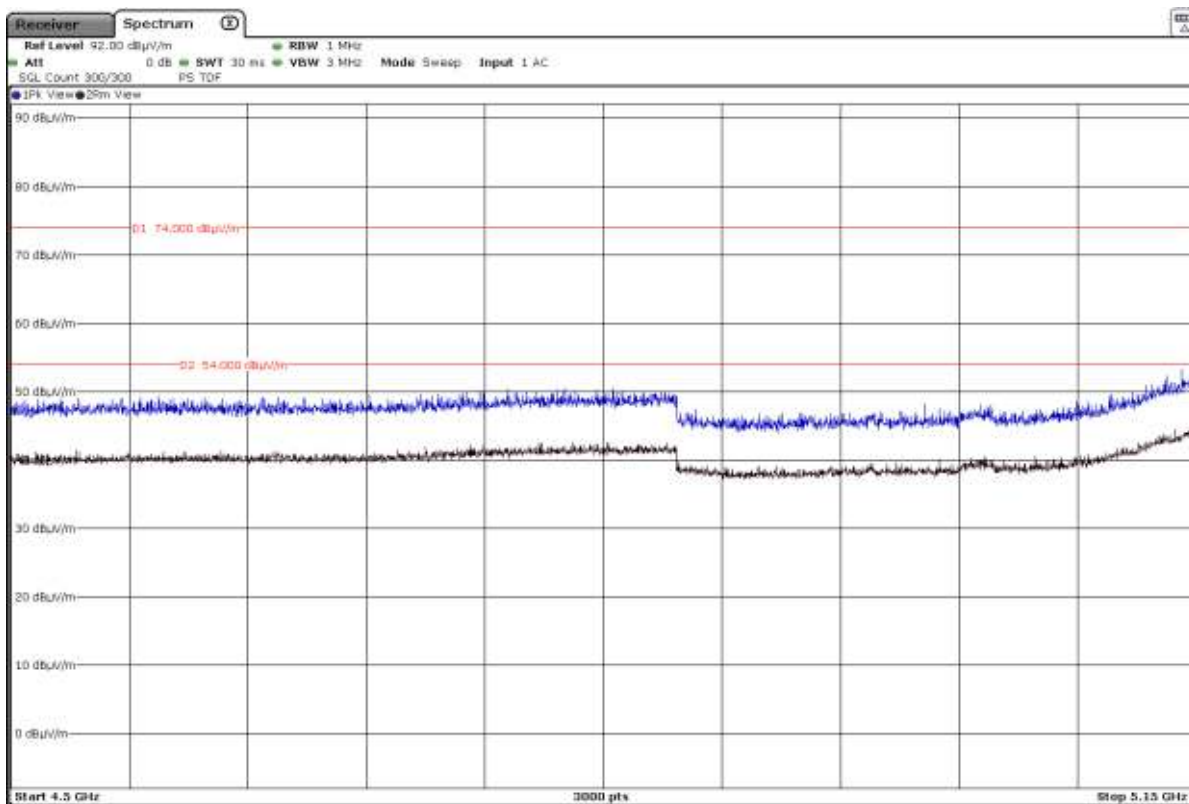


- Upper Band Edge Channel 48 (5350 to 5460 MHz)

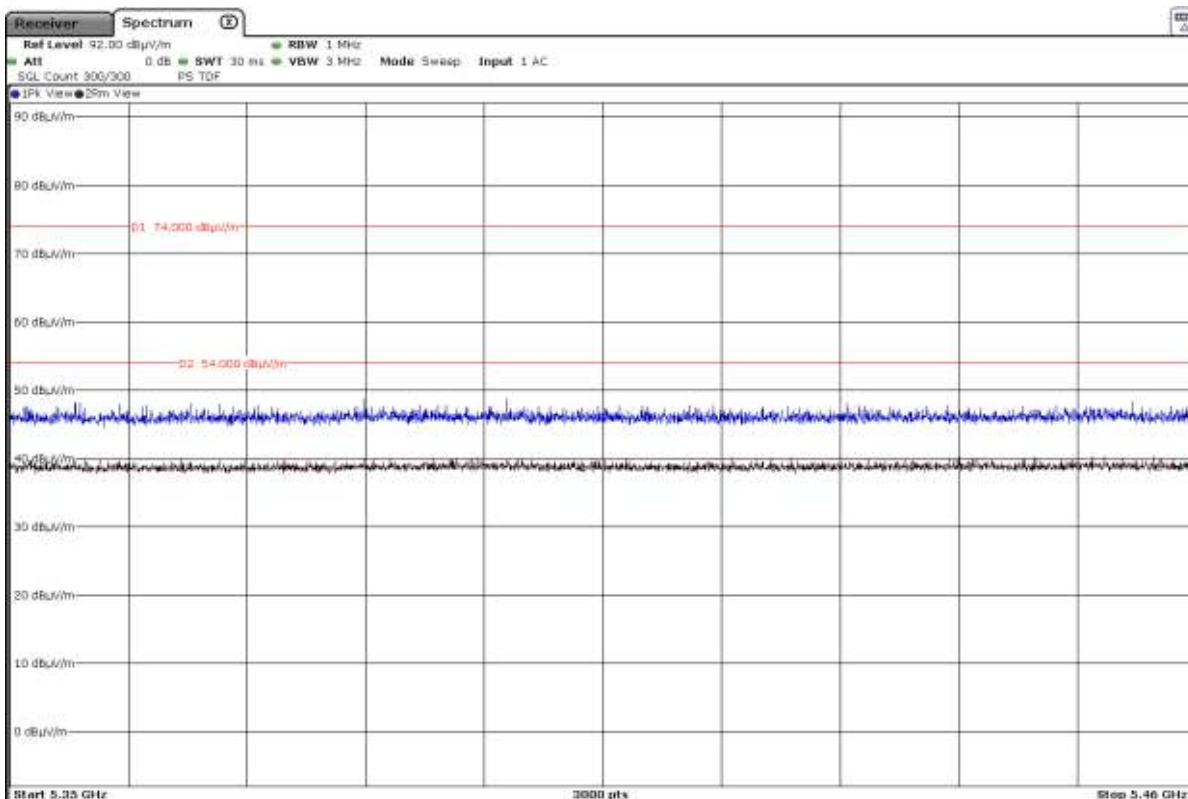


- **802.11 n40 (HT40):**

- Lower Band Edge Channel 38 (4500 to 5150 MHz)

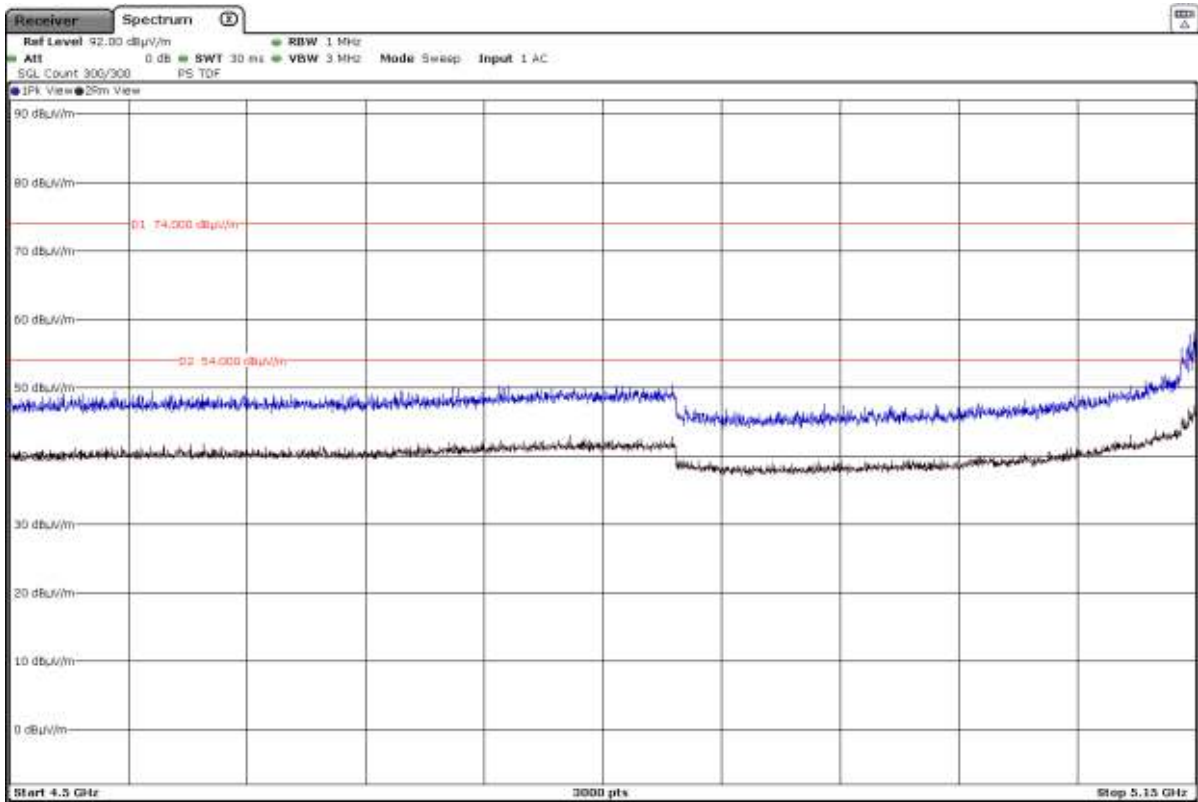


- Upper Band Edge Channel 46 (5350 to 5460 MHz)

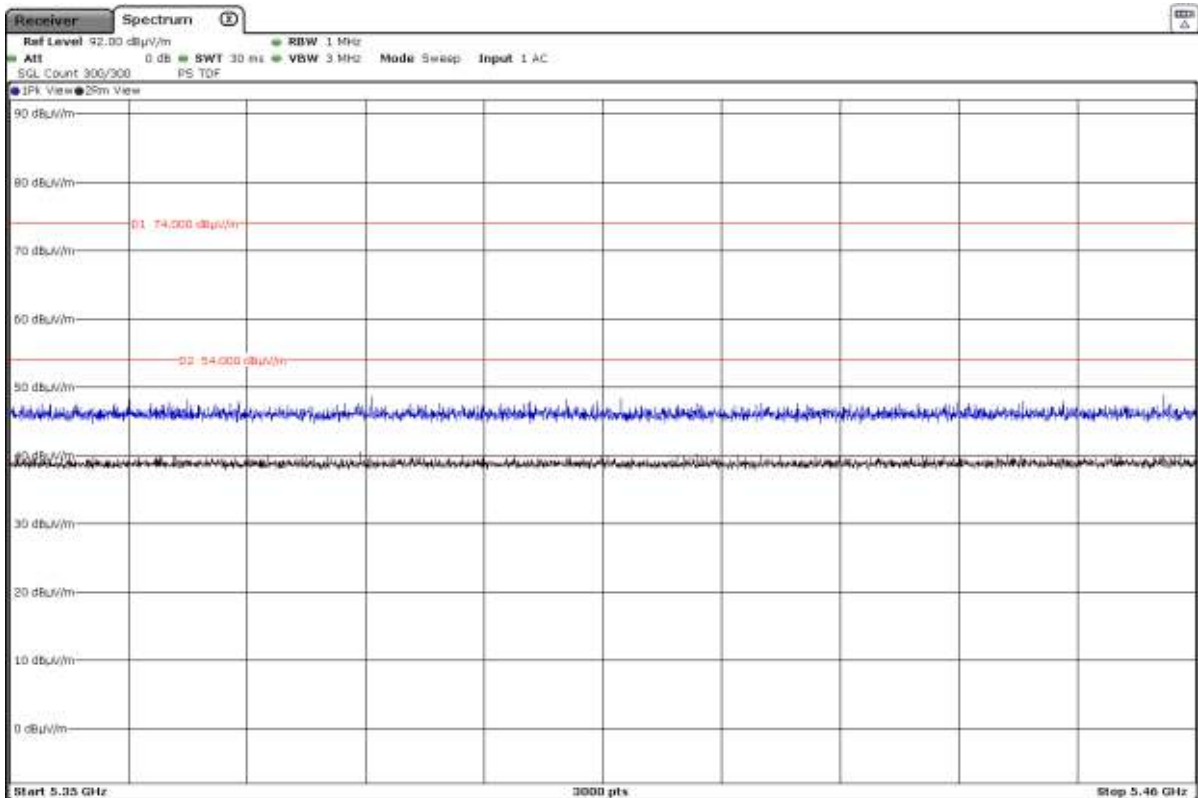


- **802.11 ac40 (VHT40):**

- Lower Band Edge Channel 38 (4500 to 5150 MHz)

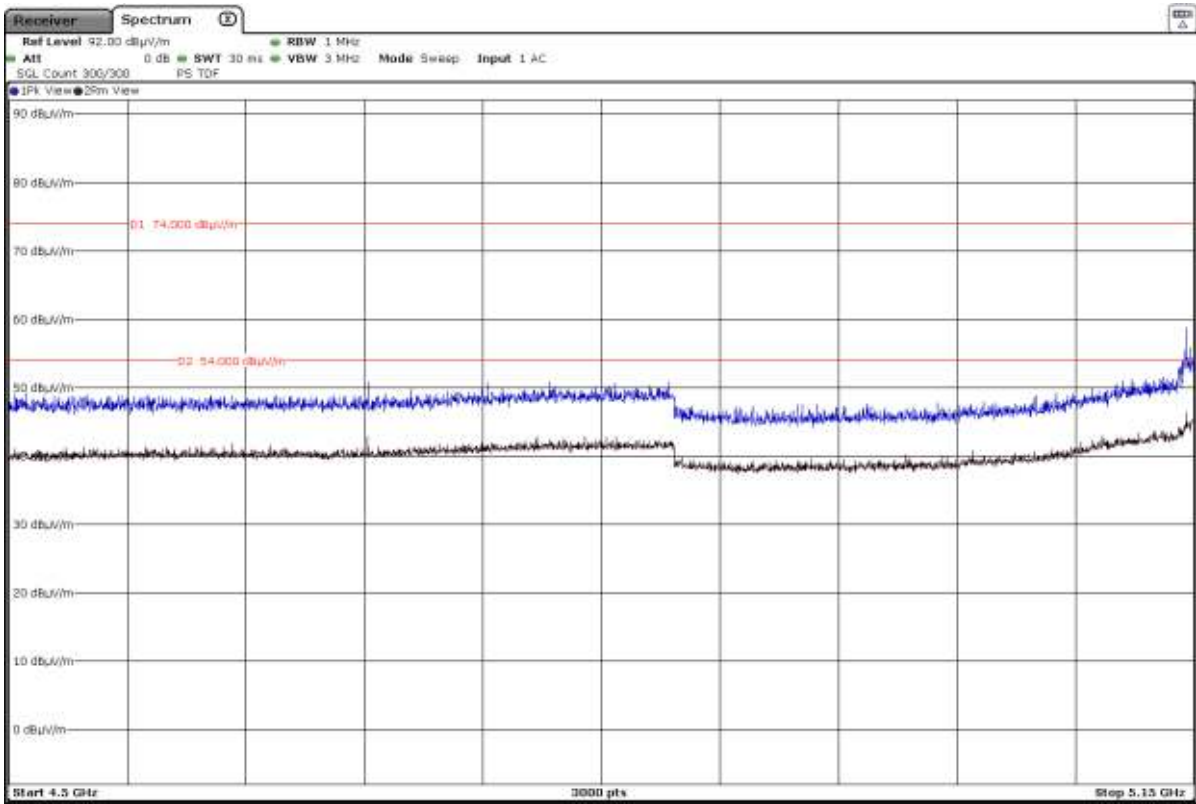


- Upper Band Edge Channel 46 (5350 to 5460 MHz)

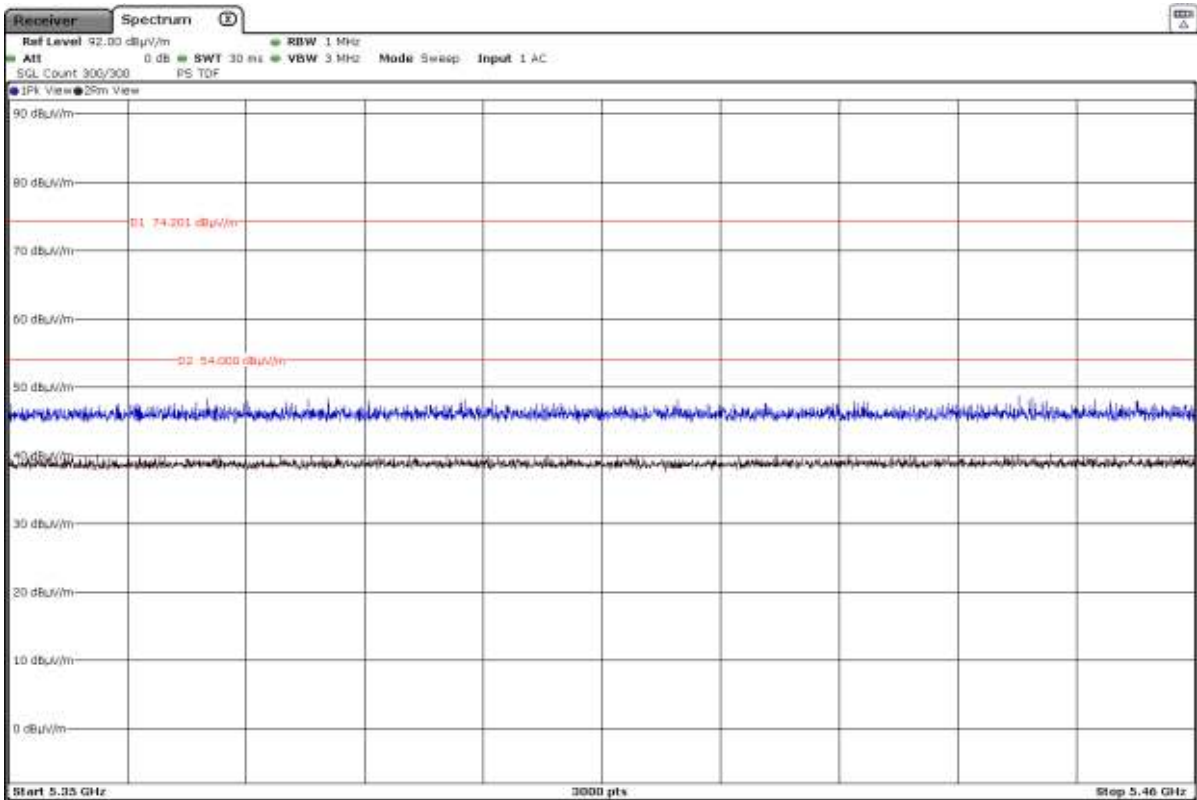


- **802.11 ac80 (VHT80):**

- Lower Band Edge Channel 42 (4500 to 5150 MHz)

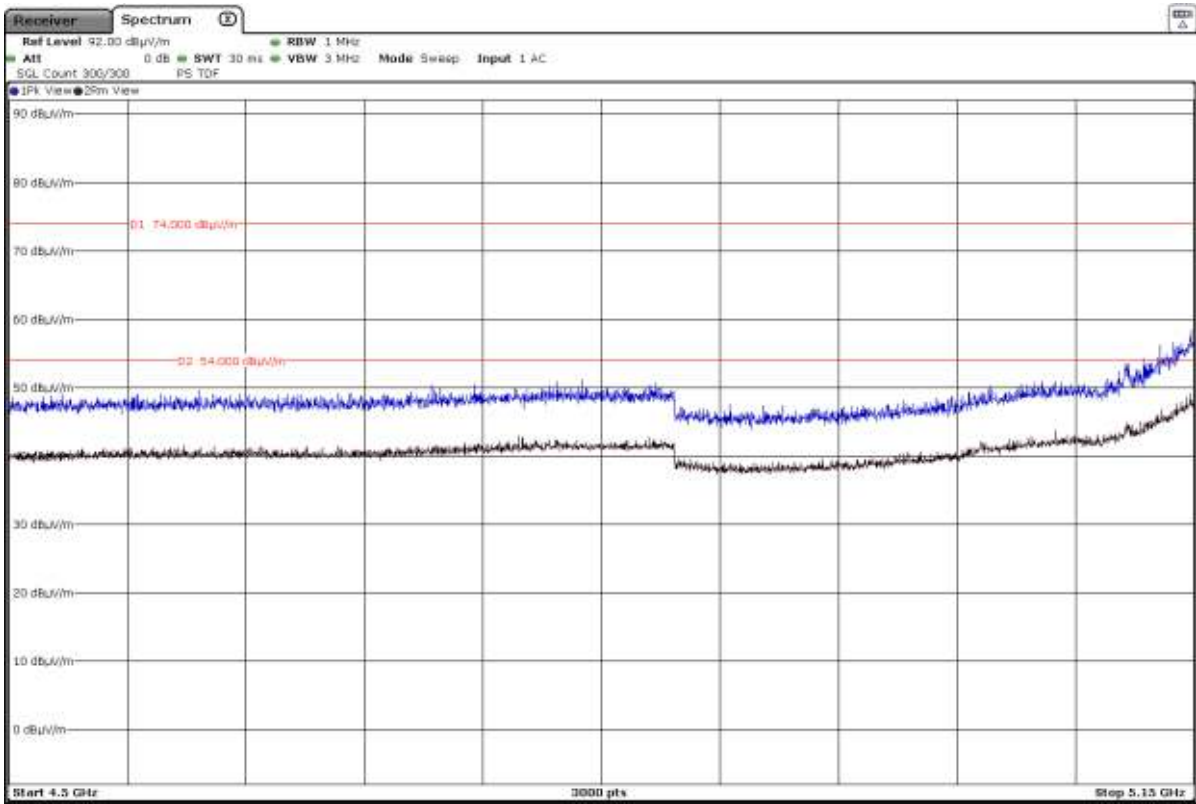

- Upper Band Edge Channel 42 (5350 to 5460 MHz)

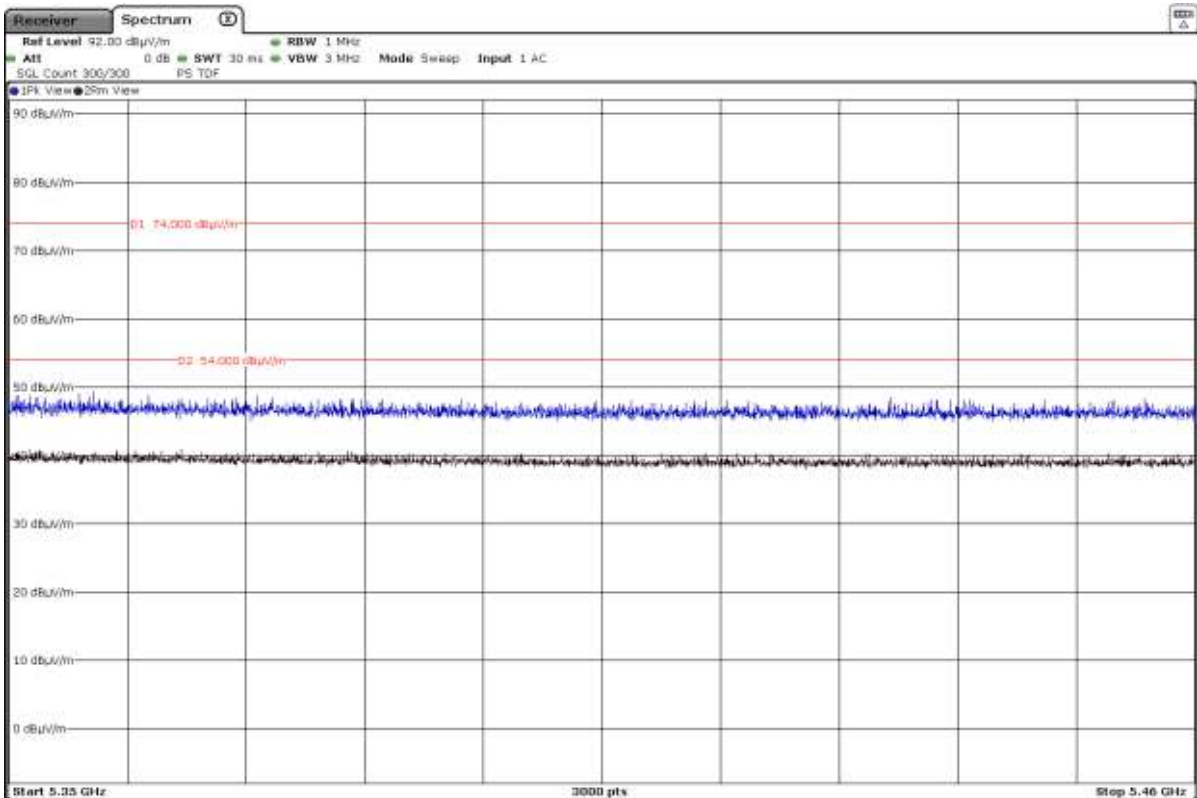

## Appendix C: Test results for the U-NII-3 Band 5.725 – 5.85 GHz

## INDEX

TEST CONDITIONS .....	31
FCC 15.407 (b)(4)(6) / RSS-247 6.2.4.2. Transmitter Out of Band Radiated Emissions .....	34
FCC 15.407 (b)(4) / RSS-247 6.2.4.2. Transmitter Band Edge Radiated Emissions.....	42

## TEST CONDITIONS

### POWER SUPPLY (V):

Vnominal: 12 Vdc  
 Type of Power Supply: DC External (Vehicle battery).

### ANTENNA:

Type of Antenna: Integral.  
 Maximum Declared Assembly Antenna Gain: +0.7 dBi

### TEST FREQUENCIES:

Technology Tested:	WLAN (IEEE 802.11 a/n/ac): U-NII-3 band	
Modes:	802.11a: 6, 9, 12, 18, 24, 36, 48 & 54 Mbps	
	802.11n HT20: MCS0 to MCS7	
	802.11n HT40: MCS0 to MCS7	
	802.11ac VHT20: MCS0 to MCS8	
	802.11ac VHT40: MCS0 to MCS9	
	802.11ac VHT80: MCS0 to MCS9	
Setting of cores / ports:	One port.	
Beamforming:	No	
Frequency Range:	5725 MHz to 5850 MHz	
Channel Spacing:	20 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Lowest: 149	5745
	Middle: 157	5785
	Highest: 165	5825
Channel Spacing:	40 MHz	
Transmit Channels	Channel	Channel Frequency (MHz)
	Lowest: 151	5755
	Highest: 159	5795
Channel Spacing:	80 MHz	
Transmit Channels	Middle: 155	5775

The test set-up was made in accordance to the general provisions of FCC Unlicensed National Information Infrastructure (U-NII) Devices 789033 D02 General U-NII Test Procedures New Rules v02r01 dated Dec 14, 2017.

The EUT was tested in the following operating mode:

- Continuously transmitting with a modulated carrier at maximum power in all required channels using the supported data rates/modulations types.

The field strength at the band edges was evaluated for each mode individually on the lowest and highest channels at the rated power for the channel under test.

For all modes, the EUT was configured in test mode using a software application. The application was used to enable a continuous transmission and to select the test channels as required. The client supplied scripts to configure the EUT. The customer supplied a document containing the setup instructions.

The worst cases for testing were identified for output power and spurious levels at the band edges which were selected based on preliminary testing that correspond to next data rates:

- 802.11a20: 6 Mbits
- 802.11n HT20: MCS0
- 802.11n HT40: MCS0
- 802.11ac VHT20: MCS0
- 802.11ac VHT40: MCS0
- 802.11ac VHT80: MCS0

### RADIATED MEASUREMENTS

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna is situated at a distance of 1 m for the frequency range 1 GHz-40 GHz (1 GHz-18 GHz Double ridge horn antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 1 GHz-40 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The EUT was placed at a height of 80 cm above the reference ground plane in the center of the chamber turntable to perform the measurements below 1GHz and the EUT was placed at a height of 1.5 meters above the test chamber floor in the center of the chamber turntable to perform the measurements above 1GHz. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


The final measured value, for the given emission, in the tables below incorporates the calibrated antenna factor and cable loss.

Radiated measurements setup  $f < 1$  GHz

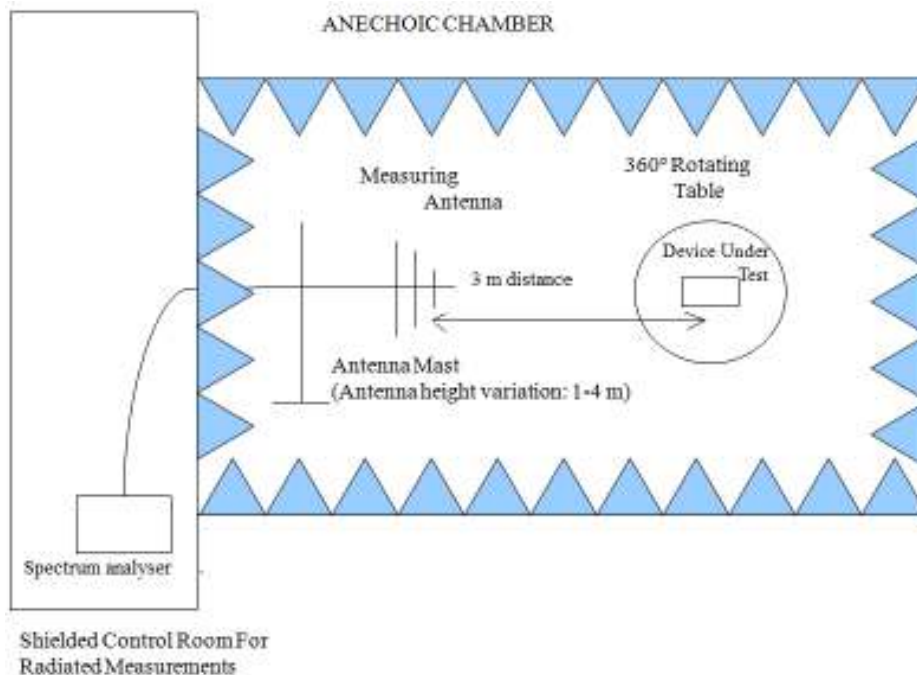




Radiated measurements setup  $f > 1$  GHz up to 18 GHz.

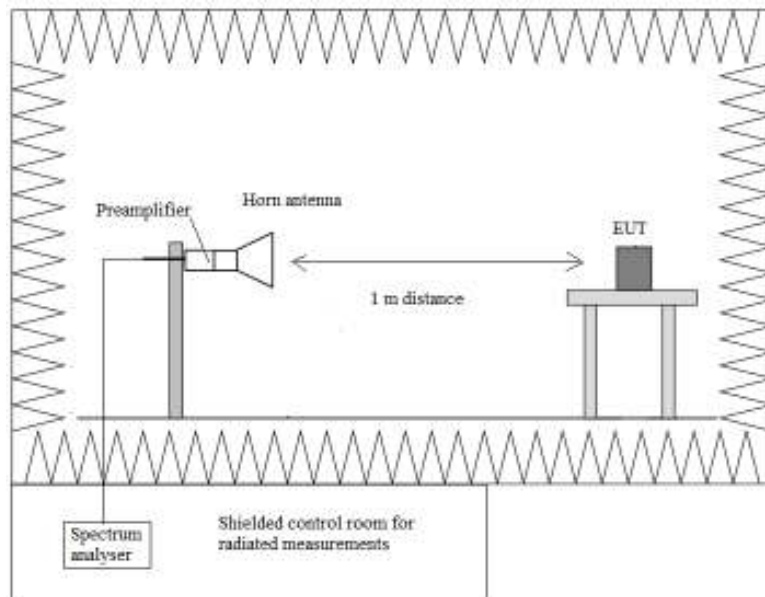

Radiated measurements setup  $f > 18$  GHz up to 40 GHz.

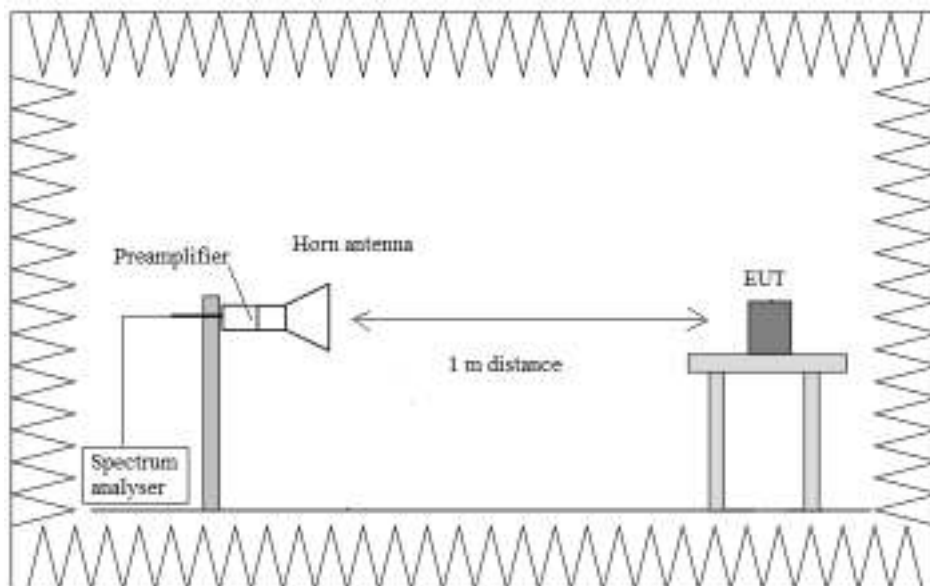

## FCC 15.407 (b)(4)(6) / RSS-247 6.2.4.2. Transmitter Out of Band Radiated Emissions

### SPECIFICATION:

For transmitters operating in the 5.725–5.85 GHz band:

All emissions shall be limited to a level of  $-27$  dBm/MHz ( $68.23$  dB $\mu$ V/m at 3 m distance) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength ( $\mu$ V/m)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 – 30.0	30	-	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 – 960	200	46	3
960 – 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 1m for the frequency range 1 GHz-40 GHz and a distance of 3m for frequency range 30MHz-1GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum 34analyser. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Test performed on the following worst case: 802.11a20: 6 Mbits. The worst case was determined by measuring the eirp density (radiated).

### Frequency range 30 MHz – 1 GHz

The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious frequencies operating (radiated) at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
727.705	27.4	46	V	Quasi-Peak	± 3.81

### Frequency range 1 - 40 GHz

The results in the next tables show the maximum measured levels in the 1-40 GHz range except the 5.65-5.725 GHz and 5.85-5.925GHz adjacent bands. The results in the adjacent bands was evaluated on the next section.

The Low, Middle and High Channels were measured for out-of-band emissions for the worst mode.

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with an average detector for checking compliance with the average limit.

- **802.11 a20 (worst case):**

- LOW CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dBµV/m)	Limit (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
1.36181	47.31	68.23	V	Peak	<±3.04
1.98624	48.92	68.23	V	Peak	<±3.04
2.38444	57.01	68.23	V	Peak	<±3.04
	37.06	54		Average	<±3.04
3.97614	55.9	68.23	V	Peak	<±3.04
	43.44	54		Average	<±3.04
4.40936	47.39	68.23	V	Peak	<±3.04
7.05528	45.23	68.23	H	Peak	<±4.88
7.93728	42.73	68.23	V	Peak	<±4.88
8.81893	45.56	68.23	H	Peak	<±4.88
10.58293	42.62	68.23	H	Peak	<±4.88
11.48978	41.08	68.23	V	Peak	<±4.88

- MIDDLE CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
1.35741	45.81	68.23	V	Peak	< $\pm$ 3.04
1.36071	46.93	68.23	H	Peak	< $\pm$ 3.04
1.79961	49.14	68.23	V	Peak	< $\pm$ 3.04
2.37968	56.89	68.23	V	Peak	< $\pm$ 3.04
	36.69	54		Average	< $\pm$ 3.04
3.97596	55.9	68.23	V	Peak	< $\pm$ 3.04
	43.07	54		Average	< $\pm$ 3.04
7.05528	43.4	68.23	H	Peak	< $\pm$ 4.88
7.93728	44.39	68.23	V	Peak	< $\pm$ 4.88
8.81893	44.21	68.23	H	Peak	< $\pm$ 4.88
10.58293	42.8	68.23	H	Peak	< $\pm$ 4.88
11.56993	39.98	68.23	V	Peak	< $\pm$ 4.88


- HIGH CHANNEL. Spurious frequencies detected at less than 20 dB below the limit:

Spurious frequency (GHz)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Polarization	Detector	Measurement Uncertainty (dB)
1.35594	46.03	68.23	V	Peak	< $\pm$ 3.04
1.86359	49.07	68.23	V	Peak	< $\pm$ 3.04
2.38114	55.24	68.23	H	Peak	< $\pm$ 3.04
	36.19	54		Average	< $\pm$ 3.04
2.39214	57.77	68.23	V	Peak	< $\pm$ 3.04
	37.1	54		Average	< $\pm$ 3.04
3.96093	57.24	68.23	V	Peak	< $\pm$ 3.04
	43.31	54		Average	< $\pm$ 3.04
7.05528	46.56	68.23	V	Peak	< $\pm$ 4.88
7.93693	42.68	68.23	V	Peak	< $\pm$ 4.88
8.81893	43.89	68.23	H	Peak	< $\pm$ 4.88
10.58258	38.71	68.23	H	Peak	< $\pm$ 4.88
11.65008	40.49	68.23	V	Peak	< $\pm$ 4.88

Verdict: PASS


### FREQUENCY RANGE 30 MHz - 1 GHz

This plot is valid for all the modulation modes and the Low, Middle and High Channels.

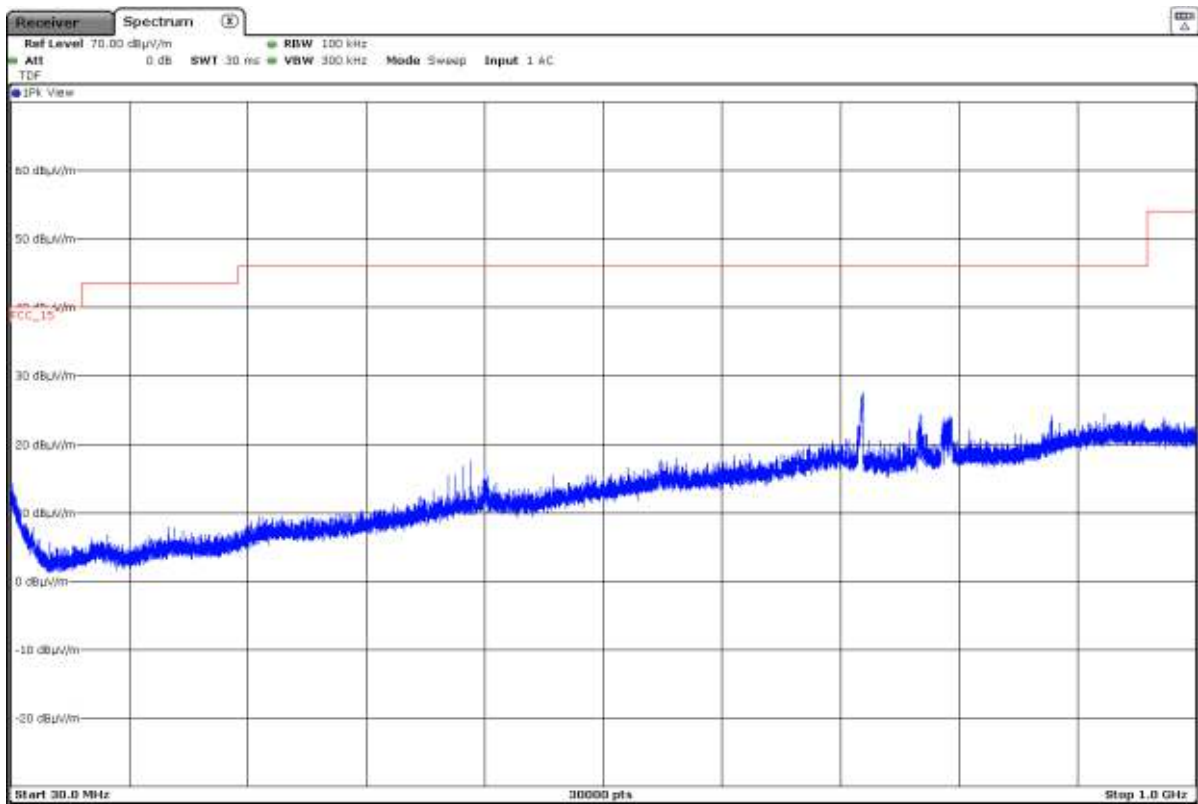


### FREQUENCY RANGE 1 – 6.5 GHz (worst case)

- Low Channel:

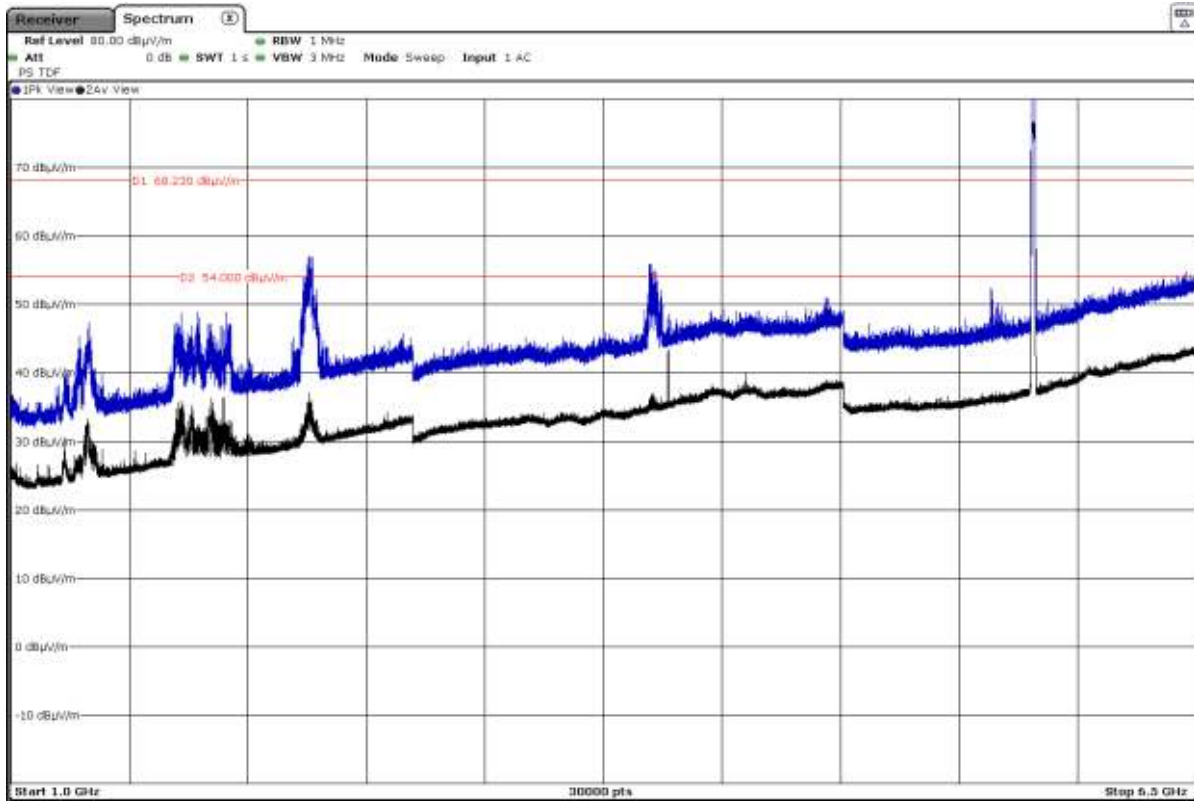


The peak above the limit is the carrier frequency.

- Middle Channel:

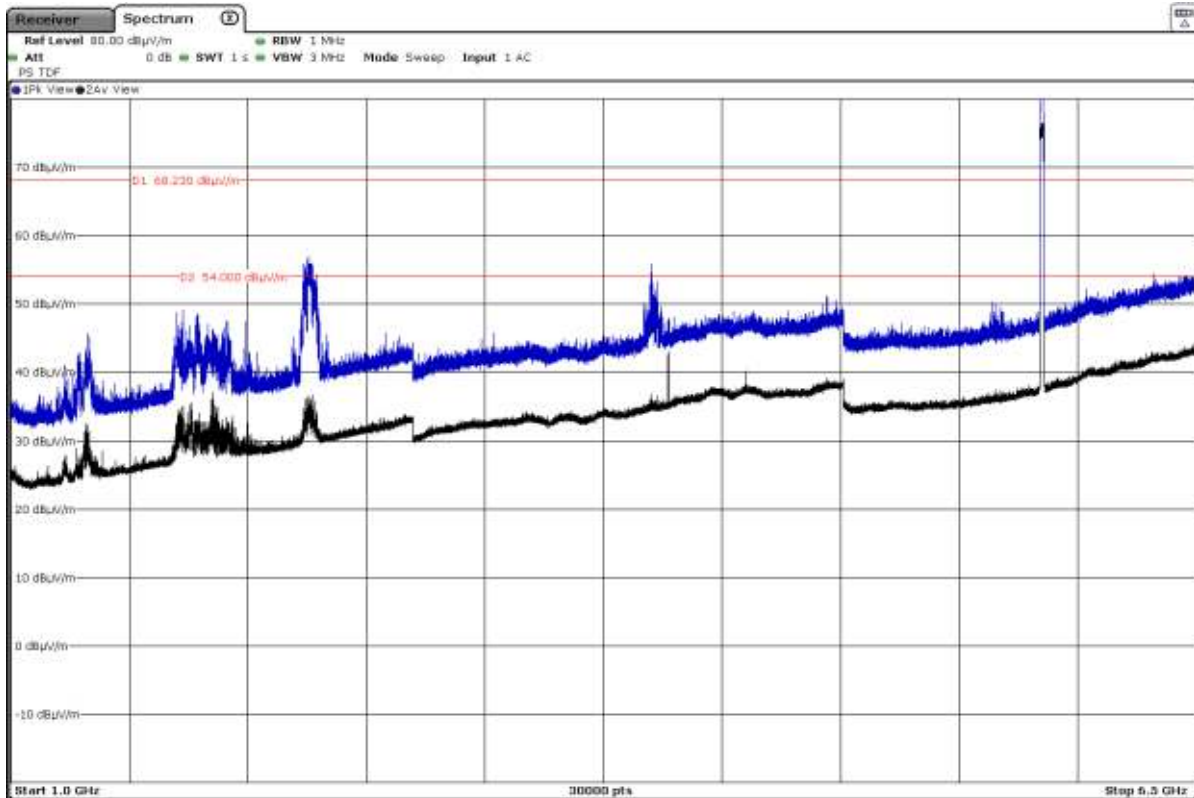

The peak above the limit is the carrier frequency.


- High Channel:

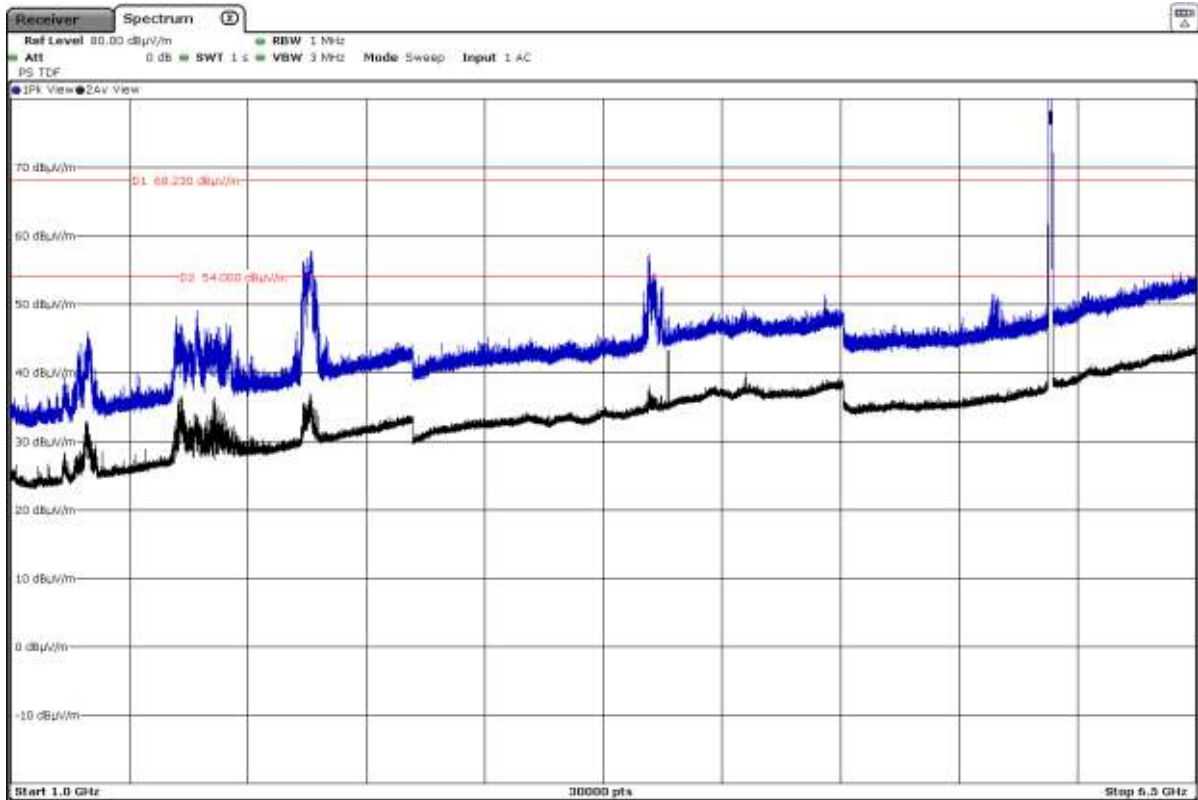


The peak above the limit is the carrier frequency.

### FREQUENCY RANGE 6.5 - 17 GHz (worst case)


- Low Channel:

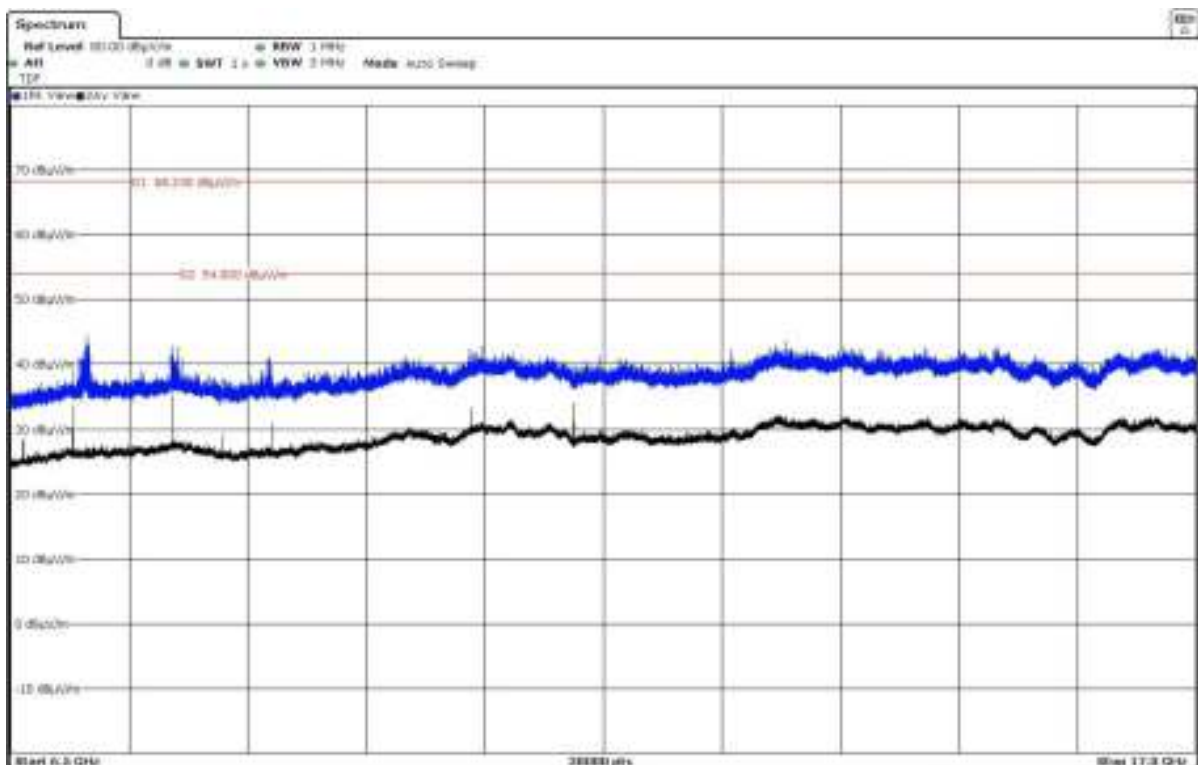

- Middle Channel:

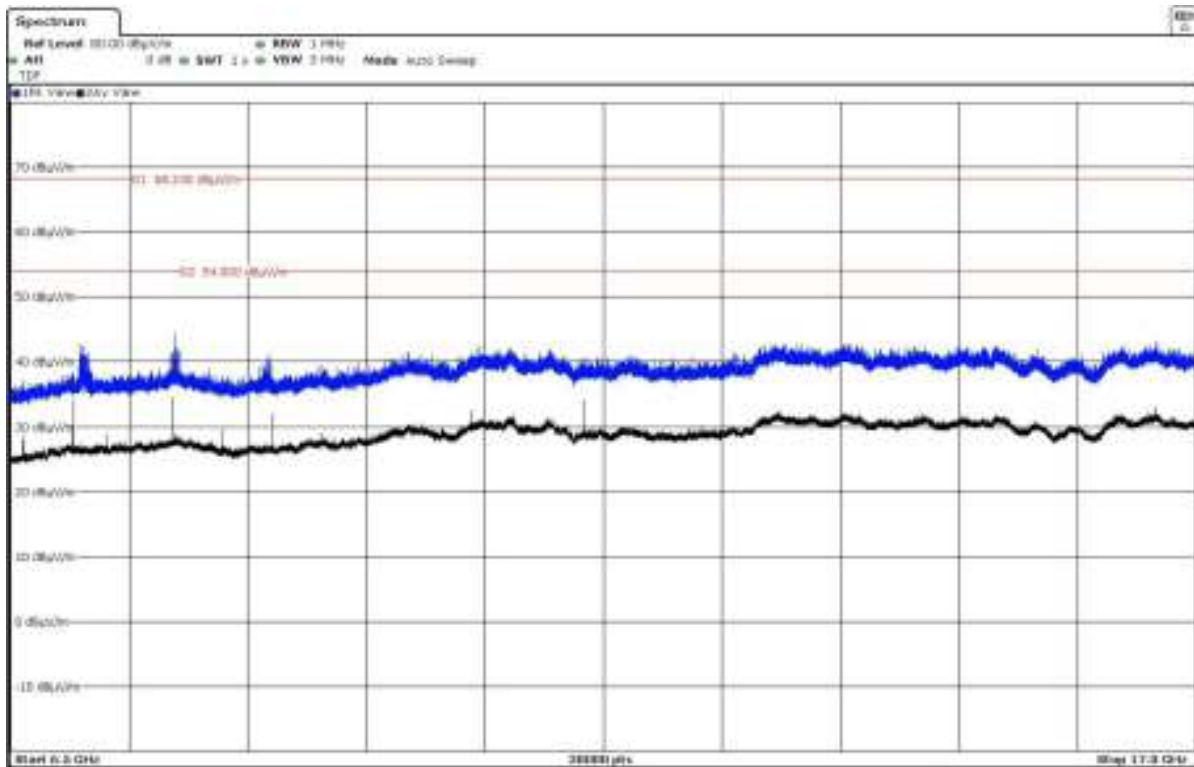


- High Channel:

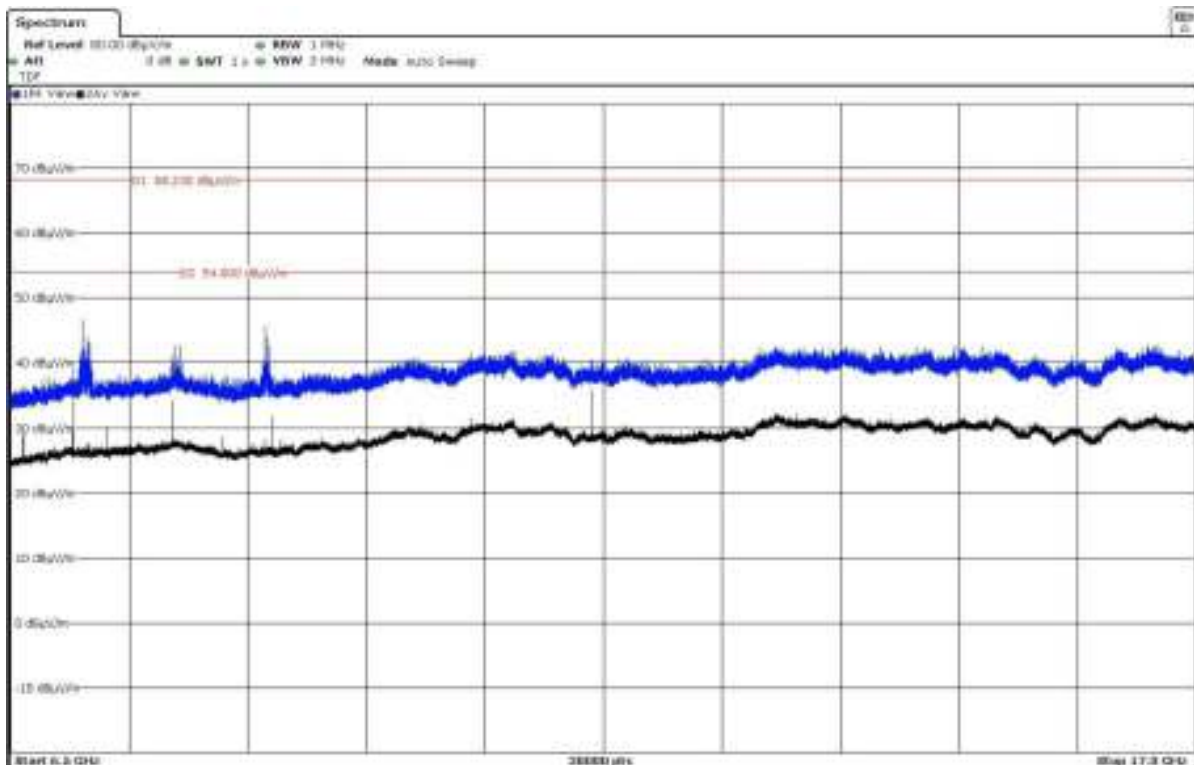



### FREQUENCY RANGE 17 - 40 GHz

This plot is valid for all the modulation modes and the Low, Middle and High Channels.

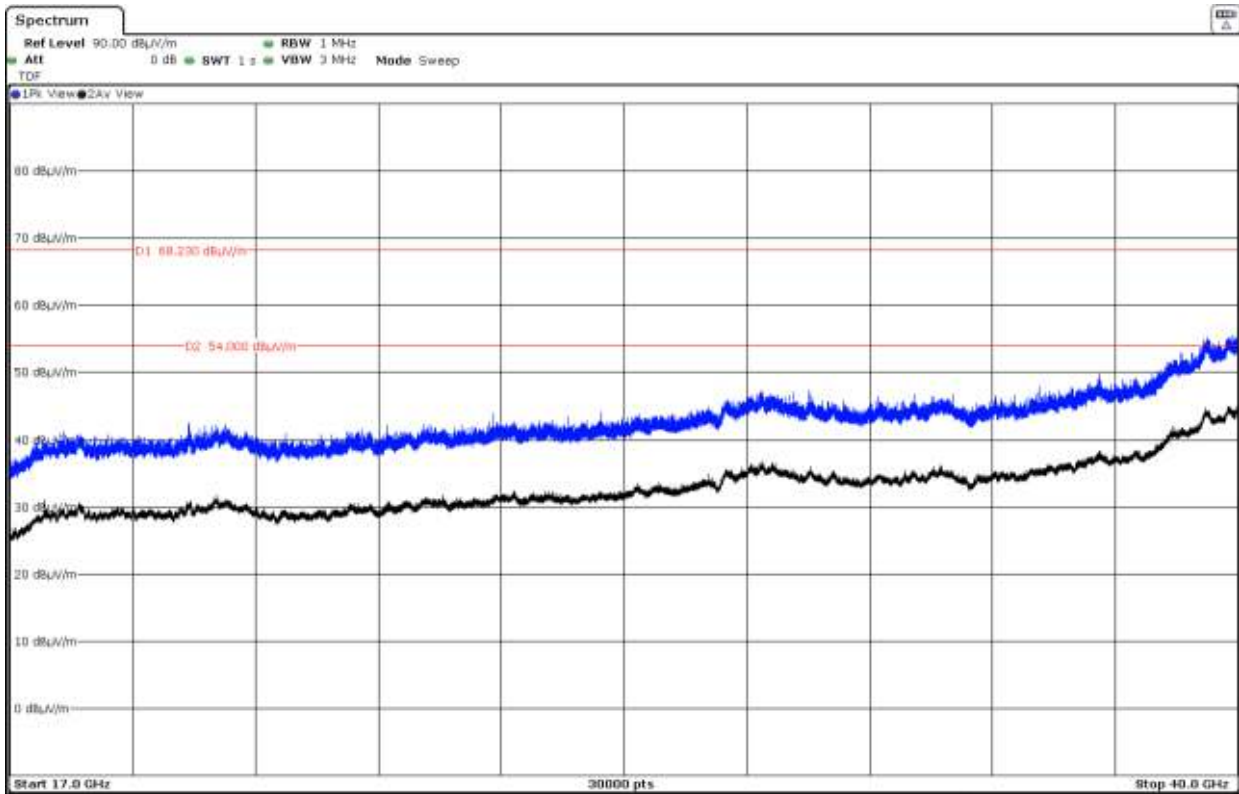

## FCC 15.407 (b)(4) / RSS-247 6.2.4.2. Transmitter Band Edge Radiated Emissions.

### SPECIFICATION:

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz (68.23 dBµV/m at 3 m distance) at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):

Frequency Range (MHz)	Field strength (µV/m)	Field strength (dBµV/m)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	300
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 40000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

### RESULTS:

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Test performed on the following worst cases modes in all relevant tests channels:

- 802.11a20: 6 Mbits
- 802.11n HT20: MCS0
- 802.11n HT40: MCS0
- 802.11ac VHT40: MCS0
- 802.11ac VHT80: MCS0

- **802.11 a20:**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Lower Channel 149 (5745 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- Middle Channel 157 (5785 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- High Channel 165 (5825 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

The measurement uncertainty (dB) is  $<\pm 3.04$

- **802.11 n20 (HT20):**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Low Channel 149 (5745 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- Middle Channel 157 (5785 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- High Channel 165 (5825 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

The measurement uncertainty (dB) is  $<\pm 3.04$

- **802.11 ac20 (HT20):**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Low Channel 149 (5745 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- Middle Channel 157 (5785 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- High Channel 165 (5825 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

The measurement uncertainty (dB) is  $<\pm 3.04$

- **802.11 n40 (HT40):**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Low Channel 151 (5755 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- High Channel 159 (5795 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

The measurement uncertainty (dB) is  $<\pm 3.04$

- **802.11 ac40:**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Low Channel 151 (5755 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

- High Channel 159 (5795 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.

The measurement uncertainty (dB) is  $<\pm 3.04$

- **802.11 ac80 (VHT80):**

Inside band spurious emissions in 5.65-5.925 GHz adjacent band.

- Middle Channel 155 (5775 MHz):

No radiated spurious frequencies detected at less than 20 dB below the limit.


The measurement uncertainty (dB) is  $<\pm 3.04$

Verdict: PASS


- 802.11 a20:

**Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz**


- Low Channel 149 (5745 MHz):

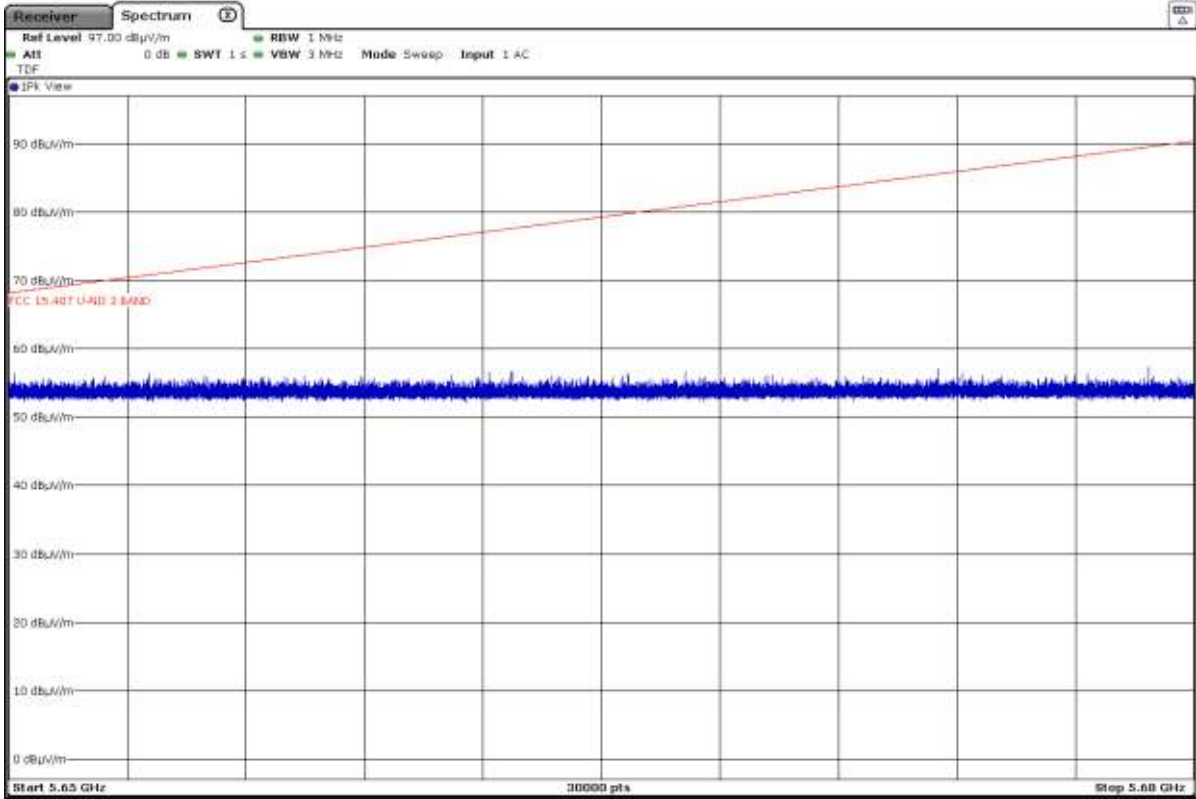

- Middle Channel 157 (5785 MHz):

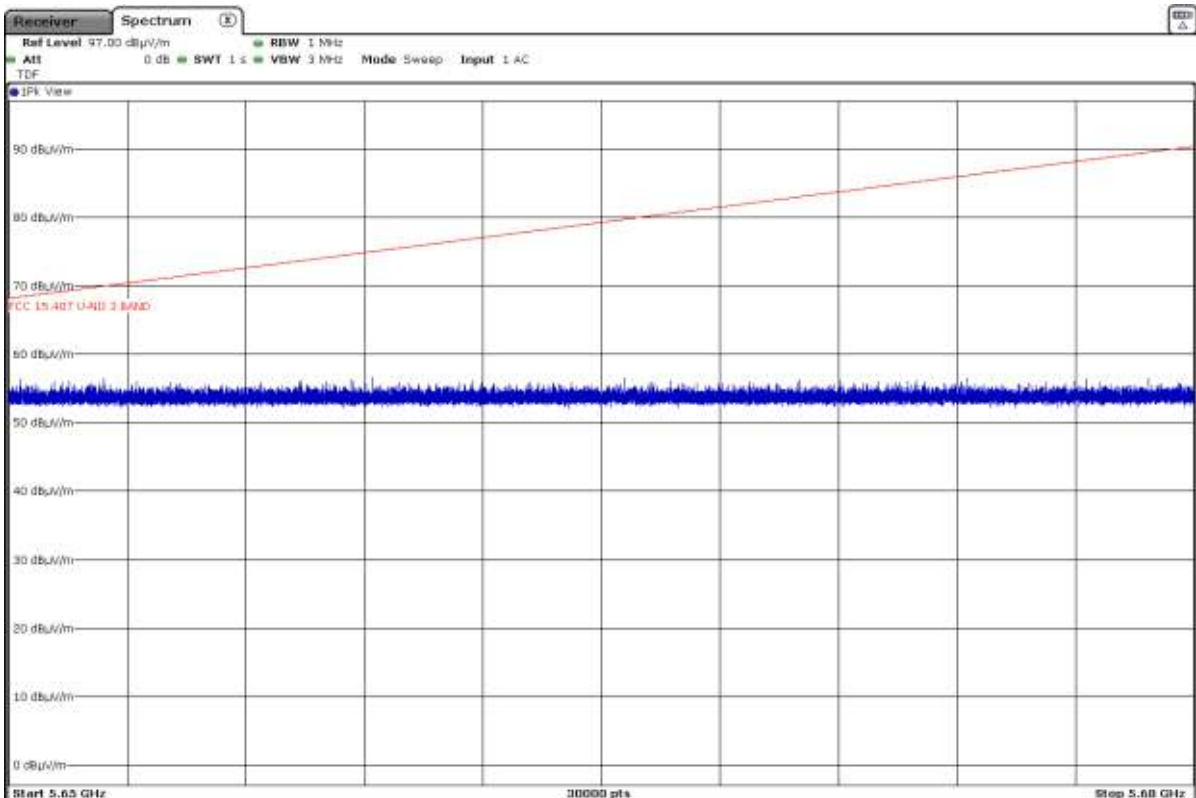


- High Channel 165 (5825 MHz):

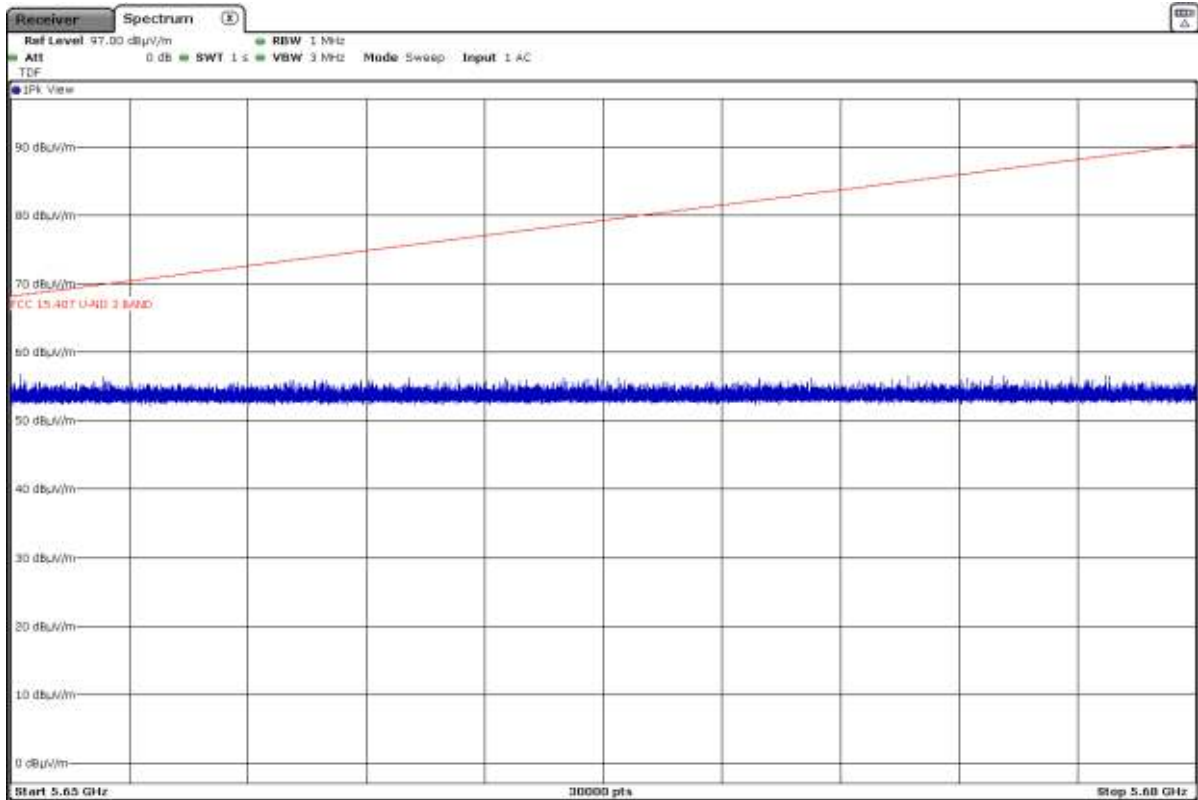


**Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz**


- Low Channel 149 (5745 MHz):

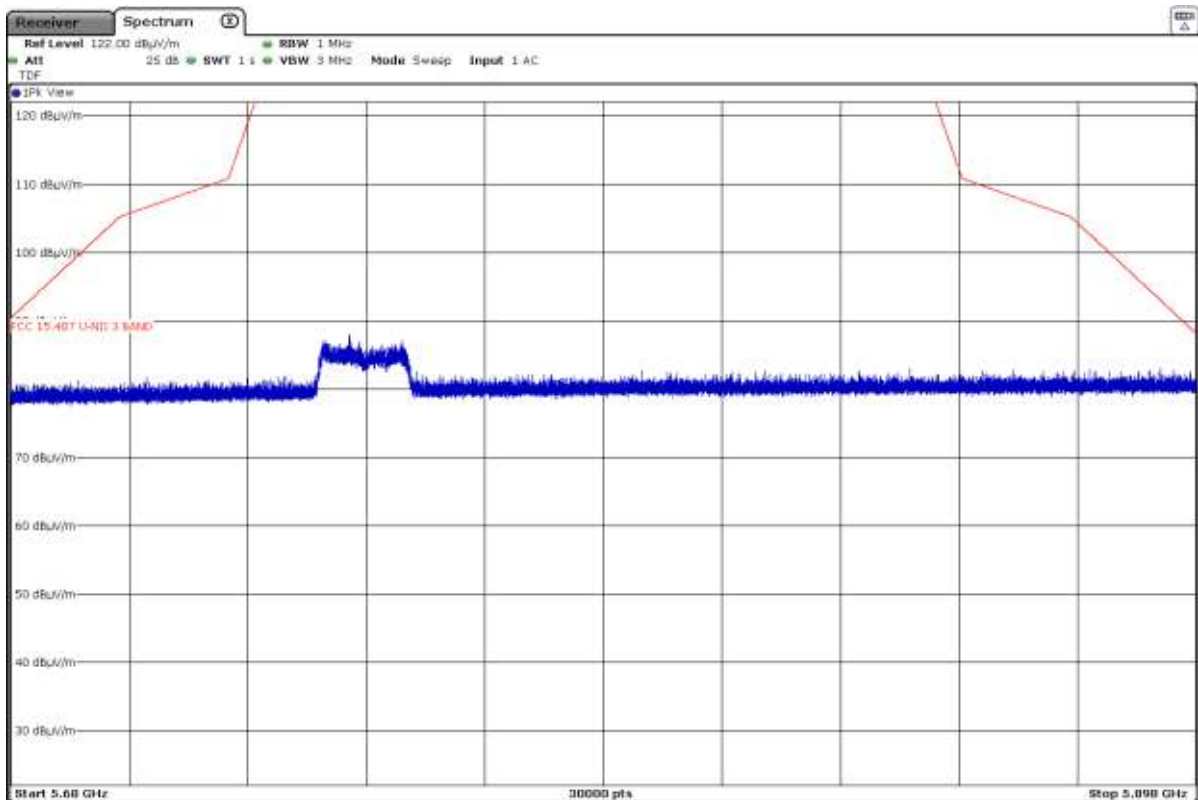

- Middle Channel 157 (5785 MHz):

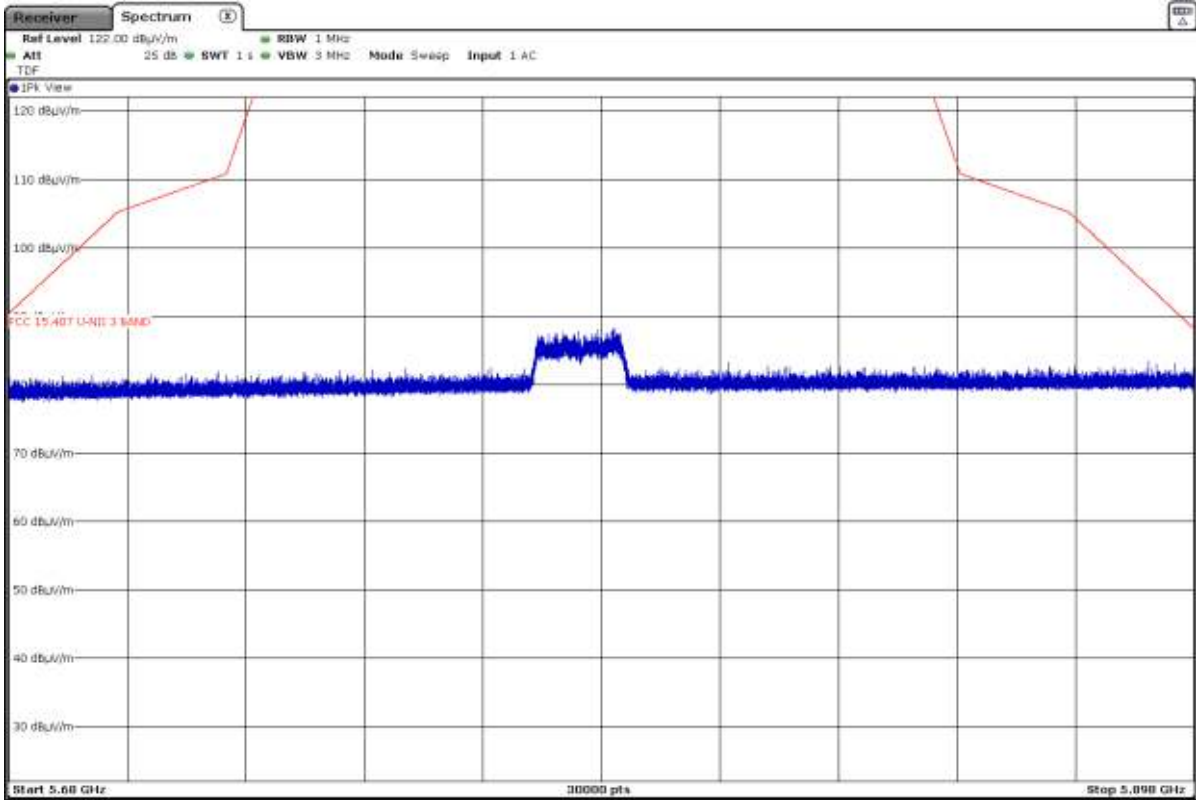


- High Channel 165 (5825 MHz):

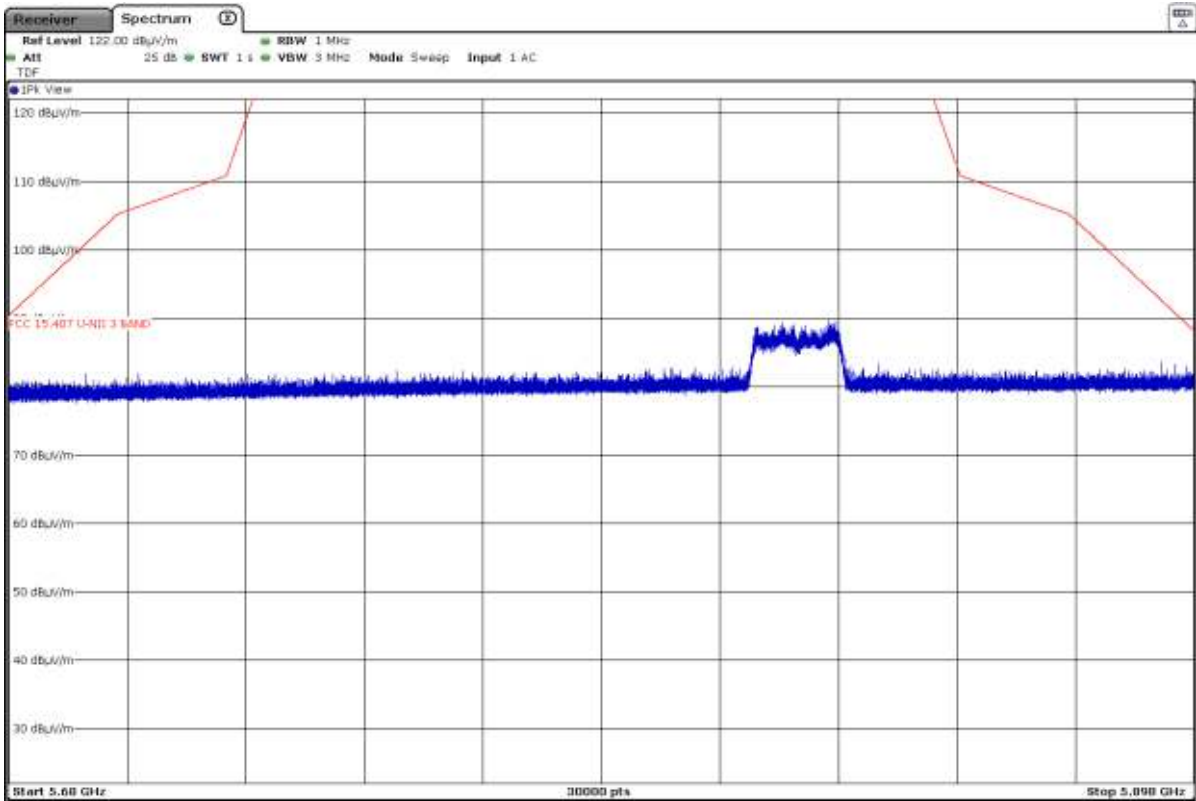


### Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz

- Low Channel 149 (5745 MHz):

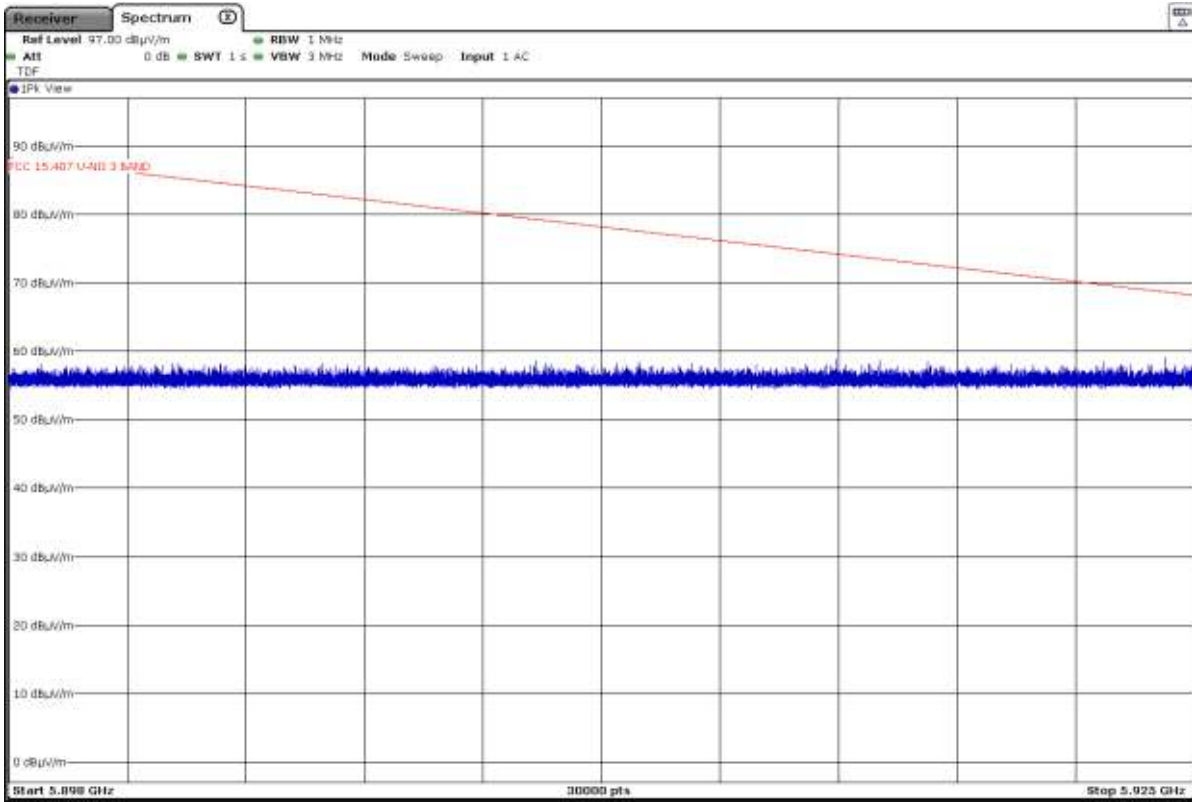


- Middle Channel 157 (5785 MHz):

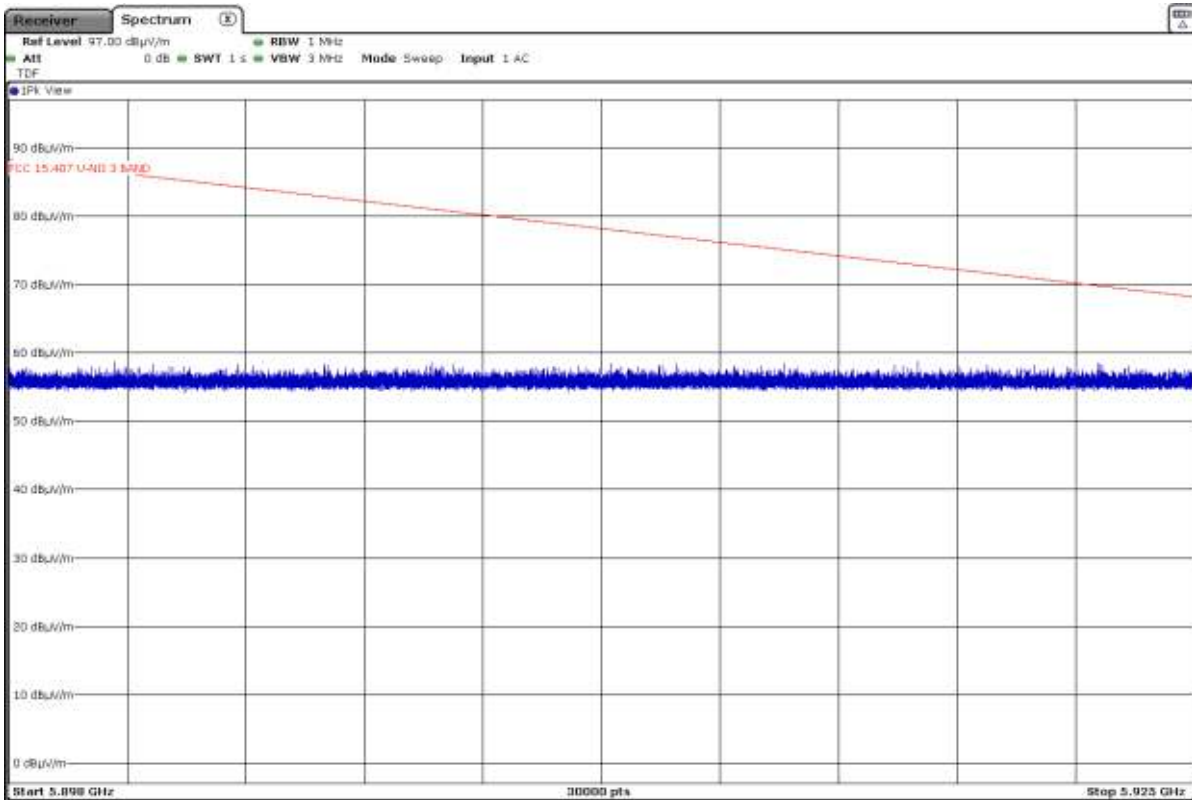




- High Channel 165 (5825 MHz):

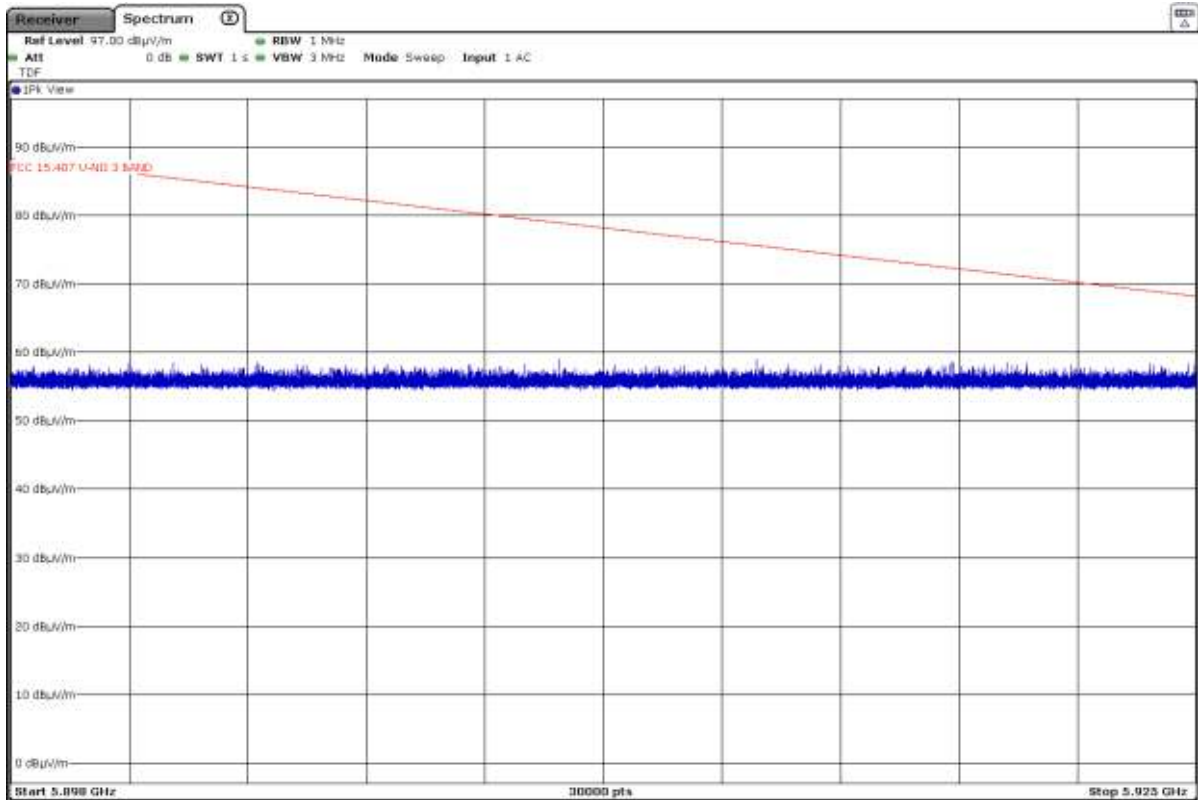


• 802.11 n20 (HT20):

Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz


- Low Channel 149 (5745 MHz):

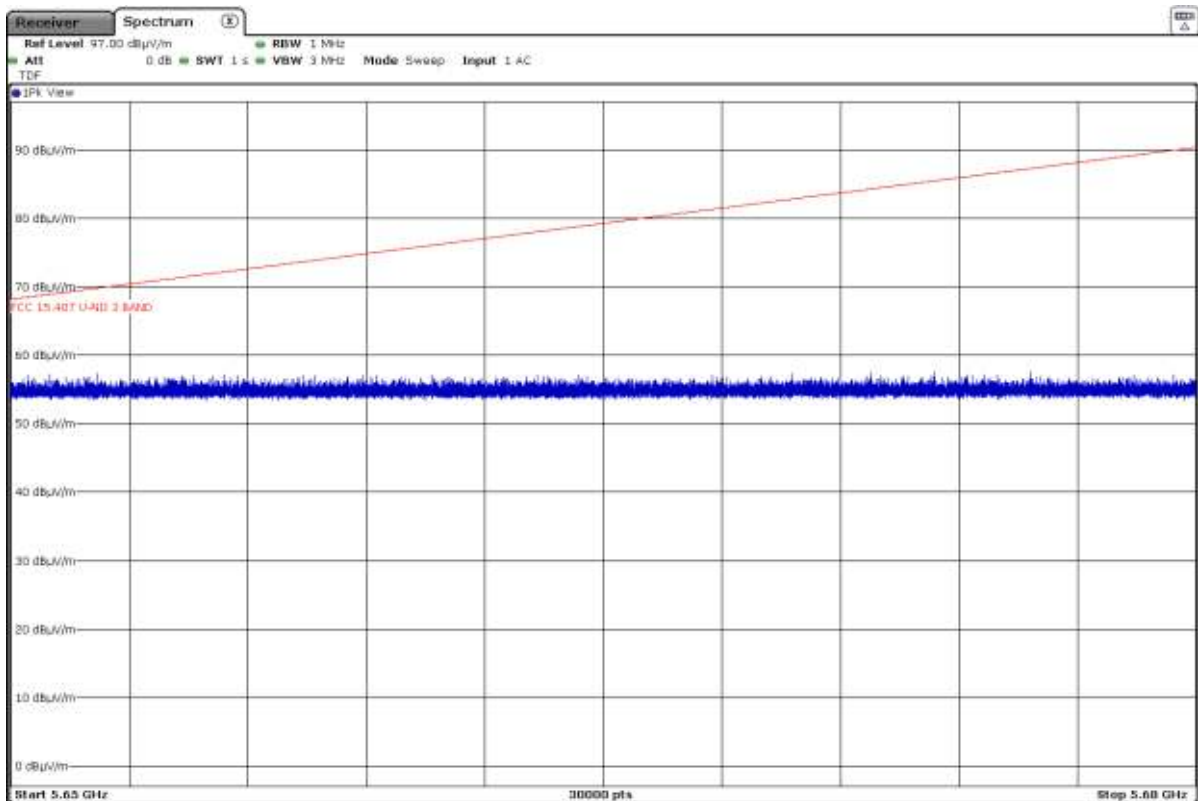

- Middle Channel 157 (5785 MHz):

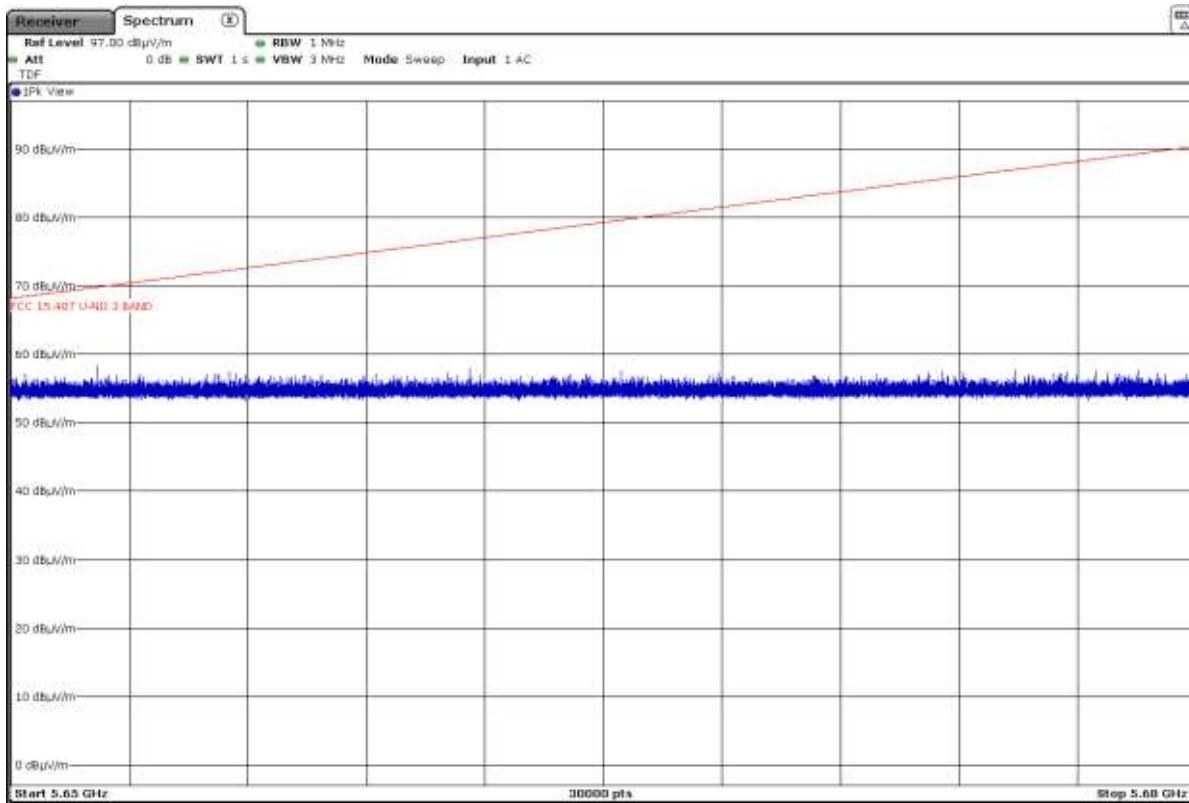


- High Channel 165 (5825 MHz):

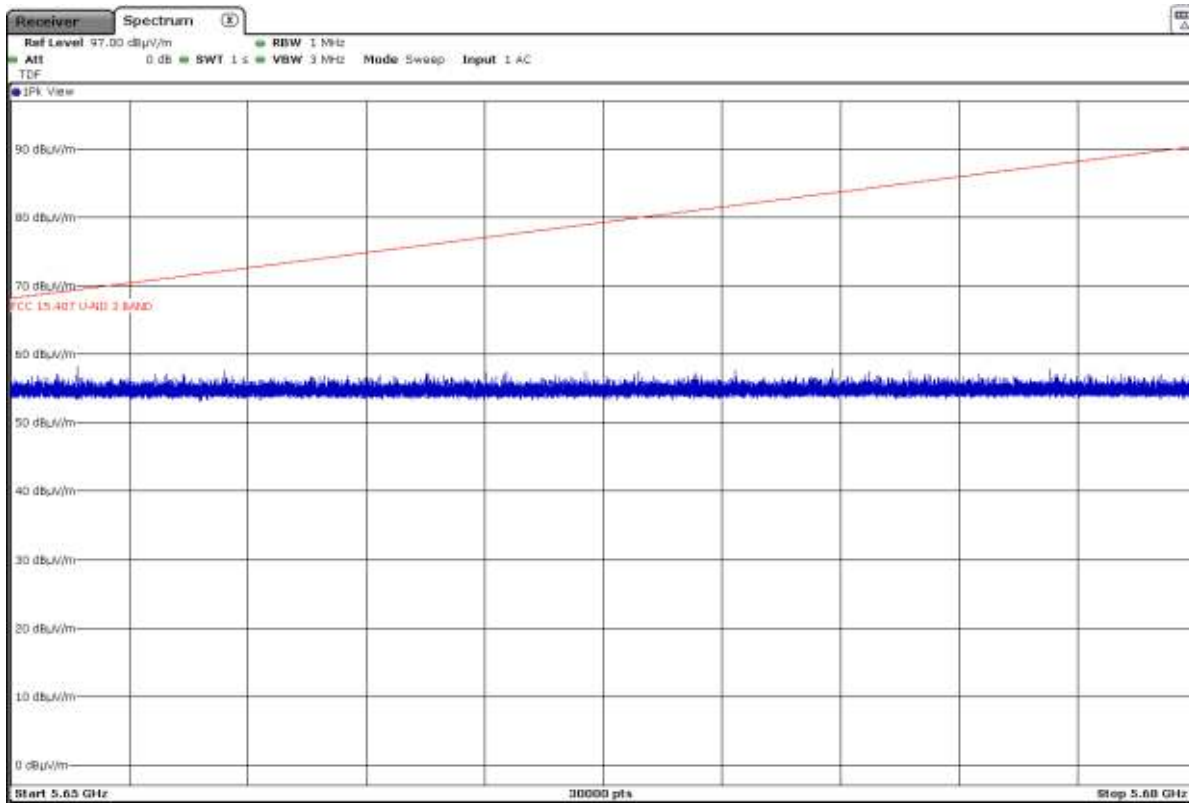


### Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz


- Low Channel 149 (5745 MHz):

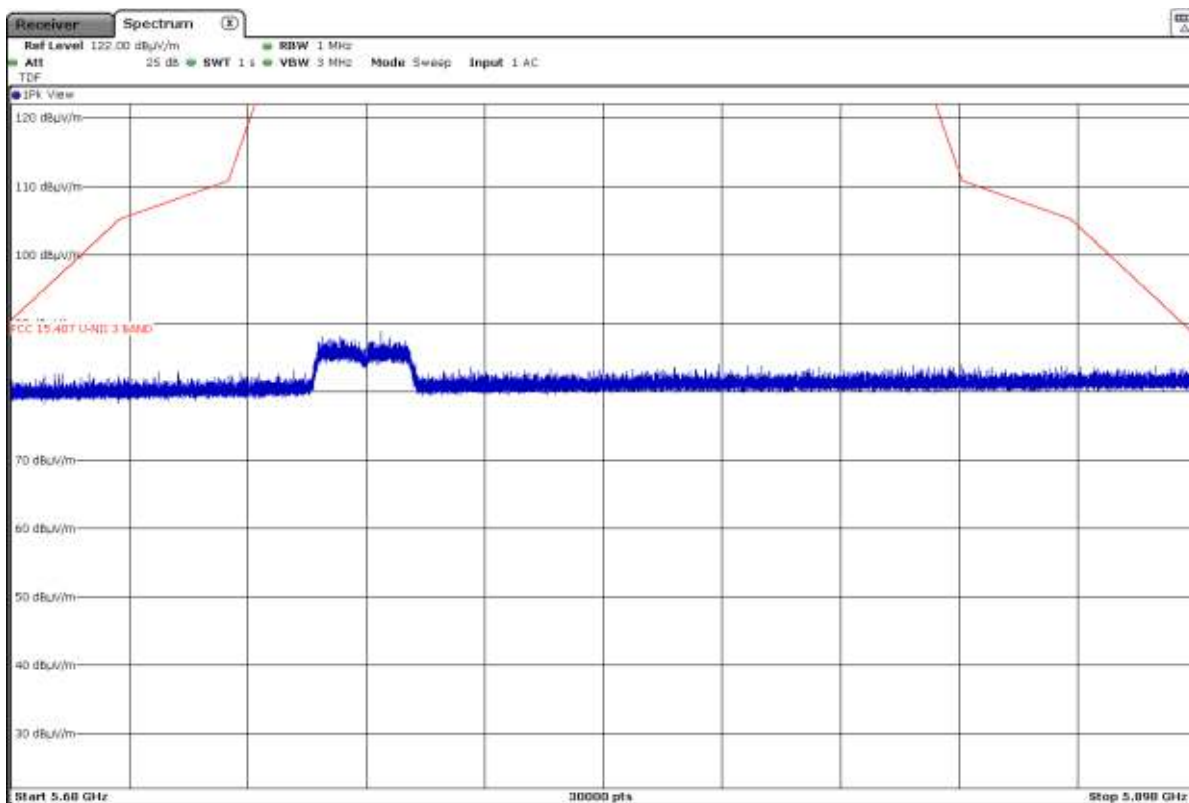

- Middle Channel 157 (5785 MHz):

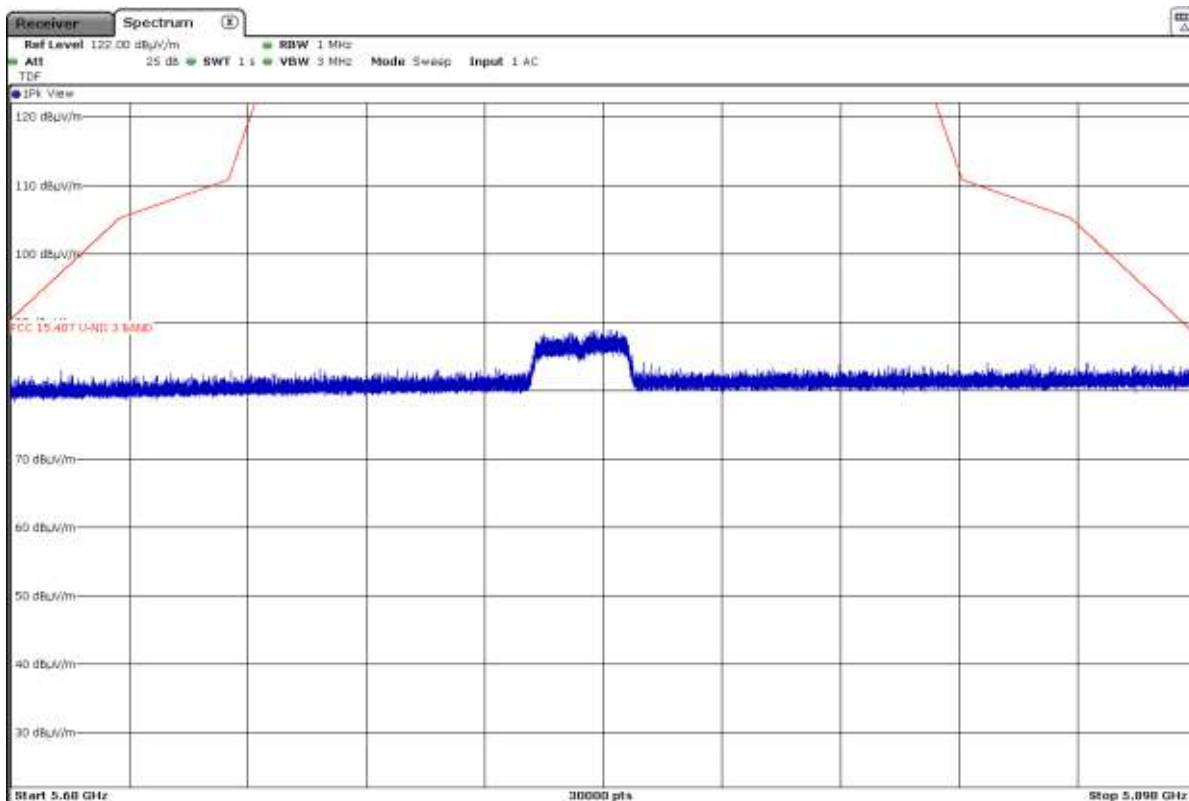


- High Channel 165 (5825 MHz):

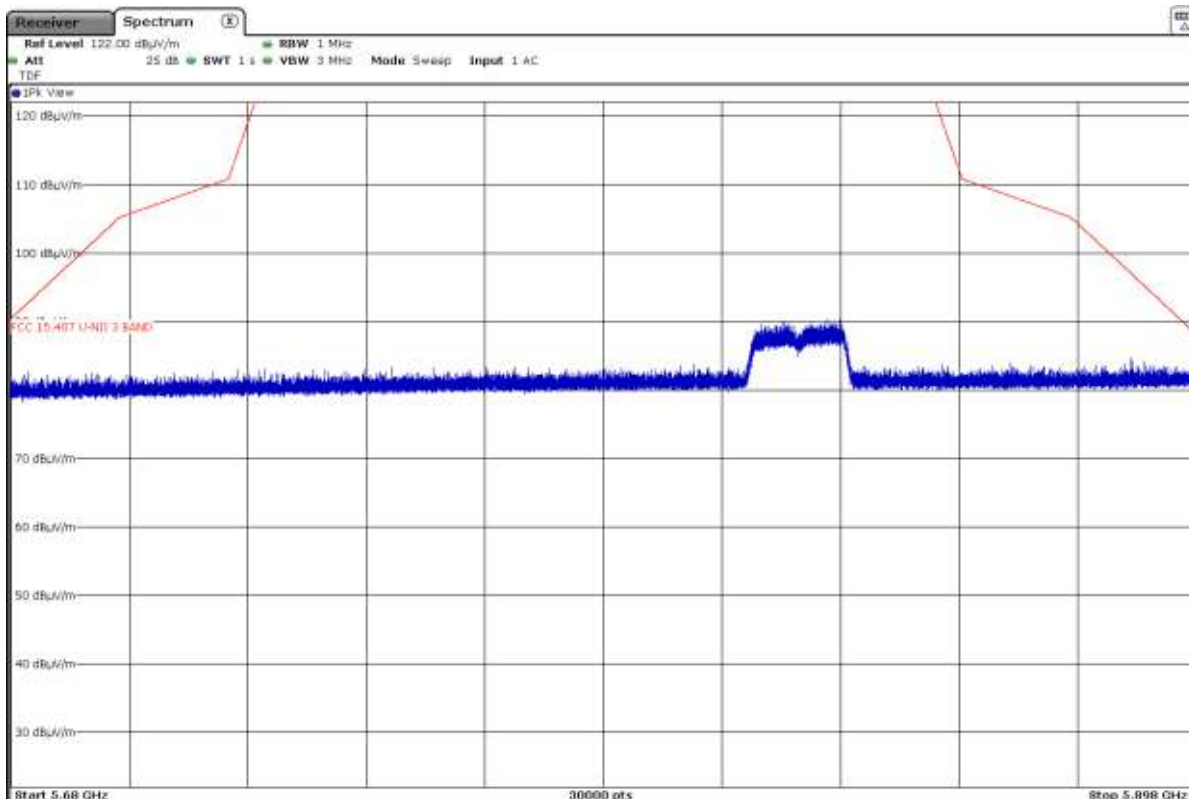


**Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz**


- Low Channel 149 (5745 MHz):

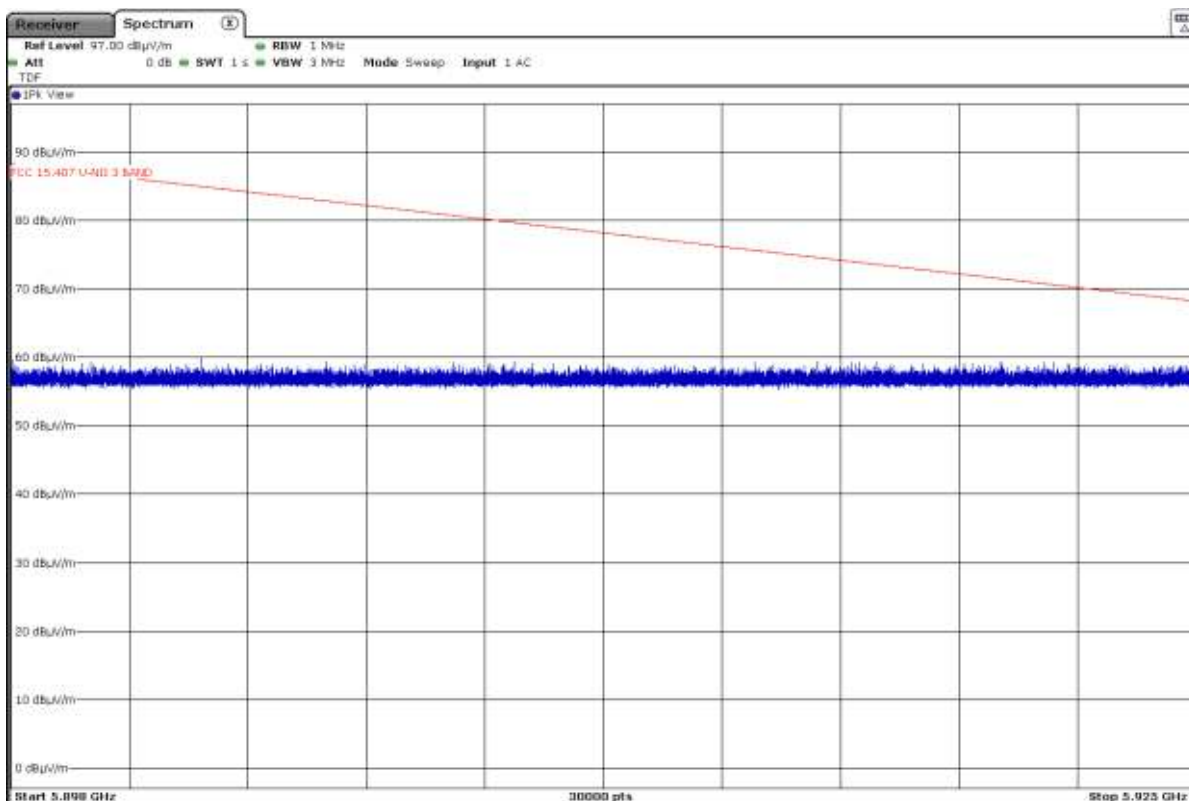

- Middle Channel 157 (5785 MHz):

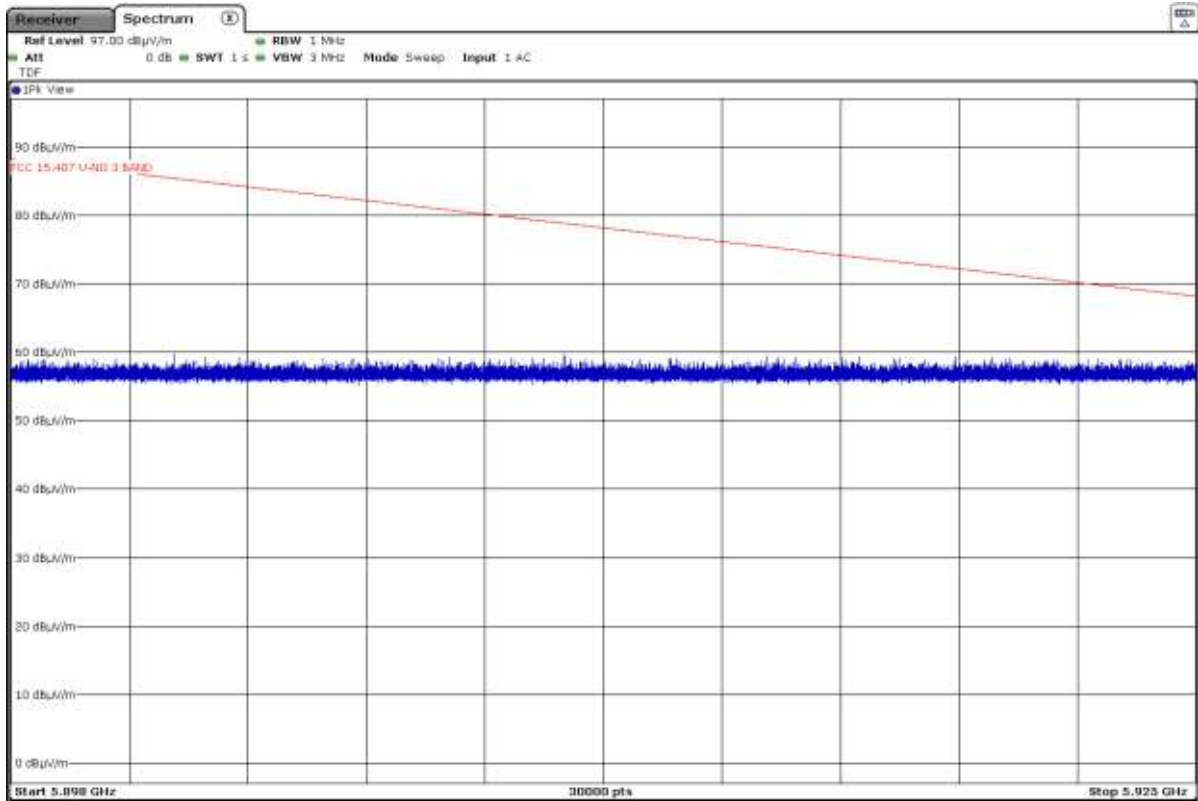


- High Channel 165 (5825 MHz):

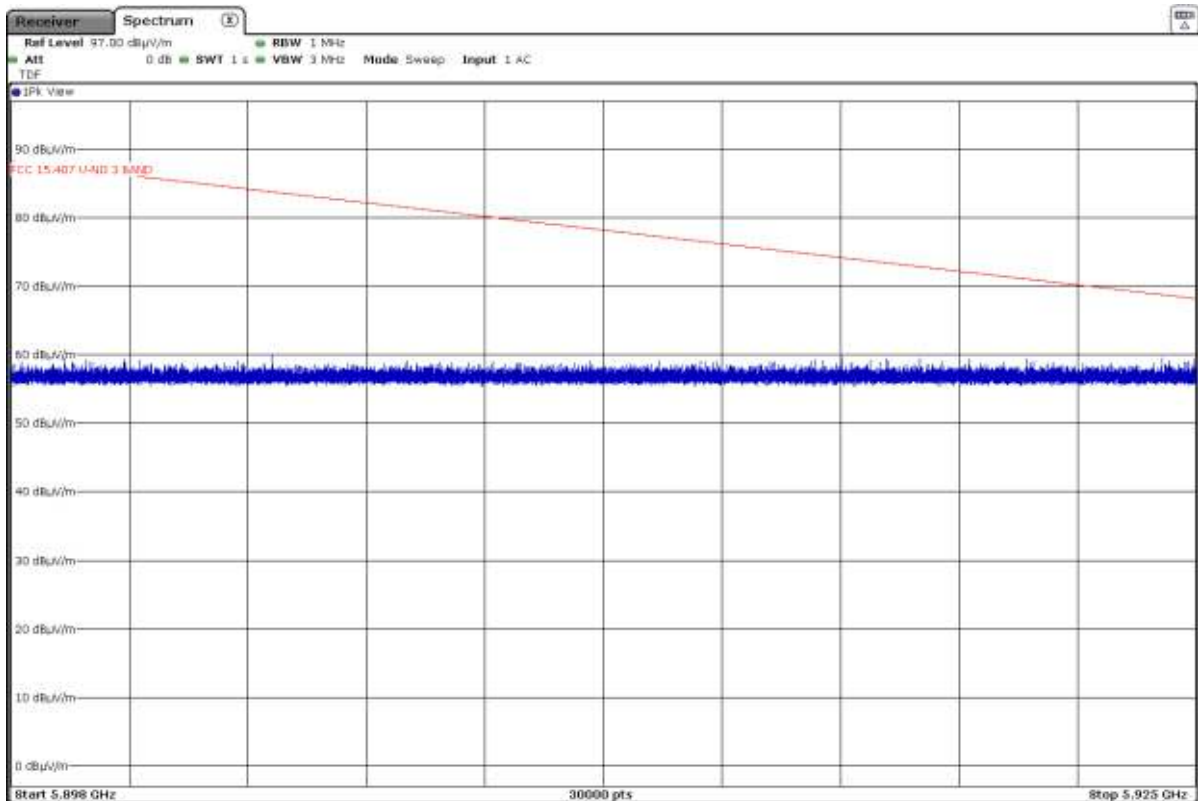


- 802.11 ac20:

**Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz**


- Low Channel 149 (5745 MHz):

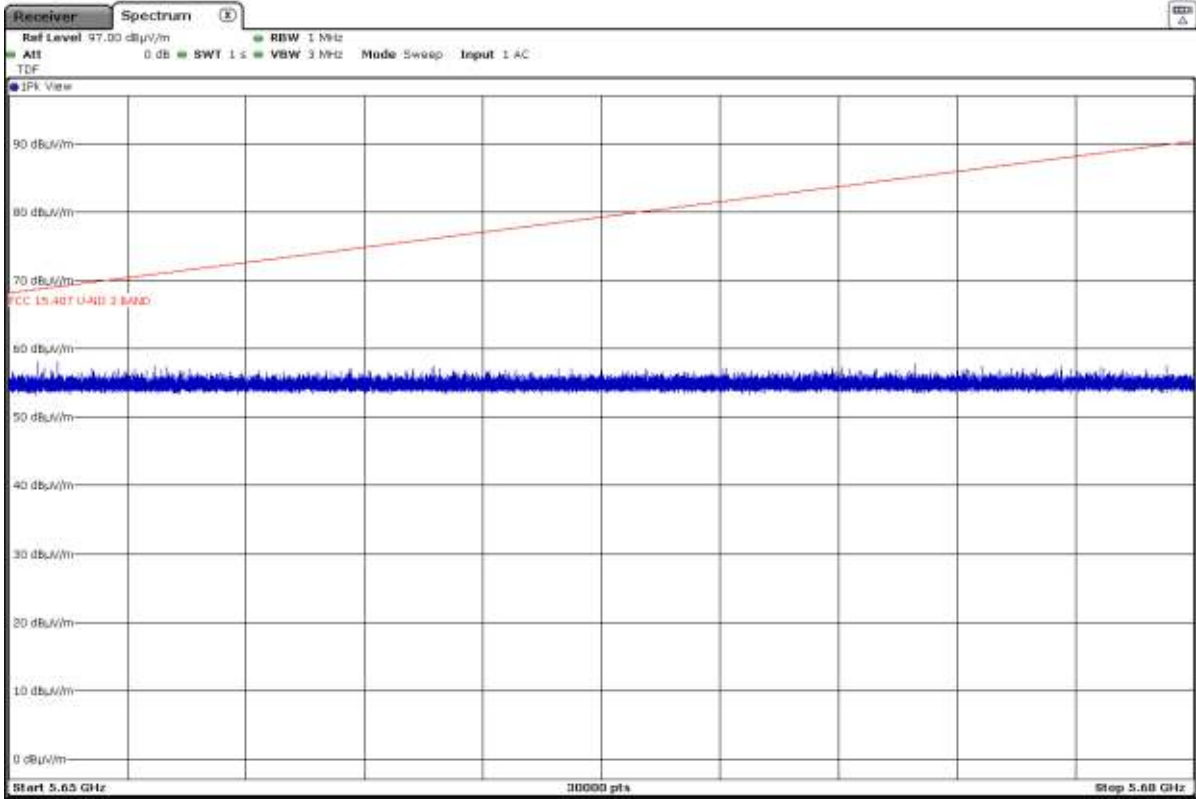

- Middle Channel 157 (5785 MHz):

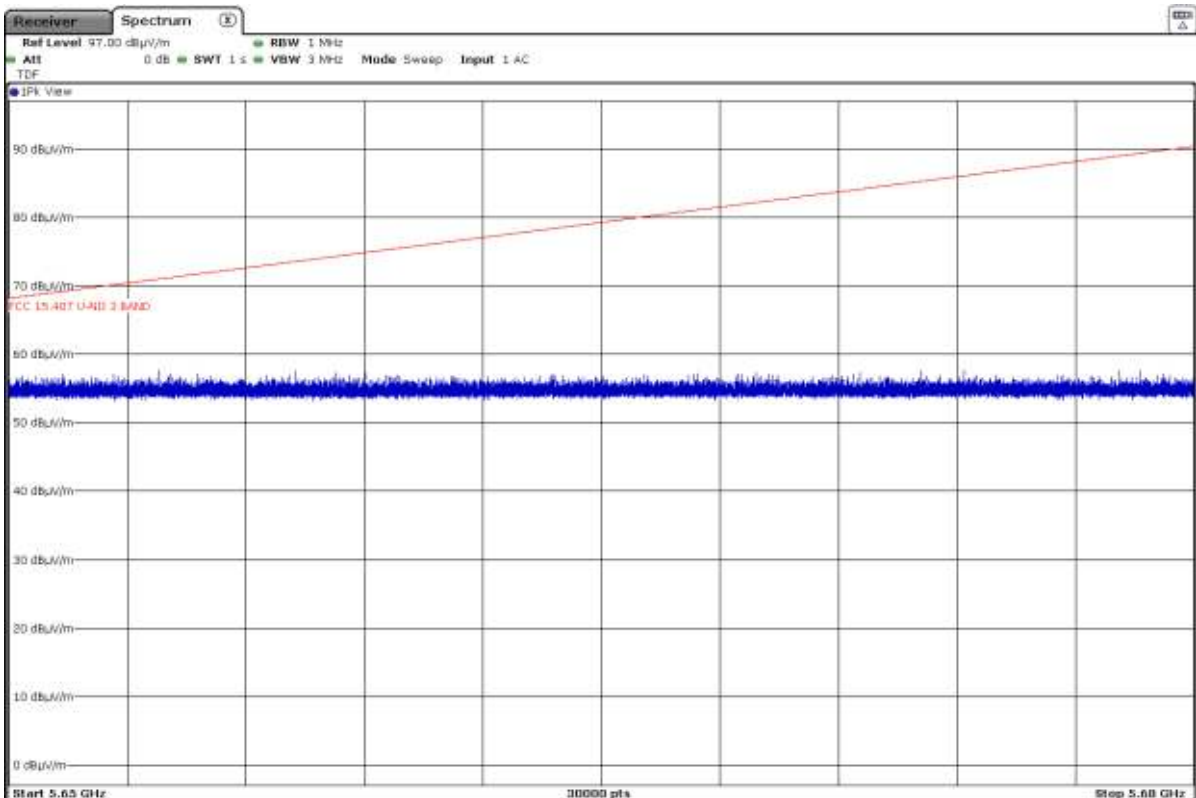


- High Channel 165 (5825 MHz):

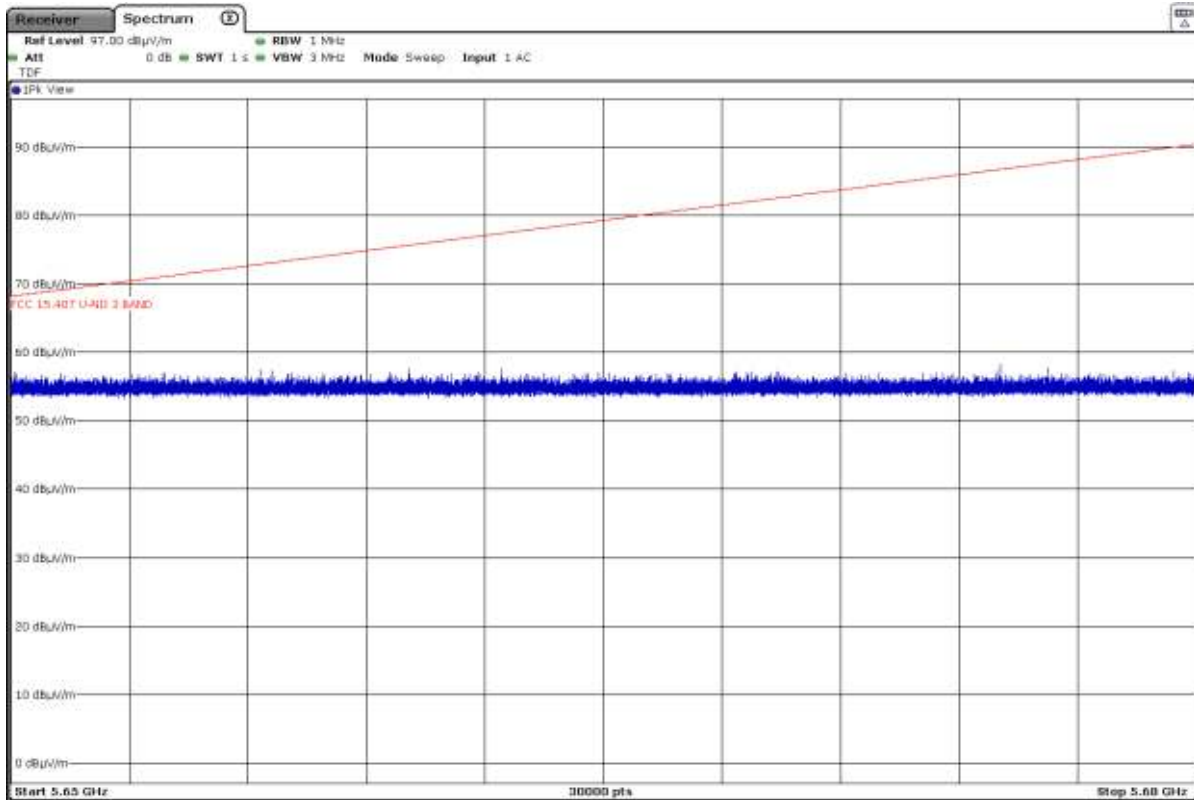


**Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz**


- Low Channel 149 (5745MHz):

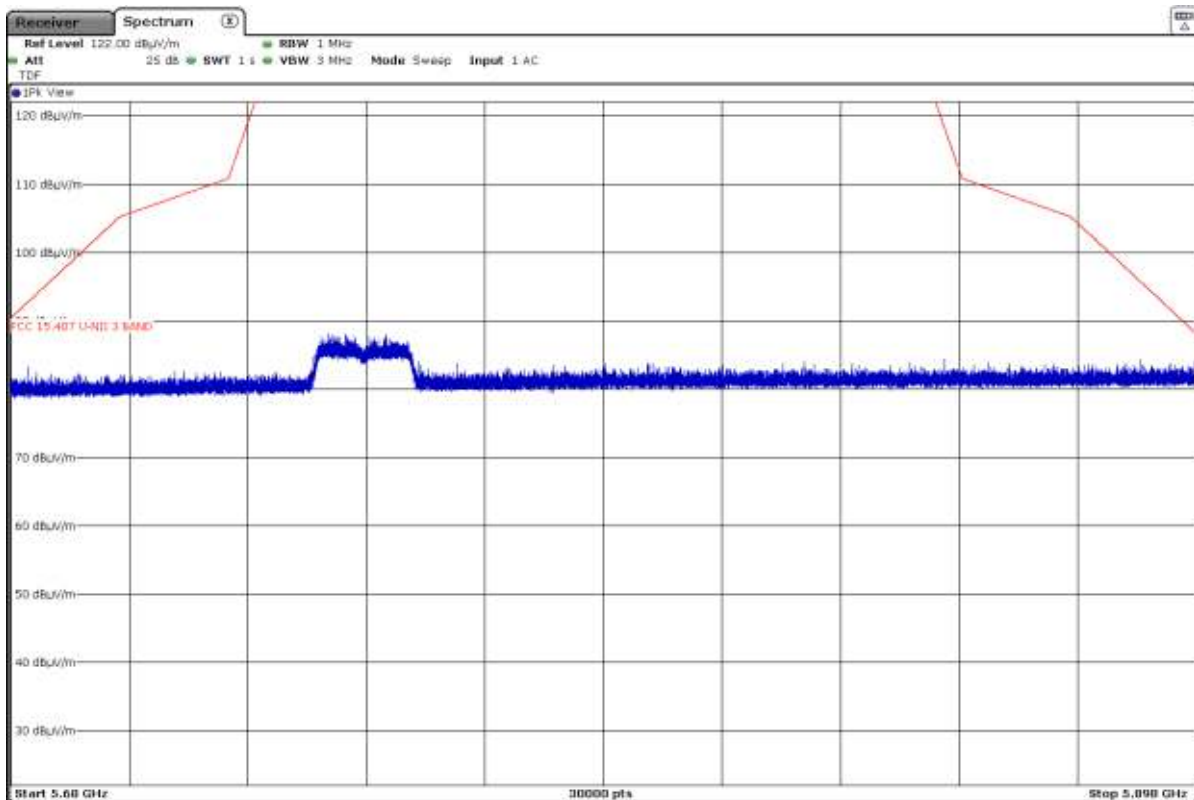

- Middle Channel 157 (5785MHz):

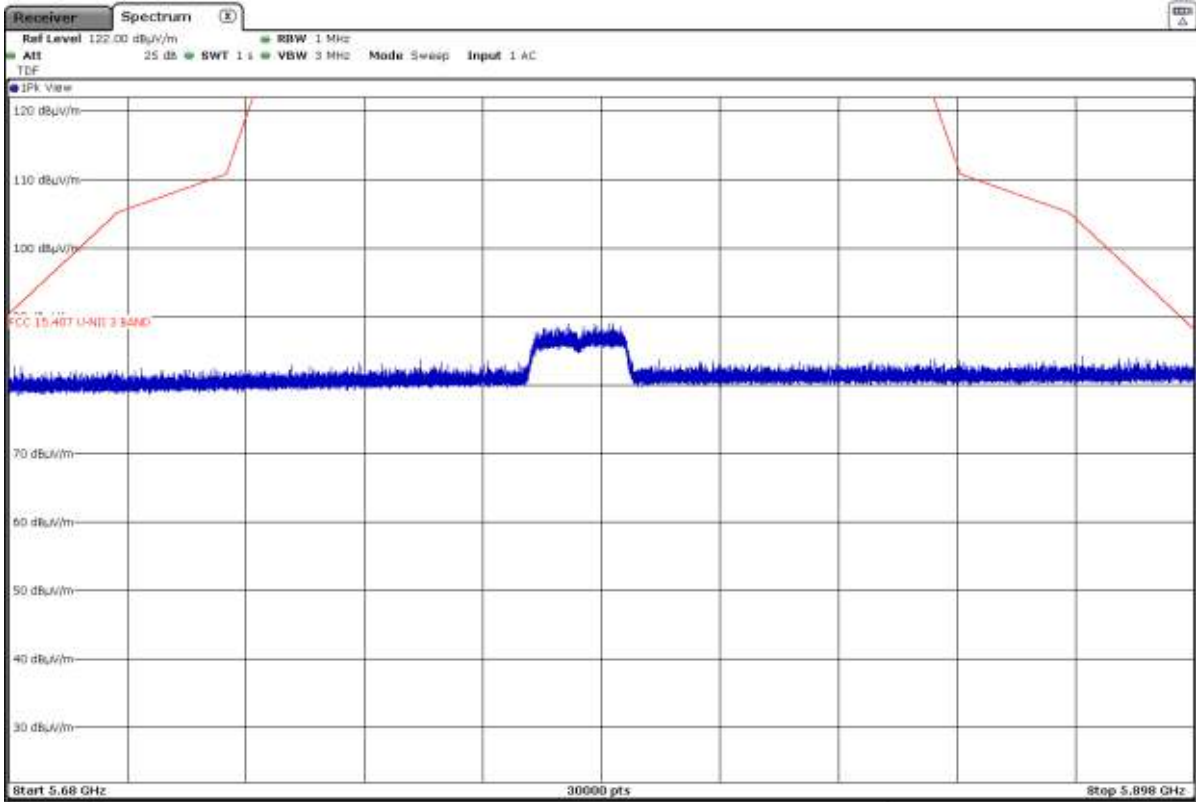


- High Channel 165 (5825MHz):

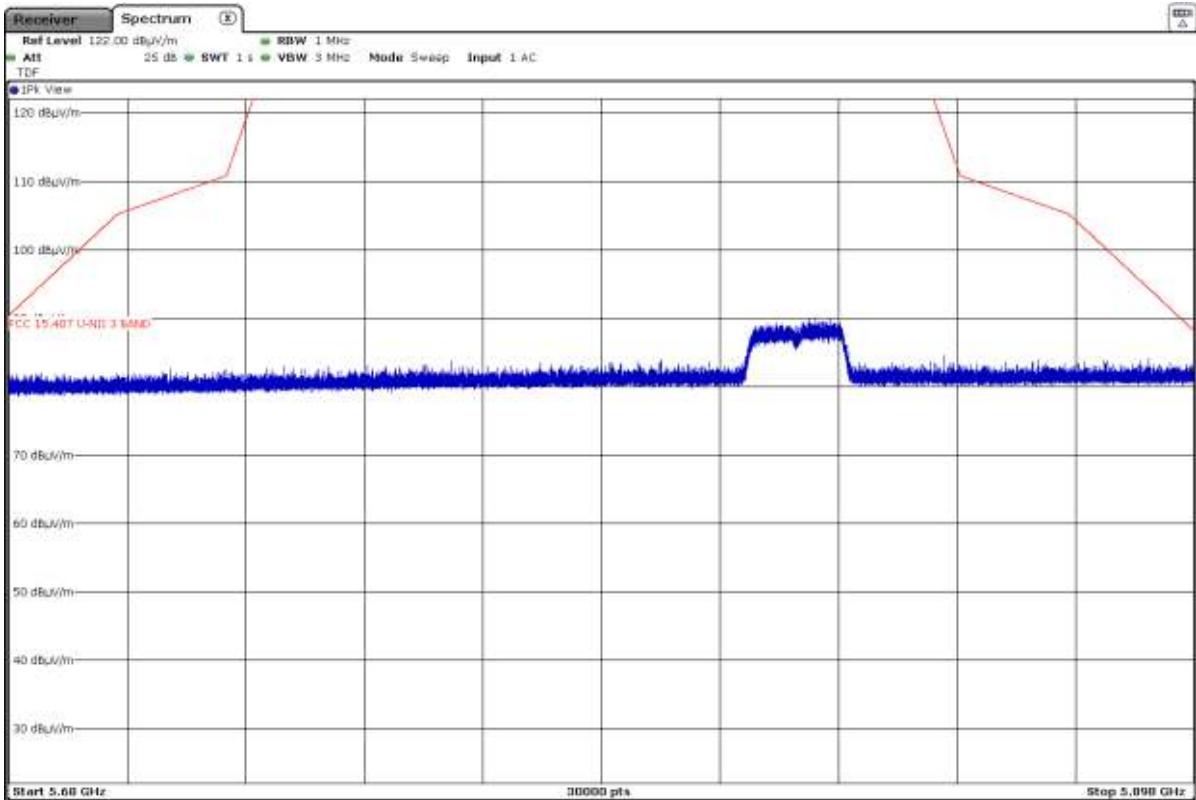




### Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz


- Low Channel 149 (5745 MHz):

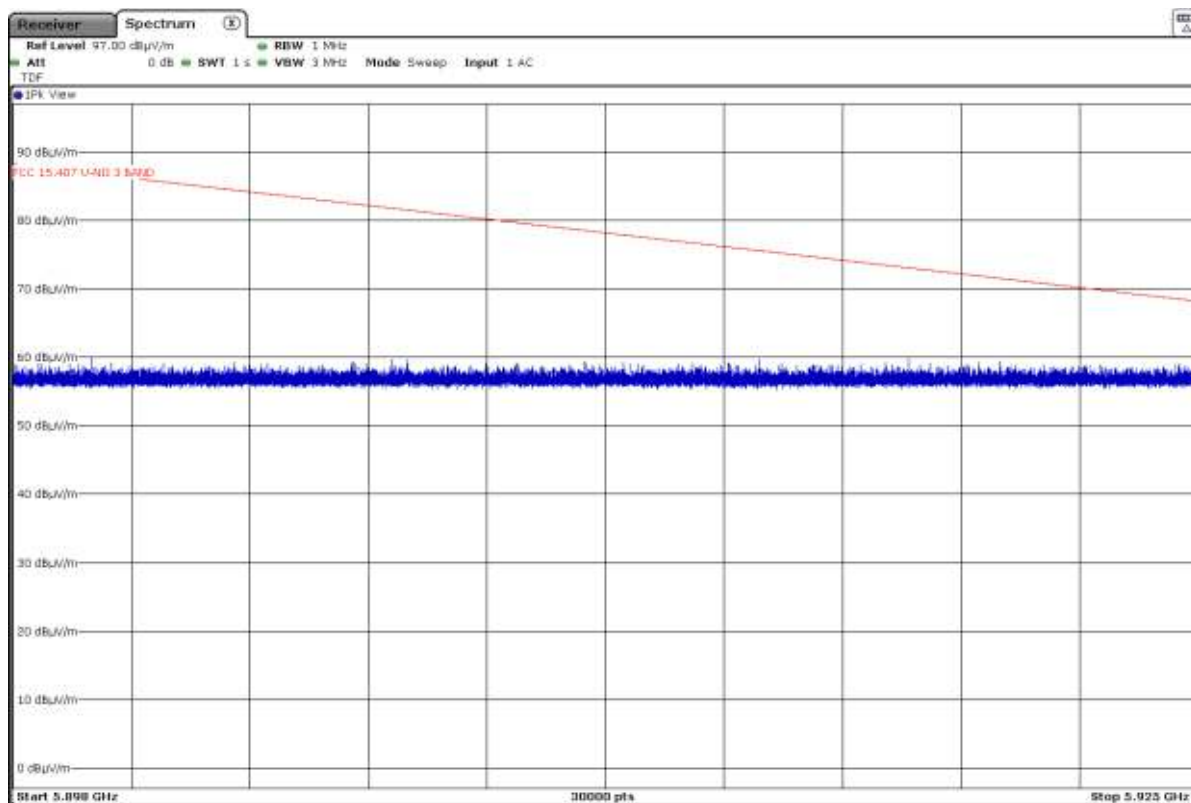

- Middle Channel 157 (5785 MHz):

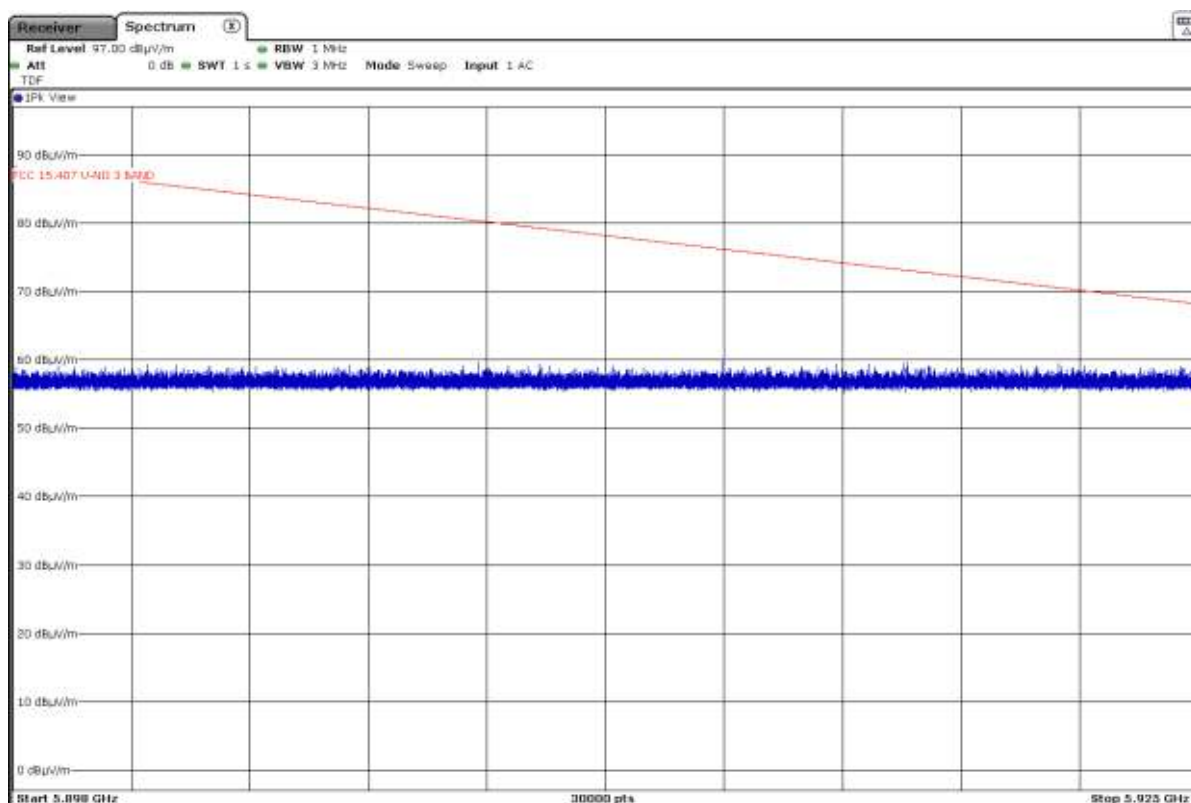


- High Channel 165 (5825 MHz):

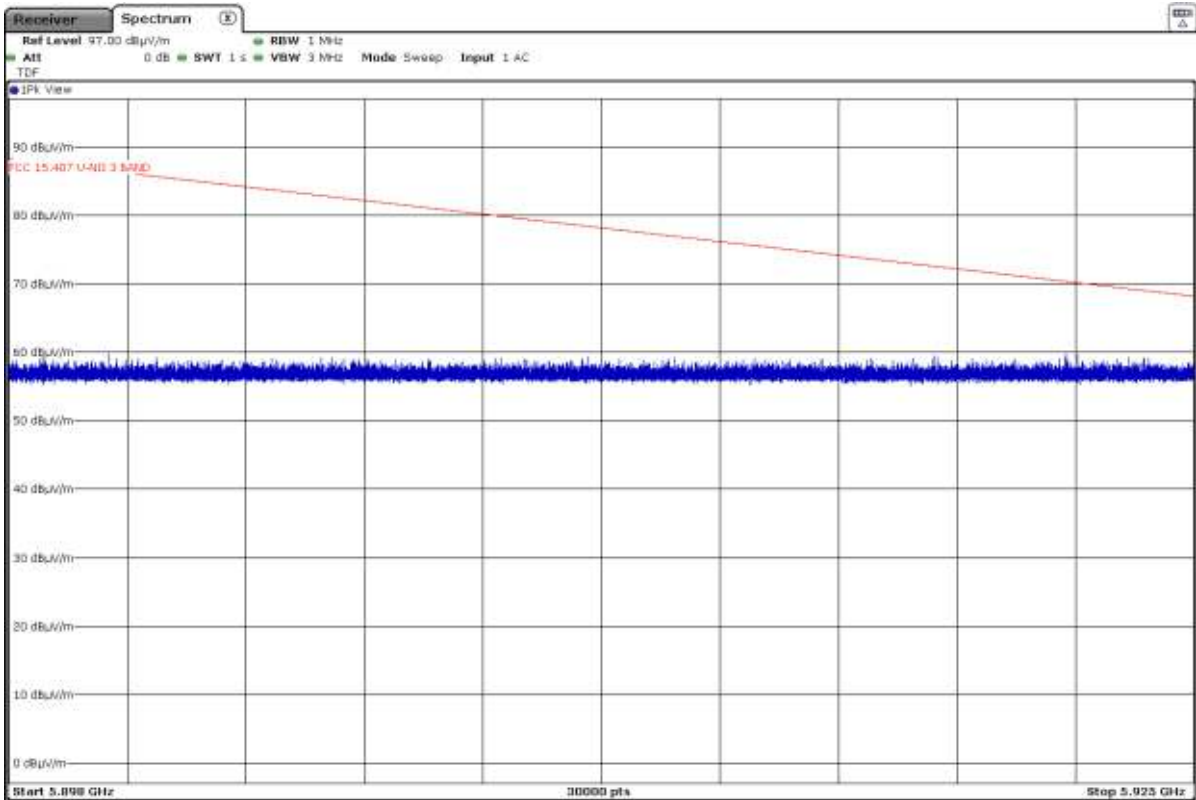


• 802.11 n40 (HT40):

Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz

- Low Channel 151 (5755 MHz):

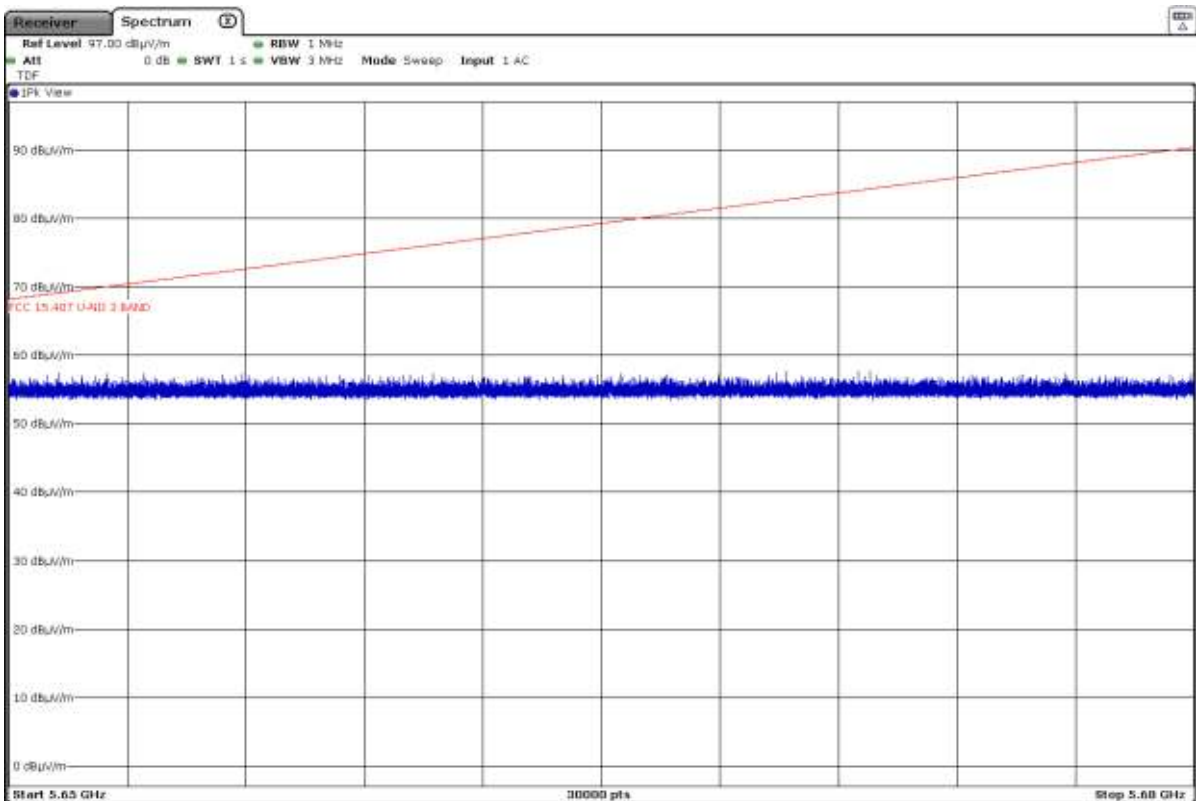


- High Channel 159 (5795 MHz):

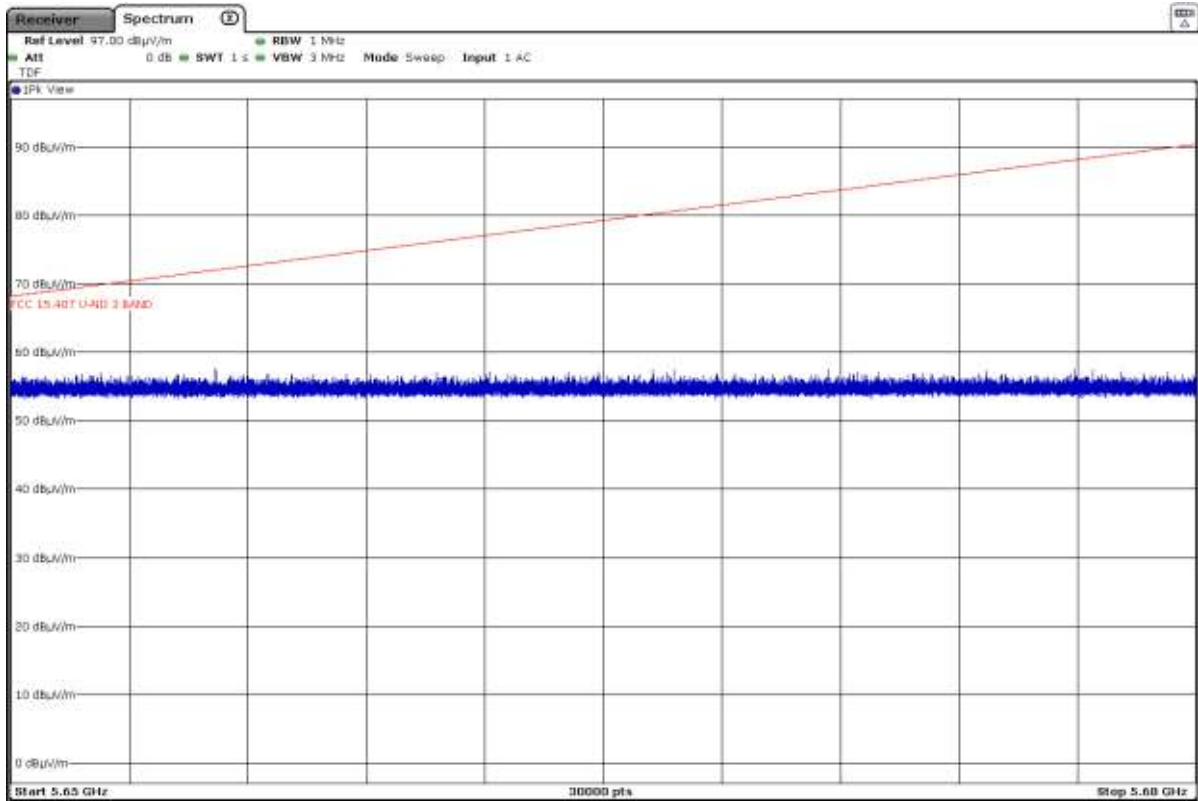


**Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz**

- Low Channel 151 (5755 MHz):

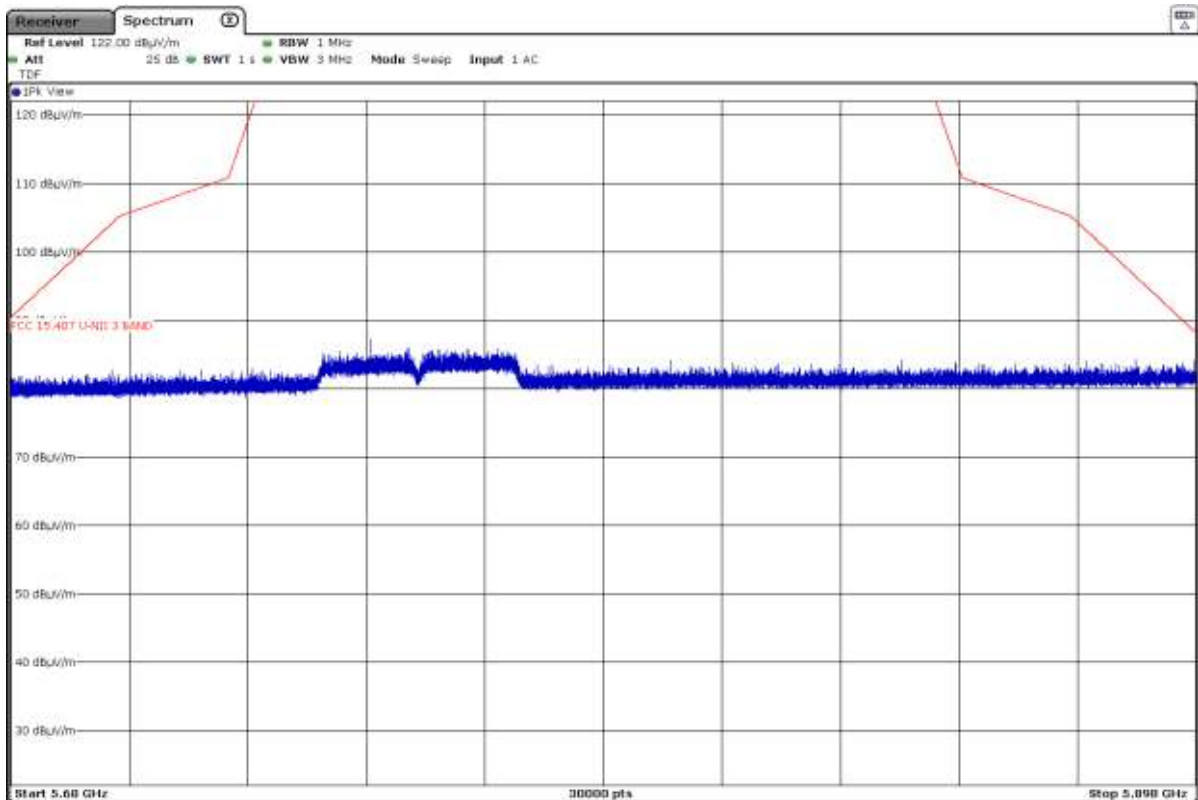


- High Channel 159 (5795 MHz):

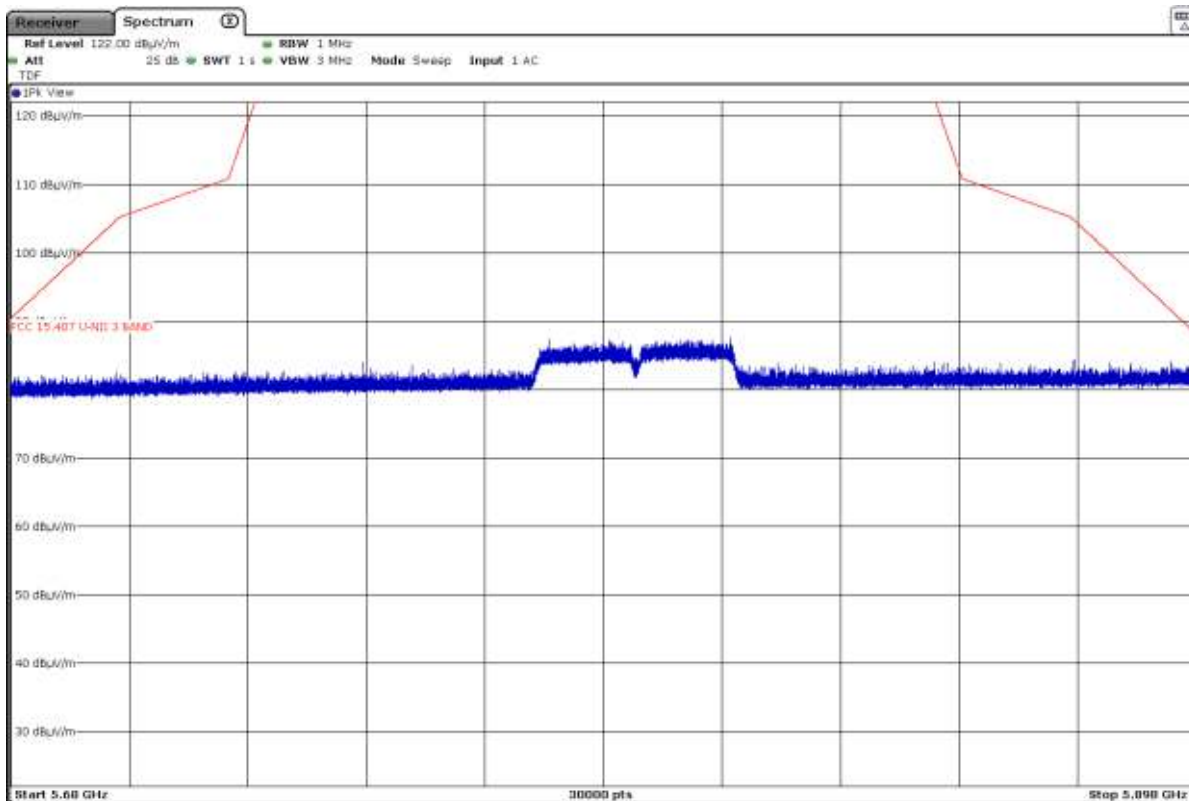


**Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz**

- Low Channel 151 (5755 MHz):

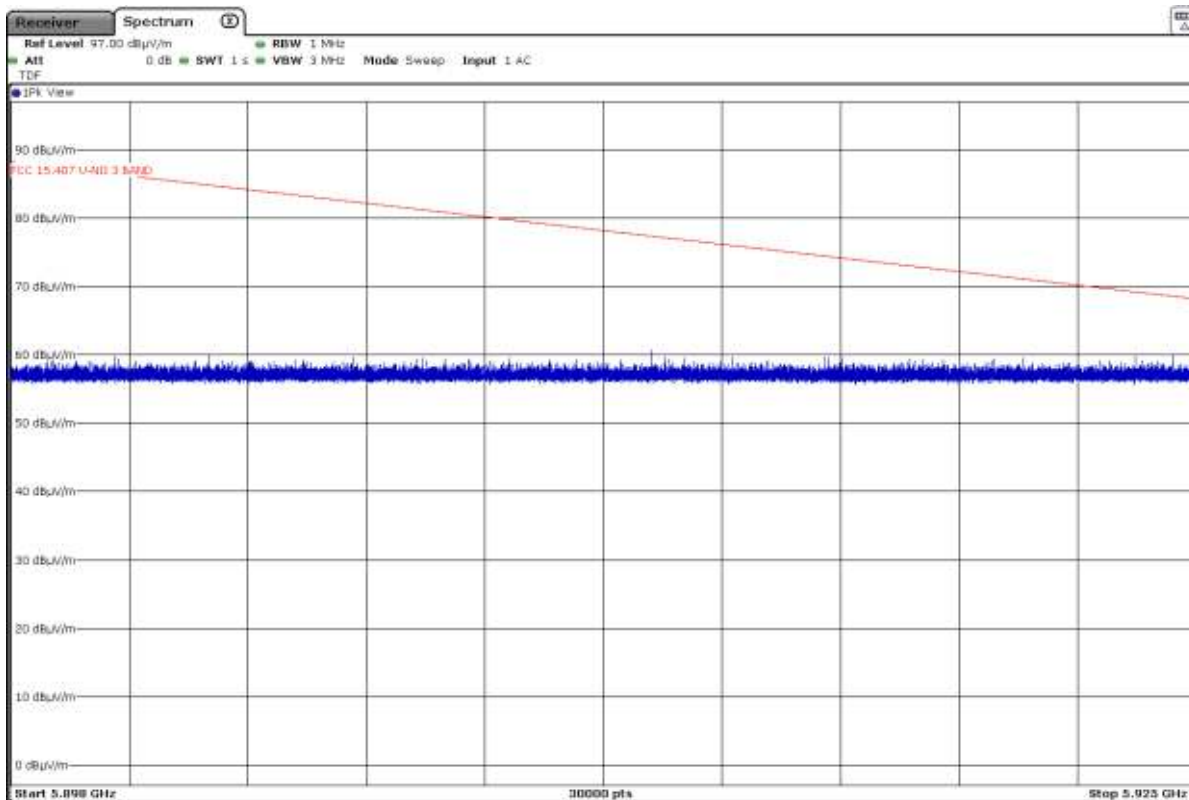


- High Channel 159 (5795 MHz):

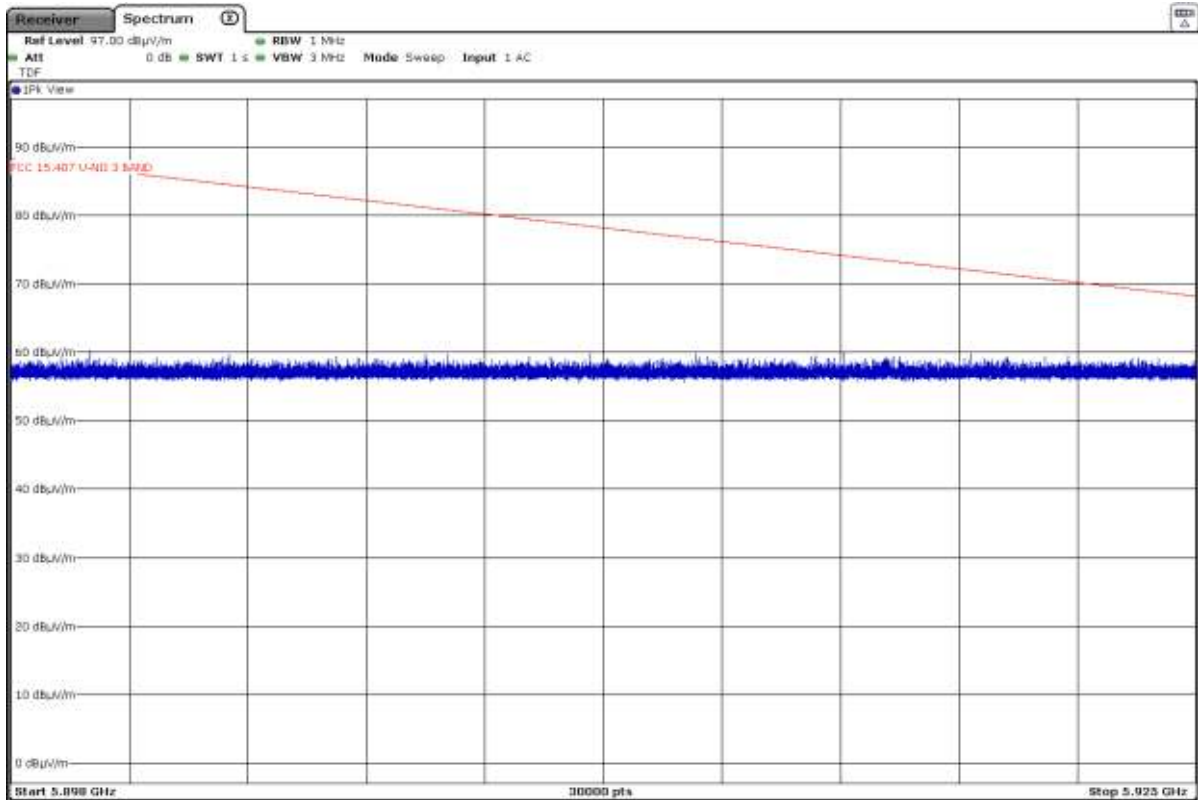


• 802.11 ac40:

**Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz**

- Low Channel 149 (5745 MHz):

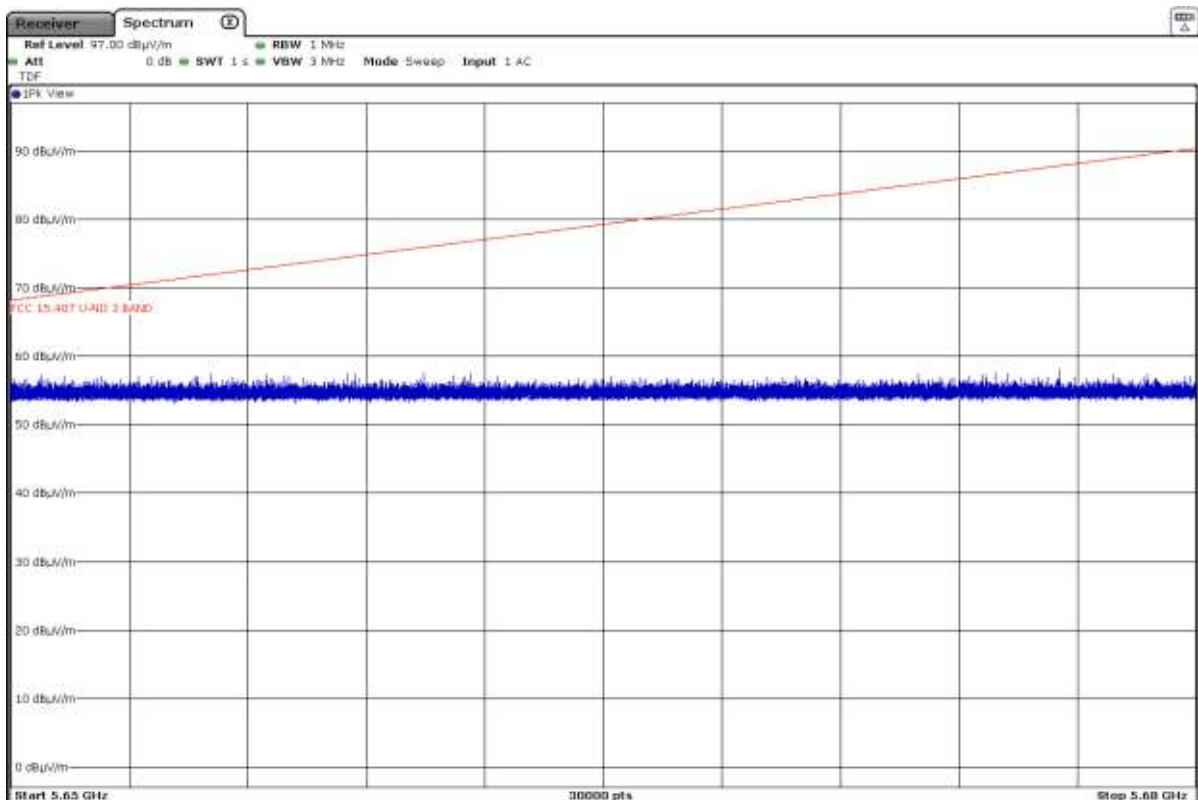


- High Channel 165 (5825 MHz):

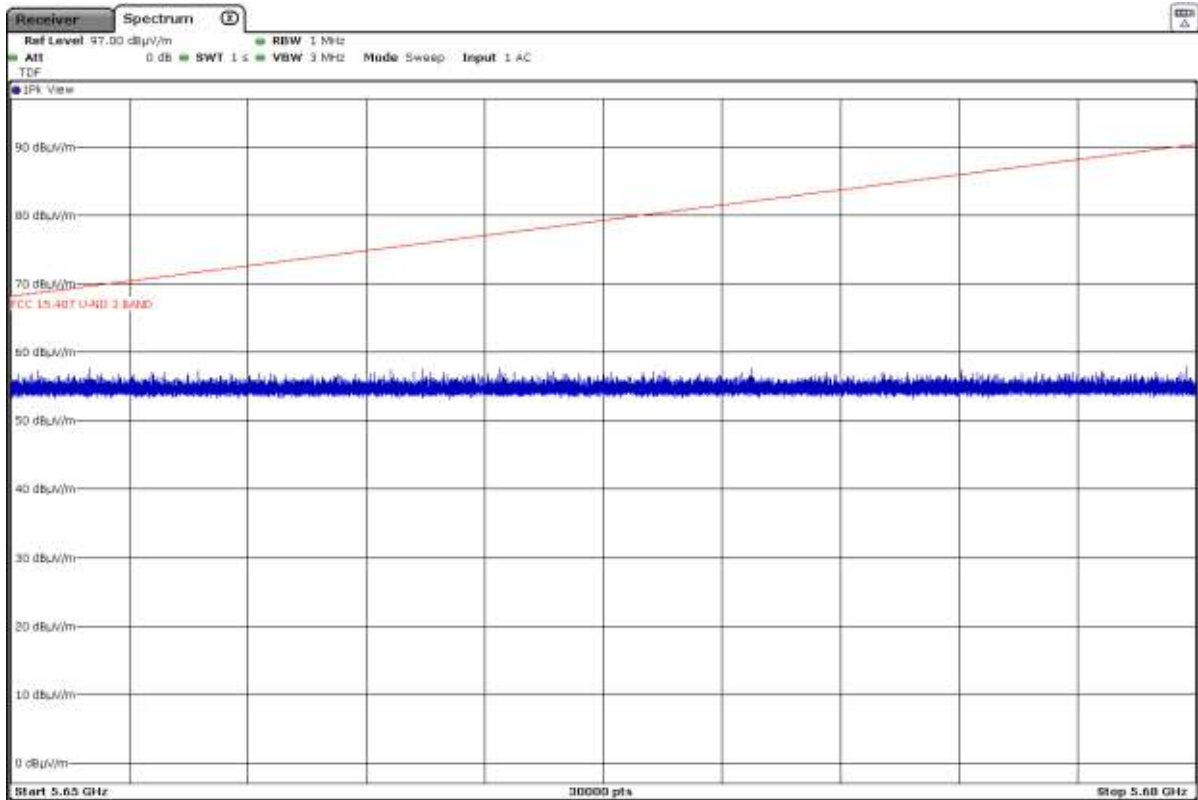


**Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz**

- Low Channel 149 (5745 MHz):

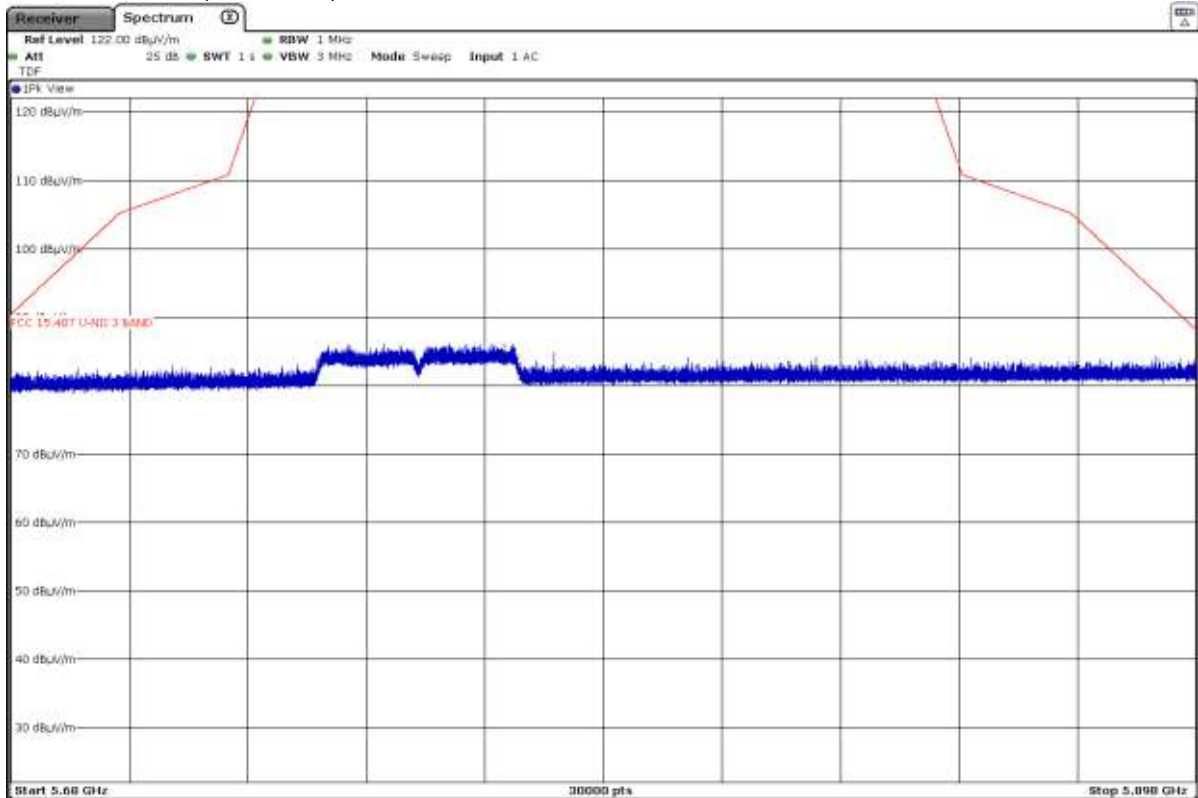


- High Channel 165 (5825MHz):

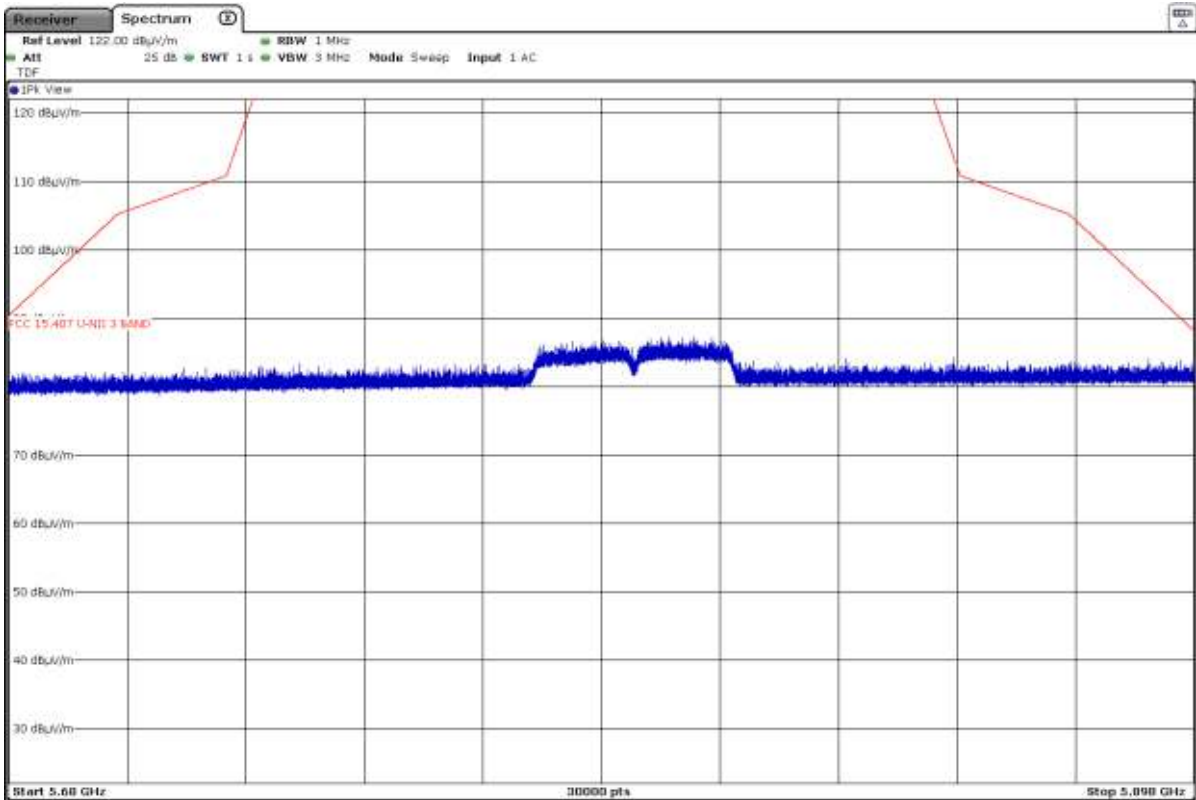


**Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz**

- Low Channel 149 (5745 MHz):

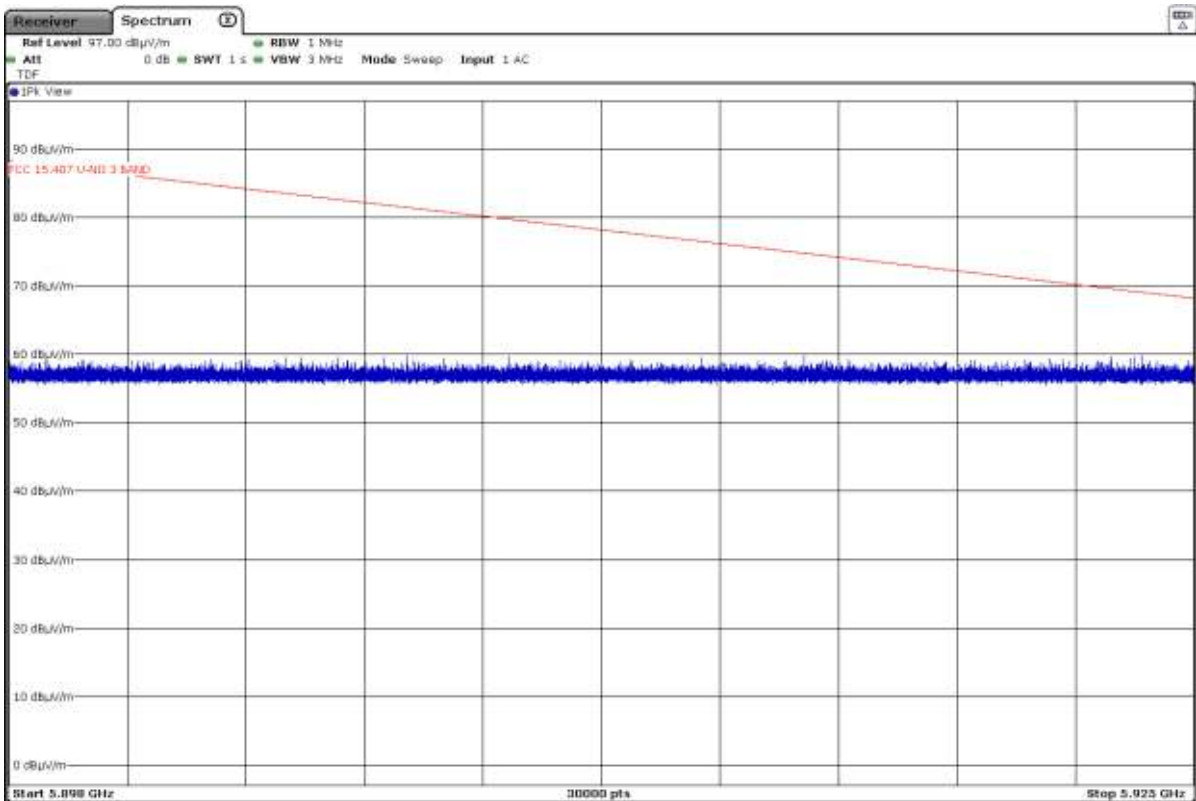


- High Channel 165 (5825 MHz):

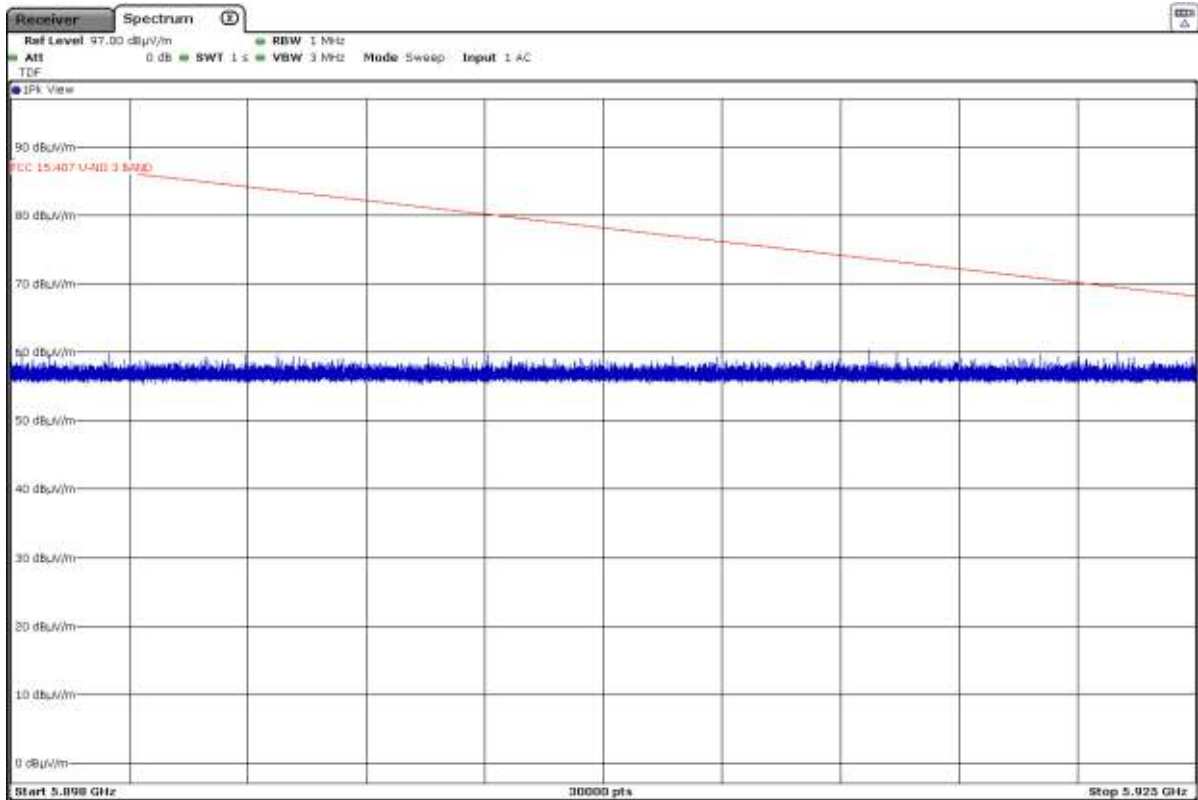

• 802.11 ac80 (VHT80):

**Radiated spurious emissions at band-edges and inside adjacent band 5.65 – 5.68 GHz**


- Middle Channel 155 (5775 MHz):

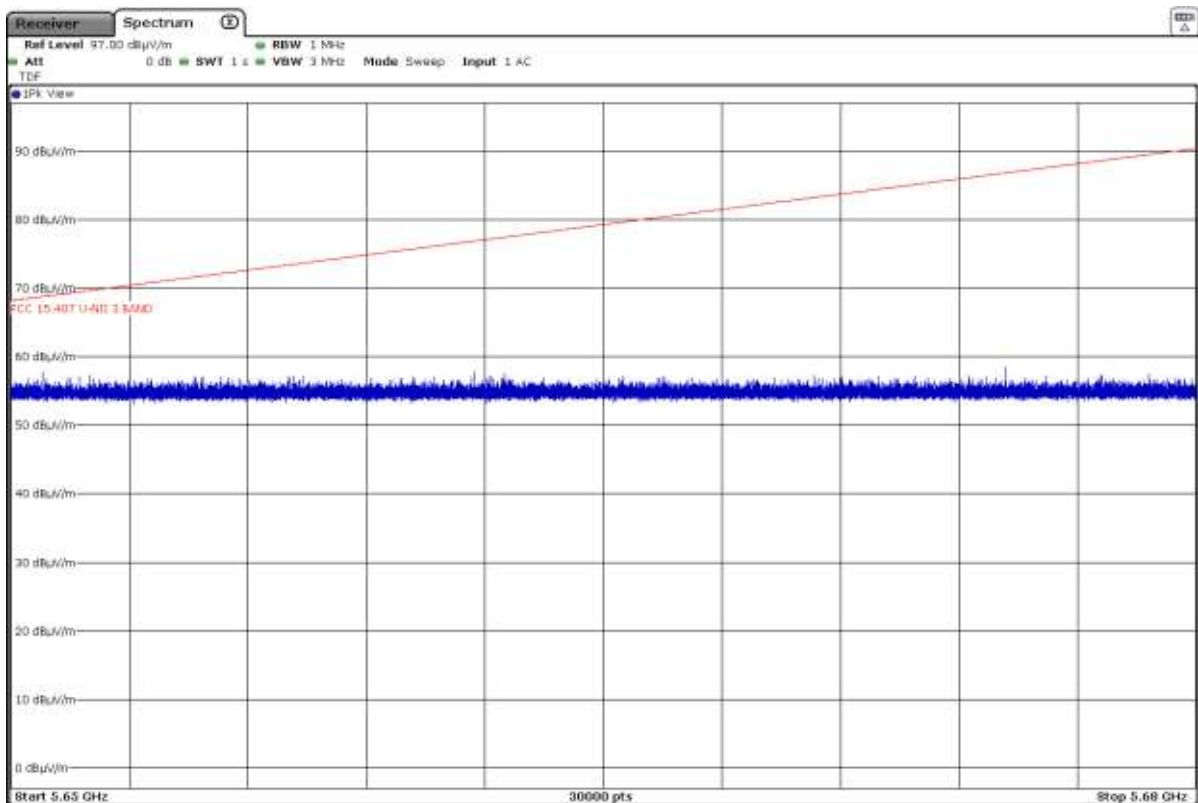



### Radiated spurious emissions at band-edges and inside adjacent band 5.68 – 5.898 GHz

- Middle Channel 155 (5775 MHz):

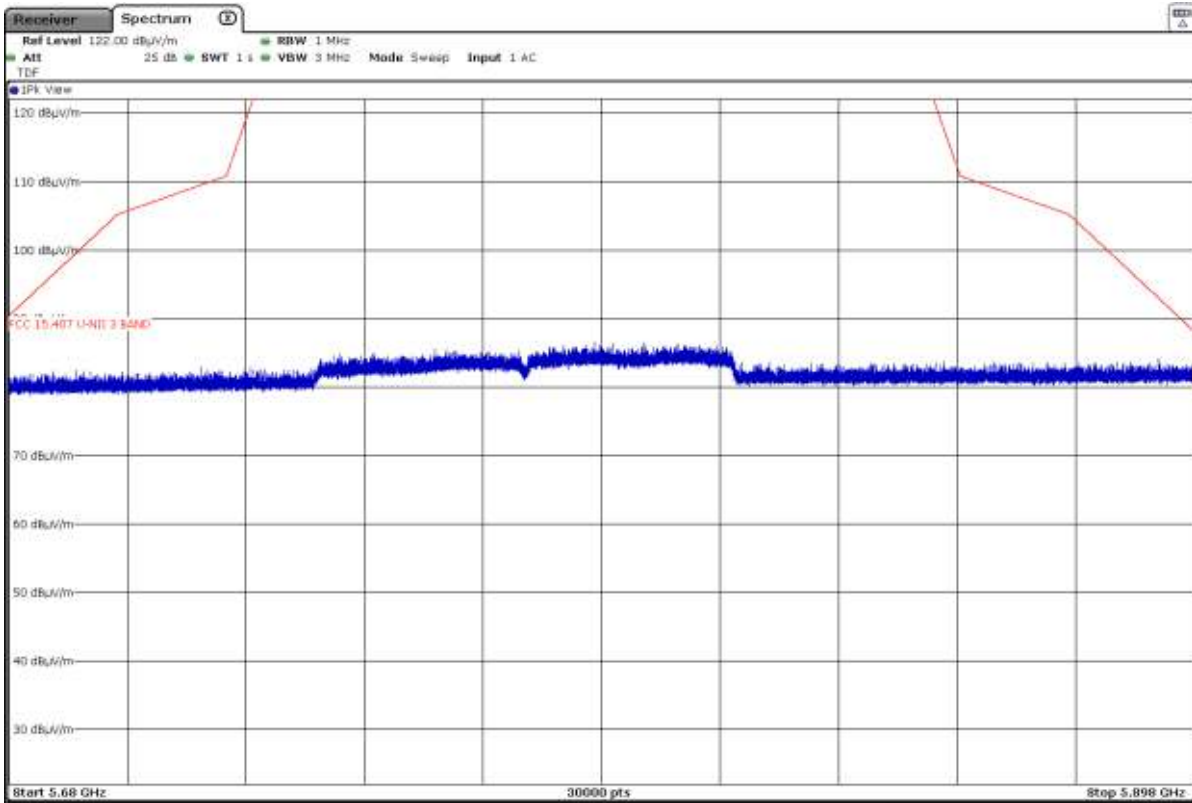

### Radiated spurious emissions at band-edges and inside adjacent band 5.898 – 5.925 GHz

- Middle Channel 155 (5775 MHz):

