



## MET Laboratories, Inc.

*Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

September 28, 2011

JDS Uniphase Corporation  
1 Milestone Center Court  
Germantown, MD 20876

Dear Glenn Gruenberg,

Enclosed is the EMC Wireless test report for compliance testing of the JDS Uniphase Corporation, TB/MTS-5800 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class B Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 8, Dec. 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Roseline Onyeagwu  
Documentation Department

Reference: (\JDS Uniphase Corporation\EMC30639-FCC247 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Cover Page  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

---

## Electromagnetic Compatibility Criteria Test Report

for the

**JDS Uniphase Corporation  
TB/MTS-5800**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class B Digital Devices  
&  
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators

**MET Report: EMC30639-FCC247 Rev. 2**

September 28, 2011

**Prepared For:**

**JDS Uniphase Corporation  
1 Milestone Center Court  
Germantown, MD 20876**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 West Patapsco Avenue  
Baltimore, MD 21230



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Cover Page  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## Electromagnetic Compatibility Criteria Test Report

for the

**JDS Uniphase Corporation  
TB/MTS-5800**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class B Digital Devices  
&  
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators

Jeffrey Pratt  
Electromagnetic Compatibility Lab

Roseline Onyeagwu  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 8, Dec. 2010 under normal use and maintenance.

Shawn McMillen,  
Wireless Manager, Electromagnetic Compatibility Lab



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Report Status  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	May 24, 2011	Initial Issue.
1	August 31, 2011	Revised to reflect engineer corrections.
2	September 28, 2011	Revised to reflect engineer corrections.



## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
A.	Purpose of Test .....	2
B.	Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
A.	Overview.....	4
B.	References.....	5
C.	Test Site .....	5
D.	Description of Test Sample .....	6
E.	Equipment Configuration.....	7
F.	Support Equipment .....	7
G.	Ports and Cabling Information.....	8
H.	Mode of Operation.....	9
I.	Method of Monitoring EUT Operation.....	9
J.	Modifications .....	10
a)	Modifications to EUT .....	10
b)	Modifications to Test Standard.....	10
K.	Disposition of EUT .....	10
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>11</b>
§ 15.107(a) Conducted Emissions Limits.....	12	
§ 15.109(a) Radiated Emissions Limits .....	18	
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>28</b>
§ 15.203 Antenna Requirement .....	29	
§ 15.207(a) Conducted Emissions Limits.....	30	
§ 15.247(a)(1) 20 dB Occupied Bandwidth.....	34	
§ 185.247(a)(1) Average Time of Occupancy (Dwell Time) .....	37	
§ 15.247(a)(1) Number of RF Channels .....	39	
§ 15.247(a)(1) RF Channel Separation .....	40	
§ 15.247(b) Peak Power Output .....	41	
§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	46	
§ 15.247(g)(h) Declaration Statements for FHSS .....	59	
<b>V.</b>	<b>Test Equipment .....</b>	<b>61</b>
<b>VI.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>63</b>
A.	Certification Information .....	64
B.	Label and User's Manual Information .....	68
<b>VII.</b>	<b>ICES-003 Procedural &amp; Labeling Requirements .....</b>	<b>70</b>



## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. EUT Summary Table.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	7
Table 5. Ports and Cabling Information .....	8
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	12
Table 7. Conducted Emissions – Voltage Mains, in DS3 Mode, Phase Line (12 VDC), FCC Limits .....	13
Table 8. Conducted Emissions - Voltage Mains, in DS3 Mode, Neutral Line (12 VDC), FCC Limits .....	14
Table 9. Conducted Emissions - Voltage Mains in DS3 Mode, Phase Line (12 VDC), ICES Limits.....	15
Table 10. Conducted Emissions - Voltage Mains in DS3 Mode, Neutral Line (12 VDC), ICES Limits .....	16
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	18
Table 12. Radiated Emissions Limits, Test Results, DS3 Mode, 30 MHz – 1 GHz, FCC Limits .....	19
Table 13. Radiated Emissions Limits, Test Results, DS3 Mode, Above 1 GHz, FCC Limits .....	21
Table 14. Radiated Emissions Limits, Test Results, DS3 Mode, ICES-003 Limits .....	23
Table 15. Radiated Emissions Limits, Test Results, DS3 Mode, 1 GHz to 3 GHz, ICES-003 Limits .....	25
Table 16. Antenna List .....	29
Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	30
Table 18. Conducted Emissions, 15.207(a), Phase Line, Test Results .....	31
Table 19. Conducted Emissions, 15.207(a), Neutral Line, Test Results .....	32
Table 20. Dwell Time Calculation .....	37
Table 21. Peak Power Output, Test Results .....	42
Table 22. Restricted Bands of Operation.....	46
Table 23. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	47
Table 24. Test Equipment List .....	62



## List of Plots

Plot 1. Conducted Emission, Phase Line Plot, DS3 Mode, FCC Limits .....	13
Plot 2. Conducted Emission, Neutral Line Plot, DS3 Mode, FCC Limits .....	14
Plot 3. Conducted Emission, Phase Line Plot, DS3 Mode, ICES Limits .....	15
Plot 4. Conducted Emission, Neutral Line Plot, DS3 Mode, ICES Limits .....	16
Plot 5. Radiated Emissions, DS3 Mode, 30 MHz - 1 GHz, FCC Limits .....	20
Plot 6. Radiated Emissions, DS3 Mode, Above 1 GHz, FCC Limits .....	22
Plot 7. Radiated Emissions, DS3 Mode, 30 MHz to 1 GHz, ICES-003 Limits .....	24
Plot 8. Radiated Emissions, DS3 Mode 1 GHz to 5 GHz, ICES-003 Limits .....	26
Plot 9. Conducted Emissions, 15.207(a), Phase Line .....	31
Plot 10. Conducted Emissions, 15.207(a), Neutral Line .....	32
Plot 11. 20 dB Occupied Bandwidth, Low Channel .....	35
Plot 12. 20 dB Occupied Bandwidth, Mid Channel .....	35
Plot 13. 20 dB Occupied Bandwidth, High Channel .....	35
Plot 14. 99% Occupied Bandwidth, Low Channel .....	36
Plot 15. 99% Occupied Bandwidth, Mid Channel .....	36
Plot 16. 99% Occupied Bandwidth, High Channel .....	36
Plot 17. Average Time of Occupancy (Dwell Time) – 1 .....	38
Plot 18. Average Time of Occupancy (Dwell Time) – 2 .....	38
Plot 19. Number of RF Channels Plot .....	39
Plot 20. RF Channel Separation Plot .....	40
Plot 21. Peak Power Output, Low Channel .....	43
Plot 22. Peak Power Output, Mid Channel .....	44
Plot 23. Peak Power Output, High Channel .....	45
Plot 24. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz .....	48
Plot 25. Radiated Spurious Emissions, Low Channel, 1 GHz – 3 GHz .....	48
Plot 26. Radiated Spurious Emissions, Low Channel, 3 GHz – 18 GHz .....	48
Plot 27. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5 GHz .....	49
Plot 28. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz .....	49
Plot 29. Radiated Spurious Emissions, Mid Channel, 1 GHz – 3 GHz .....	49
Plot 30. Radiated Spurious Emissions, Mid Channel, 3 GHz – 18 GHz .....	50
Plot 31. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5 GHz .....	50
Plot 32. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz .....	50
Plot 33. Radiated Spurious Emissions, High Channel, 1 GHz – 3 GHz .....	51
Plot 34. Radiated Spurious Emissions, High Channel, 3 GHz – 18 GHz .....	51
Plot 35. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5 GHz .....	51
Plot 36. Radiated Spurious Emissions, Low Channel, Band Edge, Peak .....	52
Plot 37. Radiated Spurious Emissions, Low Channel, Band Edge, Average .....	52
Plot 38. Radiated Spurious Emissions, High Channel, Band Edge, Peak .....	52
Plot 39. Radiated Spurious Emissions, High Channel, Band Edge, Peak, 3m .....	53
Plot 40. Radiated Spurious Emissions, High Channel, Band Edge, Average, 3m .....	53
Plot 41. Radiated Spurious Emissions, High Channel, Band Edge, MarkerDelta, 3m .....	53
Plot 42. Radiated Spurious Emissions, Low Channel, 20 dBc, 1 GHz – 3 GHz .....	54
Plot 43. Radiated Spurious Emissions, Low Channel, 20 dBc, 3 GHz – 18 GHz .....	54
Plot 44. Radiated Spurious Emissions, Low Channel, 20 dBc, 18 GHz – 24.01 GHz .....	54
Plot 45. Radiated Spurious Emissions, Mid Channel, 20 dBc, 1 GHz – 3 GHz .....	55
Plot 46. Radiated Spurious Emissions, Mid Channel, 20 dBc, 3 GHz – 18 GHz .....	55
Plot 47. Radiated Spurious Emissions, Mid Channel, 20 dBc, 18 GHz – 24.41 GHz .....	55
Plot 48. Radiated Spurious Emissions, High Channel, 20 dBc, 1 GHz – 3 GHz .....	56
Plot 49. Radiated Spurious Emissions, High Channel, 20 dBc, 3 GHz – 18 GHz .....	56
Plot 50. Radiated Spurious Emissions, High Channel, 20 dBc, 18 GHz – 24.835 GHz .....	56



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Table of Contents  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003



## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
--	---

## List of Photographs

Photograph 1. Conducted Emissions, Test Setup .....	17
Photograph 2. Radiated Emission, Test Setup, 30 MHz to 1 GHz .....	27
Photograph 3. Radiated Emission, Test Setup, 1 GHz to 5 GHz.....	27
Photograph 4. Conducted Emissions, 15.207(a), Test Setup.....	33
Photograph 5. Radiated Spurious Emissions, Test Setup, Low Frequency .....	57
Photograph 6. Radiated Spurious Emissions, Test Setup, High Frequency .....	57
Photograph 7. Radiated Spurious Emissions, Test Setup .....	58



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
<b>μ</b>	<b>microfarad</b>
<b>μs</b>	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts <b>per meter</b>
<b>VCP</b>	Vertical Coupling Plane



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Executive Summary  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## I. Executive Summary



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the JDS Uniphase Corporation TB/MTS-5800, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TB/MTS-5800. JDS Uniphase Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TB/MTS-5800, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with JDS Uniphase Corporation, purchase order number 294080178. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-210 Issue 8: 2010	Description	Compliance
47 CFR Part 15.107 (a)	ICES-003 Issue 4 February 2004	Conducted Emission Limits for a Class B Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 4 February 2004	Radiated Emission Limits for a Class B Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-Gen(4.6)	20 dB Occupied Bandwidth	Compliant
		99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Average Time of Occupancy (Dwell Time)	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Number of RF Channels	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	RF Channel Separation	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-210(A8.5)	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	Spurious Conducted Emissions	Not Applicable
Title 47 of the CFR, Part 15 §15.247(g) & (h)	RSS-210(A8.1)	Declaration Statements for FHSS	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.5)	Maximum Permissible Exposure (MPE)	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Not Applicable

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## II. Equipment Configuration



## A. Overview

MET Laboratories, Inc. was contracted by JDS Uniphase Corporation to perform testing on the TB/MTS-5800, under JDS Uniphase Corporation's purchase order number 294080178.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the JDS Uniphase Corporation, TB/MTS-5800.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	TB/MTS-5800	
<b>Model(s) Covered:</b>	TB/MTS-5800	
<b>EUT Specifications:</b>	Primary Power: 12V (wall adapter), 7.2V (Battery)	
	FCC ID: WUW-TBMTS5800	
	IC: 9613A – TBMTS5800	
	Type of Modulations:	FHSS
	Equipment Code:	DSS
	Peak RF Output Power:	-5.99 dBm
<b>EUT Frequency Ranges:</b>		2402-2480 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.	
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
<b>Evaluated by:</b>	Shawn McMillen	
<b>Report Date(s):</b>	September 28, 2011	

Table 2. EUT Summary Table



## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>RSS-210, Issue 8, Dec. 2010</b>	Low-power License-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ICES-003, Issue 4 February 2004</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The JDS Uniphase Corporation TB/MTS-5800, Equipment Under Test (EUT), is described as follows:

Multirate handheld network tester used to evaluate telecommunications circuits. These circuits include Ethernet (100Mbps – 10 Gbps), sonet (OC48-OC 192), and PDH (DS1, DS3, STM1, E1, E4). The unit can run on an external power supply or internal battery.

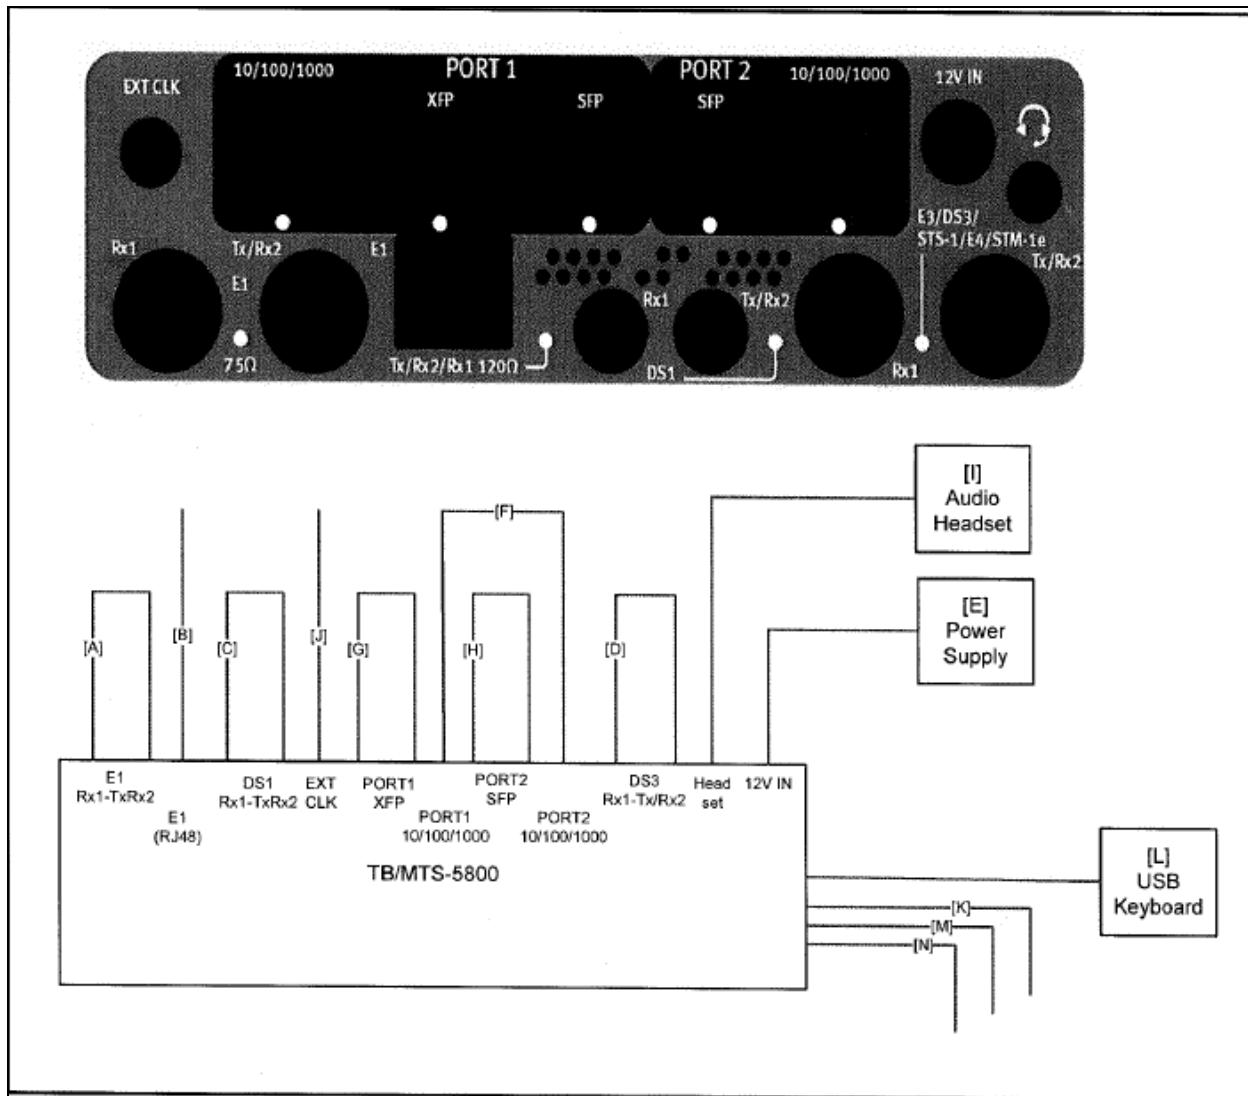


Figure 1. Block Diagram of Test Configuration



## E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Name / Description	Model Number	Serial Number
JDSU TB/MTS-5800 Handheld Network Tester	TB/TBS-5800	PMBT003400013

**Table 4. Equipment Configuration**

## F. Support Equipment

The EUT did not require any support equipment for operation or monitoring.



## G. Ports and Cabling Information

Ref ID	Port name on EUT	Cable Description	Qty	Shielded (Y/N)	Length as tested (m)	Termination Box ID & Port Name	Label Name	Other
A	E1 RX1	75 Ω coax	1	Y	3m	Loopback config	E1 COAX	
	E1 TX/RX2							
B	E1 TX/Rx2/Rx1	RJ48	1	N	4.9m	unterminated	E1 RJ48	
C	DS1 RX1	Twisted pair (100 Ω) Bantam	1	Y	3m	Loopback config	DS3	
	DS1 TX/RX2							
D	E3/DS3/STS-1/E4STM-1e RX1 Tx/Rx2	75 Ω coax	1	Y	3m	Loopback config	E3 COAX	
E	12V IN	12VDC	1	N	1.5m	AC adapter	12V	APS, PA1060-120IA500
F	Port 1 10/100/1000 Port 2 10/100/1000	RJ45	1	N	3m	Loopback config	RJ45 ELEC	
G	Port 1 XFP	Optical Cable (orange)	1	N/A	4.5m	Loopback config	XFP	XFP, Finisar, ??
H	Port 2 SFP	Optical cable (yellow)	1	N/A	3m	Loopback config	SFP	SFP, Finisar, FTLF1721P2BC L
I	Headset (Icon)	Twisted pair	1	N	0.8m	Headset	HEADSET	Stiefel, DY-RH B
J	EXT CLK	50 Ω coax (SMA)		Y	2m	unterminated	EXT CLK	
K	LAN (Icon)	RJ45	1	N	3m	unterminated	RJ45 LAN	
L	USB (icon)	Twisted pair	1	N	1.8m	Keyboard	KEY B	Logitech, 867150-0100
M	USB (icon)	Twisted pair	1	N	1.8m	unterminated	USB	
N	RS-232	RJ45 to DB9	1	N	1.5m	unterminated	RS-232	

Table 5. Ports and Cabling Information



## H. Mode of Operation

The unit supports multiple modes of operation however the SONET and DS3 modes would be the highest operating frequency.

## I. Method of Monitoring EUT Operation

10G SONET (Optical loop back), DS3 (BNC loop back)

Results screen shall indicate "ALL SUMMARY RESULTS OK" during normal error free operation.


Errors are indicated by red screen with the respective error detected shown. Errors can be cleared by "Dual Test view".


To enter the SONET test:

Test-> SONET -> OC-192 ->STS-192c Bulk BERT -> Terminate

To enter the DS3 test:

Test->PDH->DS3 BERT -> Terminate

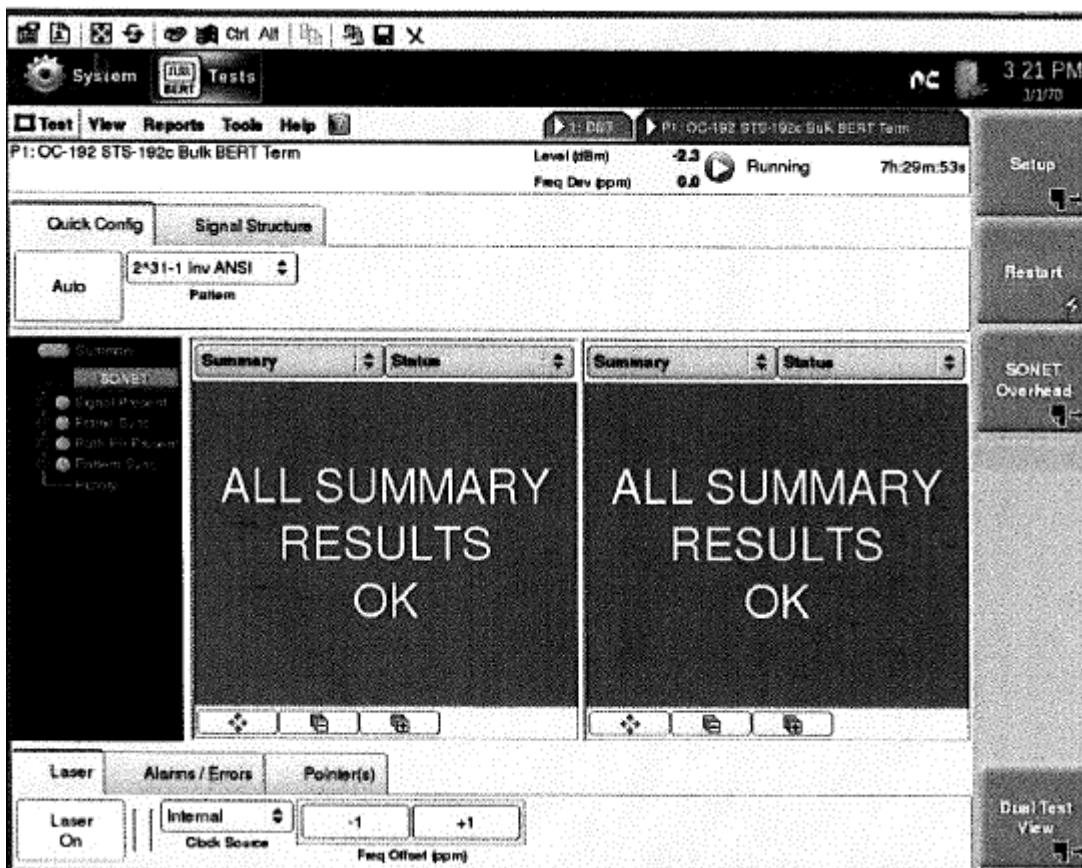

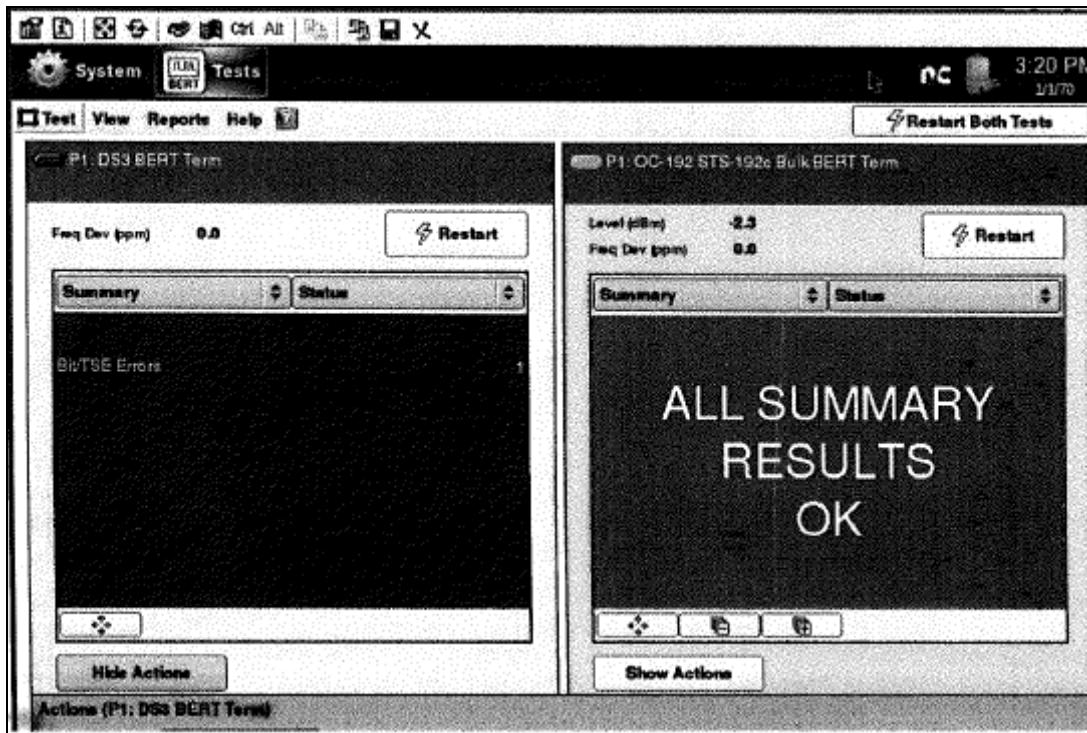

## J. Modifications

- a) **Modifications to EUT**  
No modifications were made to the EUT.
- b) **Modifications to Test Standard**  
No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to JDS Uniphase Corporation upon completion of testing.



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

### III. Electromagnetic Compatibility Criteria for Unintentional Radiators



## Electromagnetic Compatibility Criteria

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):**

**15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

**15.207(a)**, Except as shown in paragraphs (b) and (c) of this section\*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 6, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.  
\* -- Limits per Subsection 15.207(a).

**Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:**

The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):**

Jeffrey Pratt


**Test Date(s):**

02/15/11

### Conducted Emissions - Voltage, AC Power, Phase Line 12 VDC)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.15	31.32	0	31.32	66	-34.68	17.75	0	17.75	56	-38.25
0.192	39.97	0.02	39.99	63.95	-23.96	27.46	0.02	27.48	53.95	-26.47
1.575	31.13	0	31.13	56	-24.87	14.3	0	14.3	46	-31.7
1.628	31	0	31	56	-25	14.24	0	14.24	46	-31.76
4.63	36.28	0.04	36.32	56	-19.68	22.07	0.04	22.11	46	-23.89
16.72	41.21	0	41.21	60	-18.79	33.71	0	33.71	50	-16.29

Table 7. Conducted Emissions – Voltage Mains, in DS3 Mode, Phase Line (12 VDC), FCC Limits

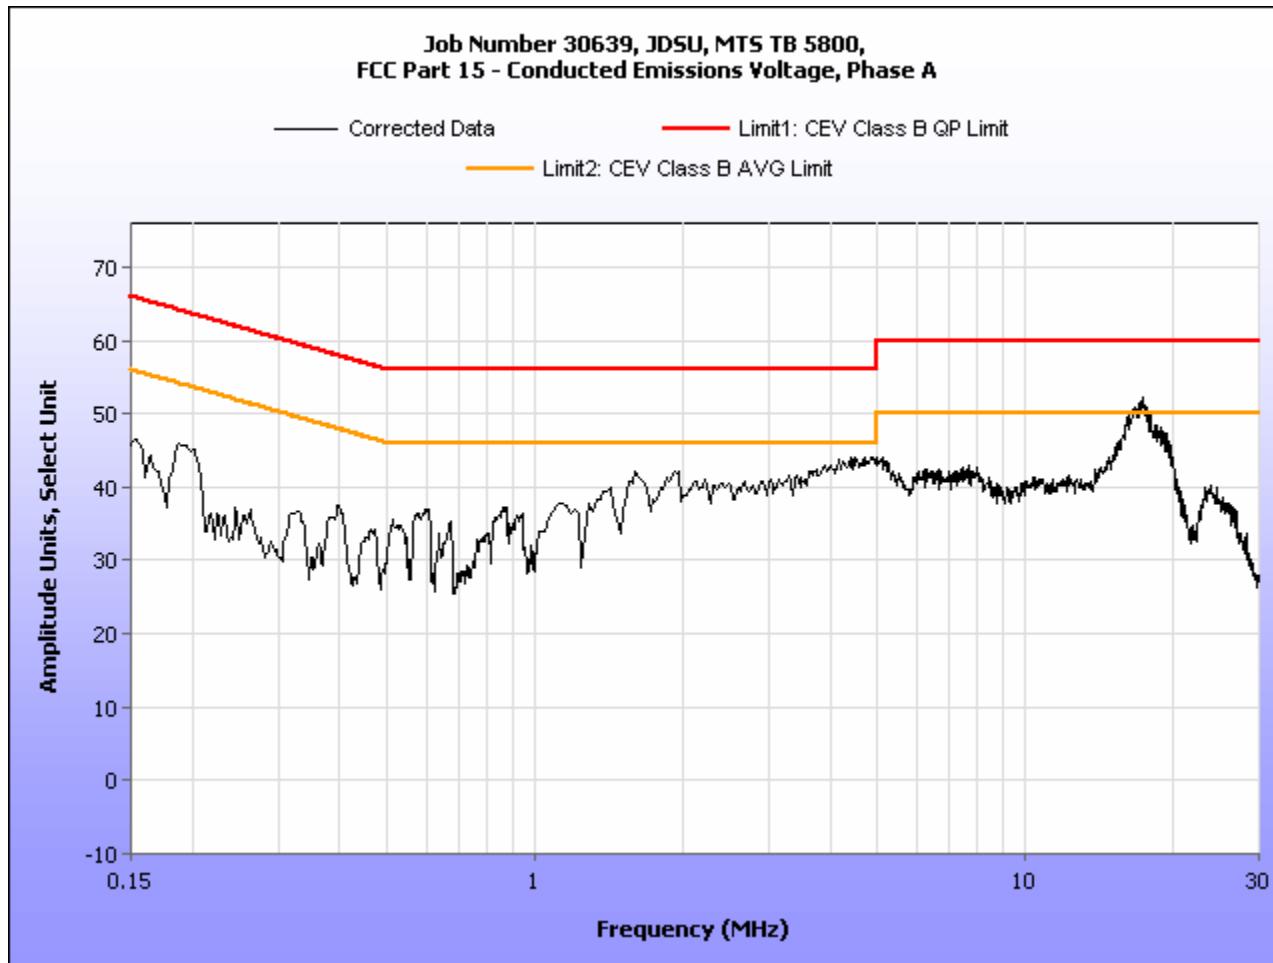


Plot 1. Conducted Emission, Phase Line Plot, DS3 Mode, FCC Limits

### Conducted Emissions - Voltage, AC Power, Neutral Line (12 VDC)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.15	31.96	0	31.96	66	-34.04	23	0	23	56	-33
17.24	42.89	0	42.89	60	-17.11	34.76	0	34.76	50	-15.24
1.677	36.89	0	36.89	56	-19.11	21.11	0	21.11	46	-24.89
1.12	36.65	0	36.65	56	-19.35	18.48	0	18.48	46	-27.52
1.94	35.76	0	35.76	56	-20.24	20.24	0	20.24	46	-25.76
1.79	33.58	0	33.58	56	-22.42	18.24	0	18.24	46	-27.76


Table 8. Conducted Emissions - Voltage Mains, in DS3 Mode, Neutral Line (12 VDC), FCC Limits

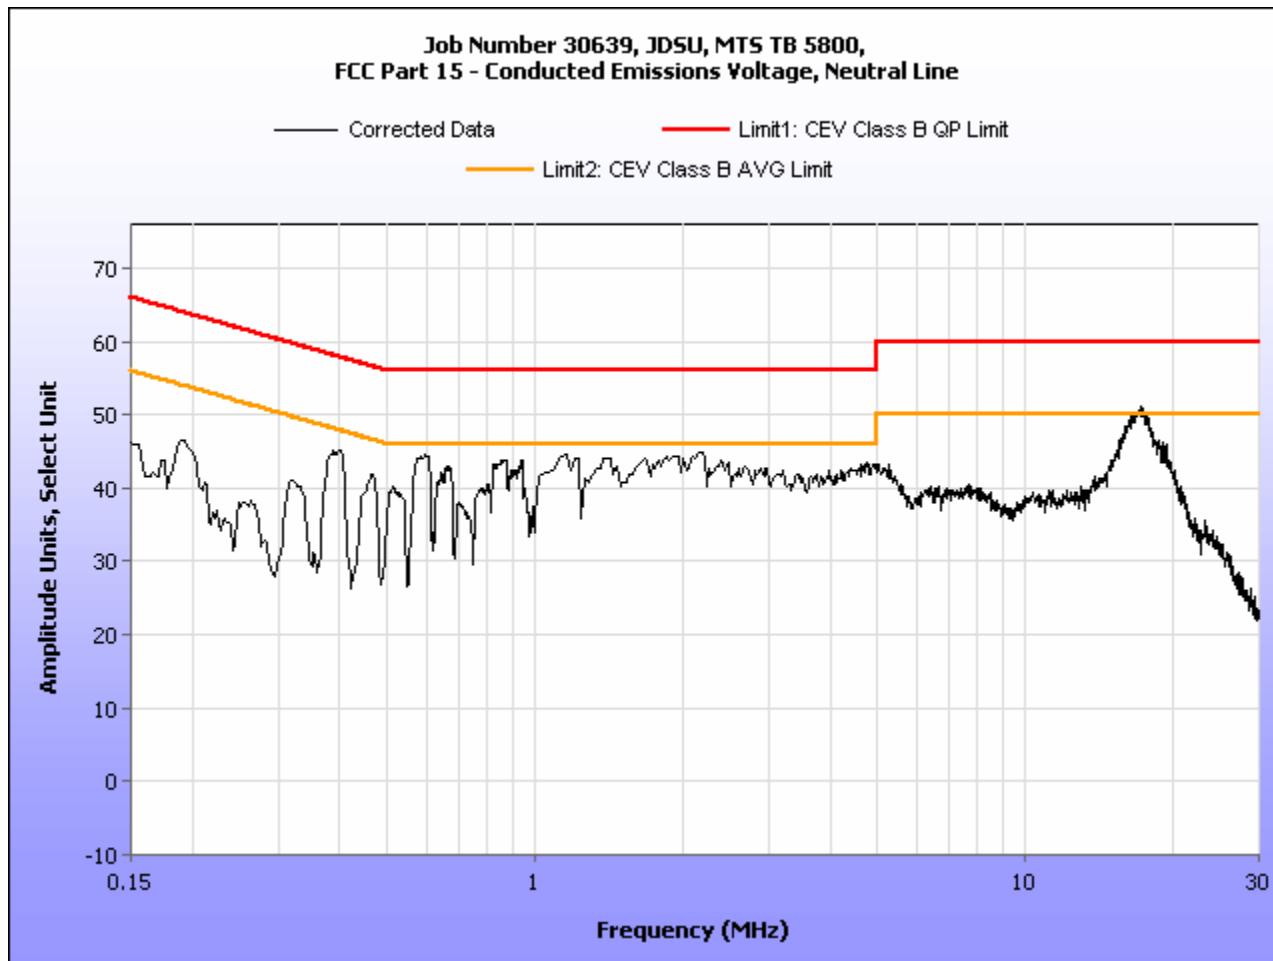

Plot 2. Conducted Emission, Neutral Line Plot, DS3 Mode, FCC Limits

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.15	31.32	0	31.32	66	-34.68	17.75	0	17.75	56	-38.25
16.72	41.21	0	41.21	60	-18.79	33.71	0	33.71	50	-16.29
4.63	36.28	0.04	36.32	56	-19.68	22.07	0.04	22.11	46	-23.89
1.628	31	0	31	56	-25	14.24	0	14.24	46	-31.76
0.192	39.97	0.02	39.99	63.95	-23.96	27.46	0.02	27.48	53.95	-26.47
1.575	31.13	0	31.13	56	-24.87	14.3	0	14.3	46	-31.7


Table 9. Conducted Emissions - Voltage Mains in DS3 Mode, Phase Line (12 VDC), ICES Limits

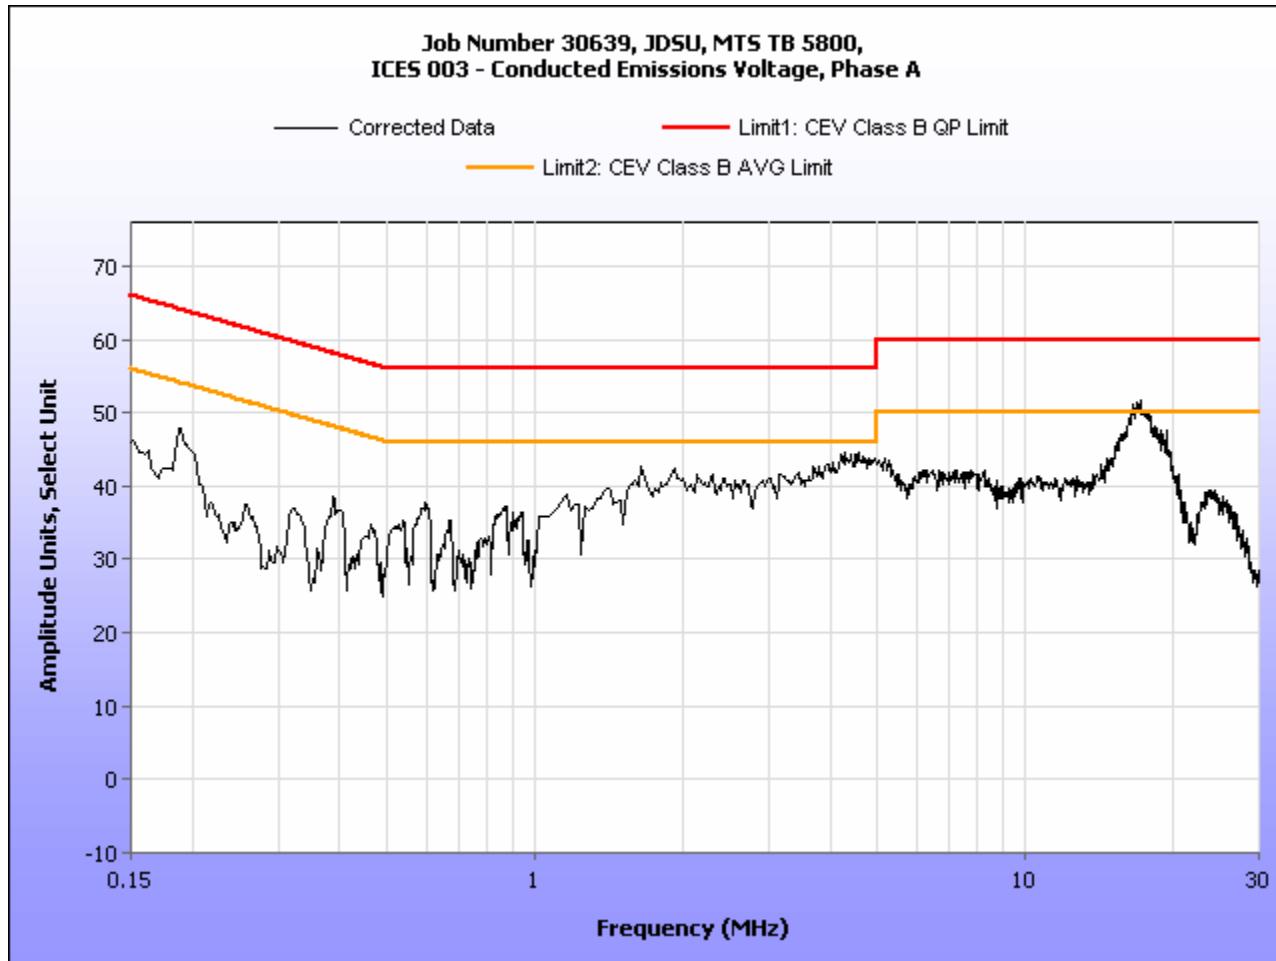

Plot 3. Conducted Emission, Phase Line Plot, DS3 Mode, ICES Limits

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.15	31.96	0	31.96	66	-34.04	23	0	23	56	-33
17.24	42.89	0	42.89	60	-17.11	34.76	0	34.76	50	-15.24
1.677	36.89	0	36.89	56	-19.11	21.11	0	21.11	46	-24.89
1.12	36.65	0	36.65	56	-19.35	18.48	0	18.48	46	-27.52
1.94	35.76	0	35.76	56	-20.24	20.24	0	20.24	46	-25.76
1.79	33.58	0	33.58	56	-22.42	18.24	0	18.24	46	-27.76

Table 10. Conducted Emissions - Voltage Mains in DS3 Mode, Neutral Line (12 VDC), ICES Limits

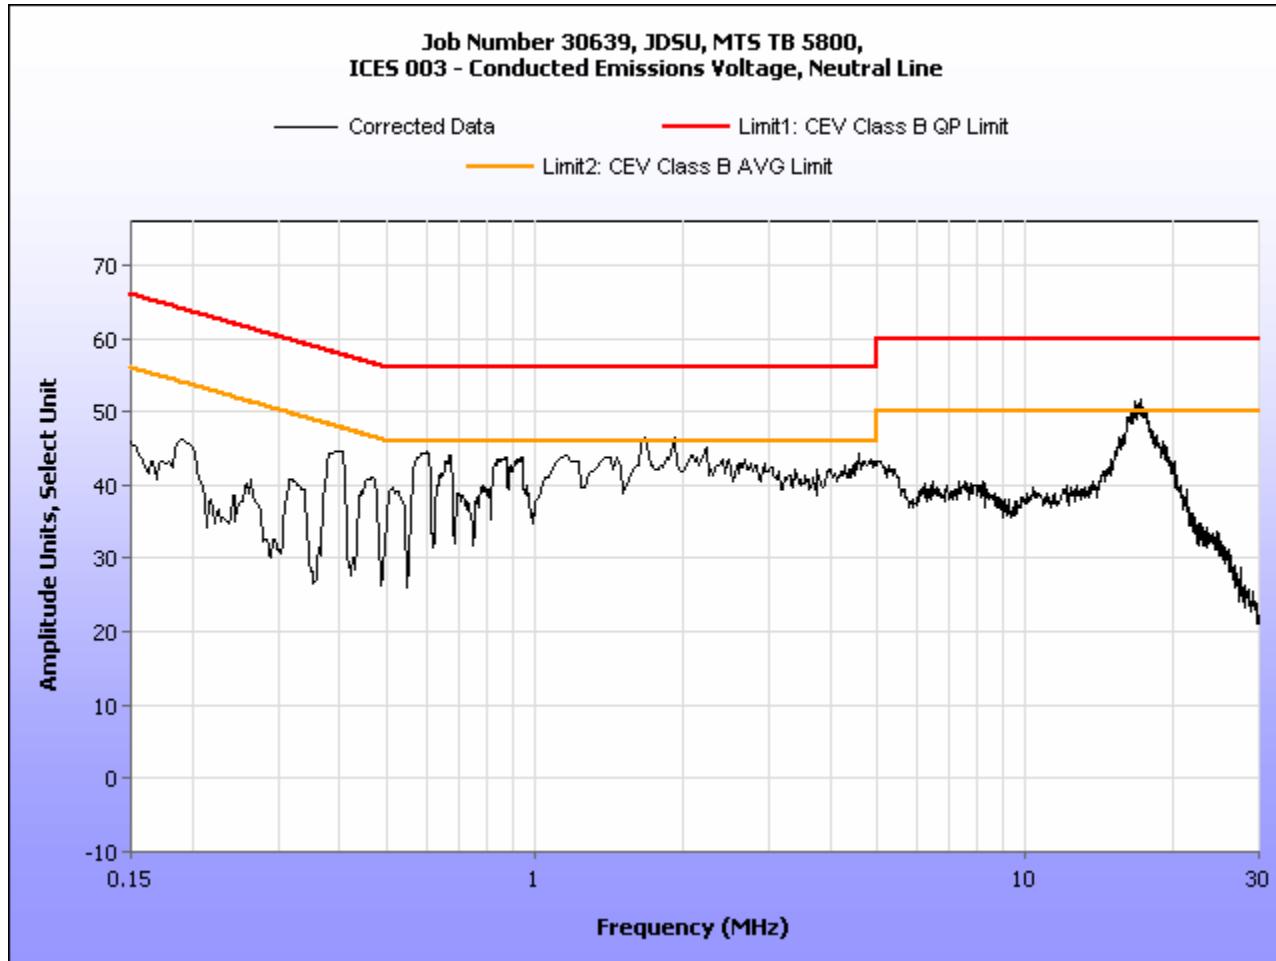


Plot 4. Conducted Emission, Neutral Line Plot, DS3 Mode, ICES Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## Conducted Emission Limits Test Setup

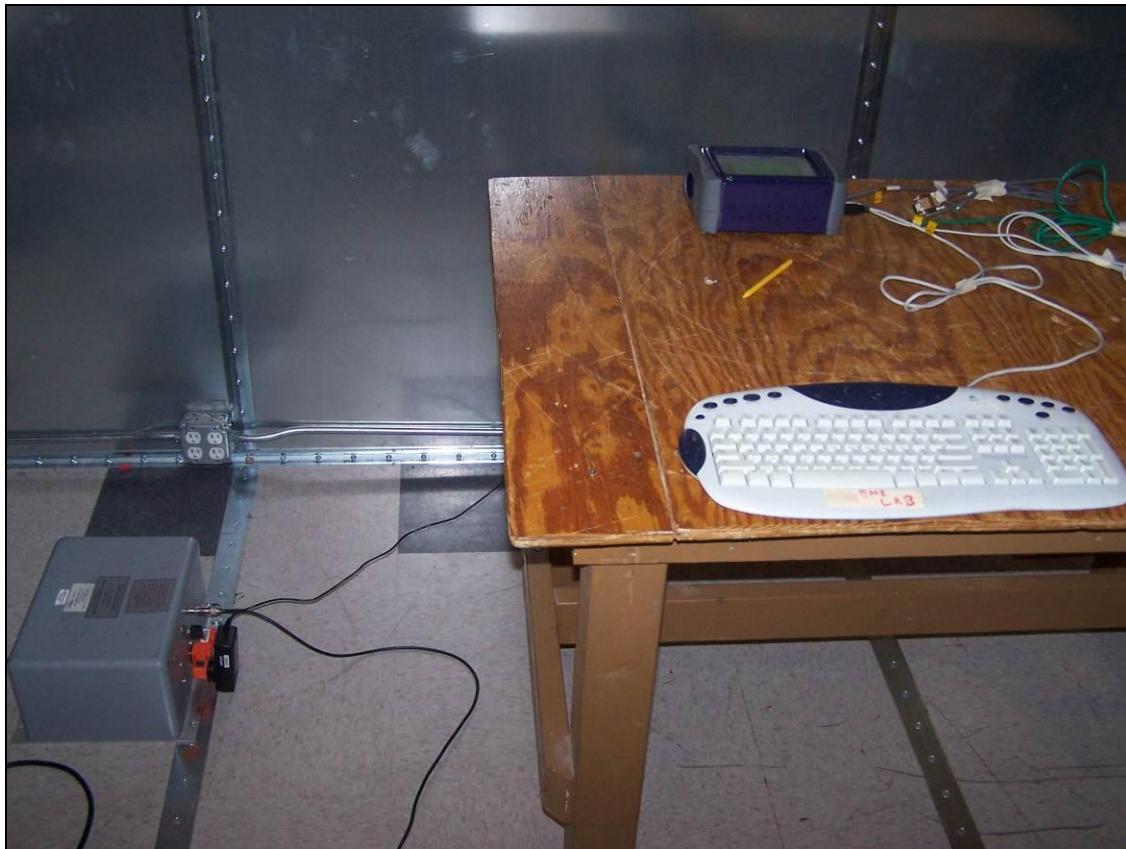

Photograph 1. Conducted Emissions, Test Setup



## Radiated Emission Limits

### § 15.109 Radiated Emissions Limits

**Test Requirement(s):**

**15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:**

The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 02/15/11 to 02/17/11



## Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
46.829089	71	H	1.00	9.58	9.80	0.23	0.00	19.61	40.00	-20.39
46.829089	182	V	1.08	22.17	9.80	0.23	0.00	32.20	40.00	-7.80
189.99506	11	H	1.76	25.68	11.50	0.23	0.00	37.41	43.50	-6.09
189.99506	212	V	1.02	17.37	11.50	0.23	0.00	29.10	43.50	-14.40
600.01335	25	H	1.32	17.47	19.50	1.17	0.00	38.14	46.00	-7.86
600.01335	331	V	1.01	20.94	19.50	1.17	0.00	41.61	46.00	-4.39
227.83967	133	H	1.46	10.76	11.61	0.26	0.00	22.63	46.00	-23.37
227.83967	296	V	1.06	8.89	11.61	0.26	0.00	20.76	46.00	-25.24
199.8998	288	H	1.70	12.27	12.99	0.23	0.00	25.49	43.50	-18.01
199.8998	16	V	1.01	12.83	12.99	0.23	0.00	26.05	43.50	-17.45
164.23103	342	H	1.29	10.06	12.65	0.23	0.00	22.94	43.50	-20.56
164.23103	10	V	1.12	10.05	12.65	0.23	0.00	22.93	43.50	-20.57

Table 12. Radiated Emissions Limits, Test Results, DS3 Mode, 30 MHz – 1 GHz, FCC Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

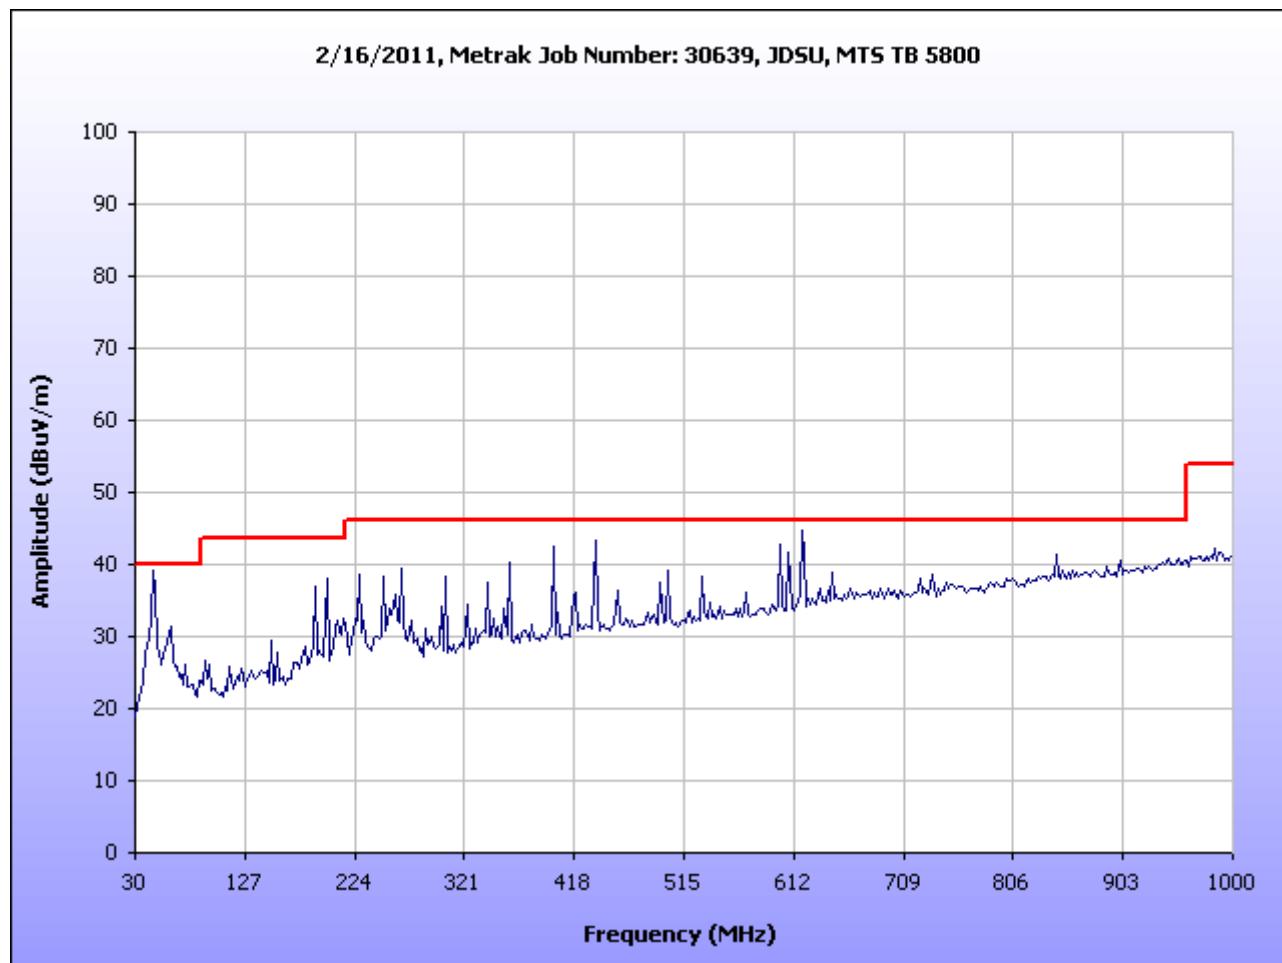

Plot 5. Radiated Emissions, DS3 Mode, 30 MHz - 1 GHz, FCC Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## Radiated Emissions Limits Test Results, Class B


Frequency (GHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.208	86.1	H	101.73	39.91	28.80	32.71	9.54	26.46	54.00	-27.54
1.208	325.9	V	100.08	37.94	28.41	32.71	9.54	24.10	54.00	-29.90
2.649	188	H	103.73	33.18	32.88	29.01	9.54	27.51	54.00	-26.49
2.649	357.3	V	102.21	39.63	32.77	29.01	9.54	33.85	54.00	-20.15
2	233.4	H	101.69	34.93	31.68	29.83	9.54	27.24	54.00	-26.76
2	118.7	V	100.91	38.19	31.71	29.83	9.54	30.53	54.00	-23.47
1.029	0	H	100.47	35.29	27.24	33.70	9.54	19.29	54.00	-34.71
1.029	7.4	V	107.34	38.42	27.49	33.70	9.54	22.67	54.00	-31.33
1.118	201.3	H	119.30	35.37	27.45	33.25	9.54	20.03	54.00	-33.97
1.118	355.7	V	100.82	36.24	27.27	33.25	9.54	20.72	54.00	-33.28
1.252	177.8	H	108.34	41.21	29.10	32.58	9.54	28.19	54.00	-25.81
1.252	217.5	V	101.26	35.85	28.92	32.58	9.54	22.65	54.00	-31.35

Table 13. Radiated Emissions Limits, Test Results, DS3 Mode, Above 1 GHz, FCC Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

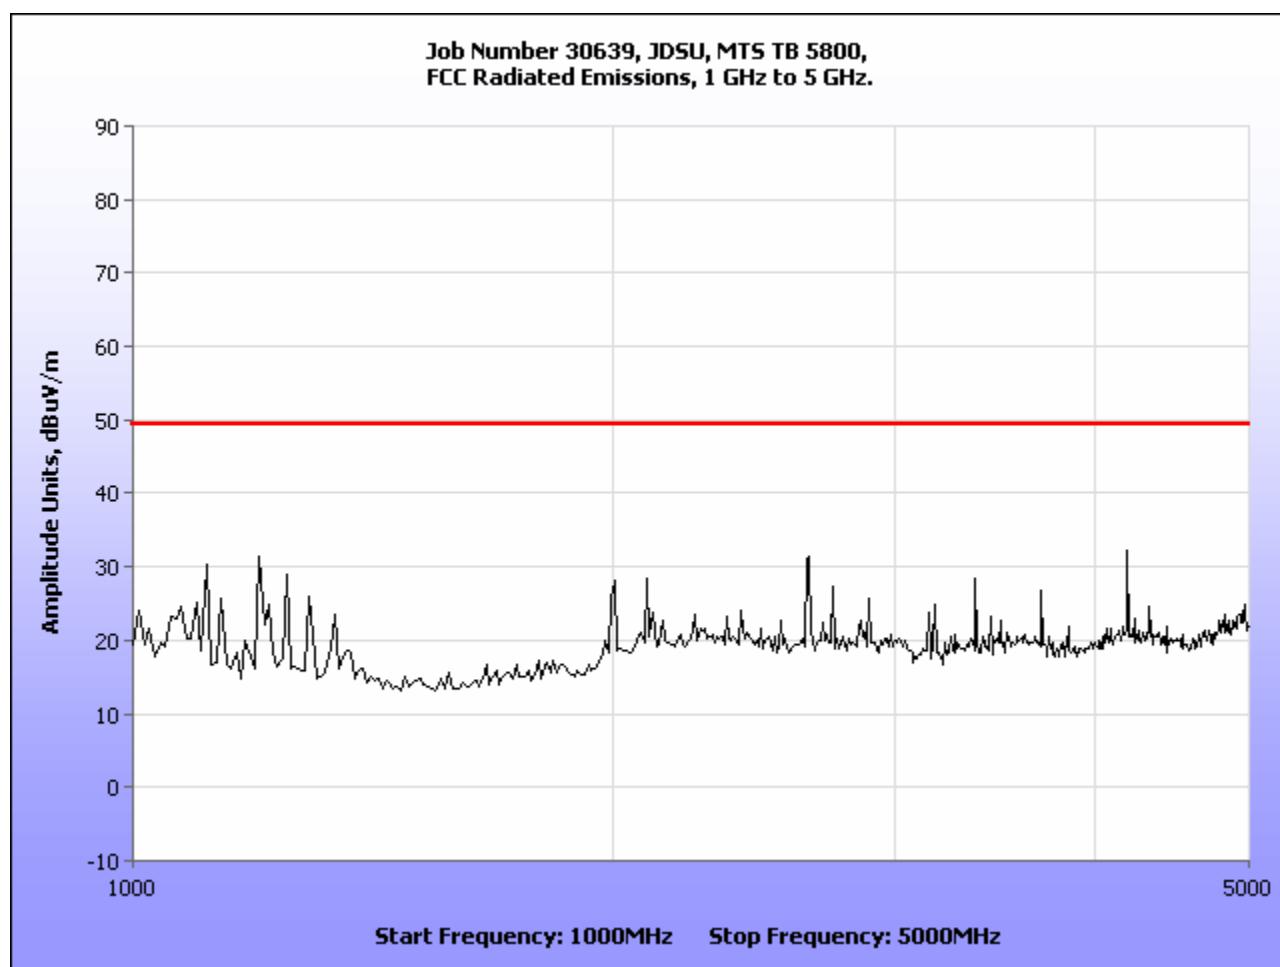

**Plot 6. Radiated Emissions, DS3 Mode, Above 1 GHz, FCC Limits**



## Radiated Emissions Limits Test Results, Class B


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
189.99506	11	H	1.76	25.68	11.50	0.23	10.46	26.95	30.00	-3.05
189.99506	212	V	1.02	17.37	11.50	0.23	10.46	18.64	30.00	-11.36
46.829089	71	H	1.00	9.58	9.80	0.23	10.46	9.15	30.00	-20.85
46.829089	182	V	1.08	22.17	9.80	0.23	10.46	21.74	30.00	-8.26
600.01335	25	H	1.32	17.47	19.50	1.17	10.46	27.68	37.00	-9.32
600.01335	331	V	1.01	20.94	19.50	1.17	10.46	31.15	37.00	-5.85
227.83967	133	H	1.46	10.76	11.61	0.26	10.46	12.17	30.00	-17.83
227.83967	296	V	1.06	8.89	11.61	0.26	10.46	10.30	30.00	-19.70
199.8998	288	H	1.70	12.27	12.99	0.23	10.46	15.03	30.00	-14.97
199.8998	16	V	1.01	12.83	12.99	0.23	10.46	15.59	30.00	-14.41
164.23103	342	H	1.29	10.06	12.65	0.23	10.46	12.48	30.00	-17.52
164.23103	10	V	1.12	10.05	12.65	0.23	10.46	12.47	30.00	-17.53

Table 14. Radiated Emissions Limits, Test Results, DS3 Mode, ICES-003 Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

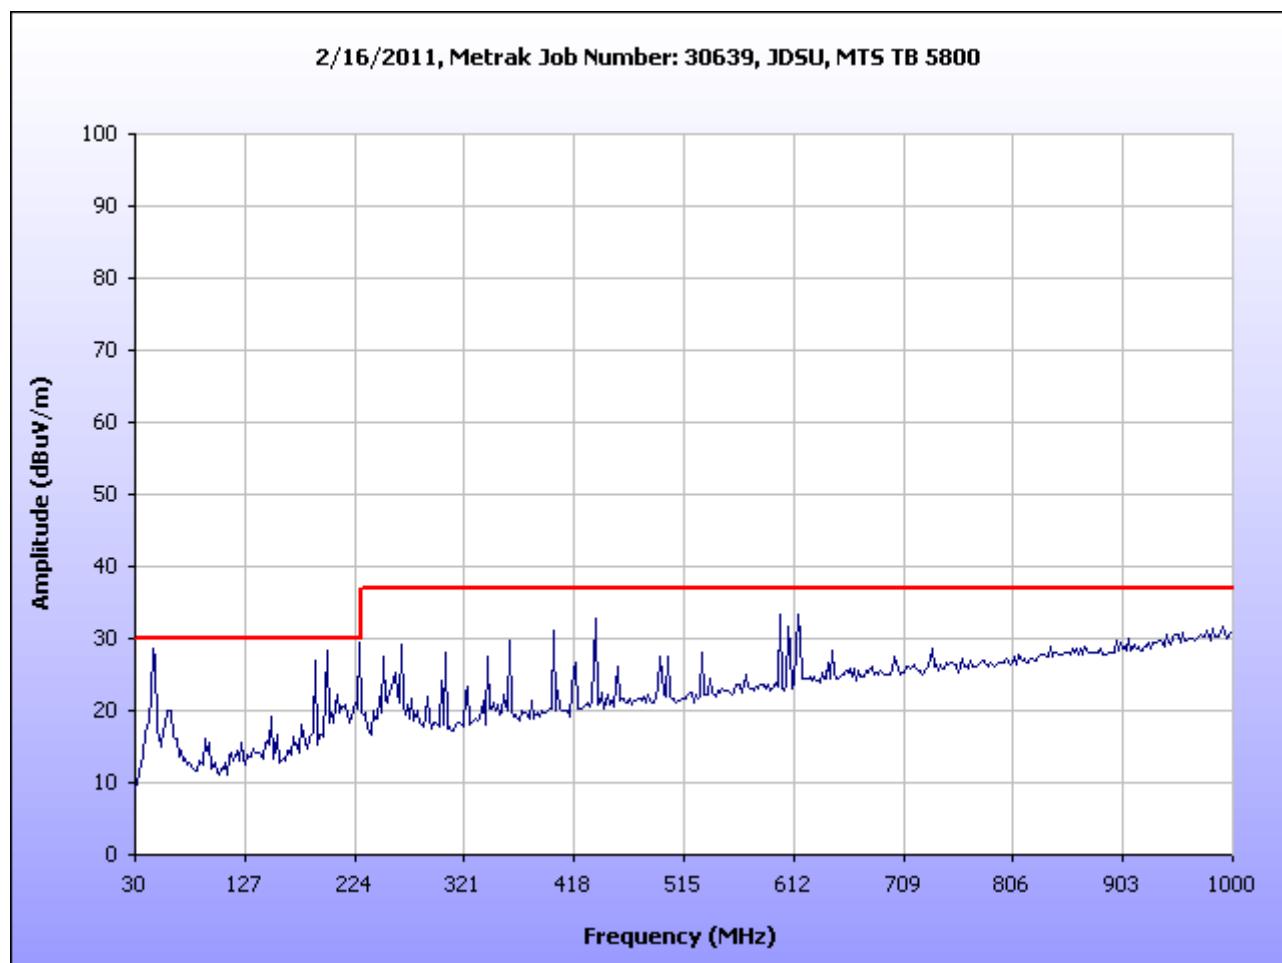

Plot 7. Radiated Emissions, DS3 Mode, 30 MHz to 1 GHz, ICES-003 Limits



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003


Frequency (GHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	#REF!	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1.208	86.1	H	101.73	39.91	28.80	32.71	9.54	26.46	54.00	-27.54
1.208	325.9	V	100.08	37.94	28.41	32.71	9.54	24.10	54.00	-29.90
2.649	188	H	103.73	33.18	32.88	29.01	9.54	27.51	54.00	-26.49
2.649	357.3	V	102.21	39.63	32.77	29.01	9.54	33.85	54.00	-20.15
2	233.4	H	101.69	34.93	31.68	29.83	9.54	27.24	54.00	-26.76
2	118.7	V	100.91	38.19	31.71	29.83	9.54	30.53	54.00	-23.47
1.029	0	H	100.47	35.29	27.24	33.70	9.54	19.29	54.00	-34.71
1.029	7.4	V	107.34	38.42	27.49	33.70	9.54	22.67	54.00	-31.33
1.118	201.3	H	119.30	35.37	27.45	33.25	9.54	20.03	54.00	-33.97
1.118	355.7	V	100.82	36.24	27.27	33.25	9.54	20.72	54.00	-33.28
1.252	177.8	H	108.34	41.21	29.10	32.58	9.54	28.19	54.00	-25.81
1.252	217.5	V	101.26	35.85	28.92	32.58	9.54	22.65	54.00	-31.35

Table 15. Radiated Emissions Limits, Test Results, DS3 Mode, 1 GHz to 3 GHz, ICES-003 Limits




JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

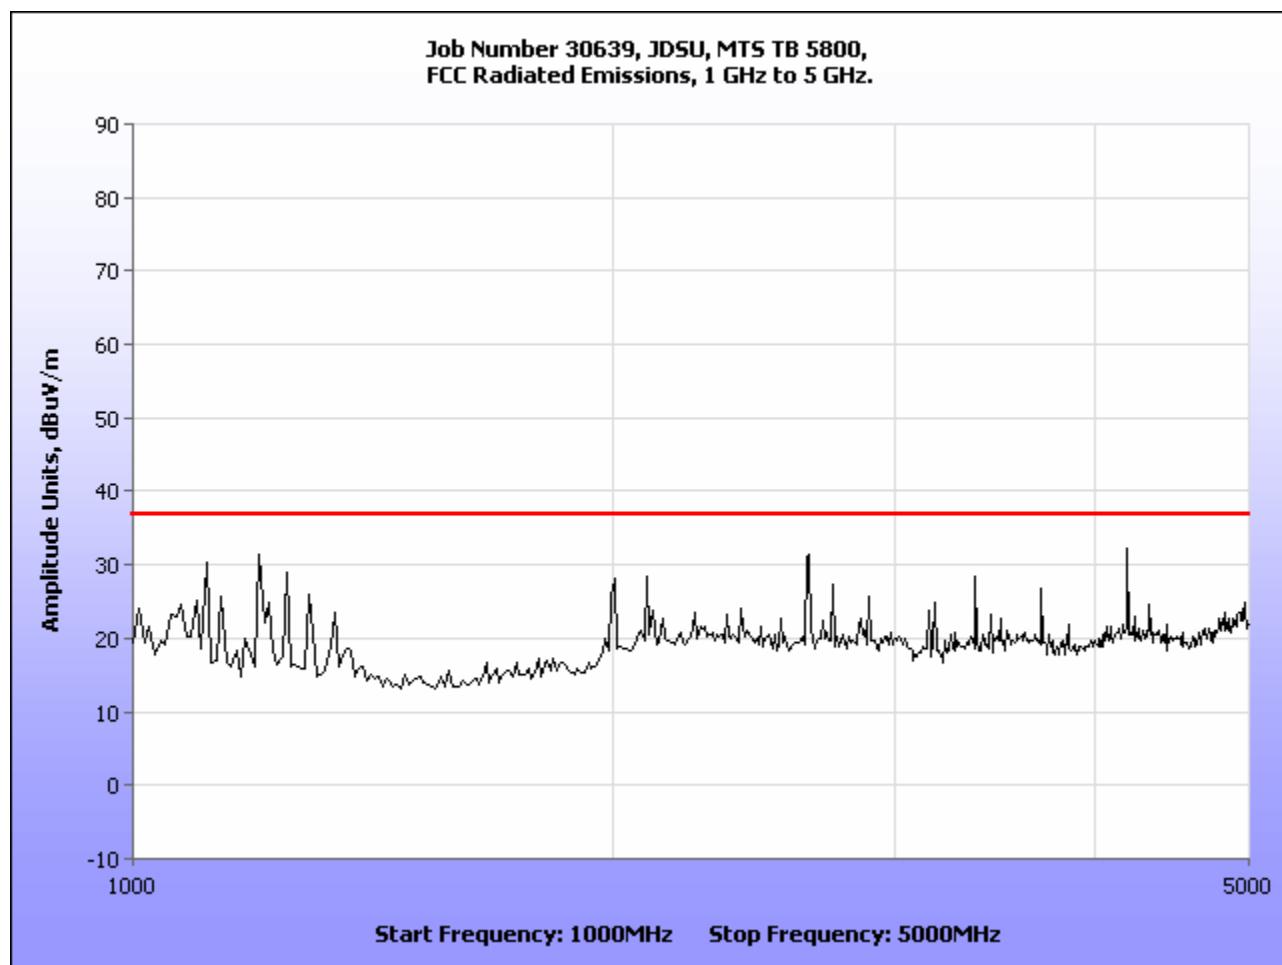


Plot 8. Radiated Emissions, DS3 Mode 1 GHz to 5 GHz, ICES-003 Limits

## Radiated Emission Limits Test Setup

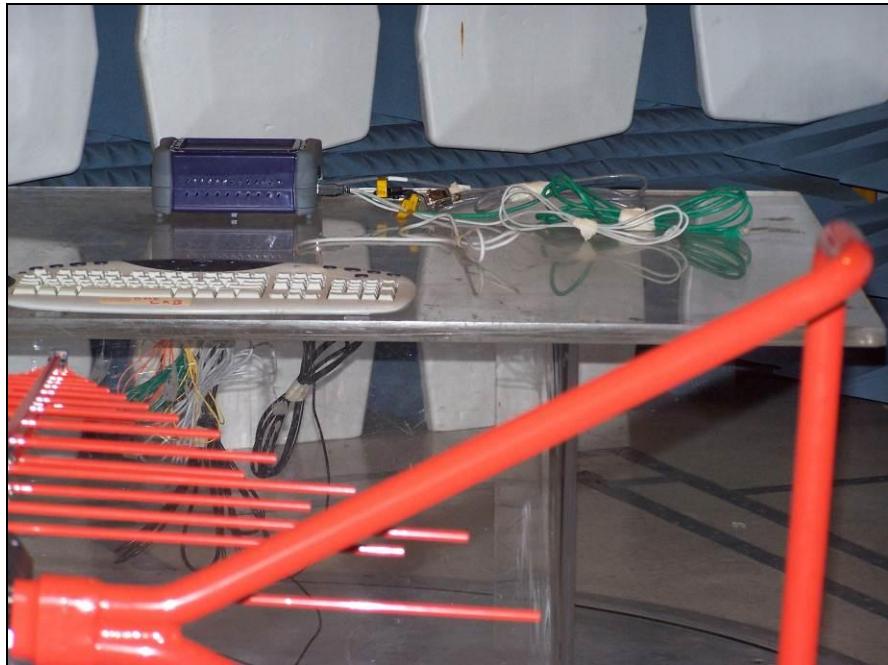

Photograph 2. Radiated Emission, Test Setup, 30 MHz to 1 GHz

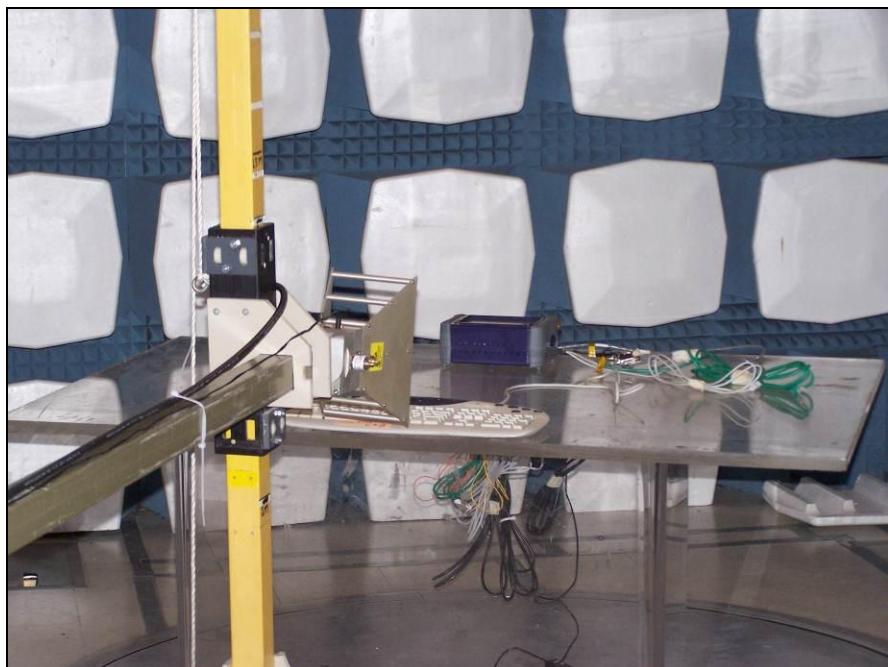

Photograph 3. Radiated Emission, Test Setup, 1 GHz to 5 GHz

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT as tested is compliant the criteria of §15.203. The antenna is permanently attached to the unit.

**Test Engineer(s):** Jeffrey Pratt**Test Date(s):** 04/22/11

Gain (dBi)	Type	Model	Manufacturer
2.57	Chip	BlueCore-6 ROM QFN	CSR

**Table 16. Antenna List**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):**

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15 - 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:**

The EUT was compliant with this requirement.

**Test Engineer(s):**

Jeffrey Pratt


**Test Date(s):**

04/06/11

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.19	46.58	0	46.58	64.04	-17.46	41.11	0	41.11	54.04	-12.93
0.39	44.63	0.02	44.65	58.06	-13.41	40.13	0.02	40.15	48.06	-7.91
5	41.03	0.29	41.32	56	-14.68	28.92	0.29	29.21	46	-16.79
13.66	40.02	0.45	40.47	60	-19.53	30.86	0.45	31.31	50	-18.69
15.89	43.85	0.47	44.32	60	-15.68	34.76	0.47	35.23	50	-14.77
23.81	39.74	0.61	40.35	60	-19.65	34.03	0.61	34.64	50	-15.36

Table 18. Conducted Emissions, 15.207(a), Phase Line, Test Results

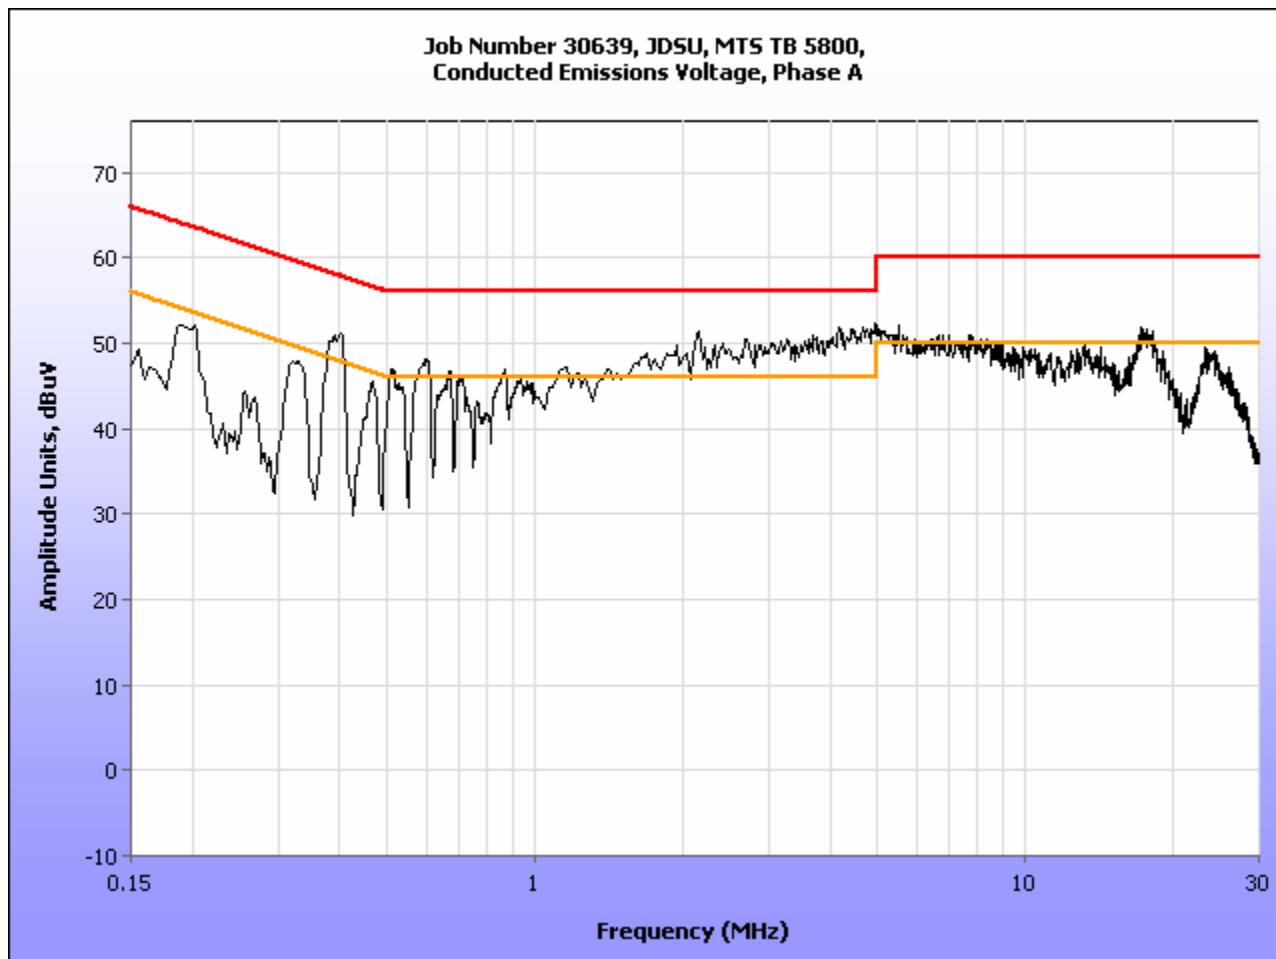


Plot 9. Conducted Emissions, 15.207(a), Phase Line

### 15.207(a) Conducted Emissions Test Results


Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
15.52	43.88	0.47	44.35	60	-15.65	38.18	0.47	38.65	50	-11.35
5.44	41.87	0.33	42.2	60	-17.8	28.28	0.33	28.61	50	-21.39
2.19	41.02	0.16	41.18	56	-14.82	26.79	0.16	26.95	46	-19.05
15.84	43.68	0.47	44.15	60	-15.85	38.03	0.47	38.5	50	-11.5
23.63	37.62	0.6	38.22	60	-21.78	31.89	0.6	32.49	50	-17.51
13.28	44.06	0.44	44.5	60	-15.5	40.36	0.44	40.8	50	-9.2

Table 19. Conducted Emissions, 15.207(a), Neutral Line, Test Results

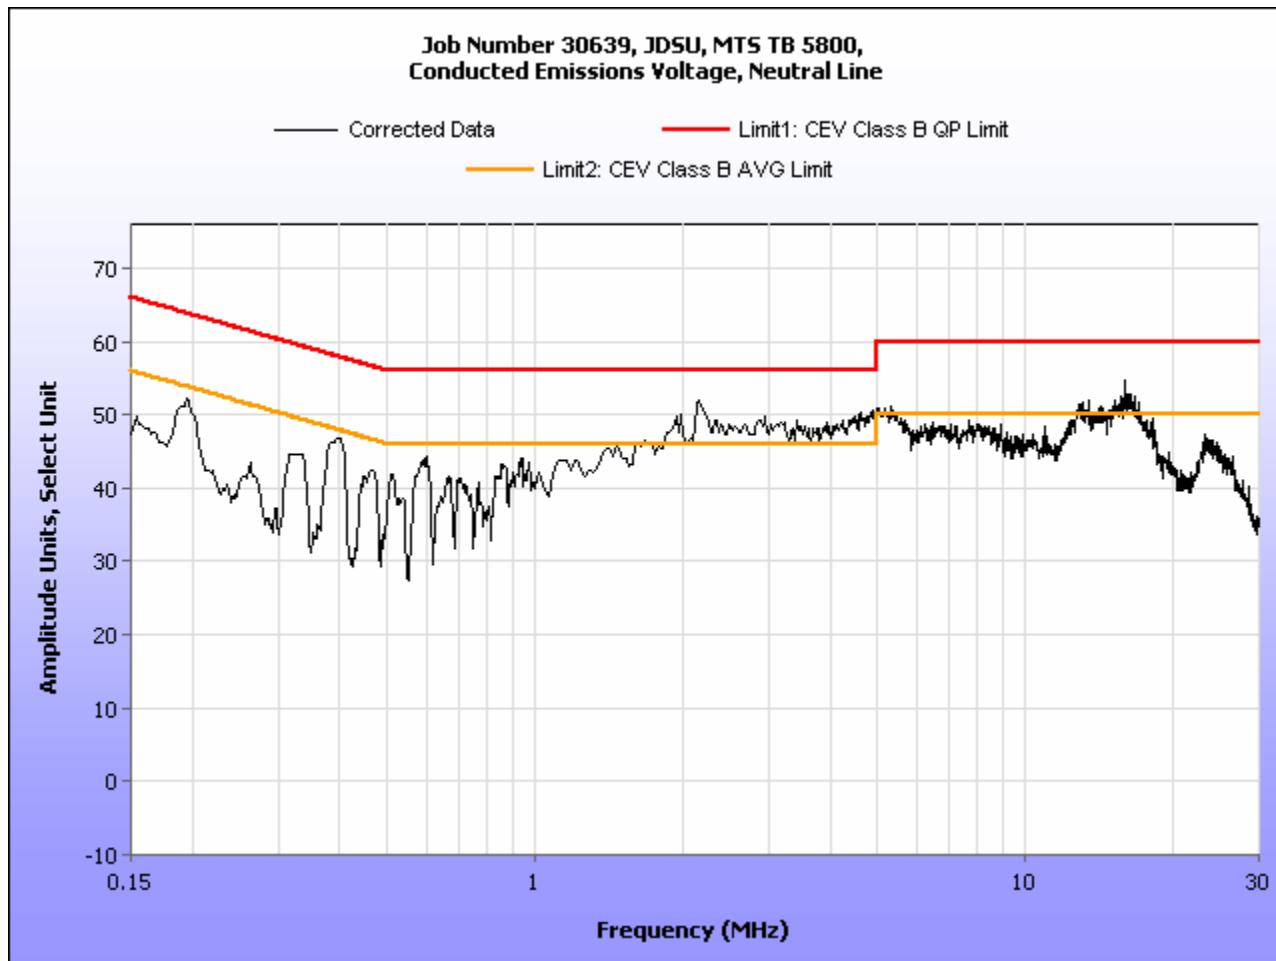

Plot 10. Conducted Emissions, 15.207(a), Neutral Line

**15.207(a) Conducted Emissions Test Setup Photo**

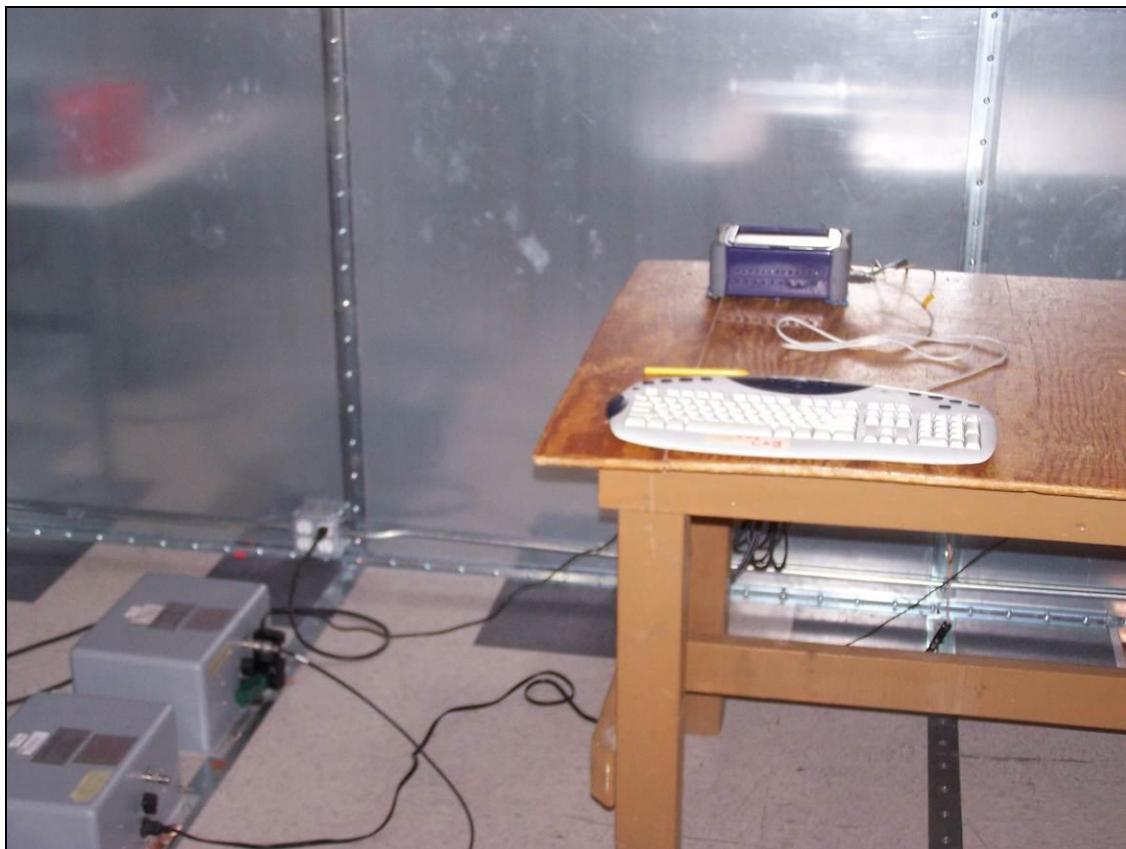

**Photograph 4. Conducted Emissions, 15.207(a), Test Setup**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1) 20 dB Occupied Bandwidth

**Test Requirements:** **§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. For DTS, the minimum 6 dB bandwidth shall be at least 500 kHz. For frequency hopping systems, the EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


**Test Procedure:** The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth. The 20 dB bandwidth was measured and recorded.

**Test Results** The EUT was compliant with § 15.247 (a)(2).


**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 04/13/11 to 04/18/11


## Occupied Bandwidth Test Results

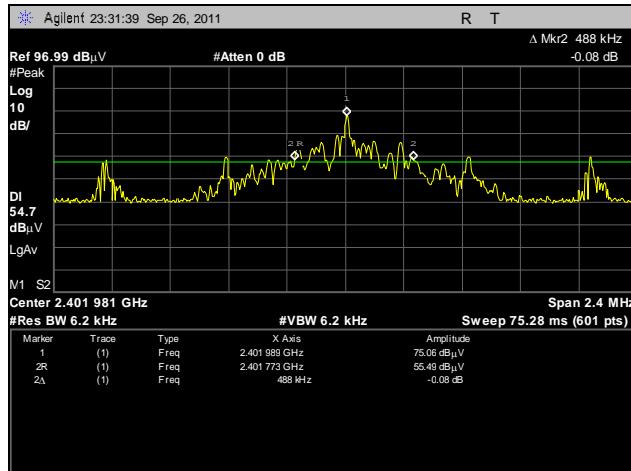


Plot 11. 20 dB Occupied Bandwidth, Low Channel

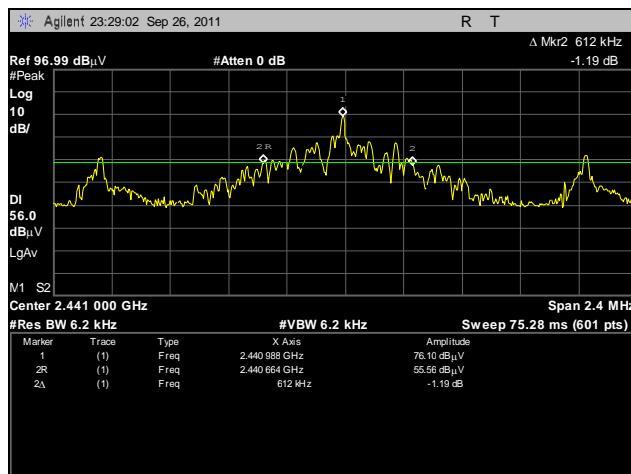

Plot 12. 20 dB Occupied Bandwidth, Mid Channel

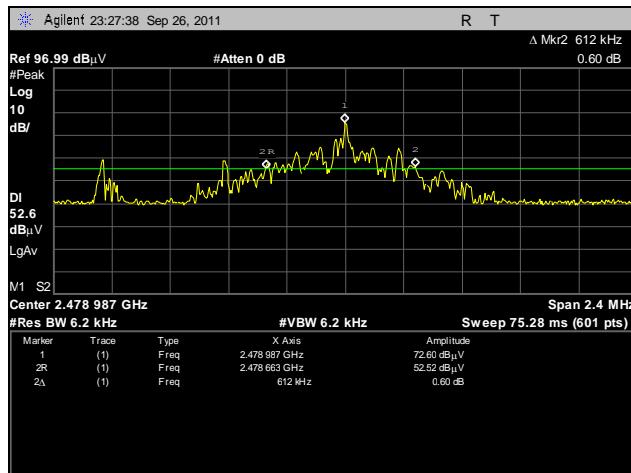


Plot 13. 20 dB Occupied Bandwidth, High Channel

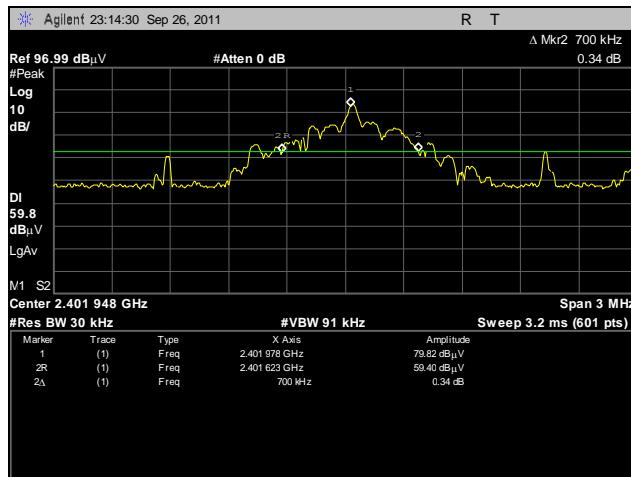

Plot 14. 99% Occupied Bandwidth, Low Channel



Plot 15. 99% Occupied Bandwidth, Mid Channel

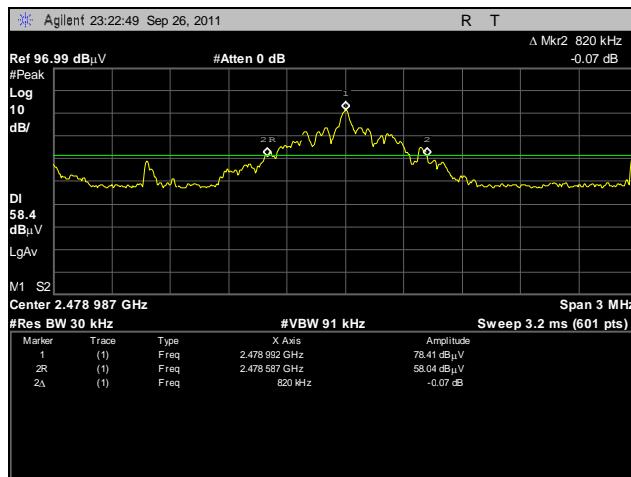

Plot 16. 99% Occupied Bandwidth, High Channel

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 185.247(a)(1)      Average Time of Occupancy (Dwell Time)

**Test Requirements:** For a single channel, the average time of occupancy in a time period equal to  $0.4s * (\# \text{ of channels})$  shall be no greater than  $0.4s$ .

**Remarks:** Channel On-time was found. The channel center frequency was observed for a period equal to 1% of the time  $0.4s * (\# \text{ of channels})$  to find the maximum number of times that channel would be used in the period equal to  $0.4s * (\# \text{ of channels})$ . The channel dwell time was then found by multiplying the Channel On-Time with the number of times the channel would be used.


**Test Results**      The EUT was compliant with § 15.247 (a)(1).

**Test Engineer(s):**      Jeffrey Pratt


**Test Date(s):**      04/13/11 to 04/21/11

Dwell Time Calculation	
Number of Channels	32
On Time of Channel (s)	0.000095
Period ( $0.4s * (\# \text{ of channels})$ ) (s)	12.8
$12.8s/100$	128ms
Max repetitions per 128ms	13
Max repetitions per 12.8s	1300
Maximum Dwell time per 12.8s (s)	0.1235

**Table 20. Dwell Time Calculation**

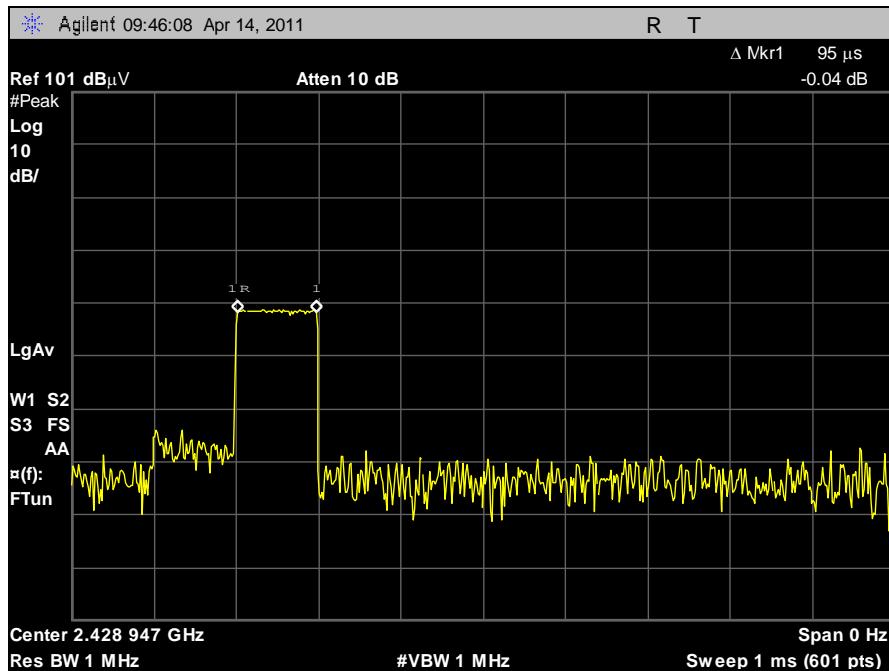

Plot 17. Average Time of Occupancy (Dwell Time) – 1

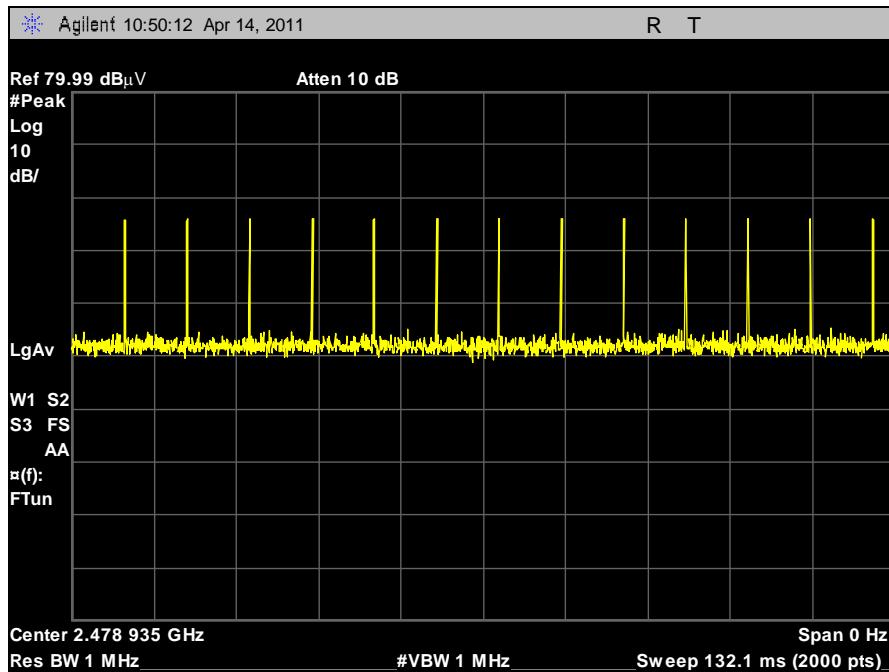

Plot 18. Average Time of Occupancy (Dwell Time) – 2

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1) Number of RF Channels


**Test Requirements:** A minimum of 15 channels shall be used.

**Remarks:** Total hopping channels = 32. The EUT meets the specifications of Section 15.247(a) (1) for Number of Hopping Channels.

**Test Results** The EUT was compliant with § 15.247 (a)(1).

**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 04/06/11

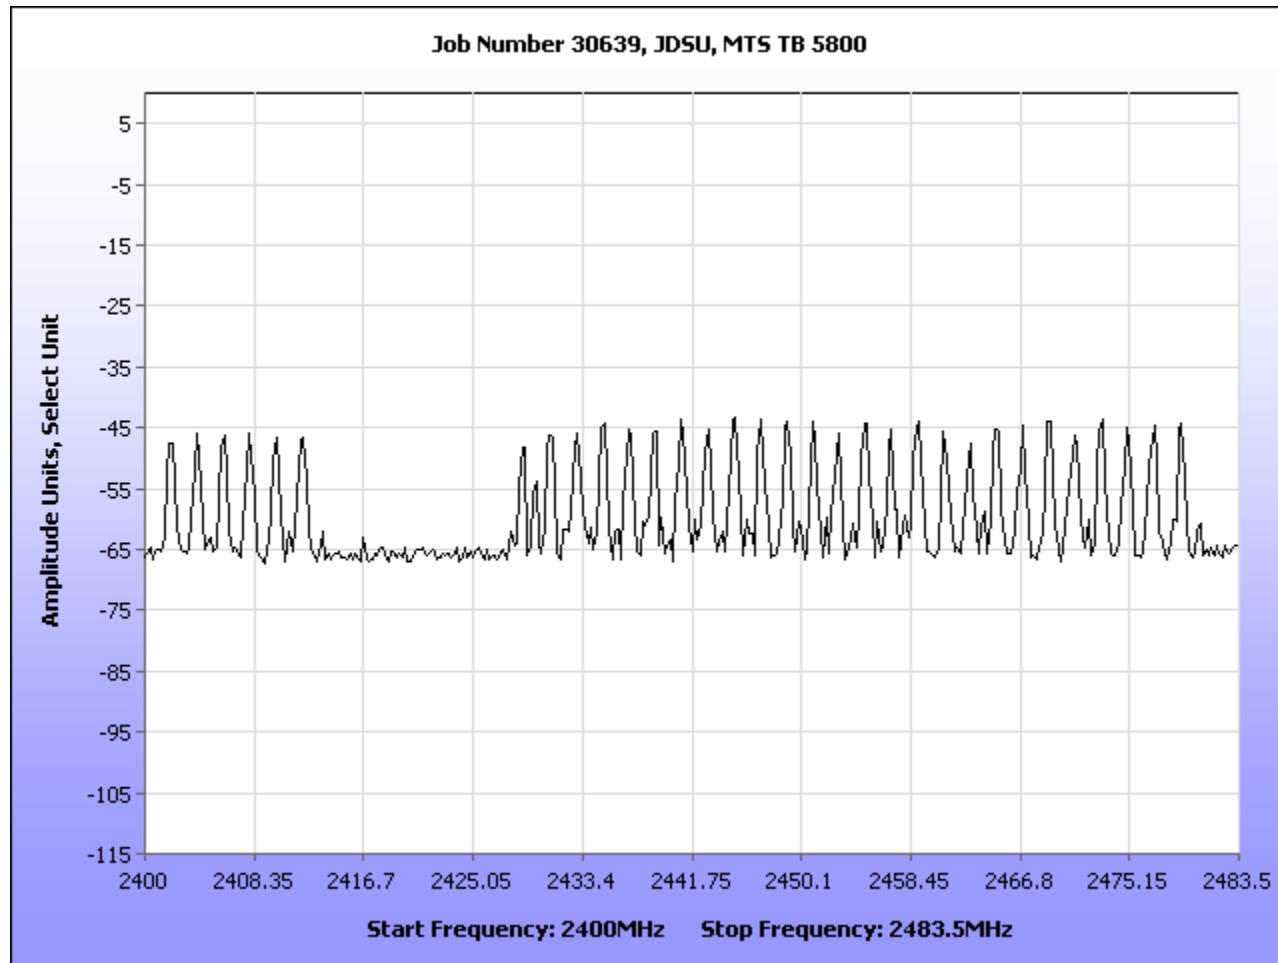

Plot 19. Number of RF Channels Plot

## Electromagnetic Compatibility Criteria for Intentional Radiators


### § 15.247(a)(1) RF Channel Separation

**Test Requirements:** Hopping channel carrier frequencies shall be separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

**Test Results** The EUT was compliant with § 15.247 (a)(1).

**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 04/13/11

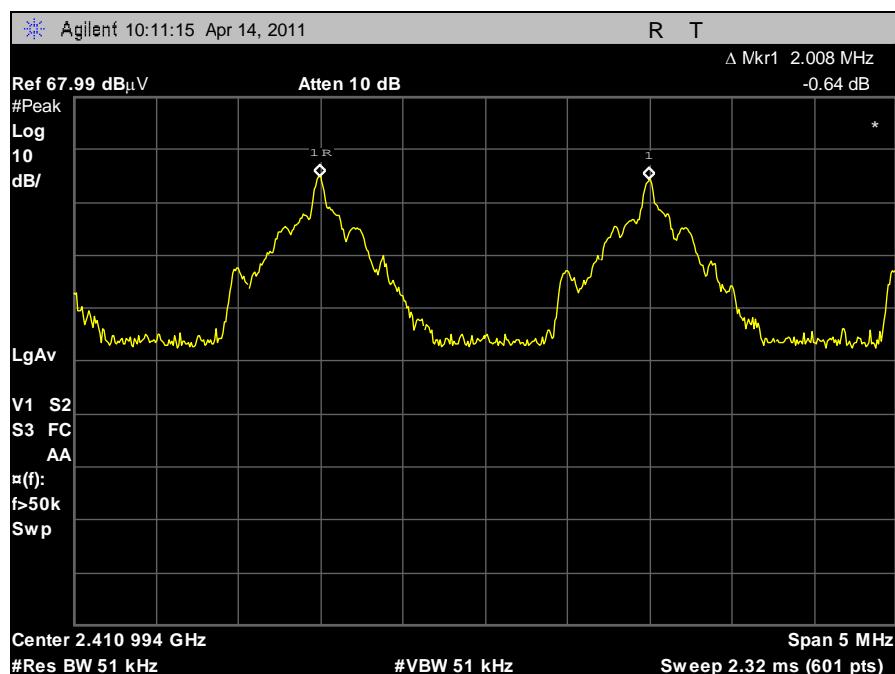

**Plot 20. RF Channel Separation Plot**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** **§15.247(b)(1):** The maximum peak output power of the intentional radiator shall not exceed 0.125 Watts for frequency hopping systems operating in the 2400-2483.5 MHz band. .

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**Test Procedure:** The EUT was measured at the low, mid and high channels of each band at the maximum power level. Measurements were performed radiated and the fundamental field strength was measured at 1m. The peak output power in watts was calculated from:

$$\text{EIRP} = E + 20\log(d) - 104.8$$

where:

E=fundamental field strength in dBuV/m

D=measurement distance in m

A RBW=VBW=100 kHz was used for measurements.

**Test Results:** The EUT was compliant with the Peak Power Output limits of **§15.247(b)**.

**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 04/21/11


## Peak Power Output Test Results

Channel	Max Field Strength (dBuV/m)	EIRP (dBm)	EIRP (mW)
2402	98.11	-6.69	0.21428906
2441	98.81	-5.99	0.251767693
2480	96.31	-8.49	0.141579378
Measurement Distance (m)	1		


EIRP = Max Field Strength + 20\*log(Measurement Distance) - 104.8

**Table 21. Peak Power Output, Test Results**


## Peak Power Output Test Results

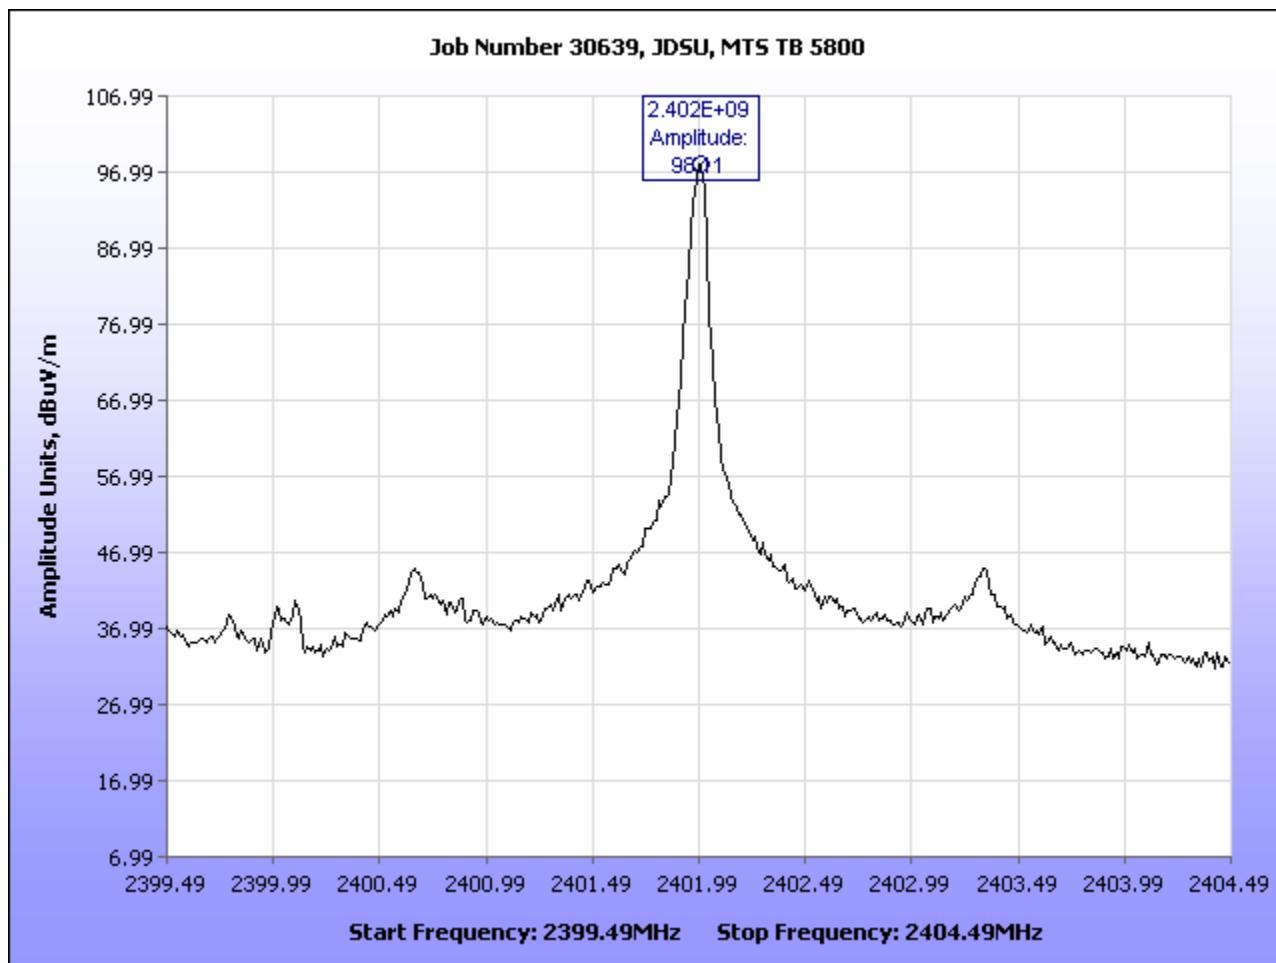

**Plot 21. Peak Power Output, Low Channel**

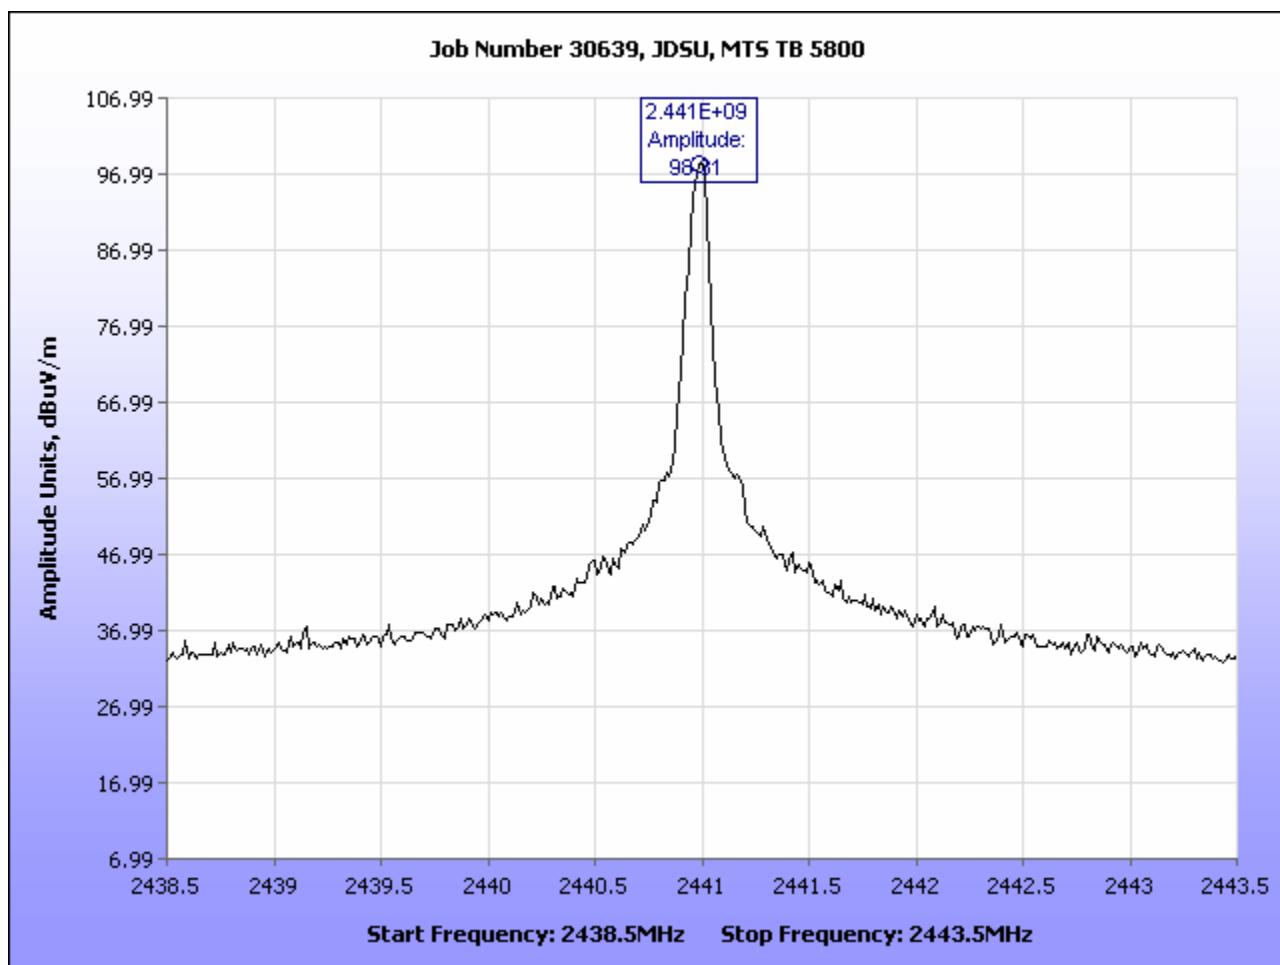

**Plot 22. Peak Power Output, Mid Channel**

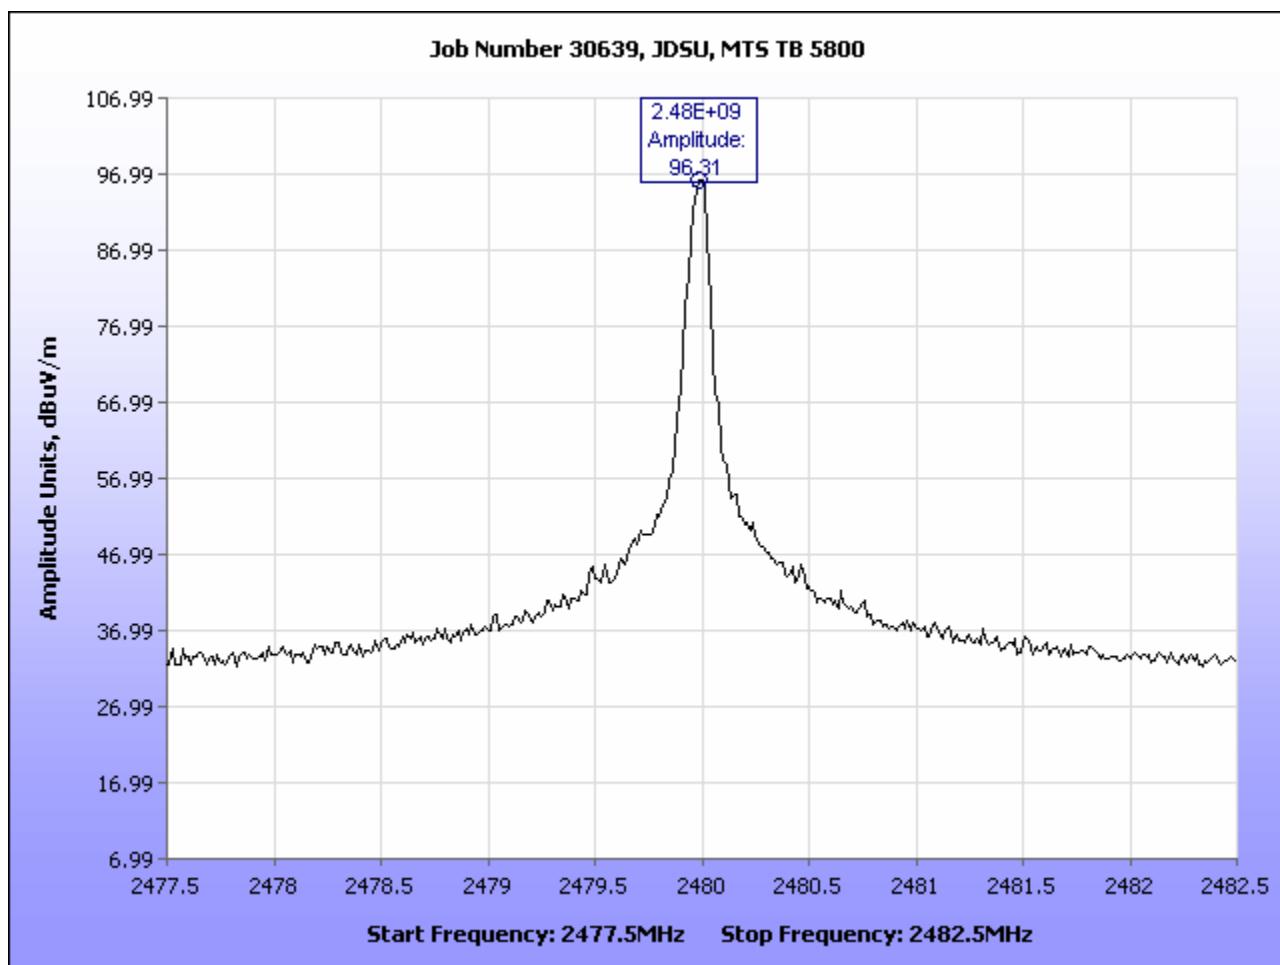

**Plot 23. Peak Power Output, High Channel**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 22. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 23.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB $\mu$ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 23. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedure:**

The transmitter was set to the mid channel at the highest output power and placed on a 0.8 m high wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast with 1 m to 4 m height to determine worst case orientation for maximum emissions. Measurement were repeated the measurement at the low and highest channels.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

EUT Field Strength Final Amplitude = Raw Amplitude – Preamp gain + Antenna Factor + Cable Loss – Distance Correction Factor

A peak detector was used, with the data compared against the average limit.


RBW=VBW=1MHz for measurements above 1 GHz.

**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).


**Test Engineer(s):** Jeffrey Pratt

**Test Date(s):** 04/13/11 to 04/21/11


## Radiated Spurious Emissions Test Results

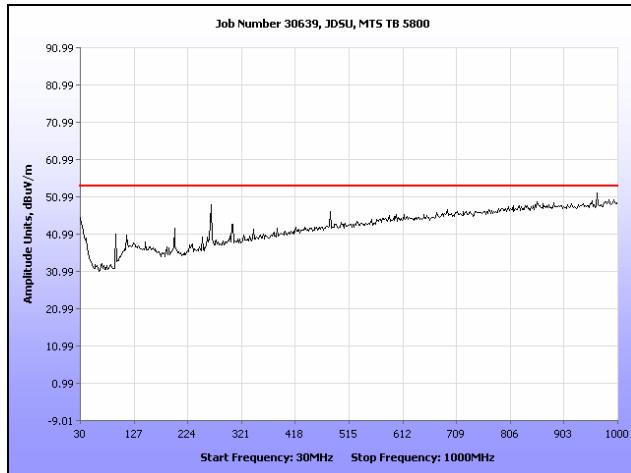


Plot 24. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz

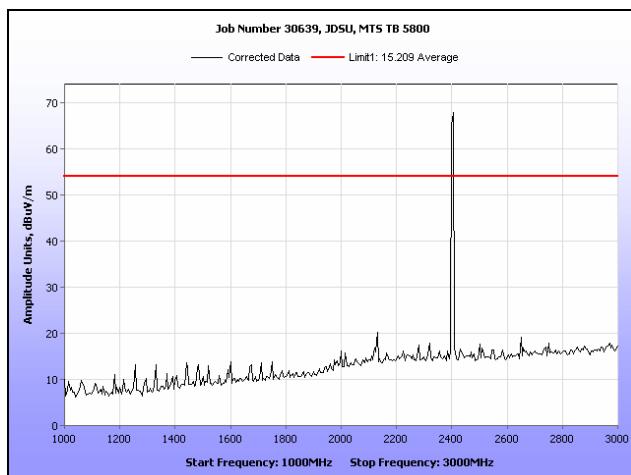


Plot 25. Radiated Spurious Emissions, Low Channel, 1 GHz – 3 GHz

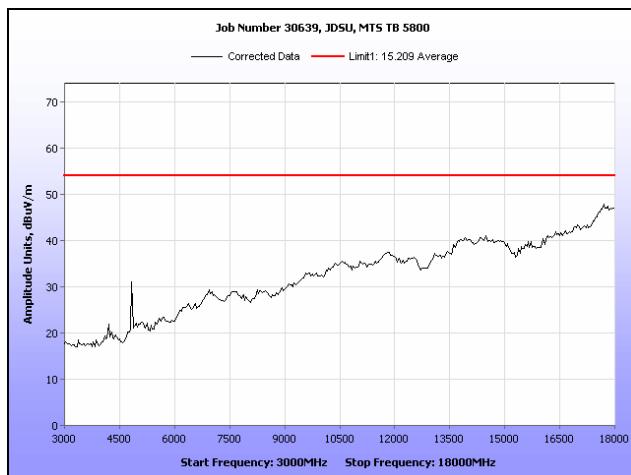


Plot 26. Radiated Spurious Emissions, Low Channel, 3 GHz – 18 GHz

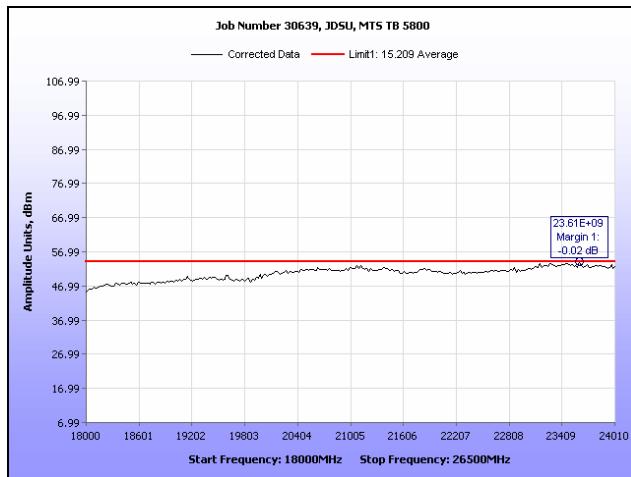


**Plot 27. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5 GHz**

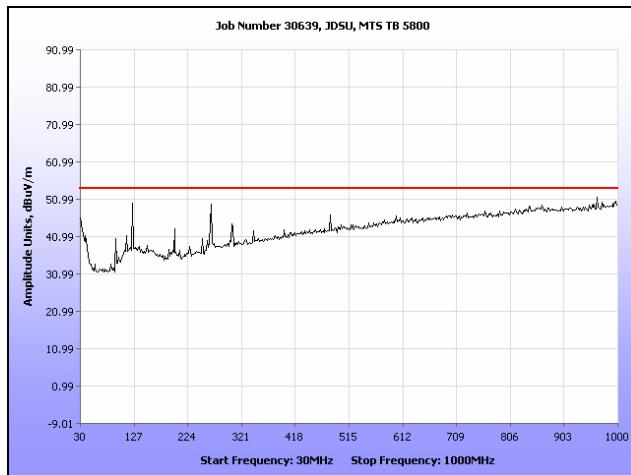


**Plot 28. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz**

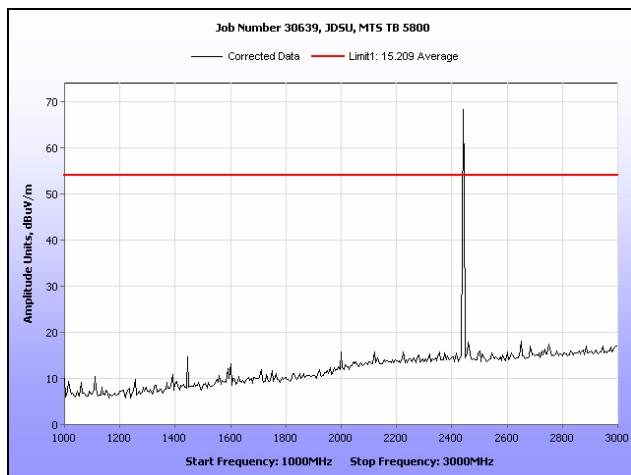


**Plot 29. Radiated Spurious Emissions, Mid Channel, 1 GHz – 3 GHz**

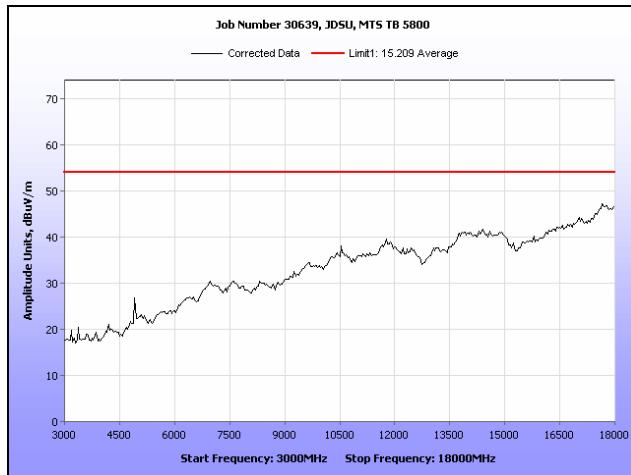


**Plot 30. Radiated Spurious Emissions, Mid Channel, 3 GHz – 18 GHz**

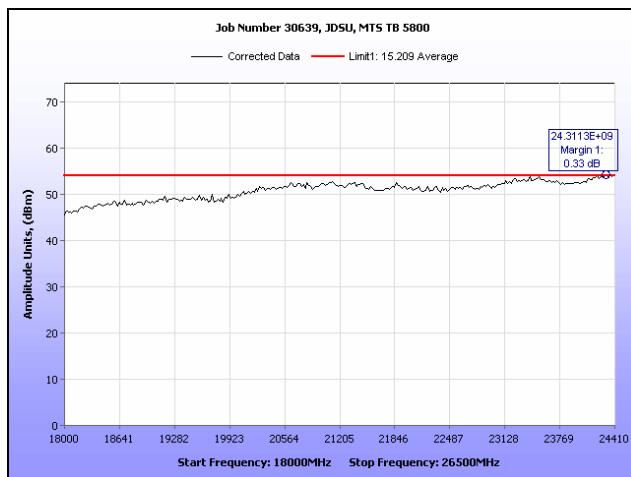


**Plot 31. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5 GHz**

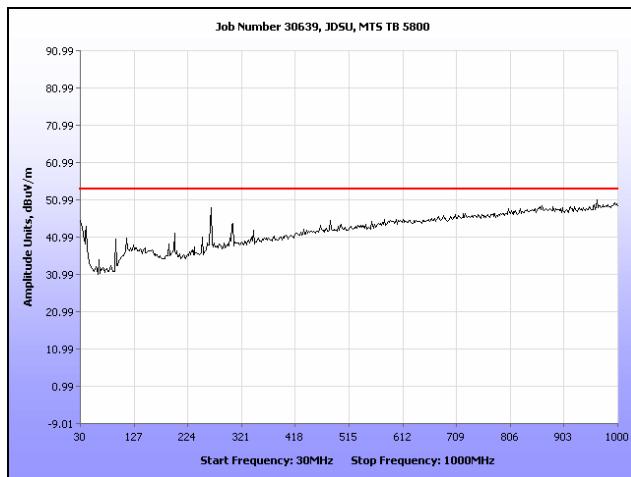


**Plot 32. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz**

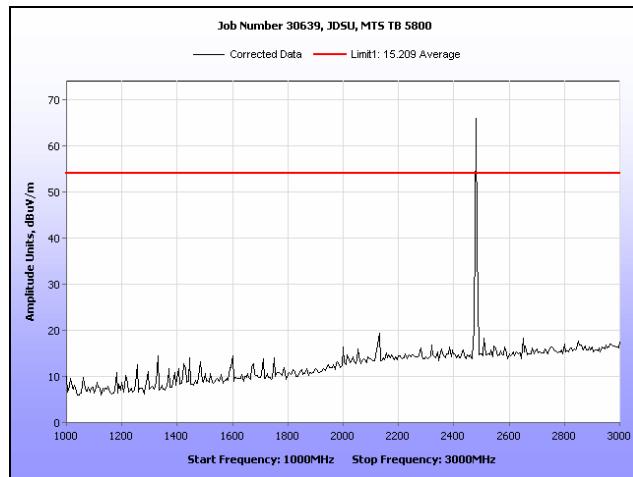


**Plot 33. Radiated Spurious Emissions, High Channel, 1 GHz – 3 GHz**

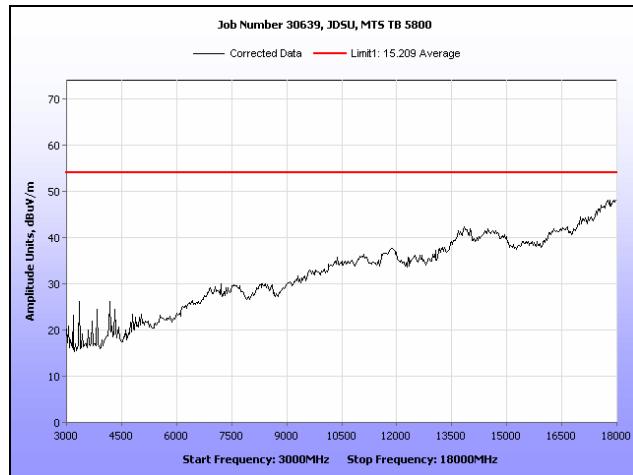


**Plot 34. Radiated Spurious Emissions, High Channel, 3 GHz – 18 GHz**

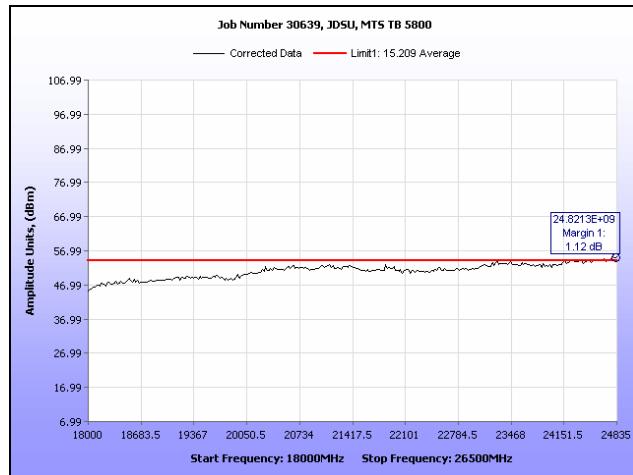


**Plot 35. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5 GHz**

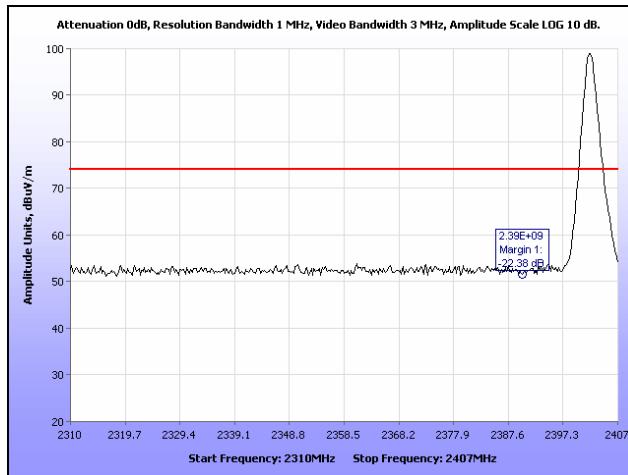

**Plot 36. Radiated Spurious Emissions, Low Channel, Band Edge, Peak**

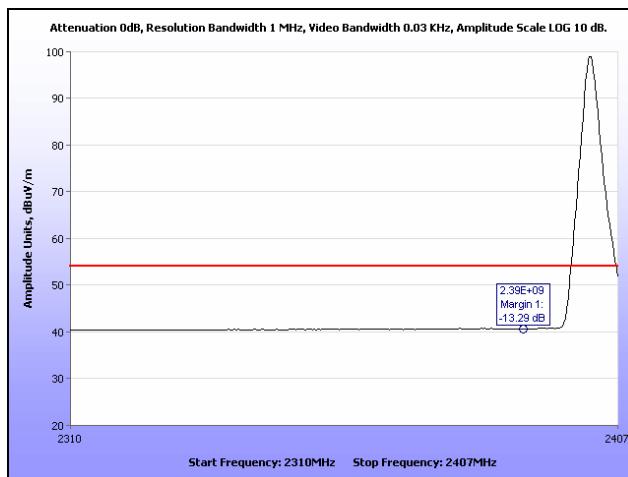


**Plot 37. Radiated Spurious Emissions, Low Channel, Band Edge, Average**

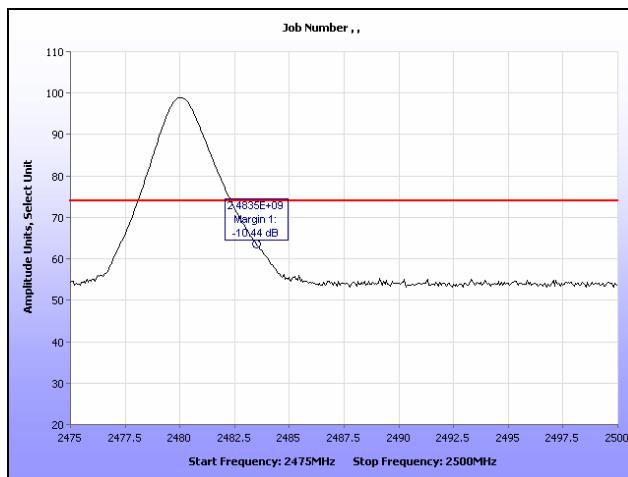


**Plot 38. Radiated Spurious Emissions, High Channel, Band Edge, Peak**


Note: The average measurement was over the limit and therefore the delta-marker method is being used for the high channel.

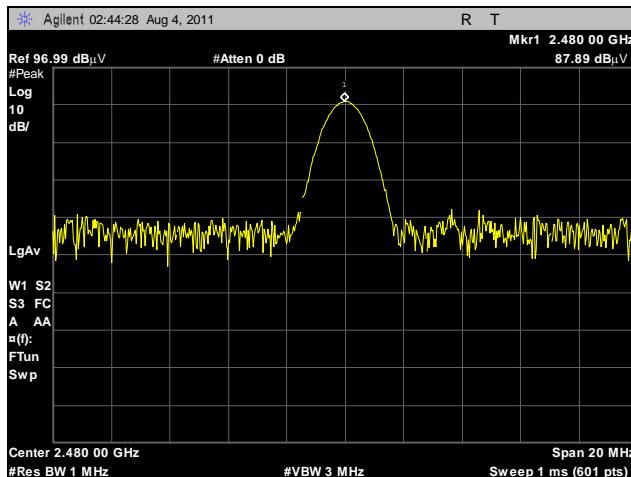


**Plot 39. Radiated Spurious Emissions, High Channel, Band Edge, Peak, 3m**

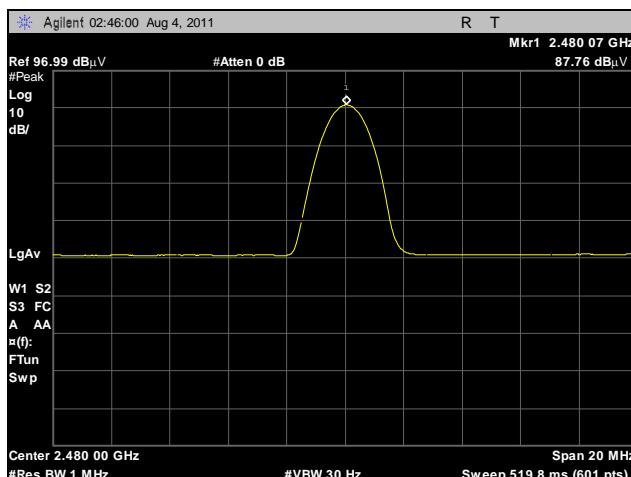


**Plot 40. Radiated Spurious Emissions, High Channel, Band Edge, Average, 3m**

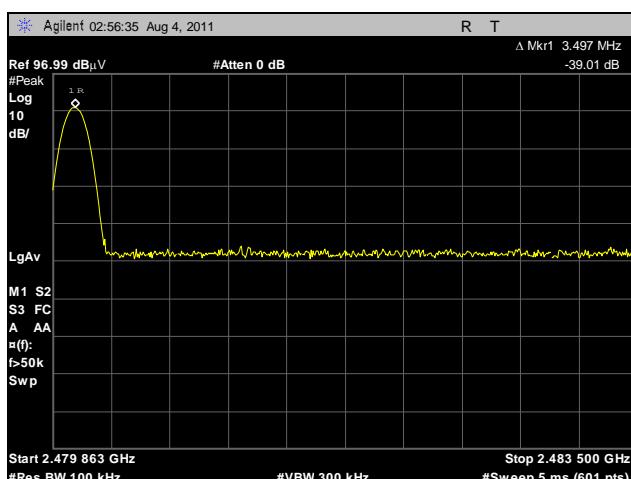


**Plot 41. Radiated Spurious Emissions, High Channel, Band Edge, MarkerDelta, 3m**

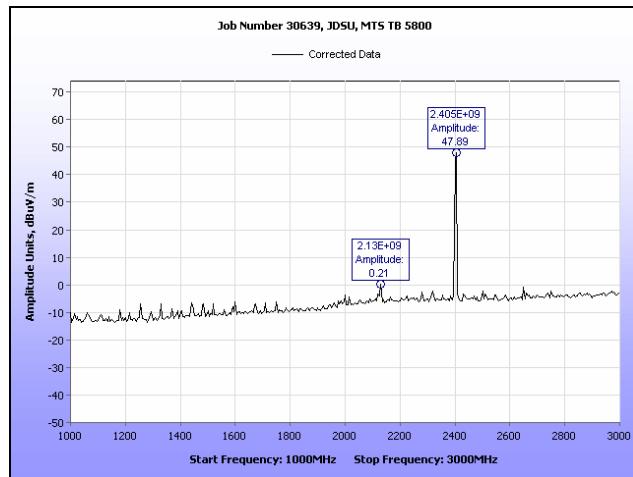


**Plot 42. Radiated Spurious Emissions, Low Channel, 20 dBC, 1 GHz – 3 GHz**

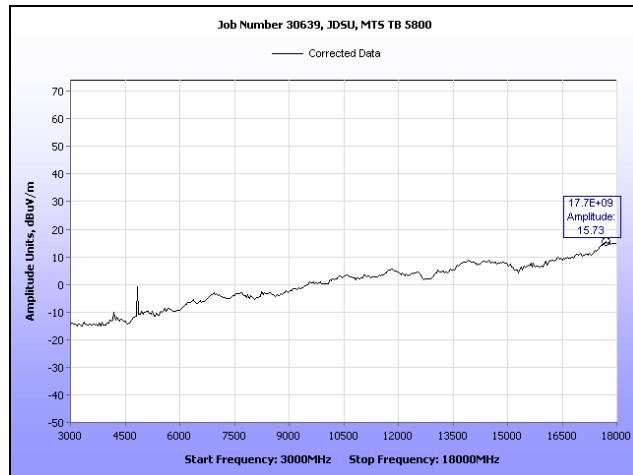


**Plot 43. Radiated Spurious Emissions, Low Channel, 20 dBC, 3 GHz – 18 GHz**

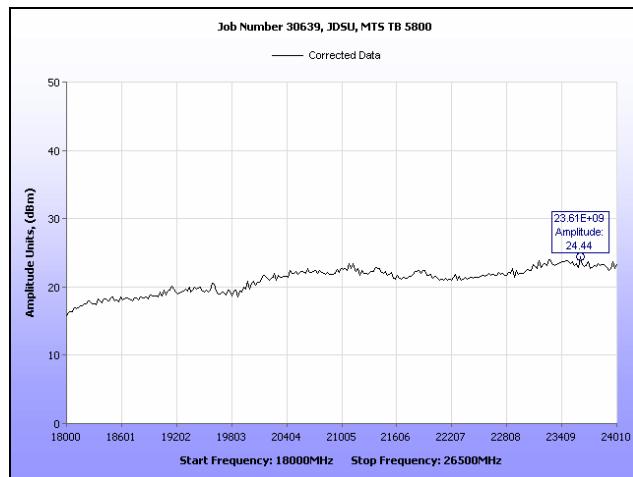


**Plot 44. Radiated Spurious Emissions, Low Channel, 20 dBC, 18 GHz – 24.01 GHz**

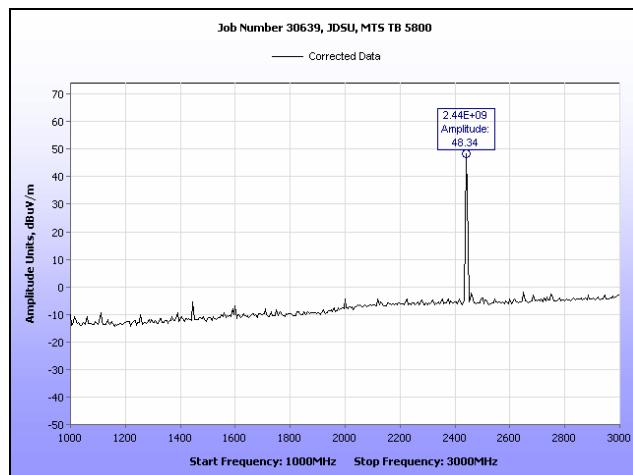


**Plot 45. Radiated Spurious Emissions, Mid Channel, 20 dBC, 1 GHz – 3 GHz**

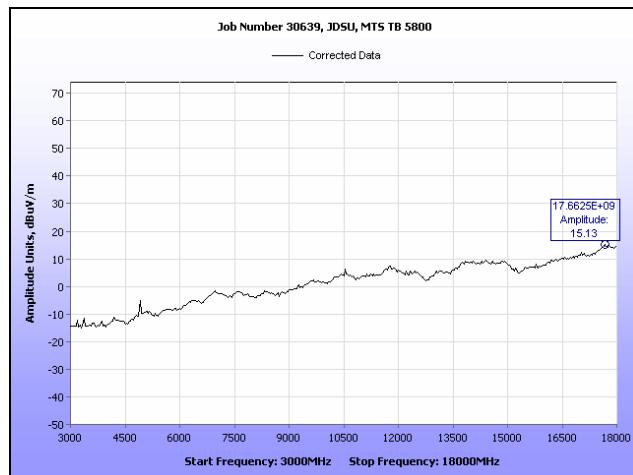


**Plot 46. Radiated Spurious Emissions, Mid Channel, 20 dBC, 3 GHz – 18 GHz**

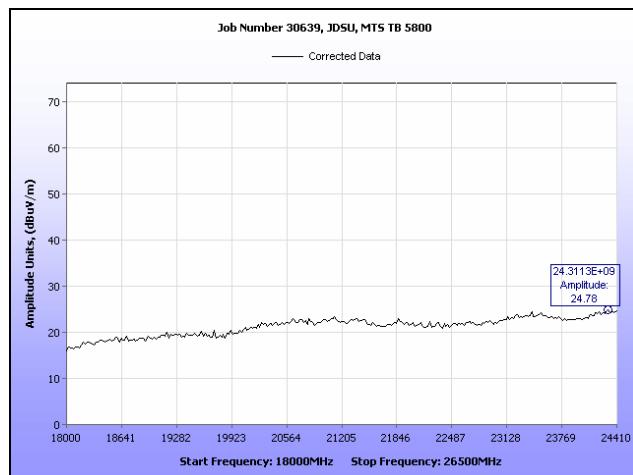


**Plot 47. Radiated Spurious Emissions, Mid Channel, 20 dBC, 18 GHz – 24.41 GHz**

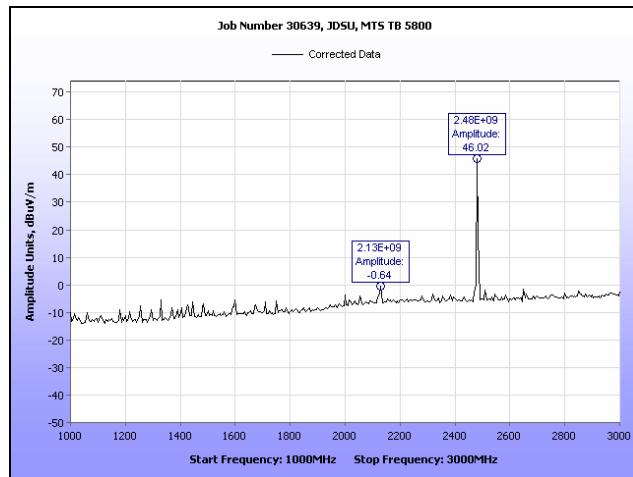

**Plot 48. Radiated Spurious Emissions, High Channel, 20 dBC, 1 GHz – 3 GHz**

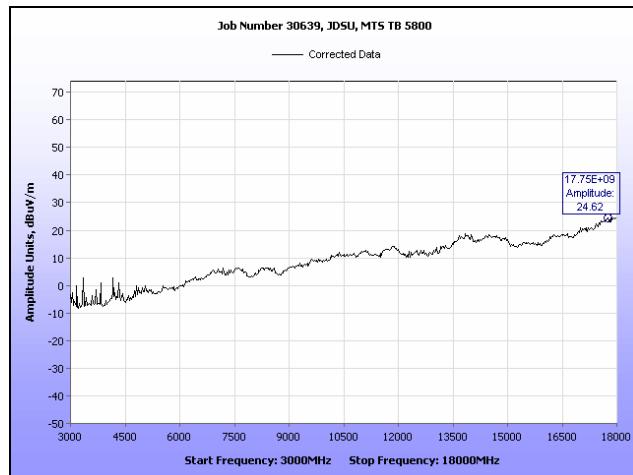


**Plot 49. Radiated Spurious Emissions, High Channel, 20 dBC, 3 GHz – 18 GHz**

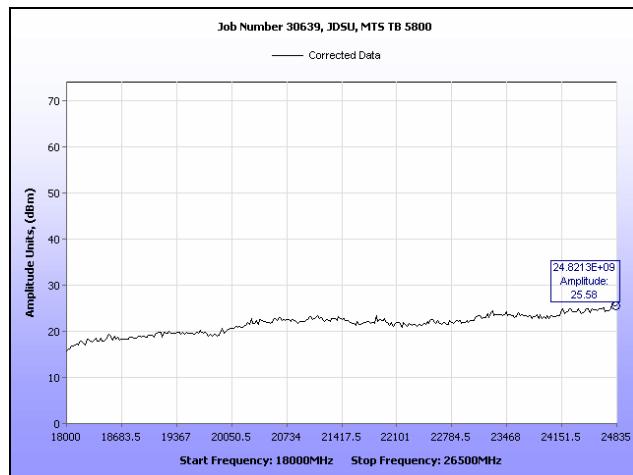


**Plot 50. Radiated Spurious Emissions, High Channel, 20 dBC, 18 GHz – 24.835 GHz**


## Radiated Spurious Emissions

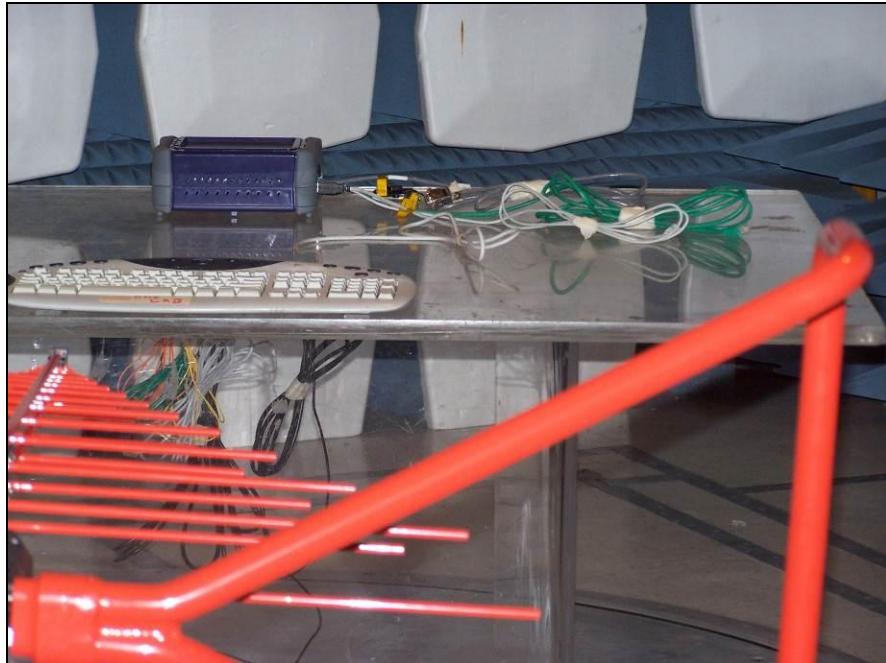

Photograph 5. Radiated Spurious Emissions, Test Setup, Low Frequency

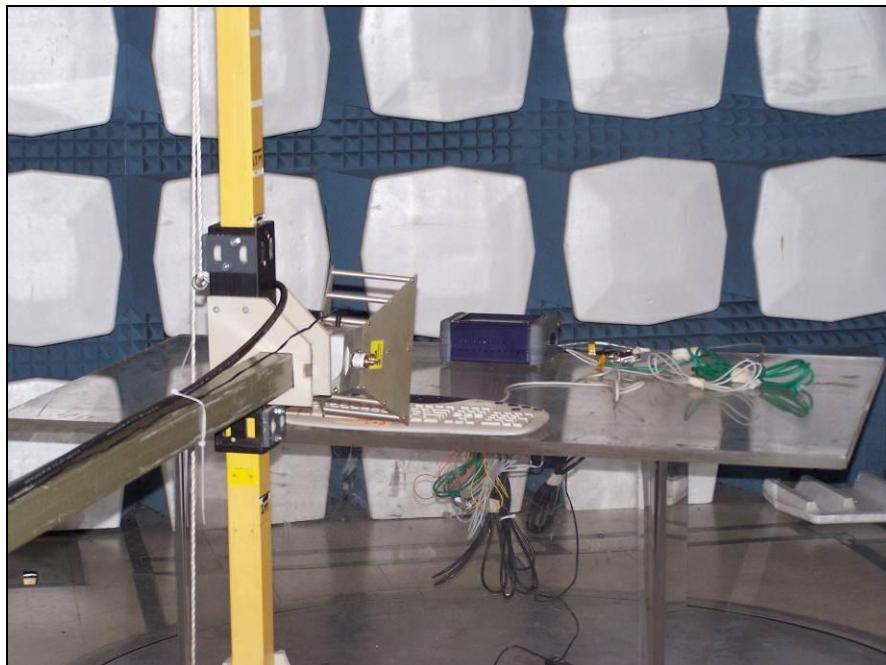

Photograph 6. Radiated Spurious Emissions, Test Setup, High Frequency

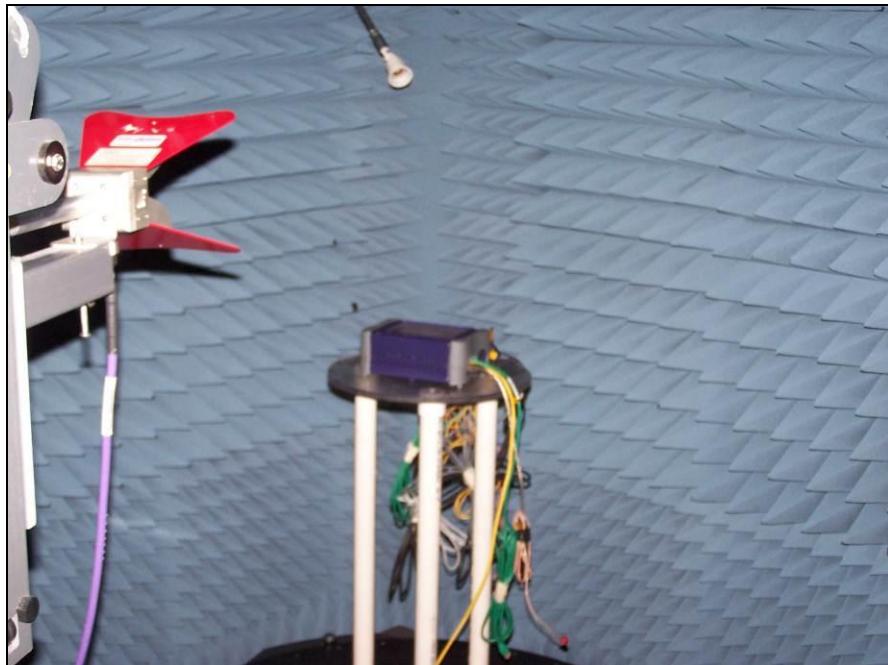

**Photograph 7. Radiated Spurious Emissions, Test Setup**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(g)(h) Declaration Statements for FHSS



One Milestone Center Court  
Germantown, MD 20876 USA

Tel 301 353-1560  
Fax 301 353-9216  
Toll free 866 ACTERNA  
[www.jdsu.com](http://www.jdsu.com)

#### Declaration Letter

May 3, 2011

MET Laboratories, Inc.  
914 W. Patapsco Ave.  
Baltimore, MD 21230

To Whom It May Concern:

- i. The hopping sequence is pseudorandom, all channels are used equally on average, the receiver input bandwidth is approximately equal to the transmit bandwidth and the receiver hops in sequence with the transmitted signal.
- ii. The system is designed to comply with all of the regulations in 15.247 when the transmitter is presented with a continuous data
- iii. The system does not coordinate its channel selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Engineering Product Manager



Glenn Gruenberg

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(i) Maximum Permissible Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400-2483.5 MHz; highest conducted power = -5.99dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

EUT maximum antenna gain = 2.57 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where,  $S$  = Power Density (1 mW/cm<sup>2</sup>)  
 $P$  = Power Input to antenna (0.252mW)  
 $G$  = Antenna Gain (1.807 numeric)

$$R = (0.252 * 1.807 / 4 * 3.14 * 1.0)^{1/2} = (0.455 / 12.56)^{1/2} = 0.190 \text{ cm}$$



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## IV. Test Equipment



## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset#	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4758	THERMO-HYGROMETER	CONTROL COMPANY	4040	05/21/2010	05/21/2012
1T4621	ESA-E SERIES SPECTRUM ANALYZER	AGILENT	E4402B	05/10/2010	05/10/2011
1T4564	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	10/06/2010	10/06/2011
1T4565	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	10/28/2010	10/28/2011
1T4394	ISOLATION TRANSFORMER	TOPAZ	0111T335	SEE NOTE	
1T4681	SPECTRUM ANALYZER	AGILENT	E4448A	12/3/2010	12/3/2011
1T4612	SPECTRUM ANALYZER	AGILENT	E4407B	9/27/2010	9/27/2011
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	6/8/2010	6/8/2011
1T4751	ANTENNA; BILOG	SUNOL SCIENCES	JB6	11/3/2010	11/3/2011

**Table 24. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### **§ 2.801 Radio-frequency device defined.**

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### **§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

### Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

### Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class <sup>[2]</sup> digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe <sup>[1]</sup> est conforme à la norme NMB-003 du Canada.

<sup>2</sup> Insert either A or B but not both as appropriate for the equipment requirements.



JDS Uniphase Corporation  
TB/MTS-5800

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 8, Dec. 2010 & ICES-003

## End of Report