

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1886 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

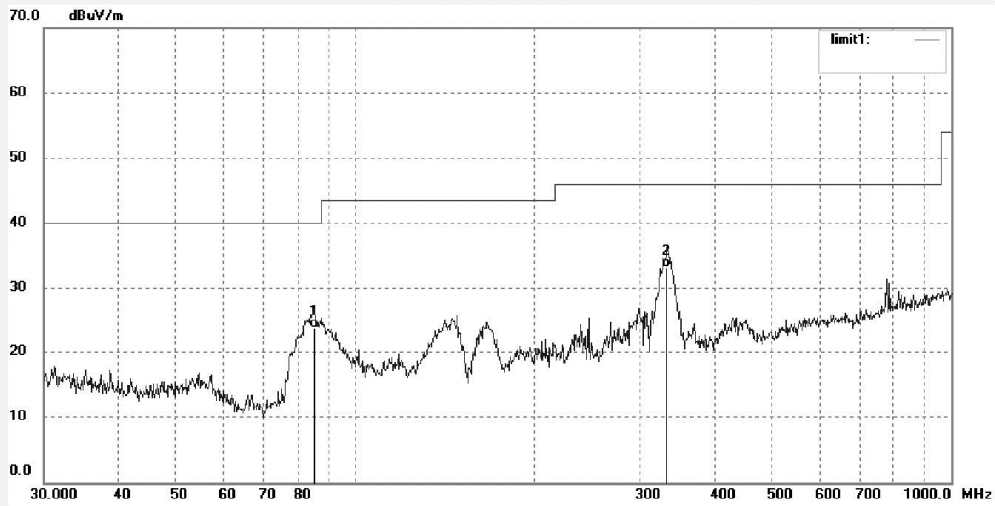

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 85.1771 | 39.28 | -15.38 | 23.90 | 40.00 | -16.10 | QP | | | |
| 2 | 332.9536 | 41.54 | -8.29 | 33.25 | 46.00 | -12.75 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1887 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

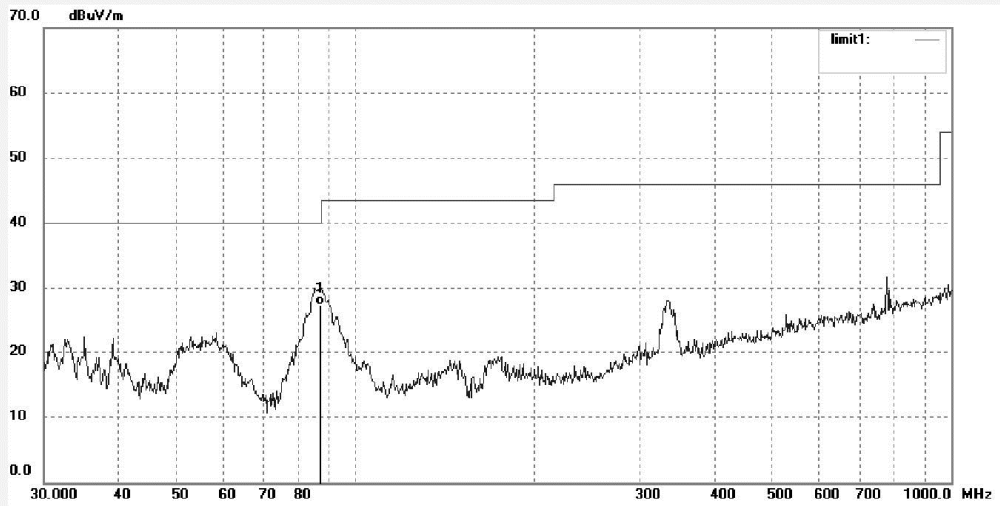

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 87.2980 | 42.63 | -15.24 | 27.39 | 40.00 | -12.61 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2040 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

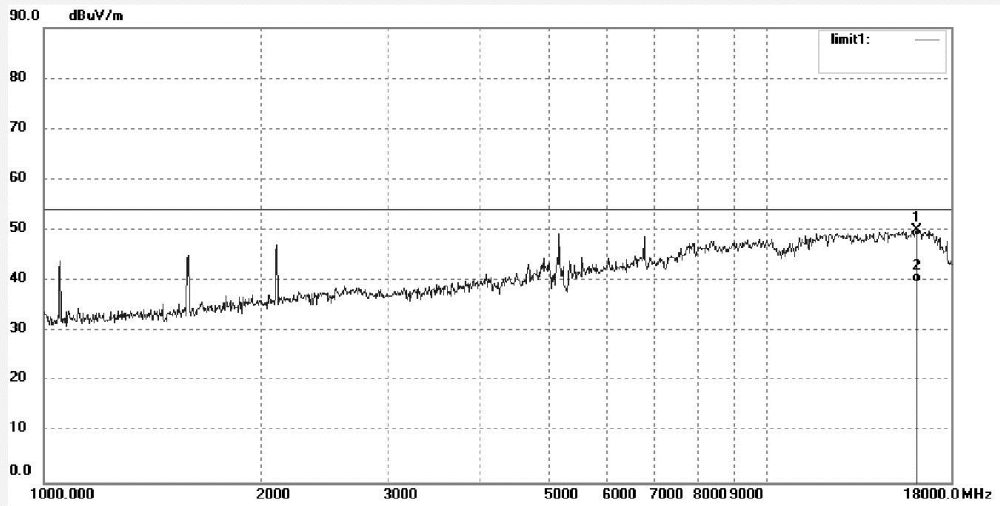

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16115.207 | 10.00 | 40.07 | 50.07 | 74.00 | -23.93 | peak | | | |
| 2 | 16115.207 | -0.46 | 40.07 | 39.61 | 54.00 | -14.39 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2041 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

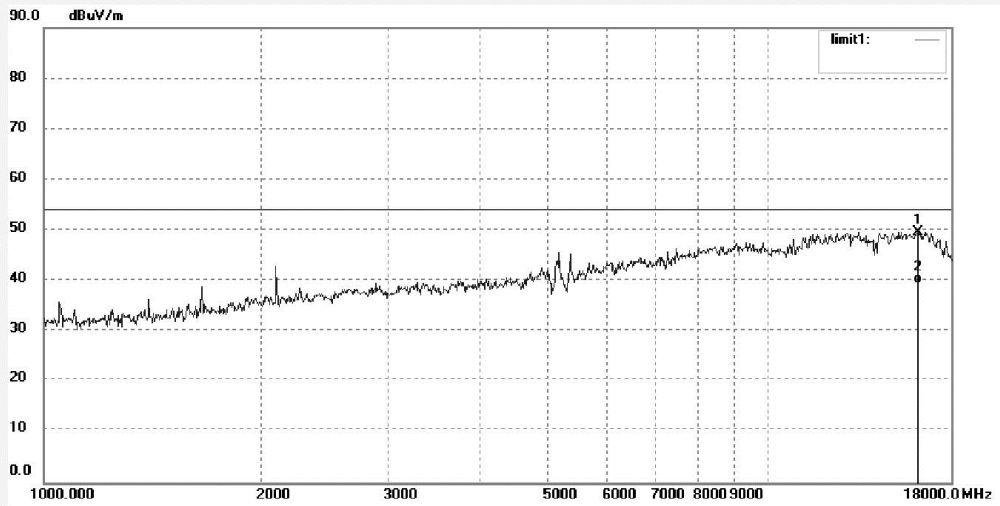

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16162.183 | 9.56 | 40.10 | 49.66 | 74.00 | -24.34 | peak | | | |
| 2 | 16162.183 | -0.50 | 40.10 | 39.60 | 54.00 | -14.40 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2042 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

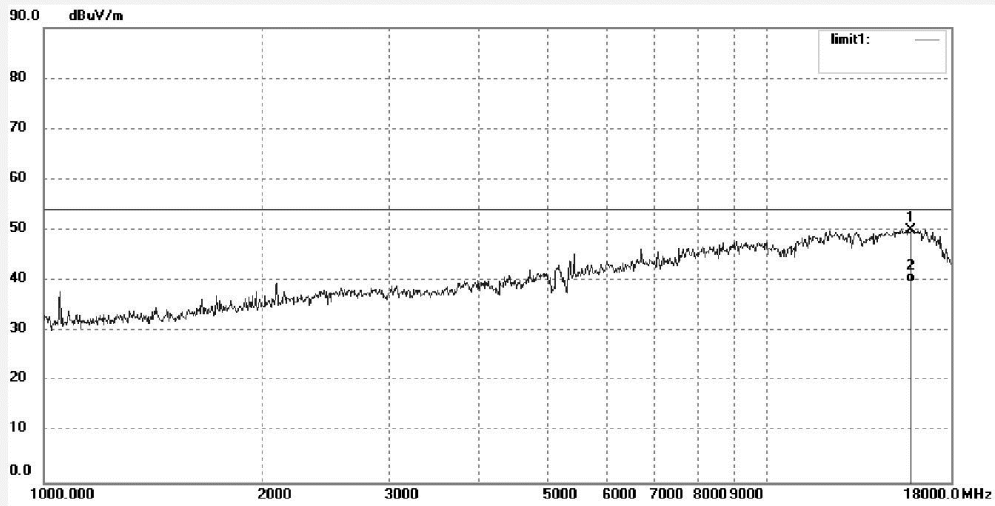

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 15836.207 | 10.03 | 40.03 | 50.06 | 74.00 | -23.94 | peak | | | |
| 2 | 15836.207 | -0.41 | 40.03 | 39.62 | 54.00 | -14.38 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2043 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

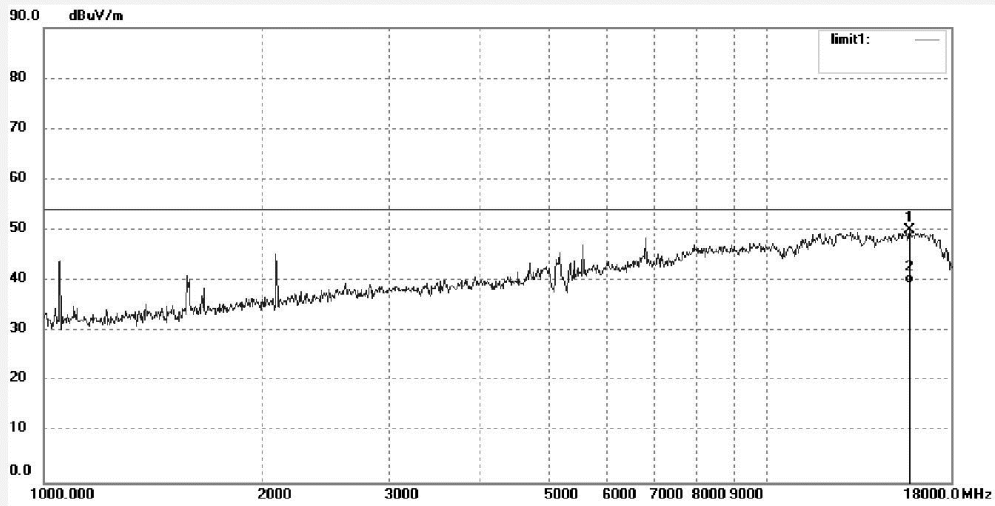

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 15744.284 | 9.93 | 40.05 | 49.98 | 74.00 | -24.02 | peak | | | |
| 2 | 15744.284 | -0.57 | 40.05 | 39.48 | 54.00 | -14.52 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2044 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

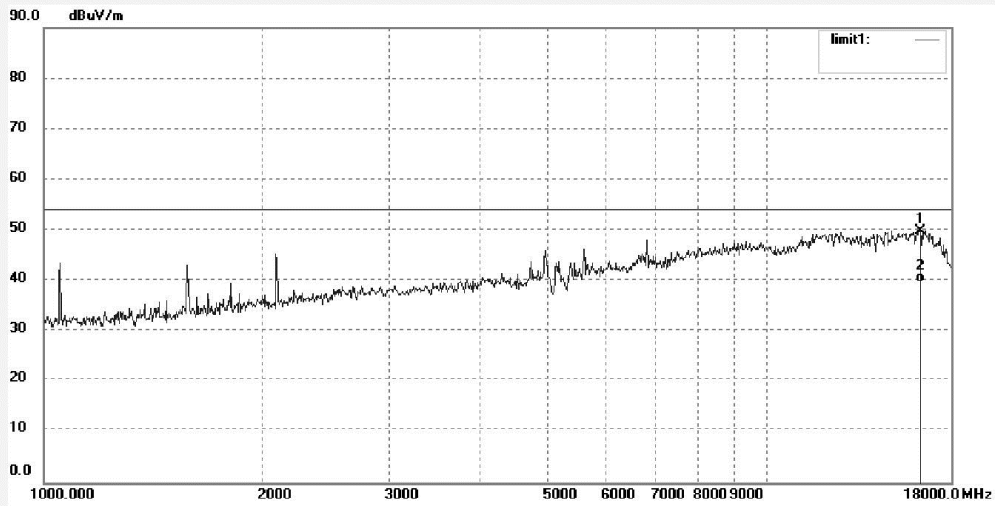

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16303.933 | 9.75 | 40.18 | 49.93 | 74.00 | -24.07 | peak | | | |
| 2 | 16303.933 | -0.43 | 40.18 | 39.75 | 54.00 | -14.25 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2045 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

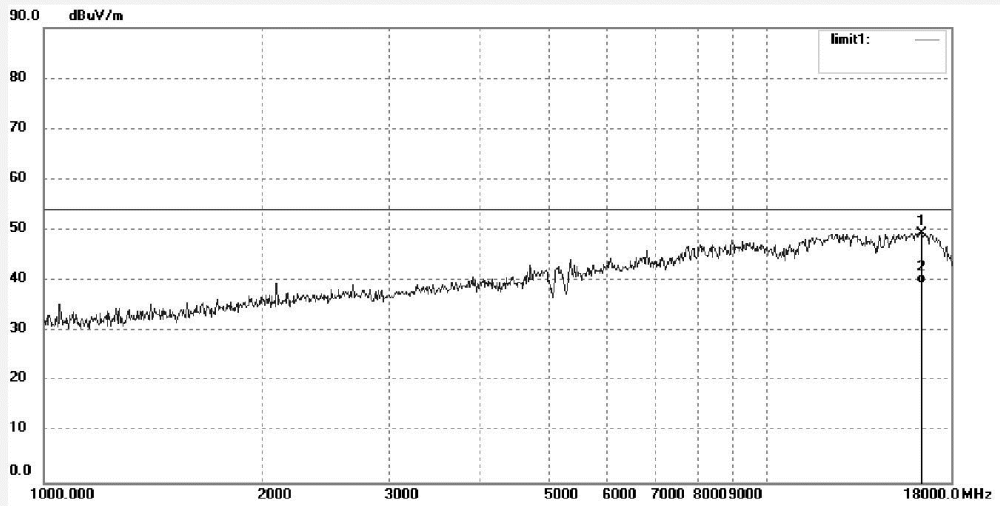

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16399.123 | 9.26 | 40.24 | 49.50 | 74.00 | -24.50 | peak | | | |
| 2 | 16399.123 | -0.68 | 40.24 | 39.56 | 54.00 | -14.44 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2046 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

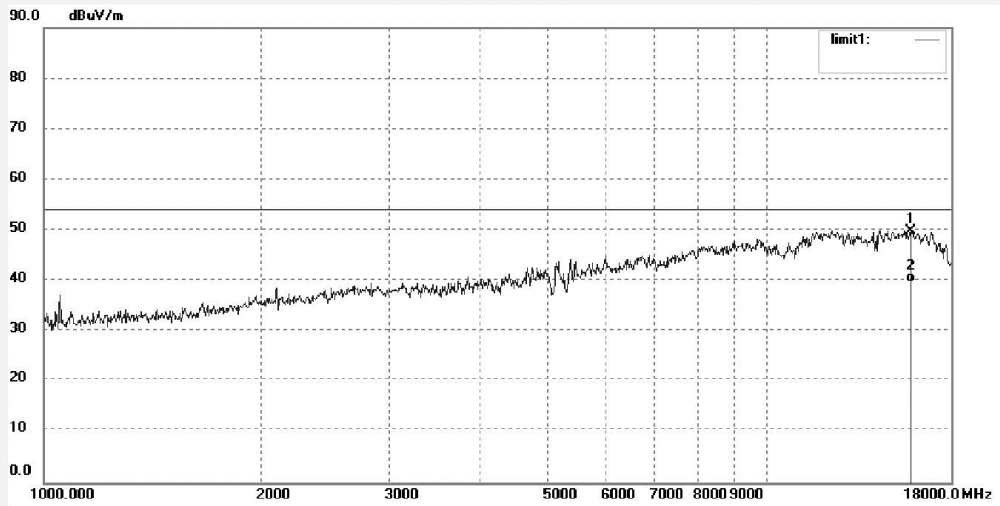

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 15790.179 | 9.87 | 40.04 | 49.91 | 74.00 | -24.09 | peak | | | |
| 2 | 15790.179 | -0.42 | 40.04 | 39.62 | 54.00 | -14.38 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2047 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

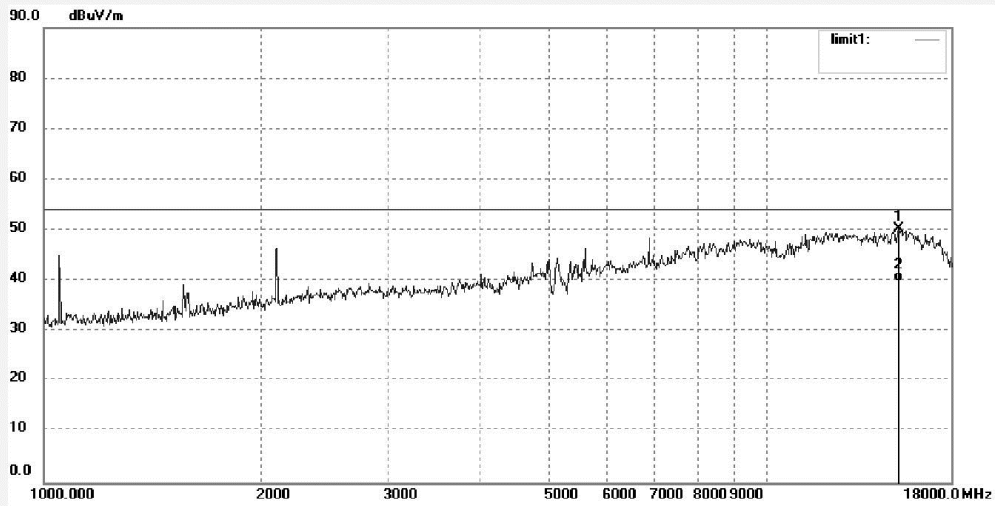

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 15203.846 | 9.52 | 40.69 | 50.21 | 74.00 | -23.79 | peak | | | |
| 2 | 15203.846 | -0.64 | 40.69 | 40.05 | 54.00 | -13.95 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1634 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

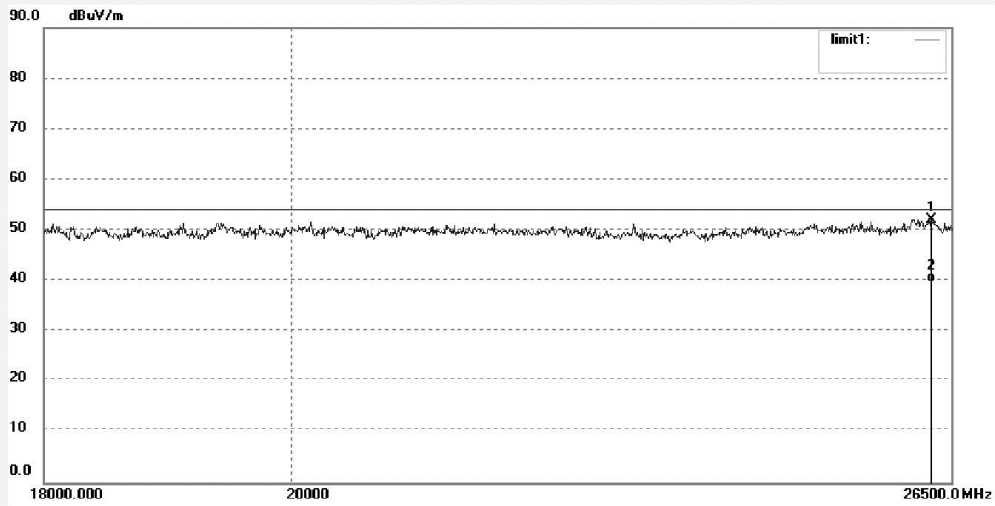

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26275.468 | 34.95 | 17.05 | 52.00 | 74.00 | -22.00 | peak | | | |
| 2 | 26275.468 | 22.63 | 17.05 | 39.68 | 54.00 | -14.32 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1635 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

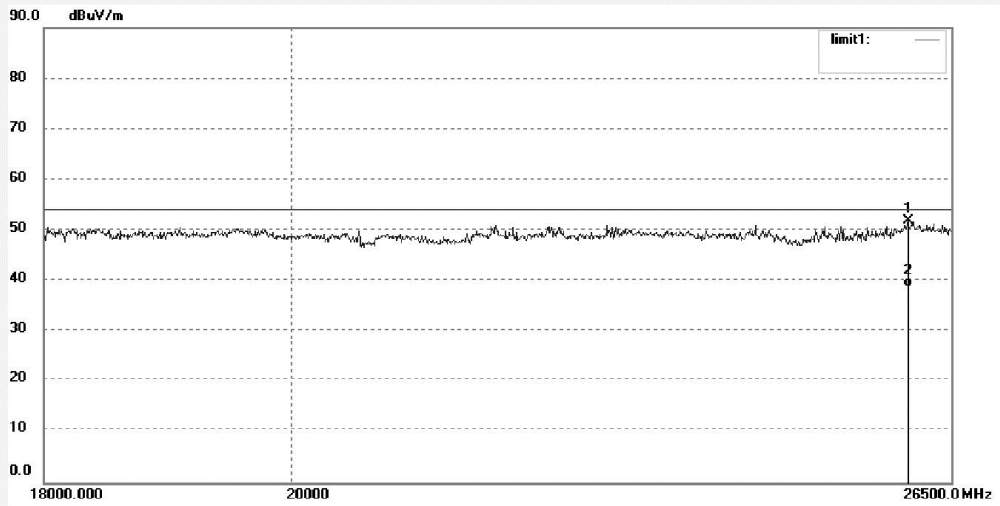

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26012.563 | 35.33 | 16.50 | 51.83 | 74.00 | -22.17 | peak | | | |
| 2 | 26012.563 | 22.25 | 16.50 | 38.75 | 54.00 | -15.25 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1636 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

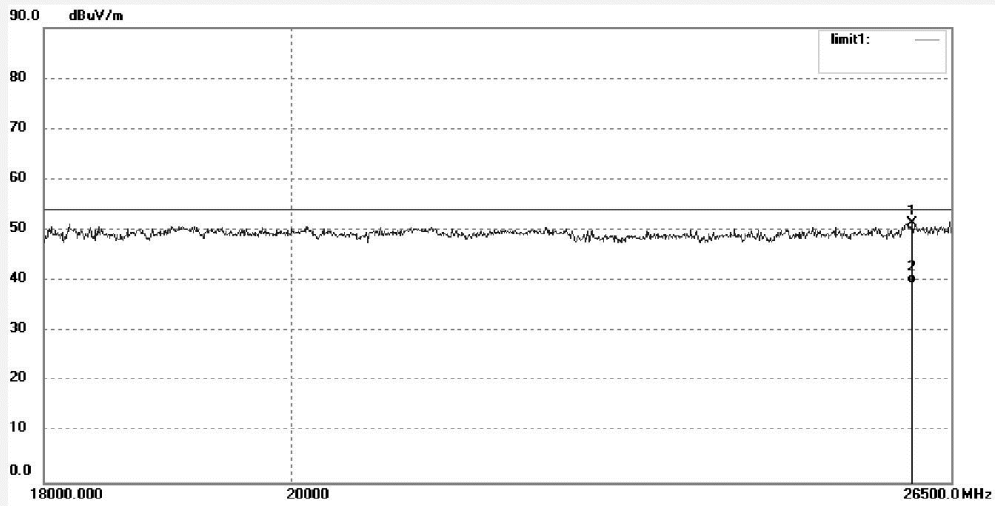

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26052.838 | 35.00 | 16.50 | 51.50 | 74.00 | -22.50 | peak | | | |
| 2 | 26052.838 | 22.92 | 16.50 | 39.42 | 54.00 | -14.58 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1637 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---2TX (Beamforming)

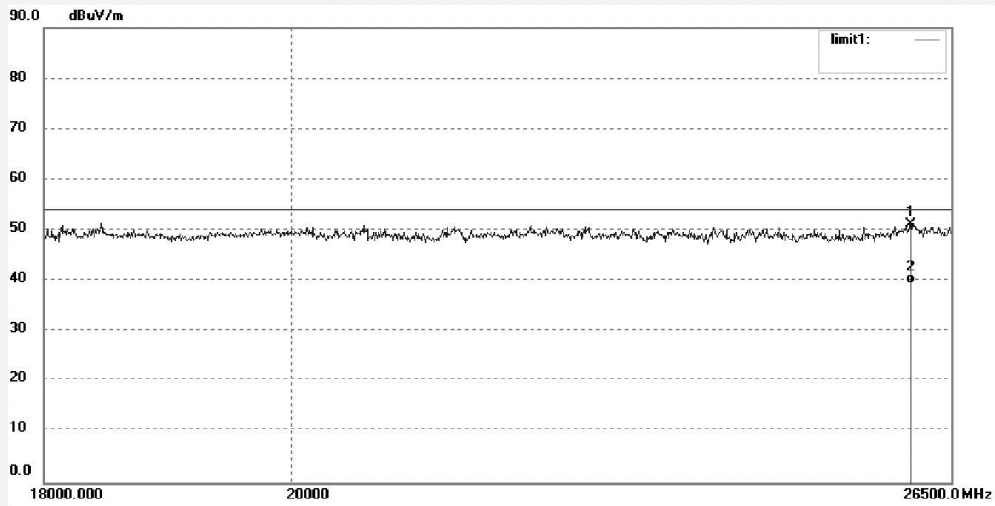

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26042.764 | 33.95 | 17.20 | 51.15 | 74.00 | -22.85 | peak | | | |
| 2 | 26042.764 | 22.25 | 17.20 | 39.45 | 54.00 | -14.55 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1638 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---2TX (Beamforming)

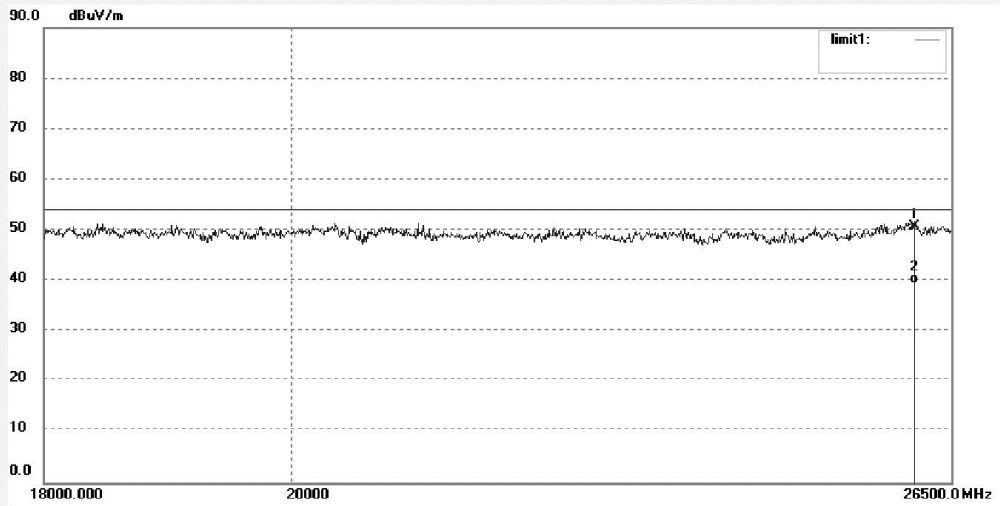

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26083.086 | 33.66 | 17.18 | 50.84 | 74.00 | -23.16 | peak | | | |
| 2 | 26083.086 | 22.27 | 17.18 | 39.45 | 54.00 | -14.55 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1639 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---2TX (Beamforming)

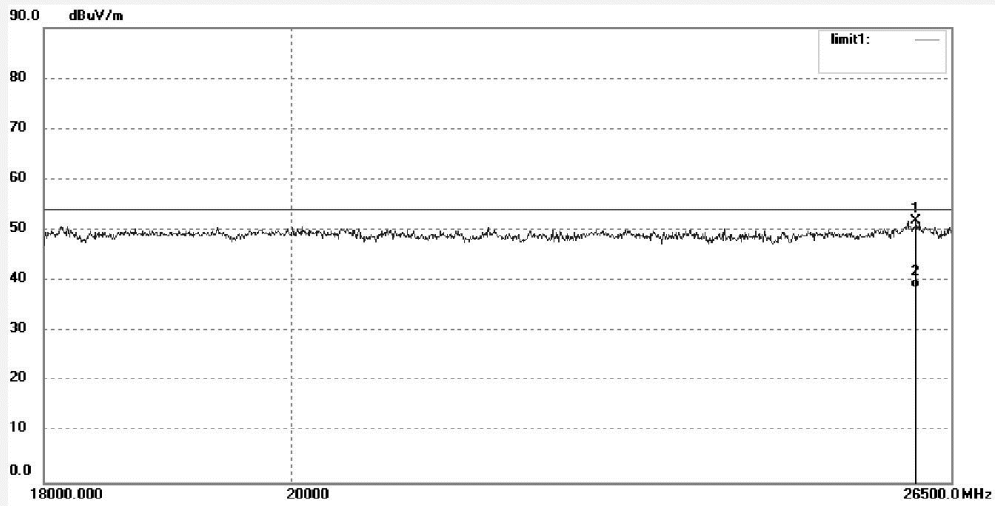

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26103.270 | 35.44 | 16.50 | 51.94 | 74.00 | -22.06 | peak | | | |
| 2 | 26103.270 | 22.13 | 16.50 | 38.63 | 54.00 | -15.37 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1640 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---2TX (Beamforming)

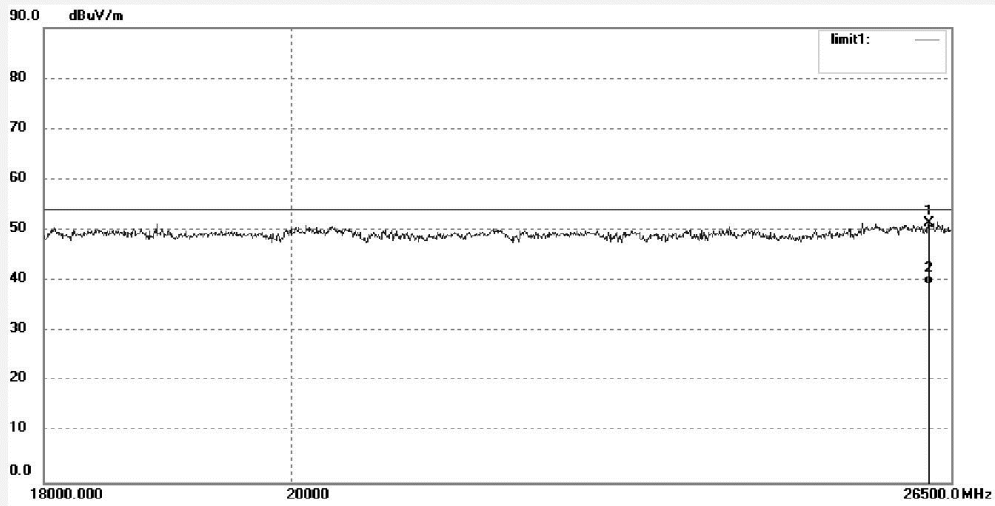

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 26244.998 | 34.97 | 16.50 | 51.47 | 74.00 | -22.53 | peak | | | |
| 2 | 26244.998 | 22.80 | 16.50 | 39.30 | 54.00 | -14.70 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1641 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/09 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--2TX (Beamforming)

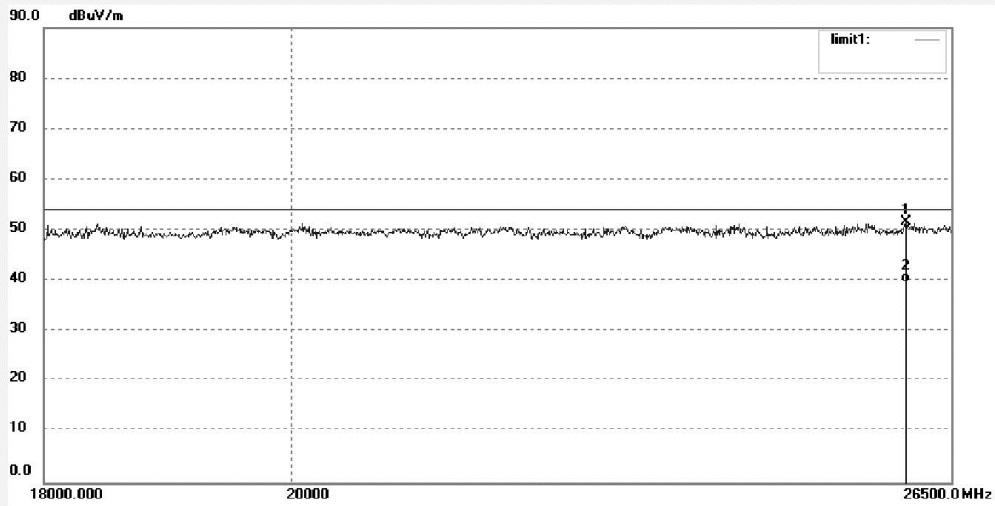

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 25992.449 | 34.47 | 17.24 | 51.71 | 74.00 | -22.29 | peak | | | |
| 2 | 25992.449 | 22.39 | 17.24 | 39.63 | 54.00 | -14.37 | AVG | | | |

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5180MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11ac VHT20---2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

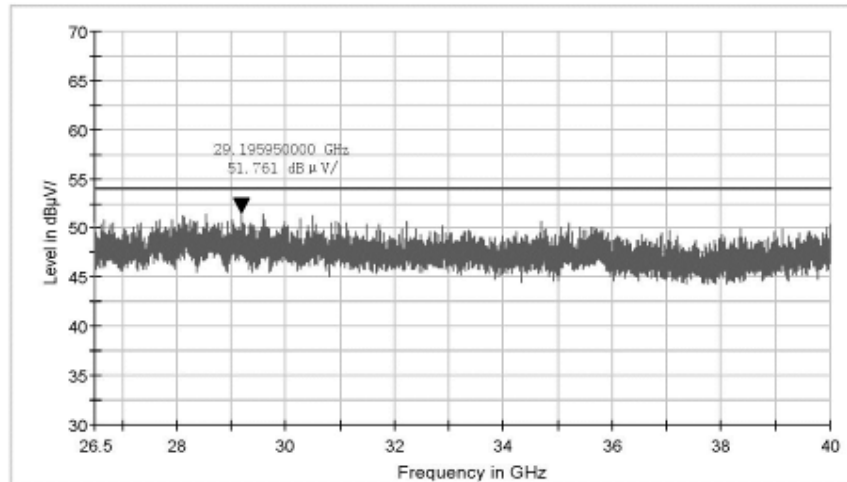

Radiated Emission


EUT Information

| | |
|-----------------|-----------------------------|
| EUT Model Name: | WiFi Advisor M/N:WFED-300AC |
| Operation mode: | TX 5200MHz |
| Test Voltage: | AC 120V/60Hz |
| Comment: | JDSU |

Common Information

| | |
|-------------------------|------------------------------------|
| Test Site: | SMQ EMC Lab. |
| Environment Conditions: | |
| Antenna Polarization: | Vertical |
| Operator Name: | |
| Comment: | 802.11ac VHT20---2TX (Beamforming) |

Copy of FCC Electric Field Strength 26.5-40GHz

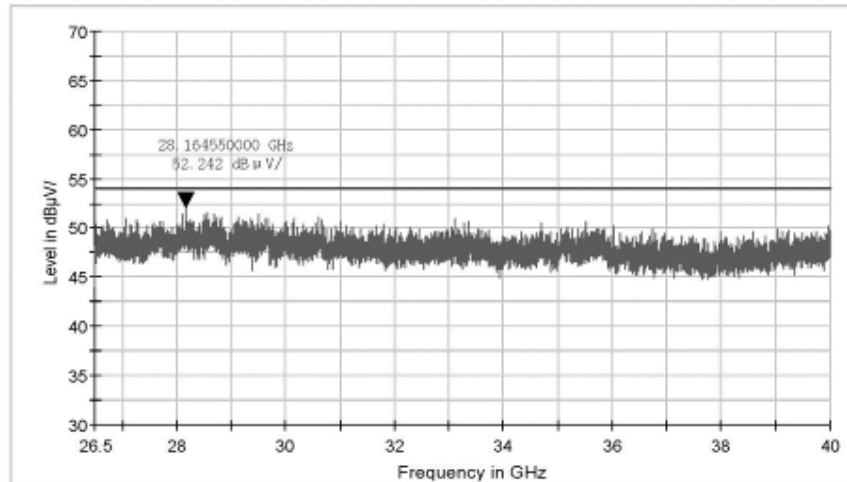

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5200MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11ac VHT20---2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

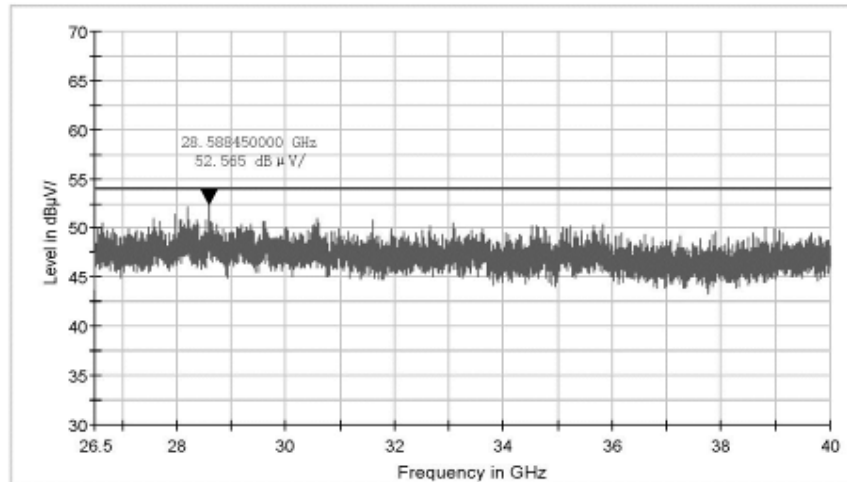

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5200MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Vertical
Operator Name:
Comment: 802.11ac VHT20---2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

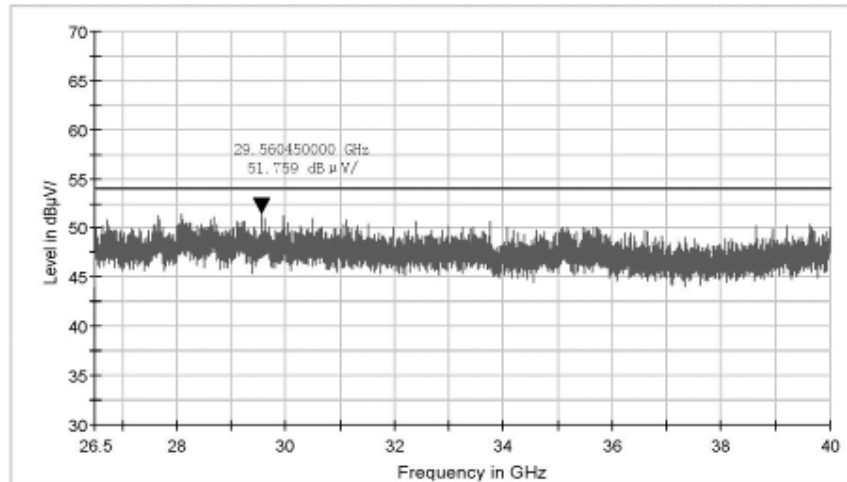

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5220MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11ac VHT20---2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

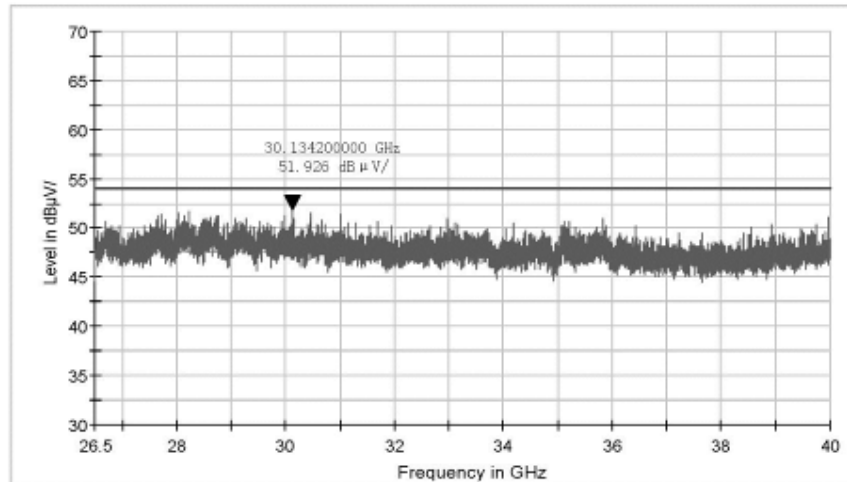

Radiated Emission


EUT Information

| | |
|-----------------|-----------------------------|
| EUT Model Name: | WiFi Advisor M/N:WFED-300AC |
| Operation mode: | TX 5220MHz |
| Test Voltage: | AC 120V/60Hz |
| Comment: | JDSU |

Common Information

| | |
|-------------------------|------------------------------------|
| Test Site: | SMQ EMC Lab. |
| Environment Conditions: | |
| Antenna Polarization: | Vertical |
| Operator Name: | |
| Comment: | 802.11ac VHT20---2TX (Beamforming) |

Copy of FCC Electric Field Strength 26.5-40GHz

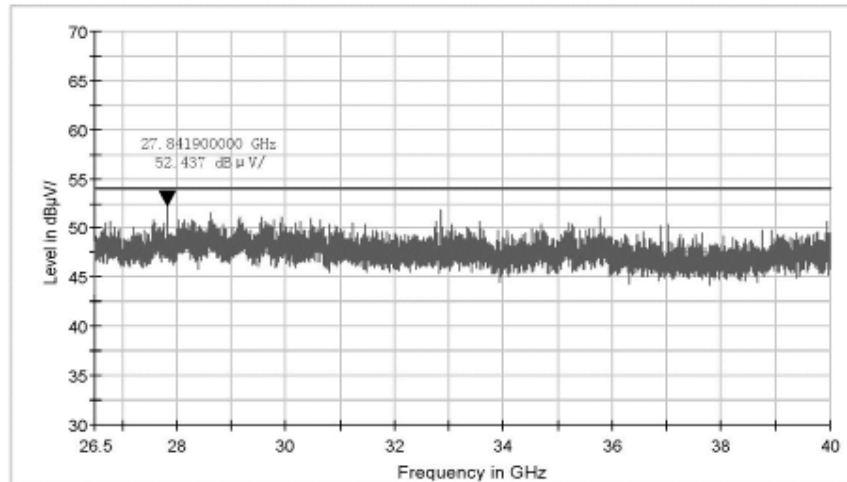

Test

1 / 1

Radiated Emission


EUT Information

EUT Model Name: WiFi Advisor M/N:WFED-300AC
Operation mode: TX 5240MHz
Test Voltage: AC 120V/60Hz
Comment: JDSU

Common Information

Test Site: SMQ EMC Lab.
Environment Conditions:
Antenna Polarization: Horizontal
Operator Name:
Comment: 802.11ac VHT20---2TX (Beamforming)

Copy of FCC Electric Field Strength 26.5-40GHz

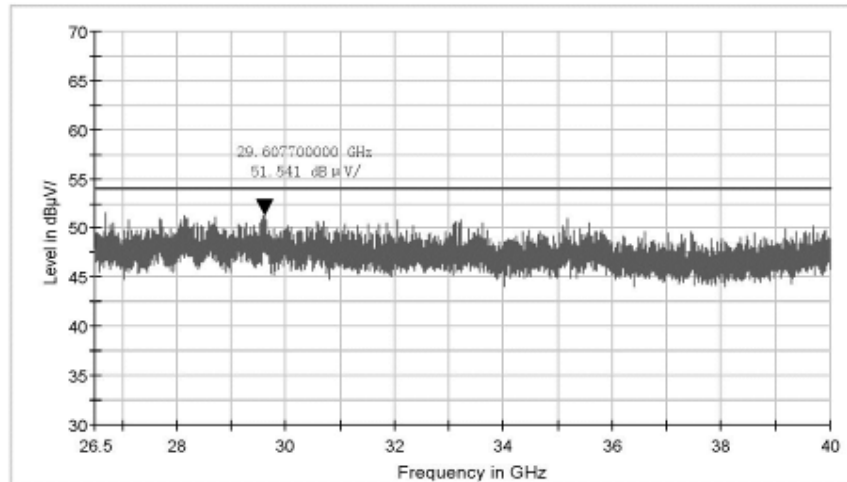

Test

1 / 1

Radiated Emission


EUT Information

| | |
|-----------------|-----------------------------|
| EUT Model Name: | WiFi Advisor M/N:WFED-300AC |
| Operation mode: | TX 5240MHz |
| Test Voltage: | AC 120V/60Hz |
| Comment: | JDSU |

Common Information

| | |
|-------------------------|------------------------------------|
| Test Site: | SMQ EMC Lab. |
| Environment Conditions: | |
| Antenna Polarization: | Vertical |
| Operator Name: | |
| Comment: | 802.11ac VHT20---2TX (Beamforming) |

Copy of FCC Electric Field Strength 26.5-40GHz

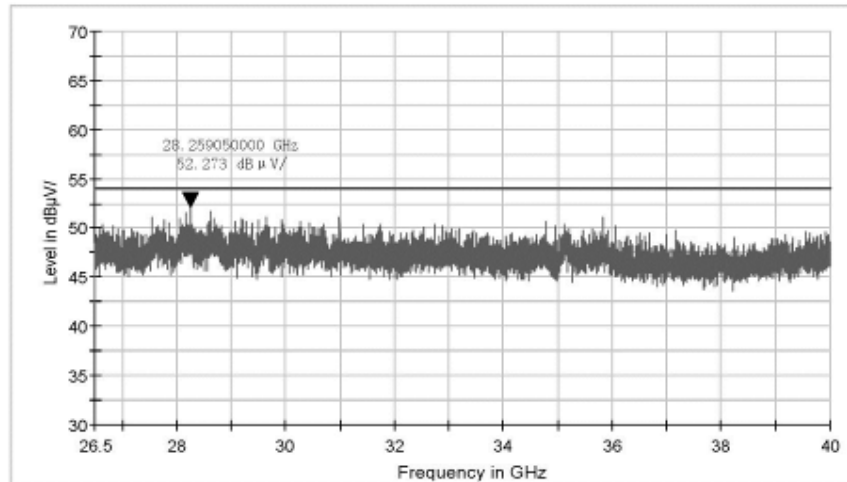

Produkte
 Products

802.11ac VHT20_3TX - Beamforming




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1888 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

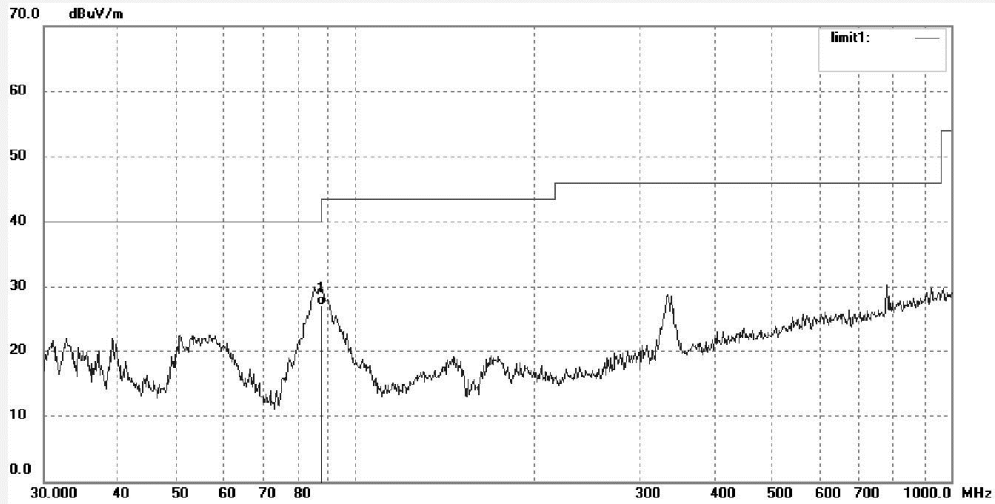

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 87.6052 | 42.48 | -15.23 | 27.25 | 40.00 | -12.75 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1889 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

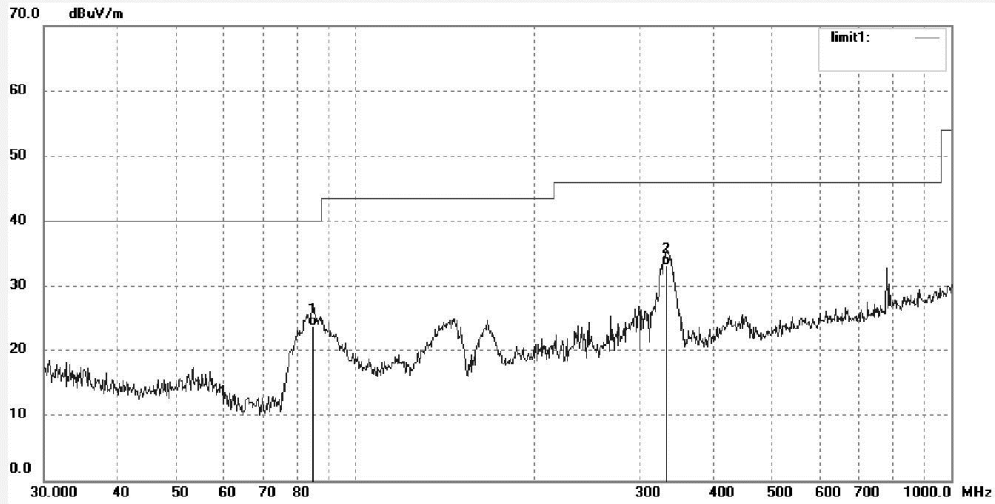

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 84.8783 | 39.35 | -15.42 | 23.93 | 40.00 | -16.07 | QP | | | |
| 2 | 332.9536 | 41.42 | -8.29 | 33.13 | 46.00 | -12.87 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1890 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

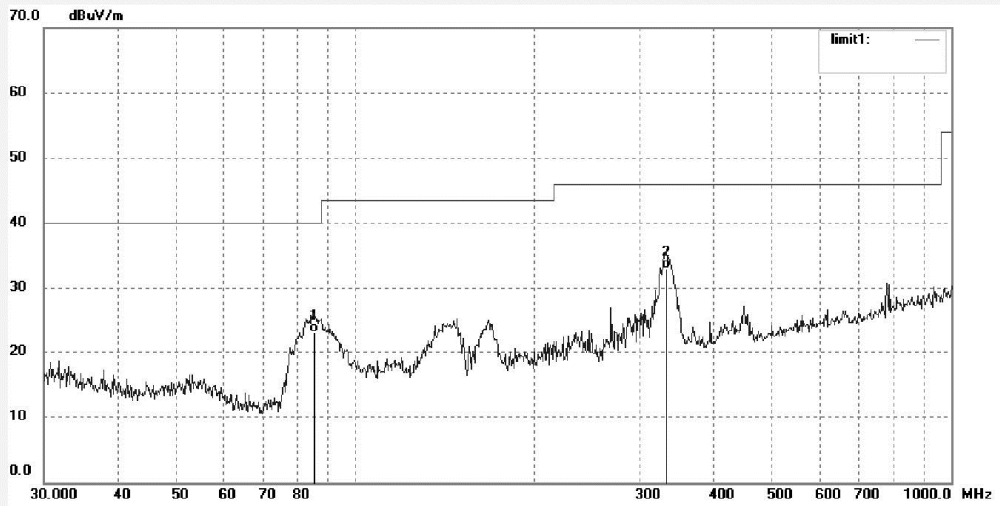

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 85.1771 | 38.60 | -15.38 | 23.22 | 40.00 | -16.78 | QP | | | |
| 2 | 332.9536 | 41.24 | -8.29 | 32.95 | 46.00 | -13.05 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1891 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

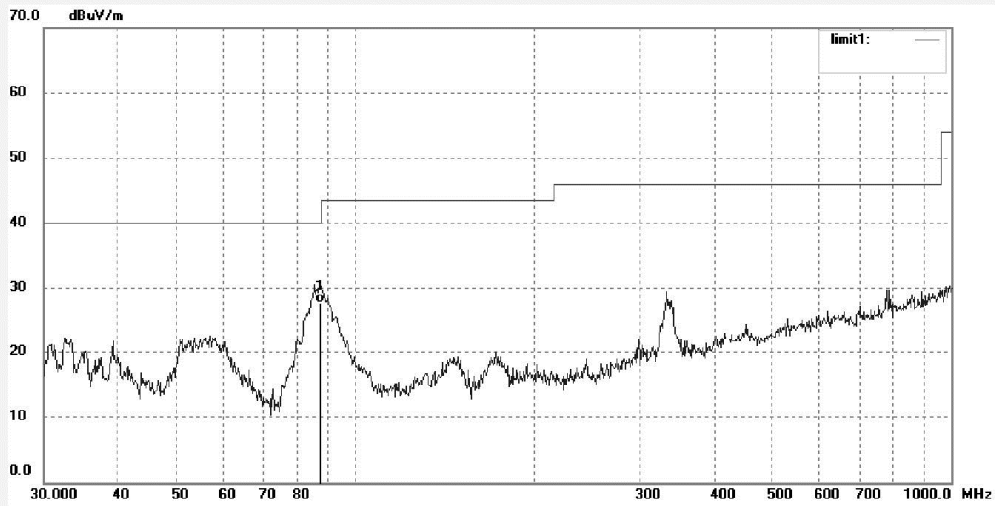

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 87.2980 | 42.92 | -15.24 | 27.68 | 40.00 | -12.32 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1892 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

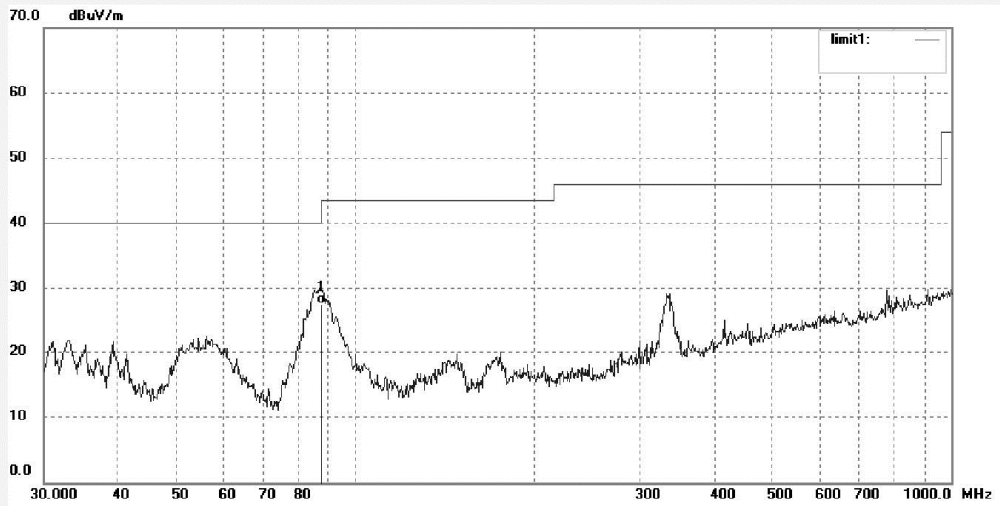

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 87.6052 | 42.86 | -15.23 | 27.63 | 40.00 | -12.37 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1893 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.1ac VHT20---3TX (Beamforming)

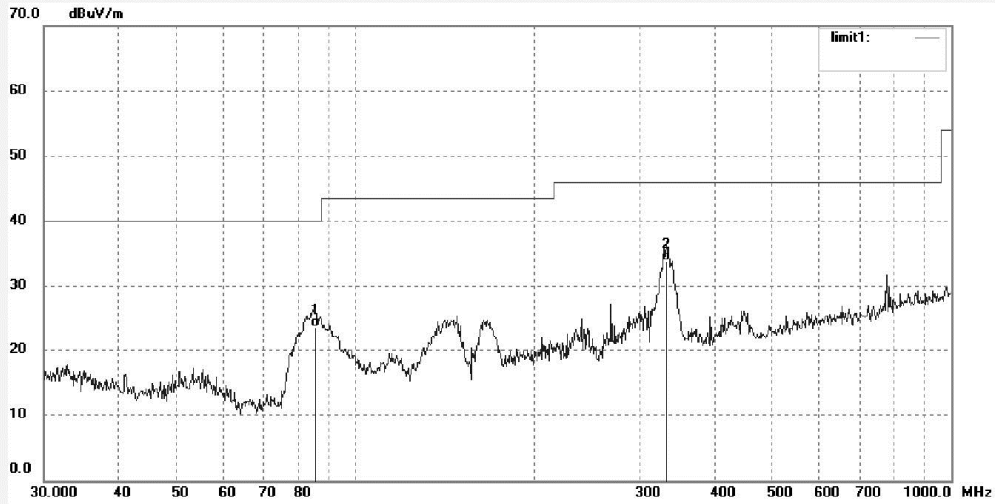

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 85.7777 | 38.97 | -15.34 | 23.63 | 40.00 | -16.37 | QP | | | |
| 2 | 331.7858 | 42.16 | -8.31 | 33.85 | 46.00 | -12.15 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1894 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

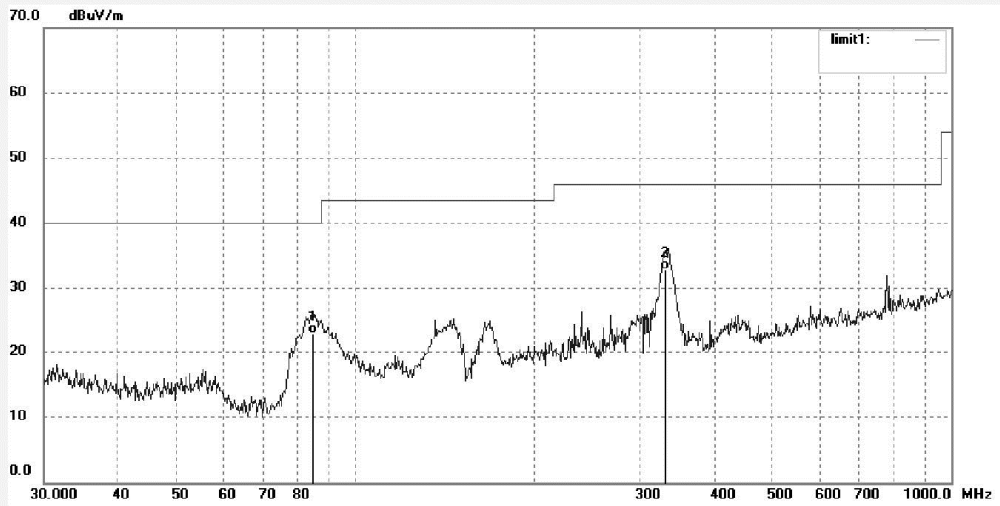

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 84.8783 | 38.35 | -15.42 | 22.93 | 40.00 | -17.07 | QP | | | |
| 2 | 330.6220 | 41.09 | -8.33 | 32.76 | 46.00 | -13.24 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #1895 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 14/11/15/ |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5240MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

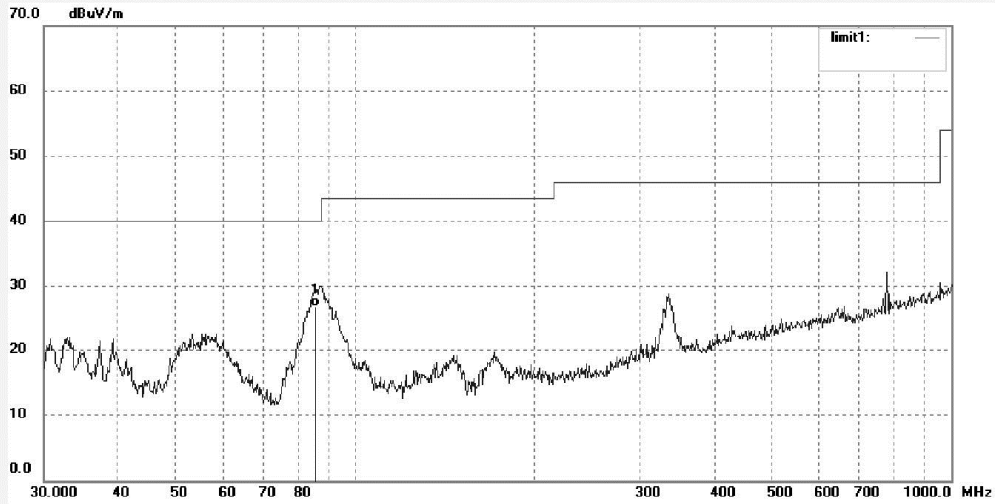

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 85.7777 | 42.27 | -15.34 | 26.93 | 40.00 | -13.07 | QP | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2048 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---3TX (Beamforming)

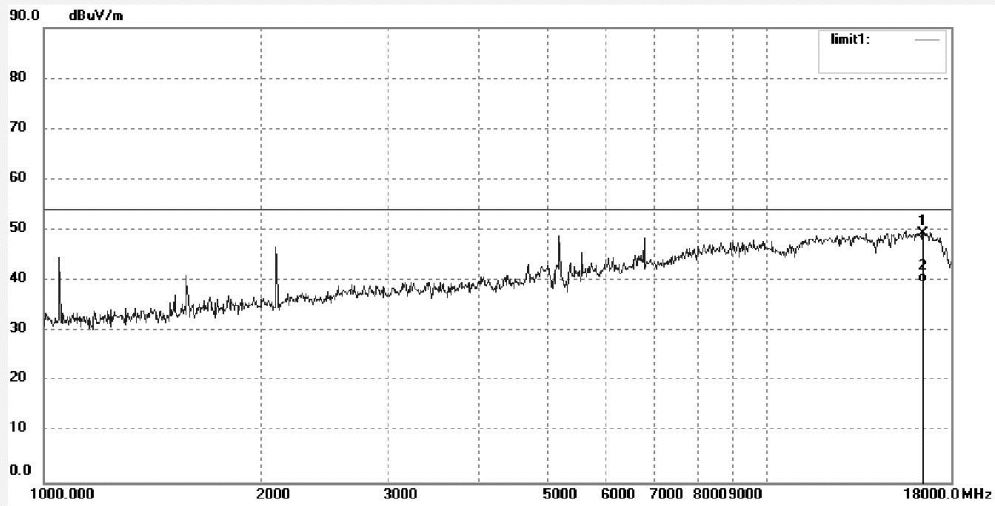

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16446.926 | 9.18 | 40.27 | 49.45 | 74.00 | -24.55 | peak | | | |
| 2 | 16446.926 | -0.49 | 40.27 | 39.78 | 54.00 | -14.22 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2049 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5180MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---3TX (Beamforming)

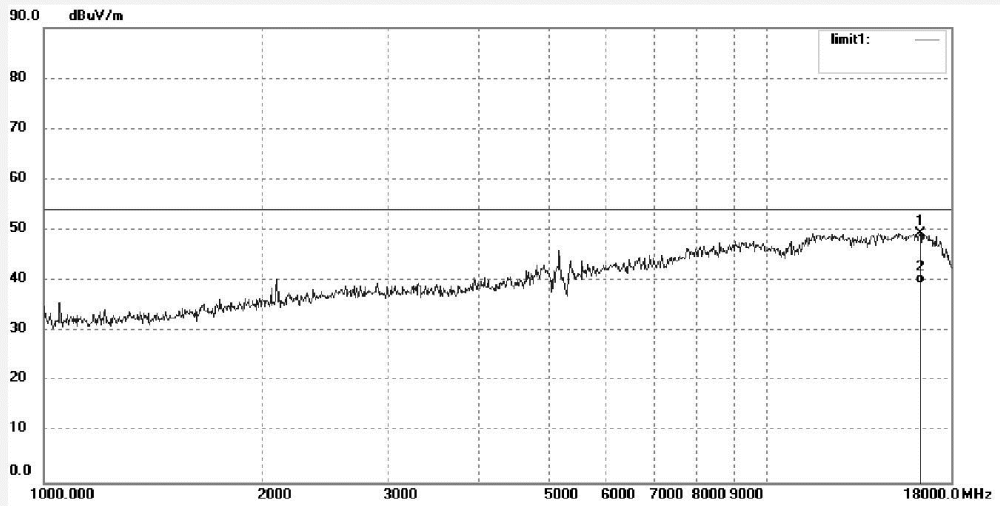

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16303.933 | 9.18 | 40.18 | 49.36 | 74.00 | -24.64 | peak | | | |
| 2 | 16303.933 | -0.73 | 40.18 | 39.45 | 54.00 | -14.55 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2050 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---3TX (Beamforming)

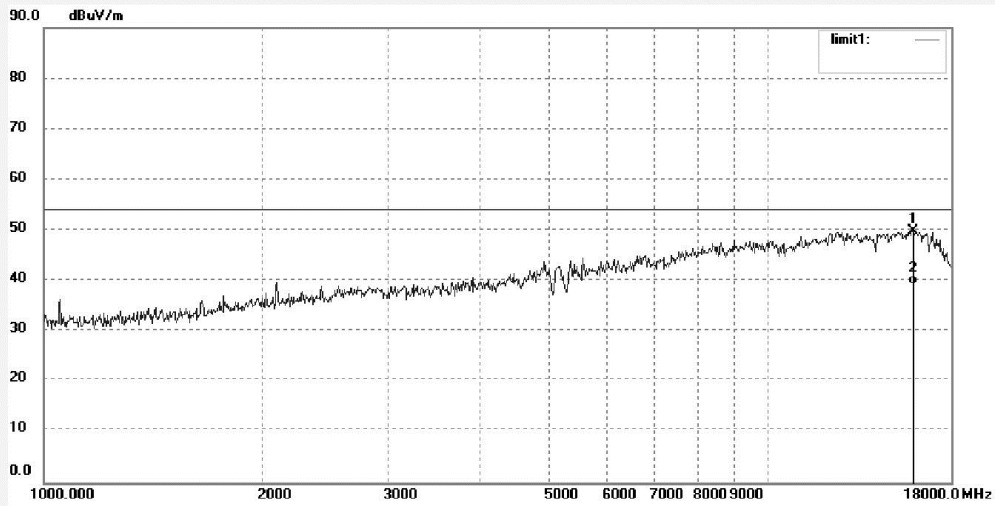

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 15928.666 | 9.86 | 40.01 | 49.87 | 74.00 | -24.13 | peak | | | |
| 2 | 15928.666 | -0.65 | 40.01 | 39.36 | 54.00 | -14.64 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2051 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5200MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---3TX (Beamforming)

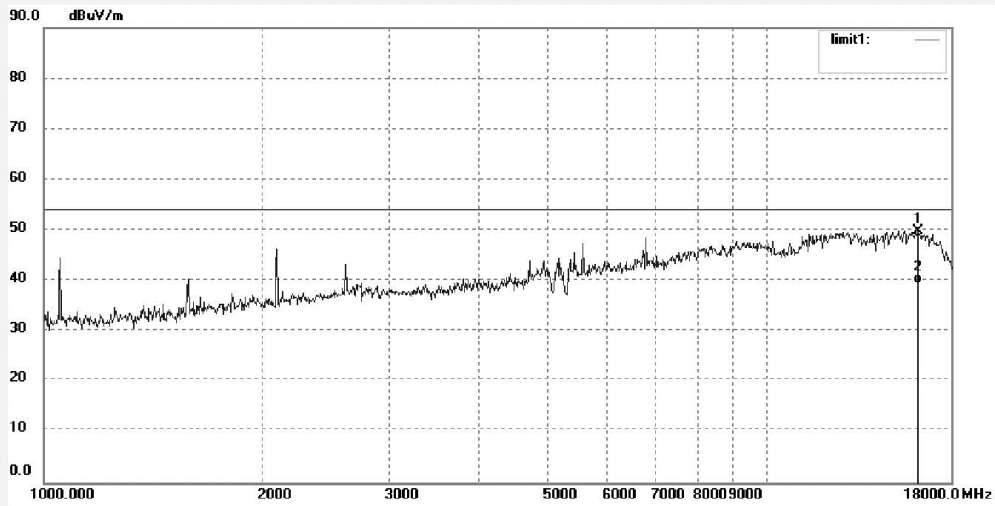

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16209.295 | 9.71 | 40.13 | 49.84 | 74.00 | -24.16 | peak | | | |
| 2 | 16209.295 | -0.63 | 40.13 | 39.50 | 54.00 | -14.50 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2052 | Polarization: Vertical |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20--3TX (Beamforming)

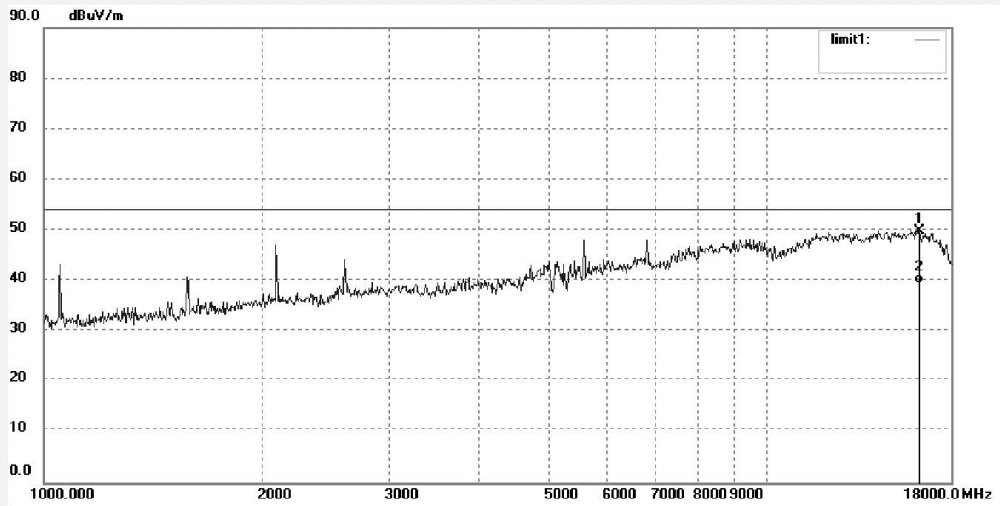

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16256.545 | 9.62 | 40.15 | 49.77 | 74.00 | -24.23 | peak | | | |
| 2 | 16256.545 | -0.71 | 40.15 | 39.44 | 54.00 | -14.56 | AVG | | | |

Produkte
 Products




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

| | |
|-----------------------------------|----------------------------|
| Job No.: pz #2053 | Polarization: Horizontal |
| Standard: FCC Class B 3M Radiated | Power Source: AC 120V/60Hz |
| Test item: Radiation Test | Date: 2014/11/16 |
| Temp.(C)/Hum.(%) 23 C / 48 % | Time: |
| EUT: WiFi Advisor | Engineer Signature: PEI |
| Mode: TX 5220MHz | Distance: 3m |
| Model: WFED-300AC | |
| Manufacturer: JDSU | |

Note: 802.11ac VHT20---3TX (Beamforming)

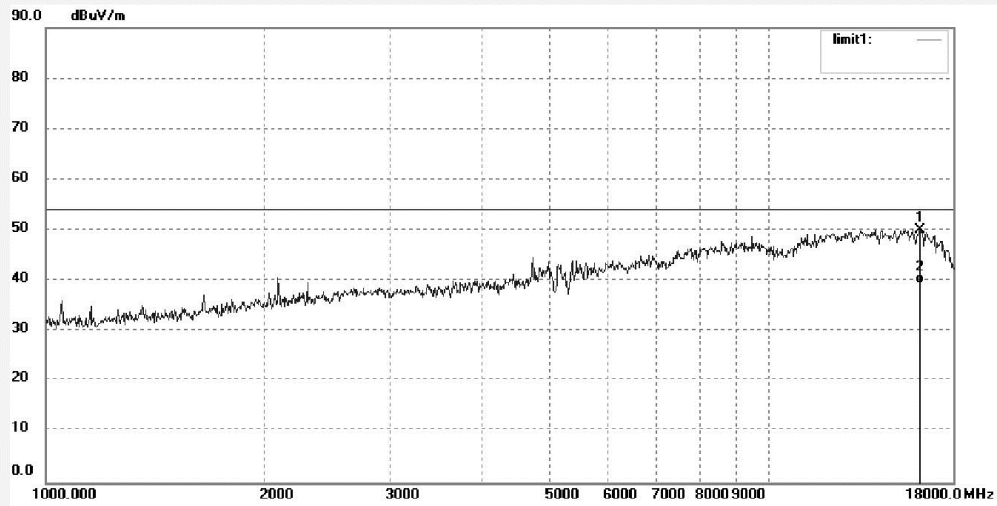

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Degree (deg.) | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|-------------|---------------|--------|
| 1 | 16162.183 | 10.01 | 40.10 | 50.11 | 74.00 | -23.89 | peak | | | |
| 2 | 16162.183 | -0.55 | 40.10 | 39.55 | 54.00 | -14.45 | AVG | | | |