


Appendix D. Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24.5°C	Humidity	56%
Test Engineer	Serway Li	Configurations	WLAN + GSM850 / Mode 1

Horizontal

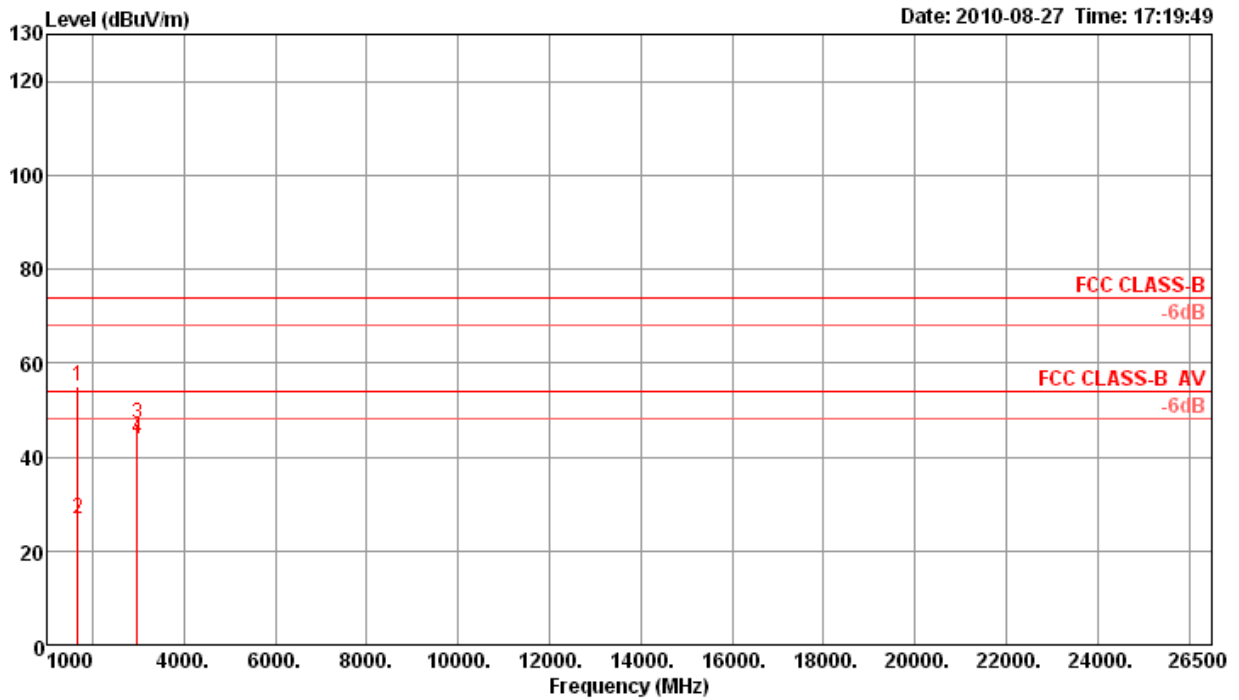

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	1674.10	55.05	74.00	-18.95	61.48	2.35	34.90	26.12	81	100	Peak	HORIZONTAL
2	1674.10	26.74	54.00	-27.26	33.17	2.35	34.90	26.12	81	100	Average	HORIZONTAL
3	2984.38	46.99	74.00	-27.01	49.12	3.21	35.19	29.85	137	100	Peak	HORIZONTAL
4 a	2984.40	43.66	54.00	-10.34	45.79	3.21	35.19	29.85	137	100	Average	HORIZONTAL

Vertical

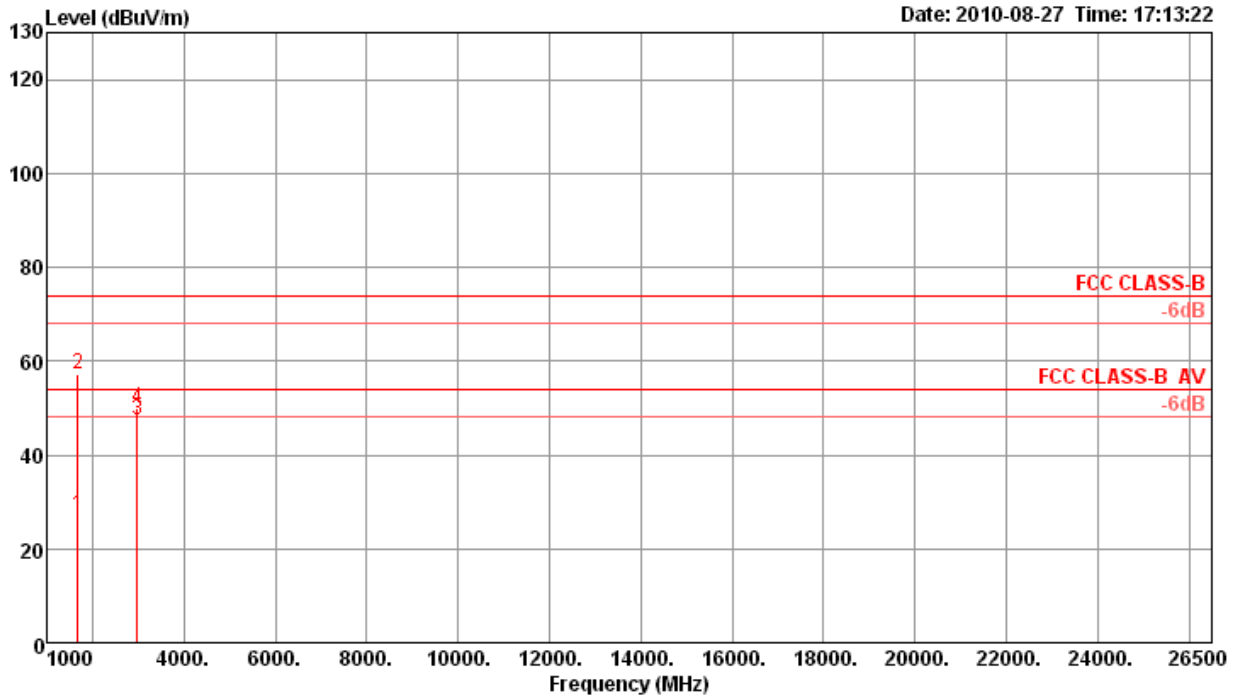

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	1673.92	27.32	54.00	-26.68	33.75	2.35	34.90	26.12	211	106	Average	VERTICAL
2 _p	1674.12	57.22	74.00	-16.78	63.65	2.35	34.90	26.12	211	106	Peak	VERTICAL
3 _a	2984.04	47.61	54.00	-6.39	49.74	3.21	35.19	29.85	83	100	Average	VERTICAL
4	2984.35	49.86	74.00	-24.14	51.99	3.21	35.19	29.85	83	100	Peak	VERTICAL