

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25



Deutsche  
Akkreditierungsstelle  
D-PL-12053-01-01

**Test Report acc. to FCC Title 47 CFR Part 15  
relating to  
R. Moroz Limited  
RML-HFMR102**

**Title 47 - Telecommunication  
Part 15 - Radio Frequency Devices  
Subpart C – Intentional Radiators  
Measurement Procedure:  
ANSI C63.4-2009**

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

<b>Applicant's details</b>	
Applicant	R. Moroz Limited
Applicant's grantee code	<b>WVF</b>
Applicant's address	19-25 Valleywood Drive
	Markham, Ontario L3R 5L9
	Canada
	Phone: +1 905.513.8919
	Fax: +1 905.513.7651
	Contact: Mr. Sam Aghigh
	Email: sama@rfidcanada.com
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-2009

<b>Test Report prepared by</b>	
Technical engineer	Ralf Trepper
	m. dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	51429 Bergisch Gladbach
	Germany
	Phone: +49 2207 96890
	Fax: +49 2207 968920
	Email: m.duddelabor@dudde.com

<b>Equipment Under Test (EUT)</b>	
Equipment category	Inductive application / RFID
Trade name	OBID i-scan
Type designation	RML-HFMR102
Serial no.	---
Variants	RML-HFMR102-A, RML-HFMRM102-A, RML-HFMR102-B, RML-HFMR102-USB, RML-HFMRM102-USB, RML-HFMR102-PoE
Antennas	RML-HFANT500/500-B RML-HFANT500/300-B

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102


Date of issue: 2012-01-25


**1. Test results**

Clause	Requirements headline	Test result			Report page number
		Pass	Fail	Not*	
8.1	Antenna Requirement	Pass	<del>Fail</del>	<del>Not*</del>	10
8.2	Restricted bands of operation	Pass	<del>Fail</del>	<del>Not*</del>	11 to 12
8.3	Conducted limits	Pass	<del>Fail</del>	<del>Not*</del>	13 to 19
8.4	Radiated emission limits	Pass	<del>Fail</del>	<del>Not*</del>	20 to 28
8.5	Frequency tolerance	Pass	<del>Fail</del>	<del>Not*</del>	29 to 31

\* Not tested

<b>The equipment meets the requirements</b>	<b>Yes</b>	<del>No</del>
---	------------	---------------

Signature:   
 (Technician)

Signature:   
 (Manager)

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## Table of contents

1. Test results.....	3
2. Introduction.....	5
3. Testing laboratory.....	5
4. Applicant.....	6
5. Product and product documentation .....	6
6. Conclusions, observations and comments .....	7
7. Operational description.....	8
8. Compliance assessment .....	10
8.1 Antenna requirement .....	10
8.1.1 Regulation.....	10
8.1.2 Result .....	10
8.2 Restricted bands of operation .....	11
8.2.1 Regulation.....	11
8.2.2 Result .....	12
8.3 Conducted limits .....	13
8.3.1 Regulation.....	13
8.3.2 Test equipment .....	14
8.3.3 Test procedures.....	14
8.3.4 Result .....	15
8.4 Radiated emission limits .....	20
8.4.1 Regulation.....	20
8.4.2 Test equipment .....	21
8.4.3 Test procedure .....	22
8.4.4 Calculation of the field strength .....	23
8.4.5 Result .....	24
8.5 Frequency tolerance .....	29
8.5.1 Regulation.....	29
8.5.2 Test equipment .....	29
11.5.3 Test procedures.....	29
8.5.4 Result .....	31
9. Additional information to the test report .....	32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 2. Introduction

This test report consists of:

- Test result summary
- List of contents
- Introduction and further information
- Performance assessment
- Detailed test information

All pages have been numbered consecutively and bear the m. dudde hochfrequenz-technik logo, the test report number, the date, the test specification in its current version as well as the type designation of the EUT. The total number of pages in this report is **33**.

The tests were carried out at:

**- m. dudde hochfrequenz-technik, D-51429 Bergisch Gladbach**

in a representative assembly and in accordance with the test methods and/or requirements stated in:

**FCC Title 47 CFR Part 15 Subpart C & ANSI C63.4-2009**

The sample of the product was received on:

**- 2011-11-24**

The tests were carried out in the following period of time:

**- 2011-11-24 – 2011-11-24**

## 3. Testing laboratory

m. dudde hochfrequenz-technik  
Rottland 5a, 51429 Bergisch Gladbach, Germany

Phone: +49 - (0) 22 07 / 96 89-0

Fax: +49 - (0) 22 07 / 96 89-20

- FCC Registration Number: **699717**

Accredited by:

**DAkkS Deutsche Akkreditierungsstelle GmbH**

**DAkkS accreditation number: D-PL-12053-01**

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

#### 4. Applicant

Company name : R. Moroz Limited  
Address : 19-25 Valleywood Drive  
Markham, Ontario L3R 5L9  
Country : Canada  
Telephone : +1 905.513.8919  
Fax : +1 905.513.7651  
Email : sama@rfidcanada.com  
Date of order : 2011-11-23  
References : Mr. Sam Aghigh

#### 5. Product and product documentation

Samples of the following apparatus were submitted for testing:

Manufacturer : FEIG ELECTRONIC GmbH  
Trademark : OBID i-scan  
Type designation : **RML-HFMR102**  
Hardware version : RML-HFMR102  
Serial number : ---  
Software release : ---  
Type of equipment : RFID  
Power used : 24.0 V DC  
Frequency used : 13.560 MHz  
Generated frequencies : 13.560 MHz (Crystal), 25.0 MHz (Crystal),  
13.560 MHz (Carrier)  
ITU emission class : 168K A1D

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

For issuing this report the following product documentation was used:

Description	Date	Identifications
External photographs of the Equipment Under Test (EUT)	2012-01-25	Annex no. 1
Internal photographs of the Equipment Under Test (EUT)	2012-01-25	Annex no. 2
Channel occupancy / bandwidth	2012-01-25	Annex no. 3
Label sample	2012-01-25	Annex no. 4
Functional description / User manual	2012-01-25	Annex no. 5
Test setup photos	2012-01-25	Annex no. 6
Block diagram	2012-01-25	Annex no. 7
Operational description	2012-01-25	Annex no. 8
Schematics	2012-01-25	Annex no. 9
Parts list	2012-01-25	Annex no. 10
Periodic operation characteristics / Transmission times	---	Annex no. 11
Antenna characteristics / Antenna description	2012-01-25	Annex no. 12

## 6. Conclusions, observations and comments

The test report will be filed at m. dudde hochfrequenz-technik for a period of 10 years following the issue of this report. It may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz-technik.

The results of the tests as stated in this report are exclusively applicable to the EUT as identified in this report. m. dudde hochfrequenz-technik cannot be held liable for properties of the EUT that have not been observed during these tests.

m. dudde hochfrequenz-technik assumes the sample to comply with the requirements of FCC Title 47 CFR Part 15 for the respective test sector, if the test results turn out positive.

**Comments: The variant RML-HFMRM102-A is technical identically to the RML-HFMR102-A and the variant RML-HFMRM102-USB is technical identically to the RML-HFMR102-USB. The only difference is that the M variants have no housing.**

Date : 2012-01-25



Date : 2012-01-25

Name : Ralf Trepper

Name : Manfred Dudde

Function : Technician

Function : Manager

Signature : Signature : 

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25


## 7. Operational description

### 7.1 EUT details

The RFID Reader System including the RML-HFMR102 works at a frequency of 13.56 MHz. It comprises a reader, one antenna and transponder (for example: smart label) and is used for wireless identification of a variety of objects.

### 7.2 EUT configurations

- 1.) The Reader RML-HFMR102-A comes with a asynchronous RS232 interface.  
The Reader RML-HFMR102-B comes with a asynchronous RS485 interface.  
The Reader RML-HFMR102-PoE comes with a LAN interface.  
The Reader RML-HFMR102-USB comes with an USB interface.

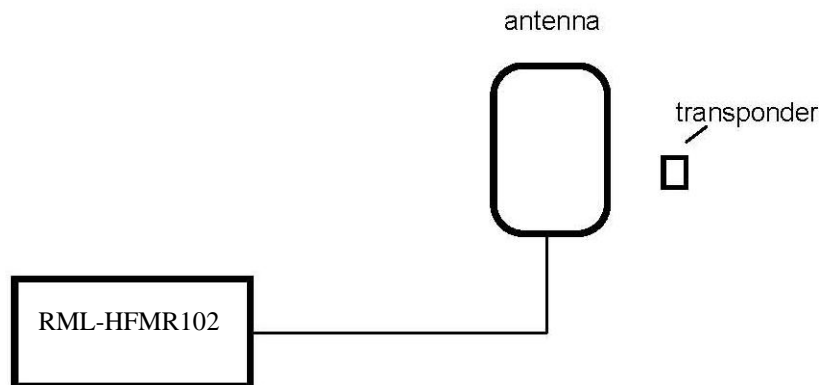



EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

### 7.3 EUT measurement description

#### Radiated measurements

The RML-HFMR102 was tested in a typical fashion with the combinations described in 7.2. During preliminary emission tests the RML-HFMR102 was operated in the continuous transmitting mode for worst case emission mode investigation. Therefore, the final qualification testing was completed with RML-HFMR102PoE in combination with all antenna variants operated in continuous mode. Additionally the RML-HFMR102 -PoE was tested separately in continuous mode.

All tests were performed with the applicant's declared maximum voltage: 24 V DC

In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments of the test samples, secondly the test ample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical had been varied.

#### Conducted measurements

- 1.) The device was connected to the artificial mains network via an USB- connector to the USB- port of a HP Notebook and this to the artificial mains network. It has been tested in two runs: first, with inactive RML-HFMR102, second with activated RML-HFMR102 in read write mode to read user data and write user data into different tags.
- 2.) The device was connected to the artificial mains network via an LAN- connector to the LAN- port of a HP Notebook and this to the artificial mains network. It has been tested in two runs: first, with inactive RML-HFMR102, second with activated RML-HFMR102 in read write mode to read user data and write user data into different tags.
- 3.) The device was connected to the artificial mains network via the external power supply *PS18A* and this to the artificial mains network. It has been tested in two runs: first, with inactive RML-HFMR102, second with activated RML-HFMR102 in read write mode to read user data and write user data into different tags.

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8. Compliance assessment

### 8.1 Antenna requirement

#### 8.1.1 Regulation

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 8.1.2 Result

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
Further test results are attached	<del>Yes</del>	No	Page no.

**Dedicated antennas limited to the following types:**

**RML-HFANT500/500-B**  
**RML-HFANT500/300-B**

**Installation, operation, and maintenance procedures should only be carried out by qualified personnel!**

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.2 Restricted bands of operation

### 8.2.1 Regulation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

(d) The following devices are exempt from the requirements of this Section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

## 8.2.2 Result

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
Further test results are attached	<del>Yes</del>	No	Page no.

N.t.\* See page no. 32

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

### 8.3 Conducted limits

#### 8.3.1 Regulation

(a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50ohms line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.50	66 to 56*	56 to 46*
0.50-5.0	56	46
5.0-30.0	60	50

\* Decreases with the logarithm of the frequency

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

### 8.3.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Calibration executed by
Receiver (9 kHz - 30MHz)	Schwarzbeck FMLK 1518 (428)	1518294 9360	08/2010	08/2013	---
Panorama- Monitor FMLK / VUMA	PAZ1550 (429)	---	---	---	---
Protector limiter 9 kHz - 30MHz 10 dB	Rhode & Schwarz ESH 3Z2 (272)	357,881052	09/2011	09/2013	Dudde
V-LISN 50 ohms/(50 uH+5 ohms)	RFT NNB 11 (72)	13835240	07/2010	07/2013	Dudde
V-LISN 50 ohms/(50 uH+5 ohms)	EMCO (49b)	9512-1227	07/2011	07/2014	Dudde
RF- cable	Aircell 1.5m [BNC/N]	K30	09/2011	09/2012	Dudde

### 8.3.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4-2009 Section 7.

Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

### 8.3.4 Result

Tested with external AC/DC power supply (power supply PS18A)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB $\mu$ V]	Spec. limit (average) [dB $\mu$ V]	Margin [dB]	Remarks
L1	0.177	9	<b>42.0</b>	54.7	<b>12.7</b>	* <sup>2</sup>
N	0.177	9	<b>42.0</b>	54.7	<b>12.7</b>	* <sup>2</sup>
L1	0.220	9	-2	52.7	54.7	* <sup>2</sup>
N	0.220	9	-2	52.7	54.7	* <sup>2</sup>
L1	0.294	9	-2	50.3	52.3	* <sup>2</sup>
N	0.294	9	-2	50.3	52.3	* <sup>2</sup>
L1	0.584	9	-2	46	48.0	* <sup>2</sup>
N	0.584	9	-2	46	48.0	* <sup>2</sup>
L1	0.600	9	-2	46	48.0	* <sup>1</sup>
N	0.600	9	-2	46	48.0	* <sup>1</sup>
L1	0.775	9	-2	46	48.0	* <sup>1</sup>
N	0.775	9	-2	46	48.0	* <sup>1</sup>
L1	0.850	9	-2	46	48.0	* <sup>1</sup>
N	0.850	9	-2	46	48.0	* <sup>1</sup>
L1	1.000	9	-2	46	48.0	* <sup>1</sup>
N	1.000	9	-2	46	48.0	* <sup>1</sup>
L1	1.250	9	-2	46	48.0	* <sup>1</sup>
N	1.250	9	-2	46	48.0	* <sup>1</sup>
L1	1.150	9	<b>30.0</b>	46	<b>16.0</b>	* <sup>2</sup>
N	1.150	9	<b>30.5</b>	46	<b>15.5</b>	* <sup>2</sup>
L1	4.000	9	-2	46	48.0	* <sup>1</sup>
N	4.000	9	-2	46	48.0	* <sup>1</sup>
L1	6.7644	9	-2	50	52.0	* <sup>1</sup>
N	6.7644	9	-2	50	52.0	* <sup>1</sup>
L1	13.8700	9	<b>28.0</b>	50	<b>22.0</b>	* <sup>1</sup>
N	13.8700	9	<b>28.0</b>	50	<b>22.0</b>	* <sup>1</sup>
L1	20.2931	9	-2	50	52.0	* <sup>1</sup>
N	20.2931	9	-2	50	52.0	* <sup>1</sup>
L1	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>
N	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>

Remark: \*<sup>1</sup> Noise level of the measuring instrument  $\leq -2\text{dB}\mu\text{V}$  (0.009 – 30MHz)

Remark: \*<sup>2</sup> Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

Tested with a Laptop over USB port (RML-HFMR102 not active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB $\mu$ V]	Spec. limit (average) [dB $\mu$ V]	Margin [dB]	Remarks
L1	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
N	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
L1	0.301	9	-2	51.7	53.7	* <sup>1</sup>
N	0.301	9	-2	51.7	53.2	* <sup>1</sup>
L1	0.475	9	-2	47	49.0	* <sup>1</sup>
N	0.475	9	-2	47	49.0	* <sup>1</sup>
L1	0.600	9	-2	46	48.0	* <sup>1</sup>
N	0.600	9	-2	46	48.0	* <sup>1</sup>
L1	0.775	9	-2	46	48.0	* <sup>2</sup>
N	0.775	9	-2	46	48.0	* <sup>2</sup>
L1	0.850	9	-2	46	48.0	* <sup>1</sup>
N	0.850	9	-2	46	48.0	* <sup>1</sup>
L1	1.000	9	-2	46	48.0	* <sup>1</sup>
N	1.000	9	-2	46	48.0	* <sup>1</sup>
L1	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
N	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
L1	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
N	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
L1	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
N	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
L1	6.7644	9	-2	50	52.0	* <sup>1</sup>
N	6.7644	9	-2	50	52.0	* <sup>1</sup>
L1	13.5288	9	-2	50	52.0	* <sup>1</sup>
N	13.5288	9	-2	50	52.0	* <sup>1</sup>
L1	20.2931	9	-2	50	52.0	* <sup>1</sup>
N	20.2931	9	-2	50	52.0	* <sup>1</sup>
L1	27.0575	9	-2	50	52.0	* <sup>1</sup>
N	27.0575	9	-2	50	52.0	* <sup>1</sup>

Remark: \*<sup>1</sup> Noise level of the measuring instrument  $\leq$  -2dB $\mu$ V (0.009 – 30MHz)Remark: \*<sup>2</sup> Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	<b>Yes</b>	<del>No</del>	<del>N.t.</del>
--------------------------------------	------------	---------------	-----------------

Further test results are attached	<del>Yes</del>	<b>No</b>	Page no.
-----------------------------------	----------------	-----------	----------

N.t.\* See page no. 32



EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## Tested with a Laptop over USB port (RML-HFMR102 active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB $\mu$ V]	Spec. limit (average) [dB $\mu$ V]	Margin [dB]	Remarks
L1	0.1770	9	<b>42.0</b>	55.4	<b>13.4</b>	* <sup>2</sup>
N	0.1770	9	<b>42.0</b>	55.4	<b>13.4</b>	* <sup>2</sup>
L1	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
N	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
L1	0.301	9	-2	51.7	53.7	* <sup>1</sup>
N	0.301	9	-2	51.7	53.2	* <sup>1</sup>
L1	0.475	9	-2	47	49.0	* <sup>1</sup>
N	0.475	9	-2	47	49.0	* <sup>1</sup>
L1	0.600	9	-2	46	48.0	* <sup>1</sup>
N	0.600	9	-2	46	48.0	* <sup>1</sup>
L1	0.775	9	-2	46	48.0	* <sup>2</sup>
N	0.775	9	-2	46	48.0	* <sup>2</sup>
L1	0.850	9	-2	46	48.0	* <sup>1</sup>
N	0.850	9	-2	46	48.0	* <sup>1</sup>
L1	1.150	9	<b>30.0</b>	46	<b>48.0</b>	* <sup>2</sup>
N	1.150	9	<b>30.0</b>	46	<b>48.0</b>	* <sup>2</sup>
L1	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
N	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
L1	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
N	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
L1	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
N	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
L1	3.186	9	<b>33.0</b>	46	<b>13.0</b>	* <sup>2</sup>
N	3.186	9	<b>33.0</b>	46	<b>13.0</b>	* <sup>2</sup>
L1	6.7644	9	-2	50	52.0	* <sup>1</sup>
N	6.7644	9	-2	50	52.0	* <sup>1</sup>
L1	13.870	9	<b>28.0</b>	50	<b>22.0</b>	* <sup>2</sup>
N	13.870	9	<b>28.0</b>	50	<b>22.0</b>	* <sup>2</sup>
L1	20.2931	9	-2	50	52.0	* <sup>1</sup>
N	20.2931	9	-2	50	52.0	* <sup>1</sup>
L1	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>
N	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>

Remark: \*<sup>1</sup> Noise level of the measuring instrument  $\leq -2\text{dB}\mu\text{V}$  (0.009 – 30MHz)Remark: \*<sup>2</sup> Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	Yes	<del>No</del>	<del>N/A</del>
Further test results are attached	<del>Yes</del>	No	Page no.

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

Tested with a Laptop over LAN port (RML-HFMR102 not active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB $\mu$ V]	Spec. limit (average) [dB $\mu$ V]	Margin [dB]	Remarks
L1	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
N	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
L1	0.301	9	-2	51.7	53.7	* <sup>1</sup>
N	0.301	9	-2	51.7	53.2	* <sup>1</sup>
L1	0.475	9	-2	47	49.0	* <sup>1</sup>
N	0.475	9	-2	47	49.0	* <sup>1</sup>
L1	0.600	9	-2	46	48.0	* <sup>1</sup>
N	0.600	9	-2	46	48.0	* <sup>1</sup>
L1	0.775	9	-2	46	48.0	* <sup>2</sup>
N	0.775	9	-2	46	48.0	* <sup>2</sup>
L1	0.850	9	-2	46	48.0	* <sup>1</sup>
N	0.850	9	-2	46	48.0	* <sup>1</sup>
L1	1.000	9	-2	46	48.0	* <sup>1</sup>
N	1.000	9	-2	46	48.0	* <sup>1</sup>
L1	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
N	1.787	9	<b>29.0</b>	46	<b>17.0</b>	* <sup>2</sup>
L1	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
N	2.084	9	<b>29.5</b>	46	<b>16.5</b>	* <sup>2</sup>
L1	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
N	2.423	9	<b>25.0</b>	46	<b>21.0</b>	* <sup>2</sup>
L1	6.7644	9	-2	50	52.0	* <sup>1</sup>
N	6.7644	9	-2	50	52.0	* <sup>1</sup>
L1	13.5288	9	-2	50	52.0	* <sup>1</sup>
N	13.5288	9	-2	50	52.0	* <sup>1</sup>
L1	20.2931	9	-2	50	52.0	* <sup>1</sup>
N	20.2931	9	-2	50	52.0	* <sup>1</sup>
L1	27.0575	9	-2	50	52.0	* <sup>1</sup>
N	27.0575	9	-2	50	52.0	* <sup>1</sup>

Remark: \*<sup>1</sup> Noise level of the measuring instrument  $\leq$  -2dB $\mu$ V (0.009 – 30MHz)Remark: \*<sup>2</sup> Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	<b>Yes</b>	<del>No</del>	<del>N.t.</del>
--------------------------------------	------------	---------------	-----------------

Further test results are attached	<del>Yes</del>	<b>No</b>	Page no.
-----------------------------------	----------------	-----------	----------

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## Tested with a Laptop over LAN port (RML-HFMR102 active)

CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB $\mu$ V]	Spec. limit (average) [dB $\mu$ V]	Margin [dB]	Remarks
L1	0.1680	9	<b>50.0</b>	55.4	<b>5.4</b>	* <sup>2</sup>
N	0.1680	9	<b>50.0</b>	55.4	<b>5.4</b>	* <sup>2</sup>
L1	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
N	0.1960	9	<b>44.0</b>	55.3	<b>11.3</b>	* <sup>2</sup>
L1	0.301	9	-2	51.7	53.7	* <sup>1</sup>
N	0.301	9	-2	51.7	53.2	* <sup>1</sup>
L1	0.475	9	-2	47	49.0	* <sup>1</sup>
N	0.475	9	-2	47	49.0	* <sup>1</sup>
L1	0.600	9	-2	46	48.0	* <sup>1</sup>
N	0.600	9	-2	46	48.0	* <sup>1</sup>
L1	0.775	9	-2	46	48.0	* <sup>2</sup>
N	0.775	9	-2	46	48.0	* <sup>2</sup>
L1	0.850	9	-2	46	48.0	* <sup>1</sup>
N	0.850	9	-2	46	48.0	* <sup>1</sup>
L1	1.150	9	-2	46	48.0	* <sup>1</sup>
N	1.150	9	-2	46	48.0	* <sup>1</sup>
L1	1.787	9	-2	46	48.0	* <sup>1</sup>
N	1.787	9	-2	46	48.0	* <sup>1</sup>
L1	2.833	9	<b>33.0</b>	46	<b>13.0</b>	* <sup>2</sup>
N	2.833	9	<b>33.0</b>	46	<b>13.0</b>	* <sup>2</sup>
L1	4.500	9	-2	46	48.0	* <sup>1</sup>
N	4.500	9	-2	46	48.0	* <sup>1</sup>
L1	5.297	9	<b>35.0</b>	46	<b>11.0</b>	* <sup>2</sup>
N	5.297	9	<b>35.0</b>	46	<b>11.0</b>	* <sup>2</sup>
L1	10.060	9	<b>37.0</b>	50	<b>13.0</b>	* <sup>2</sup>
N	10.060	9	<b>37.0</b>	50	<b>13.0</b>	* <sup>2</sup>
L1	12.199	9	<b>40.0</b>	50	<b>10.0</b>	* <sup>2</sup>
N	12.199	9	<b>40.0</b>	50	<b>10.0</b>	* <sup>2</sup>
L1	14.151	9	<b>40.0</b>	50	<b>10.0</b>	* <sup>2</sup>
N	14.151	9	<b>40.0</b>	50	<b>10.0</b>	* <sup>2</sup>
L1	16.228	9	<b>42.0</b>	50	<b>8.0</b>	* <sup>2</sup>
N	16.228	9	<b>42.0</b>	50	<b>8.0</b>	* <sup>2</sup>
L1	21.665	9	<b>39.0</b>	50	<b>11.0</b>	* <sup>2</sup>
N	21.665	9	<b>39.0</b>	50	<b>11.0</b>	* <sup>2</sup>
L1	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>
N	27.120	9	<b>30.0</b>	50	<b>20.0</b>	* <sup>2</sup>

Remark: \*<sup>1</sup> Noise level of the measuring instrument  $\leq -2\text{dB}\mu\text{V}$  (0.009 – 30MHz)Remark: \*<sup>2</sup> Quasi peak measurements lower than “Specified Average Limit”

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

Date: 2011-03-14

Vers. no. 1.11

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.4 Radiated emission limits

### 8.4.1 Regulation

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.4.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Calibration executed by
OATS	Dudde (104)	---	08/2010	08/2012	Dudde
Digital Multimeter	GW GDM-8045G (144)	0090256	08/2011	08/2014	Dudde
Receiver (9 kHz - 18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	11/2010	11/2012	Rohde & Schwarz
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	01/2010	01/2012	Dudde
Pre-amplifier (1GHz - 18GHz)	Narda --- (345)	---	01/2010	01/2012	Dudde
Magnetic loop antenna (9 kHz - 30 MHz)	Schwarzbeck FMZB 1516 (23)	---	05/2010	05/2013	Dudde
Bilog-antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)	---	04/2011	04/2014	Schwazbeck
Hornantenna (0.86-8.5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	03/2009	03/2012	Dudde
Hornantenna (2.0-14.0 GHz)	Schwarzbeck BBHA 9120 C (169)	305	03/2009	03/2012	Dudde
RF- cable	Kabelmetal 18m [N]	K1	09/2011	09/2012	Dudde
RF- cable	Aircell 0.5m [BNC]	K40	09/2011	09/2012	Dudde
RF- cable	Sucoflex 100 Suhner 1 m [N]	K52	09/2011	09/2012	Dudde
RF- cable	Aircell 1m [BNC/N]	K56	09/2011	09/2012	Dudde
RF- cable	Sucoflex 100 Suhner 1 m [N] (	K61	09/2011	09/2012	Dudde
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	09/2011	09/2012	Dudde
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	09/2011	09/2012	Dudde

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

### 8.4.3 Test procedure

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8 m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3m. To find the maximum emission, the polarization of the receiving antenna is changed in horizontal and vertical polarization; the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4-2009 Section 8 “Radiated Emissions Testing”

Measurement procedures for electric field radiated emissions above 1 GHz are covered in Clause 8 of ANSI C63.4-2009. The ANSI C63.4-2009 measurement procedure consists of both an exploratory test and a final measurement. The exploratory test is critical to determine the frequency of all significant emissions. For each mode of operation required to be tested, the frequency spectrum is monitored. Variations in antenna height, antenna orientation, antenna polarization, EUT azimuth, and cable or wire placement is explored to produce the emission that has the highest amplitude relative to the limit.

The final measurements are made based on the findings in the exploratory testing. When making exploratory and final measurements it is necessary to maximize the measured radiated emission. Subclause 8.3.1.2 of ANSI C63.4-2009 states that the measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” We consider the “cone of radiation” to be the 3 dB beam width of the measurement antenna.

While the “bore-sighting” technique is not explicitly mentioned in ANSI C63.4-2009, it is a useful technique for measurements using a directional antenna, such as a double-ridged waveguide antenna. Several precautions must be observed, including: knowledge of the beam width of the antenna and the resulting illumination area relative to the size of the EUT, estimation for source of the emission and general location within larger EUTS, measuring system sensitivity, etc.

ANSI C63.4-2009 requires that the measurement antenna is kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. That means that if the directional radiation pattern of the EUT results in a maximum emission at an upwards angle from the EUT, when a directional antenna is used to make the measurement it will be necessary for it to be pointed towards the source of the emission within the EUT. This can be done by either pointing the antenna at an angle towards the source of the emission, or by rotating the EUT, in both height and polarization, to maximize the measured emission. The emission must be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured.

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

<b>Radiated emissions test characteristics</b>	
Frequency range	30 MHz - 4,000 MHz
Test distance	3 m*
Test instrumentation resolution bandwidth	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 4,000 MHz)
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/horizontal

\* According to Section 15.31 (f) (1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

#### 8.4.4 Calculation of the field strength

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors  
 Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB $\mu$ V. The antenna factor for the measured frequency is +2.5 dB (1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB $\mu$ V/m.

The 35.91dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

Level in  $\mu$ V/m = Common Antilogarithm (35.91/20) = 39.8

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.4.5 Result

*RML-HFMR102 in combination with RML-HFANT500/300-B*

### FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level  dB $\mu$ V	Test distance  m	Correction factor  dB	Distance extrapol. factor dB	Level corrected  dB $\mu$ V/m	Limit  dB $\mu$ V/m @ meter	Margin  dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	64.9	10	20.2	-19.1	66.0	84.0 @ 30	18.0	90° / 90°	100
27.120	QPK/9kHz	≤ 4.0	10	20.2	-19.1	5.1	29.5 @ 30	24.4	90° / 90°	100
40.68	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	40.0 @ 3	40.9	V/H.0-360°	100-400
54.24	QPK/120kHz	16.2	3	-8.1	0	8.1	40.0 @ 3	31.9	V. 90°	201
67.8	QPK/120kHz	26.4	3	-9.7	0	16.7	40.0 @ 3	23.3	V. 90°	176
81.36	QPK/120kHz	37.8	3	-11.4	0	26.4	40.0 @ 3	13.6	H. 0°	223
94.92	QPK/120kHz	37.8	3	-10.8	0	27.0	43.5 @ 3	16.5	V. 90°	115
108.48	QPK/120kHz	28.7	3	-9.7	0	19.0	43.5 @ 3	24.5	V. 90°	106
122.04	QPK/120kHz	37.6	3	-8.2	0	29.4	43.5 @ 3	14.1	V. 90°	100
135.6	QPK/120kHz	35.2	3	-7.7	0	27.5	43.5 @ 3	16.0	V. 40°	122
149.16	QPK/120kHz	37.2	3	-6.6	0	30.6	43.5 @ 3	12.9	V. 0°	104
162.72	QPK/120kHz	30.7	3	-7.2	0	23.5	43.5 @ 3	20.0	V. 0°	106
176.28	QPK/120kHz	35.0	3	-8.3	0	26.7	43.5 @ 3	16.8	H. 30°	174
189.84	QPK/120kHz	38.3	3	-10.0	0	28.3	43.5 @ 3	15.2	V. 90°	100
203.4	QPK/120kHz	46.6	3	-9.8	0	36.8	43.5 @ 3	6.7	H. 50°	155
216.96	QPK/120kHz	35.8	3	-9.4	0	26.4	46.0 @ 3	19.6	H. 30°	113
230.52	QPK/120kHz	33.9	3	-8.7	0	25.2	46.0 @ 3	20.8	H. 30°	153
244.08	QPK/120kHz	35.6	3	-8.5	0	27.1	46.0 @ 3	18.9	V. 0°	102
257.64	QPK/120kHz	28.9	3	-8.1	0	20.8	46.0 @ 3	25.2	V. 0°	118
271.2	QPK/120kHz	36.6	3	-7.5	0	29.1	46.0 @ 3	16.9	V. 120°	122
284.76	QPK/120kHz	32.9	3	-7.4	0	25.5	46.0 @ 3	20.5	V. 120°	108
298.32	QPK/120kHz	34.0	3	-6.3	0	27.7	46.0 @ 3	18.3	H. 60°	197
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	37.4	3	-5.7	0	31.7	46.0 @ 3	14.3	H. 60°	255
339	QPK/120kHz	29.3	3	-5.9	0	23.4	46.0 @ 3	22.6	V. 70°	102
352.56	QPK/120kHz	36.9	3	-5.0	0	31.9	46.0 @ 3	14.1	H. 60°	139
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth



EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

*RML-HFMR102 in combination with RML-HFANT500/300-B*

**FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)**

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dB $\mu$ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dB $\mu$ V/m	Limit dB $\mu$ V/m @ meter	Margin dB $\mu$ V/m	Polaris. EUT / antenna orientation height/cm		
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400	
379.68	QPK/9kHz	≤ 6.5	3	-4.9	0	29.0	46.0 @ 3	17.0	V/H.0-360°	100-400	
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400	
406.8	QPK/120kHz	33.8	3	-4.8	0	29.0	46.0 @ 3	17.0	H. 30°	114	
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400	
433.92	QPK/120kHz	33.0	3	-4.4	0	28.6	46.0 @ 3	17.4	H. 30°	191	
447.48	QPK/120kHz	22.1	3	-4	0	18.1	46.0 @ 3	27.9	V. 120°	104	
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400	
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400	
488.16	QPK/120kHz	31.8	3	-3.8	0	28.0	46.0 @ 3	18.0	H. 50°	157	
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400	
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400	
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400	
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400	
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400	
Measurement uncertainty			4 dB								

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

- Remark: \*<sup>1</sup> noise floor noise level of the measuring instrument ≤ 4.0dB $\mu$ V @ 10m distance (0,009 – 30 MHz)
- Remark: \*<sup>2</sup> noise floor noise level of the measuring instrument ≤ 6.5dB $\mu$ V @ 3m distance (30 – 1,000 MHz)
- Remark: \*<sup>3</sup> noise floor noise level of the measuring instrument ≤ 10 dB $\mu$ V @ 3m distance (1,000 – 2,000 MHz)
- Remark: \*<sup>4</sup> noise floor noise level of the measuring instrument ≤ 17 dB $\mu$ V @ 3m distance (2,000 – 5,500 MHz)
- Remark: \*<sup>5</sup> for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

*RML-HFMR102 in combination with RML-HFANT500/500-B*

**FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)**

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level  dB $\mu$ V	Test distance  m	Correction factor  dB	Distance extrapol. factor dB	Level corrected  dB $\mu$ V/m	Limit  dB $\mu$ V/m @ meter	Margin  dB	Polaris. EUT / antenna orientation height/cm	
13.560	QPK/9kHz	71.7	10	20.2	-19.1	72.8	84.0 @ 30	11.2	90° / 90°	100
27.120	QPK/9kHz	22.2	10	20.2	-19.1	23.3	29.5 @ 30	6.2	90° / 90°	100
40.68	QPK/120kHz	≤ 6.5	3	-7.4	0	-0.9	40.0 @ 3	40.9	V/H.0-360°	100-400
54.24	QPK/120kHz	19.9	3	-8.1	0	11.8	40.0 @ 3	28.2	V 90°	199
67.8	QPK/120kHz	28.0	3	-9.7	0	18.3	40.0 @ 3	21.7	V 90°	206
81.36	QPK/120kHz	≤ 6.5	3	-11.4	0	-4.9	40.0 @ 3	44.9	V/H.0-360°	100-400
94.92	QPK/120kHz	36.7	3	-10.8	0	25.9	43.5 @ 3	17.6	V 60°	203
108.48	QPK/120kHz	37.2	3	-9.7	0	27.5	43.5 @ 3	16.0	V. 70°	285
122.04	QPK/120kHz	36.7	3	-8.2	0	28.5	43.5 @ 3	15.0	V. 70°	100
135.6	QPK/120kHz	33.9	3	-7.7	0	26.6	43.5 @ 3	17.3	V. 70°	105
149.16	QPK/120kHz	35.4	3	-6.6	0	28.8	43.5 @ 3	14.7	V 70°	107
162.72	QPK/120kHz	32.7	3	-7.2	0	25.2	43.5 @ 3	18.0	H. 0°	184
176.28	QPK/120kHz	34.3	3	-8.3	0	26.0	43.5 @ 3	17.5	V. 20°	194
189.84	QPK/120kHz	36.6	3	-10.0	0	26.2	43.5 @ 3	17.3	V. 70°	162
203.4	QPK/120kHz	46.8	3	-9.8	0	37.0	43.5 @ 3	6.5	H. 15°	190
216.96	QPK/120kHz	34.2	3	-9.4	0	24.8	46.0 @ 3	21.2	H. 0°	186
230.52	QPK/120kHz	32.7	3	-8.7	0	24.0	46.0 @ 3	22.0	H. 30°	282
244.08	QPK/120kHz	30.8	3	-8.5	0	22.3	46.0 @ 3	23.7	V. 0°	173
257.64	QPK/120kHz	27.6	3	-8.1	0	19.5	46.0 @ 3	26.5	V. 90°	204
271.2	QPK/120kHz	37.4	3	-7.5	0	29.9	46.0 @ 3	16.1	V. 120°	158
284.76	QPK/120kHz	28.8	3	-7.4	0	21.4	46.0 @ 3	24.6	V. 120°	254
298.32	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
311.88	QPK/120kHz	≤ 6.5	3	-6.3	0	0.2	46.0 @ 3	45.8	V/H.0-360°	100-400
325.44	QPK/120kHz	32.9	3	-5.7	0	27.2	46.0 @ 3	18.8	H 50°	187
339	QPK/120kHz	28.9	3	-5.9	0	23.0	46.0 @ 3	23.0	H. 50°	187
352.56	QPK/120kHz	≤ 6.5	3	-5.0	0	1.5	46.0 @ 3	44.5	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands  
Bandwidth = the measuring receiver bandwidth

EUT: RML-HFMR102  
 FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

*RML-HFMR102 in combination with RML-HFANT500/500-B*

**FUNDAMENTAL EMISSION & HARMONICS (Section 15.225)**

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dB $\mu$ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dB $\mu$ V/m	Limit dB $\mu$ V/m @ meter	Margin dB $\mu$ V/m	Polaris. EUT / antenna orientation height/cm	
366.12	QPK/9kHz	≤ 6.5	3	-4.9	0	1.6	46.0 @ 3	44.4	V/H.0-360°	100-400
379.68	QPK/9kHz	34.7	3	-4.9	0	29.8	46.0 @ 3	16.2	V. 30°	122
393.24	QPK/120kHz	≤ 6.5	3	-4.7	0	1.8	46.0 @ 3	44.2	V/H.0-360°	100-400
406.8	QPK/120kHz	31.7	3	-4.8	0	26.9	46.0 @ 3	19.1	H. 30°	114
420.36	QPK/120kHz	≤ 6.5	3	-4.8	0	1.7	46.0 @ 3	44.3	V/H.0-360°	100-400
433.92	QPK/120kHz	34.6	3	-4.4	0	30.2	46.0 @ 3	15.8	H. 30°	150
447.48	QPK/120kHz	22.7	3	-4	0	18.7	46.0 @ 3	27.3	V. 60°	105
461.04	QPK/120kHz	≤ 6.5	3	-3.9	0	2.6	46.0 @ 3	43.4	V/H.0-360°	100-400
474.6	QPK/120kHz	≤ 6.5	3	-3.8	0	2.7	46.0 @ 3	43.3	V/H.0-360°	100-400
488.16	QPK/120kHz	31.4	3	-3.8	0	27.6	46.0 @ 3	18.4	H. 145°	145
501.72	QPK/120kHz	≤ 6.5	3	-3.4	0	3.1	46.0 @ 3	42.9	V/H.0-360°	100-400
528.84	QPK/120kHz	≤ 6.5	3	-2.8	0	3.7	46.0 @ 3	42.3	V/H.0-360°	100-400
542.4	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
555.96	QPK/120kHz	≤ 6.5	3	-2.5	0	4.0	46.0 @ 3	42.0	V/H.0-360°	100-400
569.52	QPK/120kHz	≤ 6.5	3	-2.6	0	3.9	46.0 @ 3	42.1	V/H.0-360°	100-400
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

- Remark: \*<sup>1</sup> noise floor noise level of the measuring instrument ≤ 4.0dB $\mu$ V @ 10m distance (0,009 – 30 MHz)
- Remark: \*<sup>2</sup> noise floor noise level of the measuring instrument ≤ 6.5dB $\mu$ V @ 3m distance (30 – 1,000 MHz)
- Remark: \*<sup>3</sup> noise floor noise level of the measuring instrument ≤ 10 dB $\mu$ V @ 3m distance (1,000 – 2,000 MHz)
- Remark: \*<sup>4</sup> noise floor noise level of the measuring instrument ≤ 17 dB $\mu$ V @ 3m distance (2,000 – 5,500 MHz)
- Remark: \*<sup>5</sup> for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

SPURIOUS RADIATION (Section 15.209)									
f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBµV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBµV/m	Limit dBµV/m	Margin dBµV/m	Polarisation EUT / antenna orientation
0.1200	0.2, PK	< 4.0	10	20.2	-59.1	-34.9	46.0- @ 300 m	80.90	V, H/0-360°
	0.2, AV	< 4.0	10	20.2	-59.1	-34.9	26.0 @ 300 m	80.90	V, H/0-360°
0.5000	0.2, AV	< 4.0	10	20.2	-19.1	5.1	33.6 @ 30 m	28.5	V, H/0-360°
1.5000	0.2, AV	< 4.0	10	20.2	-19.1	5.1	24.1 @ 30 m	19.00	V, H/0-360°
3.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
5.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
8.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
10.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
20.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
30.0000	9, AV	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30 m	24.4	V, H/0-360°
35.0000	100, AV	≤ 3.5	3	-3.1* <sup>6</sup>	0	0	0.4	40.0	H,V/H,V
88.0000	100, AV	≤ 3.5	3	-10.8* <sup>6</sup>	0	-7.3	40.0	47.3	H,V/H,V
216.0000	100, AV	≤ 3.5	3	-10.3* <sup>6</sup>	0	-6.8	43.5	50.3	H,V/H,V
960.0000	100, AV	≤ 3.5	3	8.5* <sup>6</sup>	0	12.0	43.5	31.5	H,V/H,V
1700.0000	1000, AV	≤ 4.5	3	3.8* <sup>7</sup>	0	8.3	54.0	45.7	H,V/H,V
2250.0000	1000, AV	≤ 10	3	8.0* <sup>7</sup>	0	18.0	54.0	36.0	H,V/H,V
4000.0000	1000, AV	≤ 10	3	8.4* <sup>7</sup>	0	18.4	54.0	35.6	H,V/H,V
5000.0000	1000, AV	≤ 10	3	9.1* <sup>7</sup>	0	19.4	54.0	34.6	H,V/H,V
7500.0000	1000, AV	≤ 14	3	12.9* <sup>7</sup>	0	26.9	54.0	27.1	H,V/H,V
8300.0000	1000, AV	≤ 14	3	14.0* <sup>7</sup>	0	28.8	54.0	25.2	H,V/H,V
9400.0000	1000, AV	≤ 14	3	16.0* <sup>7</sup>	0	30.0	54.0	24.0	H,V/H,V
11000.0000	1000, AV	≤ 14	3	18.3* <sup>7</sup>	0	32.3	54.0	21.7	H,V/H,V
All other emissions than harmonics in the restricted bands are lower than the noise level of the measuring equipment!									
Measurement uncertainty			4 dB						

Blue marked: restricted bands

Bandwidth = the measuring receiver bandwidth

- Remark: \*<sup>1</sup> noise floor noise level of the measuring instrument ≤ 4.0dBµV @ 10m distance (0.009 MHz – 30 MHz)
- Remark: \*<sup>2</sup> noise floor noise level of the measuring instrument ≤ 3.5dBµV @ 3m distance (30 – 1,000 MHz)
- Remark: \*<sup>3</sup> noise floor noise level of the measuring instrument ≤ 4.5dBµV @ 3m distance (1,000 – 2,000 MHz)
- Remark: \*<sup>4</sup> noise floor noise level of the measuring instrument ≤ 10dBµV @ 3m distance (2,000 – 5,500 MHz)
- Remark: \*<sup>5</sup> noise floor noise level of the measuring instrument ≤ 14dBµV @ 3m distance (5,500 – 14,500 MHz)
- Remark: \*<sup>6</sup> for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
- Remark: \*<sup>7</sup> for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

Date: 2011-03-14

Vers. no. 1.11

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.5 Frequency tolerance

### 8.5.1 Regulation

(e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency over a temperature variation of  $-20$  °C to  $+55$  °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C.

### 8.5.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Calibration executed by
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	11/2010	11/2012	Rohde & Schwarz
signal generator (10 kHz –5.4 GHz)	Marconi Instruments Low noise signal generator 2042 (6)	119347/003	01/2011	01/2012	Rohde & Schwarz
Temperature chamber	Brabender TTE 32/40 H (87)	---	03/2010	03/2013	Dudde
RF- cable	RG58 2.5m [BNC]	K21	01/2011	01/2012	Dudde

## 11.5.3 Test procedures

### Stability with respect to ambient temperature:

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. If possible, a dummy load should be connected to the EUT, because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, the EUT should be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn the EUT on, and tune it to one of the number of frequencies required

Couple the intentional radiator output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable and placing the measurement antenna near the EUT (e.g., 15 cm away) or by connecting a dummy load to the measuring instrument through an attenuator, if necessary.

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. Turn the EUT on, and couple its output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable.

Adjust the location of the measurement antenna and the controls on the measuring instrument to obtain a suitable signal level (i.e., a level that will not overload the measuring instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT).

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

Tune the EUT to any one of the number of frequencies specified. Turn the EUT off, and place it inside an environmental chamber if appropriate. Allow the chamber to stabilize at +20 °C before proceeding. Turn on the EUT, and record the operating frequency of the intentional radiator at start up and two, five, and ten minutes after start up. Turn the EUT off and allow it to cool to the ambient temperature, and then repeat this procedure for the number of the frequencies specified. Four measurements are made at each operating frequency.

Stability with respect to input voltage:

Supply the EUT with nominal ac voltage, or install a new or fully charged battery in the EUT. If possible, a dummy load should be connected to the EUT, because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, the EUT should be placed in the center of the chamber with the antenna adjusted to the shortest length possible. Turn the EUT on, and tune it to one of the number of frequencies required.

Couple the intentional radiator output to the measuring instrument by connecting an antenna to the measurement instrument with a suitable length of coaxial cable and placing the measurement antenna near the EUT (e.g., 15 cm away) or by connecting a dummy load to the measuring instrument through an attenuator, if necessary.

Adjust the location of the measurement antenna and the controls on the measuring instrument to obtain a suitable signal level (i.e., a level that will not overload the measuring instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT). Turn the EUT off, and place it inside an environmental temperature chamber. For devices that are normally operated continuously, the EUT may be energized while inside the test chamber. For devices that have oscillator heaters, energize only the heater circuit while the EUT is inside the chamber.

Set the temperature control on the chamber to the highest specified EUT operating temperature, and allow the temperature inside the chamber to stabilize at the set temperature before starting frequency measurements.

While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at start up and two, five, and ten minutes after the EUT is energized. Four measurements in total are made.

Repeat the above procedure until the number of frequencies specified has been measured. After all measurements have been made at the highest specified temperature, turn the EUT off. Repeat the above measurement process for the EUT with the test chamber set at the lowest temperature specified by the regulatory or procuring agency. Measurements shall be made at the number of frequencies specified.

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 8.5.4 Result

Frequency tolerance (Section 15.225(e))			
Test conditions		Carrier Frequency 13.560 MHz	
		Frequency error / (kHz) ppm	Limit ppm
T <sub>min</sub> -20 °C	V <sub>min</sub> 20.4 V DC	(-0.014) -1.0	100
	V <sub>max</sub> 27.6 V DC	(-0.014) -1.0	100
T -10 °C	V <sub>min</sub> 20.4 V DC	(0.0) 0.0	100
	V <sub>max</sub> 27.6 V DC	(0.0) 0.0	100
T 0 °C	V <sub>min</sub> 20.4 V DC	(+0.116) +8.6	100
	V <sub>max</sub> 27.6 V DC	(+0.116) +8.6	100
T +10 °C	V <sub>min</sub> 20.4 V DC	(+0.072) +5.3	100
	V <sub>max</sub> 27.6 V DC	(+0.072) +5.3	100
T <sub>nom</sub> +20 °C	V <sub>min</sub> 20.4 V DC	(+0.101) +7.4	100
	V <sub>max</sub> 27.6 V DC	(+0.101) +7.4	100
T +30 °C	V <sub>min</sub> 20.4 V DC	(+0.105) +7.7	100
	V <sub>max</sub> 27.6 V DC	(+0.105) +7.7	100
T +40 °C	V <sub>min</sub> 20.4 V DC	(+0.110) +8.1	100
	V <sub>max</sub> 27.6 V DC	(+0.110) +8.1	100
T +50 °C	V <sub>min</sub> 20.4 V DC	(+0.140) +10.3	100
	V <sub>max</sub> 27.6 V DC	(+0.140) +10.3	100
T <sub>max</sub> +60 °C	V <sub>min</sub> 20.4 V DC	(+0.160) +11.8	100
	V <sub>max</sub> 27.6 V DC	(+0.160) +11.8	100
Maximum frequency error (kHz)		(+0.160) +11.8	100
Measurement uncertainty		±5 * 10 <sup>-8</sup>	

The equipment meets the requirements	Yes	<del>No</del>	<del>N.t.</del>
--------------------------------------	-----	---------------	-----------------

Further test results are attached	<del>Yes</del>	No	Page no.
-----------------------------------	----------------	----	----------

N.t.\* See page no. 32

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

## 9. Additional information to the test report

### Remarks

- |                   |   |
|-------------------|---|
| N.t. <sup>1</sup> | Not tested, because the antenna is part of the PCB      |
| N.t. <sup>2</sup> | Not tested, because the EUT is directly battery powered |
| N.t. <sup>3</sup> | Not tested, because not applicable to the EUT           |
| N.t. <sup>4</sup> | Not tested, because not ordered                         |



---

EUT: RML-HFMR102  
FCC ID: WVF-HFMR102

Date of issue: 2012-01-25

**End of test report**