

ELECTROMAGNETIC COMPATIBILITY TEST REPORT

PREPARED FOR ION DIGITAL CANADA
BY QAI LABORATORIES



Report Reference Number: E10379-1702_Ion_Rev1.0
Total Number of Pages: 27
Date of Issue: August 28, 2017

EMC Test Laboratory: **QAI Laboratories Inc.**
Address: 3980 North Fraser Way, Burnaby, BC, V5J 5K5 Canada
Phone: (604) 527-8378
Fax: (604) 527-8368

Laboratory Accreditations (per ISO/IEC 17025:2005):



American Association for Laboratory Accreditation Certificate Number: 3657.02

This report has been completed in accordance with the requirements of ISO/IEC 17025. Test results contained in this report are within QAI Laboratories ISO/IEC 17025 accreditation. QAI Laboratories authorizes the applicant to reproduce this report, provided it is reproduced in its entirety and for the use by the company's employees only.

EMC Client: Ion Digital Canada
Address: Unit 2109 – 1225 Kingsway Avenue
Port Coquitlam, BC, Canada, V3C 1S2
Phone: (800) 407-4389

Applicable Test Standards: FCC Title 47 CFR Part 15: Subpart C
RSS-210 Issue 9
RSS-Gen Issue 4

Equipment Tested: RbA CSMT Sensor - Verilock
Model Number(s): 0114368
FCC ID: WVJ-CB000114368
IC Certification Number: 10511A-0114368
Manufacturer: Ion Digital Canada

REVISION HISTORY

| Date | Report Number | Rev # | Details | Author's Initials |
|-----------------|-----------------|-------|-----------------|-------------------|
| August 25, 2017 | E10379-1702_Ion | 0.0 | Initial Release | HZ |
| August 28, 2017 | E10379-1702_Ion | 1.0 | Signed Release | HZ |
| | | | | |

All previous versions of this report have been superseded by the latest dated revision as listed in the above table. Please dispose of all previous electronic and paper printed revisions accordingly.

REPORT AUTHORIZATION

The data documented in this report is for the test equipment provided by Ion Digital Canada Tests were conducted on the sample equipment as requested by Ion Digital Canada for the purpose of demonstrating compliance with FCC Title 47 CFR Part 15: Subpart C, RSS-210 Issue 9, and RSS-Gen Issue 4 as agreed upon by Ion Digital Canada as per Quote 17SH08021.

Ion Digital Canada is responsible for the tested product configuration, continued product compliance, and for the appropriate auditing of subsequent products as required. This report may comprise partial list of tests that are required for FCC or IC Declaration of Conformity and can only be produced by the manufacturer.

This is to certify that the following report is true and correct to the best of our knowledge.



Approved by Parminder Singh
Director for the EMC Department



Tested by Aman Jathaul
EMC Division Project Manager



Report Prepared by HP Enriquez
EMC Technical Writer

QAI FACILITIES

Founded in 1994 by a group of experienced certification and testing experts, QAI is an independent third-party testing, inspection and certification organization which serves the building industry, government and individuals with cost effective solutions through our in-house capabilities / services, and an established world-wide network of qualified affiliates. To help get your product to market, trust the provider that many leading global manufacturers do: QAI.

British Columbia

QAI Laboratories Inc.
Main Laboratory/Headquarters
3980 North Fraser Way,
Burnaby, BC V5J Canada

Ontario

QAI Laboratories Inc.
1081 Meyerside Drive, Unit #14
Mississauga, ON L5T 1M4 Canada

Virginia

QAI Laboratories Ltd.
1047 Zachary Taylor Hwy,
Suite A Huntly, VA 22640 USA

California

QAI Laboratories Ltd.
8385 White Oak Avenue Rancho
Cucamonga, CA 91730 USA

Oklahoma

QAI Laboratories Ltd.
108th East Avenue,
Tulsa, OK 74116 USA


QAI EMC ACCREDITATION

QAI EMC is your one-stop regulatory compliance partner for electromagnetic compatibility (EMC) and electromagnetic interference (EMI). Products are tested to the latest and applicable EMC/EMI requirements for domestic and international markets. QAI EMC goes above and beyond being a testing facility—we are your regulatory compliance partner. QAI EMC has the capability to perform RF Emissions and Immunity for all types of electronics manufacturing including Industrial, Scientific, Medical, Information Technology, Telecom, Wireless, Automotive, Marine and Avionics.


| EMC Laboratory Location | FCC Designation (3m SAC) | IC Registration (3m SAC) | A2LA Certificate |
|-------------------------|--------------------------|--------------------------|------------------|
| Burnaby, BC, Canada | CA9543 | 21146-1 | 3657.02 |




**Headquarters & EMC Laboratory in
Burnaby, BC**

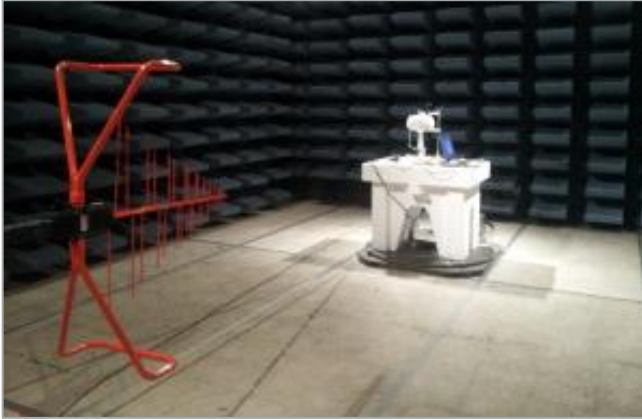

Chamber 1- 3m Semi-Anechoic Chamber (SAC) in Burnaby, BC

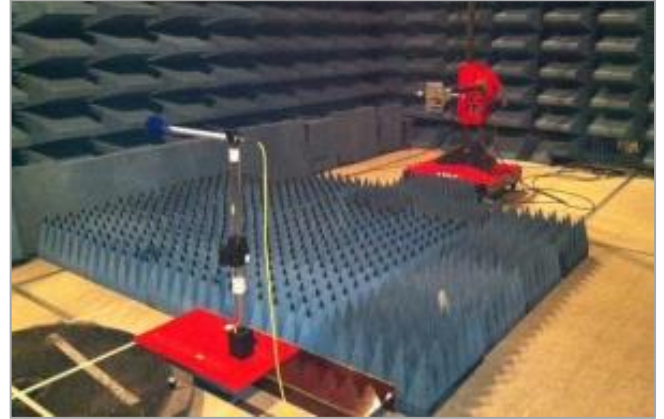

Chamber 1- 3m Semi-Anechoic Chamber (SAC) in Burnaby, BC

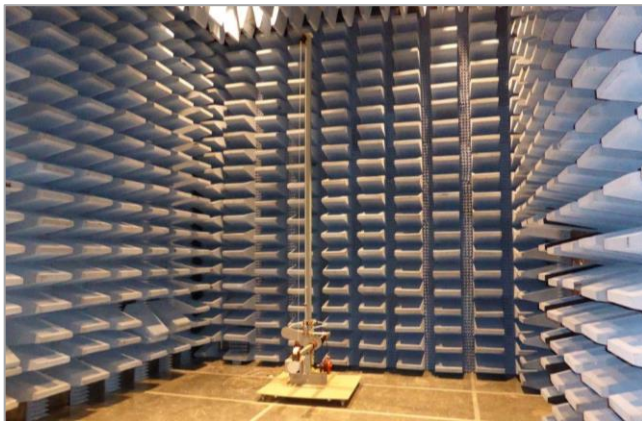

Chamber 2- 3m Semi-Anechoic Chamber (SAC) in Burnaby, BC



Chamber 2- 3m Semi-Anechoic Chamber (SAC) in Burnaby, BC



10m Open Area Test Site (OATS) in British Columbia, Canada

TABLE OF CONTENTS

| | |
|--|----|
| REVISION HISTORY | 2 |
| REPORT AUTHORIZATION | 3 |
| QAI FACILITIES..... | 4 |
| QAI EMC ACCREDITATION | 4 |
| TABLE OF CONTENTS | 6 |
| Section I: EXECUTIVE SUMMARY | 7 |
| 1.1 Purpose..... | 7 |
| 1.2 Scope..... | 7 |
| 1.3 Summary of Results | 7 |
| Section II: EQUIPMENT UNDER TEST (EUT) INFORMATION | 8 |
| 2.1 Product Description | 8 |
| Section III: GENERAL INFORMATION | 9 |
| 3.1 Environmental Conditions | 9 |
| 3.2 Measurement Uncertainty | 9 |
| 3.3 Worst Test Case | 9 |
| 3.4 Sample Calculations of Emissions Data..... | 9 |
| 3.5 Test Equipment List..... | 11 |
| Section IV: TEST RESULTS | 12 |
| 4.1 Antenna Requirement | 12 |
| 4.2 Transmission Time..... | 13 |
| 4.3 Intentional Spurious Emissions..... | 14 |
| 4.3.1 Duty Cycle Correction Factor Calculation | 18 |
| 4.4 20 dB Occupied Bandwidth | 20 |
| 4.5 99% Occupied Bandwidth | 21 |
| 4.6 Receiver Radiated Emissions..... | 22 |
| Appendix A: TEST SETUP PHOTOS..... | 24 |
| Appendix B: ABBREVIATIONS..... | 26 |

Section I: EXECUTIVE SUMMARY

1.1 Purpose

The purpose of this report is to demonstrate and document the compliance of “RbA CSMT Sensor - Verilock” as per Sections 1.2 & 1.3.

1.2 Scope

The information documented in this report is based on the test methods and levels as per Quote 17SH08021:

- **FCC Title 47 CFR Part 15** – Radio Frequency Devices, Subpart C - Intentional Radiators
 - o §15.231 - Periodic Operation in the band 40.66-40.70 MHz and above 70 MHz
- **RSS-210 Issue 9** – License-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
 - o Annex 1 - Momentarily Operated Devices and Remote Control
- **RSS-Gen Issue 4** – General Requirements and Information for the Certification of Radio Apparatus

1.3 Summary of Results

The following tests demonstrate the testimony to “FCC and IC” Mark Electromagnetic compatibility radio testing for the “RbA CSMT Sensor - Verilock” device manufactured by Ion Digital Canada.

The following testing was performed pursuant to FCC & IC Radio and RF Emissions Standards

| Test Description | Applicable FCC Test Standard | Applicable IC Test Standard | Test Method | Result |
|--------------------------------|---|--|------------------|--------|
| Antenna Requirement | Title 47 CFR Part 15: Subpart C §15.203 | n/a | n/a | Pass |
| Transmission Time | Title 47 CFR Part 15: Subpart C §15.231 (a) | RSS-210 Issue 9 A.1.1 | n/a | Pass |
| Intentional Spurious Emissions | Title 47 CFR Part 15: Subpart C §15.231 (b) | RSS-210 Issue 9 A.1.2 RSS-Gen Issue 4 8.9, 8.10 | ANSI C63.10-2013 | Pass |
| 20dB Occupied Bandwidth | Title 47 CFR Part 15: Subpart C §15.231 (c) | n/a | ANSI C63.10-2013 | Pass |
| 99% Occupied Bandwidth | n/a | RSS-210 Issue 9 A.1.3 RSS-Gen Issue 4 6.6 | ANSI C63.10-2013 | Pass |
| Receiver Radiated Emissions | n/a | RSS-Gen Issue 4 7.1 | ANSI C63.4-2014 | Pass |

Section II: EQUIPMENT UNDER TEST (EUT) INFORMATION

2.1 Product Description

The information provided in this section is for the Equipment Under Test (EUT) and the corresponding Auxiliary Equipment needed to perform the tests as a complete system.



EUT – RbA CSMT Sensor - Verilock

Equipment Under Test (EUT) Information

| | |
|---------------------|----------------------------|
| EUT | RbA CSMT Sensor - Verilock |
| Description | Intrusion Detector |
| FCC ID | WVJ-CB000114368 |
| IC Number | 10511A-0114368 |
| Manufacturer | Ion Digital Canada |
| Model No. | 0114368 |
| Serial No. | n/a |

| | |
|----------------------------|-------------------------------|
| Operating Frequency | 344.94 MHz |
| Transmit Power | 13 dBm |
| Modulation Type | ASK-OOK |
| Test Channels | 1 |
| Data Rate | 3.7 Kbits/sec. |
| Antenna Type | printed monopole whip antenna |
| Antenna Gain | 0 dBi |

EUT Input Power Specification

| | |
|------------------------|--|
| Battery Powered | Panasonic CR2032 20mm Coin Cell Battery 3VDC |
|------------------------|--|

Section III: GENERAL INFORMATION

3.1 Environmental Conditions

The equipment under test was operated and tested under the following environmental conditions:

| Parameter | Conditions |
|-------------------|--------------|
| Location | Indoors |
| Temperature | 22-28°C |
| Relative Humidity | 39.7 - 54.4% |

3.2 Measurement Uncertainty

| Parameter | Uncertainty |
|--------------------------------|-----------------------------|
| Radiated Emissions, 30MHz-1GHz | ± 2.40 dB |
| Radiated Emissions, 1GHz-40GHz | ± 2.48 dB |
| Radio Frequency | ±1.5 x 10 ⁻⁵ MHz |
| Total RF Power Conducted | ±1.36 dB |
| Spurious Emissions, Conducted | ±1.36 dB |
| RF Power Density, Conducted | ±1.36 dB |
| Temperature | ±1°C |
| Humidity | ±5 % |
| DC and low frequency voltages | ±3 % |

3.3 Worst Test Case

Worst-case orientation was determined during the preliminary testing. The final radiated emissions were performed in the worst-case orientation.

3.4 Sample Calculations of Emissions Data

Radiated and conducted emissions were performed using EMC32 software developed by Rohdes & Schwarz. Transducer factors like Antenna factors, Cable Losses and Amplifier gains were stored in the test templates which are used to perform the emissions measurements. After test is finished, data is generated from the EMC32 consisting of product details, emission plots and final data tables as shown below.

| Frequency (MHz) | QPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Ant. Ht. (cm) | Pol | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) |
|-----------------|----------------|-----------------|-----------------|---------------|-----|--------------------------|------------|-------------|----------------|
| 42.663900 | 33.0 | 1000.000 | 120.000 | 100.0 | H | 70.0 | 13.2 | 7.5 | 40.5 |

Quasi Peak reading shown in the table above is already corrected by the software using correction factor shown in column "Corr.:" The correction factor listed under "Corr.:" table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

Or

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable Loss} - \text{Amp gain (if pre-amplifier was used)}$$

The final Quasi peak reading shown in the data is calculated by the software using following equation:

$$\text{Corrected Quasi Peak(dB}\mu\text{V/m)} = \text{Raw Quasi Peak Reading} + \text{Antenna factor} + \text{Cable loss}$$

To obtain the final Quasi-Peak or Average reading during power line conducted emissions, transducer factors are included in the final measurement as shown below.

| Frequency (MHz) | QPeak (dB μ V) | Meas. Time (ms) | Bandwidth (kHz) | PE | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|--------------------|-----------------|-----------------|-----|------------|-------------|--------------------|
| 0.150 | 44.3 | 1000.000 | 9.000 | GND | 0.6 | 21.7 | 66.0 |

| Frequency (MHz) | QPeak (dB μ V) | Meas. Time (ms) | Bandwidth (kHz) | PE | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|--------------------|-----------------|-----------------|-----|------------|-------------|--------------------|
| 0.150 | 27.2 | 1000.000 | 9.000 | GND | 0.6 | 28.8 | 56.0 |

Quasi Peak or Average reading shown in above table is already corrected by the software using the correction factor shown in column "Corr." The correction factor listed under "Corr." table calculated as:

$$\text{Corr. (dB)} = \text{Antenna factor} + \text{Cable loss}$$

The final Quasi peak or Average reading shown in the data is calculated by the software using following equation:

$$\text{Corr. Quasi Peak/Average Reading (dB}\mu\text{V)} = \text{Raw Quasi Peak/Average Reading} + \text{Antenna factor} + \text{Cable loss}$$

The allowable margin from the limits, as per the standards, were calculated for both radiated and conducted emissions:

$$\text{Margin (dB)} = \text{Limit} - \text{Quasi-Peak or Average reading}$$

3.5 Test Equipment List

The tables below contain all the equipment used by QAI Laboratories in conducting all tests on the Equipment Under Test (EUT) as per Section 1.3.

Emissions Test Equipment

| Manufacturer | Model | Description | Serial No. | Calibration Due Date |
|-----------------|---------------------|--------------------------------------|------------|----------------------|
| Sunol Sciences | SM46C | Turntable | 051204-2 | N/A |
| Sunol Sciences | TWR95 | Mast | TREML0001 | N/A |
| Sunol Sciences | JB3 | Biconilog Antenna 30MHz – 3GHz | A120106 | 2017-Sep-24 |
| Sunol Sciences | DRH-118 | Horn Antenna 1GHz-18GHz | A050905 | 2019-Mar-10 |
| ETS Lindgren | 3160-09 | Horn Antenna 18GHz-26.5GHz | 9701-1071 | 2017-Aug-30 |
| ETS Lindgren | 3160-10 | Horn Antenna 26.5GHz-40.0GHz | 9708-1075 | 2017-Aug-30 |
| ETS Lindgren | 6502 | Active Loop Antenna 10kHz – 30MHz | 2178 | 2017-Aug-21 |
| ETS Lindgren | 2165 | Turntable | 00043677 | N/A |
| ETS Lindgren | 2125 | Mast | 00077487 | N/A |
| Rohde & Schwarz | ESU40 | EMI Receiver | 100011 | 2017-Nov-20 |
| Fischer | FCC-LISN-50-25-2-08 | LISN (150kHz-30MHz) | 2041 | 2018-Nov-19 |
| ETS Lindgren | S201 | 5-meter Semi-Anechoic Chamber | 1030 | N/A |
| AH Systems | PAM118 | Amplifier 10KHz-18GHz | 189 | Conditional Use |

Note: Equipment listed above have 3 years calibration interval.

Measurement Software List

| Manufacturer | Model | Version | Description |
|-----------------|--------|---------|-------------------------|
| Rhode & Schwarz | EMC 32 | 6.20.0 | Emissions Test Software |

Section IV: TEST RESULTS

4.1 Antenna Requirement

Date Performed:

August 4, 2017

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.203

Test Method:

- n/a

Requirement(s):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Result:

A printed monopole whip antenna is integrate and permanently attached in the printed circuit board of the EUT. The EUT meets the antenna requirement.

4.2 Transmission Time

Date Performed:

August 4, 2017

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (a)
- RSS-210 Issue 9, A.1.1

Test Method:

- n/a


Requirement(s):

- A manually operated transmitter shall be equipped with a push-to-operate switch and be under manual control at all times during transmission. When released, the transmitter shall cease transmission within no more than 5 seconds of being released.
- A transmitter that has been activated automatically shall cease transmission within 5 seconds of activation.

Result:

The EUT complies with the applicable standard.

Data/Plot:

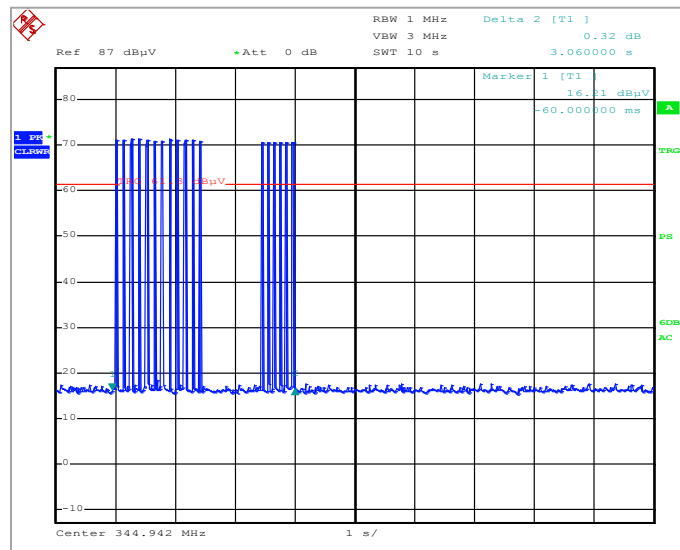

| Measured TX Transmission Time | Limit | Result |
|-------------------------------|-------|--------|
| 3.06 s | < 5 s | Pass |

4.3 Intentional Spurious Emissions

Date Performed:

August 4, 2017

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (b)
- RSS-210 Issue 9, A.1.2
- RSS-Gen Issue 4, 8.9 & 8.10

Test Method:

- ANSI C63.10-2013

Required Limit(s):

The field strength of emissions from intentional radiators operated under this section (§15.231) shall not exceed the following:

| Fundamental Frequency, <i>f</i> (MHz) | Field strength of Fundamental (µV/m) | Field strength of Fundamental (dBµV/m) | Field strength of Spurious Emissions (µV/m) | Field strength of Spurious Emissions (dBµV/m) |
|---|--------------------------------------|--|---|---|
| 40.66 – 40.70 | 2250 | 67.0 | 225 | 47.0 |
| 70 – 130 | 1250 | 62.0 | 125 | 62.0 |
| 130 – 174 | 1250 – 3750* | 62.0 – 71.5* | 125 – 375* | 42.0 – 51.5* |
| 174 – 260 | 3750 | 71.5 | 375 | 51.5 |
| 260 – 470 | 3750 – 12500* | 71.5 – 82.0* | 375 – 1250* | 51.5 – 62.0* |
| above 470 | 12500 | 82.0 | 1250 | 62.0 |
| * - Linear interpolation with frequency, <i>f</i> , in MHz: For 130-174 MHz: Field Strength (µV/m) = (56.82 × <i>f</i>) – 6136 For 260-470 MHz: Field Strength (µV/m) = (41.67 × <i>f</i>) – 7083 | | | | |
| Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges. | | | | |

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in §15.209, whichever limit permits a higher field strength.

| Frequency, <i>f</i> (MHz) | Field strength (dBµV/m) |
|--|---|
| 0.009 – 0.490 | (20*log(2400/ <i>f</i> (kHz))) + 40 dB |
| 0.490 – 1.705 | (20*log(24000/ <i>f</i> (kHz))) + 20 dB |
| 1.705 – 30.0 | 49.5 |
| 30 – 88 | 40.0 |
| 88 – 216 | 43.5 |
| 216 – 960 | 46.0 |
| above 960 | 54.0 |
| Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges. | |
| Note 2: The emissions limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. | |

Unwanted emissions that fall into the restricted bands specified on the table below shall comply with the limits specified on the table limits above as per §15.209 and Clause 8.9 of RSS-Gen.

FCC Restricted Bands:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 10.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

IC/RSS Restricted Bands:

| MHz | MHz | GHz |
|---------------------|---------------|-------------|
| 0.090-0.110 | 240-285 | 9.0-9.2 |
| 2.1735-2.1905 | 322-335.4 | 9.3-9.5 |
| 3.020-3.026 | 399.9-410 | 10.6-12.7 |
| 4.125-4.128 | 608-614 | 13.25-13.4 |
| 4.17725-4.17775 | 960-1427 | 14.47-14.5 |
| 4.20725-4.20775 | 1435-1626.5 | 15.35-16.2 |
| 5.677-5.683 | 1645.5-1646.5 | 17.7-21.4 |
| 6.215-6.218 | 1660-1710 | 22.01-23.12 |
| 6.26775-6.26825 | 1718.8-1722.2 | 23.6-24.0 |
| 6.31175-6.31225 | 2200-2300 | 31.2-31.8 |
| 8.291-8.294 | 2310-2390 | 36.43-36.5 |
| 8.362-8.366 | 2690-2900 | Above 38.6 |
| 8.37625-8.38675 | 3260-3267 | |
| 8.41425-8.41475 | 3332-3339 | |
| 12.29-12.293 | 3345.8-3358 | |
| 12.51975-12.52025 | 3500-4400 | |
| 12.57675-12.57725 | 4500-5150 | |
| 13.36-13.41 | 5350-5460 | |
| 16.42-16.423 | 7250-7750 | |
| 16.69475-16.69525 | 8025-8500 | |
| 16.80425-16.80475 | | |
| 25.5-25.67 | | |
| 37.5-38.25 | | |
| 73-74.6 | | |
| 74.8-75.2 | | |
| 108-138 | | |
| 156.52475-156.52525 | | |
| 156.7-156.9 | | |

Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The operating frequency of the device was measured for all radiated emissions 10 kHz to 4 GHz up to the 10th harmonic of the highest fundamental frequency. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.

Modifications:

No modification was required to comply for this test.

Result:

The intentional spurious emissions signals at frequency range 9 kHz to 30 MHz were 20 dB below the required limit therefore need not necessary to include in the report (§15.31(o)).

The EUT complies with the applicable standard.


Data/Plot:

Test Mode/Configuration/Operation:

- TX Mode

Frequency Range:

- 30 MHz ↔ 1000 MHz

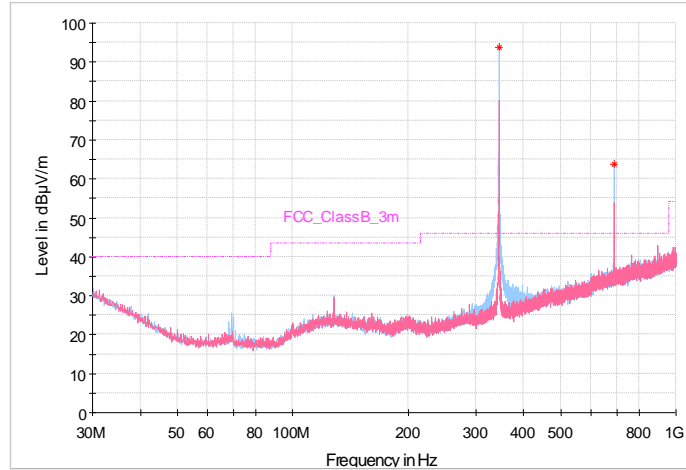


Plot 1: Radiated Emissions (below 1GHz) scanned at 3m SAC

Test Mode/Configuration/Operation:

- TX Mode

Frequency Range:

- 1 GHz ↔ 4 GHz

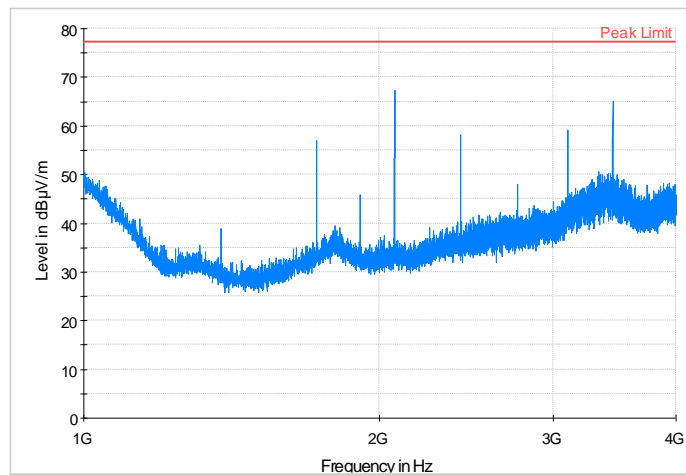

Plot 2: Radiated Emissions (above 1GHz) scanned at 3m SAC

Table 1: Fundamental and spurious emissions measurement data

| Freq. | Meas. Pk. | EUT Orientation | Turn-table | Ant. Height | Ant. Pol. | System Loss | Ant. Factor | Corr. Pk. | Duty Cycle Corr. Factor | Avg FS | Limit | Margin |
|----------|-----------|------------------|------------|-------------|-----------|-------------|-------------|-----------|-------------------------|--------|--------|--------|
| MHz | dBµV/m | | ° | cm | V or H | dB | dB | dBµV/m | dB | dBµV/m | dBµV/m | dB |
| 344.94 | 71.05 | Vert. | 271 | 145 | V | 9.5 | 14.2 | 94.75 | -21.2 | 73.55 | 77.25 | 3.7 |
| 344.94 | 63.73 | Vert. | 185 | 100 | H | 9.5 | 14.2 | 87.43 | -21.2 | 66.23 | 77.25 | 11.02 |
| 344.94 | 61.48 | Horiz. | 261 | 100 | V | 9.5 | 14.2 | 85.18 | -21.2 | 63.98 | 77.25 | 13.27 |
| 344.94 | 72.05 | Horiz. | 176 | 100 | H | 9.5 | 14.2 | 95.75 | -21.2 | 74.55 | 77.25 | 2.7 |
| 344.94 | 58.56 | Flat on tabletop | 92 | 100 | V | 9.5 | 14.2 | 82.26 | -21.2 | 61.06 | 77.25 | 16.19 |
| 344.94 | 72.3 | Flat on tabletop | 17 | 100 | H | 9.5 | 14.2 | 96 | -21.2 | 74.8 | 77.25 | 2.45 |
| 689.88 | 35.62 | Vert. | 270 | 152 | V | 11 | 20.1 | 66.72 | -21.2 | 45.52 | 57.25 | 11.73 |
| 689.88 | 27.2 | Vert. | 230 | 110 | H | 11 | 20.1 | 58.3 | -21.2 | 37.1 | 57.25 | 20.15 |
| 689.88 | 38.45 | Horiz. | 184 | 118 | H | 11 | 20.1 | 69.55 | -21.2 | 48.35 | 57.25 | 8.9 |
| 689.88 | 30.4 | Horiz. | 251 | 125 | V | 11 | 20.1 | 61.5 | -21.2 | 40.3 | 57.25 | 16.95 |
| 689.88 | 38.13 | Flat on tabletop | 189 | 120 | H | 11 | 20.1 | 69.23 | -21.2 | 48.03 | 57.25 | 9.22 |
| 689.88 | 28.52 | Flat on tabletop | 259 | 120 | V | 11 | 20.1 | 59.62 | -21.2 | 38.42 | 57.25 | 18.83 |
| 1034.82* | 47.2 | Horiz. | 270 | 155 | H | -15.73 | 24 | 55.47 | -21.2 | 34.27 | 54 | 19.73 |
| 1034.82* | 45.1 | Horiz. | 270 | 150 | V | -15.73 | 24 | 53.37 | -21.2 | 32.17 | 54 | 21.83 |
| 1379.7* | 53.9 | Horiz. | 142 | 150 | H | -29.8 | 25 | 49.1 | -21.2 | 27.9 | 54 | 26.1 |
| 1379.7* | 53 | Horiz. | 90 | 150 | V | -29.8 | 25 | 48.2 | -21.2 | 27 | 54 | 27 |
| 1724.7 | 65.6 | Horiz. | 31 | 150 | H | -29 | 27 | 63.6 | -21.2 | 42.4 | 57.25 | 14.85 |
| 1724.7 | 59.73 | Horiz. | 32.5 | 150 | V | -29 | 27 | 57.73 | -21.2 | 36.53 | 57.25 | 20.72 |
| 2069.7 | 71.3 | Horiz. | 19 | 136 | H | -27.8 | 27.4 | 70.9 | -21.2 | 49.7 | 57.25 | 7.55 |
| 2069.7 | 69.85 | Horiz. | 146 | 175 | V | -27.8 | 27.4 | 69.45 | -21.2 | 48.25 | 57.25 | 9 |
| 2414.5 | 55.2 | Horiz. | 225 | 150 | H | -27.11 | 28.5 | 56.59 | -21.2 | 35.39 | 57.25 | 21.86 |
| 2414.5 | 55.16 | Horiz. | 155 | 151 | V | -27.11 | 28.5 | 56.55 | -21.2 | 35.35 | 57.25 | 21.9 |
| 2759.9* | 57.4 | Horiz. | 0 | 156 | H | -26.01 | 28.8 | 60.19 | -21.2 | 38.99 | 54 | 15.01 |
| 2759.9* | 54.12 | Horiz. | 8 | 142 | V | -26.01 | 28.8 | 56.91 | -21.2 | 35.71 | 54 | 18.29 |
| 3104.4 | 60 | Horiz. | 5 | 160 | H | -25.5 | 30.8 | 65.3 | -21.2 | 44.1 | 57.25 | 13.15 |
| 3104.4 | 59.44 | Horiz. | 13 | 100 | V | -25.5 | 30.8 | 64.74 | -21.2 | 43.54 | 57.25 | 13.71 |
| 3449 | 62.33 | Horiz. | 230 | 100 | H | -23.9 | 31.2 | 69.63 | -21.2 | 48.43 | 57.25 | 8.82 |
| 3449 | 61.92 | Horiz. | 92 | 100 | V | -23.9 | 31.2 | 69.22 | -21.2 | 48.02 | 57.25 | 9.23 |

* - frequencies that fall into the Restricted Bands

Note 1: Duty Cycle Correction factor calculation can be found on section 3.3.1 of this document.

4.3.1 Duty Cycle Correction Factor Calculation


Requirement(s):

- § 15.35(c) - Unless otherwise specified, e.g. § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.


Method of Measurement:

- As called in the ANSI C63.10-2013 standard.

Data/Plot:

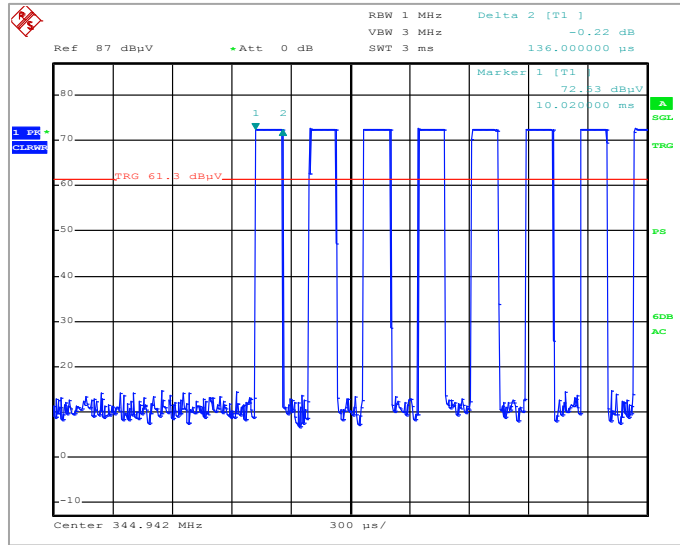

Plot 3: Short Time Pulses

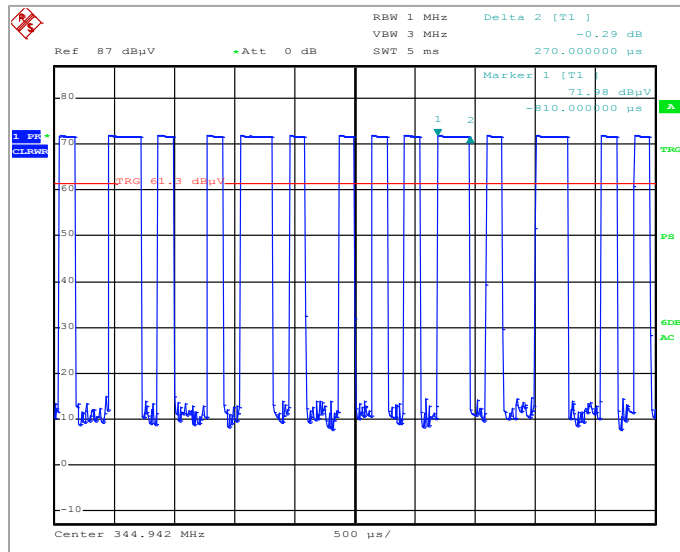

Plot 4: Long Time Pulses

Table 2: Duty Cycle Correction Factor Calculation

| No. of Short Pulses | Time ON ms per pulse | Total ON time of short pulse |
|---|----------------------|------------------------------|
| 44 | 0.136 ms | 5.984 ms |
| No. of Long Pulses | Time ON ms per pulse | Total ON time of long pulse |
| 10 | 0.27 ms | 2.7 ms |
| Duty Cycle Correction Factor (dB) = $20 \log \left(\frac{\text{total ON time short pulses} + \text{total ON time long pulses}}{100\text{ms}} \right)$ = $20 \log \left(\frac{5.984\text{ms} + 2.7\text{ms}}{100\text{ms}} \right)$ = -21.2 dB | | |

4.4 20 dB Occupied Bandwidth

Date Performed:

August 4, 2017

Test Standard:

- Title 47 CFR Part 15: Subpart C, §15.231 (c)

Test Method:

- ANSI C63.10-2013

Required Limit(s):

- The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Method of Measurement:

- As called in the ANSI C63.10-2013 standard.


Modifications:

No modification was required to comply for this test.

Result:

The EUT complies with the applicable standard.

Data Plot:

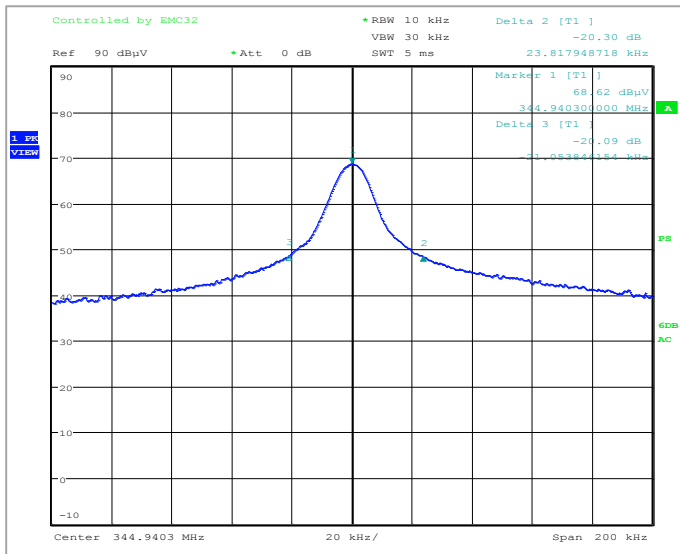

Plot 5: 20 dB Occupied Bandwidth

Table 3: 20 dB OBW Data

| | |
|--------------------------------|---------------------------|
| Frequency (MHz) | 344.94 |
| Measured 20 dB BW (MHz) | 0.0449 |
| Limit (MHz) | $0.25\% * 344.94 = 0.862$ |
| Result | Pass |

4.5 99% Occupied Bandwidth

Date Performed:

August 4, 2017

Test Standard:

- RSS-210 Issue 9, A.1.3
- RSS-Gen Issue 4, 6.6

Test Method:

- ANSI C63.10-2013

Required Limit(s):

- The 99% bandwidth of momentarily operated devices shall be less or equal to 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the 99% bandwidth shall be less or equal to 0.5% of the centre frequency.

Method of Measurement:

- As called in the ANSI C63.10-2013 standard.


Modifications:

No modification was required to comply for this test.

Result:

The EUT complies with the applicable standard.

Data Plot:

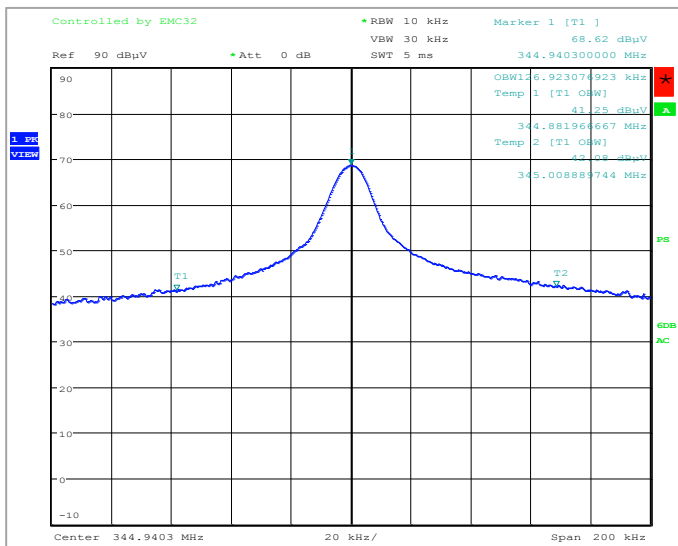

Plot 6: 99% Occupied Bandwidth

Table 4: 99% OBW Data

| | |
|-----------------------|---------------------------|
| Frequency (MHz) | 344.94 |
| Measured 99% BW (MHz) | 0.1269 |
| Limit (MHz) | $0.25\% * 344.94 = 0.862$ |
| Result | Pass |

4.6 Receiver Radiated Emissions

Date Performed:

August 4, 2017

Test Standard:

- RSS-Gen Issue 4, 7.1

Test Method:

- ANSI C63.4-2014

Required Limit(s):

Spurious emissions from receivers shall not exceed the radiated limits shown below

| Frequency, <i>f</i> (MHz) | Field strength (dB μ V/m) |
|------------------------------|----------------------------------|
| 30 – 88 | 40.0 |
| 88 – 216 | 43.5 |
| 216 – 960 | 46.0 |
| above 960 | 54.0 |

Note 1: The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

Method of Measurement:

The EUT was tested in our 3 m SAC and was positioned on the center of the turntable. The transmitter was set for continuous transmission. The device was measured for all radiated emissions from 30 MHz to 1 GHz. The EUT was pre-scanned in 3 different orthogonal orientations and was found to radiate highest when placed flat on the table top as indicated in the test photos.

Modifications:

No modification was required to comply for this test.

Result:

The EUT complies with the applicable standard.


Data/Plot:

Test Mode/Configuration/Operation:

- Standby Mode

Frequency Range:

- 30 MHz ↔ 1000 MHz

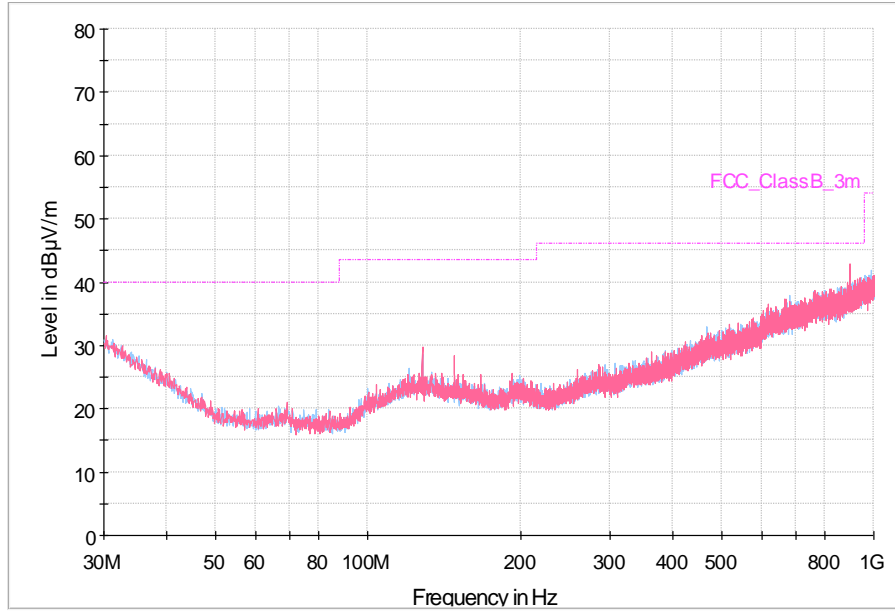

Plot 7: Radiated Emissions (below 1GHz) scanned at 3m SAC

Remark: The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

Appendix A: TEST SETUP PHOTOS



Figure 1: Radiated Spurious Emissions performed at the SAC Test Setup

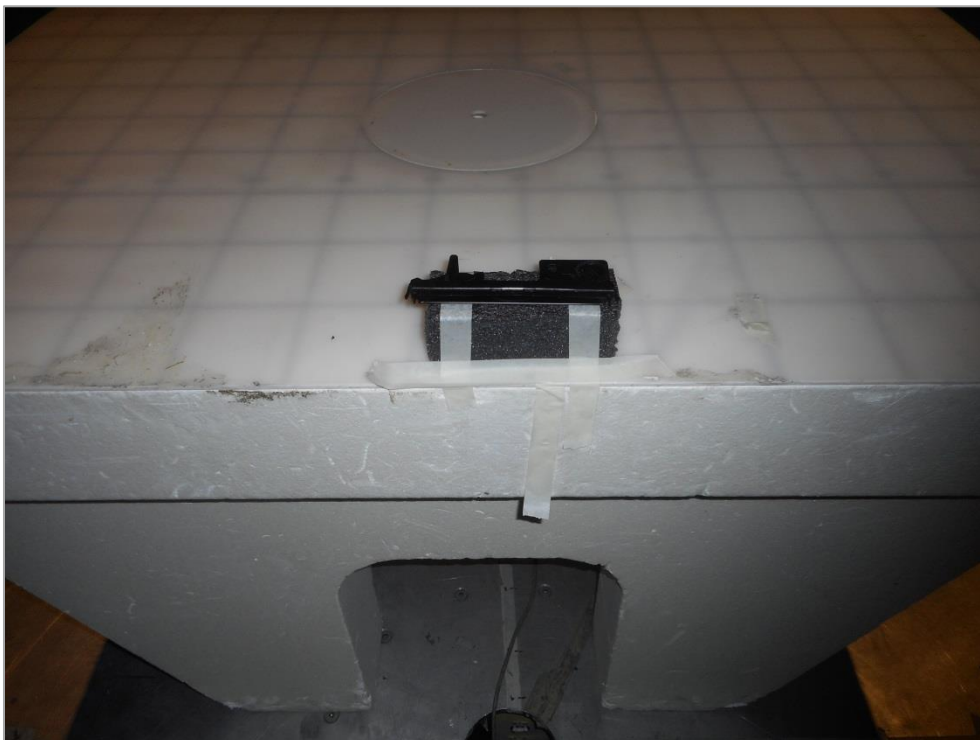


Figure 2: Radiated Spurious Emissions (close-up view) performed at the SAC Test Setup

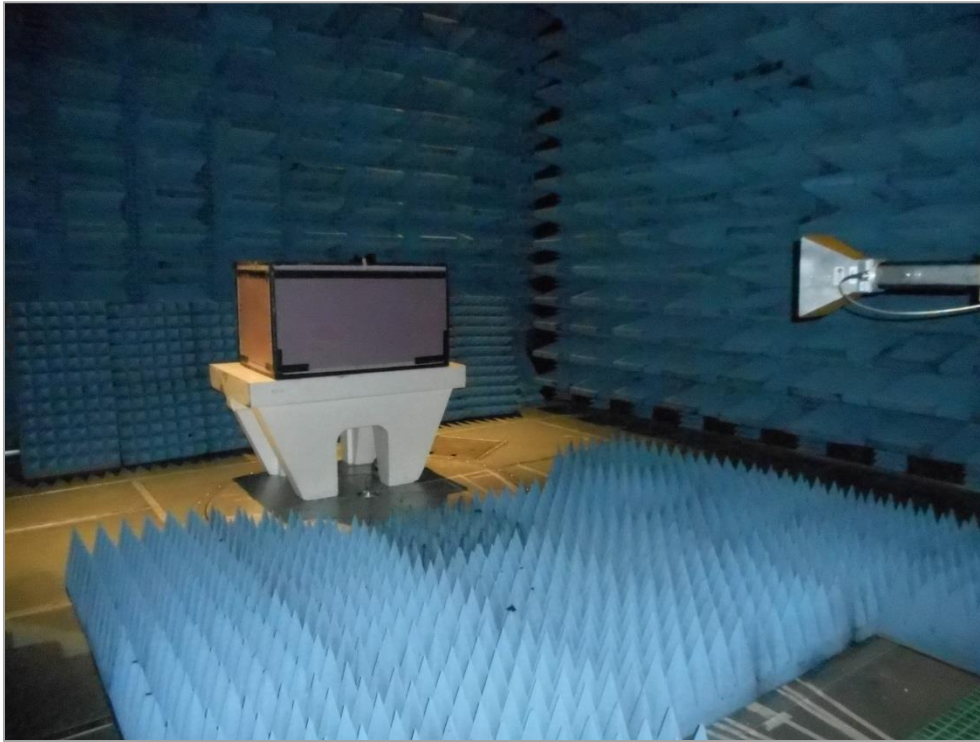


Figure 3: Radiated Spurious Emissions (above 1 GHz) performed at the SAC Test Setup

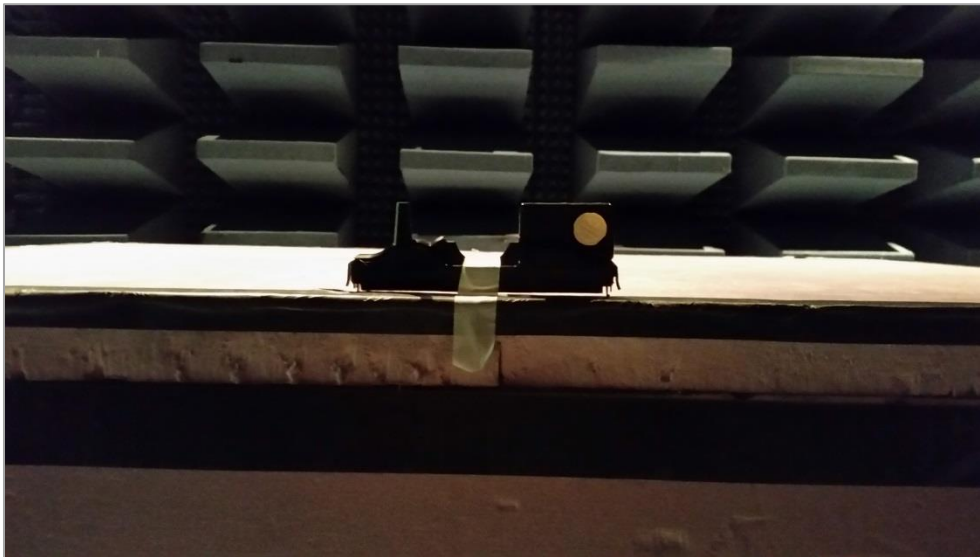


Figure 4: Radiated Spurious Emissions (above 1 GHz, close-up view) performed at the SAC Test Setup

Appendix B: ABBREVIATIONS

| Abbreviation | Definition |
|--------------|---|
| AC | Alternating Current |
| AM | Amplitude Modulation |
| CE | European Conformity |
| CISPR | Comité International Spécial des Perturbations Radioélectriques |
| DC | Direct Current |
| EFT | Electrical Fast Transient |
| EMC | ElectroMagnetic Compatibility |
| EMI | ElectroMagnetic Interference |
| ESD | ElectroStatic Discharge |
| EUT | Equipment Under Test |
| FCC | Federal Communications Commission |
| IC | Industry Canada |
| ICES | Interference Causing Equipment Standard |
| IEC | International Electrotechnical Commission |
| LISN | Line Impedance Stabilizing Network |
| OATS | Open Area Test Site |
| RF | Radio Frequency |
| RMS | Root-Mean-Square |
| SAC | Semi-Anechoic Chamber |



QAI Laboratories
3980 North Fraser Way
Burnaby, BC, V5J 5K5 Canada

END OF REPORT