

Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 1 of 56

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 22 SUBPART H, PART 24 SUBPART E

Product Name: CDMA TS004

Brand Name: N/A

Model Name: CR11-J01

Model Difference: N/A

FCC ID: **WVS-CR11-J01**

EH/2010/20044 **Report No.:**

Issue Date: Mar. 23, 2010

FCC Rule Part: 2,22H & 24E

Prepared for: Toshiba Corporation, Mobile Communications

Co., Quality Management Division

1-1, Asahigaoka 3-Chome, Hino-Shi, Tokyo,

191-8555, Japan

Prepared by: SGS Taiwan Ltd.

Electronics & Communication Laboratory

No. 134, Wu Kung Rd., Wuku Industrial Zone,

Taipei County, Taiwan.

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 2 of 56

CERTIFICATION OF COMPLIANCE

Applicant: Toshiba Corporation, Mobile Communications Co.,

Quality Management Division

1-1, Asahigaoka 3-Chome, Hino-Shi, Tokyo, 191-8555, Japan

Manufacturer: Toshiba Corporation, Mobile Communications Co.,

Quality Management Division

1-1, Asahigaoka 3-Chome, Hino-Shi, Tokyo, 191-8555, Japan

Product Name: CDMA TS004

Brand Name: N/A

FCC ID: WVS-CR11-J01

Model No.: CR11-J01

Model Difference: N/A

File Number: EH/2010/20044

Date of test: Feb. 25, 2010~ Mar. 15, 2010

Date of EUT Received: Feb. 25, 2010

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C-2004 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rule PART 22 subpart H, PART 24 subpart E.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jason We	Date:	Mar. 23, 2010	
_	Jason Wu / Asst. Supervisor			
Prepared By:	Alex Hsieh	Date:	Mar. 23, 2010	
_	Alex Hsieh/ Sr. Engineer			
Approved By:	Timent du	Date:	Mar. 23, 2010	
	Vincent Su/Manager			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 3 of 56

Version

Version No.	Date	Description
00	Mar. 23, 2010	Initial creation of document



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 4 of 56

Table of Contents

1.	GEN	NERAL INFORMATION	6
	1.1	Product Description	<i>6</i>
	1.2	Related Submittal(s) / Grant (s)	8
	1.3	Test Methodology	8
	1.4	Test Facility	8
	1.5	Special Accessories	8
	1.6	Equipment Modifications	8
2.	SYS	TEM TEST CONFIGURATION	9
	2.1	EUT Configuration	9
	2.2	EUT Exercise	9
	2.3	Test Procedure	9
	2.4	Measurement Equipment Used:	10
	2.5	Configuration of Tested System	12
3.	SUM	MMARY OF TEST RESULTS	13
4.	DES	SCRIPTION OF TEST MODES	14
5.	RF I	POWER OUTPUT MEASUREMENT	15
	5.1	Standard Applicable	15
	5.2	Test Set-up:	15
	5.3	Measurement Procedure	15
	5.4	Measurement Equipment Used:	15
	5.5	Measurement Result	16
6.	ERF	P/EIRP MEASUREMENT	18
	6.1	Standard Applicable	18
	6.2	Test SET-UP (Block Diagram of Configuration)	18
	6.3	Measurement Procedure	20
	6.4	Measurement Equipment Used:	20
	6.5	Measurement Result	20
	6.5.1	. Measurement Result:	21
	6.5.2	2. Measurement Result:	22
7.	99%	OCCUPIED BANDWIDTH MEASUREMENT	 2 3
	7.1	Standard Applicable	23
	7.2	Test Set-up:	23
	7.3	Measurement Procedure	23
	7.4	Measurement Equipment Used:	23
	7.5	Measurement Result:	24



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 5 of 56

8.	OUI	OF BAND EMISSION AT ANTENNA TERMINALS	28
	8.1	Standard Applicable	28
	8.2	Test SET-UP	28
	8.3	Measurement Procedure	28
	8.4	Measurement Equipment Used:	29
	8.5. N	Measurement Result	29
9.	FIEI	LD STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)	38
	9.1	Standard Applicable	
	9.2	EUT Setup (Block Diagram of Configuration)	38
	9.3	Measurement Procedure	40
	9.4	Measurement Equipment Used:	40
	9.5	Measurement Result	40
10.	FRE	QUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	53
	10.1	Standard Applicable	
	10.2	Test Set-up:	53
	10.3	Measurement Procedure	53
	10.4	Measurement Equipment Used:	53
	10.5	Measurement Result	54
11.	FRE	QUENCY STABILITY V.S. VOLTAGE MEASUREMENT	55
	11.1	Standard Applicable	
	11.2	Test Set-up:	55
	11.3	Measurement Procedure	55
	11.4	Measurement Equipment Used:	55
	11.5	Measurement Result	56



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 6 of 56

GENERAL INFORMATION 1.

Product Description 1.1

General:

General:					
Product Name:	CDMA TS00)4			
Model Name:	CR11-J01				
FCC ID:	WVS-CR11-J01				
Software Version:	N/A				
Hardware Version:	N/A				
Data Cable:	N/A				
Simple Hands-free (SHF)	N/A				
Dower Cupply	3.7 Vdc re-chargeable battery or 5Vdc by AC/DC power adapter				
Power Supply:	Adapter: Model: 0203PQA; Supplier: MITSUMI ELECTRIC				

GSM and CDMA:

	Operating Frequency	Rated Power		
	CDMA2000 Cellular	TX: 824.70-848.31 MHz		24.5.4D
Cellular Phone Standards	CDMA2000 Cellular	RX:	869.70-893.31 MHz	24.5 dBm
Frequency Range and	GSM/GPRS 900, Class 10	880.2MHz – 914.8MHz		33 dBm
Power:	GSM/GPRS 1800, Class 10	1710.2MHz-1784.8MHz		30 dBm
	GSM/GPRS 1900, Class 10	1850.2MHz – 1909.8MHz		29 dBm
IMEI:	990000256742042			

Final Amplifier Voltage and Current Information:

Test Mode	DC voltage (V)	DC current (mA)
DCS 1900	3.7Vdc	495
CDMA Cellular	3.7Vdc	1030



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 7 of 56

Bluetooth:

Frequency Range:	2402 – 2480MHz		
Bluetooth Version:	V2.1 + EDR (GFSK + π /4DQPSK + 8DPSK)		
Channel number:	79 channels		
Transmit Power:	3.45 dBm (Peak)		
Modulation type:	Frequency Hopping Spread Spectrum		
Antenna Designation:	Monopole Antenna / antenna gain: 1.55dBi		

The EUT is compliance with Bluetooth 2.1 + EDR Standard.

FeliCa Receive Frequency:	13.56MHz
---------------------------	----------

The FeliCa only support receiving function.

This test report applies for CDMA2000 Cellular, GSM/GPRS 1900.



Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 8 of 56

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** <u>WVS-CR11-J01</u> filing to comply with Section Part 22 subpart H, Part 24 subpart E of the FCC CFR 47 Rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures of FCC 47 CFR 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number are: 990257 and 236194, Canada Registration Number: 4620A-1

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 & 10 meters) and FCC Registration Number: 94644.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 9 of 56

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Toshiba CDMA cellular phone FCC ID: WVS-CR11-J01 was Tested With AC Adapter. The EUT was stayed in normal operation mode (RC3/SO55) with CMU200. The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Measurement at Antenna Port:

According to measurement procured TIA/EIA 603C, the EUT is placed on a turn table which is 0.8 m above ground plane. A low loss of RF cable was used to connect the antenna port of EUT to measurement equipment.

2.3.2 Radiated Emissions (ERP/EIRP):

According to measurement procured TIA/EIA 603C. The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements.

A standard antenna was used to replace the EUT and connect to the SG. Adjust the SG output level to reach the max emission level which were measured above.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 10 of 56

2.4 Measurement Equipment Used:

Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
TYPE		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	04/19/2008	04/18/2010		
Spectrum Analyzer	Agilent	E4440A	US41160416	01/23/2010	01/22/2012		
Radio Communication Analyzer	R&S	CMU200	102189	05/13/208	05/13/2010		
800 – 1000MHz Filter	Micro-Tronics	BRM13462	001	01/05/2010	01/04/2011		
1800 – 2000MHz Filter	Micro-Tronics	BRM13463	001	01/05/2010	01/04/2011		
Temperature Chamber	TERCHY	MHG-120LF	911009	04/14/2008	04/13/2010		
Temperature Chamber	GIANT FORCE	GTH-150-40- CP-AR	MAA0512-018	02/05/2010	02/04/2012		
DC Block	Agilent	BLK-18	155452	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S20W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S10W5	N/A	07/05/2009	07/04/2010		
Attenuator	Mini-Circuit	BW-S6W5	N/A	07/05/2009	07/04/2010		
Splitter	Agilent	11636B	N/A	07/05/2009	07/04/2010		
DC Power Supply	HP	6038A	2929A-07548	06/27/2009	06/26/2011		
DC Power Supply	Chroma	41901	777188	04/17/2008	04/16/2010		



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 11 of 56

ERP, EIRP MEASUREMENT EQUIPMENT List 966 Chamber						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	R&S	FSP 40	100034	02/12/2010	02/11/2011	
Bilog Antenna	SCHWAZBECK	VULB9160	3158	11/29/2009	11/28/2011	
Dipole Antenna	SCHWAZBECK	VHAP	908/909	07/10/2008	07/09/2010	
Dipole Antenna	SCHWAZBECK	UHAP	891/892	07/10/2008	07/09/2010	
Hor.n antenna	SCHWAZBECK	BBHA 9120D	309	05/09/2008	05/10/2010	
Horn antenna	SCHWAZBECK	BBHA 9120D	9120D-673	05/09/2008	05/08/2010	
Signal Generator	R&S	SMR40	100210	01/22/2010	01/21/2012	
Signal Generator	Agilent	E4438C	MY45093613	05/22/2009	05/21/2010	
Pre-Amplifier	Agilent	8447D	1937A02834	11/30/2009	11/29/2010	
Pre-Amplifier	Agilent	8449B	3008A01973	01/05/2010	01/04/2011	
Attenuator	Mini-Circuit	BW-S20W5	001	07/05/2009	07/04/2010	
Attenuator	Mini-Circuit	BW-S10W5	001	07/05/2009	07/04/2010	
Attenuator	Mini-Circuit	BW-S6W5	001	07/05/2009	07/04/2010	
Radio Communication Analyzer	R&S	CMU200	102189	05/13/208	05/12/2010	
Turn Table	HD	DT420	N/A	N.C.R	N.C.R	
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R	
Controller	HD	HD100	N/A	N.C.R	N.C.R	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	01/05/2010	01/04/2011	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	01/05/2010	01/04/2011	
3m Site	SGS	966 chamber	N/A	11/08/2009	11/09/2010	




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 12 of 56

2.5 **Configuration of Tested System**

Fig. 2-1 Configuration of Tested System (Fixed Channel)



CMU200

Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.	Data Cable	Power Cord
1.	Universal Radio Com- munication Tester	R&S	CMU200	102189	shielded	Un-shielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌和股工業區五工路134號 www.sgs.com.tw



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 13 of 56

SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result	
§2.1046(a)	DED. O. A. A.	C 1:	
§24.232(c)	RF Power Output	Compliant	
§2.1046(a)			
§22.913(a)(2)	ERP/ EIRP measurement	Compliant	
§24.232(c)			
§2.1049(h)	99% Occupied Bandwidth	Compliant	
§2.1051	Out of Band Emissions at Antenna		
§22.917(a)	Terminals and	Compliant	
§24.238(a)	Band Edge		
§2.1053			
§22.917(a)	Field Strength of Spurious Radiation	Compliant	
§24.238(a)			
§2.1055(a)(1)			
§22.355	Frequency Stability vs. Temperature	Compliant	
§24.235			
§2.1055(d)(2)			
§22.355	Frequency Stability vs. Voltage	Compliant	
§24.235			



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 14 of 56

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Set EUT power control "all up bits" for all test mode through base station.

Channel Low, Mid and High for each type of bands with rated data rate were chosen for full testing.

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for CDMA2000 Cellular and PCS 1900 with power adaptor. The worst-case E1 mode of CDMA2000 Cellular band and E1 mode of PCS 1900 for channels Low, Mid and High were reported.

Max ERP/EIRP measurement result:

	dBm		W
CDMA2000	26.95	ERP	0.495
Cellular Band			
GSM 1900 Band	29.57	EIRP	0.906

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 15 of 56

RF POWER OUTPUT MEASUREMENT

5.1 Standard Applicable

According to FCC §2.1046.

FCC 22.913(a)(2) Mobile station are limited to 7W.

FCC 24.232(c) Mobile station are limited to 2W.

5.2 Test Set-up:



Note: Measurement setup for testing on Antenna connector

5.3 Measurement Procedure

The transmitter output was connected to a calibrated Communication Tester by a low lost RF cable. The power output at the transmitter antenna port was determined by adding the value of the attenuator to the reading from tester.

5.4 Measurement Equipment Used:

Conducted Emission Test Site								
EQUIPMENT	LAST	CAL DUE.						
TYPE		NUMBER	NUMBER	CAL.				
Communication Test	R&S	CMU200	102189	05/13/2009	05/12/2010			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	02/13/2010	02/12/2011			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document. Any unauthorized attention from expressing at the processing from expressing from expressing the processing from expressing from expressing the processing from expressing from e ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 16 of 56

5.5 Measurement Result

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	Avg. Power (dBm)
GD3.4.4.2000	824.70	1013	24.94	24.84
CDMA 2000 Cellular	836.52	384	24.87	24.74
	848.31	777	24.91	24.80

EUT Mode	Frequency (MHz)	СН	Peak Power (dBm)	Avg. Power (dBm)
PCS 1900	1850.2	512	29.40	29.30
	1880.0	661	28.70	28.60
	1909.8	810	28.70	28.60

Offset: 4.9dB for GSM 1900

2.7dB for GSM850 and CDMA200 Cellular



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 17 of 56

Maximum Power Reduction:

PCS 1900 band

PCL	0	1	2	3	4	5	6	7	8
Output power (dBm)	28.6	27.6	25.7	23.7	21.7	19.7	17.7	15.7	15.7
PCL	9	10	11	12	13	14	15	16	
Output power (dBm)	11.7	9.7	7.7	5.6	3.6	1.6	-0.4		

Note: The EUT output power was controlled by simulator. Set Communication Tester CMU200 PCL as above, and get the mobile phone output power reading.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 18 of 56

ERP/EIRP MEASUREMENT

6.1 Standard Applicable


According to FCC §2.1046

FCC 22.913(a)(2) Mobile station are limited to 7W ERP.

FCC 24.232(c) Mobile station are limited to 2W EIRP.

6.2 Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

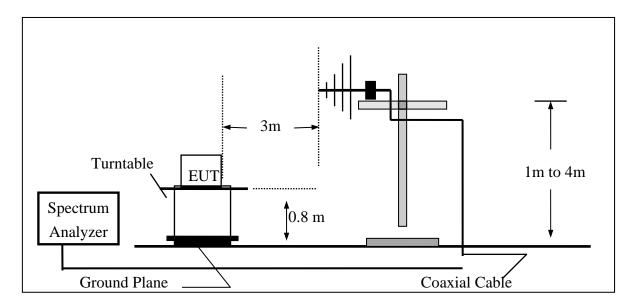

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 19 of 56

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

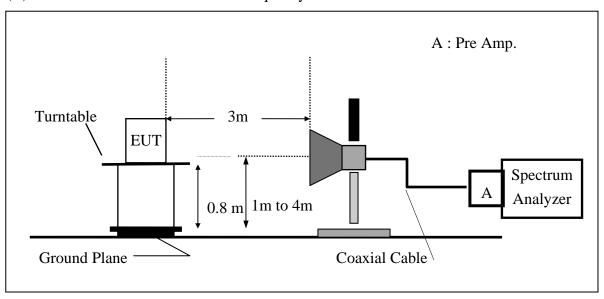

Substituted Method Test Set-UP

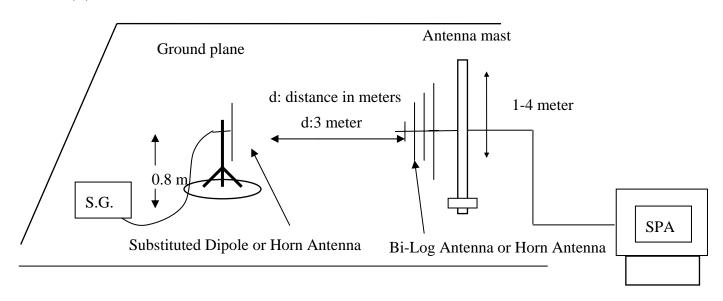

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document. Any unauthorized attention from expressing at the processing from expressing from expressing the processing from expressing from expressing the processing from expressing from e ment does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博拓股工業區五工路134號 www.sgs.com.tw



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 20 of 56

6.3 Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

ERP = S.G. output (dBm) + Antenna Gain (dBd) - Cable Loss (dB)

EIRP = S.G. output (dBm) + Antenna Gain (dBi) - Cable Loss (dB)

6.4 Measurement Equipment Used:

Refer to section 2.4 in this report

6.5 Measurement Result

Refer to following pages for detail.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 21 of 56

6.5.1. Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)
			**	V	124.09	37.73	-7.88	3.63	26.22	38.45
			Н	Н	113.57	27.31	-7.88	3.63	15.81	38.45
	924.70	1012	E1	V	114.84	28.48	-7.88	3.63	16.97	38.45
	824.70	1013	151	Н	124.11	37.85	-7.88	3.63	26.35	38.45
			E2	V	110.51	24.15	-7.88	3.63	12.64	38.45
			LL	Н	121.77	35.51	-7.88	3.63	24.01	38.45
		384	Н	V	123.62	37.36	-7.88	3.65	25.83	38.45
				Н	113.10	26.87	-7.88	3.65	15.34	38.45
CDMA2000	026.52		E1	V	113.48	27.22	-7.88	3.65	15.69	38.45
Cellular	836.52			Н	123.89	37.66	-7.88	3.65	26.13	38.45
			E2	V	110.36	24.10	-7.88	3.65	12.57	38.45
				Н	124.15	37.92	-7.88	3.65	26.39	38.45
			Н	V	124.12	37.97	-7.88	3.67	26.42	38.45
			11	Н	113.60	27.40	-7.88	3.67	15.85	38.45
	040.21	777	E1	V	113.62	27.46	-7.88	3.67	15.91	38.45
	848.31	777	EI	Н	124.70	38.50	-7.88	3.67	26.95	38.45
			E2	V	110.50	24.35	-7.88	3.67	12.80	38.45
			152	Н	124.64	38.44	-7.88	3.67	26.89	38.45

Remark:

The RBW, VBW of SPA for frequency (1) RBW=300 KHz, VBW=1MHz,



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 22 of 56

6.5.2. Measurement Result:

EUT Mode	Frequency (MHz)	СН	EUT Pol.	Antenna Pol.	SPA Reading (dBuV)	S.G. Output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)
				V	125.93	21.54	9.90	5.56	25.88	33.00
			Н	Н	116.29	12.11	9.90	5.56	16.45	33.00
	1050.20	510	E1	V	114.57	10.18	9.90	5.56	14.52	33.00
	1850.20	512	Ei	Н	129.41	25.23	9.90	5.56	29.57	33.00
			E2	V	119.40	15.01	9.90	5.56	19.35	33.00
			1.2	Н	128.92	24.74	9.90	5.84	28.80	33.00
		661	Н	V	124.64	20.28	9.99	5.61	24.66	33.00
				Н	113.00	8.86	9.99	5.61	13.23	33.00
P.GG 1000	1000.00		E1	V	112.24	7.88	9.99	5.61	12.26	33.00
PCS 1900	1880.00			Н	127.52	23.38	9.99	5.61	27.75	33.00
			E2	V	118.16	13.80	9.99	5.61	18.18	33.00
				Н	127.12	22.98	9.99	5.61	27.35	33.00
			Н	V	124.01	19.68	10.08	5.66	24.10	33.00
			11	Н	113.61	9.50	10.08	5.66	13.92	33.00
	1000.00	010	E1	V	111.04	6.71	10.08	5.66	11.13	33.00
	1909.80	810	EI	Н	126.27	22.16	10.08	5.66	26.58	33.00
			E2	V	117.44	13.11	10.08	5.66	17.53	33.00
			2نا	Н	125.78	21.67	10.08	5.66	26.09	33.00

Remark:

(1) The RBW, VBW of SPA for frequency RBW=300 KHz, VBW=1MHz,



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**


Page: 23 of 56

99% OCCUPIED BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to §FCC 2.1049.

7.2 Test Set-up:

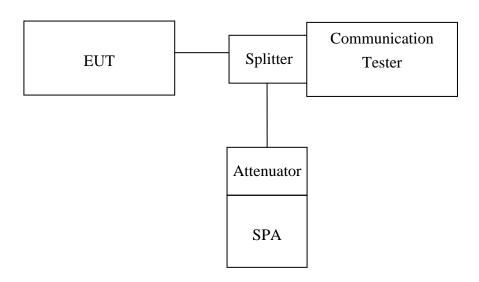

Note: Measurement setup for testing on Antenna connector

7.3 Measurement Procedure

The EUT's output RF connector was connected with a short cable to the spectrum analyzer, RBW (10/30KHz) was set to about 1% of emission BW, VBW= 3 times RBW(30/100KHz), -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

7.4 Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀刊工業品工工路134號 www.sgs.com.tw



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 24 of 56

7.5 Measurement Result:

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
CDMA2000 Cellular	824.70	1013	1.2794
	836.52	384	1.2787
Centilai	848.31	777	1.2792

EUT Mode	Frequency (MHz)	СН	99% Bandwidth (MHz)
	1850.20	512	0.2455
PCS 1900	1880.00	661	0.2469
	1909.80	810	0.2467



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 25 of 56

Figure 7-1: CDMA2000 Cellular Channel Low


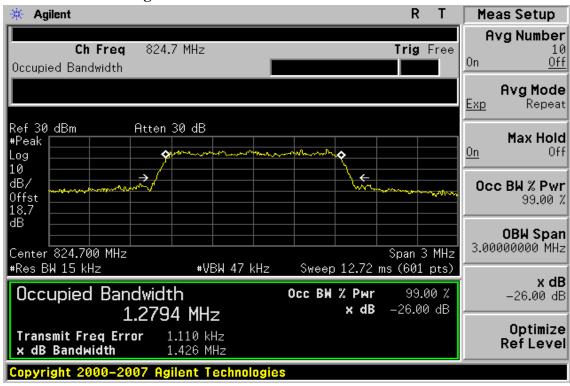


Figure 7-2 CDMA2000 Cellular Channel Mid



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

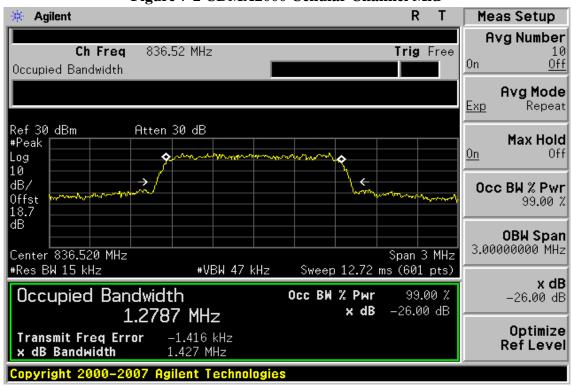

Report No.: EH/2010/20044 FCC ID: WVS-CR11-J01 **Issue Date: Mar. 23, 2010**

Page: 26 of 56

Figure 7-3: CDMA2000 Cellular Channel High


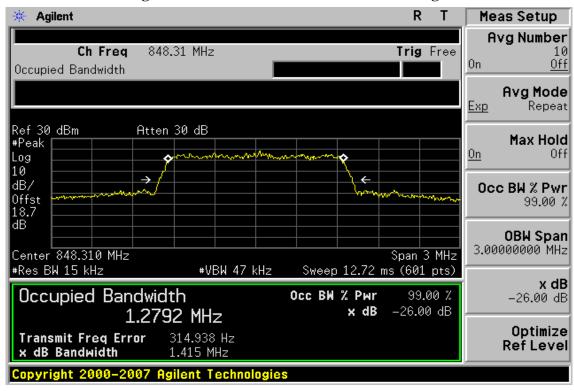


Figure 7-4: PCS1900 Channel Low



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

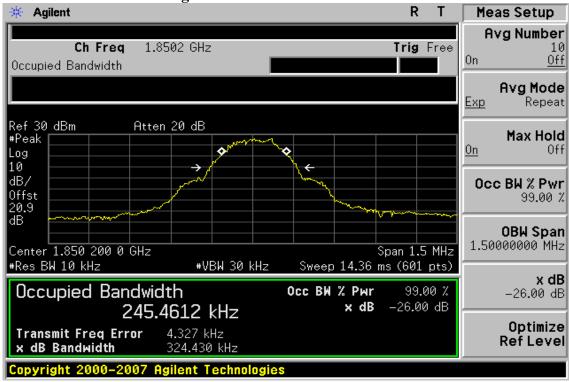

Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 27 of 56

Figure 7-5 PCS1900 Channel Mid


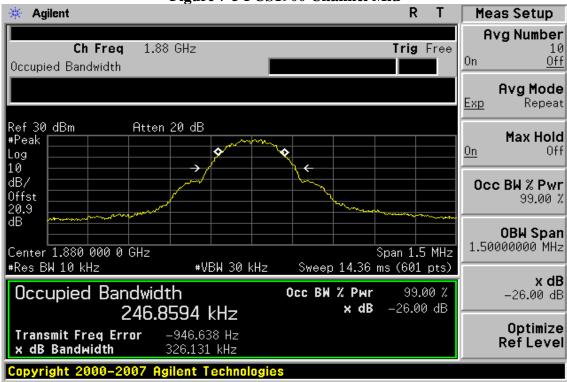


Figure 7-6: PCS1900 Channel High

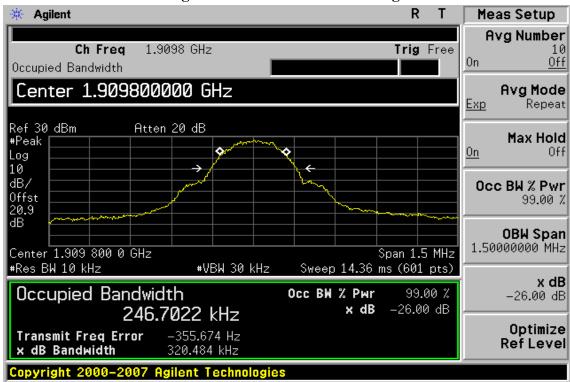

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博紀史工業品工工路134號

台灣檢驗科技股份有限公司 t (886-2) 2299-3939

f (886-2) 2299-3279



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 28 of 56


OUT OF BAND EMISSION AT ANTENNA TERMINALS

8.1 Standard Applicable

According to FCC §2.1051.

FCC §22.917(a),§24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

8.2 Test SET-UP

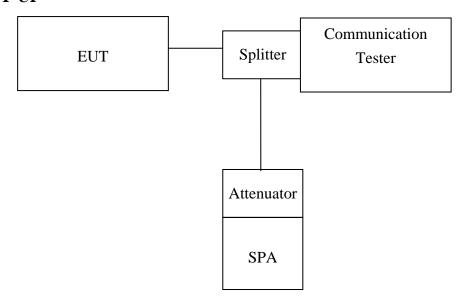

Note: Measurement setup for testing on Antenna connector

8.3 Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 1MHz, Start=30MHz, Stop= 10th harmonic. Limit = -13dBm

Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit, -13dBm.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台 縣五股工業區五工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 29 of 56

8.4 Measurement Equipment Used:

Refer to section 2.4 in this report

8.5. Measurement Result


Refer to next page for plots.




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 30 of 56

Figure 8-1: Out of Band emission at antenna terminals—Cellular Band Lowest Channel

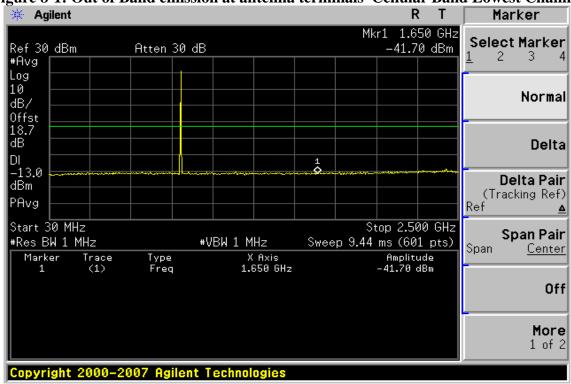

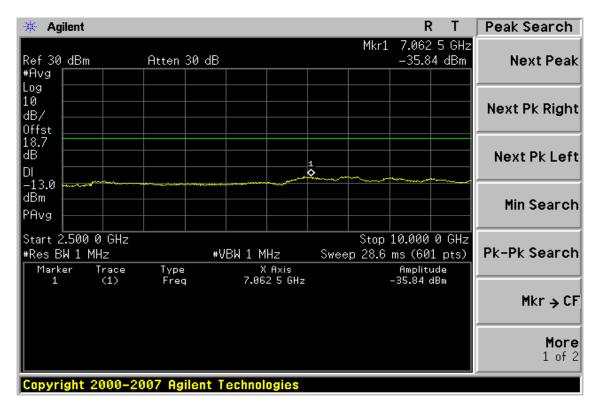

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌紀刊工業品工工路134號


www.sgs.com.tw




Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 31 of 56

Figure 8-2: Out of Band emission at antenna terminals -Cellular Band Mid Channel

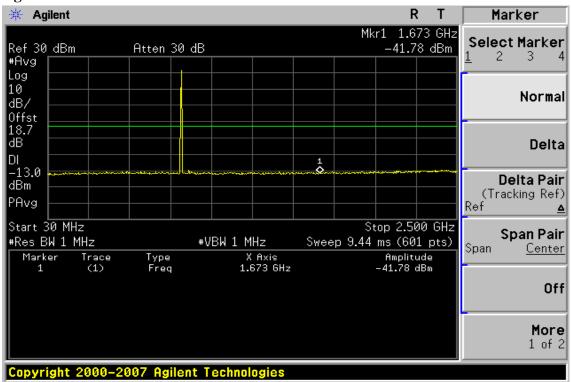

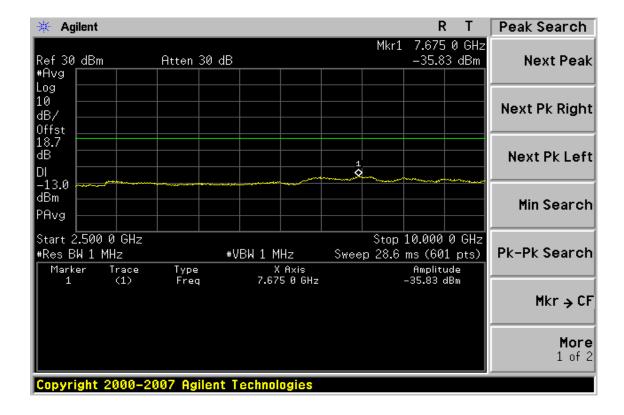

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 32 of 56

Figure 8-3: Out of Band emission at antenna terminals-Cellular Band Highest Channel

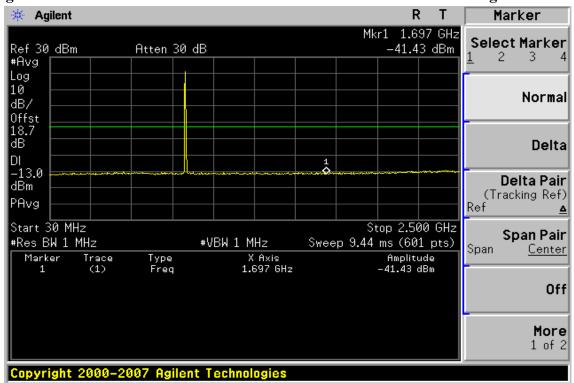

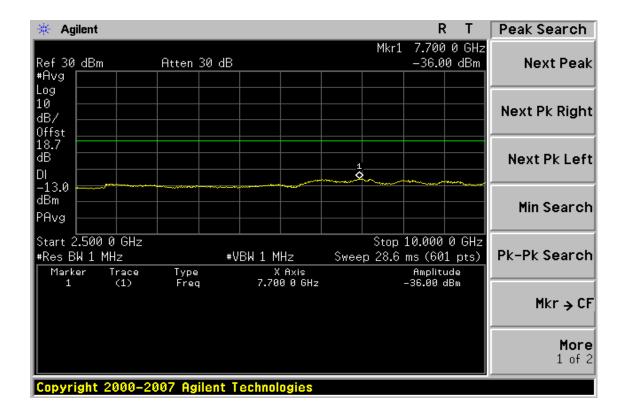

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 33 of 56

Figure 8-4: Band edge emission at antenna terminals -Cellular Band Channel Lowest


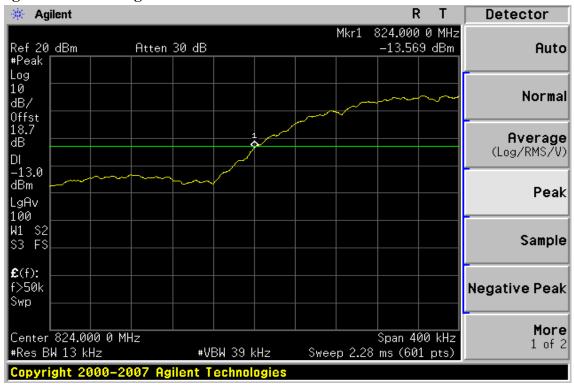


Figure 8-5: Band edge emission at antenna terminals -Cellular Band Channel Highest



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

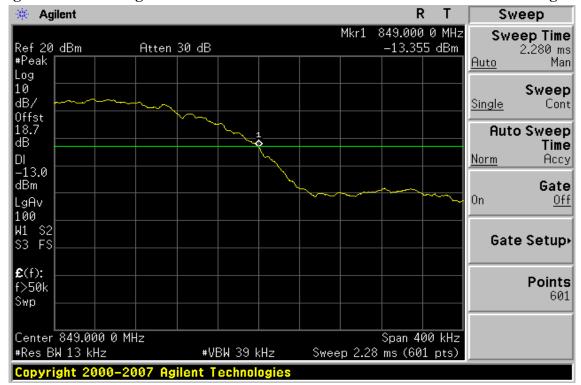


Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 34 of 56

Figure 8-6: Out of Band emission at antenna terminals-PCS 1900 Lowest Channel

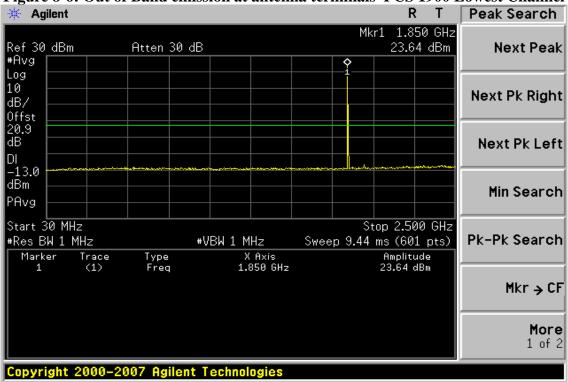

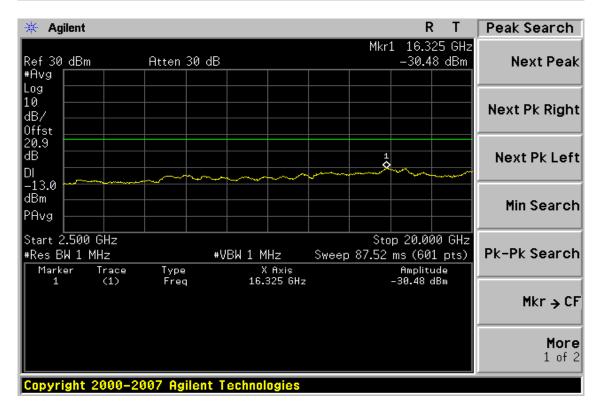

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 35 of 56

Figure 8-7: Out of Band emission at antenna terminals -PCS 1900 Mid Channel

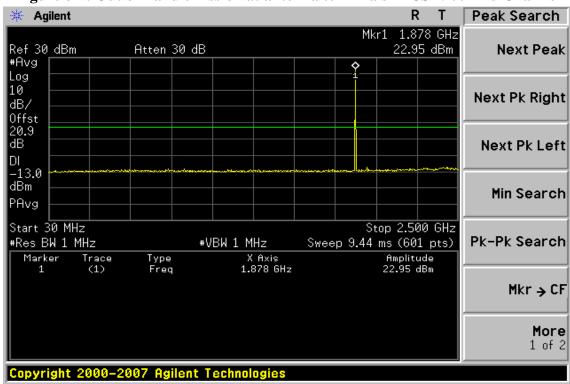

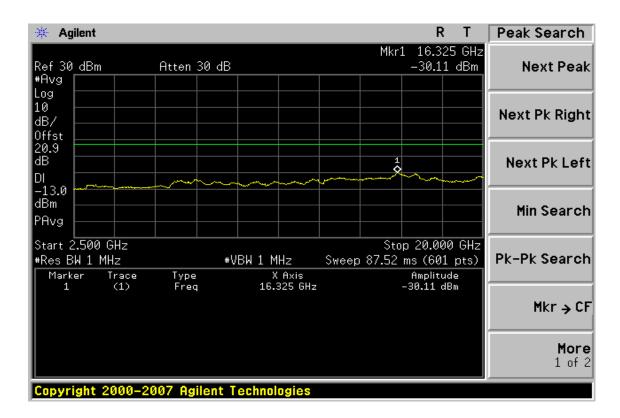

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 36 of 56

Figure 8-8: Out of Band emission at antenna terminals-PCS 1900 Highest Channel

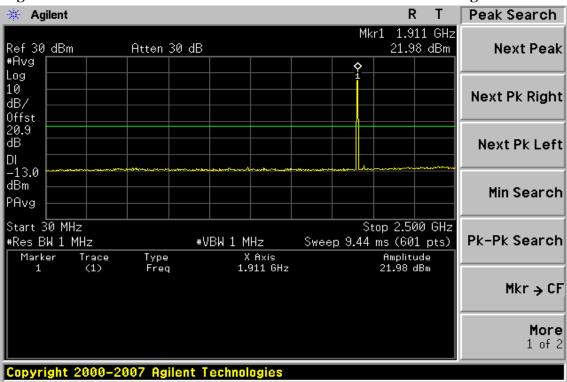

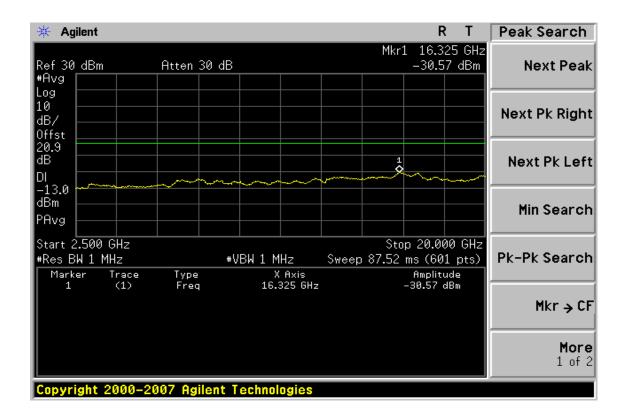

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 37 of 56

Figure 8-9: Band edge emission at antenna terminals –PCS 1900 Lowest Channel

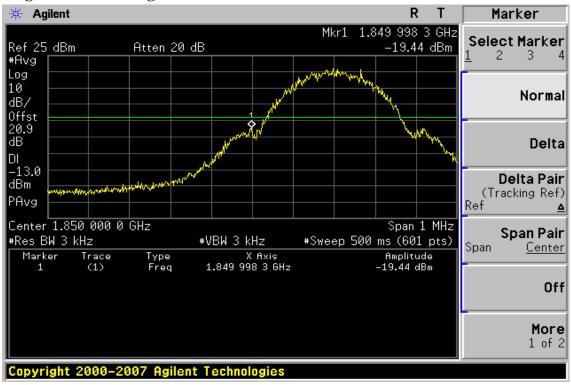


Figure 8-10: Band edge emission at antenna terminals -PCS 1900 Highest Channel



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 38 of 56

FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT (TX)


9.1 **Standard Applicable**

According to FCC §2.1053,

FCC §22.917(a),§24.238(a) the magnitude of each spurious and harmonic emission that can be detected when the equipment is operated under the conditions specified in the instruction manual and/ or alignment procedure, shall not be less than 43 + 10 log (mean output power in watts) dBc below the mean power output outside a license's frequency block (-13dBm)

9.2 **EUT Setup (Block Diagram of Configuration)**

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

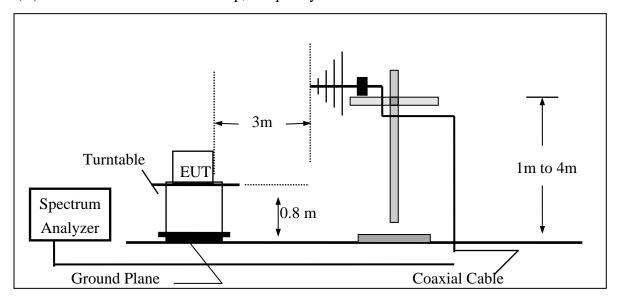

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.


Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 39 of 56

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

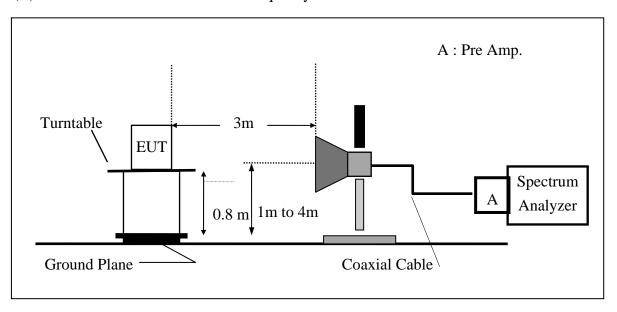

(C) Substituted Method Test Set-UP

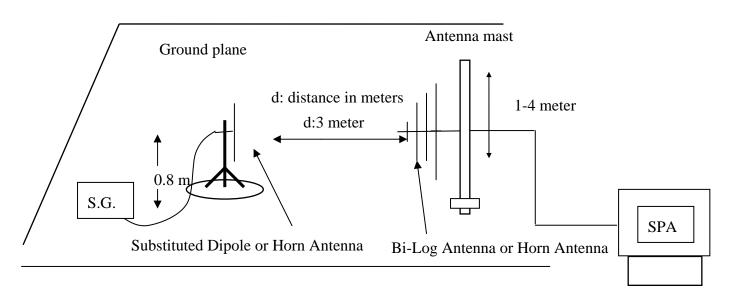

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not except expendent does not except the parties that a transaction from experience of the designations under the transaction documents. Any unantification force over felicities to the company's sole responsibility is not to the company's sole responsibility. ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博拓股工業區五工路134號 www.sgs.com.tw



Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 40 of 56

9.3 Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by a horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

ERP = S.G. output (dBm) + Antenna Gain(dBd) - Cable Loss <math>(dB)

EIRP = S.G. output (dBm) + Antenna Gain(dBi) - Cable Loss <math>(dB)

9.4 Measurement Equipment Used:

Refer to section 2.4 in this report

9.5 Measurement Result

Refer to attach tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 41 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 1013 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency : 824.70 MHz Test By: Jason Pol: Temperature Ver : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	43.67	V	-59.06	-4.16	0.91	-64.13	-13.00	-51.13
56.19	40.30	V	-69.36	-0.51	1.09	-70.97	-13.00	-57.97
77.53	44.23	V	-67.19	-2.12	1.21	-70.52	-13.00	-57.52
92.08	45.20	V	-57.73	-7.75	1.29	-66.77	-13.00	-53.77
824.00	69.55	V	-16.84	-7.87	3.62	-28.34	-13.00	-15.34
1649.40	36.37	V	-68.21	9.29	5.23	-64.15	-13.00	-51.15
2474.10	35.88	V	-65.12	10.08	6.53	-61.57	-13.00	-48.57
3298.80	35.31	V	-63.56	12.17	7.72	-59.10	-13.00	-46.10
4123.50		V		12.61	8.86		-13.00	
4948.20		V		12.65	9.74		-13.00	
5772.90		V		13.56	10.54		-13.00	
6597.60		V		12.04	11.30		-13.00	
7422.30		V		11.49	12.10		-13.00	
8247.00		V		11.48	12.72		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 42 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 1013 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency Test By: Jason : 824.70 MHz Temperature Pol: Hor : 25°C

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	42.71	Н	-60.48	-3.25	0.90	-64.63	-13.00	-51.63
53.28	37.31	Н	-71.13	-0.55	1.11	-72.80	-13.00	-59.80
92.08	40.51	Н	-63.08	-7.75	1.29	-72.12	-13.00	-59.12
109.54	43.52	Н	-58.48	-7.77	1.40	-67.65	-13.00	-54.65
824.00	81.54	Н	-4.73	-7.87	3.62	-16.23	-13.00	-3.23
1649.40	42.08	Н	-62.32	9.29	5.23	-58.26	-13.00	-45.26
2474.10	39.39	Н	-61.51	10.08	6.53	-57.97	-13.00	-44.97
3298.80	35.83	Н	-63.26	12.17	7.72	-58.81	-13.00	-45.81
4123.50		Н		12.61	8.86		-13.00	
4948.20		Н		12.65	9.74		-13.00	
5772.90		Н		13.56	10.54		-13.00	
6597.60		Н		12.04	11.30		-13.00	
7422.30		Н		11.49	12.10		-13.00	
8247.00		Н		11.48	12.72		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 43 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 384 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency : 836.52 MHz Test By: Jason Temperature : 25° C Pol: Ver

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
31.94	51.41	V	-52.73	-6.43	0.94	-60.10	-13.00	-47.10
46.49	38.73	V	-66.44	-1.32	1.05	-68.81	-13.00	-55.81
77.53	43.98	V	-67.44	-2.12	1.21	-70.77	-13.00	-57.77
1673.04	36.27	V	-68.29	9.36	5.27	-64.20	-13.00	-51.20
2509.56	39.27	V	-61.51	10.09	6.58	-58.01	-13.00	-45.01
3346.08	36.48	V	-62.38	12.27	7.79	-57.90	-13.00	-44.90
4182.60		V		12.62	8.93		-13.00	
5019.12		V		12.67	9.81		-13.00	
5855.64		V		13.68	10.62		-13.00	
6692.16		V		11.95	11.39		-13.00	
7528.68		V		11.45	12.20		-13.00	
8365.20		V		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belongs to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 44 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 384 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 836.52 MHz Test By: Jason Pol: Temperature Hor : 25℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	42.88	Н	-60.01	-2.79	0.89	-63.70	-13.00	-50.70
53.28	37.91	Н	-70.53	-0.55	1.11	-72.20	-13.00	-59.20
92.08	41.48	Н	-62.11	-7.75	1.29	-71.15	-13.00	-58.15
177.44	34.97	Н	-64.93	-7.82	1.66	-74.41	-13.00	-61.41
1673.04	43.96	Н	-60.42	9.36	5.27	-56.32	-13.00	-43.32
2509.56	37.99	Н	-62.71	10.09	6.58	-59.21	-13.00	-46.21
3346.08	36.14	Н	-62.92	12.27	7.79	-58.44	-13.00	-45.44
4182.60		Н		12.62	8.93		-13.00	
5019.12		Н		12.67	9.81		-13.00	
5855.64		Н		13.68	10.62		-13.00	
6692.16		Н		11.95	11.39		-13.00	
7528.68		Н		11.45	12.20		-13.00	
8365.20		Н		11.59	12.81		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not except expendent does not except the parties that a transaction from experience of the designations under the transaction documents. Any unantification force over felicities to the company's sole responsibility is not to the company's sole responsibility. ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

| No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌和股工業區五工路134號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司 t (886-2) 2299-3939

f (886-2) 2299-3279



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 45 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 777 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 848.31 MHz Test By: Jason Pol: Ver Temperature : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	43.98	V	-58.75	-4.16	0.91	-63.82	-13.00	-50.82
56.19	40.44	V	-69.22	-0.51	1.09	-70.83	-13.00	-57.83
77.53	43.67	V	-67.75	-2.12	1.21	-71.08	-13.00	-58.08
92.08	45.30	V	-57.63	-7.75	1.29	-66.67	-13.00	-53.67
155.13	34.16	V	-63.59	-7.80	1.60	-73.00	-13.00	-60.00
849.00	65.94	V	-20.18	-7.88	3.68	-31.74	-13.00	-18.74
1696.62	39.23	V	-65.31	9.43	5.31	-61.18	-13.00	-48.18
2544.93	38.90	V	-61.75	10.19	6.63	-58.19	-13.00	-45.19
3393.24	35.52	V	-63.33	12.38	7.86	-58.82	-13.00	-45.82
4241.55		V		12.63	9.00		-13.00	
5089.86		V		12.74	9.88		-13.00	
5938.17		V		13.81	10.70		-13.00	
6786.48		V		11.86	11.48		-13.00	
7634.79		V		11.41	12.27		-13.00	
8483.10		V		11.69	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- $4 \text{ ERP/EIRP } (dBm) = SG \text{ Setting}(dBm) + Antenna Gain } (dB/dBi) Cable loss } (dB)$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 46 of 56

Radiated Spurious Emission Measurement Result: CDMA2000 Cellular Mode

Operation Mode : TX CH 777 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 848.31 MHz Test By: Jason Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	43.02	Н	-59.87	-2.79	0.89	-63.56	-13.00	-50.56
53.28	38.29	Н	-70.15	-0.55	1.11	-71.82	-13.00	-58.82
92.08	40.70	Н	-62.89	-7.75	1.29	-71.93	-13.00	-58.93
155.13	34.12	Н	-64.05	-7.80	1.60	-73.45	-13.00	-60.45
849.00	79.19	Н	-7.00	-7.88	3.68	-18.56	-13.00	-5.56
1696.62	38.34	Н	-66.01	9.43	5.31	-61.88	-13.00	-48.88
2544.93	37.82	Н	-62.78	10.19	6.63	-59.22	-13.00	-46.22
3393.24	36.82	Н	-62.21	12.38	7.86	-57.69	-13.00	-44.69
4241.55		Н		12.63	9.00		-13.00	
5089.86		Н		12.74	9.88		-13.00	
5938.17		Н		13.81	10.70		-13.00	
6786.48		Н		11.86	11.48		-13.00	
7634.79		Н		11.41	12.27		-13.00	
8483.10		Н		11.69	12.91		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 47 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 25 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 1851.25MHz Test By: Jason Pol: Ver Temperature : 25℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
30.00	46.34	V	-58.36	-7.34	0.95	-66.65	-13.00	-53.65
36.79	44.34	V	-58.39	-4.16	0.91	-63.46	-13.00	-50.46
53.28	39.10	V	-69.31	-0.55	1.11	-70.97	-13.00	-57.97
90.14	45.74	V	-57.44	-7.75	1.27	-66.46	-13.00	-53.46
101.78	45.24	V	-56.52	-7.76	1.37	-65.64	-13.00	-52.64
1850.00	68.71	V	-35.68	9.90	5.56	-31.34	-13.00	-18.34
3700.40	39.88	V	-58.05	12.61	8.31	-53.75	-13.00	-40.75
5550.60	40.02	V	-50.82	13.23	10.33	-47.92	-13.00	-34.92
7400.80		V		11.50	12.08		-13.00	
9251.00		V		11.92	13.50		-13.00	
11101.20		V		11.66	15.11		-13.00	
12951.40		V		13.63	16.60		-13.00	
14801.60		V		12.76	17.95		-13.00	
16651.80		V		15.92	19.14		-13.00	
18502.00		V		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB			
	80MHz -1000MHz: 3.76dB			
	1GHz - 13GHz: 4.45dB			

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 Issue Date: Mar. 23, 2010

Page: 48 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 25 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency : 1851.25 MHz Test By: Jason Temperature : 25°C Pol: Hor

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
39.70	42.32	Н	-60.57	-2.79	0.89	-64.26	-13.00	-51.26
56.19	37.44	Н	-72.20	-0.51	1.09	-73.80	-13.00	-60.80
92.08	40.20	Н	-63.39	-7.75	1.29	-72.43	-13.00	-59.43
104.69	41.65	Н	-60.86	-7.76	1.38	-70.00	-13.00	-57.00
164.83	34.26	Н	-64.66	-7.81	1.63	-74.10	-13.00	-61.10
1850.00	83.92	Н	-20.26	9.90	5.56	-15.92	-13.00	-2.92
3700.40	37.60	Н	-60.44	12.61	8.31	-56.14	-13.00	-43.14
5550.60	42.72	Н	-48.33	13.23	10.33	-45.43	-13.00	-32.43
7400.80		Н		11.50	12.08		-13.00	
9251.00		Н		11.92	13.50		-13.00	
11101.20		Н		11.66	15.11		-13.00	
12951.40		Н		13.63	16.60		-13.00	
14801.60		Н		12.76	17.95		-13.00	
16651.80		Н		15.92	19.14		-13.00	
18502.00		Н		18.75	10.40		-13.00	

Measurement uncertainty	30MHz - 80MHz: 5.04dB
	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博品形工業品工路134號

台灣檢驗科技股份有限公司 **t** (886-2) 2299-3939

2299-3939 **f** (886-2) 2299-3279



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 49 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 600 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 1880.00MHz Test By: Jason Pol: Ver Temperature : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Out- put (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
36.79	44.38	V	-58.35	-4.16	0.91	-63.42	-13.00	-50.42
77.53	42.87	V	-68.55	-2.12	1.21	-71.88	-13.00	-58.88
90.14	46.25	V	-56.93	-7.75	1.27	-65.95	-13.00	-52.95
101.78	44.91	V	-56.85	-7.76	1.37	-65.97	-13.00	-52.97
177.44	35.92	V	-63.83	-7.82	1.66	-73.31	-13.00	-60.31
3760.00	40.57	V	-57.09	12.60	8.39	-52.87	-13.00	-39.87
5640.00	43.84	V	-46.74	13.36	10.41	-43.79	-13.00	-30.79
7520.00		V		11.45	12.19		-13.00	
9400.00		V		11.93	13.61		-13.00	
11280.00		V		11.92	15.27		-13.00	
13160.00		V		13.33	16.71		-13.00	
15040.00		V		13.76	18.15		-13.00	
16920.00		V		15.27	19.32		-13.00	
18800.00		V		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 50 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 600 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 1880.00MHz Test By: Jason Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
41.64	42.54	Н	-60.97	-2.31	0.93	-64.21	-13.00	-51.21
53.28	37.50	Н	-70.94	-0.55	1.11	-72.61	-13.00	-59.61
104.69	41.83	Н	-60.68	-7.76	1.38	-69.82	-13.00	-56.82
177.44	34.72	Н	-65.18	-7.82	1.66	-74.66	-13.00	-61.66
3760.00	40.60	Н	-57.17	12.60	8.39	-52.96	-13.00	-39.96
5640.00	39.24	Н	-51.51	13.36	10.41	-48.56	-13.00	-35.56
7520.00		Н		11.45	12.19		-13.00	
9400.00		Н		11.93	13.61		-13.00	
11280.00		Н		11.92	15.27		-13.00	
13160.00		Н		13.33	16.71		-13.00	
15040.00		Н		13.76	18.15		-13.00	
16920.00		Н		15.27	19.32		-13.00	
18800.00		Н		18.68	16.58		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not except expendent does not except the parties that a transaction from experience of the designations under the transaction documents. Any unantification force over felicities to the company's sole responsibility is not to the company's sole responsibility. ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 51 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 1175 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 1908.75MHz Test By: Jason Pol: Ver Temperature : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
34.94	49.90	V	-53.37	-5.02	0.92	-59.31	-13.00	-46.31
56.19	40.03	V	-69.63	-0.51	1.09	-71.24	-13.00	-58.24
77.53	44.03	V	-67.39	-2.12	1.21	-70.72	-13.00	-57.72
92.08	45.39	V	-57.54	-7.75	1.29	-66.58	-13.00	-53.58
1910.00	63.43	V	-40.90	10.08	5.66	-36.48	-13.00	-23.48
3819.60	39.96	V	-57.43	12.60	8.47	-53.30	-13.00	-40.30
5729.40	42.24	V	-48.08	13.49	10.50	-45.08	-13.00	-32.08
7639.20		V		11.40	12.27		-13.00	
9549.00		V		11.95	13.74		-13.00	
11458.80		V		12.17	15.43		-13.00	
13368.60		V		12.97	16.82		-13.00	
15278.40		V		15.00	18.29		-13.00	
17188.20		V		14.47	19.52		-13.00	
19098.00		V		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not except expendent does not except the parties that a transaction from experience of the designations under the transaction documents. Any unantification force over felicities to the company's sole responsibility is not to the company's sole responsibility. ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 52 of 56

Radiated Spurious Emission Measurement Result: PCS 1900 Mode

Operation Mode : TX CH 1175 E1 Mode Test Date: Mar. 23, 2010

Fundamental Frequency: 1908.75MHz Test By: Jason Pol: Temperature Hor : 25°℃

Humidity : 65%

Freq. (MHz)	SPA. Reading (dBuV)	Ant.Pol. H/V	S.G Output (dBm)	Antenna Gain (dB/dBi)	Cable Loss (dB)	ERP/ EIRP (dBm)	Limit (dBm)	Safe Margin (dBm)
38.73	42.91	Н	-60.28	-3.25	0.90	-64.43	-13.00	-51.43
56.19	39.16	Н	-70.48	-0.51	1.09	-72.08	-13.00	-59.08
104.69	41.46	Н	-61.05	-7.76	1.38	-70.19	-13.00	-57.19
150.28	33.47	Н	-64.32	-7.80	1.59	-73.71	-13.00	-60.71
1910.00	80.39	Н	-23.72	10.08	5.66	-19.30	-13.00	-6.30
3819.60	37.52	Н	-59.99	12.60	8.47	-55.85	-13.00	-42.85
5729.40	37.46	Н	-52.99	13.49	10.50	-50.00	-13.00	-37.00
7639.20		Н		11.40	12.27		-13.00	
9549.00		Н		11.95	13.74		-13.00	
11458.80		Н		12.17	15.43		-13.00	
13368.60		Н		12.97	16.82		-13.00	
15278.40		Н		15.00	18.29		-13.00	
17188.20		Н		14.47	19.52		-13.00	
19098.00		Н		18.66	20.78		-13.00	

	30MHz - 80MHz: 5.04dB
Measurement uncertainty	80MHz -1000MHz: 3.76dB
	1GHz - 13GHz: 4.45dB

Remark:

- 1 The emission behaviors belong to narrowband spurious emission.
- 2 Remark"---" means that the emission level is too low to be measured
- 3 The result basic equation calculation is as follows:
- 4 ERP/EIRP (dBm) = SG Setting(dBm) + Antenna Gain (dB/dBi) Cable loss (dB)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not except expendent does not except the parties that a transaction from experience of the designations under the transaction documents. Any unantification force over felicities to the company's sole responsibility is not to the company's sole responsibility. ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 53 of 56

10. FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT


10.1 Standard Applicable

According to FCC §2.1055(a)(1)

Frequency Tolerance: +/- 2.5 ppm

10.2 Test Set-up:

Temperature Chamber

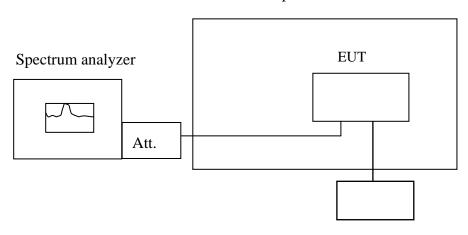

Variable Power Supply

Note: Measurement setup for testing on Antenna connector

10.3 Measurement Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

10.4 Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. | No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台牌紀刊工業品工工路134號 t (886-2) 2299-3939 f (886-2) 2299-3279 www.sgs.com.tw



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 54 of 56

10.5 Measurement Result

Reference Frequency: CDMA2000 Cellular Band Mid Channel 836.52 MHz @ 25°C				
Limit: +/- 0.05 ppm = 41.82 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature (°C)	(MHz)		
3.7	-30	836.520001	-5.00	2091
3.7	-20	836.520005	-9.00	2091
3.7	-10	836.520007	-11.00	2091
3.7	0	836.520004	-8.00	2091
3.7	10	836.519997	-1.00	2091
3.7	20	836.519996	0.00	2091
3.7	30	836.519999	-3.00	2091
3.7	40	836.520003	-7.00	2091
3.7	50	836.520000	-4.00	2091

Reference Frequency: PCS 1900 Mid Channel 1880.00 MHz @ 25°C					
Limit: +/- 2.5 ppm = 4700 Hz					
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)	
Vdc	Temperature ($^{\circ}$ C)	(MHz)			
3.7	-30	1880.000006	-7.00	4700	
3.7	-20	1879.999988	11.00	4700	
3.7	-10	1879.999983	16.00	4700	
3.7	0	1879.999995	4.00	4700	
3.7	10	1880.000011	-12.00	4700	
3.7	20	1879.999999	0.00	4700	
3.7	30	1880.000039	-40.00	4700	
3.7	40	1880.000029	-30.00	4700	
3.7	50	1879.999987	12.00	4700	

Note: The battery is rated 3.7V dc.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 55 of 56


11. FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT

11.1 Standard Applicable

According to FCC §2.1055(d)(2)

Frequency Tolerance: +/- 2.5 ppm

11.2 Test Set-up:

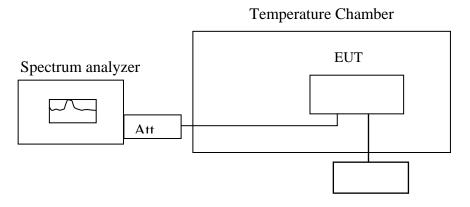

Variable DC Power Supply

Note: Measurement setup for testing on Antenna connector

11.3 Measurement Procedure

Set chamber temperature to 25°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

11.4 Measurement Equipment Used:

Refer to section 2.4 in this report

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to ment does not exonérate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: EH/2010/20044 **Issue Date: Mar. 23, 2010**

Page: 56 of 56

11.5 Measurement Result

Reference Frequency: CDMA2000 Cellular Band Mid Channel 836.52 MHz @ 25°C				
Limit: +/- 0.05 ppm = 41.82 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature ($^{\circ}$ C)	(MHz)		
4.260	25.00	836.520000	4.00	2091.00
3.700	25.00	836.519996	0.00	2091.00
3.150	25.00	836.520003	-7.00	2091.00
3.05	25.00	026 520022	27.00	2001.00
(End Point)	25.00	836.520023	-27.00	2091.00

Reference Frequency: PCS 1900 Mid Channel 1880.00 MHz @ 25°C				
Limit: +/- 2.5 ppm = 4700 Hz				
Power Supply	Environment	Frequency	Delta (Hz)	Limit (Hz)
Vdc	Temperature ($^{\circ}$ C)	(MHz)		
4.260	25	1880.000024	25.00	4700
3.700	25	1879.999999	0.00	4700
3.15	25	1880.000014	-15.00	4700
2.9	25	1070 00000	100.00	4700
(Endpoint)	25	1879.999800	199.00	4700

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This test report cannot be reproduced, except in full, without prior written permission of the Company. 除非另有說明,此報告結果僅對測試之樣品負責。本報告未經本公司書面許可,不可部份複製。
This Test Report is issued by the Company underits General Conditions of Service which is available on request or accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this Test Report is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is toits Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.