



**InterLab<sup>®</sup>**

**FCC Measurement/Technical Report on**

**WLAN transceiver**

**SS11-J01**

**Report Reference:** ODE\_MJP\_TSBGP\_1007\_FCCd

**Test Laboratory:**

7 layers AG  
Borsigstrasse 11  
40880 Ratingen  
Germany  
email: [info@7Layers.de](mailto:info@7Layers.de)



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Markus Becker  
Vorstand • Board:  
Dr. H.-J. Meckelburg  
Wilfried Klassmann

Registergericht • registered in:  
Düsseldorf, HRB 44096  
USt-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385



## Table of Contents

<b>0</b>	<b>Summary</b>	<b>3</b>
0.1	Technical Report Summary	3
0.2	Measurement Summary	4
<b>1</b>	<b>Administrative Data</b>	<b>6</b>
1.1	Testing Laboratory	6
1.2	Project Data	6
1.3	Applicant Data	6
1.4	Manufacturer Data	6
<b>2</b>	<b>Test object Data</b>	<b>7</b>
2.1	General EUT Description	7
2.2	EUT Main components	8
2.3	Ancillary Equipment	8
2.4	Auxiliary Equipment	8
2.5	EUT Setups	9
2.6	Operating Modes	9
2.7	Product labelling	9
<b>3</b>	<b>Test Results</b>	<b>10</b>
3.1	Conducted emissions (AC power line)	10
3.2	Occupied bandwidth	12
3.3	Peak power output	14
3.4	Spurious RF conducted emissions	16
3.5	Spurious radiated emissions	18
3.6	Band edge compliance	24
3.7	Power density	27
<b>4</b>	<b>Test Equipment</b>	<b>29</b>
<b>5</b>	<b>Photo Report</b>	<b>37</b>
<b>6</b>	<b>Setup Drawings</b>	<b>39</b>
<b>7</b>	<b>Annex measurement plots</b>	<b>40</b>
7.1	AC Mains conducted	40
7.2	Occupied bandwidth	41
7.3	Peak power output	47
7.4	Band edge compliance conducted and Spurious RF conducted emissions	53
7.5	Band edge compliance radiated operating mode 3	65
7.6	Radiated emissions ( $f < 30$ MHz)	67
7.7	Power density	71



## **0 Summary**

### **0.1 Technical Report Summary**

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-09 Edition) and 15 (10-1-09 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz  
and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC measurement guide line "Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005"

#### **Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.**



## 0.2 Measurement Summary

### FCC Part 15, Subpart C

### § 15.207

Conducted emissions (AC power line)

The measurement was performed according to ANSI C63.4

2003

OP-Mode	Setup	Port	Final Result
op-mode 4	Setup_c01	AC Port (power line)	passed

### FCC Part 15, Subpart C

### § 15.247 (a) (1)

Occupied bandwidth

The measurement was performed according to FCC § 15.31

10-1-09

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_b01	Temp.ant.connector	passed
op-mode 1g	Setup_b01	Temp.ant.connector	passed
op-mode 2b	Setup_b01	Temp.ant.connector	passed
op-mode 2g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_b01	Temp.ant.connector	passed
op-mode 3g	Setup_b01	Temp.ant.connector	passed

### FCC Part 15, Subpart C

### § 15.247 (b) (3)

Peak power output

The measurement was performed according to FCC § 15.31

10-1-09

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_b01	Temp.ant.connector	passed
op-mode 1g	Setup_b01	Temp.ant.connector	passed
op-mode 2b	Setup_b01	Temp.ant.connector	passed
op-mode 2g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_b01	Temp.ant.connector	passed
op-mode 3g	Setup_b01	Temp.ant.connector	passed

### FCC Part 15, Subpart C

### § 15.247 (d)

Spurious RF conducted emissions

The measurement was performed according to FCC § 15.31

10-1-09

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_b01	Temp.ant.connector	passed
op-mode 1g	Setup_b01	Temp.ant.connector	passed
op-mode 2b	Setup_b01	Temp.ant.connector	passed
op-mode 2g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_b01	Temp.ant.connector	passed
op-mode 3g	Setup_b01	Temp.ant.connector	passed

### FCC Part 15, Subpart C

### § 15.247 (d), § 15.35 (b), § 15.209

Spurious radiated emissions

The measurement was performed according to ANSI C63.4

2003

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_a01	Enclosure	passed
op-mode 2b	Setup_a01	Enclosure	passed
op-mode 3b	Setup_a01	Enclosure	passed
op-mode 1b	Setup_a01	Enclosure	passed
op-mode 2b	Setup_a01	Enclosure	passed
op-mode 3b	Setup_a01	Enclosure	passed

**FCC Part 15, Subpart C**
**§ 15.247 (d)**

Band edge compliance

The measurement was performed according to FCC § 15.31 / ANSI C63.4

10-1-09 / 2003

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_b01	Temp.ant.connector	passed
op-mode 1g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_b01	Temp.ant.connector	passed
op-mode 3g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_a01	Enclosure	passed
op-mode 3g	Setup_a01	Enclosure	passed

**FCC Part 15, Subpart C**
**§ 15.247 (e)**

Power density

The measurement was performed according to FCC § 15.31

10-1-09

OP-Mode	Setup	Port	Final Result
op-mode 1b	Setup_b01	Temp.ant.connector	passed
op-mode 1g	Setup_b01	Temp.ant.connector	passed
op-mode 2b	Setup_b01	Temp.ant.connector	passed
op-mode 2g	Setup_b01	Temp.ant.connector	passed
op-mode 3b	Setup_b01	Temp.ant.connector	passed
op-mode 3g	Setup_b01	Temp.ant.connector	passed

This report replaces the report referenced by: ODE\_MJP\_TSBCP\_1007\_FCCc.



7 layers AG, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

Responsible for  
Accreditation Scope:

*B. Petke*

Responsible  
for Test Report:

*A. Petke*

## **1 Administrative Data**

### **1.1 Testing Laboratory**

Company Name: 7 Layers AG

Address Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:  
- Deutscher Akkreditierungs Rat DAR-Registration no. DGA-PL-192/99-02

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka  
Dipl.-Ing. Robert Machulec  
Dipl.-Ing. Thomas Hoell  
Dipl.-Ing. Andreas Petz

Report Template Version: 2010-07-27

### **1.2 Project Data**

Responsible for testing and report: Dipl.-Ing. Andreas Petz

Date of Test(s): 2010-07-01 to 2010-08-04  
Date of Report: 2010-08-04

### **1.3 Applicant Data**

Company Name: Toshiba Corporation,  
Mobile Communications Co.

Address: 1-1, Asahigaoka 3-Chome  
Hino-Shi, Tokyo, 191-8555  
Japan

Contact Person: Mr. Takao Kamei

### **1.4 Manufacturer Data**

Company Name: please see applicant data

Address:

Contact Person:

## 2 Test object Data

### 2.1 General EUT Description

<b>Equipment under Test:</b>	WLAN transceiver
<b>Type Designation:</b>	SS11-J01
<b>Kind of Device:</b>	Mobile Phone with integrated WLAN Transceiver
<b>(optional)</b>	
<b>Voltage Type:</b>	AC / DC (of AC/DC converter) / DC (internal battery)
<b>Voltage level:</b>	120 V / 3.7 V

#### **General product description:**

The WLAN (Wireless Local Area Network) Transceiver is operating in the 2.4 GHz ISM band at carrier frequencies 2412.0 – 2462.0 MHz and uses the Direct Sequence Spread Spectrum (DSSS) Modulation.

The EUT supports the modes 802.11b (max. 11 Mbps) and 802.11g (max. 54 Mbps).

#### **Specific product description for the EUT:**

The EUT is a mobile phone which uses WLAN technology to be connected to an access point for the purpose of data transfer.

#### **The EUT provides the following ports:**

##### **Ports**

Temp antenna connector

Enclosure

Micro-USB port

DC Power Supply (by Desktop Station)

**The main components of the EUT are listed and described in Chapter 2.2.**

## 2.2 EUT Main components

### Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: Y2001s04)	WLAN transceiver in mobile phone	SS11-J01	STSGV0010 42 09	001	5009 1907 0961	2010-06-29
Remark: EUT A is equipped with an integral antenna (gain = 4.2 dBi).						
EUT B (Code: Y2001t04)	WLAN transceiver in mobile phone	SS11-J01	STSGV0010 53 88	001	5009 1907 0961	2010-06-29
Remark: EUT B is equipped with a temporary antenna connector.						

**NOTE:** The short description is used to simplify the identification of the EUT in this test report.

## 2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AE 1 (Code: Y2001-AC01)	AC/DC converter	see photo at chapter 5	see photo at chapter 5	0203PQA	–	–

## 2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
–	–	–	–	–	–	–



## 2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_a01	EUT A	setup for radiated measurements
Setup_b01	EUT B	setup for conducted measurements
Setup_c01	EUT A + AE1	setup for test conducted emissions (AC power line)

## 2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1b	TX-mode, the EUT transmits on the lowest channel (2412 MHz)	Worst case data rate 1 Mbps for conducted measurement
op-mode 1g	TX-mode, the EUT transmits on the lowest channel (2412 MHz)	Worst case data rate 6 Mbps for conducted measurement
op-mode 2b	TX-mode, the EUT transmits on the mid channel (2437 MHz)	Worst case data rate 1 Mbps for conducted measurement
op-mode 2g	TX-mode, the EUT transmits on the mid channel (2437 MHz)	Worst case data rate 6 Mbps for conducted measurement
op-mode 3b	TX-mode, the EUT transmits on the highest channel (2462 MHz)	Worst case data rate 1 Mbps for conducted measurement
op-mode 3g	TX-mode, the EUT transmits on the highest channel (2462 MHz)	Worst case data rate 6 Mbps for conducted measurement
op-mode 4	WLAN "standby", EUT powered	WLAN module is powered and active; BT module is powered and active; GSM link in 1900 band at TCH661 at max. power

## 2.7 Product labelling

### 2.7.1 FCC ID label

Please refer to the documentation of the applicant.

### 2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

## 3 Test Results

### 3.1 Conducted emissions (AC power line)

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** ANSI C 63.4, 2003

#### 3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

##### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

##### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

### 3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dBμV)	AV Limit (dBμV)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dBμV) = 20 log (Limit (μV)/1μV).

### 3.1.3 Test Protocol

Temperature: 27 °C  
Air Pressure: 1014 hPa  
Humidity: 41 %

Op. Mode	Setup	Port
op-mode 4	Setup_c01	Enclosure

Power line	Frequency MHz	Measured value dBμV	Delta to limit dBμV	Remarks
–	–	–	–	–

Remark: No final measurement was performed because no frequencies (peaks) were found within the offset for acceptance analysis during the preliminary scan. Please see annex for the measurement plot.

### 3.1.4 Test result: RF Power Output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 4	passed

### 3.2 Occupied bandwidth

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** FCC §15.31

#### 3.2.1 Test Description

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 MHz

#### 3.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.2.3 Test Protocol

Temperature: 22-23 °C  
Air Pressure: 1003-1008 hPa  
Humidity: 34-35 %

Op. Mode	Setup	Port
op-mode 1b	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
12.156	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
16.416	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2b	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
12.156	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2g	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
16.416	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3b	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
12.636	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_b01	Temp.ant.connector

6 dB bandwidth MHz	Remarks
16.416	-

Remark: Please see annex for the measurement plot.

### 3.2.4 Test result: Occupied bandwidth

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 3b	passed
	op-mode 3g	passed

### 3.3 Peak power output

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** FCC §15.31

#### 3.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyser via a short coax cable with a known loss.

#### 3.3.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

=> Maximum Output power conducted: 30 dBm

#### 3.3.3 Test Protocol

Temperature: 22 °C  
Air Pressure: 1007 hPa  
Humidity: 43 %

Op. Mode	Setup	Port
op-mode 1b	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
17.1	The EIRP including antenna gain (4.2 dBi) is 21.3 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
22.9	The EIRP including antenna gain (4.2 dBi) is 27.1 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2b	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
17.3	The EIRP including antenna gain (4.2 dBi) is 21.5 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2g	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
22.7	The EIRP including antenna gain (4.2 dBi) is 26.9 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3b	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
17.9	The EIRP including antenna gain (4.2 dBi) is 22.1 dBm

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_b01	Temp.ant.connector

Output power conducted / dBm	Remarks
23.4	The EIRP including antenna gain (4.2 dBi) is 27.6 dBm

Remark: Please see annex for the measurement plot.

### 3.3.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 3b	passed
	op-mode 3g	passed

### 3.4 Spurious RF conducted emissions

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** FCC §15.31

#### 3.4.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the spurious emissions measurements.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance” (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

#### 3.4.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

#### 3.4.3 Test Protocol

Temperature: 22-23 °C  
Air Pressure: 1003-1008 hPa  
Humidity: 33-35 %

Op. Mode	Setup	Port		
op-mode 1b	Setup_b01	Temp.ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6935	-37.8	1.5	-18.5	19.3

Remark: No (further) spurious emissions in the range 20 dB below the limit found.  
Please see annex for the measurement plot.

Op. Mode	Setup	Port		
op-mode 1g	Setup_b01	Temp.ant.connector		
Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6585	-37.9	-1.9	-21.9	16.0

Remark: No (further) spurious emissions in the range 20 dB below the limit found.  
Please see annex for the measurement plot.



Op. Mode	Setup	Port
op-mode 2b	Setup_b01	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6885	-37.9	1.0	-19.0	18.9

Remark: No (further) spurious emissions in the range 20 dB below the limit found.  
Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2g	Setup_b01	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6936	-38.0	-1.8	-21.8	16.2

Remark: No (further) spurious emissions in the range 20 dB below the limit found.  
Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3b	Setup_b01	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6885	-37.8	2.1	-17.9	19.9

Remark: No (further) spurious emissions in the range 20 dB below the limit found.  
Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_b01	Temp.ant.connector

Frequency MHz	Corrected measurement value dBm	Reference value dBm	Limit dBm	Delta to limit dB
6886	-37.6	-1.0	-21.0	16.6

Remark: No (further) spurious emissions in the range 20 dB below the limit found. Please see annex for the measurement plot.

### 3.4.4 Test result: Spurious RF conducted emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 3b	passed
	op-mode 3g	passed

### 3.5 Spurious radiated emissions

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** ANSI C 63.4, 2003

#### 3.5.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

##### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

###### **Step 1:** pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

###### **Step 2:** final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

##### 2. Measurement above 30 MHz and up to 1 GHz

###### **Step 1:** Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs

- Turntable angle range:  $-180$  to  $180^\circ$
- Turntable step size:  $90^\circ$
- Height variation range:  $1 - 3$  m
- Height variation step size:  $2$  m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

**Step 2:** second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $100$  ms
- Turntable angle range:  $-180$  to  $180^\circ$
- Turntable step size:  $45^\circ$
- Height variation range:  $1 - 4$  m
- Height variation step size:  $0.5$  m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable):  $45^\circ$
- Antenna height:  $0.5$  m

**Step 3:** final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by  $\pm 22.5^\circ$  around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by  $\pm 25$  cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $100$  ms
- Turntable angle range:  $-22.5^\circ$  to  $+ 22.5^\circ$  around the determined value
- Height variation range:  $-0.25$  m to  $+ 0.25$  m around the determined value

**Step 4:** final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth:  $120$  kHz
- Measuring time:  $1$  s

### 3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For mode b or g the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at the other data rate. Typically, the measurement for this mode is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the other data rate. Please refer to the results for the used frequency range.

#### 3.5.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

### 3.5.3 Test Protocol

Temperature: 27–31 °C  
Air Pressure: 1008–1015 hPa  
Humidity: 38–41 %

#### 3.5.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 2b	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed. The found peak at 99.2 kHz is emission from loop antenna power supply.

#### 3.5.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1b	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	2375	-	53.1	42.4	-	74.0	54.0	20.9	11.6
Vertical + horizontal	2385	-	53.0	44.9	-	74.0	54.0	21.0	9.1

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2b	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**Op. Mode**      **Setup**      **Port**  
op-mode 3b      Setup\_a01      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	2488	-	51.0	40.9	-	74.0	54.0	23.0	13.1

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

**Op. Mode**      **Setup**      **Port**  
op-mode 1g      Setup\_a01      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	2390	-	58.9	42.9	-	74.0	54.0	15.1	11.1

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1b.

**Op. Mode**      **Setup**      **Port**  
op-mode 2g      Setup\_a01      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 2b.

**Op. Mode**      **Setup**      **Port**  
op-mode 3g      Setup\_a01      Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	2380	-	52.6	40.1	-	74.0	54.0	21.4	13.9
Vertical + horizontal	2484	-	53.8	41.1	-	74.0	54.0	20.2	12.9

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 3b.



#### 3.5.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 2b	passed
	op-mode 3b	passed
	op-mode 1g	passed
	op-mode 2g	passed
	op-mode 3g	passed

### 3.6 Band edge compliance

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** ANSI C 63.4, 2003 FCC §15.31

#### 3.6.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2412 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2462 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings for radiated measurement:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

#### 3.6.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the **lower band edge** the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the **higher band edge** the limit is "specified in Section 15.209(a)".



### 3.6.3 Test Protocol

#### 3.6.3.1 Lower band edge

Temperature: 22-23 °C  
Air Pressure: 1003-1008 hPa  
Humidity: 33-35 %

Op. Mode	Setup	Port
op-mode 1b	Setup_b01	Temp.ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-39.9	1.5	-18.5	21.4

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_b01	Temp.ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2400.00	-29.5	-1.9	-21.9	7.6

Remark: Please see annex for the measurement plot.

#### 3.6.3.2 Higher band edge

##### Conducted measurement

Temperature: 22-23 °C  
Air Pressure: 1003-1008 hPa  
Humidity: 33-35 %

Op. Mode	Setup	Port
op-mode 3b	Setup_b01	Temp ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-46.2	2.1	-17.9	28.3

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_b01	Temp ant.connector

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Delta to limit dB
2483.50	-44.1	-1.0	-21.0	23.1

Remark: Please see annex for the measurement plot.

### Radiated measurement

Temperature: 27 °C  
Air Pressure: 1015 hPa  
Humidity: 41 %

Op. Mode	Setup	Port
op-mode 3b	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	49.6	38.8	74.0	54.0	24.4	15.2

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	53.8	41.1	74.0	54.0	20.2	12.9

Remark: Please see annex for the measurement plot.

### 3.6.4 Test result: Band edge compliance

FCC Part 15, Subpart C		Op. Mode	Result
		op-mode 1b	passed
		op-mode 1g	passed
		op-mode 3 b	passed
		op-mode 3 g	passed

### 3.7 Power density

**Standard** FCC Part 15, 10-1-09 Subpart C

**The test was performed according to:** FCC §15.31

#### 3.7.1 Test Description

The EUT was connected to a spectrum analyzer via a short coax cable with a known loss.  
Analyzer settings:

- Detector: Peak
- Span: 30 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 10 kHz
- Sweep Time: 120 s

#### 3.7.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.7.3 Test Protocol

Temperature: 23 °C  
Air Pressure: 1004 hPa  
Humidity: 40 %

Op. Mode	Setup	Port
op-mode 1b	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-12.5	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 1g	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-14.1	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2b	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-12.5	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 2g	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-14.5	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3b	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-11.9	-

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 3g	Setup_b01	Temp.ant.connector

Power density dBm/3 kHz	Remarks
-13.1	-

Remark: Please see annex for the measurement plot.

### 3.7.4 Test result: Power density

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1b	passed
	op-mode 1g	passed
	op-mode 2b	passed
	op-mode 2g	passed
	op-mode 3b	passed
	op-mode 3g	passed

## 4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

### Test Equipment Anechoic Chamber

<b>Lab ID:</b>	<b>Lab 2</b>		
<b>Manufacturer:</b>	Frankonia		
<b>Description:</b>	Anechoic Chamber for radiated testing		
<b>Type:</b>	10.58x6.38x6		
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer		
Air compressor	none	-	Atlas Copco		
Anechoic Chamber	10.58 x 6.38 x 6	none	Frankonia		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	FCC listing 96716 3m Part15/18		2009/01/07	2011/01/06	
	ANSI C64.3 NSA		2009/01/21	2011/01/20	
Controller Innco 2000	CO 2000	CO2000/328/12470 406/L	Innco innovative constructions GmbH		
EMC camera	CE-CAM/1	-	CE-SYS		
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi		
Filter I SDN	B84312-C110-E1		Siemens&Matsushita		
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita		

### Test Equipment Auxiliary Equipment for Conducted emissions

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Rohde & Schwarz GmbH & Co.KG
<b>Description:</b>	EMI Conducted Auxiliary Equipment

### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer		
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner		
Coupling-Decoupling- Network	CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	Standard Calibration		2008/03/06	2011/03/05	
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG		
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG		
	<i>Calibration Details</i>		<i>Last Execution</i>	<i>Next Exec.</i>	
	DKD calibration		2008/10/13	2011/10/12	

## Test Equipment Auxiliary Equipment for Radiated emissions

### Lab ID:

Lab 2

### Description:

Equipment for emission measurements

### Serial Number:

see single devices

## Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer	
Antenna mast	AS 620 P		HD GmbH	
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2008/10/27	2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq	
	Path Calibration		2010/05/10	2010/11/09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch	
	Path Calibration		2010/05/10	2010/11/09
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax	
	Path Calibration		2010/05/10	2010/11/09
Double -ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/04/16	2012/04/15
Double -ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/04/28	2012/04/27
Dreheinheit	DE 325		HD GmbH	
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic	
	Path Calibration		2010/05/10	2010/11/09
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2009/05/27	2012/05/26
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	DKD calibration		2008/10/07	2011/10/06
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH	
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH	

## Test Equipment Auxiliary Test Equipment

<b>Lab ID:</b>	<b>Lab 2</b>
<b>Manufacturer:</b>	see single devices
<b>Description:</b>	Single Devices for various Test Equipment
<b>Type:</b>	various
<b>Serial Number:</b>	none

## Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 01 (Multimeter)	Voltcraft M-3860M	IJ096055	Conrad Electronics
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	Standard calibration		2009/10/07 2011/10/06
Digital Oscilloscope [SA2] (Aux)	TDS 784C	B021311	Tektronix GmbH
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/06 2011/10/05
Vector Signal Generator	SMIQ B3	832492/061	

## Test Equipment Digital Signalling Devices

**Lab ID:** Lab 1, Lab 2

**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer	
Bluetooth Signalling Unit CBT		100589	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard Calibration		2008/08/14	2011/08/13
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2008/10/07	2010/10/06
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.	
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2009/02/16	2012/02/15
	HW/SW Status		Date of Start	Date of End
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---	2007/07/16		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2008/12/01	2011/11/30
	HW/SW Status		Date of Start	Date of End
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K2 4 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---	2007/01/02		
	SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG	
	Calibration Details		Last Execution	Next Exec.
	Standard calibration		2008/10/28	2011/10/27





### Test Equipment Emission measurement devices

**Lab ID:** Lab 1, Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

#### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer	
Personal Computer	Dell	30304832059	Dell	
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG	
Calibration Details			Last Execution	Next Exec.
Standard Calibration			2007/12/05	2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG	
Standard Calibration			2009/12/03	2011/12/02

### Test Equipment Multimeter 12

**Lab ID:** Lab 3, Lab 4  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

#### Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer	
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.	
Standard calibration			2009/10/07	2010/10/06
Standard calibration			2009/10/07	2011/10/06



## Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** Lab 3  
**Description:** Regulatory Bluetooth RF Tests  
**Type:** Bluetooth RF  
**Serial Number:** 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.	
Bluetooth Signalling Unit CBT	1153.9000.35	100302	Rohde & Schwarz GmbH & Co.KG	
			<i>Calibration Details</i>	<i>Last Execution Next Exec.</i>
			Standard Calibration	2009/08/06 2010/08/05
			Standard Calibration	2010/06/23 2011/06/22
Power Meter NRVD	857.8008.02	832025/059	2010/06/21 2011/06/20	
Power Sensor NRV Z1 A	828.3018.03	832279/013		
			2010/06/22	2011/06/21
Power Supply	NGSM 32/10	2725		
Rubidium Frequency Normal MFS	828.3018.03	002	Datum GmbH	
			2010/07/05	2011/07/04
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG	
			2009/06/24	2011/06/23
Signal Generator	SMP03	833680/003	Rohde & Schwarz GmbH & Co.KG	
			2009/06/23	2012/06/22
Vector Signal Generator SMIQ03B B	1125.5555.03	832870/017		
			2010/06/23	2013/06/20

## Test Equipment Shielded Room 02

**Lab ID:** Lab 1  
**Manufacturer:** Frankonia  
**Description:** Shielded Room for conducted testing  
**Type:** 12 qm  
**Serial Number:** none

## Test Equipment Shielded Room 07

**Lab ID:** Lab 3, Lab 4  
**Description:** Shielded Room 4m x 6m

#### Test Equipment T/H Logger 04

**Lab ID:** Lab 3, Lab 4  
**Description:** Lufft Opus10  
**Serial Number:** 7481

#### Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 04 (Environ)		7481	Lufft Mess- und Regeltechnik GmbH
		Calibration Details	Last Execution    Next Exec.
		Standard calibration	2009/01/23    2011/01/22

#### Test Equipment Temperature Chamber 01

**Lab ID:** Lab 3, Lab 4  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber KWP 120/70  
**Type:** Weiss  
**Serial Number:** see single devices

#### Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
		Specific calibration	2010/03/16    2011/03/15



## Test Equipment WLAN RF Test Solution

**Lab ID:** Lab 4  
**Manufacturer:** 7 layers AG  
**Description:** Regulatory WLAN RF Tests  
**Type:** WLAN RF  
**Serial Number:** 001

## Single Devices for WLAN RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer	
Arbitrary Waveform Generator	TGA12101	284482		
Power Meter NRVD	857.8008.02 Standard Calibration	832025/059	2010/06/21	2011/06/20
Power Sensor NRV Z1 A	828.3018.03 Standard Calibration	832279/013	2010/06/22	2011/06/21
Power Supply	NGSM 32/10	2725		
Rubidium Frequency Normal MFS	828.3018.03 Standard Calibration	002	Datum GmbH	
			2010/07/05	2011/07/04
Signal Analyser FSIQ26	1119.6001.26 Standard Calibration	832695/007	Rohde & Schwarz GmbH & Co.KG	
			2009/06/24	2011/06/23
Signal Generator	SMP03 Standard Calibration	833680/003	Rohde & Schwarz GmbH & Co.KG	
			2009/06/23	2012/06/22
TOCT Switching Unit	Switching Unit	030106	7 layers, Inc.	
Vector Signal Generator SMIQ03B B	1125.5555.03 Standard Calibration	832870/017		
			2010/06/23	2013/06/20


## 5 Photo Report

Detailed photos of the OUT and test setups are declared as confidential.




**Photo 1:** Type Label of AC/DC converter



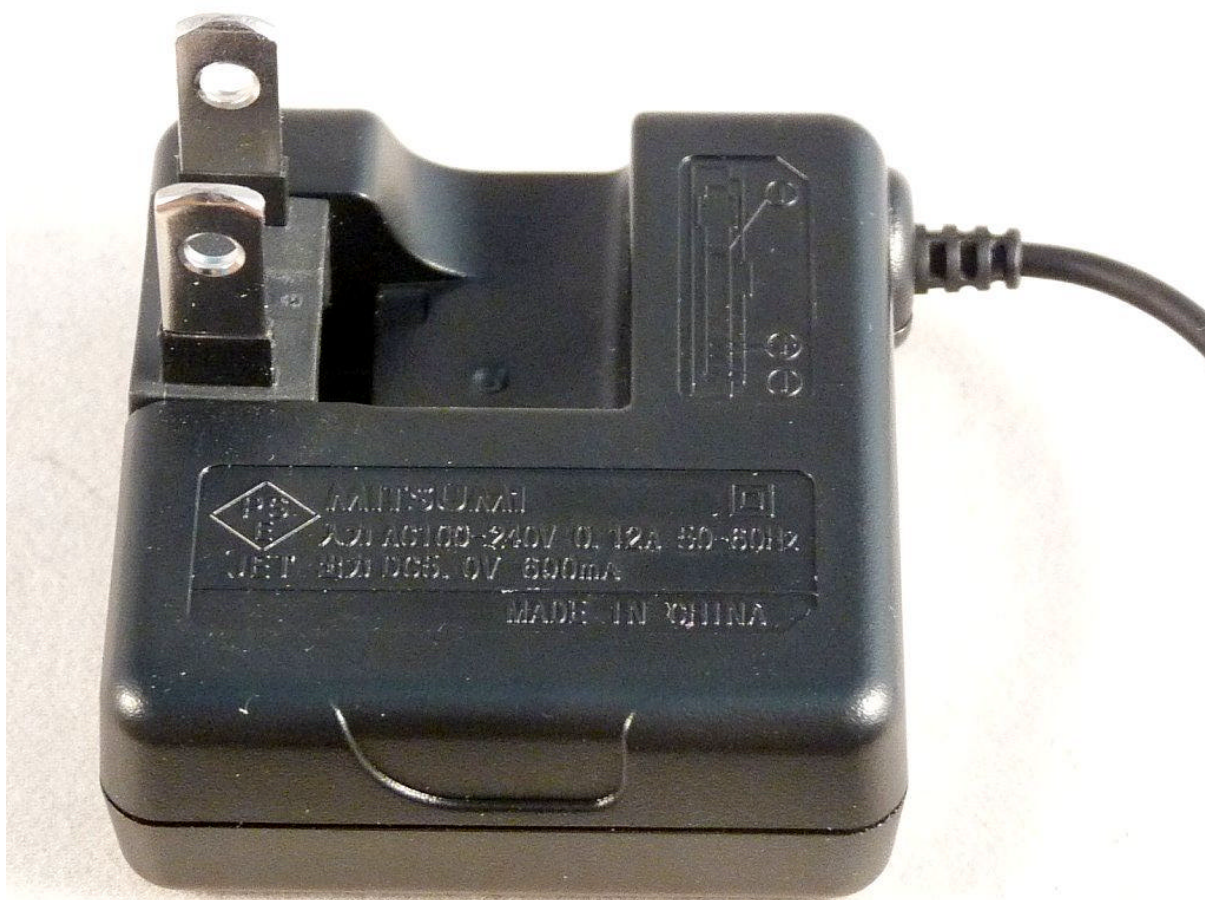

**Photo 2:** Connector side of AC/DC converter

## 6 Setup Drawings

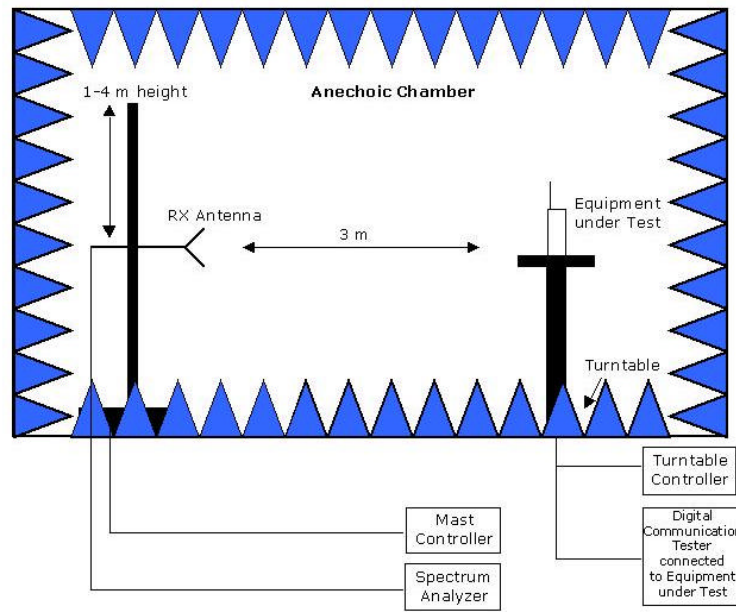

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

**Drawing 1:** Setup in the Anechoic chamber:  
 Measurements below 1 GHz: Semi-anechoic, conducting ground plane.  
 Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces


## 7 Annex measurement plots

### 7.1 AC Mains conducted

#### Op. Mode

op-mode 4

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak Average	20.0 ms	9 kHz	ESH3-Z5

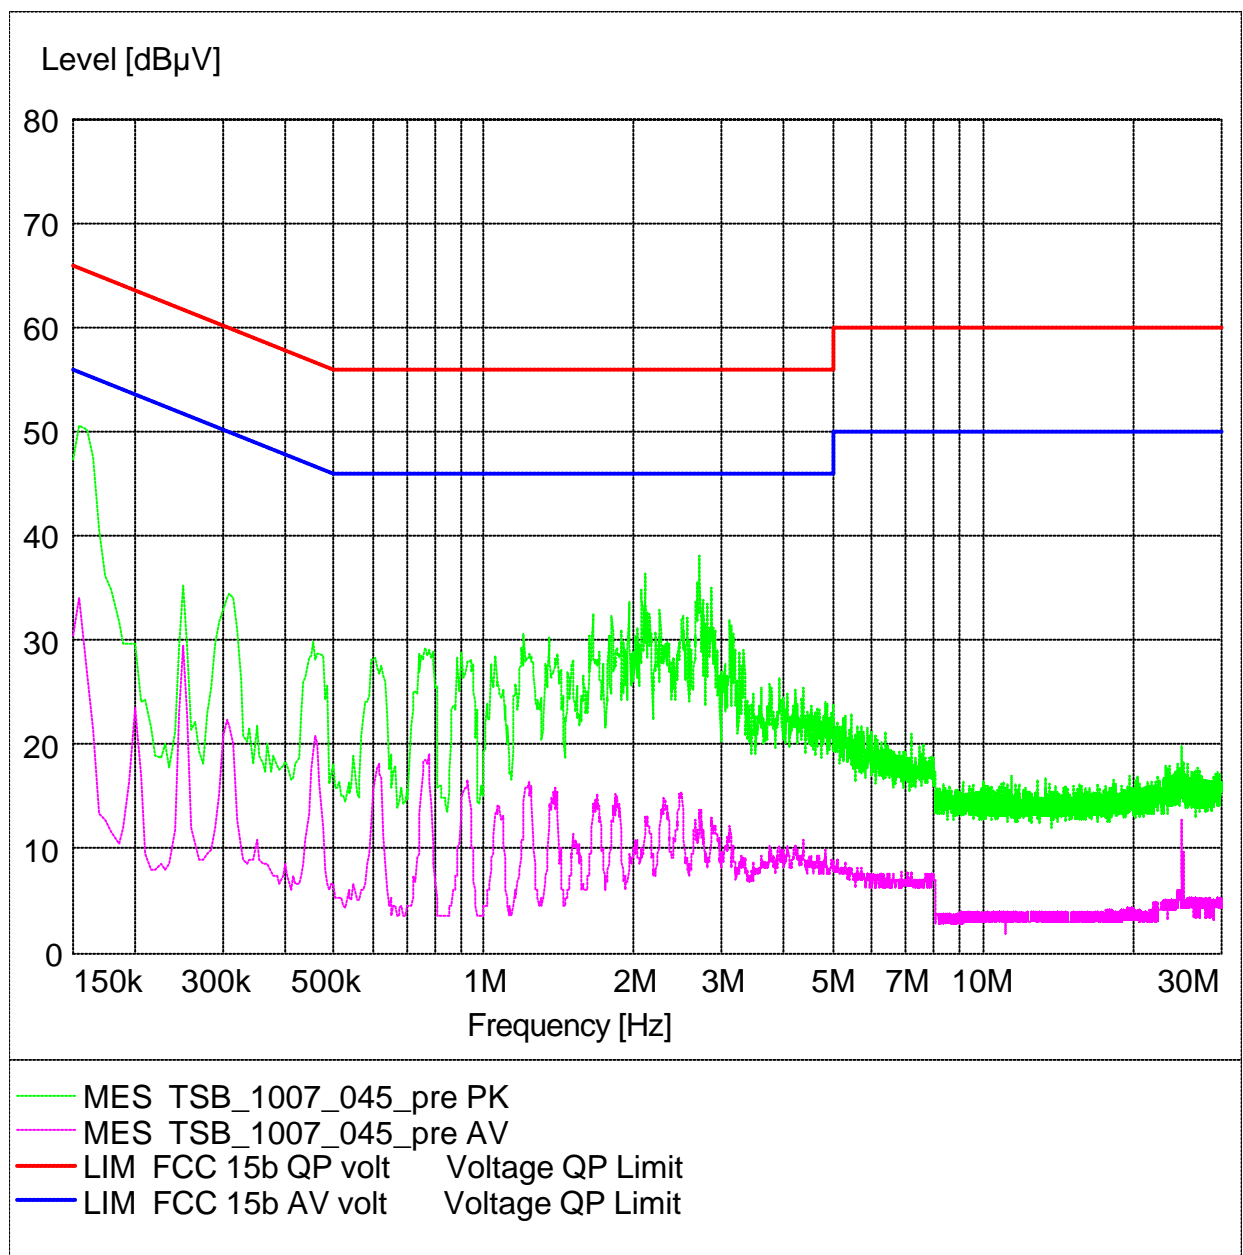




## 7.2 Occupied bandwidth

### 7.2.1 Occupied bandwidth operating mode 1

#### Op. Mode

op-mode 1b

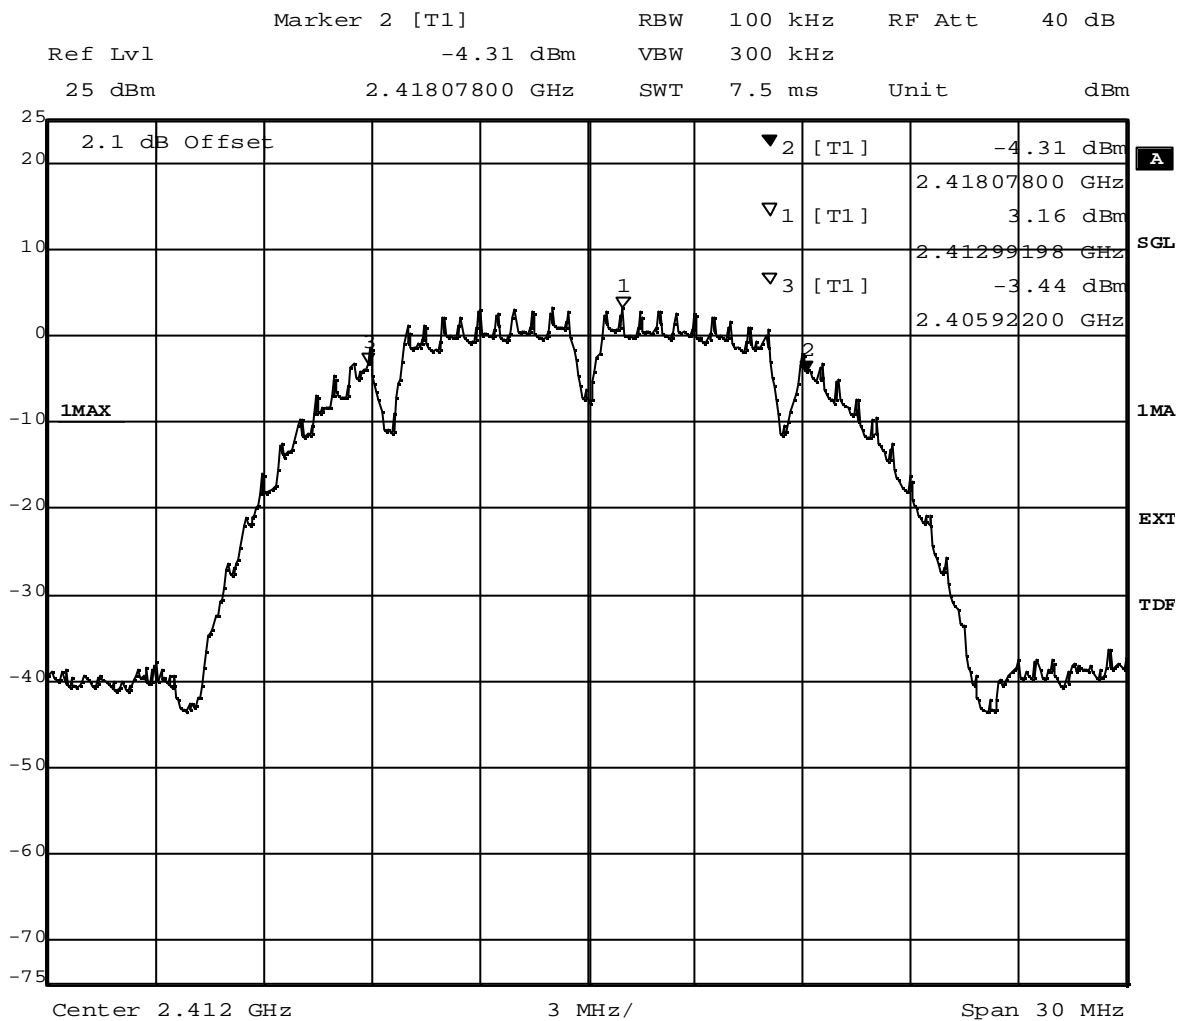


Title: 6dB Bandwidth

Comment A: CH B: 2412 MHz; 6dB bandwidth (kHz):12156

Date: 14.JUL.2010 15:48:37

## Op. Mode

op-mode 1g

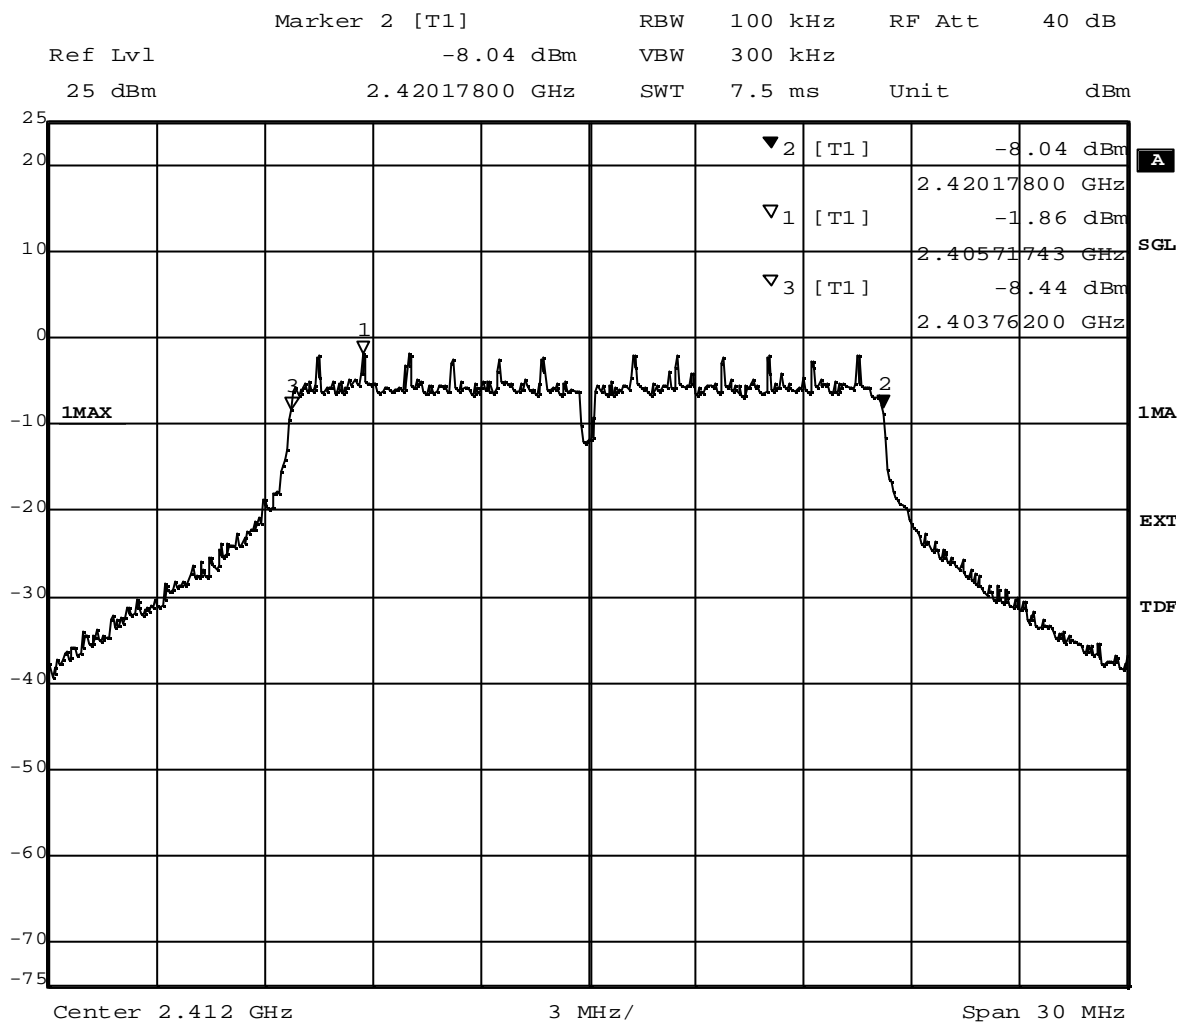

Title: 6dB Bandwidth


Comment A: CH B: 2412 MHz; 6dB bandwidth (kHz):16416

Date: 15.JUL.2010 10:10:46

## 7.2.2 Occupied bandwidth operating mode 2

### Op. Mode


op-mode 2b

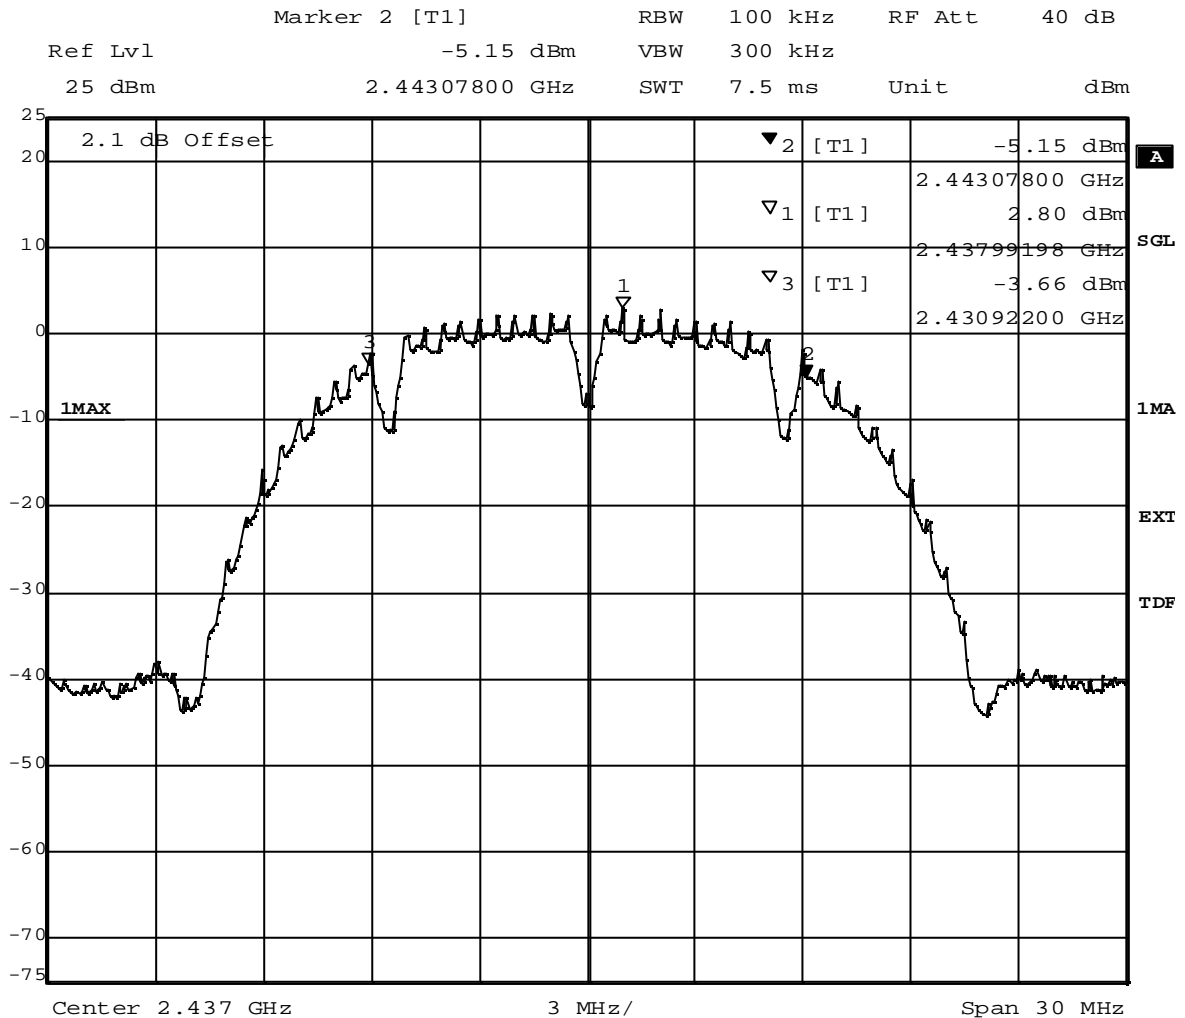

Title: 6dB Bandwidth  
 Comment A: CH M: 2437 MHz; 6dB bandwidth (kHz):12156  
 Date: 14.JUL.2010 15:51:55

## Op. Mode

op-mode 2g

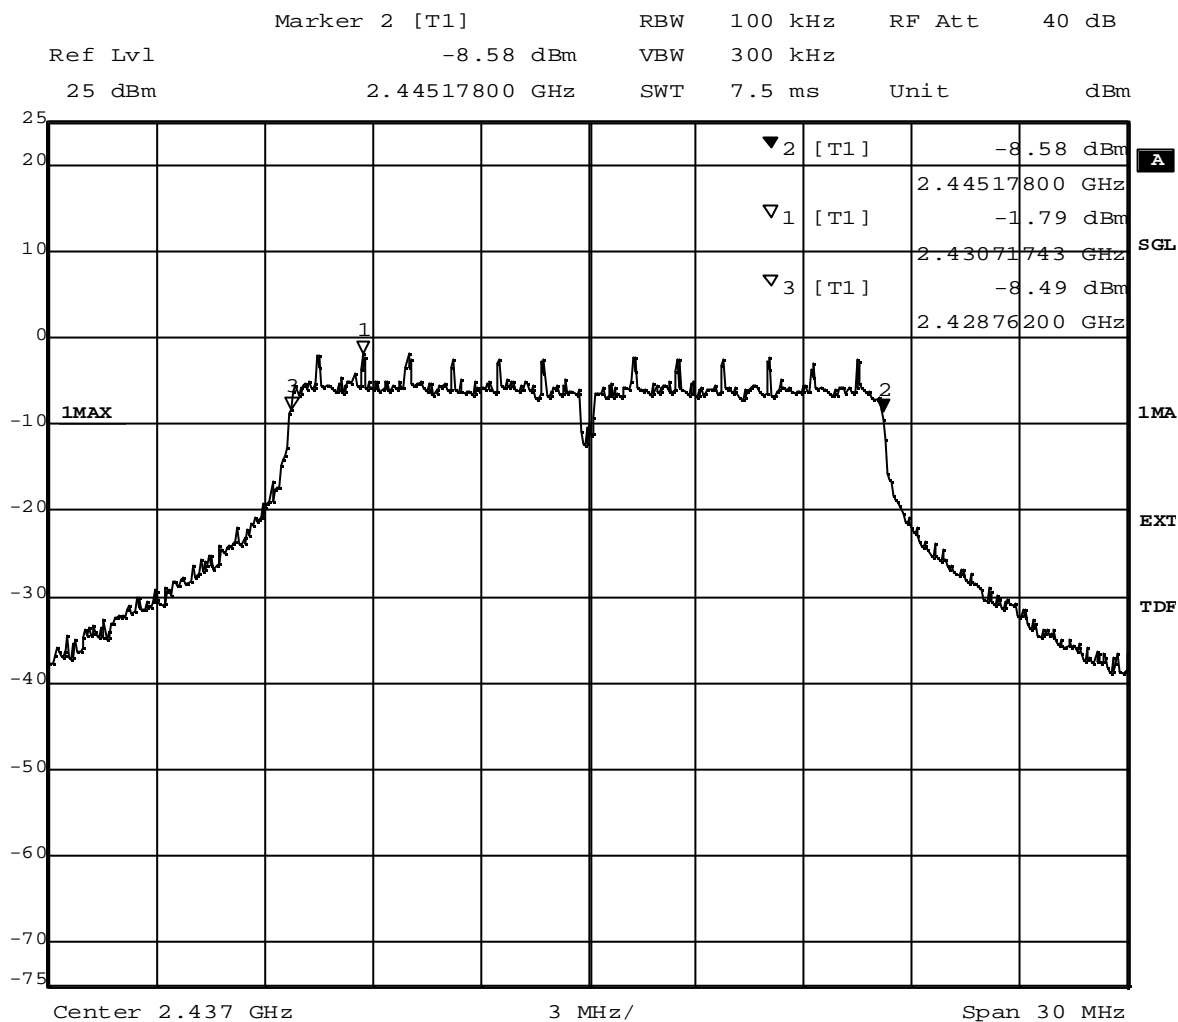

Title: 6dB Bandwidth


Comment A: CH M: 2437 MHz; 6dB bandwidth (kHz):16416

Date: 15.JUL.2010 10:08:25

### 7.2.3 Occupied bandwidth operating mode 3

#### Op. Mode


op-mode 3b

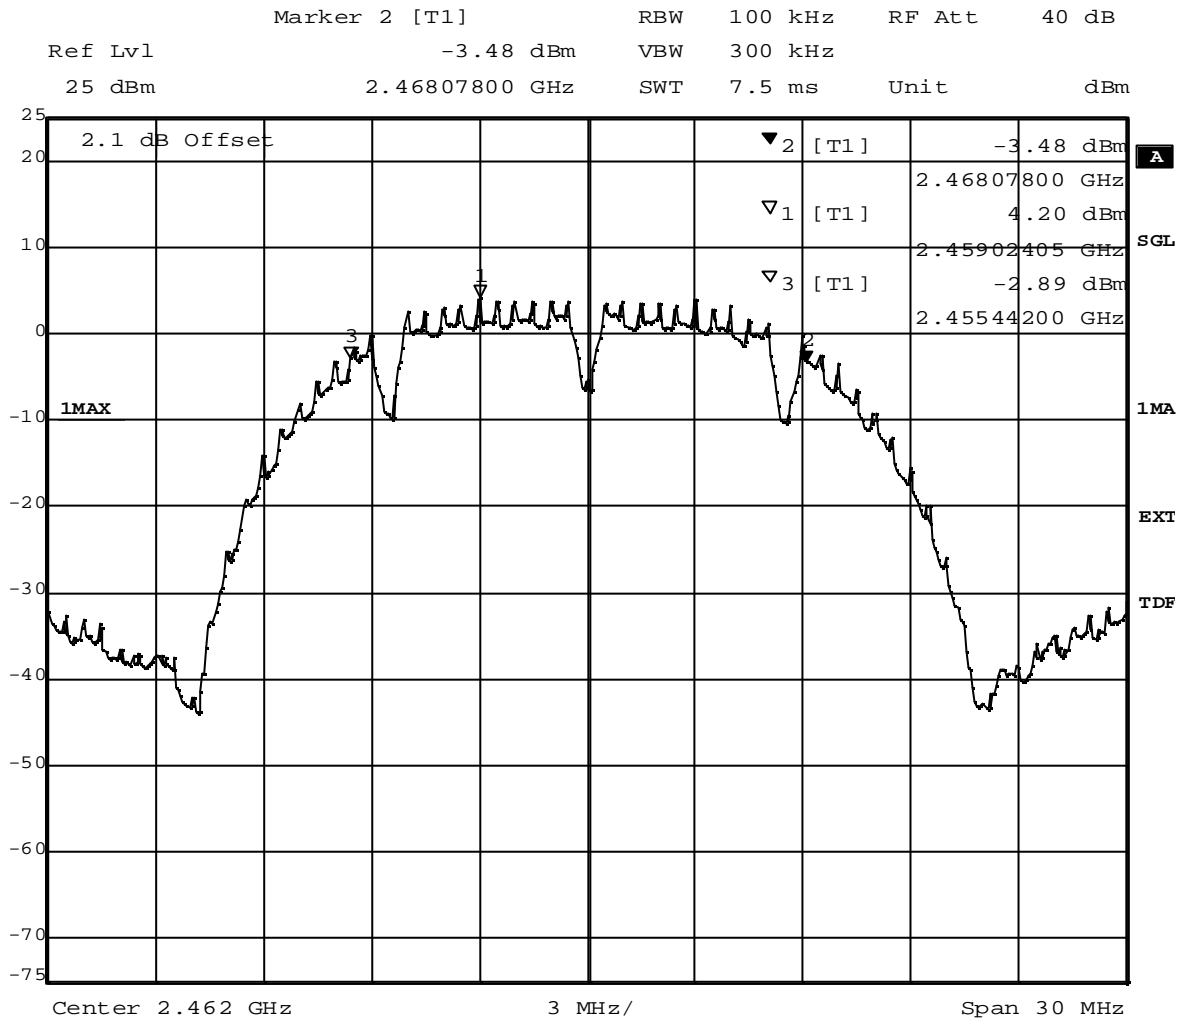

Title: 6dB Bandwidth  
 Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):12636  
 Date: 14.JUL.2010 15:54:29

## Op. Mode

op-mode 3g

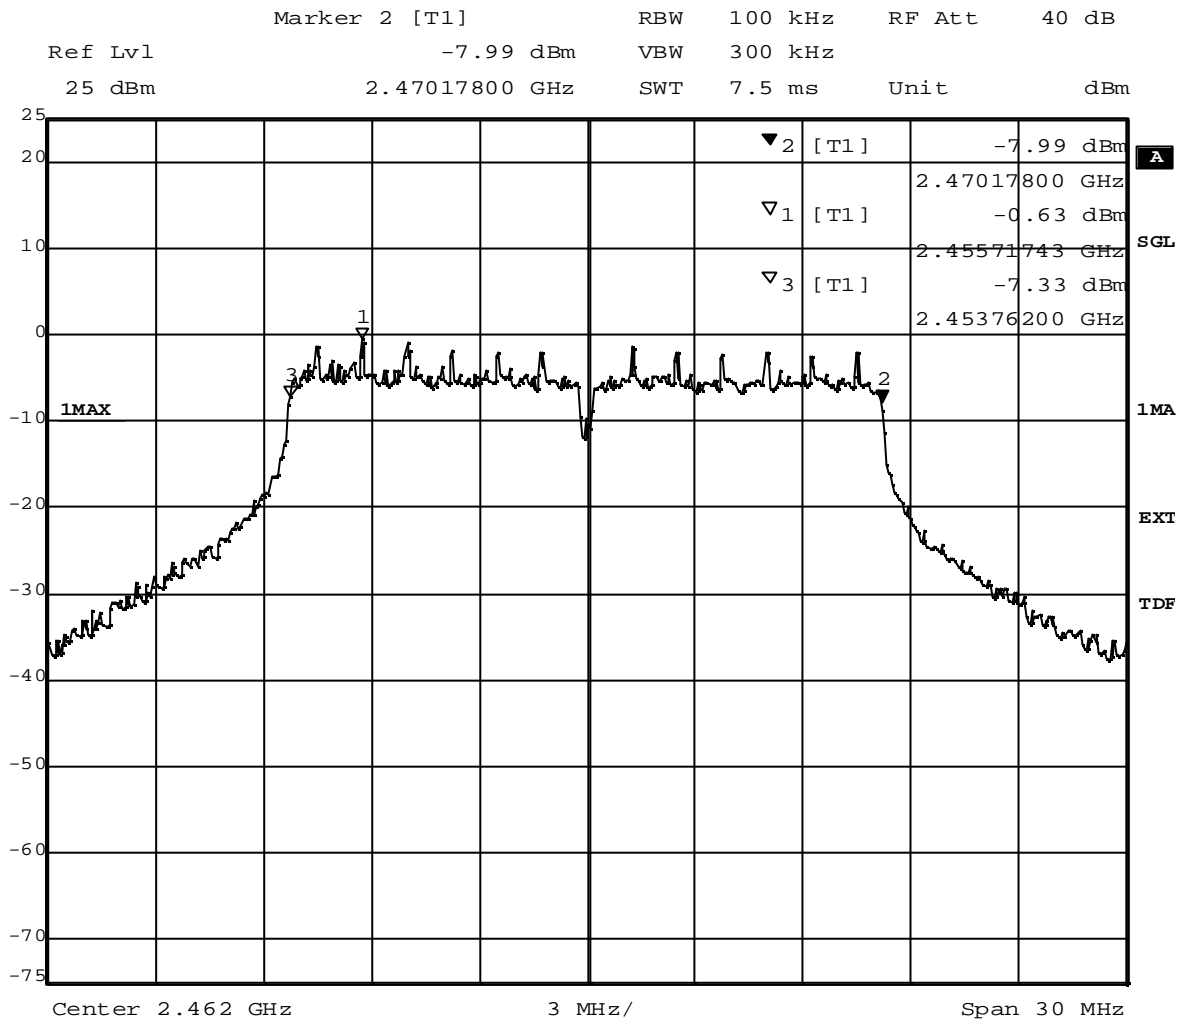

Title: 6dB Bandwidth

Comment A: CH T: 2462 MHz; 6dB bandwidth (kHz):16416


Date: 15.JUL.2010 10:05:06

## 7.3 Peak power output

### 7.3.1 Peak power output operating mode 1

#### Op. Mode


op-mode 1b

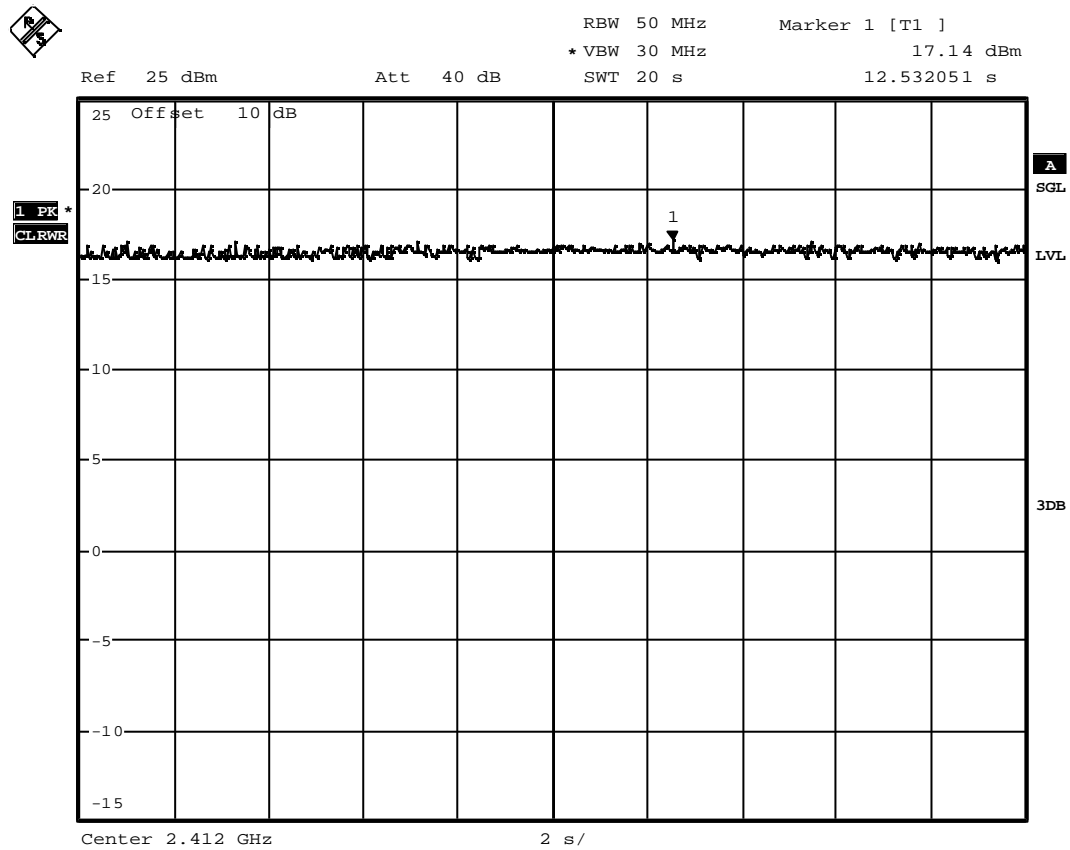

Date: 3.AUG.2010 11:27:02

## Op. Mode

op-mode 1g

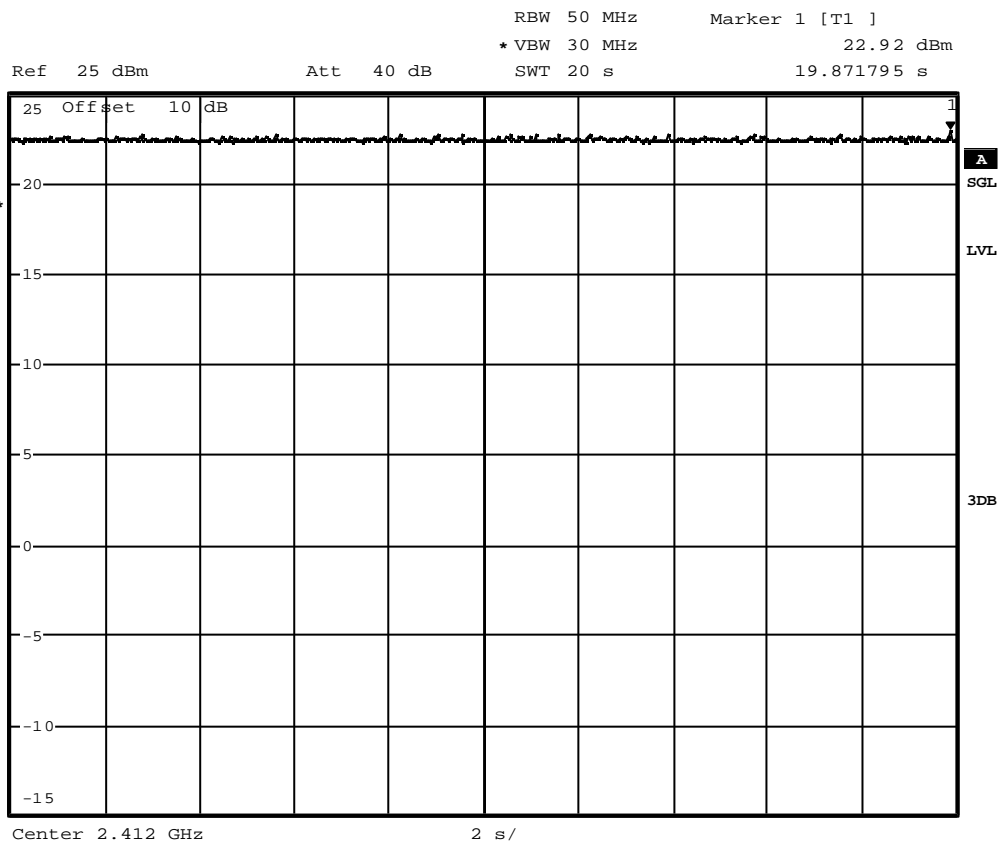


Date: 3.AUG.2010 11:25:39



### 7.3.2 Peak power output operating mode 2

#### Op. Mode


op-mode 2b

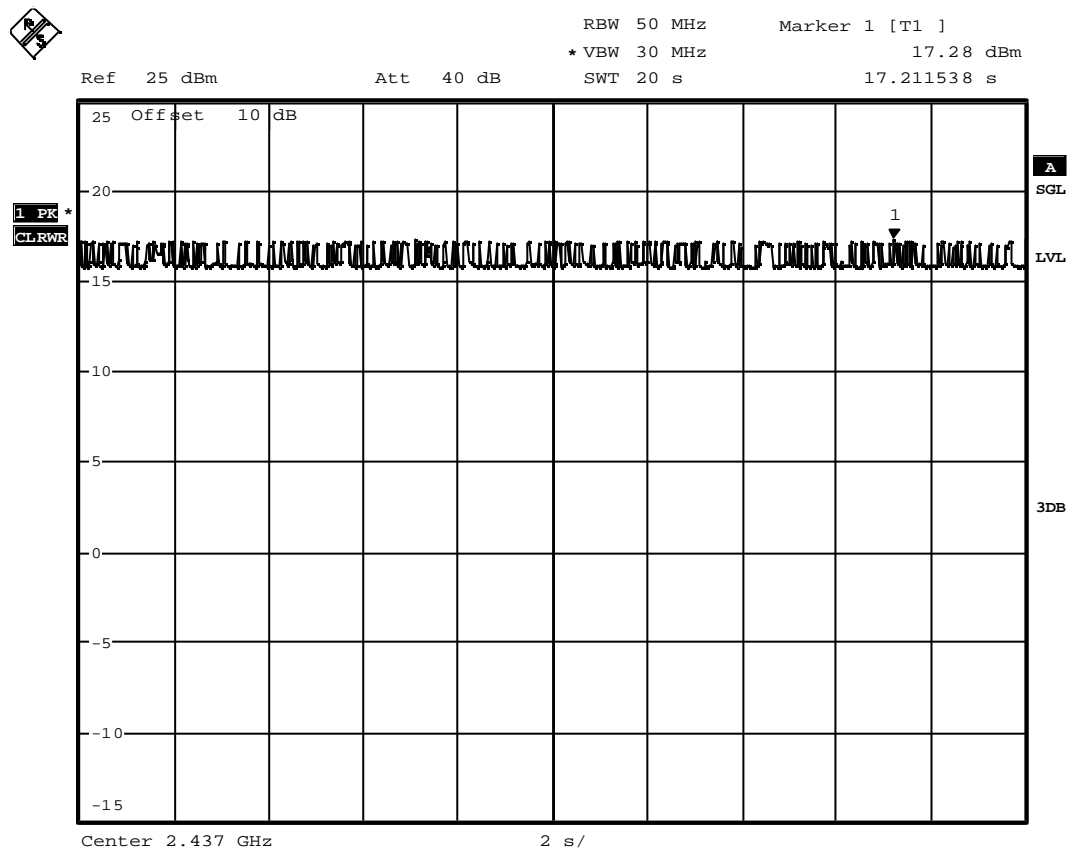

Date: 3.AUG.2010 11:29:23

## Op. Mode

op-mode 2g

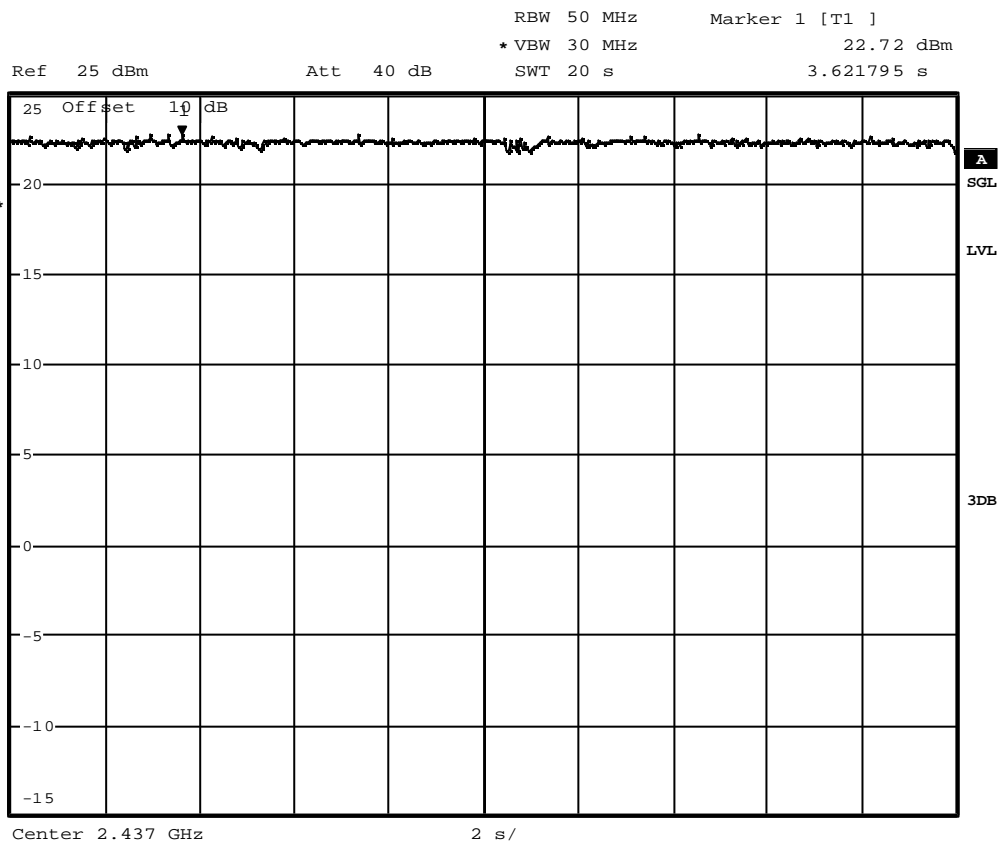


Date: 3.AUG.2010 11:30:50

### 7.3.3 Peak power output operating mode 3

#### Op. Mode


op-mode 3b

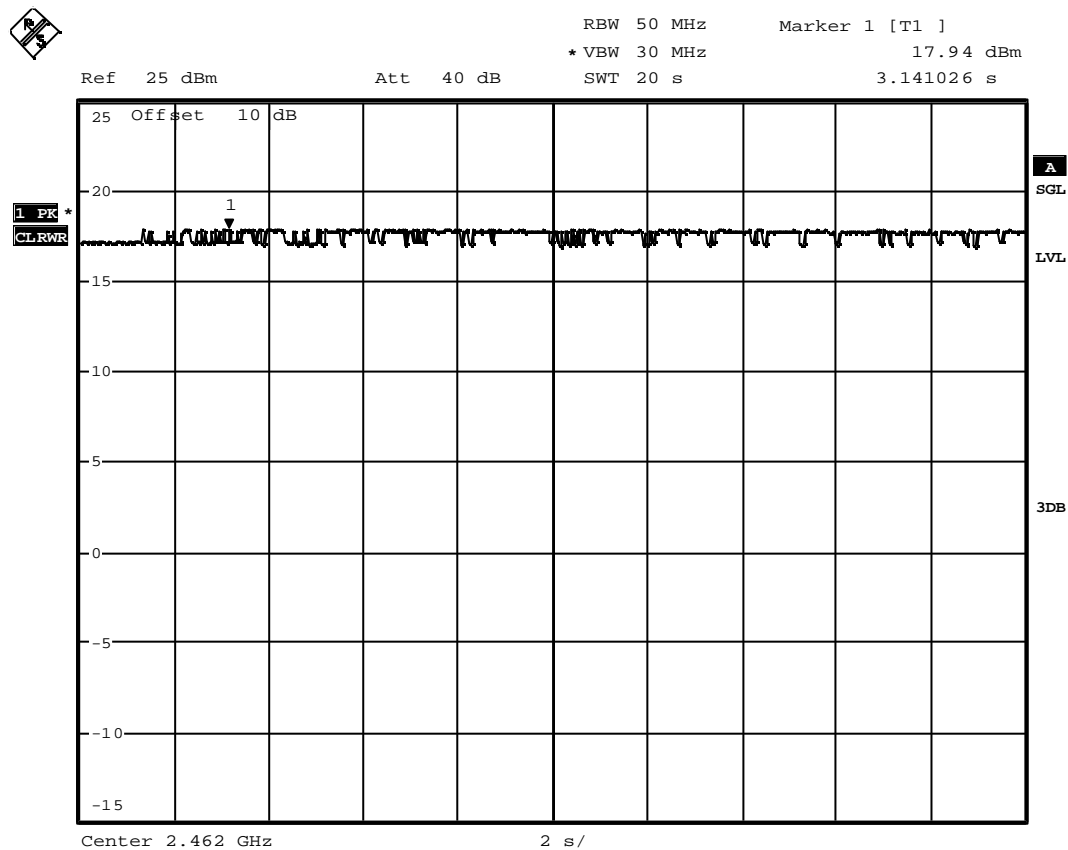

Date: 3.AUG.2010 12:34:24

## Op. Mode

op-mode 3g

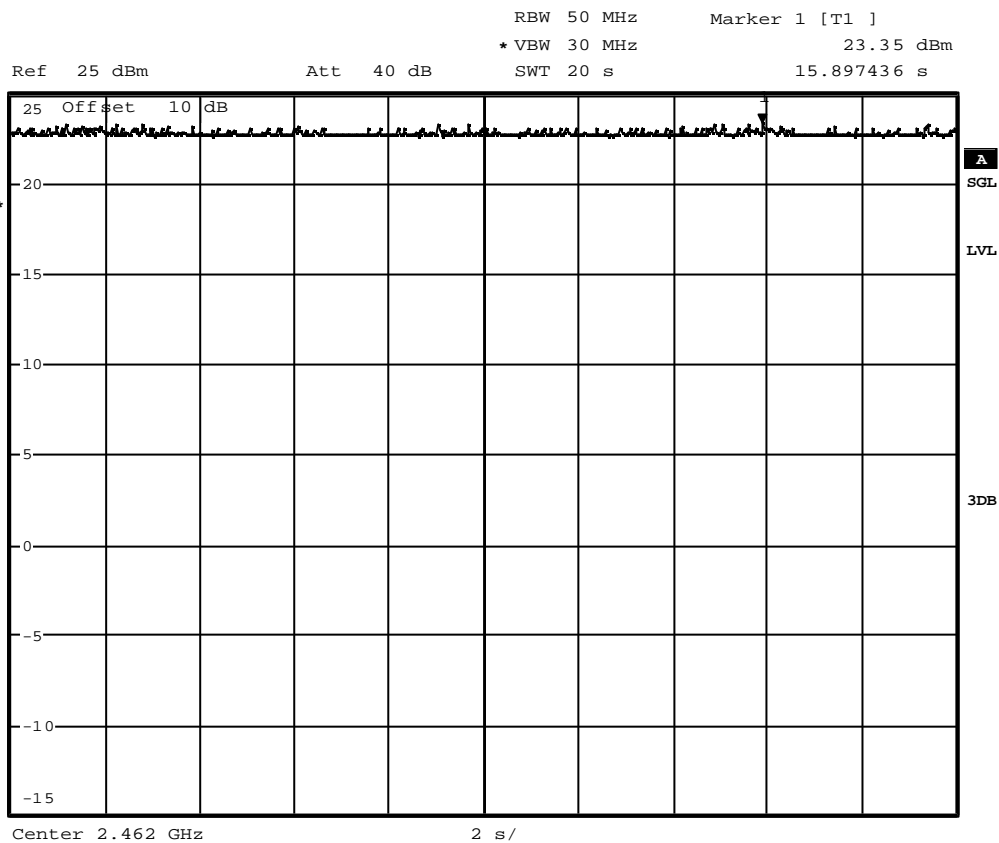


Date: 3.AUG.2010 12:33:13

## 7.4 Band edge compliance conducted and Spurious RF conducted emissions

### 7.4.1 Band edge compliance conducted operating mode 1

#### Op. Mode

op-mode 1b

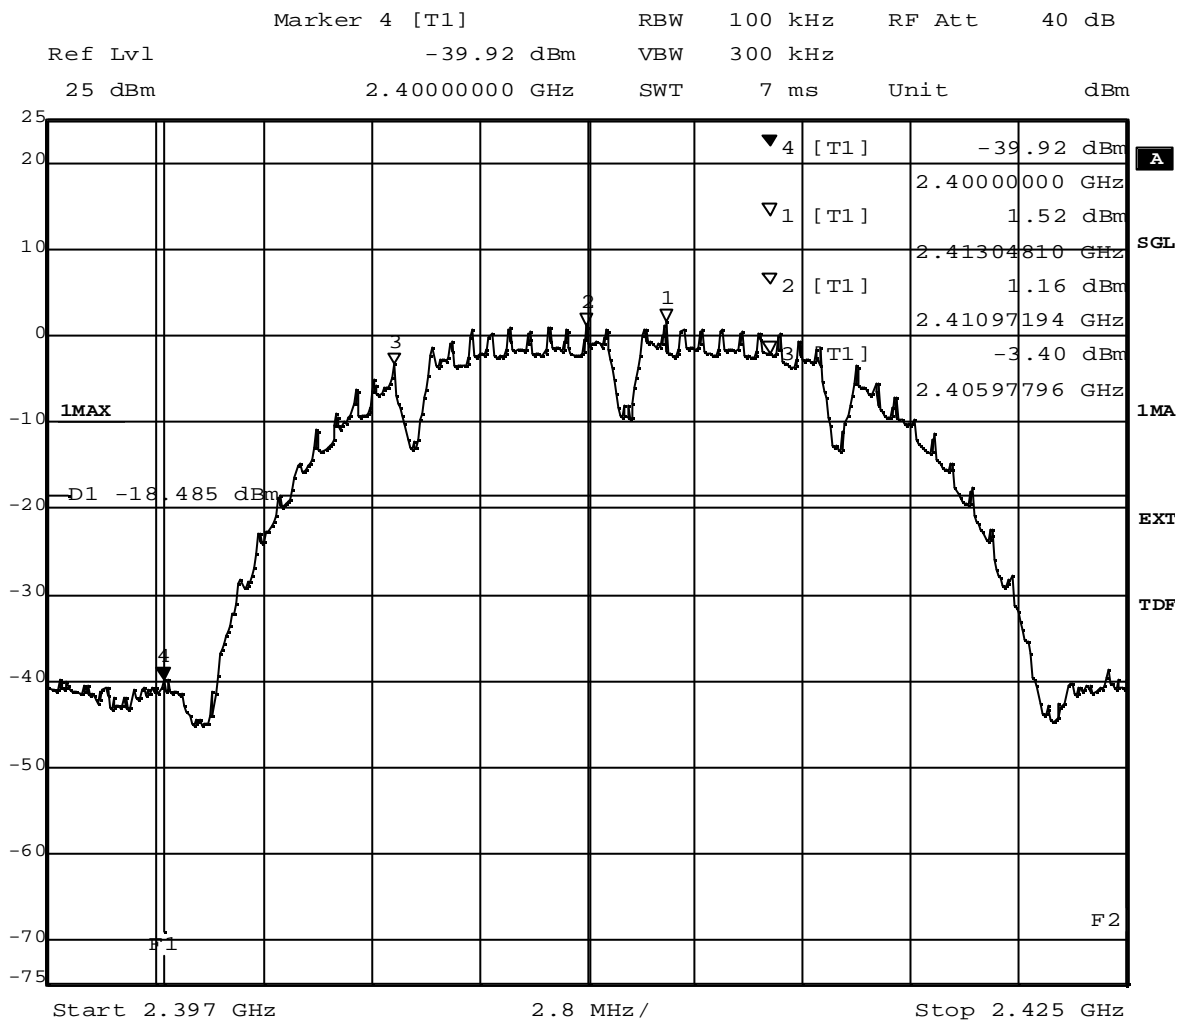

Title: Band Edge Compliance


Comment A: CH B: 2412 MHz

Date: 14.JUL.2010 14:47:20

(determination of reference value for spurious emissions measurement)

## Op. Mode

op-mode 1g

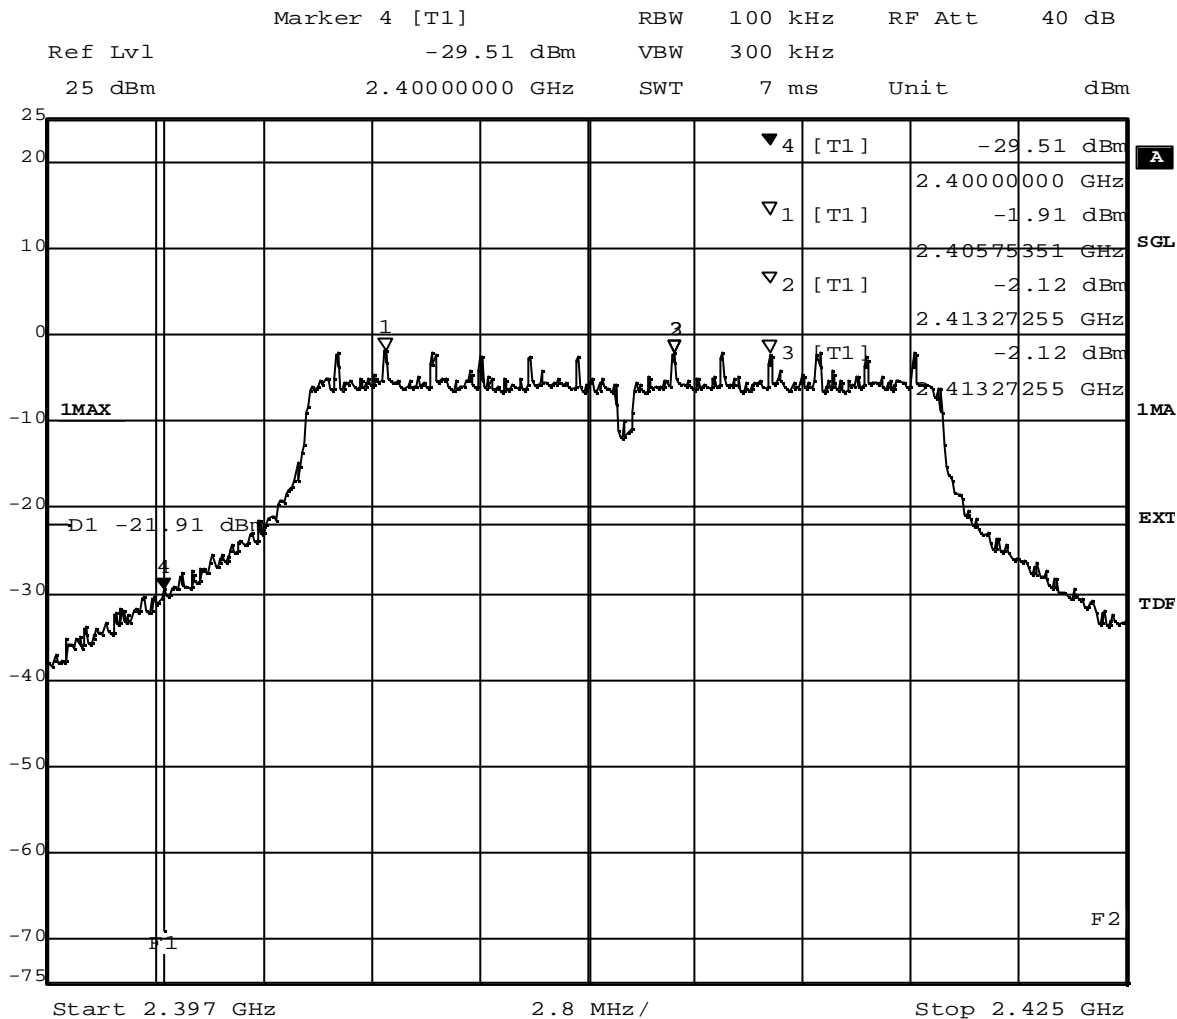


Title: Band Edge Compliance  
 Comment A: CH B: 2412 MHz  
 Date: 15.JUL.2010 09:22:39

(determination of reference value for spurious emissions measurement)

## 7.4.2 Spurious RF conducted emission operating mode 1

### Op. Mode

op-mode 1b

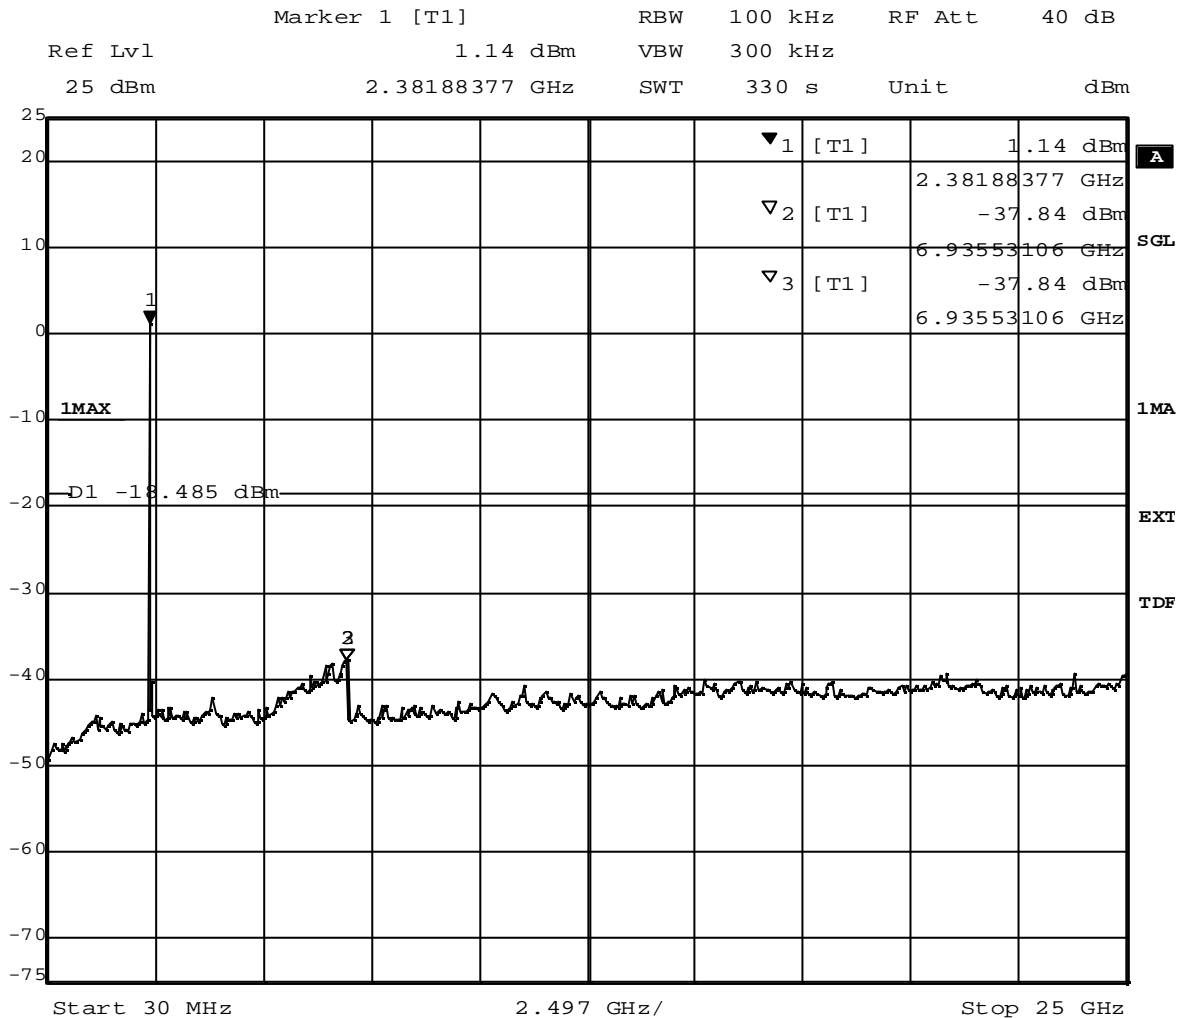


Title: spurious emissions  
 Comment A: CH B: 2412 MHz  
 Date: 14.JUL.2010 14:58:58

(spurious emissions measurement)

## Op. Mode

op-mode 1g

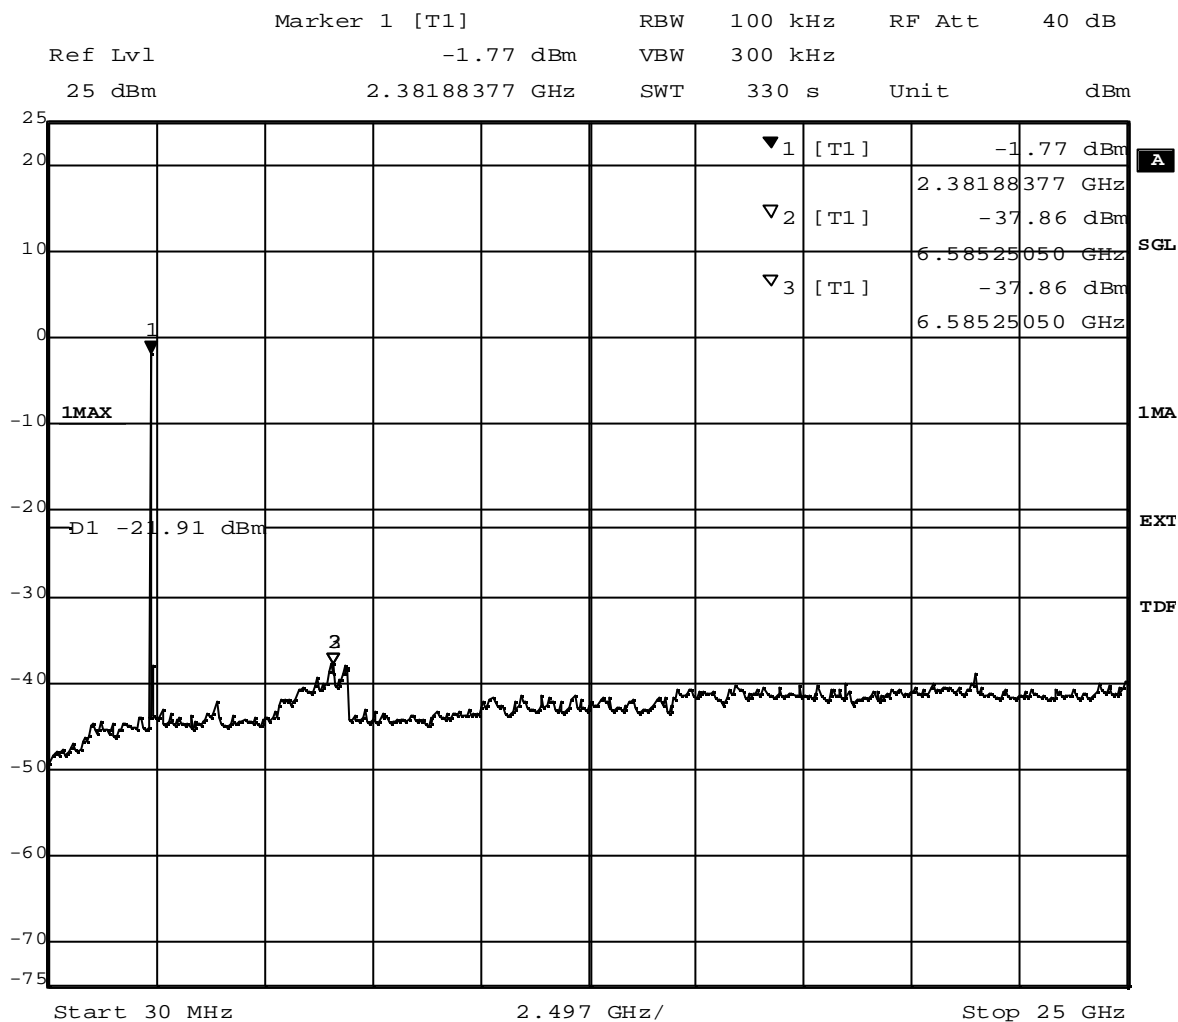

Title: spurious emissions  
 Comment A: CH B: 2412 MHz  
 Date: 15.JUL.2010 09:34:17


(spurious emissions measurement)



### 7.4.3 Spurious RF conducted emission operating mode 2

#### Op. Mode

op-mode 2b

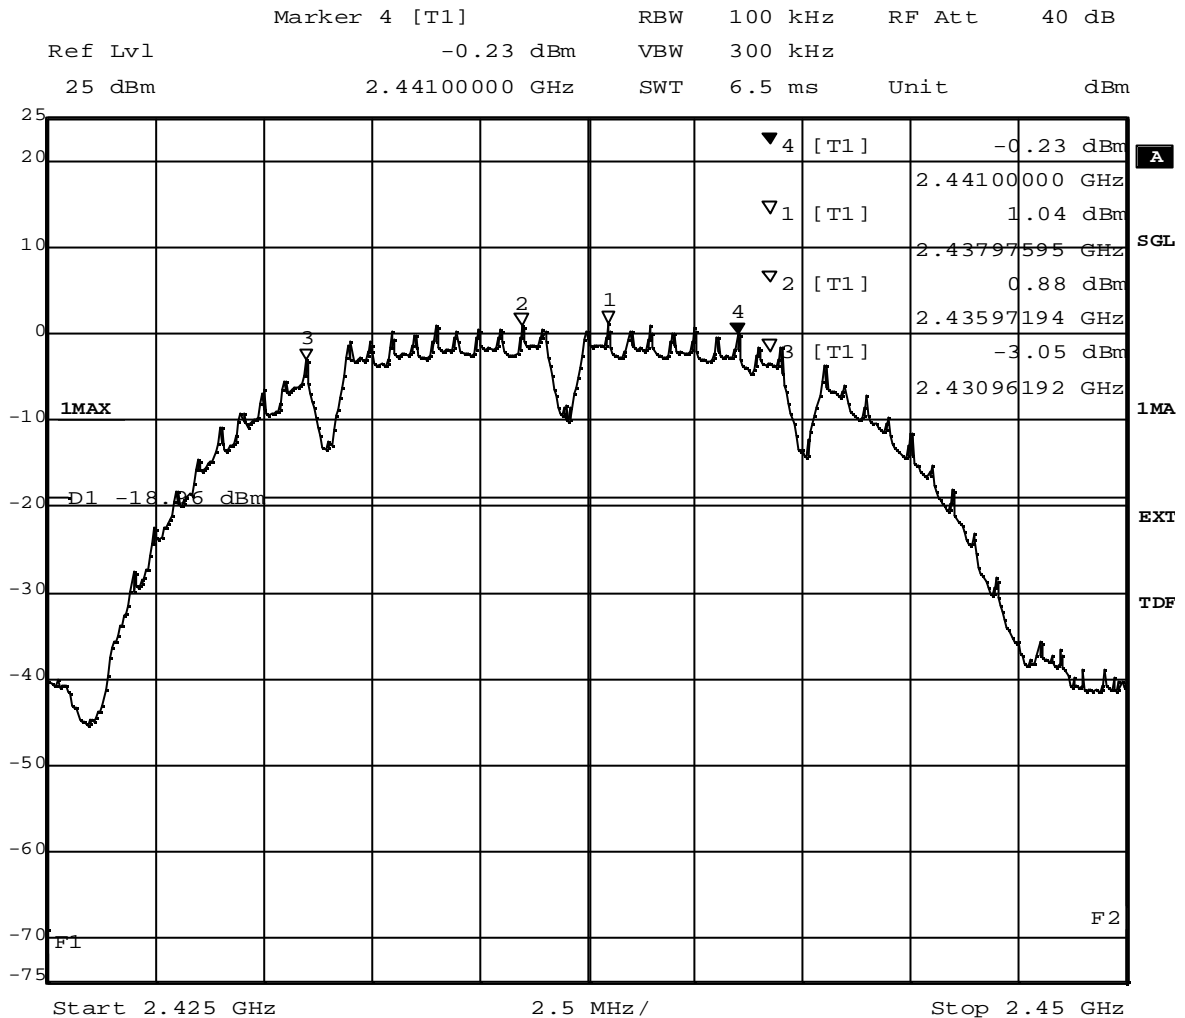

Title: Band Edge Compliance


Comment A: CH M: 2437 MHz

Date: 14.JUL.2010 14:34:05

(determination of reference value for spurious emissions measurement)

## Op. Mode

op-mode 2b

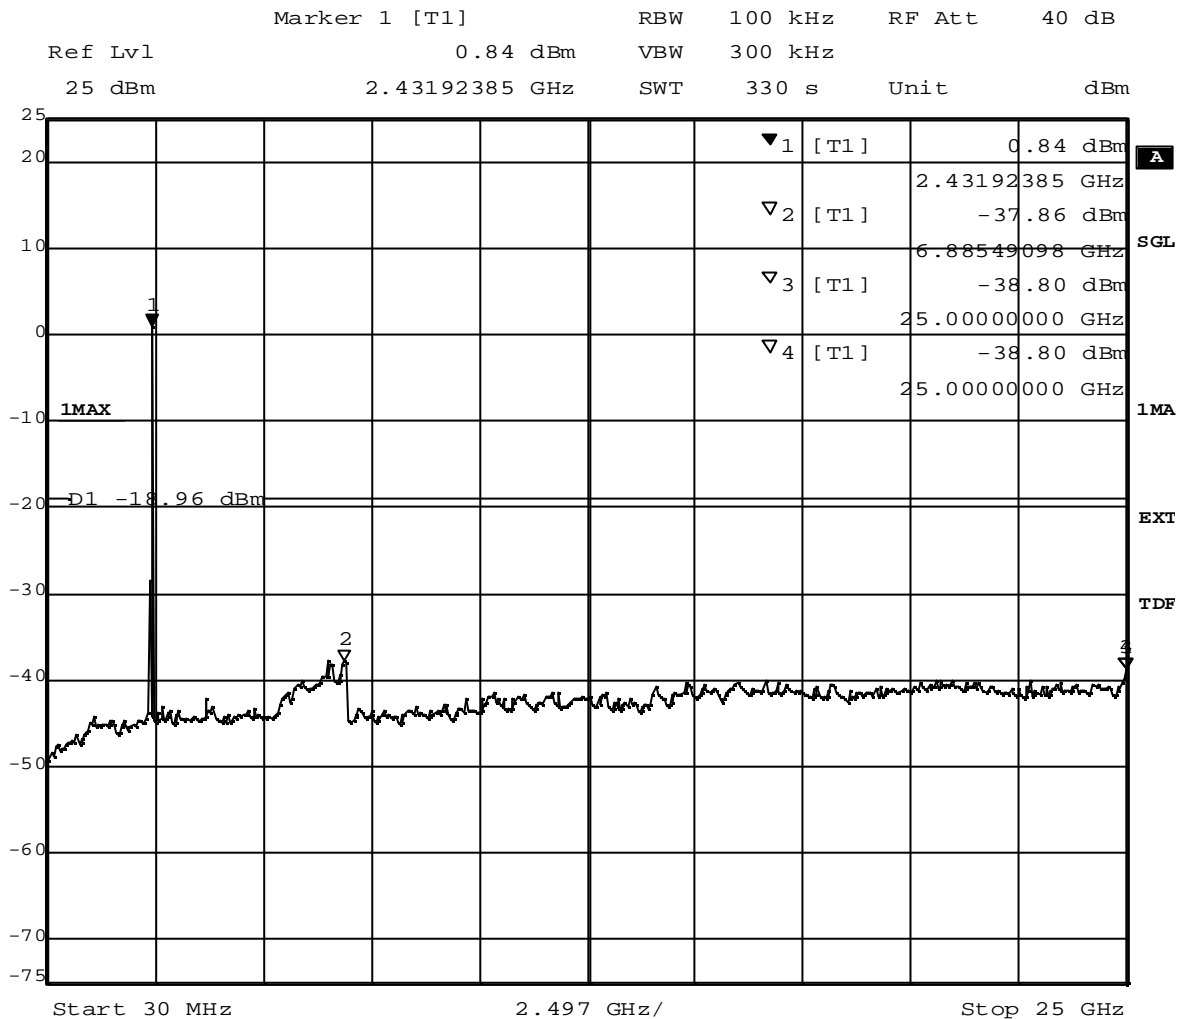


Title: spurious emissions  
 Comment A: CH M: 2437 MHz  
 Date: 14.JUL.2010 14:45:44

(spurious emissions measurement)

## Op. Mode

op-mode 2g

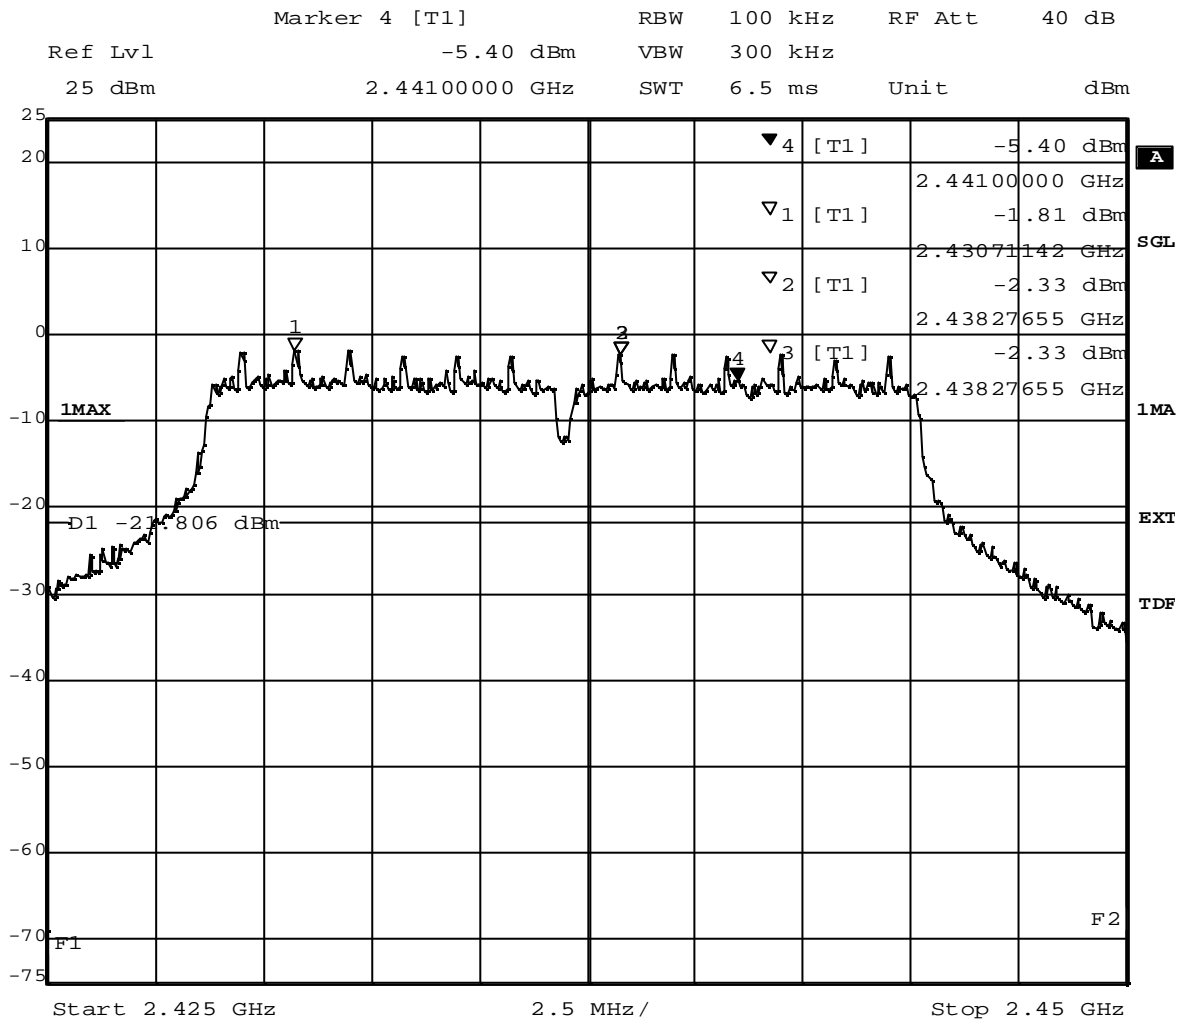


Title: Band Edge Compliance  
 Comment A: CH M: 2437 MHz  
 Date: 15.JUL.2010 09:37:11

(determination of reference value for spurious emissions measurement)

## Op. Mode

op-mode 2g

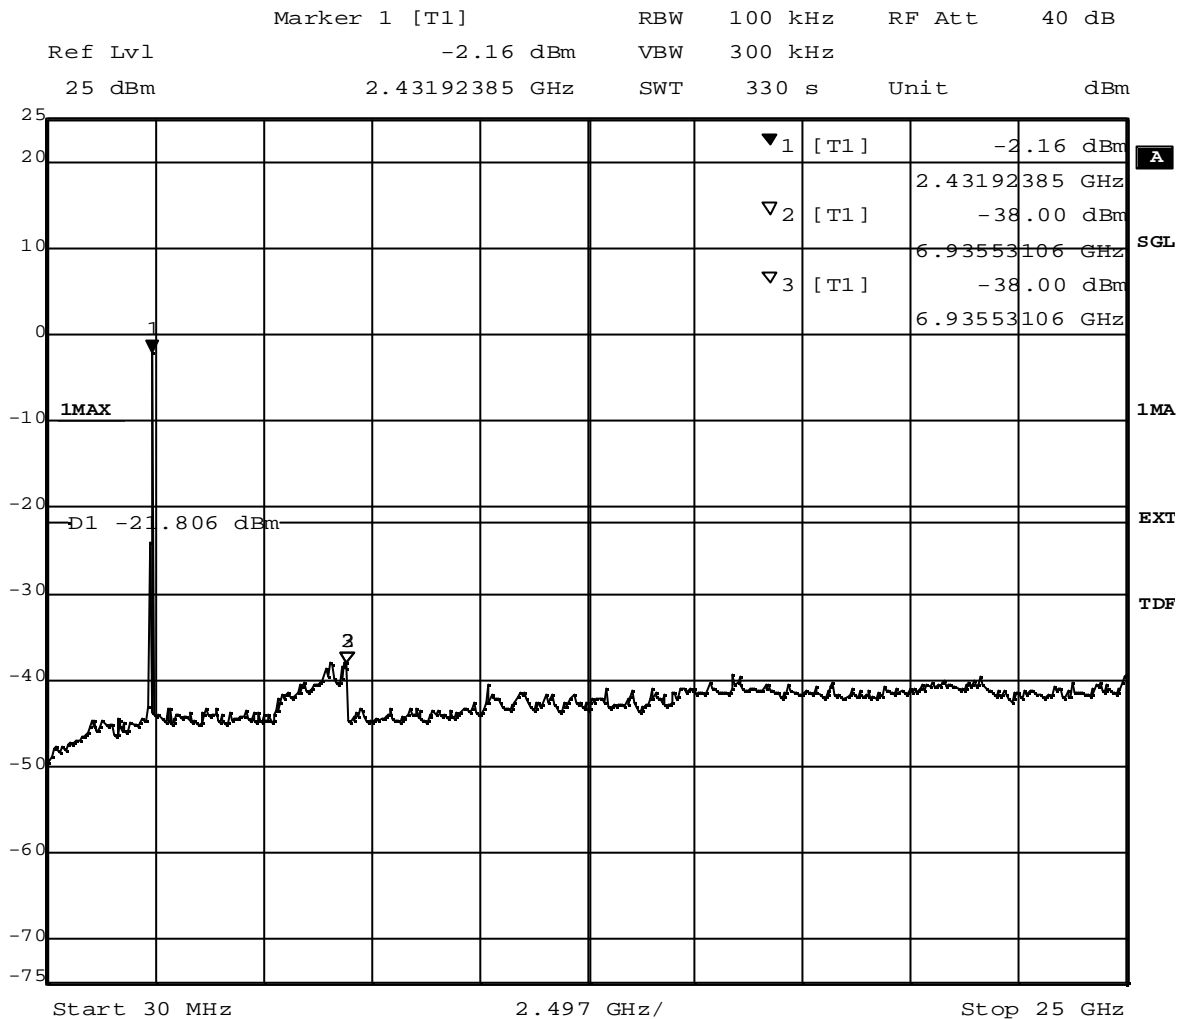


Title: spurious emissions  
 Comment A: CH M: 2437 MHz  
 Date: 15.JUL.2010 09:48:50

(spurious emissions measurement)

#### 7.4.4 Band edge compliance conducted operating mode 3

##### Op. Mode

op-mode 3b

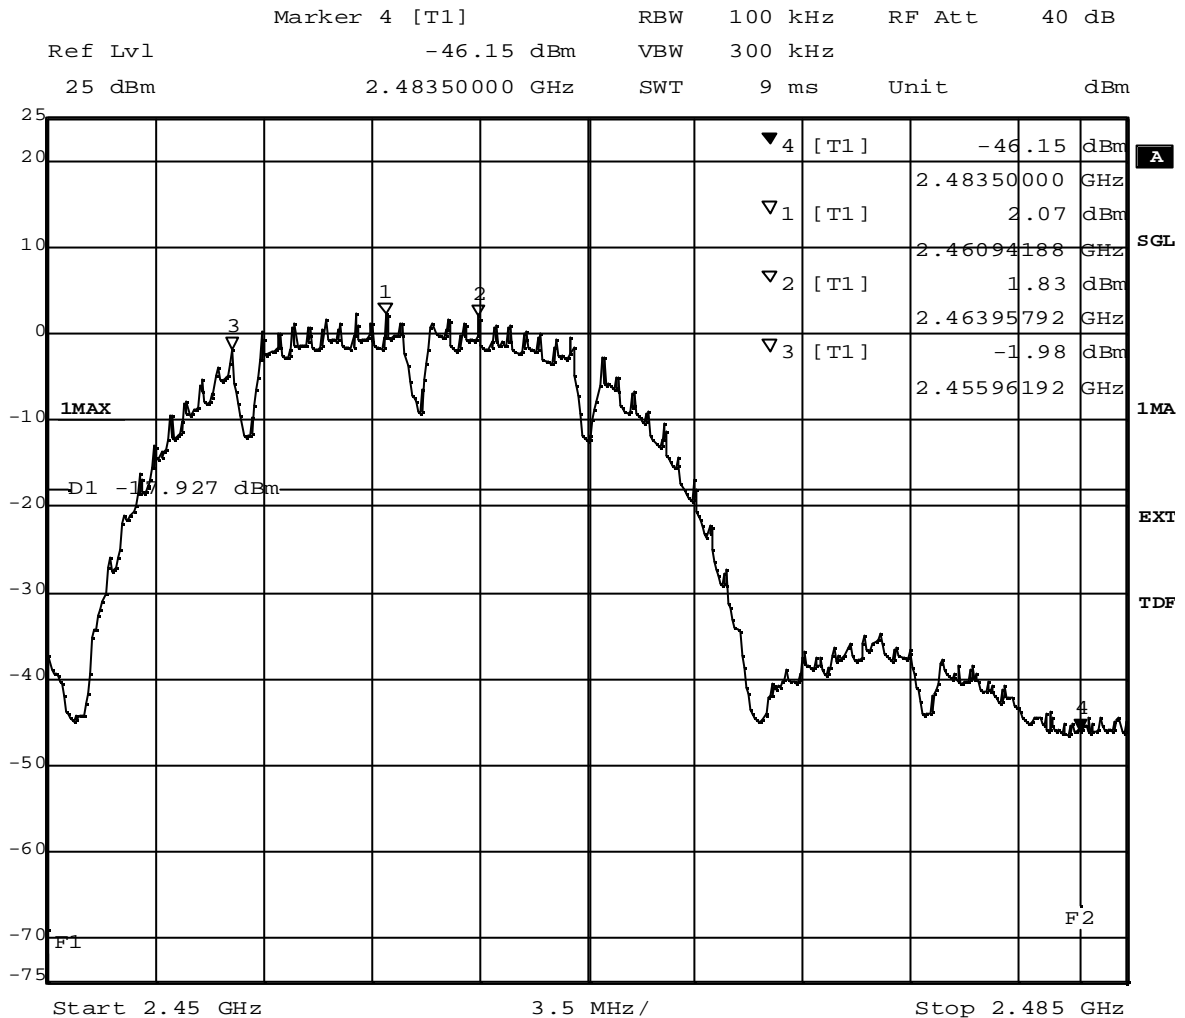

Title: Band Edge Compliance


Comment A: CH T: 2462 MHz

Date: 14.JUL.2010 14:20:54

(determination of reference value for spurious emissions measurement)

## Op. Mode

op-mode 3g

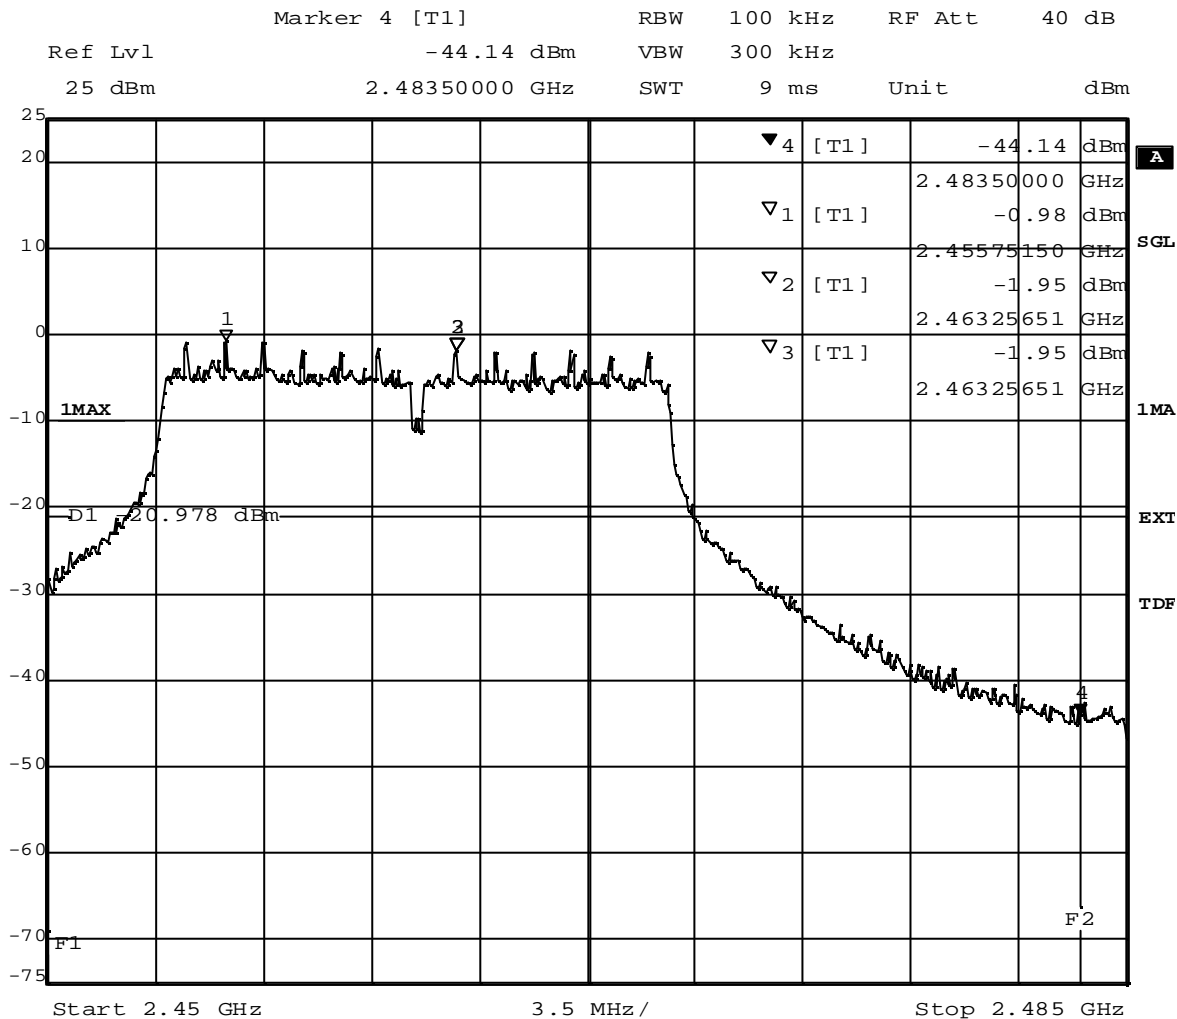


Title: Band Edge Compliance  
 Comment A: CH T: 2462 MHz  
 Date: 15.JUL.2010 09:51:06

(determination of reference value for spurious emissions measurement)

## 7.4.5 Spurious RF conducted emission operating mode 3

### Op. Mode

op-mode 3b

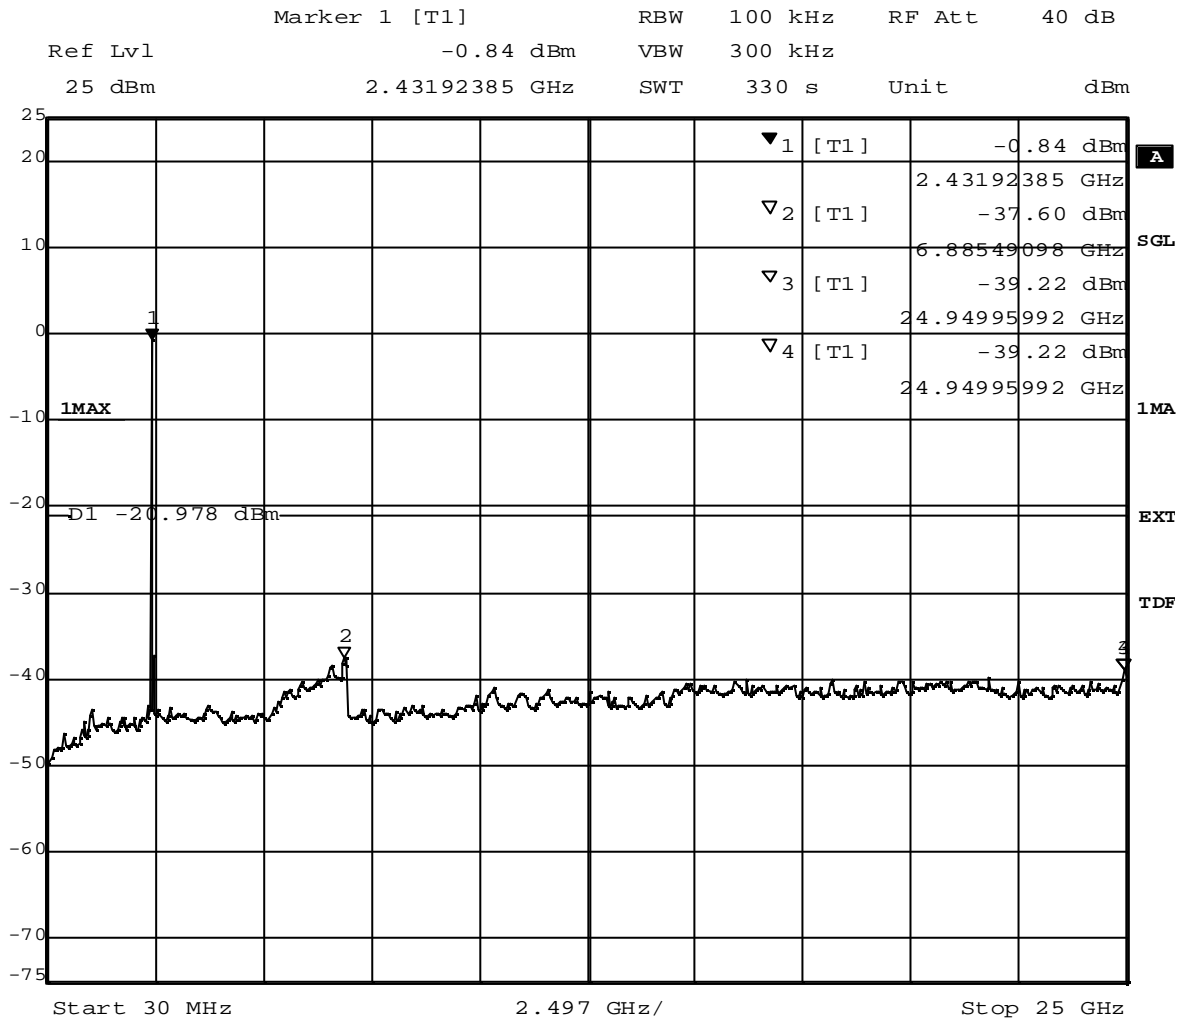


Title: spurious emissions  
 Comment A: CH T: 2462 MHz  
 Date: 15.JUL.2010 10:02:45

(spurious emissions measurement)

## Op. Mode

op-mode 3g

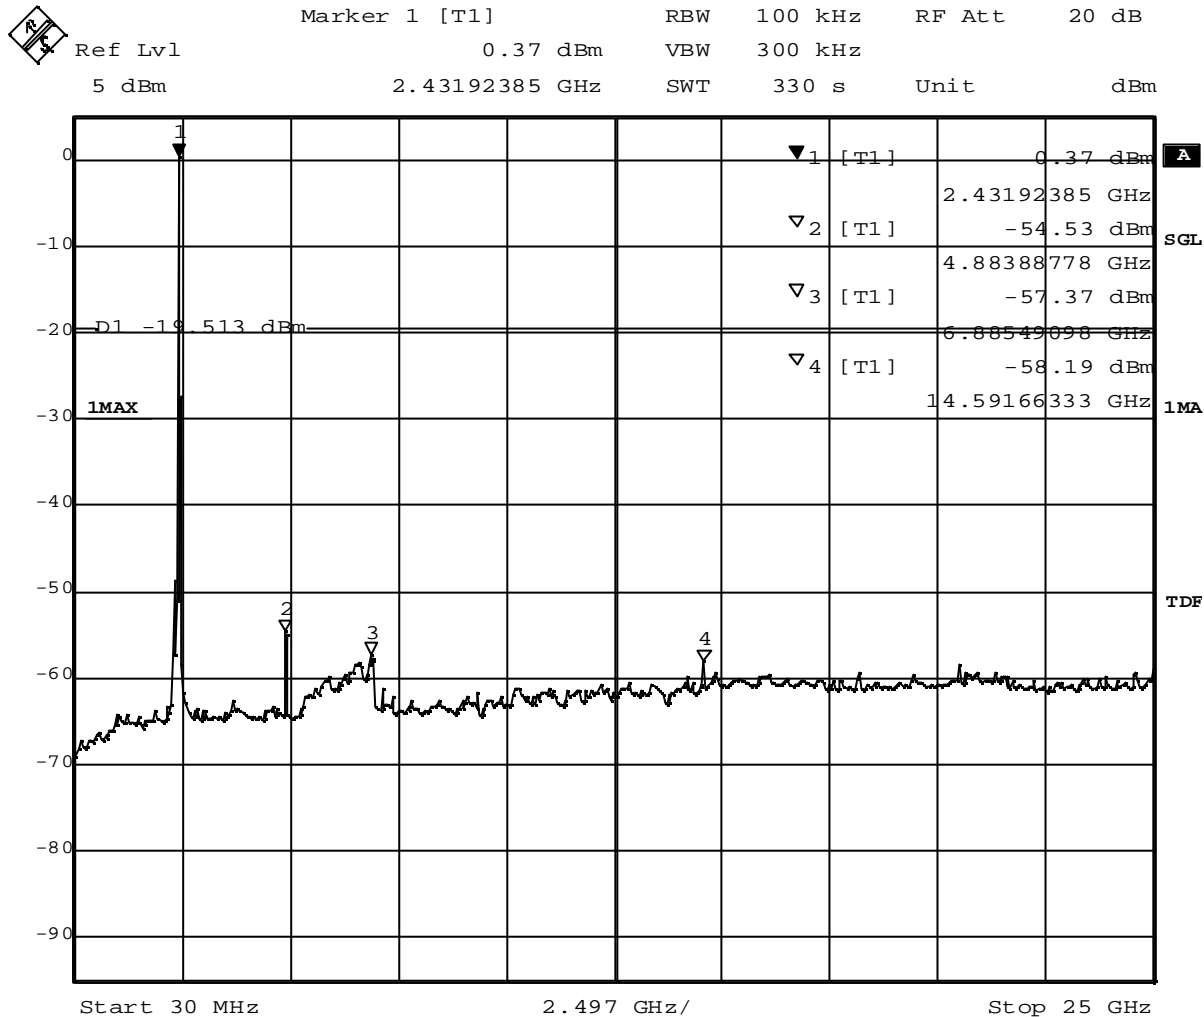

Title: spurious emissions  
 Comment A: CH T: 2462 MHz  
 Date: 14.SEP.2005 00:18:21


(spurious emissions measurement)




## 7.5 Band edge compliance radiated operating mode 3

Op. Mode higher band edge

op-mode 3b TX on 2462 MHz

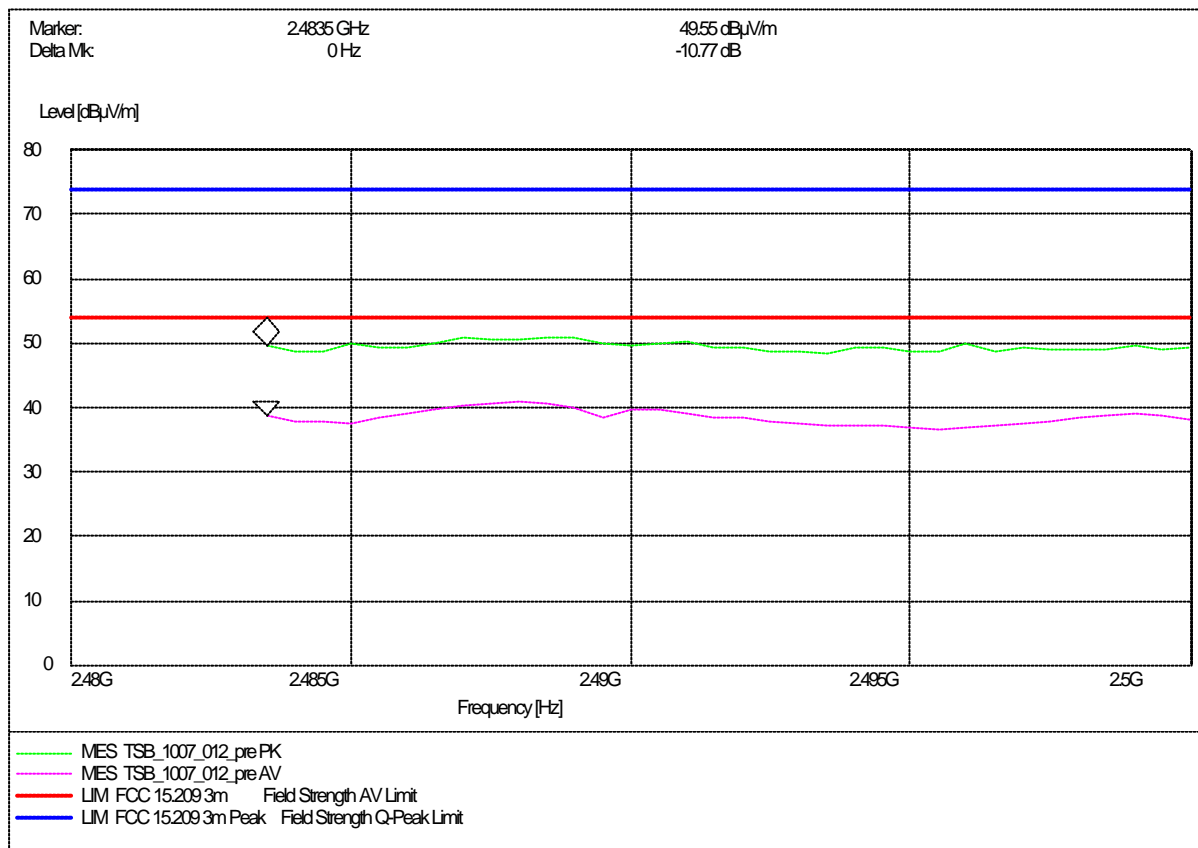

**Op. Mode**      **higher band edge**  
**op-mode 3g**    **TX on 2462 MHz**

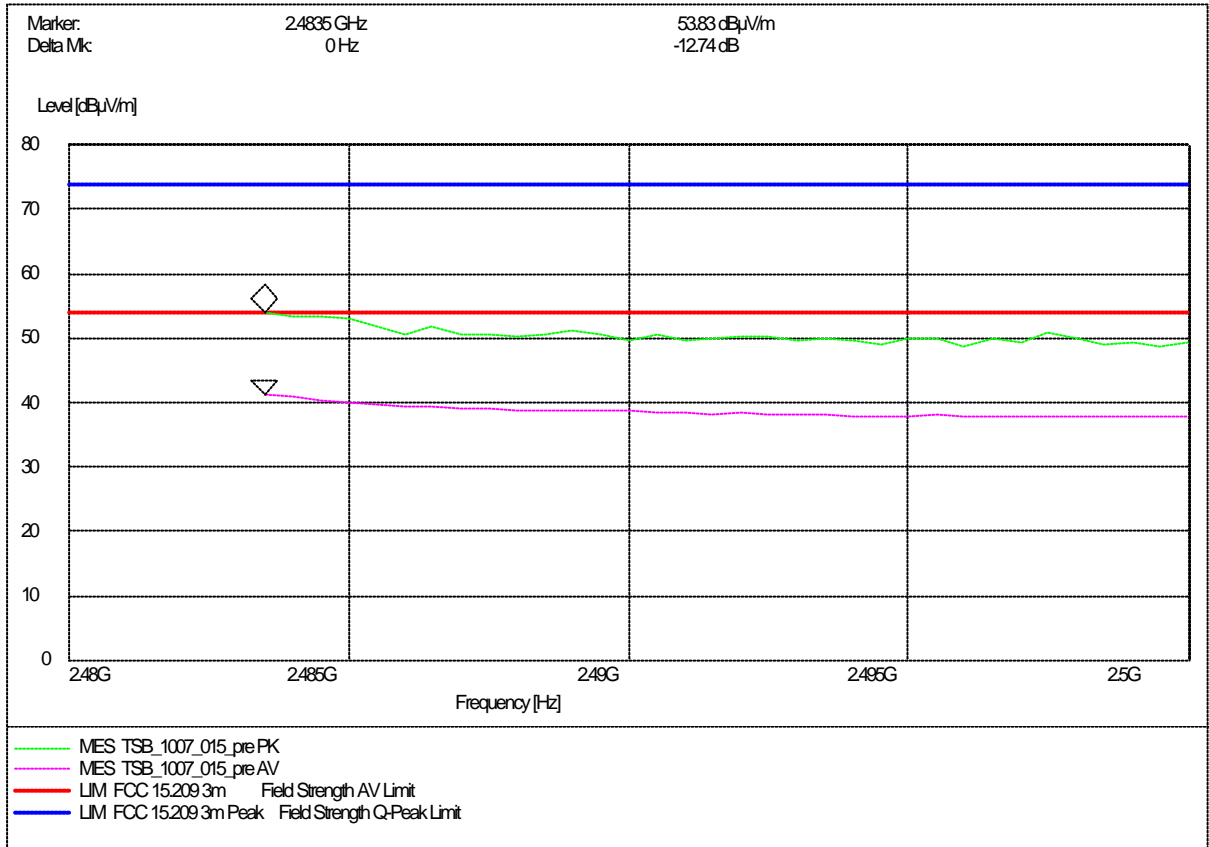


## 7.6 Radiated emissions (f < 30 MHz)


### Op. Mode

op-mode 2b


Antenna position 90°  
EUT position front side

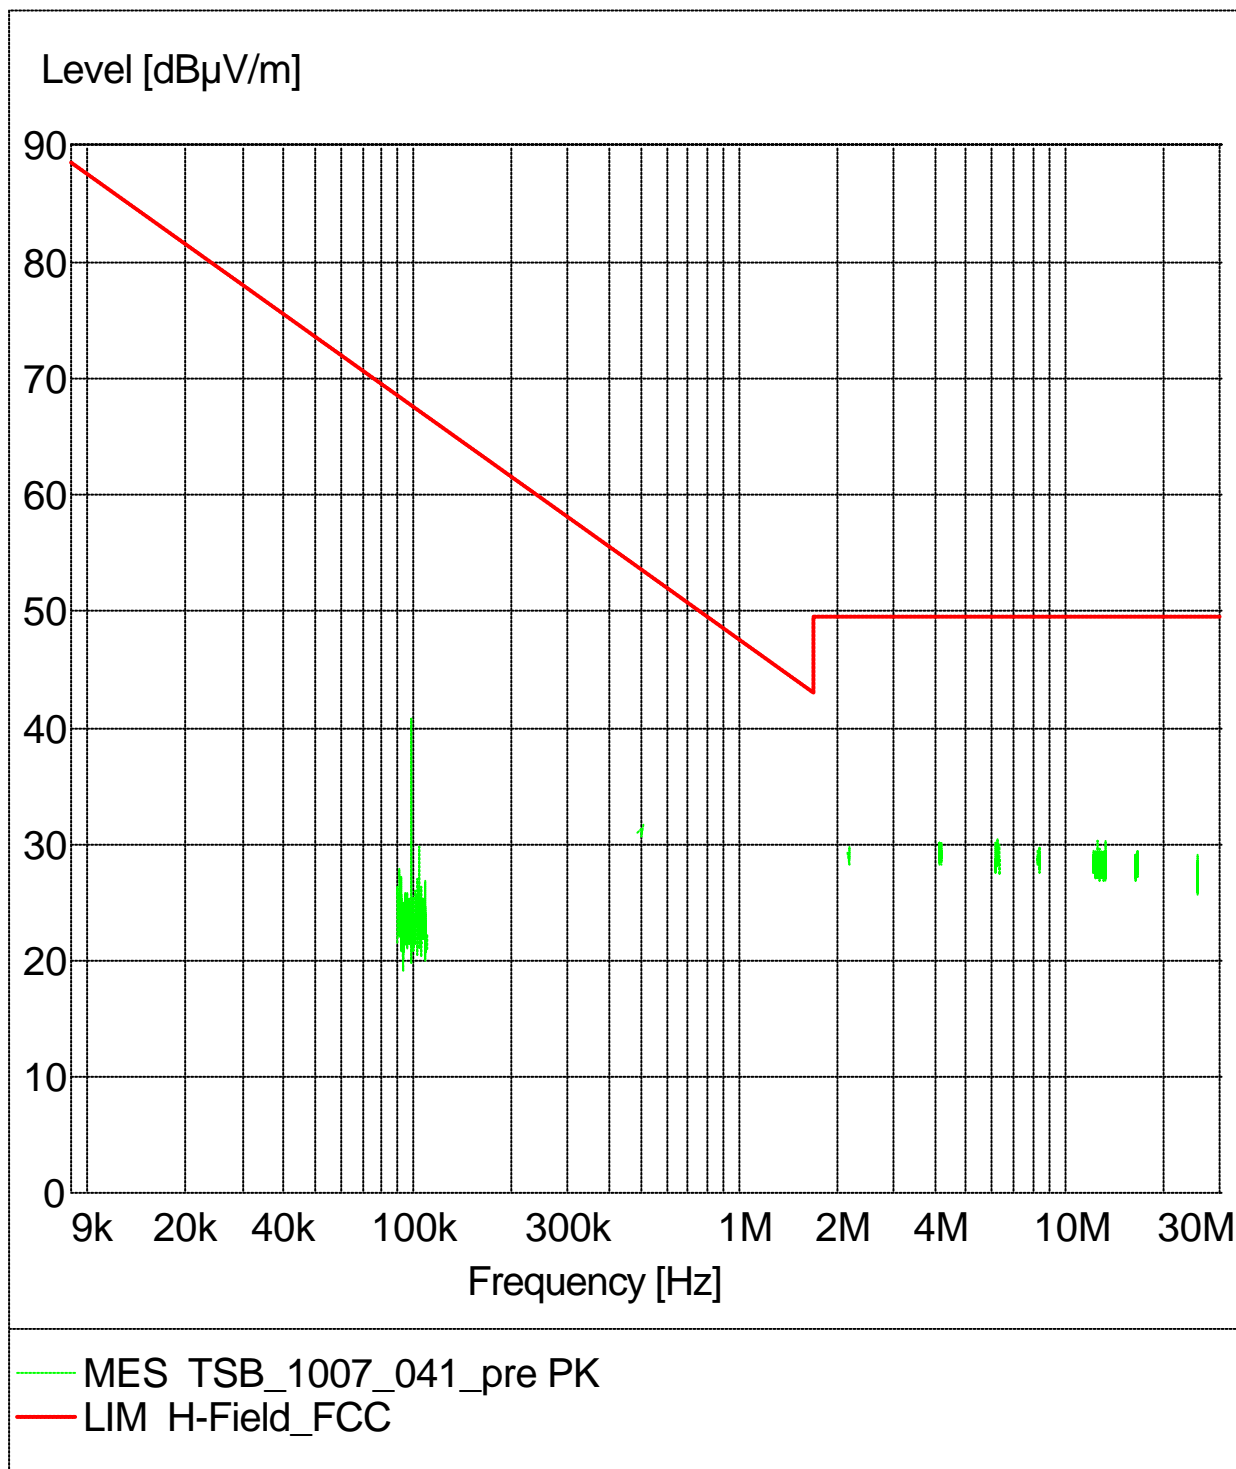


Antenna position 90°  
EUT position right side

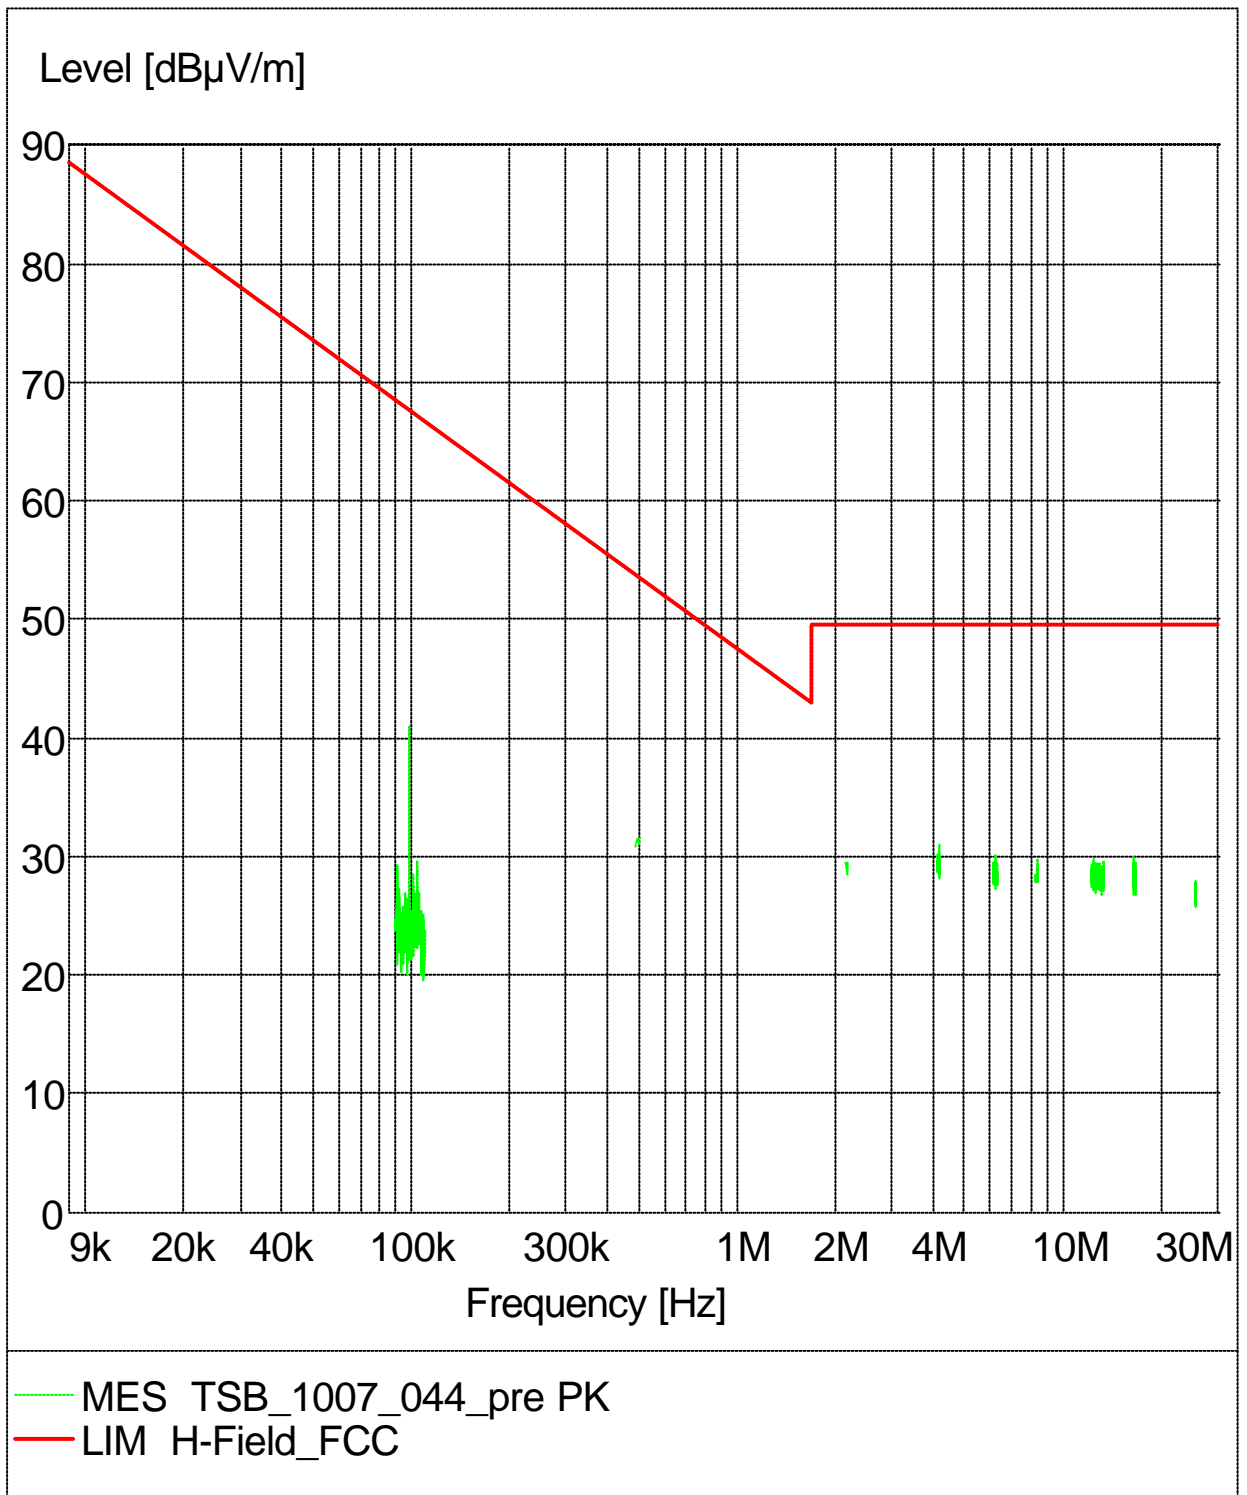

Antenna position 0°  
EUT position front side

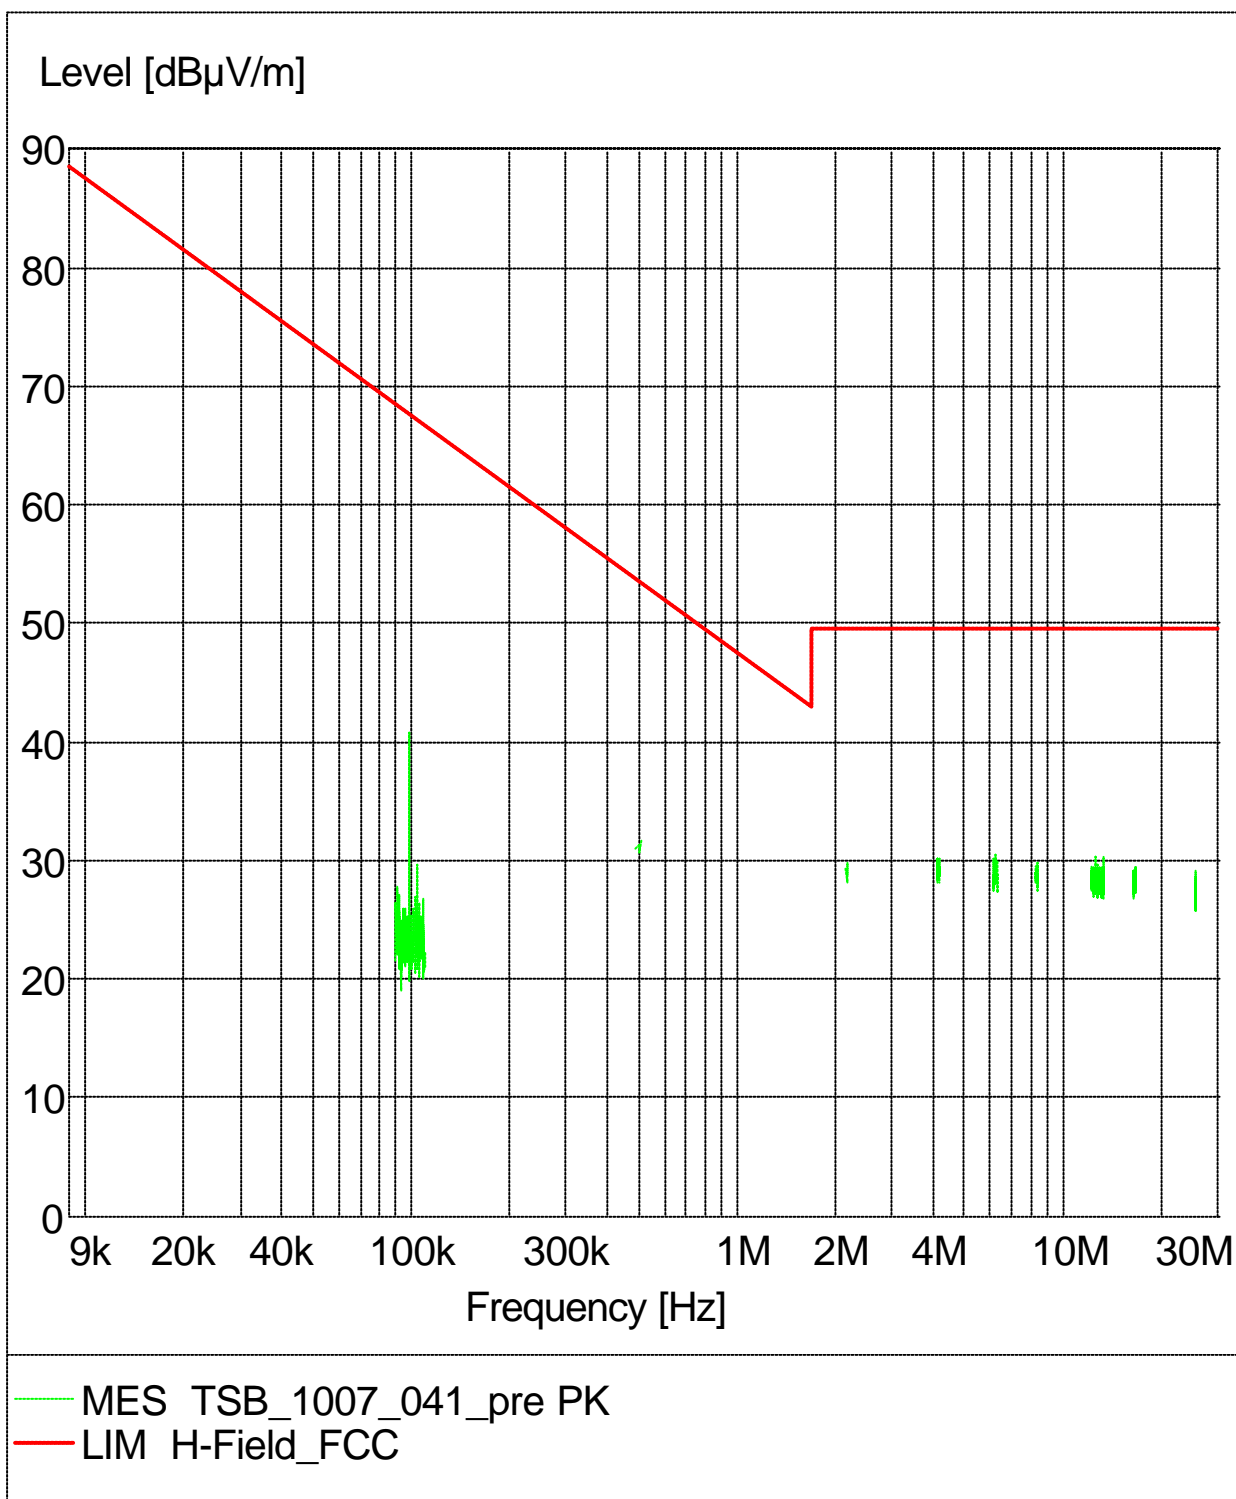


Antenna position 0°  
EUT position right side

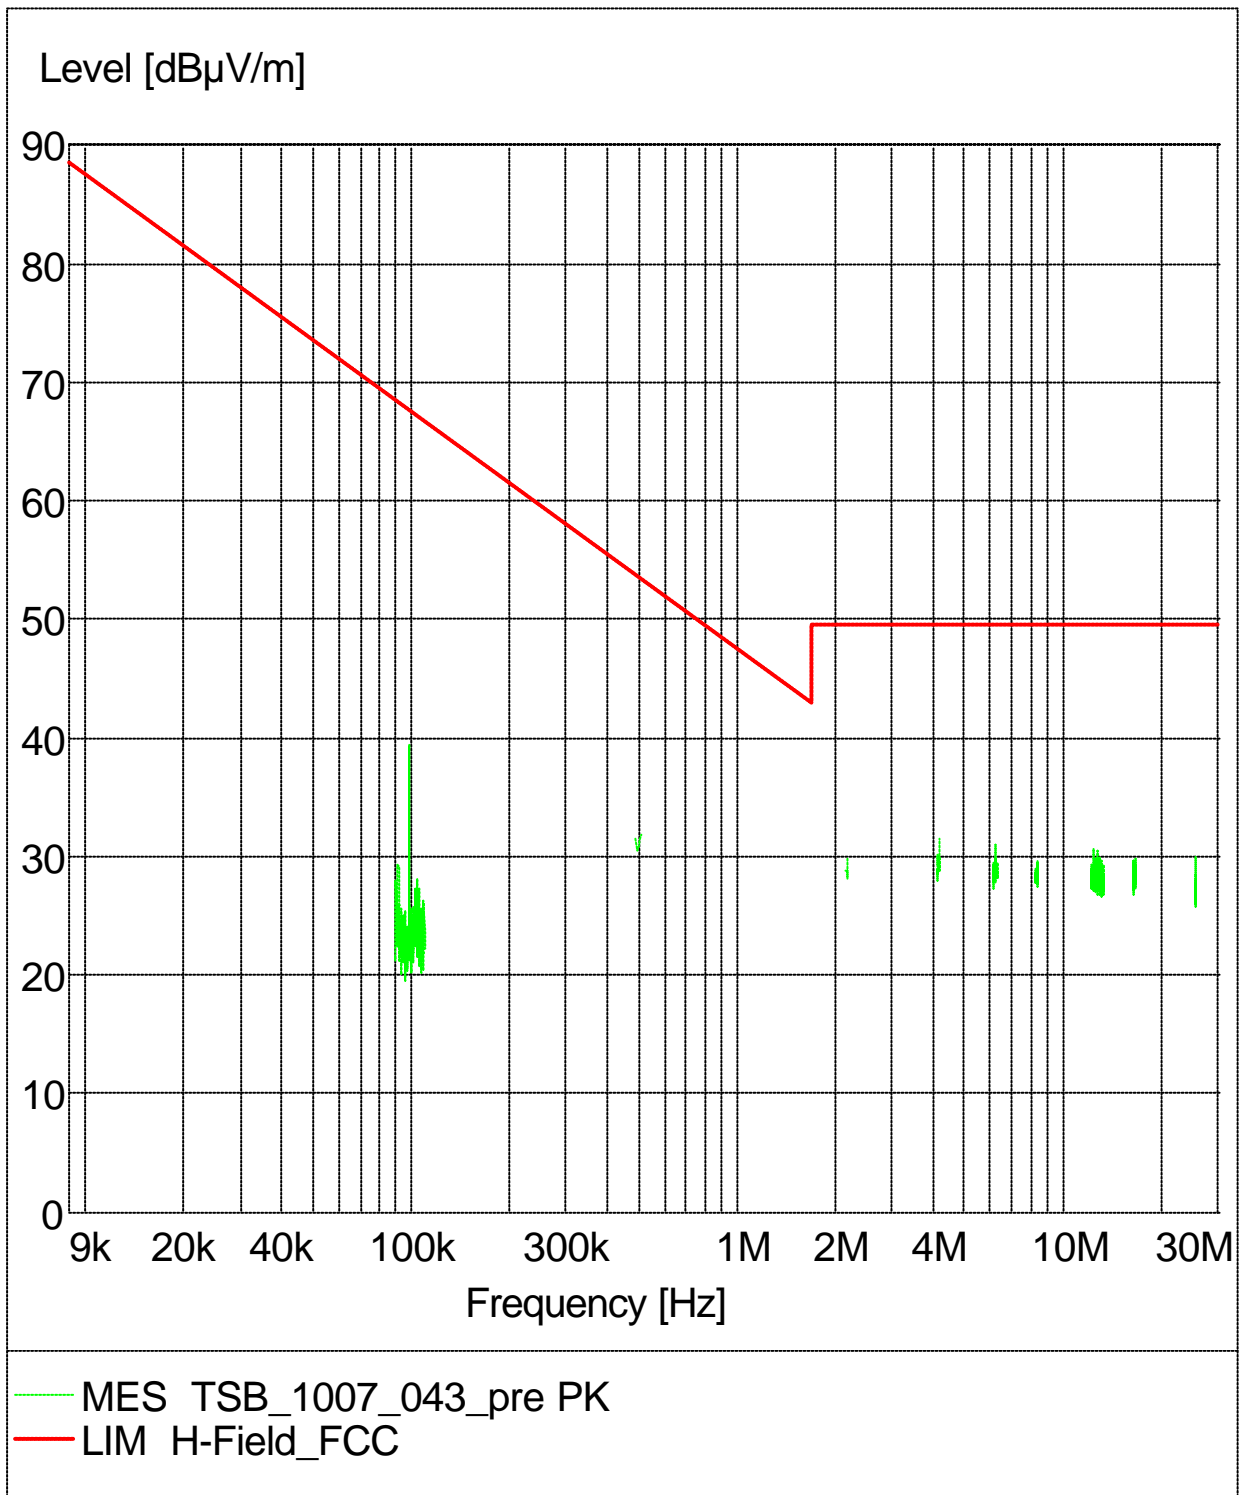

## 7.7 Power density

### Op. Mode

op-mode 1b

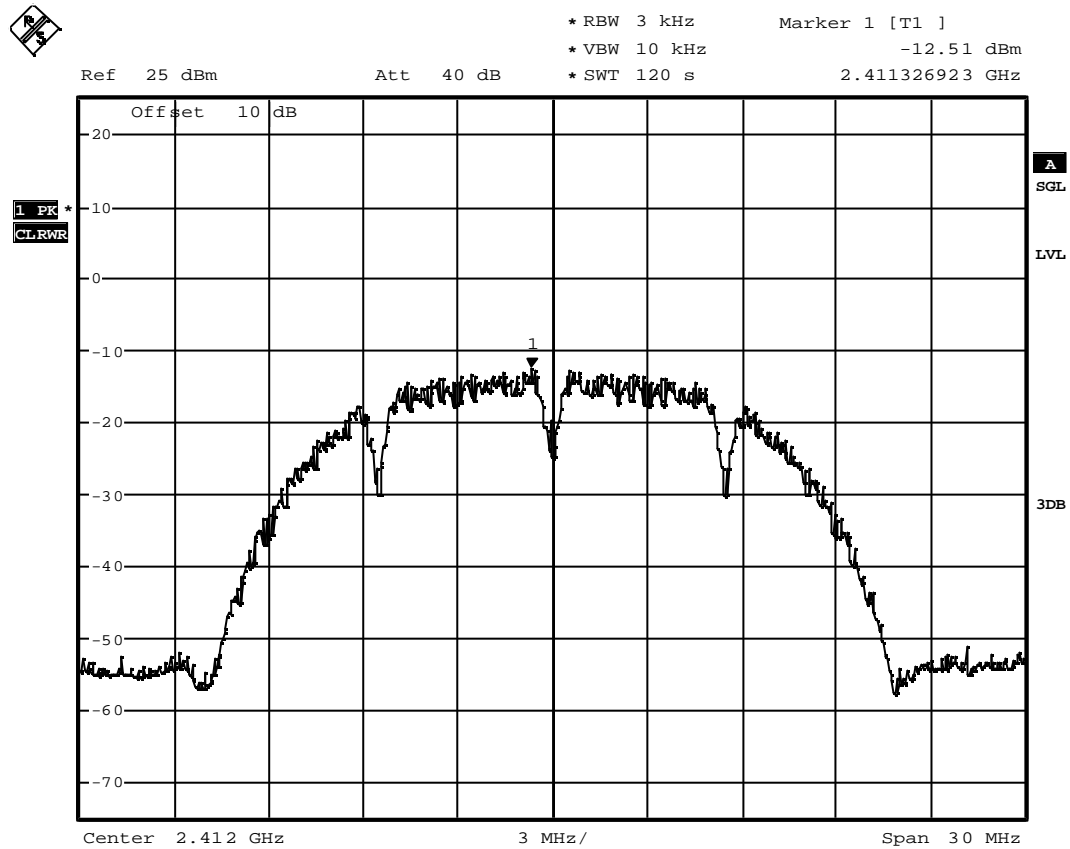


Date: 4.AUG.2010 10:29:25

## Op. Mode

op-mode 1g



Ref 25 dBm Att 40 dB \* RBW 3 kHz Marker 1 [T1 ]  
 \* VBW 10 kHz -14.14 dBm  
 \* SWT 120 s 2.412865385 GHz

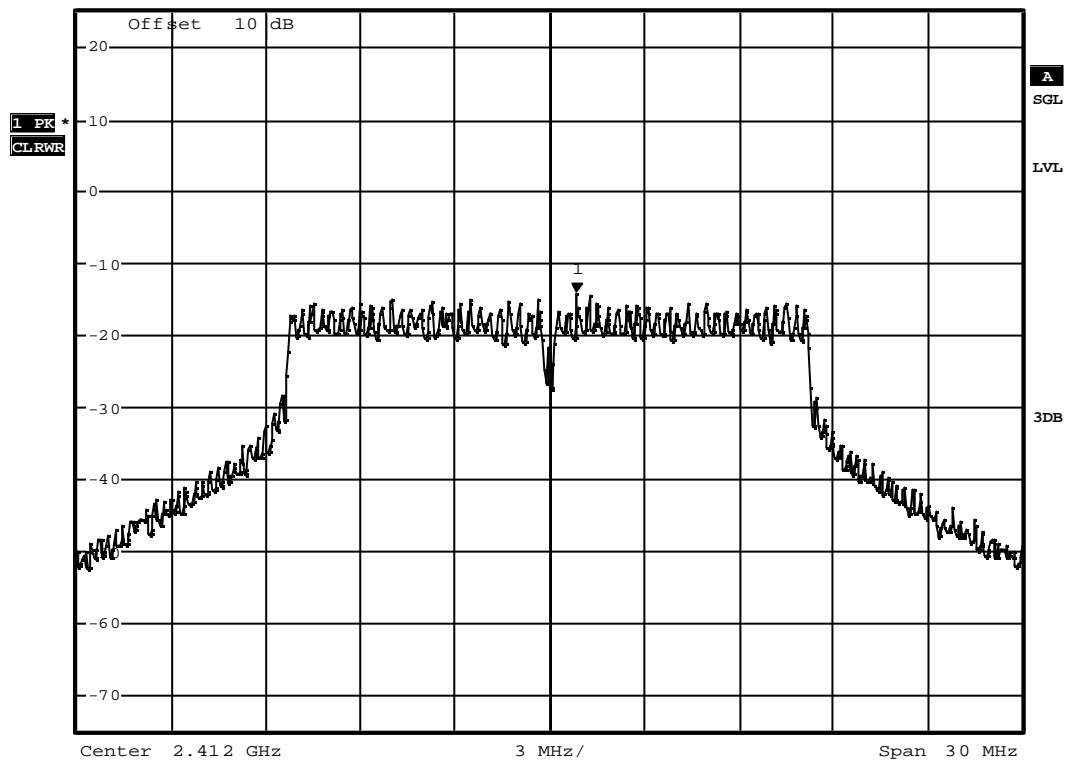

Date: 4.AUG.2010 11:23:24




## Op. Mode

op-mode 2b



Ref 25 dBm Att 40 dB \* RBW 3 kHz Marker 1 [T1 ]  
 \* VBW 10 kHz -12.46 dBm  
 \* SWT 120 s 2.437528846 GHz

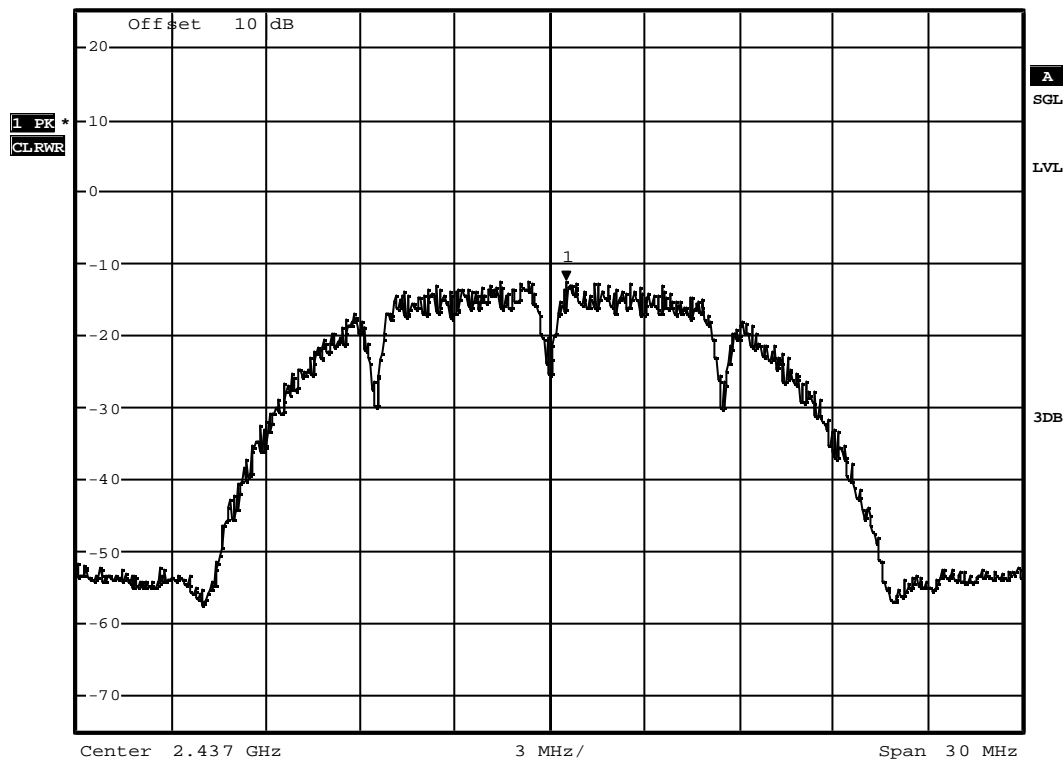


Date: 4.AUG.2010 11:29:34

## Op. Mode

op-mode 2g



Ref 25 dBm Att 40 dB \* RBW 3 kHz \* VBW 10 kHz \* SWT 120 s Marker 1 [T1 ] -14.54 dBm 2.438250000 GHz

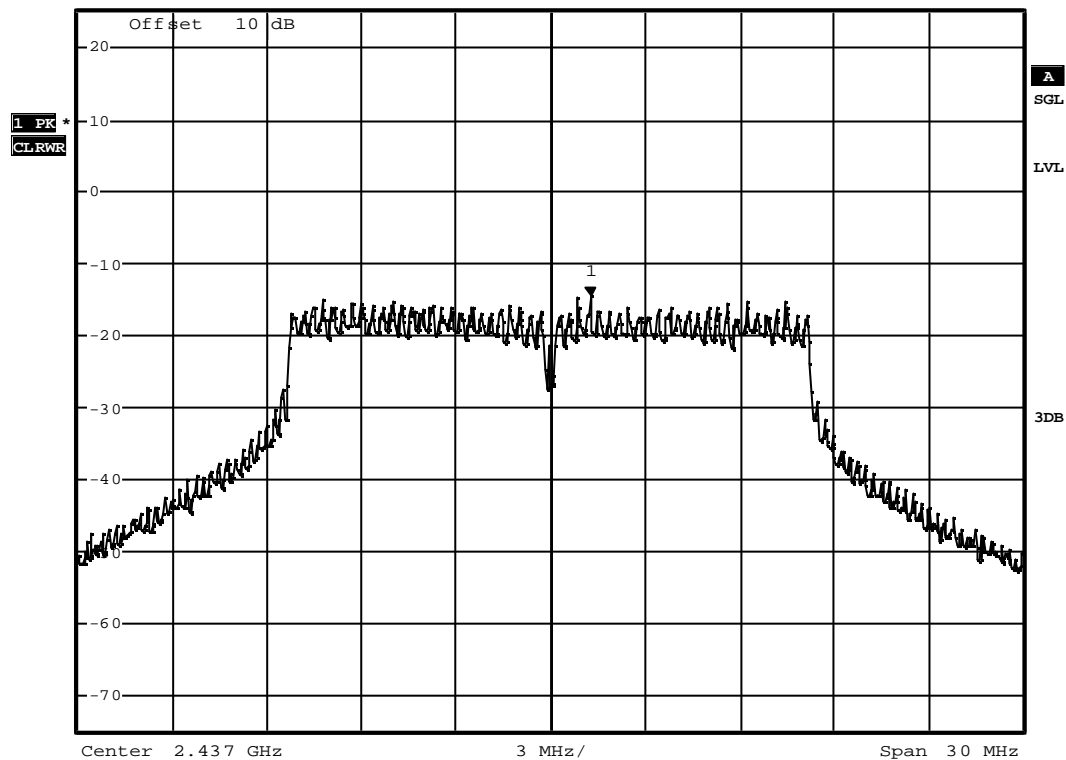


Date: 4.AUG.2010 11:16:25

## Op. Mode

op-mode 3b



Ref 25 dBm Att 40 dB \* RBW 3 kHz Marker 1 [T1 ]  
 \* VBW 10 kHz -11.86 dBm  
 \* SWT 120 s 2.462817308 GHz

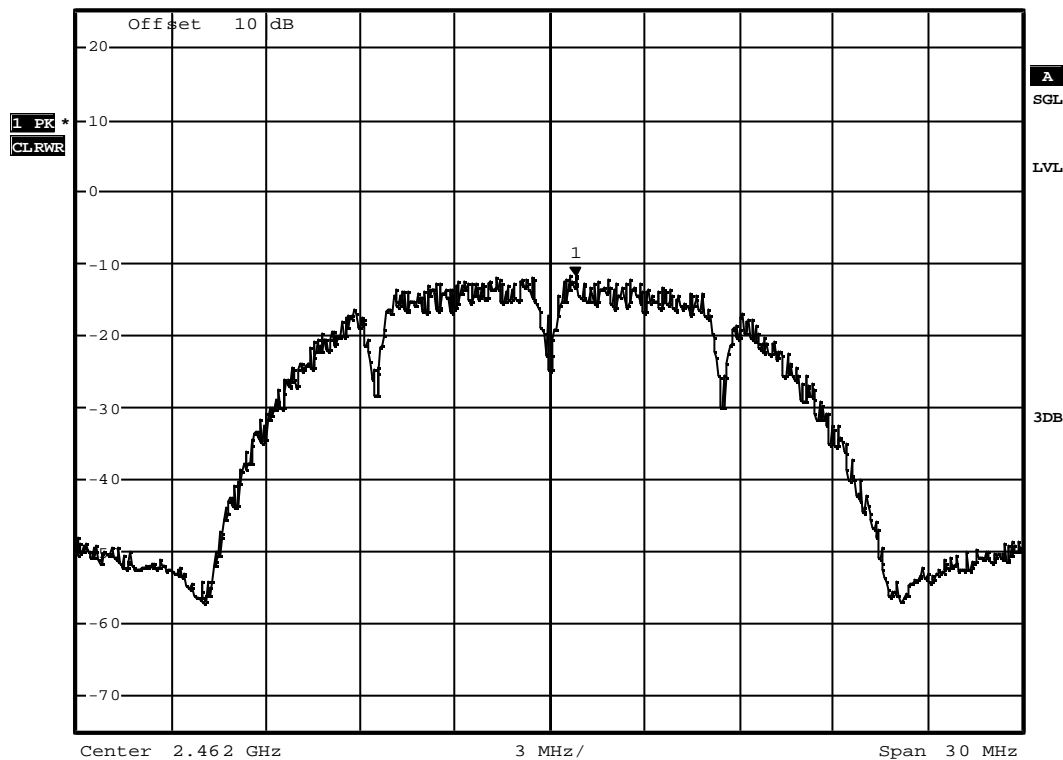


Date: 4.AUG.2010 11:05:59

## Op. Mode

op-mode 3g



Ref 25 dBm Att 40 dB \* RBW 3 kHz Marker 1 [T1 ]  
 \* VBW 10 kHz -13.09 dBm  
 \* SWT 120 s 2.455076923 GHz

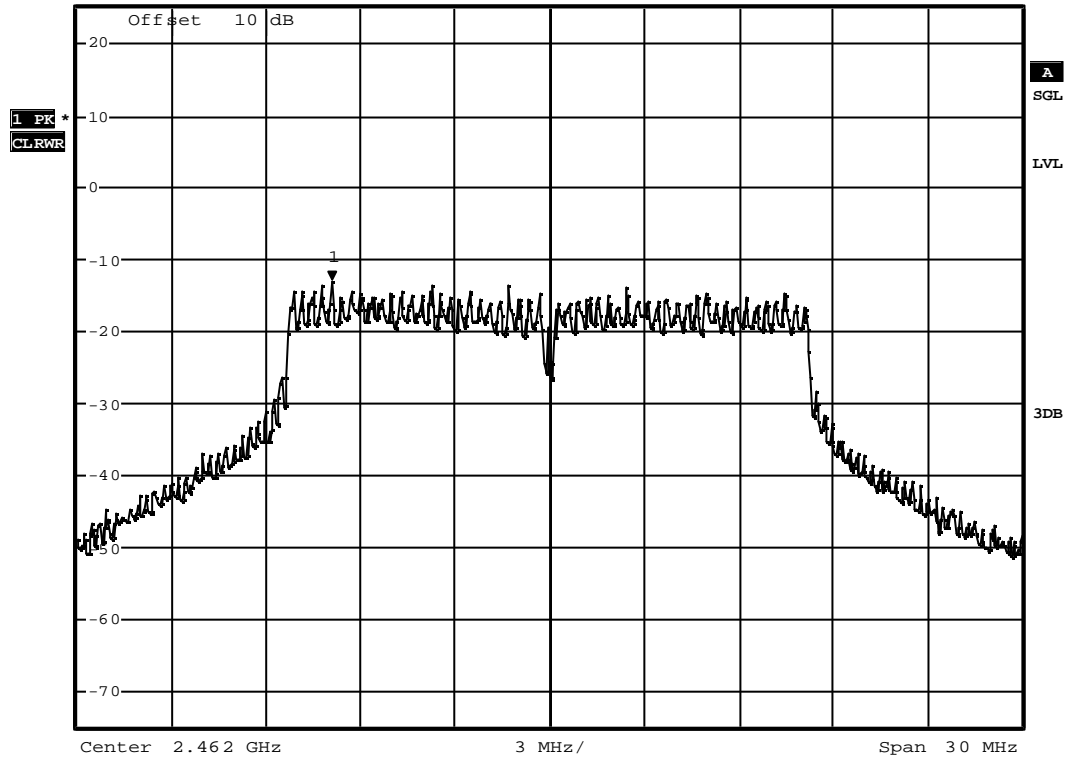

Date: 4.AUG.2010 11:12:08