

MPE REPORT

POWER BANK

MODEL No.: PW02-1A-5K-B, 2IHPP2026, 2IHPP2026B4G7, 2IHPP2026W4G7,
2IHPP2026P4G7, 2IHPP2026G4G7, 2IHPP2026F4G7, 2IHPP2026N4G7,
2IHPP2026L4G7, 2IHPP2026Q4G7, 2IHPP2026O4G7, 2IHPP2026Y4G7,
PW02-1A-5K-W, PW02, PW02-1A-5K-PAE, PW02-1A-5K-PAN,
PW02-1A-5K-PAP, PW02-1A-5K-PAU, 2IHPP2037B4G7, 2IHPP2037W4G7,
2IHPP2037P4G7, 2IHPP2037G4G7, 2IHPP2037F4G7, 2IHPP2037N4G7,
2IHPP2037L4G7, 2IHPP2037Q4G7, 2IHPP2037O4G7, 2IHPP2037Y4G7,
2IHPP2037

FCC ID: WWE-2IHPP2026

REPORT NO.:NCT23051281E-2

ISSUE DATE: Jan. 22, 2024

Prepared for

LIFEWORCS TECHNOLOGY GROUP LLC.

530 7th Ave, 21st Fl, New York 10018,United States

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	4
2. GENERAL INFORMATION	5
2.1. DESCRIPTION OF DEVICE (EUT)	5
2.2. TEST SETUP	6
2.3. DESCRIPTION OF TEST FACILITY	7
2.4. MEASUREMENT UNCERTAINTY	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
3.1. FOR MPE MEASUREMENT	8
4. RF EXPOSURE	9
4.1. MEASURING STANDARD	9
4.2. REQUIRMENTS	9
4.3. TEST CONFIGURATION	10
4.4. LIMITS	11
4.5. TEST UNCERTAINTY:	12
4.6. TEST MODES:	12
4.7. DESCRIPTION OF SUPPORT UNIT	13
4.8. MEASURING RESULTS	13
5. PHOTOGRAPHS OF TEST SETUP	20

TEST REPORT DESCRIPTION

Applicant : LIFEWORKS TECHNOLOGY GROUP LLC.
Address : 530 7th Ave, 21st Fl, New York 10018,United States
Manufacturer : Seosin Electronics Vina Co., Ltd
Address : Chau Son Industrial Park, Le Chan Road, LE HONG PHONG WARD PHULY CITY, HA Nam Province,Vietnam
EUT : POWER BANK
PW02-1A-5K-B, 2IHPP2026, 2IHPP2026B4G7, 2IHPP2026W4G7, 2IHPP2026P4G7, 2IHPP2026G4G7, 2IHPP2026F4G7, 2IHPP2026N4G7, 2IHPP2026L4G7, 2IHPP2026Q4G7, 2IHPP2026O4G7, 2IHPP2026Y4G7, PW02-1A-5K-W, PW02, PW02-1A-5K-PAE, PW02-1A-5K-PAN, PW02-1A-5K-PAP, PW02-1A-5K-PAU, 2IHPP2037B4G7, 2IHPP2037W4G7, 2IHPP2037P4G7, 2IHPP2037G4G7, 2IHPP2037F4G7, 2IHPP2037N4G7, 2IHPP2037L4G7, 2IHPP2037Q4G7, 2IHPP2037O4G7, 2IHPP2037Y4G7, 2IHPP2037
Model Name :
Trademark : N/A

Measurement Procedure Used:

FCC Part 1(1.1310) and Part 2(2.1093)
KDB 680106 D01 Wireless Power Transfer v04

The device described above is tested by Shenzhen NCT Testing Technology Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen NCT Testing Technology Co., Ltd. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen NCT Testing Technology Co., Ltd.

Test Engineer:



Keven Wu / Engineer

Technical Manager:



Henry Wang / Manager



1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
MPE	FCC Part 1(1.1310) and Part 2(2.1093) KDB 680106 D01 Wireless Power Transfer v04	Pass
Note: N/A is an abbreviation for Not Applicable.		


2. GENERAL INFORMATION

2.1. Description of Device (EUT)


EUT	:	POWER BANK
Model Number	:	PW02-1A-5K-B, 2IHPP2026, 2IHPP2026B4G7, 2IHPP2026W4G7, 2IHPP2026P4G7, 2IHPP2026G4G7, 2IHPP2026F4G7, 2IHPP2026N4G7, 2IHPP2026L4G7, 2IHPP2026Q4G7, 2IHPP2026O4G7, 2IHPP2026Y4G7, PW02-1A-5K-W, PW02, PW02-1A-5K-PAE, PW02-1A-5K-PAN, PW02-1A-5K-PAP, PW02-1A-5K-PAU, 2IHPP2037B4G7, 2IHPP2037W4G7, 2IHPP2037P4G7, 2IHPP2037G4G7, 2IHPP2037F4G7, 2IHPP2037N4G7, 2IHPP2037L4G7, 2IHPP2037Q4G7, 2IHPP2037O4G7, 2IHPP2037Y4G7, 2IHPP2037
Difference	:	All the same except the model number.
Power Rating	:	Battery Capacity: 3.7V/5000mAh 18.5Wh Input Micro: 5Vdc, 2.1A ; Input USB-C: 5Vdc, 2.1A Output USB-A:5Vdc, 2.4A; Output USB-C:5Vdc, 2.4A Output Wireless 5W Total Output 12W Max Capacity:5000mAh
Operation Frequency for WPT	:	110-205KHz
Modulation	:	MSK
Antenna Type:	:	Coil Antenna
Date of Received	:	Dec.22, 2023
Date of Test	:	Dec.22, 2023 to Jan.21, 2024

2.2. Test Setup

For mobile exposure conditions:

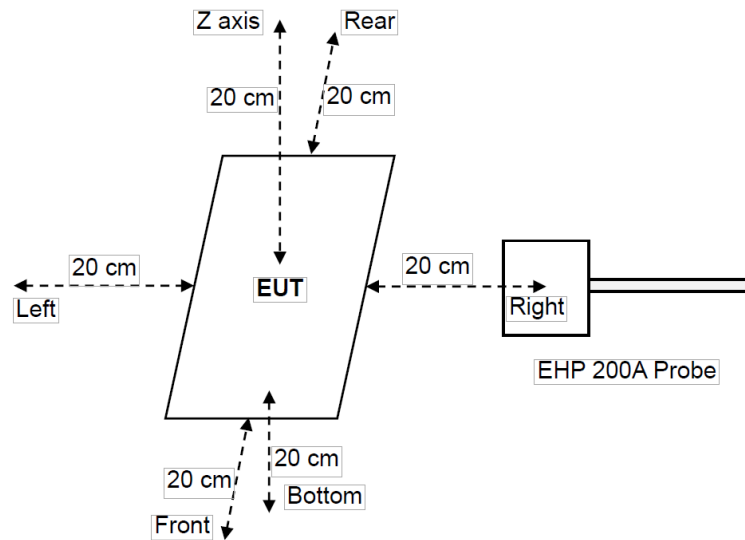

For portable exposure conditions:

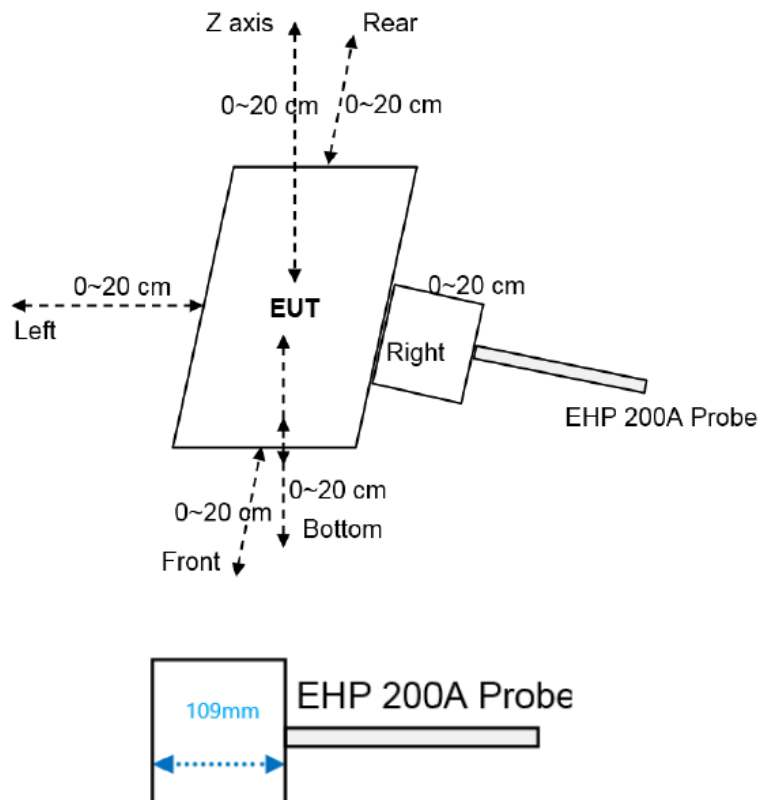

Notes: The EHP 200A Probe has a diameter of 10.9cm and a radius of 5.45cm

2.3. Description of Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27
 The certificate is valid until 2028.01.07
 The Laboratory has been assessed and proved to be in compliance with
 CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)
 The Certificate Registration Number is L8251

Designation Number: CN1347
 Test Firm Registration Number: 894804
 Accredited by A2LA, June 14, 2023
 The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018
 The Conformity Assessment Body Identifier is CN0150
 Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.
 Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
 District, Shenzhen, People's Republic of China

2.4. Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Electric Field Emissions	±0.08V/m
Magnetic Field Emissions	±0.02A/m
uT	±0.01

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1. For MPE Measurement

Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Exposure Level Tester(1Hz-400KHz)	Narda	EHP-200A	180ZX00634	2023.06.21	2024.06.20

4. RF EXPOSURE

4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1093)

4.2. Requirments

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:
 - Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
 - General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

4.3. Test configuration

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with the center of the probe at a distance of 20 cm above all the surface of the primary/client pair
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB680106 D01 Wireless Power Transfer v04

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.TCB
- d. The EUT was measured according to the dictates of KDB680106 D01 Wireless Power Transfer v04

4.4. Limits

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

According to KDB680106 D01 Wireless Power Transfer v04 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 - Section 1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-Field	*/*	B-Field
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	824/f (=27.5 _{30MHz})	2.19/f (=0.073 _{30MHz})	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

4.5. Test Uncertainty:

E-Filed Strength : ±0.08V/m
 H-Filed Strength : ±0.02A/m
 uT : ±0.01

Note: The field intensity value A/m in the report is converted from uT, and the formula is as follows:

uT to A/m $A/m = \frac{\mu T}{1.25}$

4.6. Test Modes:

Test Mode	Description	Remark()
Mode 1	Wireless Charging Output	5%
Mode 2		50%
Mode 3		95%
Mode 4	Adapter+USB-C Input + Wireless Charging Output	5%
Mode 5		50%
Mode 6		95%
Mode 7	Adapter+Micro Input + Wireless Charging Output	5%
Mode 8		50%
Mode 9		95%
Remark: All the modes have tested and recorded the worst mode 1 & mode 2 & mode 3 in the report		

4.7. Description of Support Unit

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	POWER BANK	N/A	PW02-1A-5K-B	N/A	EUT
E-2	Phone	Mi	Xiaomi 13 Ultra	N/A	Auxiliary

4.8. Measuring Results

Portable exposure conditions

Note:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.
- (3) 20-2cm is the actual test value, and 0 cm is the estimated value.
- (4) Perform H-field/E-field measurements are taken along all three axes the device from 0cm>20cm in 2cm minimum increment for each edge surface of the host/client pair. If the center of the probe sensing element is more than 5mm from the probe outer edge, the field strengths need to be estimated for the positions that are not reachable.

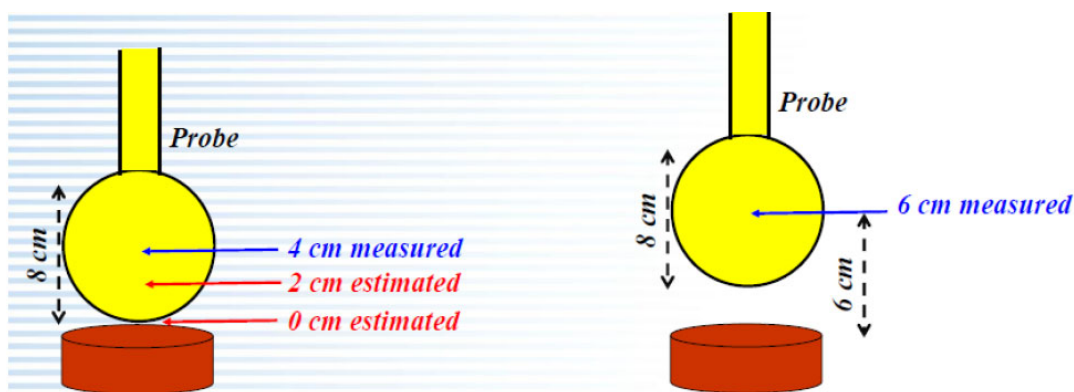


Example of probe measurements in points close to the device surface: estimates compared with measurements at 4 and 6 cm provide validation

According to Calibration information and specification about EHP-200A, The Probe EHP-200A's sensitive elements center are 8mm below the external surface, and the dimensions is 92x92x109mm, so the actual field strengths need to be estimated for the positions that are not reachable. The Extrapolated Value Calculation Method please below). And the result of test distance 2cm-20cm was measured value.



Probe	Length	Width	Height
	109mm	92mm	92mm


Note: EUT is a loop/coil emitting structure, so E-field not required. Just recorded the H-field value

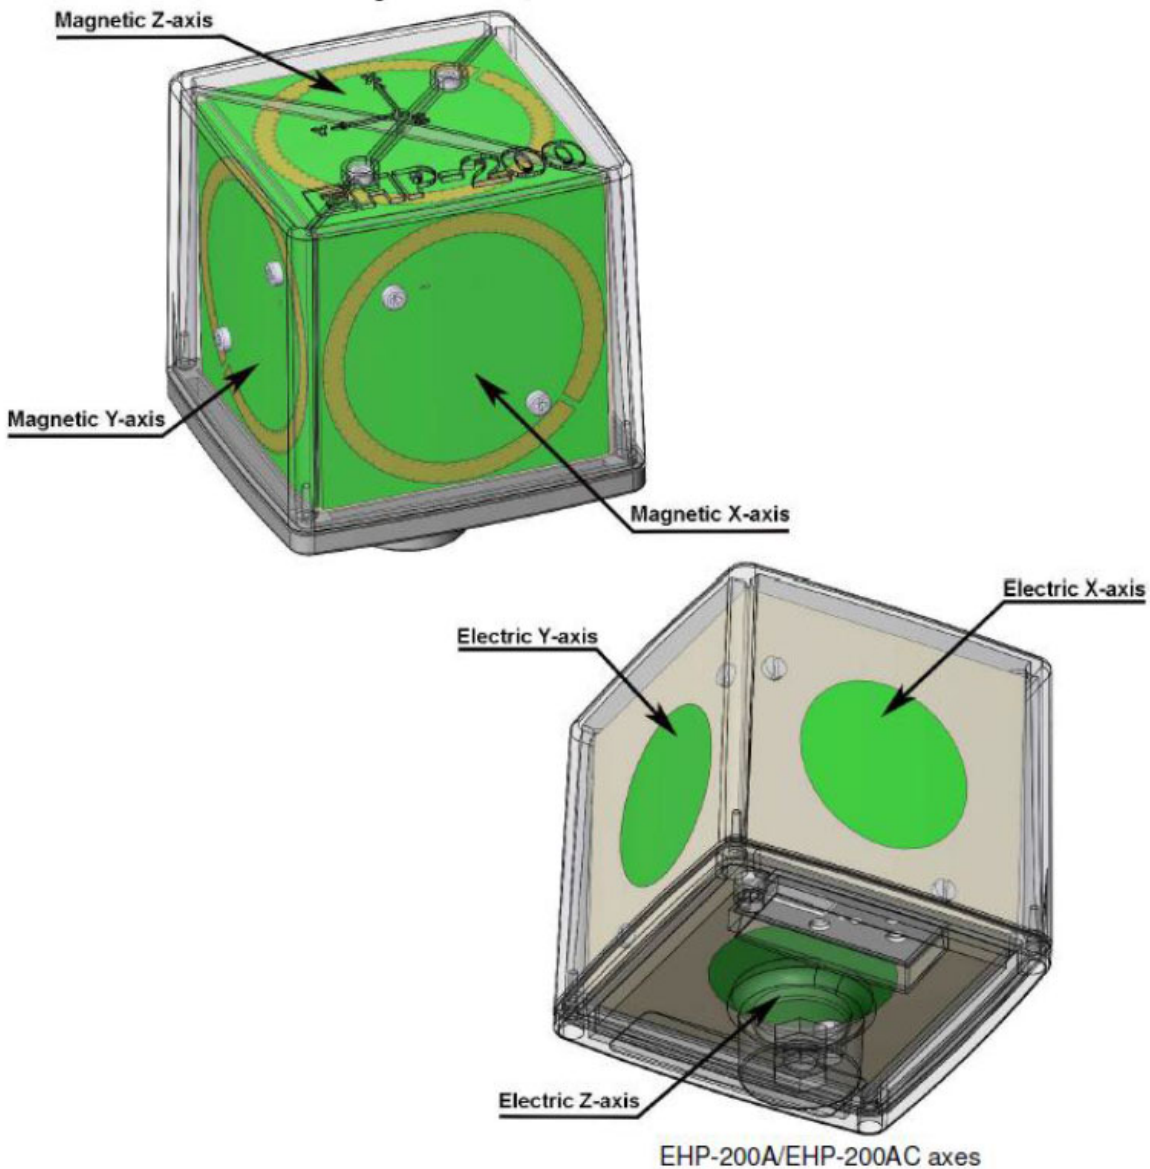

The sensitive elements are located approximately 8 mm below the external surface


Estimated method for portable RF Exposure condition:

We use Biot-Savart formula theory to estimate the strength of the magnetic field that the measuring instrument cannot measure. According to Biot-Savart formula:

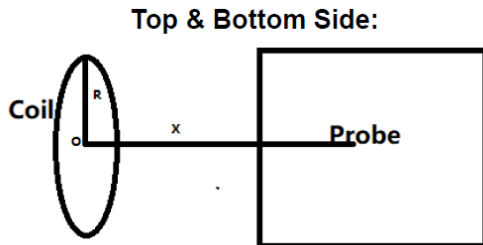

$$B = \frac{\mu_0 * I * N * R^2}{2 * (R^2 + x^2)^{3/2}}$$

Front, left, right & rear Side:

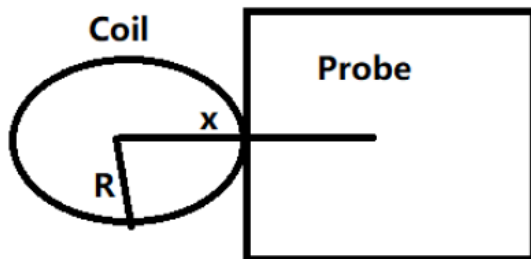

$$B = \frac{\mu_0 * I * N}{2 * x}$$

B: means H-field value.

U₀ is space permeability; u₀=4T*10⁻⁷:

I: A current element passing through a coil:

R: means the Radius of coil(According to provided Antenna specification: We can get the minimum R=42/2=21mm=0.21m);

Test Distance: The distance from the sensing element of the probe to the edge of the devicesurface

x: means the center of the coil to the sensing elements of the probe. (For top & bottom side: x=test distance. For other side: x=test distance+R)

N: Number of turns, according to providing “Antenna specification” files: N=11

6) For validation purposes: If the value to show a 30% agreement between the mode and the (E- and/or H-field) probe measurements for the two closest points to the device surface, and with 2cm increments. Then this extrapolation method is reasonable.

Note:

The percent ratio of agreement is the difference between the estimated and measured values divided by the average of the estimated and measured values.

Validation:

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement-2cm	27.65	21.09	25.20	26.17	-7.67	27.43	Compliance (Within 30%)
2cm(estimated)	0.1939	0.1153	0.1251	0.10539	0.07641	0.1845	
2cm(measured)	0.1468	0.0933	0.0971	0.081	0.0825	0.14	

Magnetic Field Emissions							
Test Distance(cm)	Top	Left	Right	Rear	Front	Bottom	Conclusion
	Unit: Agreement (%); H-field (A/m)						
Agreement-2cm	23.36	19.63	22.96	23.78	-9.06	25.23	Compliance (Within 30%)
4cm(estimated)	0.1686	0.1006	0.1123	0.1003	0.0639	0.1536	
4cm(measured)	0.1356	0.0826	0.0863	0.0789	0.0763	0.1369	

For portable exposure conditions

Mode	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
Mode 1	0	1.0126	1.0569	0.9876	0.9129	0.9366	0.8678	0.815	1.63
Mode 2	0	1.0163	1.0439	0.9635	0.9036	0.9233	0.8501	0.815	1.63
Mode 3	0	1.0236	1.0478	0.9712	0.9069	0.9305	0.8396	0.815	1.63
Mode 1	2	0.1468	0.0933	0.0971	0.0810	0.0825	0.1400	0.815	1.63
Mode 2	2	0.1356	0.0901	0.0925	0.0826	0.0816	0.1366	0.815	1.63
Mode 3	2	0.1382	0.0856	0.8783	0.0809	0.0808	0.1329	0.815	1.63
Mode 1	4	0.1356	0.0826	0.0863	0.0789	0.0763	0.1369	0.815	1.63
Mode 2	4	0.1236	0.0806	0.0823	0.0669	0.0696	0.1335	0.815	1.63
Mode 3	4	0.1198	0.7883	0.0777	0.0658	0.0687	0.1299	0.815	1.63
Mode 1	6	0.0559	0.0638	0.0645	0.0475	0.0481	0.0474	0.815	1.63
Mode 2	6	0.0516	0.0568	0.0598	0.0581	0.0510	0.0574	0.815	1.63
Mode 3	6	0.0603	0.0485	0.0633	0.0450	0.0457	0.0607	0.815	1.63
Mode 1	8	0.0427	0.0425	0.0436	0.0370	0.0361	0.0352	0.815	1.63
Mode 2	8	0.0374	0.0354	0.0441	0.0390	0.0402	0.0374	0.815	1.63
Mode 3	8	0.0357	0.0410	0.0357	0.0406	0.0392	0.0402	0.815	1.63

Mode	measuring distance (cm)	Measured H-Field Strength Values (A/m)						FCC E-Field Strength 50% Limits (A/m)	FCC E-Field Strength Limits (A/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
Mode 1	10	0.0446	0.0425	0.0443	0.0373	0.0416	0.0373	0.815	1.63
Mode 2	10	0.0399	0.0377	0.0394	0.0410	0.0426	0.0377	0.815	1.63
Mode 3	10	0.0350	0.0445	0.0351	0.0360	0.0376	0.0405	0.815	1.63
Mode 1	12	0.0427	0.0408	0.0421	0.0388	0.0359	0.0357	0.815	1.63
Mode 2	12	0.0440	0.0437	0.0398	0.0395	0.0360	0.0374	0.815	1.63
Mode 3	12	0.0365	0.0350	0.0364	0.0445	0.0356	0.0351	0.815	1.63
Mode 1	14	0.0348	0.0257	0.0338	0.0337	0.0348	0.0316	0.815	1.63
Mode 2	14	0.0293	0.0285	0.0301	0.0290	0.0275	0.0343	0.815	1.63
Mode 3	14	0.0331	0.0315	0.0293	0.0268	0.0285	0.0262	0.815	1.63
Mode 1	16	0.0294	0.0262	0.0287	0.0299	0.0250	0.0299	0.815	1.63
Mode 2	16	0.0285	0.0333	0.0292	0.0301	0.0320	0.0268	0.815	1.63
Mode 3	16	0.0329	0.0312	0.0343	0.0260	0.0290	0.0348	0.815	1.63
Mode 1	18	0.0191	0.0212	0.0241	0.0187	0.0170	0.0157	0.815	1.63
Mode 2	18	0.0161	0.0150	0.0175	0.0216	0.0170	0.0166	0.815	1.63
Mode 3	18	0.0217	0.0154	0.0194	0.0224	0.0210	0.0227	0.815	1.63
Mode 1	20	0.0223	0.0214	0.0154	0.0176	0.0184	0.0166	0.815	1.63
Mode 2	20	0.0234	0.0232	0.0208	0.0176	0.0169	0.0221	0.815	1.63
Mode 3	20	0.0183	0.0188	0.0213	0.0184	0.0214	0.0174	0.815	1.63

Mode	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
Mode 1	0	0.2475	0.2275	0.2200	0.2438	0.2363	0.2475	307	614
Mode 2	0	0.2313	0.2400	0.2238	0.2313	0.2388	0.2275	307	614
Mode 3	0	0.2413	0.2363	0.2175	0.2313	0.2200	0.2213	307	614
Mode 1	2	0.2138	0.2488	0.2363	0.2388	0.2375	0.2425	307	614
Mode 2	2	0.2163	0.2213	0.2263	0.2350	0.2463	0.2238	307	614
Mode 3	2	0.2163	0.2450	0.2425	0.2163	0.2425	0.2200	307	614
Mode 1	4	0.2125	0.2225	0.2488	0.2150	0.2250	0.2213	307	614
Mode 2	4	0.2450	0.2138	0.2400	0.2213	0.2225	0.2200	307	614
Mode 3	4	0.2450	0.2150	0.2125	0.2275	0.2438	0.2288	307	614
Mode 1	6	0.2138	0.2263	0.2263	0.2238	0.2463	0.2463	307	614
Mode 2	6	0.2388	0.2163	0.2400	0.2213	0.2338	0.2175	307	614
Mode 3	6	0.2125	0.2450	0.2163	0.2200	0.2463	0.2175	307	614
Mode 1	8	0.2063	0.2063	0.2013	0.1900	0.1913	0.2100	307	614
Mode 2	8	0.2125	0.2088	0.1875	0.1925	0.1900	0.2038	307	614
Mode 3	8	0.1888	0.1950	0.2100	0.1963	0.1925	0.2000	307	614


Mode	measuring distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength 50% Limits (V/m)	FCC E-Field Strength Limits (V/m)
		Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F		
Mode 1	10	0.2025	0.1950	0.2050	0.2100	0.1900	0.2050	307	614
Mode 2	10	0.2075	0.2075	0.1975	0.1875	0.2025	0.2038	307	614
Mode 3	10	0.2025	0.1900	0.1938	0.2025	0.1913	0.1938	307	614
Mode 1	12	0.1938	0.1938	0.2088	0.2125	0.1913	0.2038	307	614
Mode 2	12	0.2063	0.2075	0.2038	0.1963	0.2025	0.2125	307	614
Mode 3	12	0.1888	0.2113	0.1925	0.2038	0.1925	0.1875	307	614
Mode 1	14	0.1875	0.1688	0.1863	0.1663	0.1863	0.1788	307	614
Mode 2	14	0.1775	0.1775	0.1825	0.1638	0.1813	0.1700	307	614
Mode 3	14	0.1825	0.1838	0.1700	0.1813	0.1863	0.1813	307	614
Mode 1	16	0.1850	0.1675	0.1700	0.1825	0.1763	0.1663	307	614
Mode 2	16	0.1813	0.1875	0.1875	0.1625	0.1688	0.1625	307	614
Mode 3	16	0.1675	0.1700	0.1838	0.1725	0.1775	0.1875	307	614
Mode 1	18	0.1263	0.1413	0.1350	0.1588	0.1250	0.1538	307	614
Mode 2	18	0.1625	0.1425	0.1250	0.1275	0.1363	0.1350	307	614
Mode 3	18	0.1575	0.1300	0.1325	0.1375	0.1275	0.1600	307	614
Mode 1	20	0.1525	0.1388	0.1450	0.1250	0.1488	0.1513	307	614
Mode 2	20	0.1613	0.1388	0.1425	0.1563	0.1600	0.1600	307	614
Mode 3	20	0.1400	0.1488	0.1513	0.1575	0.1288	0.1625	307	614

5. PHOTOGRAPHS OF TEST SETUP

Portable exposure conditions
Test Position A (0cm)




Test Position A (10cm)

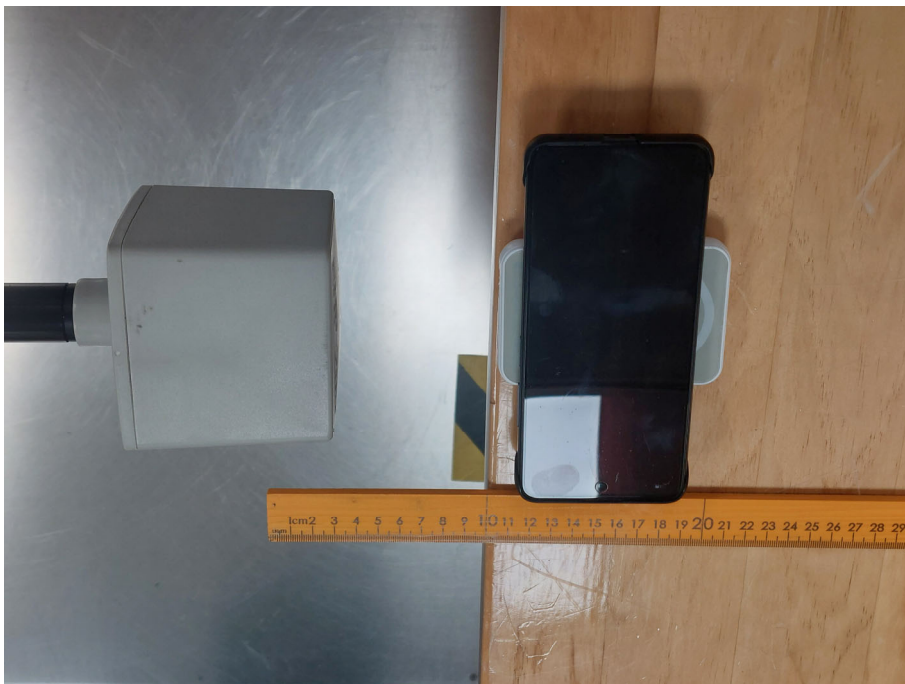

Test Position A (20cm)



Test Position B (0cm)

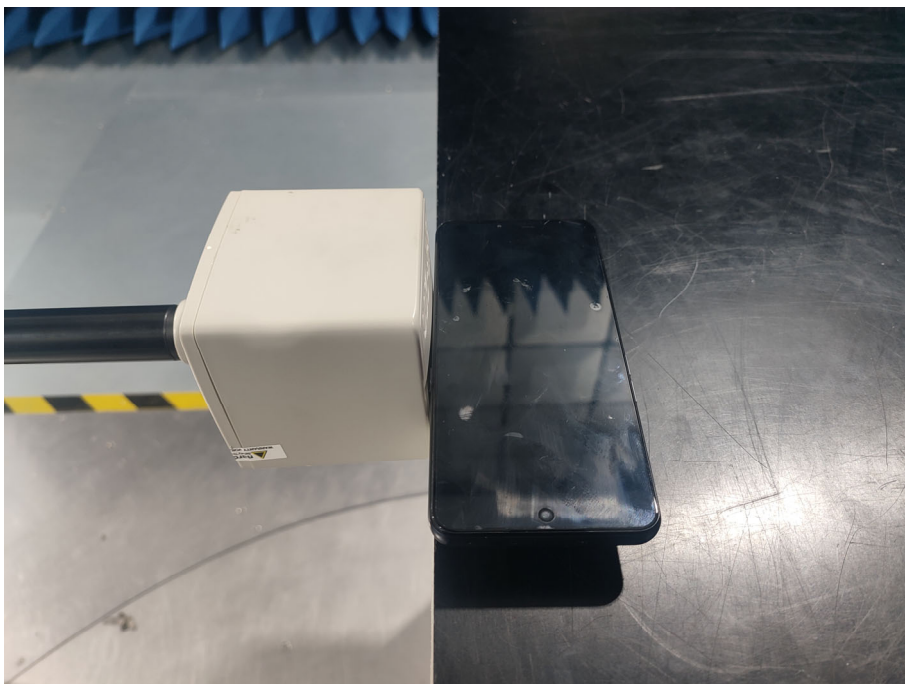


Test Position B (10cm)



Test Position B (20cm)



Test Position C (0cm)

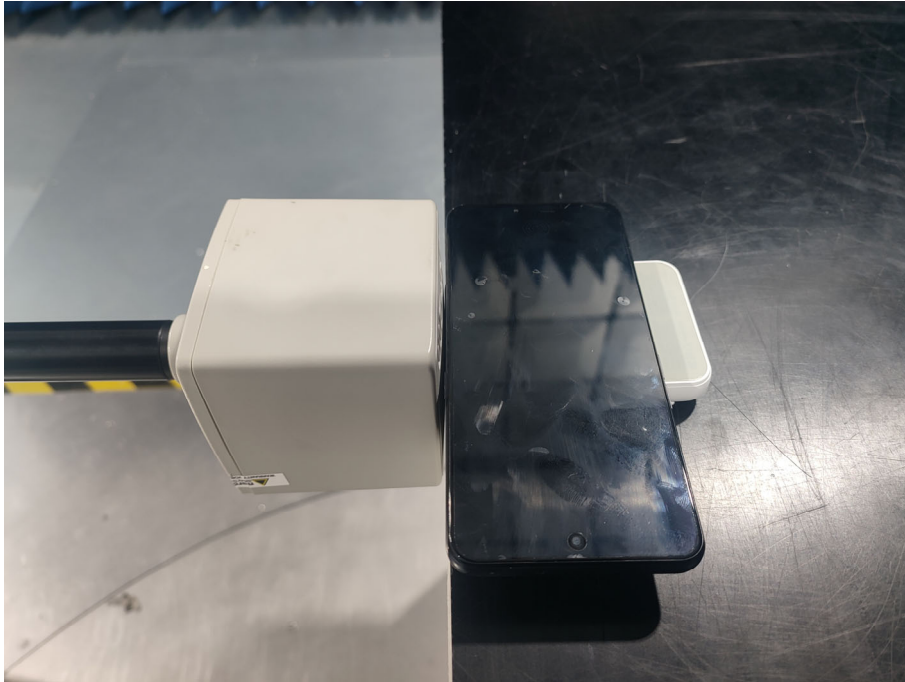


Test Position C (10cm)



Test Position C (20cm)



Test Position D (0cm)

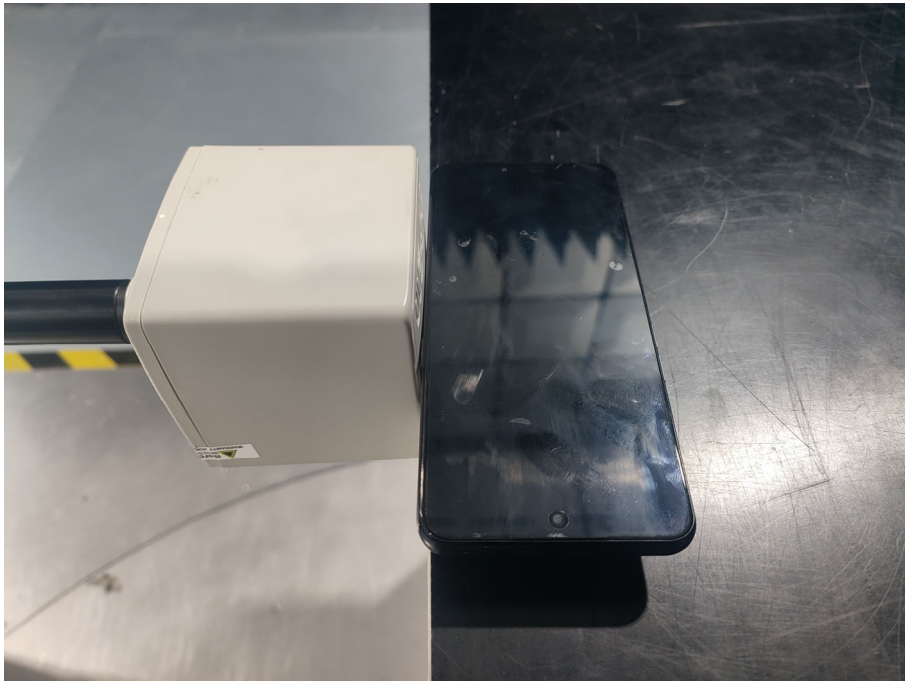


Test Position D (10cm)



Test Position D (20cm)



Test Position E (0cm)

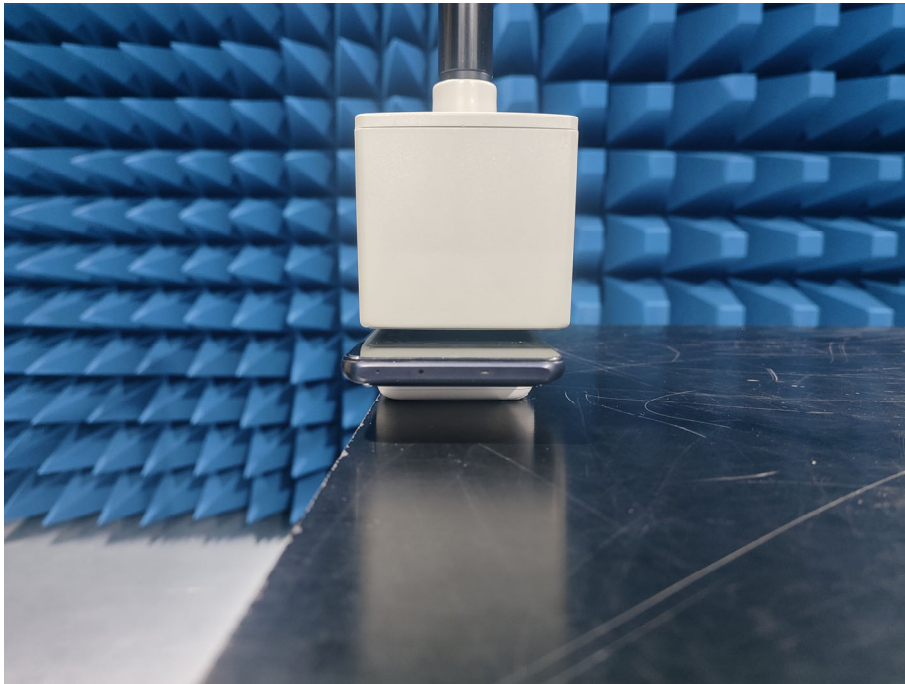


Test Position E (10cm)



Test Position E (20cm)



Test Position F (0cm)

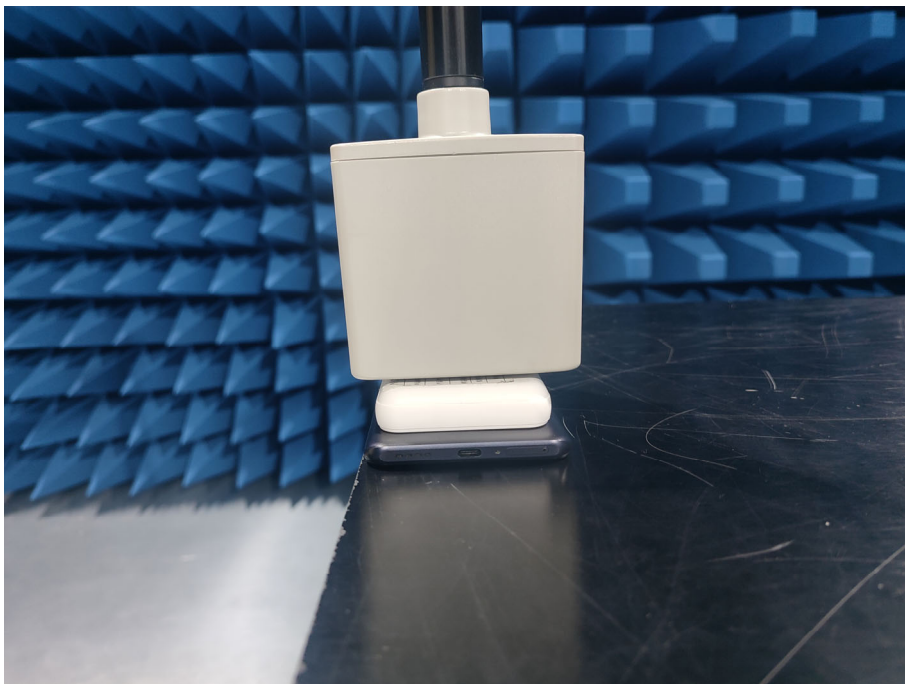



Test Position F (10cm)

Test Position F (20cm)



Mobile exposure conditions

