



FCC ID: WWMRN501XV3

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Proware Technologies Co., Ltd.

300Mbps Wireless N Router

Model No.: PW-RN501D

FCC ID: WWMRN501XV3

Prepared for : Proware Technologies Co., Ltd.  
2nd F1 East Wing, South Section, Factory Building 24,  
Science & Technology Park, Shennan Rd, Nanshan  
District, Shenzhen

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block,  
Shenzhen Science & Industrial Park,  
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F11097  
Date of Test : May.14~22, 2011  
Date of Report : May.24, 2011

**TABLE OF CONTENTS**

<u>Description</u>	<u>Page</u>
<b>1. SUMMARY OF STANDARDS AND RESULTS.....</b>	<b>1-1</b>
1.1. Description of Standards and Results .....	1-1
<b>2. GENERAL INFORMATION .....</b>	<b>2-1</b>
2.1. Description of Device (EUT) .....	2-1
2.2. Test Information.....	2-2
2.3. Tested Supporting System Details .....	2-3
2.4. Block diagram of connection between the EUT and simulators .....	2-3
2.5. Test Facility .....	2-4
2.6. Measurement Uncertainty (95% confidence levels, k=2) .....	2-5
<b>3. POWER LINE CONDUCTED EMISSION TEST .....</b>	<b>3-1</b>
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test .....	3-2
3.5. Operating Condition of EUT.....	3-2
3.6. Test Procedure.....	3-2
3.7. Power Line Conducted Emission Test Results .....	3-2
<b>4. RADIATED EMISSION TEST .....</b>	<b>4-5</b>
4.1. Test Equipment .....	4-5
4.2. Block Diagram of Test Setup.....	4-5
4.3. Radiated Emission Limit.....	4-6
4.4. EUT Configuration on Test.....	4-7
4.5. Operating Condition of EUT.....	4-7
4.6. Test Procedure.....	4-7
4.7. Radiated Emission Test Results .....	4-8
<b>5. CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>5-83</b>
5.1. Test Equipment .....	5-83
5.2. Limit.....	5-83
5.3. Test Procedure.....	5-83
5.4. Test result.....	5-83
<b>6. BAND EDGE COMPLIANCE TEST .....</b>	<b>6-128</b>
6.1. Test Equipment .....	6-128
6.2. Limit.....	6-128
6.3. Test Produce .....	6-128
6.4. Test Results .....	6-128
<b>7. 6dB Bandwidth Test.....</b>	<b>7-161</b>
7.1. Test Equipment .....	7-161
7.2. Limit.....	7-161
7.3. Test Procedure.....	7-161
7.4. Test Results .....	7-161
<b>8. OUTPUT POWER TEST.....</b>	<b>8-174</b>
8.1. Test Equipment .....	8-174
8.2. Limit (FCC Part 15C 15.247 b(3)).....	8-174
8.3. Test Procedure.....	8-174
8.4. Test Results .....	8-175
<b>9. POWER SPECTRAL DENSITY TEST .....</b>	<b>9-179</b>
9.1. Test Equipment .....	9-179

9.2.	Limit.....	9-179
9.3.	Test Procedure.....	9-179
9.4.	Test Results .....	9-180
<b>10.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>10-193</b>
10.1.	STANDARD APPLICABLE.....	10-193
10.2.	ANTENNA CONNECTED CONSTRUCTION .....	10-193
<b>11.</b>	<b>MPE ESTIMATION.....</b>	<b>11-194</b>
11.1.	Limit for General Population/ Uncontrolled Exposures .....	11-194
11.2.	2, Estimation Result .....	11-194
<b>12.</b>	<b>DEVIATION TO TEST SPECIFICATIONS.....</b>	<b>12-1</b>
<b>13.</b>	<b>PHOTOGRAPH OF TEST .....</b>	<b>13-1</b>
13.1.	Photos of Power Line Conducted Emission Test .....	13-1
13.2.	Photos of Radiated Emission Test.....	13-2
<b>14.</b>	<b>PHOTOS OF THE EUT.....</b>	<b>14-1</b>

FCC ID: WWMRN501XV3

### TEST REPORT CERTIFICATION

Applicant : Proware Technologies Co., Ltd.  
Manufacturer : Proware Technologies Co., Ltd.  
EUT Description : 300Mbps Wireless N Router  
FCC ID : WWMRN501XV3  
(A) MODEL NO. : PW-RN501D  
(B) SERIAL NO. : N/A  
(C) POWER SUPPLY : DC 9V  
(D) TEST VOLTAGE : DC 9V From Adapter Input, AC 120V/60Hz

Tested for comply with:  
FCC Rules and Regulations Part 15 Subpart C: 2008

Test procedure used:  
ANSI C63.10:2009

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : May.14~ 22, 2011 Report of date: May.24, 2011

Prepared by : Blove Ye Reviewer by : Sunny Lu  
Blove Ye / Assistant Sunny Lu / Senior Assistant

信華科技(深圳)有限公司  
Audix Technology (Shenzhen) Co., Ltd.  
EMC 部門報告專用章  
Stamp only for EMC Dept. Report  
Signature: Ken Lu

Approved & Authorized Signer : Ken Lu / Manager



## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10: 2009	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10: 2009	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10: 2009	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name	:	300Mbps Wireless N Router
Model Number	:	PW-RN501D
FCC ID	:	WWMRN501XV3
Operation Frequency	:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11n HT20: 2412MHz—2462MHz IEEE802.11n HT40: 2422MHz—2452MHz
Channel Number	:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7Channels
Modulation Technology	:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna Assembly Gain	:	Dipole Antenna, MIMO 2x2, 5dBi Peak gain
Applicant	:	Proware Technologies Co., Ltd. 2nd F1 East Wing, South Section, Factory Building 24, Science & Technology Park, Shennan Rd, Nanshan District, Shenzhen
Manufacturer	:	Proware Technologies Co., Ltd. 2nd F1 East Wing, South Section, Factory Building 24, Science & Technology Park, Shennan Rd, Nanshan District, Shenzhen
Power Adapter	:	Manufacturer: VASATA, M/N: P090060-2B1 DC Cable: Unshielded, Detachable, 1.5m
Date of Test	:	Mar.14~22, 2011
Date of Receipt	:	Mar.13, 2011
Sample Type	:	Prototype production

## 2.2. Test Information

A special test software was used to control EUT work in Continuous TX mode(100% duty cycle), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	11	Low :CH1	2412
	11	Middle: CH6	2437
	11	High: CH11	2462
IEEE 802.11g	54	Low :CH1	2412
	54	Middle: CH6	2437
	54	High: CH11	2462
IEEE 802.11n HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11n HT40	13.5	Low :CH1	2422
	13.5	Middle: CH4	2437
	13.5	High: CH7	2452


Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

Note2: This device use MIMO 2X2 antennas ,all the radiated spurious emissions and band edge test were performed with two antennas transmit synchronous.

### 2.3. Tested Supporting System Details

	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1	Personal Computer	Test PC M	DELL	Studio 540	224XK2X	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID:R33002
		Power Cord: Unshielded, Detachable, 1.8m Display Card: HD3450 (DVI+VGA+HDMI)				

### 2.4. Block diagram of connection between the EUT and simulators

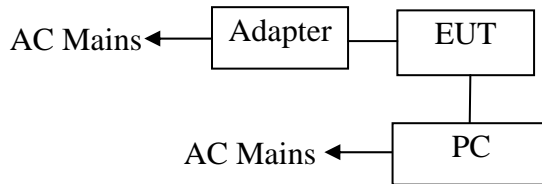

PC run test software to control EUT work in Continuous TX mode

**(EUT: 300Mbps Wireless N Router)**



## 2.5. Test Facility

### Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Ke Feng Rd., 52 Block, Shenzhen  
Science & Industrial Park, Nantou,  
Shenzhen, Guangdong, China

3m Anechoic Chamber : Mar.31, 2009 File on Federal  
Communication Commission  
Registration Number: 90454

3m & 10m Anechoic Chamber : Dec. 30, 2009 File on Federal  
Communication Commission  
Registration Number: 794232

EMC Lab. : Certificated by Industry Canada  
Registration Number: IC 5183A-1  
Jul. 03, 2009

: Accredited by DATech, German  
Registration Number: DAT-P-091/99-01  
Feb. 02, 2009

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Mar.31, 2012

2.6.Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.64 dB (9kHz to 150kHz)
	3.22 dB(150kHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	4.20 dB (Polarize: V)
	4.66 dB (Polarize: H)
Uncertainty for Radiated Spurious Emission test in RF chamber	2.70 dB(Bilog antenna 30M~1000MHz)
	2.27 dB(Horn antenna 1000M~12750MHz)
Uncertainty for Conduction Spurious emission test	2.12 dB
Uncertainty for Output power test	0.97 dB
Uncertainty for Power density test	2.21 dB
Uncertainty for Frequency range test	$1 \times 10^{-9}$
Uncertainty for Bandwidth test	$1 \times 10^{-9}$
Uncertainty for DC power test	0.038 %
Uncertainty for test site temperature and humidity	0.3°C
	2%

### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Nov.05, 10	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Nov.05, 10	1 Year
3.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 11	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 11	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 11	1 Year
6.	RF Cable	Fujikura	3D-2W	LISN Cable 1#	May.08, 11	1Year
7.	Coaxial Switch	Anritsu	MP59B	M55367	May.08, 11	1 Year
8.	Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May.08, 11	1 Year
9.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 11	1 Year

#### 3.2. Block Diagram of Test Setup

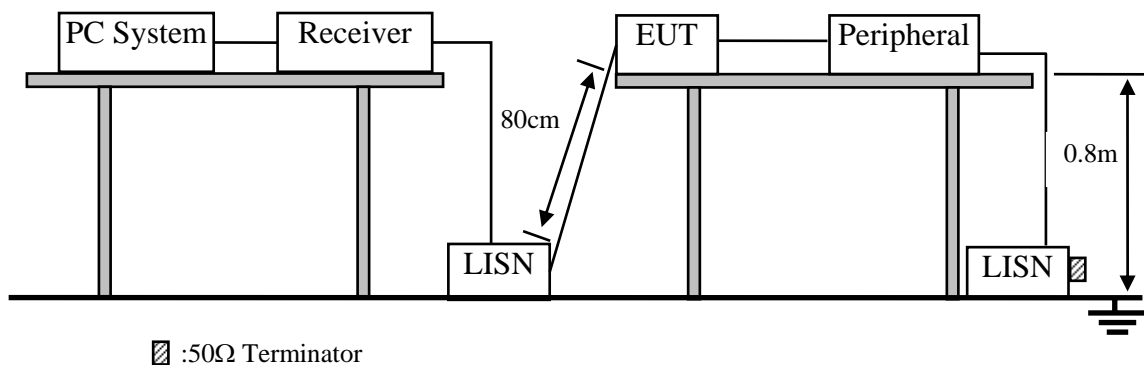

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. \* Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 3.4.1. 300Mbps Wireless N Router (EUT)

Model Number : PW-RN501D  
Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.3.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 2.4.

3.5.2. Turned on the power of all equipment.

3.5.3. Notebook run test software to control EUT work in Tx mode.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#3). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2009 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS10) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

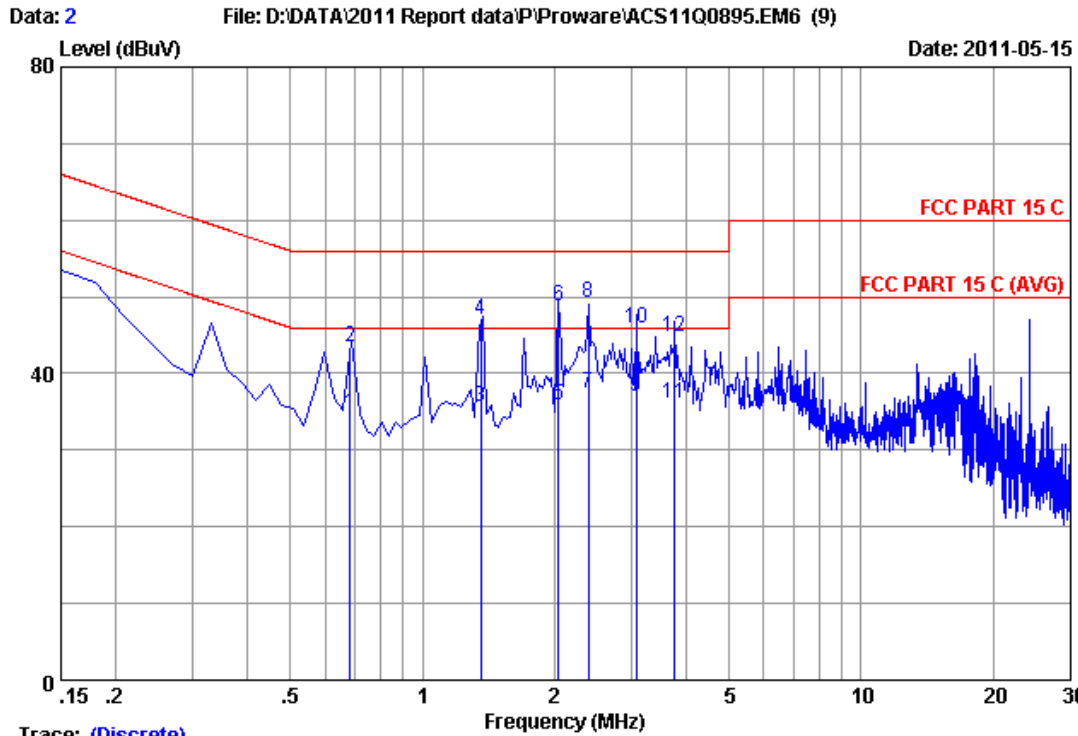


Trace: (Discrete)

Site no :1#conduction Data No :2  
 Dis./Ant. :\*\* 2010 ESH2-25 LINE  
 Limit :FCC PART 15 C  
 Env./Ins. :29.5°C/55% Engineer :Leo-Li  
 EUT :300Mbps Wireless N Router  
 Power Rating :DC 9V From Adapter Input AC 120V/60Hz  
 Test Mode :Tx Mode  
 M/N:PW-RN501D

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.68500	0.25	9.89	24.59	34.73	46.00	11.27	Average
2	0.68500	0.25	9.89	33.25	43.39	56.00	12.61	QP
3	1.360	0.23	9.89	25.51	35.63	46.00	10.37	Average
4	1.360	0.23	9.89	36.91	47.03	56.00	8.97	QP
5	2.040	0.25	9.91	25.80	35.96	46.00	10.04	Average
6	2.040	0.25	9.91	38.60	48.76	56.00	7.24	QP
7	2.389	0.25	9.92	27.30	37.47	46.00	8.53	Average
8	2.389	0.25	9.92	39.02	49.19	56.00	6.81	QP
9	3.075	0.26	9.93	26.90	37.09	46.00	8.91	Average
10	3.075	0.26	9.93	35.70	45.89	56.00	10.11	QP
11	3.762	0.27	9.94	25.85	36.06	46.00	9.94	Average
12	3.762	0.27	9.94	34.58	44.79	56.00	11.21	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Data: 1 File: D:\DATA\2011 Report data\PI\Proware\ACS11Q0895.EM6 (9) Date: 2011-05-15

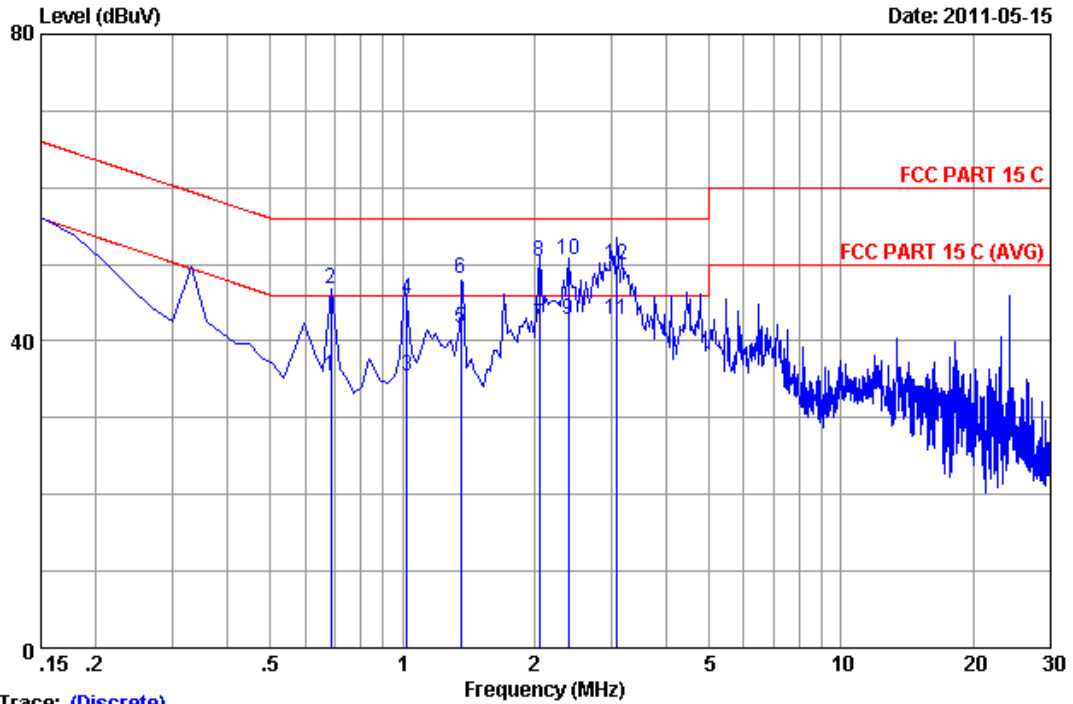

Trace: (Discrete)  
 Site no :1#conduction Data No :1  
 Dis./Ant. :\*\* 2010 ESH2-25 NEUTRAL  
 Limit :FCC PART 15 C  
 Env./Ins. :29.5\*C/55% Engineer :Leo-Li  
 EUT :300Mbps Wireless N Router  
 Power Rating :DC 9V From Adapter Input AC 120V/60Hz  
 Test Mode :Tx Mode  
 M/N:PW-RN501D

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.68730	0.24	9.89	25.24	35.37	46.00	10.63	Average
2	0.68730	0.24	9.89	36.58	46.71	56.00	9.29	QP
3	1.026	0.25	9.89	25.19	35.33	46.00	10.67	Average
4	1.026	0.25	9.89	35.42	45.56	56.00	10.44	QP
5	1.360	0.25	9.89	31.61	41.75	46.00	4.25	Average
6	1.360	0.25	9.89	38.01	48.15	56.00	7.85	QP
7	2.049	0.26	9.91	31.90	42.07	46.00	3.93	Average
8	2.049	0.26	9.91	40.10	50.27	56.00	5.73	QP
9	2.389	0.26	9.92	32.57	42.75	46.00	3.25	Average
10	2.389	0.26	9.92	40.50	50.68	56.00	5.32	QP
11	3.075	0.27	9.93	32.60	42.80	46.00	3.20	Average
12	3.075	0.27	9.93	39.70	49.90	56.00	6.10	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss(Include 10dB pulse limit)+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.



## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment

Frequency rang: 30~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	3#Chamber	AUDIX	N/A	N/A	Dec.06,10	1 Year
2	EMI Spectrum	Agilent	E4407B	MY41440292	May.08, 11	1 Year
3	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May.08, 11	1 Year
4	Amplifier	HP	8447D	2648A04738	May.08, 11	1 Year
5	Bilog Antenna	Schaffner	CBL6111C	2598	Oct. 26, 10	1 Year
6	RF Cable	MIYAZAKI	8D-FB	3# Chamber No.1	May.08, 11	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 11	1 Year

Frequency rang: above 1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4407B	MY41440292	May.08, 11	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	May.08, 11	1.5 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 11	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX102	28622/2	May.08, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	29091/2	May.08, 11	1 Year

### 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

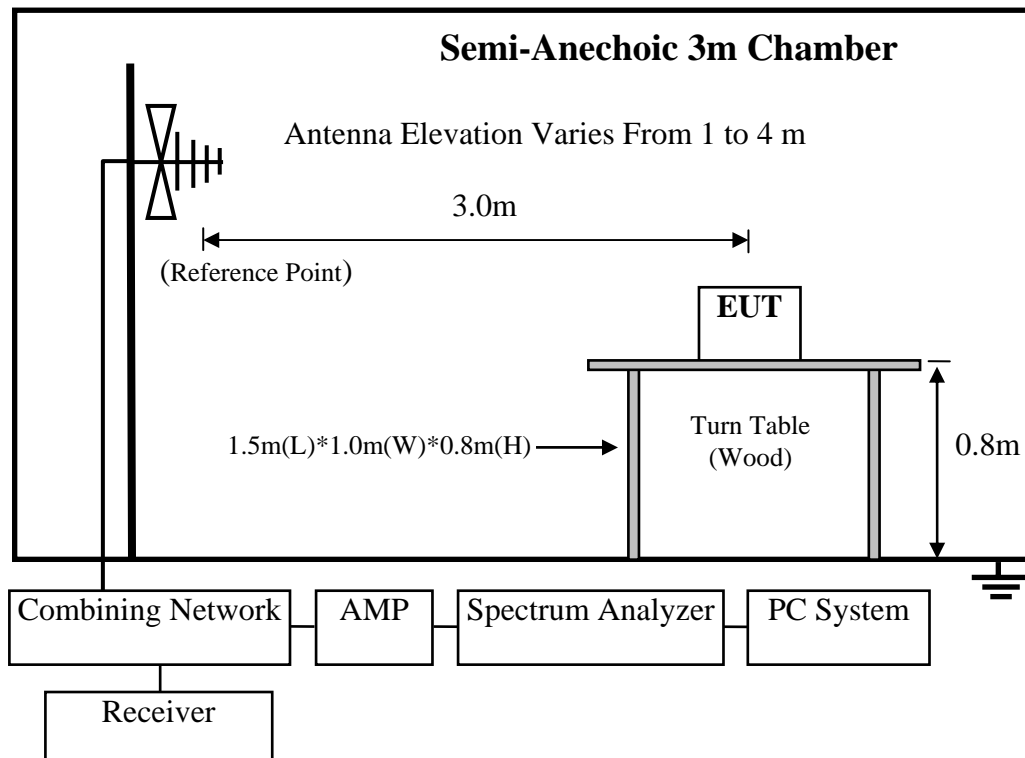

For frequency range 1GHz-25GHz

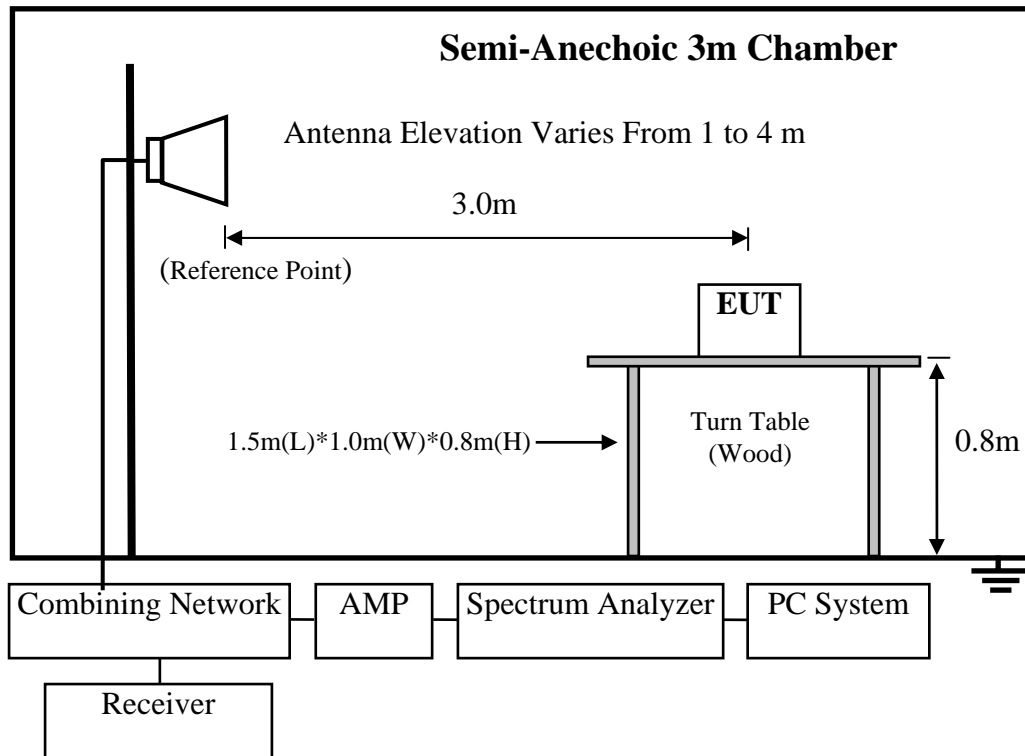

### 4.3. Radiated Emission Limit

#### 4.3.1.15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Remark : (1) Emission level dBμV = 20 log Emission level μV/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3.2.15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 4.2.

4.6.Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


#### 4.7.Radiated Emission Test Results

**PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


**Frequency: 30MHz~1GHz**

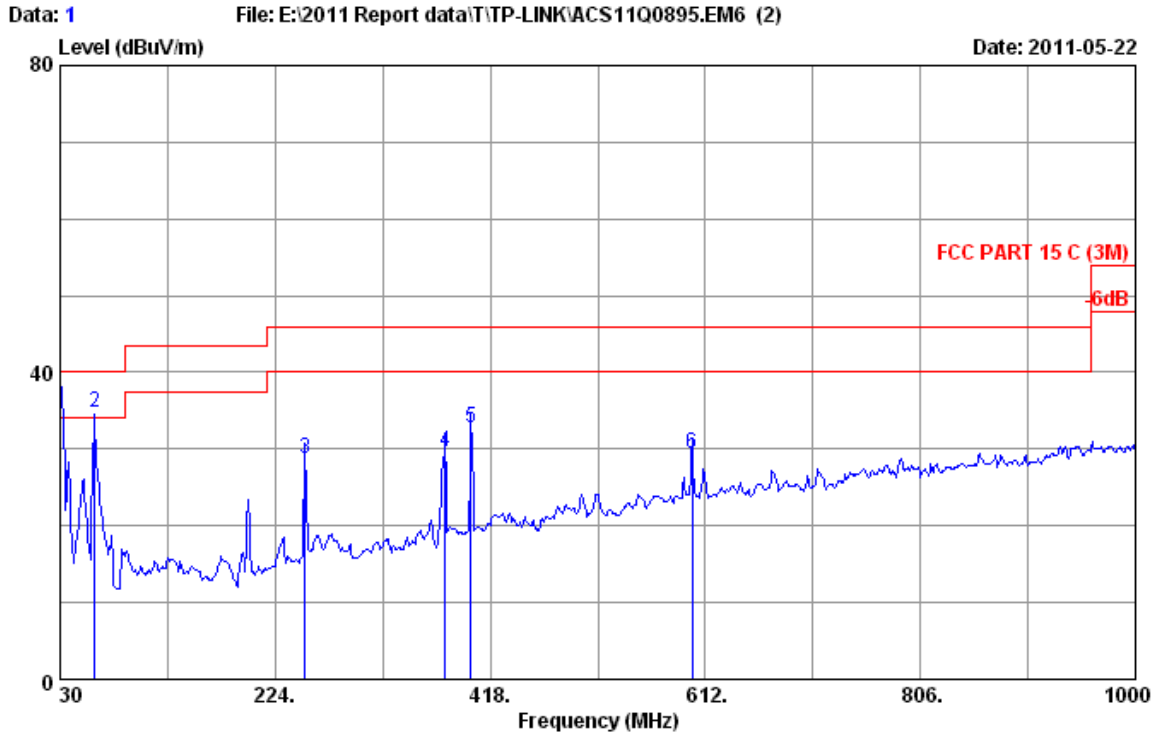

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/56% Engineer : Sunny-lu  
 EUT : 150Mbps Wireless N Router  
 Power rating : DC 9V From Adapter input AC 120V/60Hz  
 Test Mode : Tx Mode  
 TL-WR741ND

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.00	0.61	19.00	39.61	40.00	0.39	QP
2	61.040	6.00	0.86	28.00	34.86	40.00	5.14	QP
3	251.160	12.90	2.18	13.57	28.65	46.00	17.35	QP
4	377.260	15.64	2.81	11.14	29.59	46.00	16.41	QP
5	400.540	16.41	2.92	13.40	32.73	46.00	13.27	QP
6	600.360	19.90	4.12	5.30	29.32	46.00	16.68	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

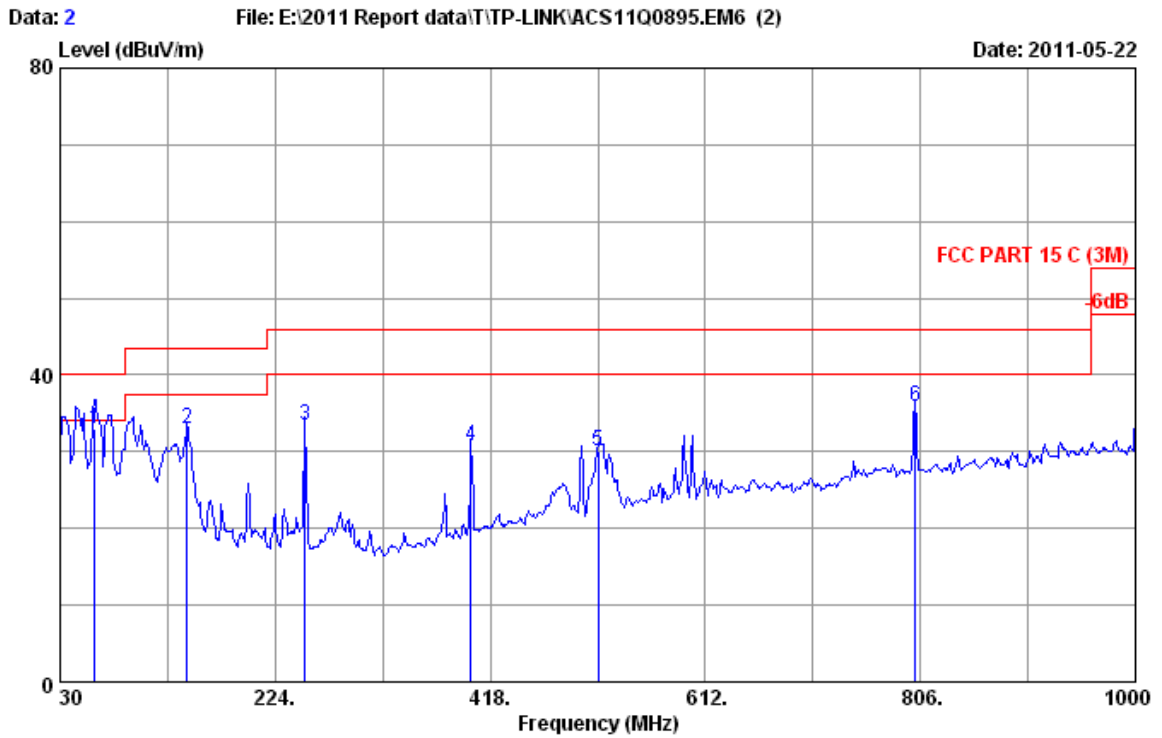


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2010 CBL6111C Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 24°C/56% Engineer : Sunny-lu  
 EUT : 150Mbps Wireless N Router  
 Power rating : DC 9V From Adapter input AC 120V/60Hz  
 Test Mode : Tx Mode  
 TL-WR741ND

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	61.040	6.00	0.86	26.10	32.96	40.00	7.04	QP
2	144.460	11.92	1.14	19.83	32.89	43.50	10.61	QP
3	251.160	12.90	2.18	18.38	33.46	46.00	12.54	QP
4	400.540	16.41	2.92	11.42	30.75	46.00	15.25	QP
5	515.000	18.35	3.63	8.13	30.11	46.00	15.89	QP
6	801.150	22.00	4.90	8.90	35.80	46.00	10.20	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




Frequency: 1GHz~18GHz

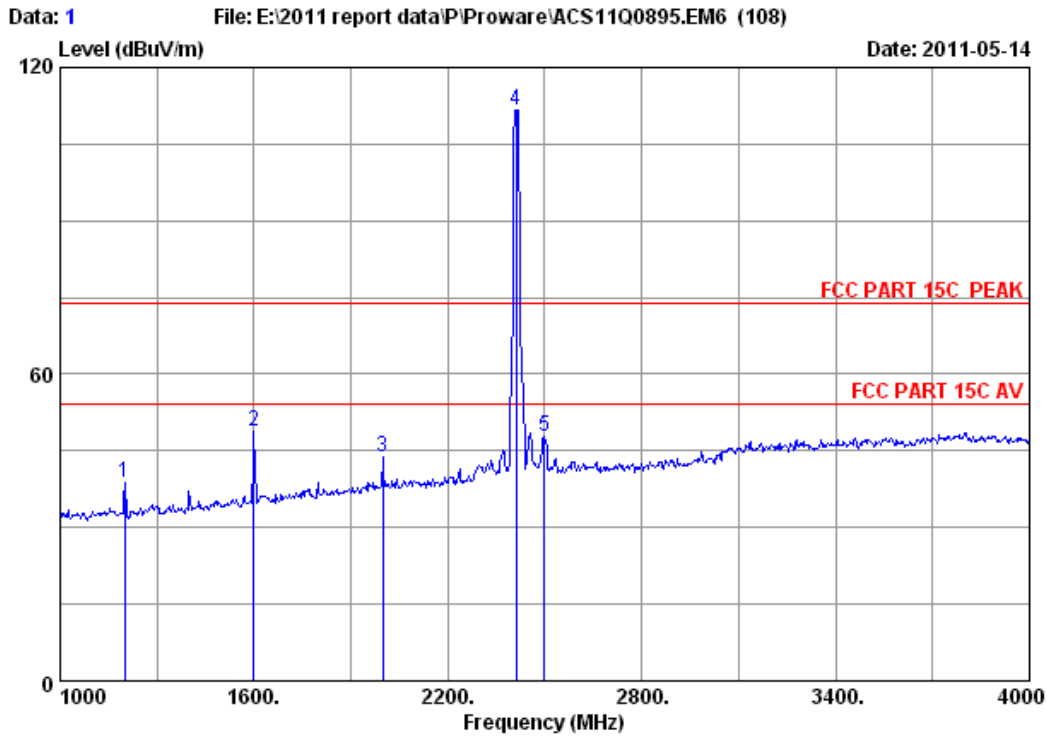

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.23	38.66	74.00	35.34	Peak
2	1600.000	26.96	5.91	36.94	53.00	48.93	74.00	25.07	Peak
3	1999.000	29.20	6.63	36.70	44.52	43.65	74.00	30.35	Peak
4	2412.000	29.45	7.43	36.62	111.54	111.80	74.00	-37.80	Peak
5	2500.000	29.50	7.62	36.60	47.32	47.84	74.00	26.16	Peak

Remarks:  
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

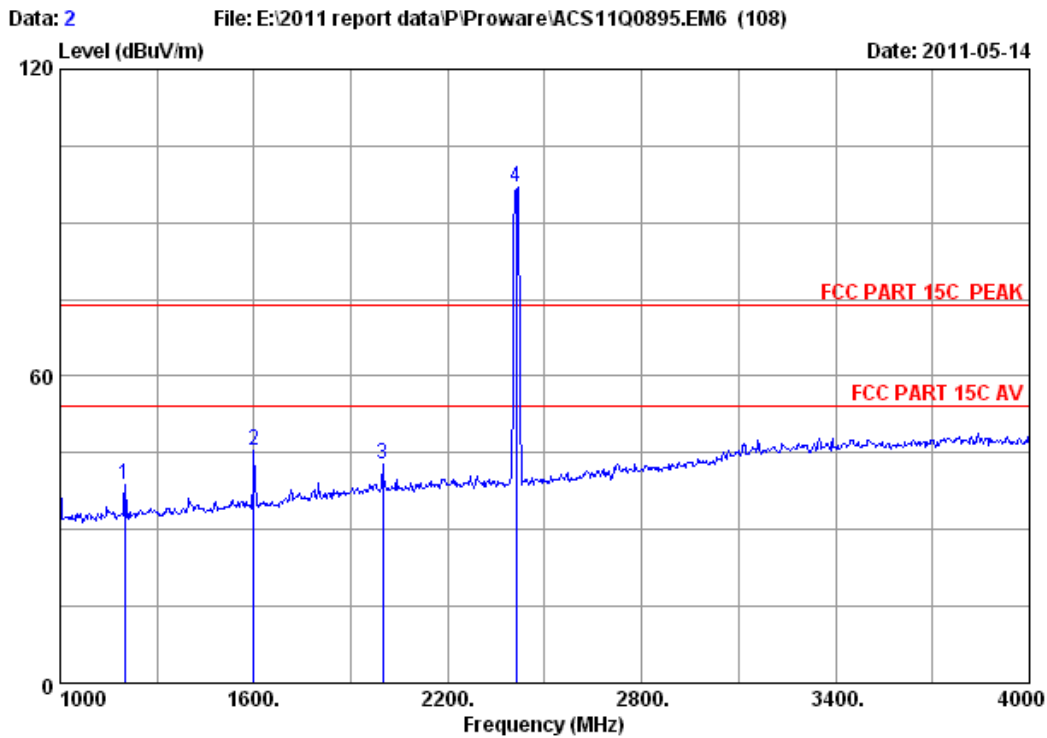


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.30	38.73	74.00	35.27	Peak
2	1600.000	26.96	5.91	36.94	49.51	45.44	74.00	28.56	Peak
3	1999.000	29.20	6.63	36.70	43.78	42.91	74.00	31.09	Peak
4	2412.000	29.45	7.43	36.62	96.62	96.88	74.00	-22.88	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

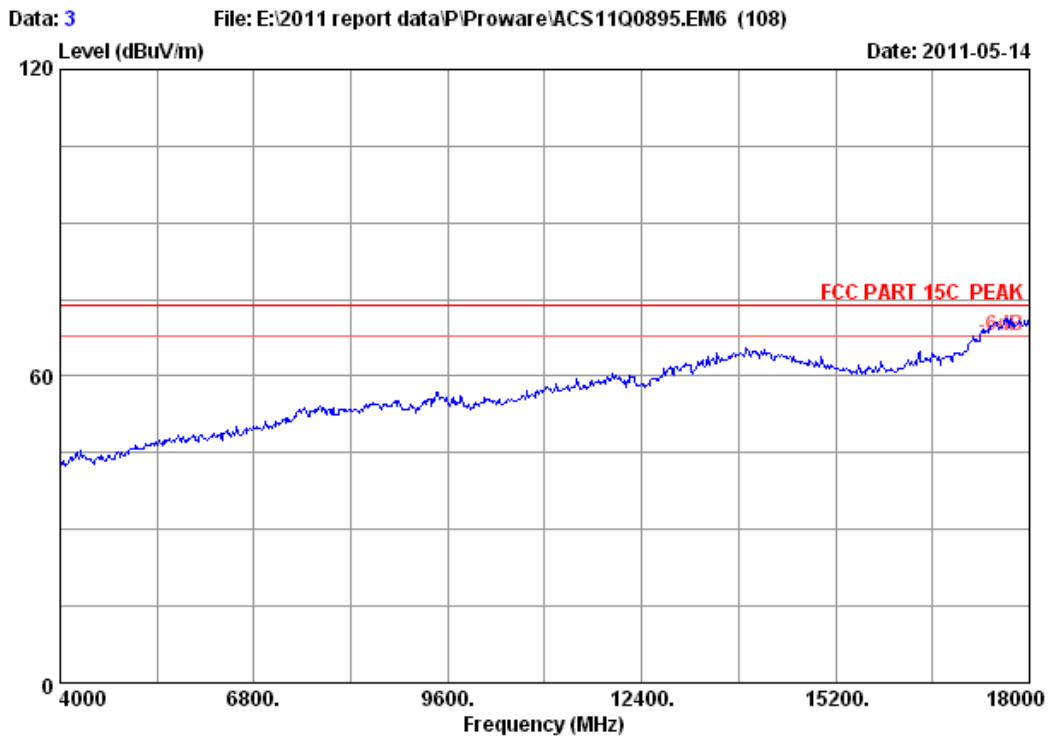

Site no. : 3m Chamber Data no. : 3  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz Tx  
M/N : PW-RN501D

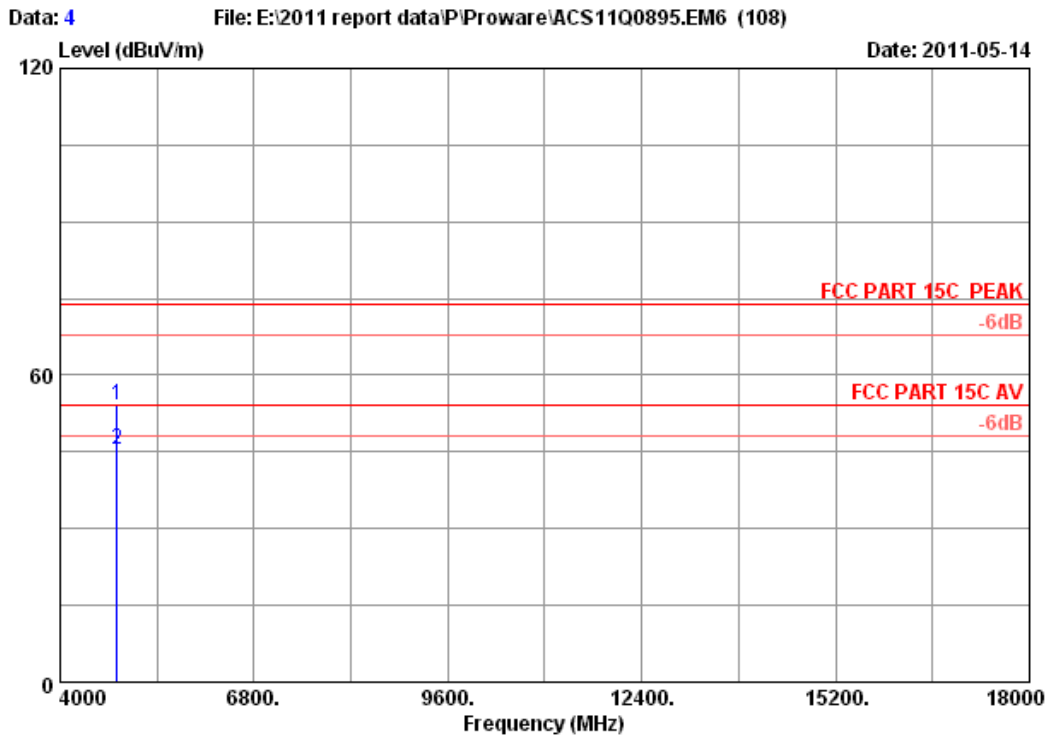


Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	44.21	54.09	74.00	19.91	Peak
2	4824.000	34.32	10.64	35.08	35.69	45.57	54.00	8.43	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

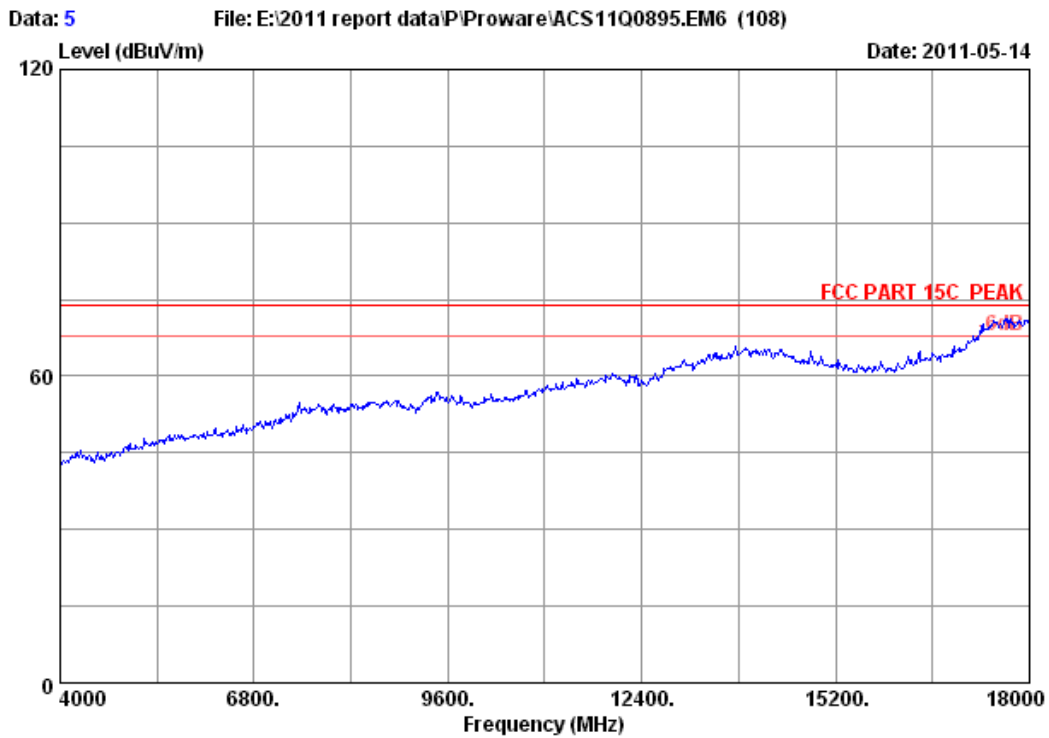

Site no. : 3m Chamber Data no. : 5  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11b CH1 2412MHz Tx  
M/N : PW-RN501D

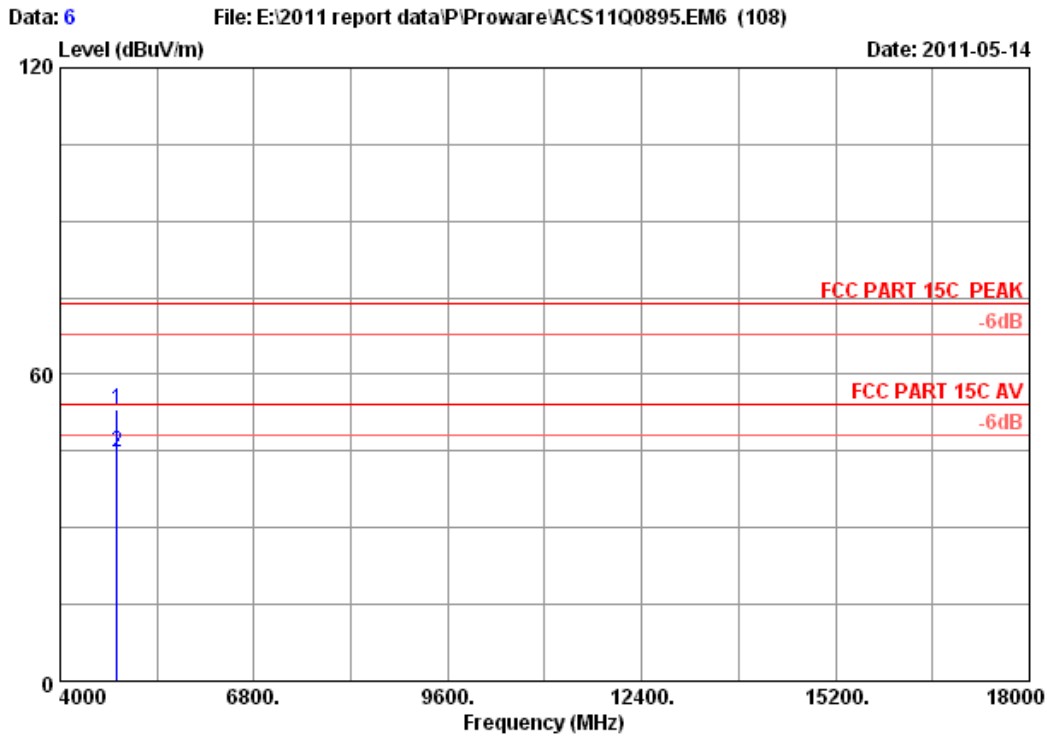


Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	43.20	53.08	74.00	20.92	Peak
2	4824.000	34.32	10.64	35.08	34.99	44.87	54.00	9.13	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



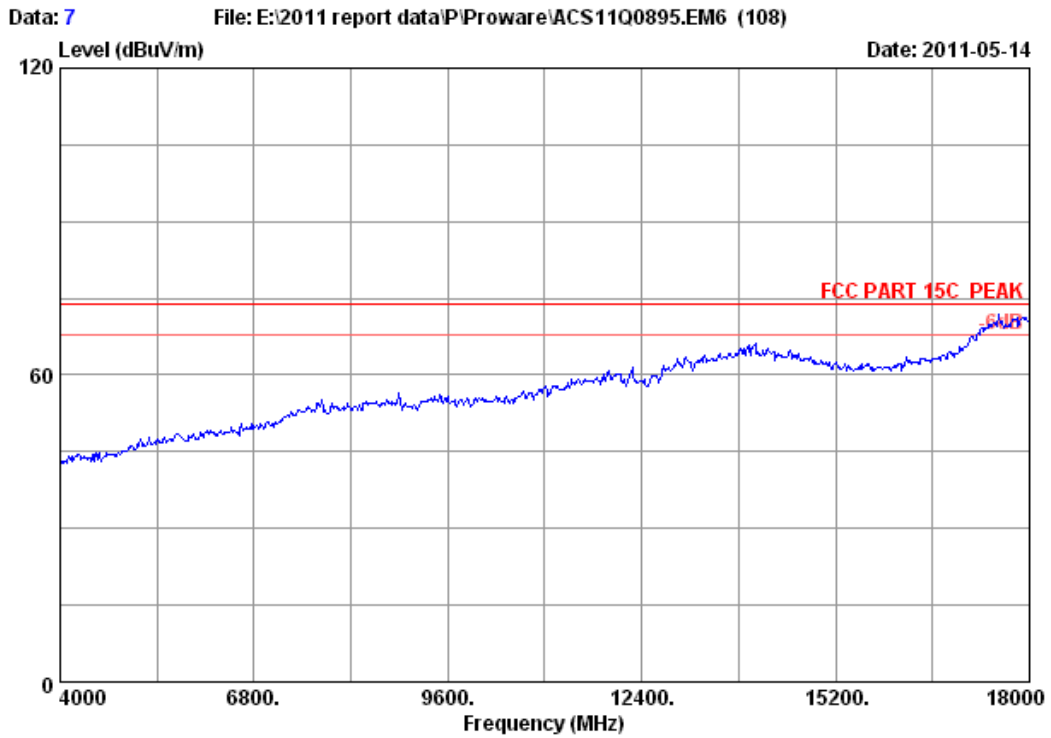

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz Tx  
M/N : PW-RN501D

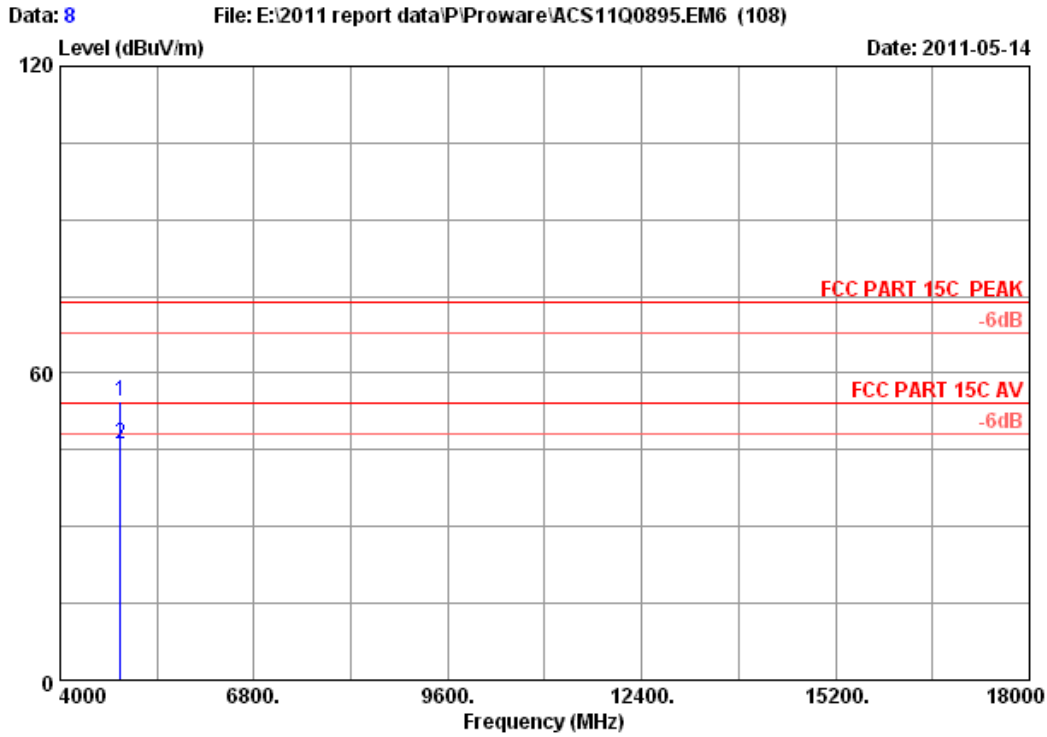


Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH6 2437MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	44.27	54.34	74.00	19.66	Peak
2	4874.000	34.41	10.69	35.03	36.10	46.17	54.00	7.83	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

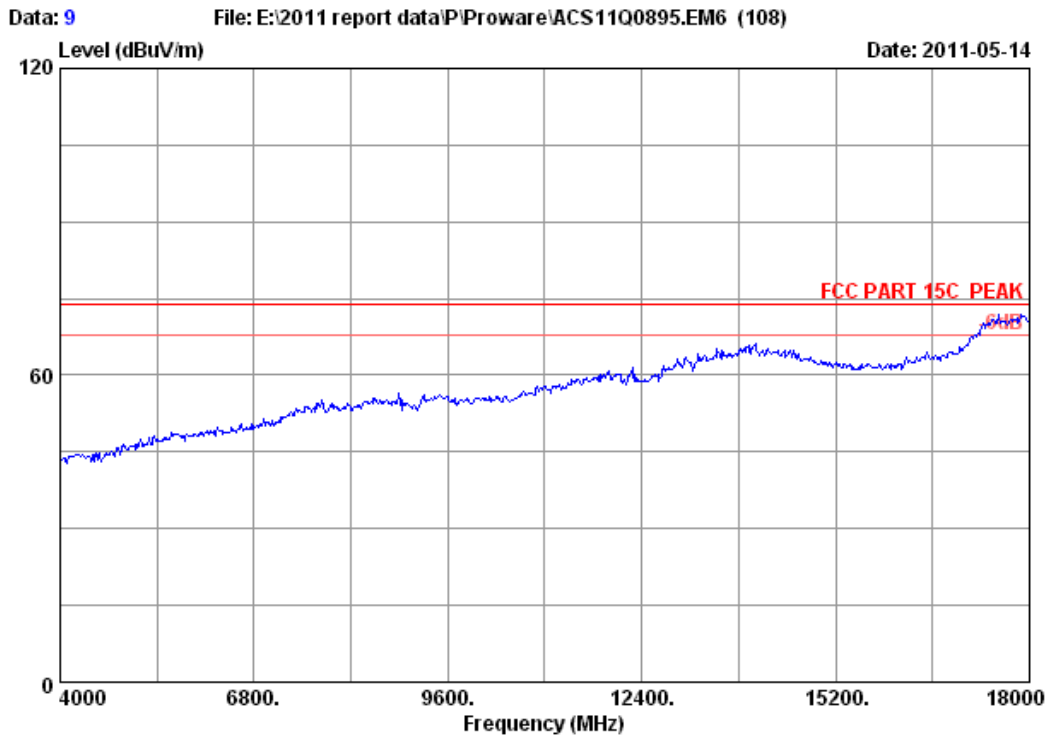

Site no. : 3m Chamber Data no. : 9  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11b CH6 2437MHz Tx  
M/N : PW-RN501D

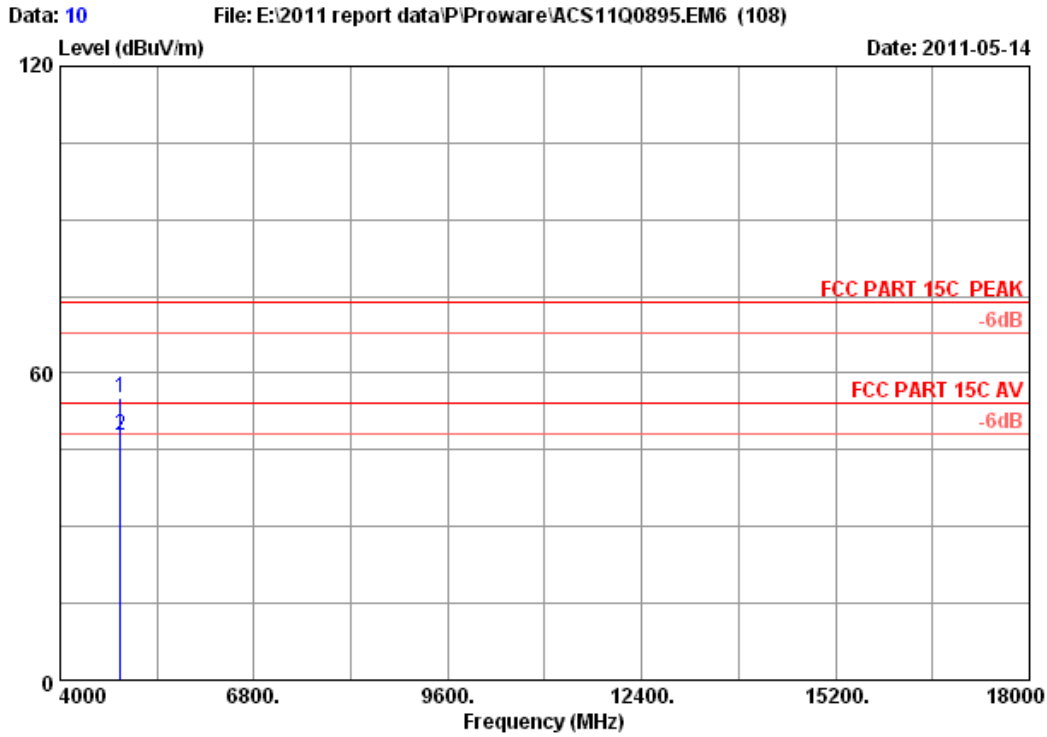


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH6 2437MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	45.21	55.28	74.00	18.72	Peak
2	4874.000	34.41	10.69	35.03	37.58	47.65	54.00	6.35	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

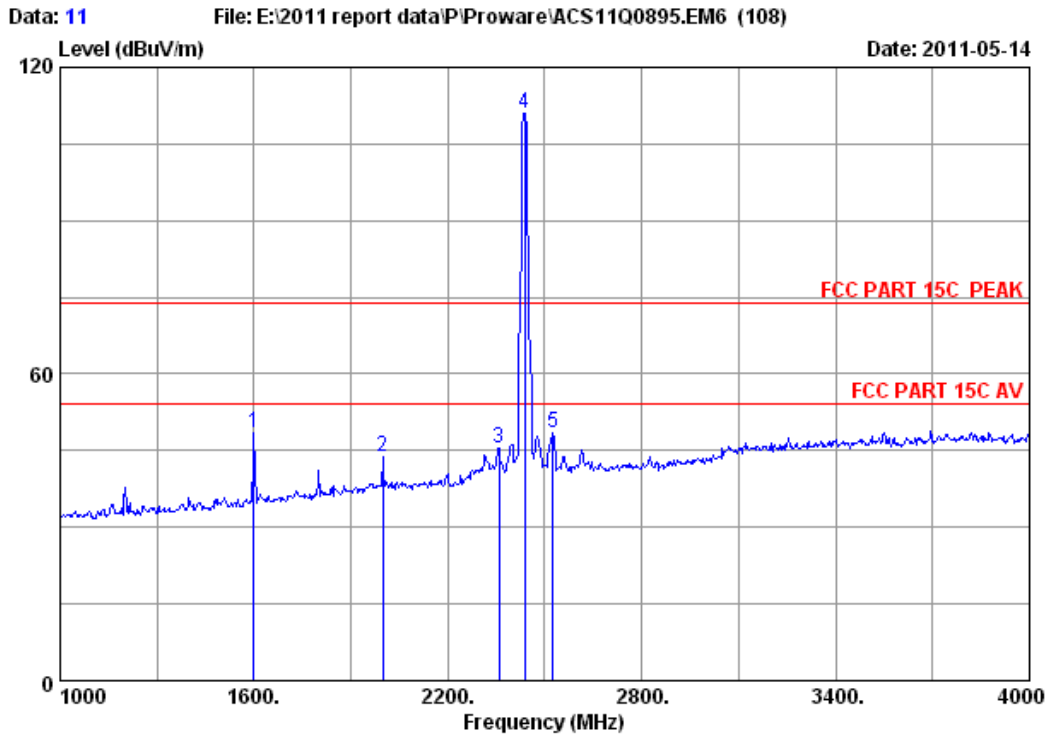


Site no. : 3m Chamber Data no. : 11  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1600.000	26.96	5.91	36.94	52.50	48.43	74.00	25.57	Peak
2	1999.000	29.20	6.63	36.70	44.62	43.75	74.00	30.25	Peak
3	2359.000	29.42	7.35	36.63	45.18	45.32	74.00	28.68	Peak
4	2437.000	29.47	7.46	36.61	110.78	111.10	74.00	-37.10	Peak
5	2524.000	29.67	7.65	36.59	47.67	48.40	74.00	25.60	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

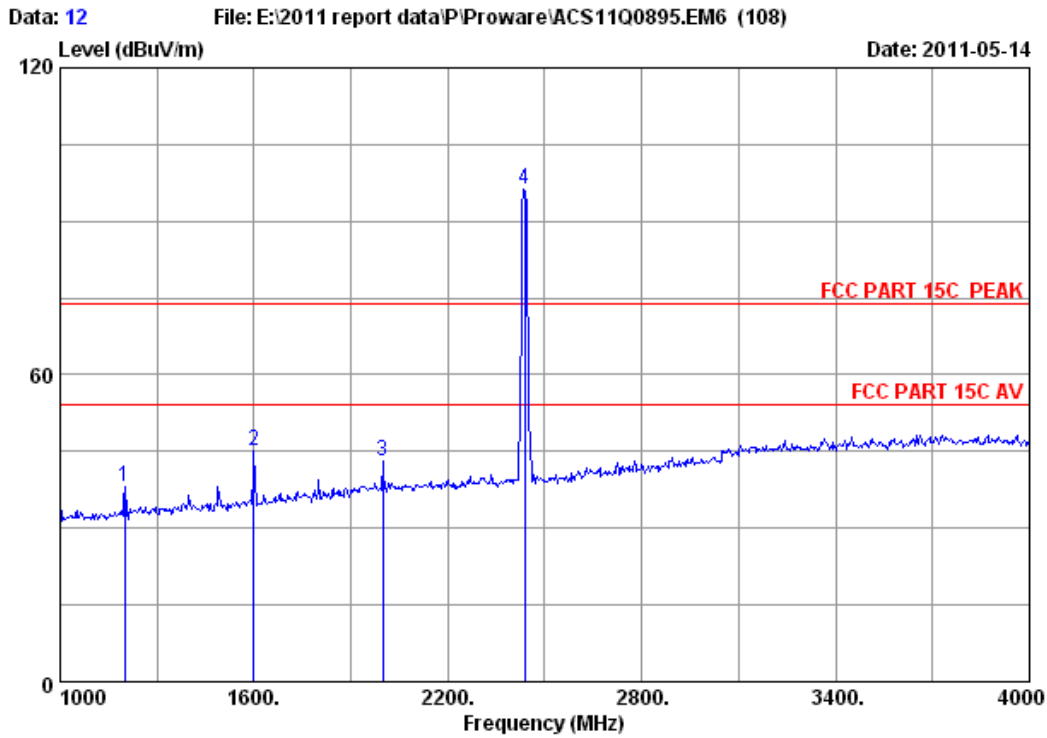


Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.70	38.13	74.00	35.87	Peak
2	1600.000	26.96	5.91	36.94	49.33	45.26	74.00	28.74	Peak
3	1999.000	29.20	6.63	36.70	43.84	42.97	74.00	31.03	Peak
4	2437.000	29.47	7.46	36.61	95.95	96.27	74.00	-22.27	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

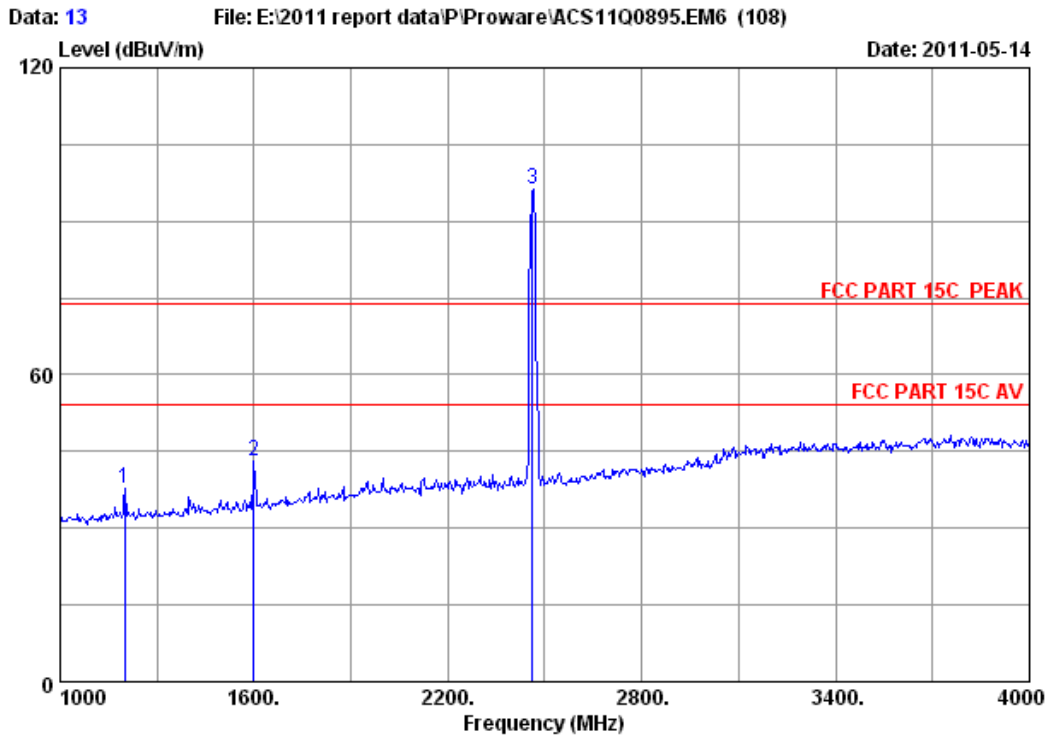


Site no. : 3m Chamber Data no. : 13  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.26	37.69	74.00	36.31	Peak
2	1600.000	26.96	5.91	36.94	47.24	43.17	74.00	30.83	Peak
3	2462.000	29.48	7.54	36.61	95.94	96.35	74.00	-22.35	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

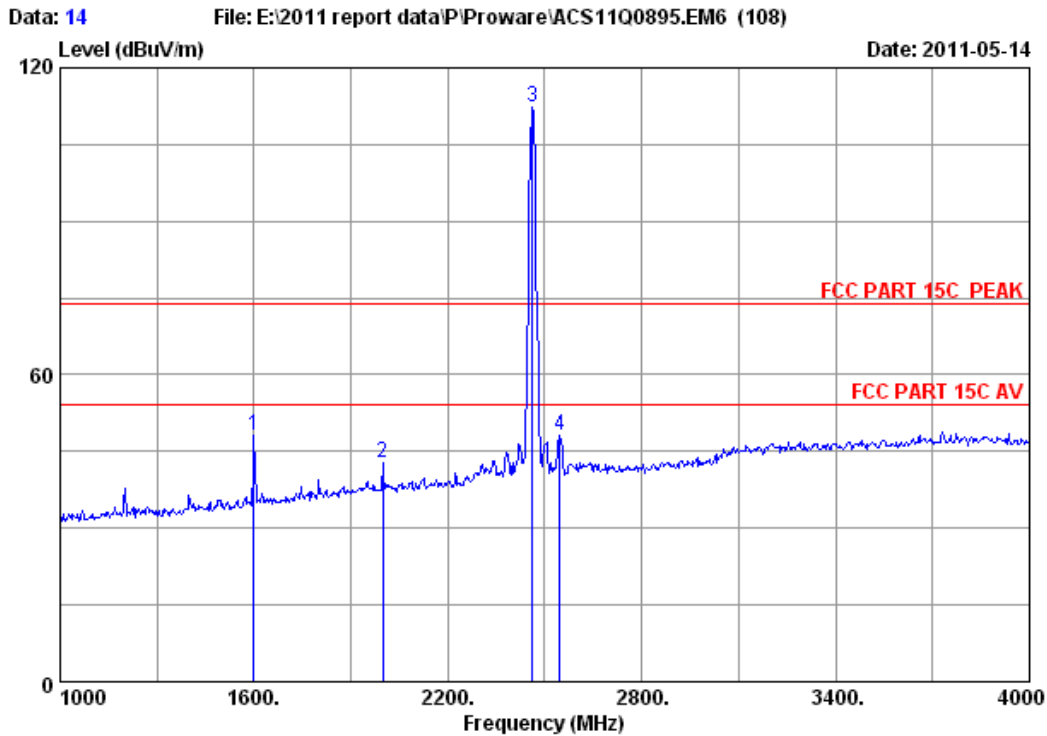


Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1600.000	26.96	5.91	36.94	52.09	48.02	74.00	25.98	Peak
2	1999.000	29.20	6.63	36.70	43.65	42.78	74.00	31.22	Peak
3	2462.000	29.48	7.54	36.61	111.75	112.16	74.00	-38.16	Peak
4	2545.000	29.75	7.69	36.59	47.19	48.04	74.00	25.96	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



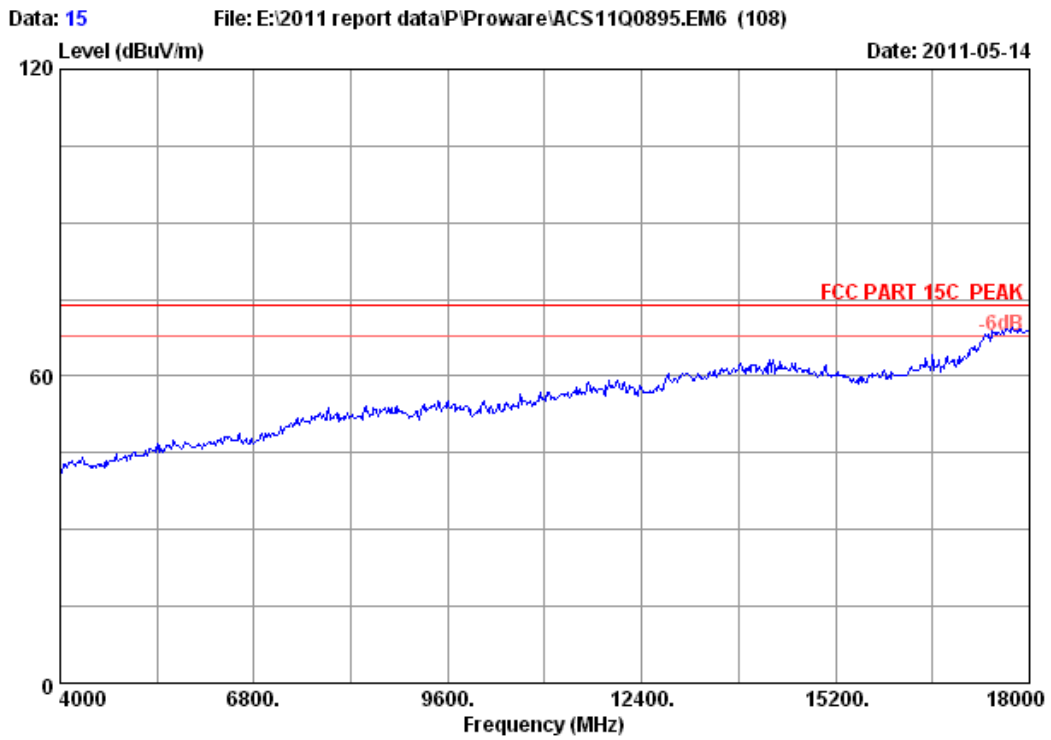

Site no. : 3m Chamber Data no. : 15  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11b CH11 2462MHz Tx  
M/N : PW-RN501D

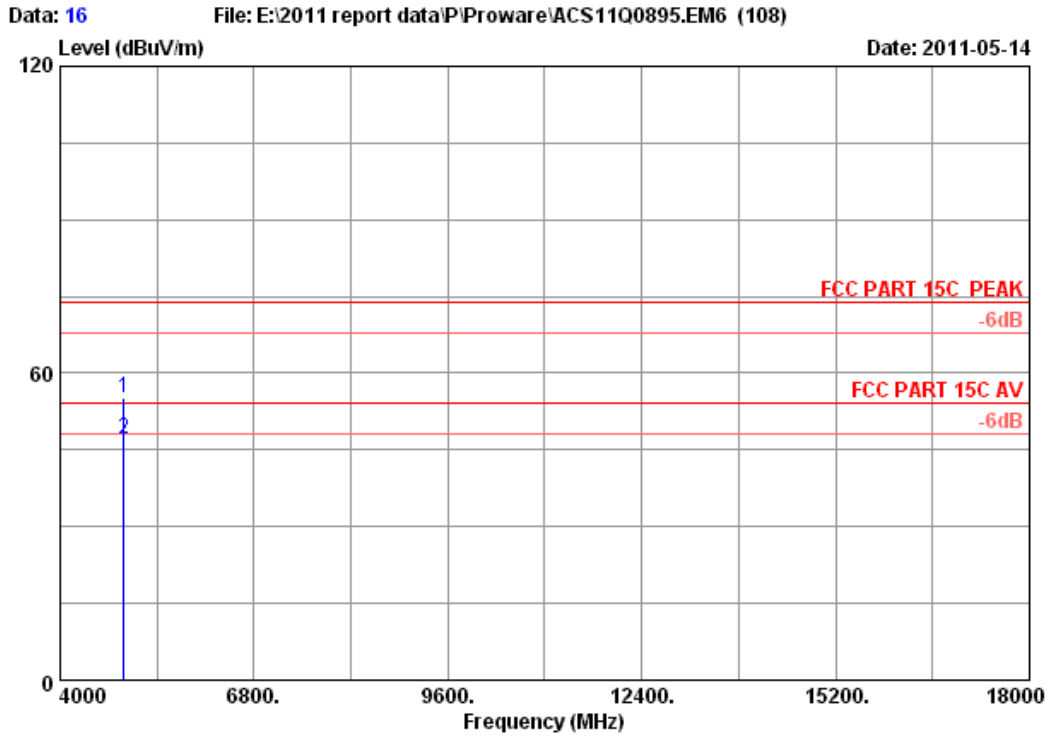


Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	10.76	34.98	44.97	55.24	74.00	18.76	Peak
2	4924.000	34.49	10.76	34.98	36.85	47.12	54.00	6.88	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

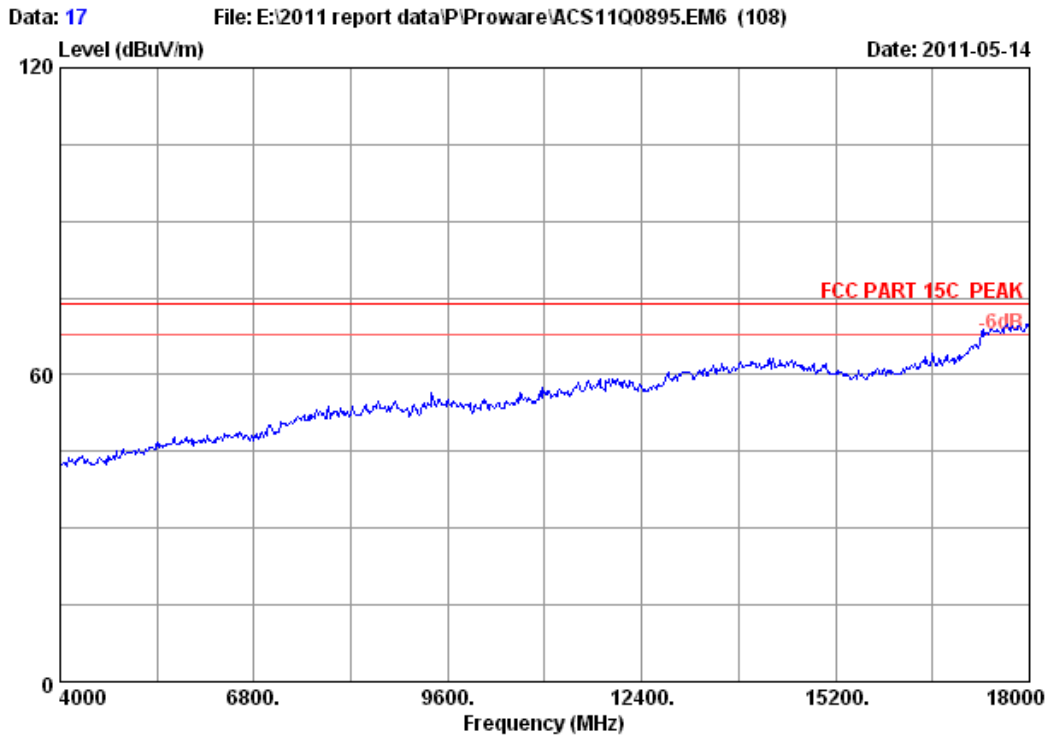

Site no.	: 3m Chamber	Data no. :	17
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23*C/54%	Engineer :	Sunny-lu
EUT	: 300Mbps Wireless N Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11b CH11 2462MHz Tx		
M/N	: PW-RN501D		

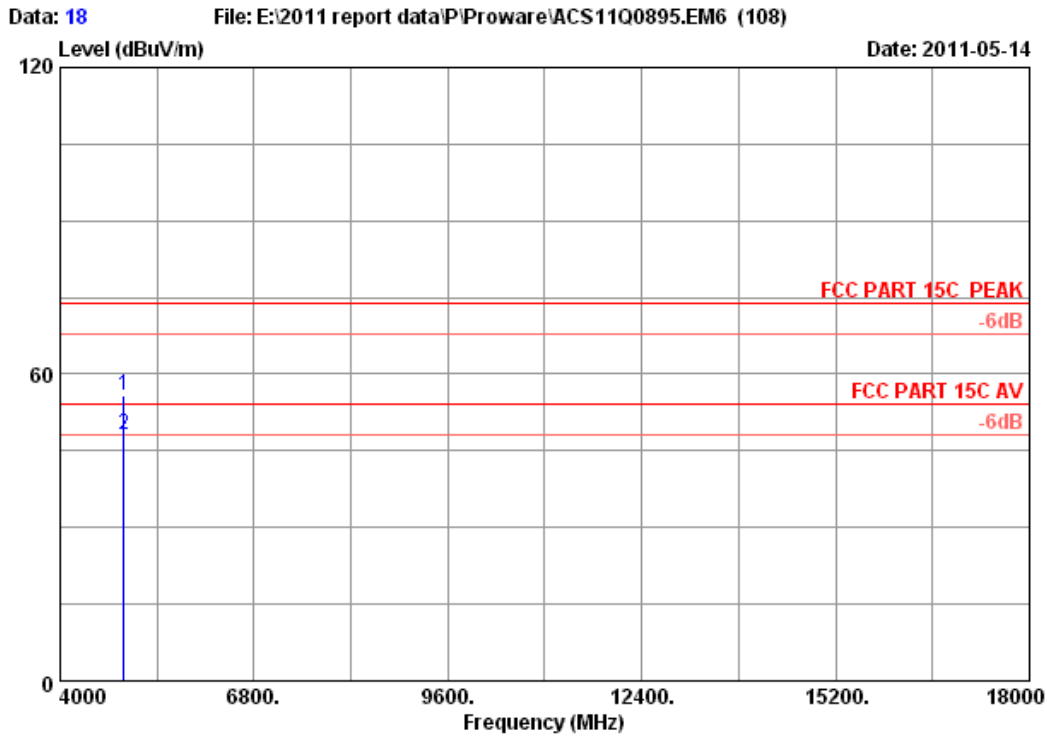


Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	10.76	34.98	45.68	55.95	74.00	18.05	Peak
2	4924.000	34.49	10.76	34.98	37.95	48.22	54.00	5.78	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

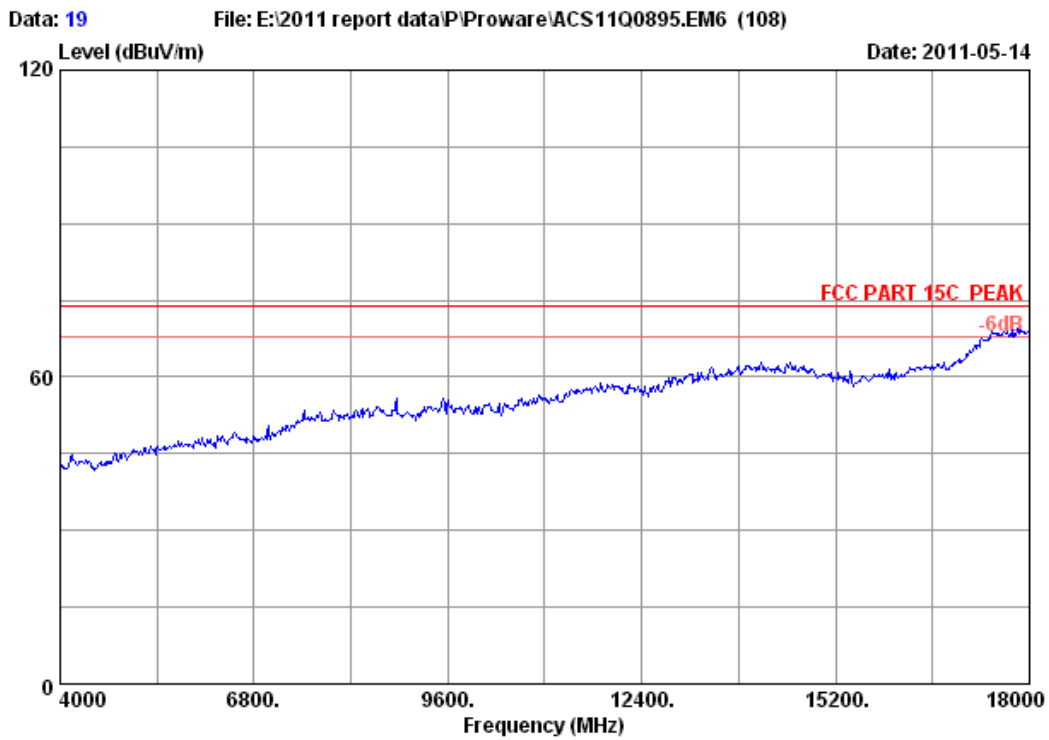

Site no.	: 3m Chamber	Data no. :	19
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Sunny-lu
EUT	: 300Mbps Wireless N Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz Tx		
M/N	: PW-RN501D		

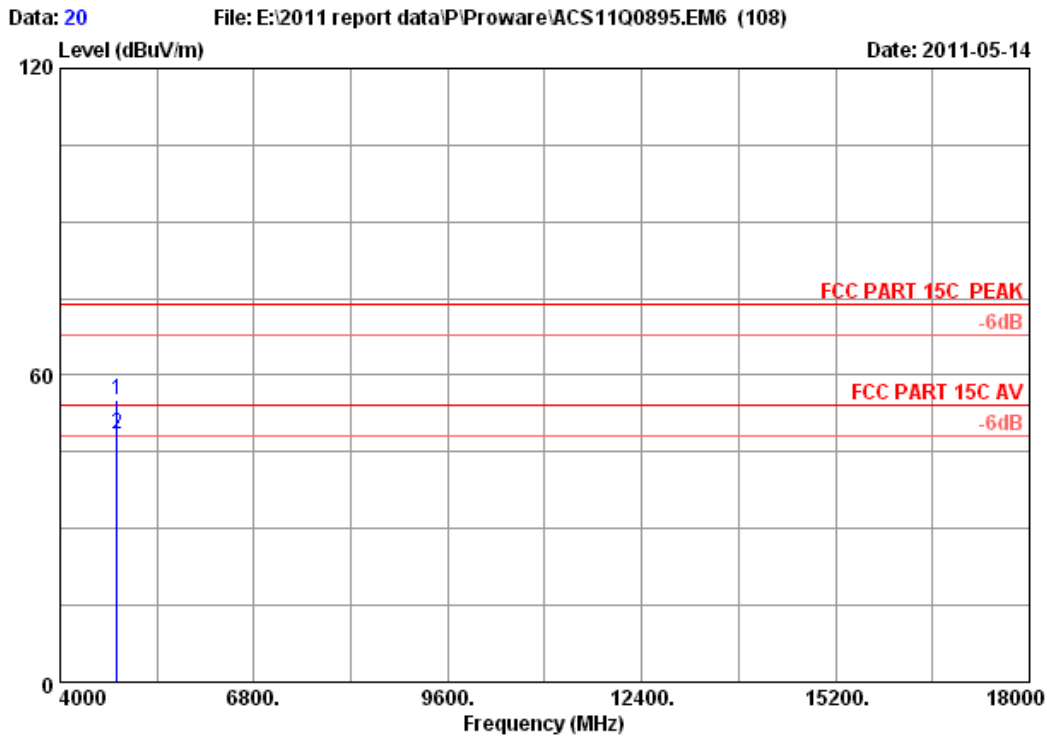


Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	45.16	55.04	74.00	18.96	Peak
2	4824.000	34.32	10.64	35.08	38.42	48.30	54.00	5.70	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

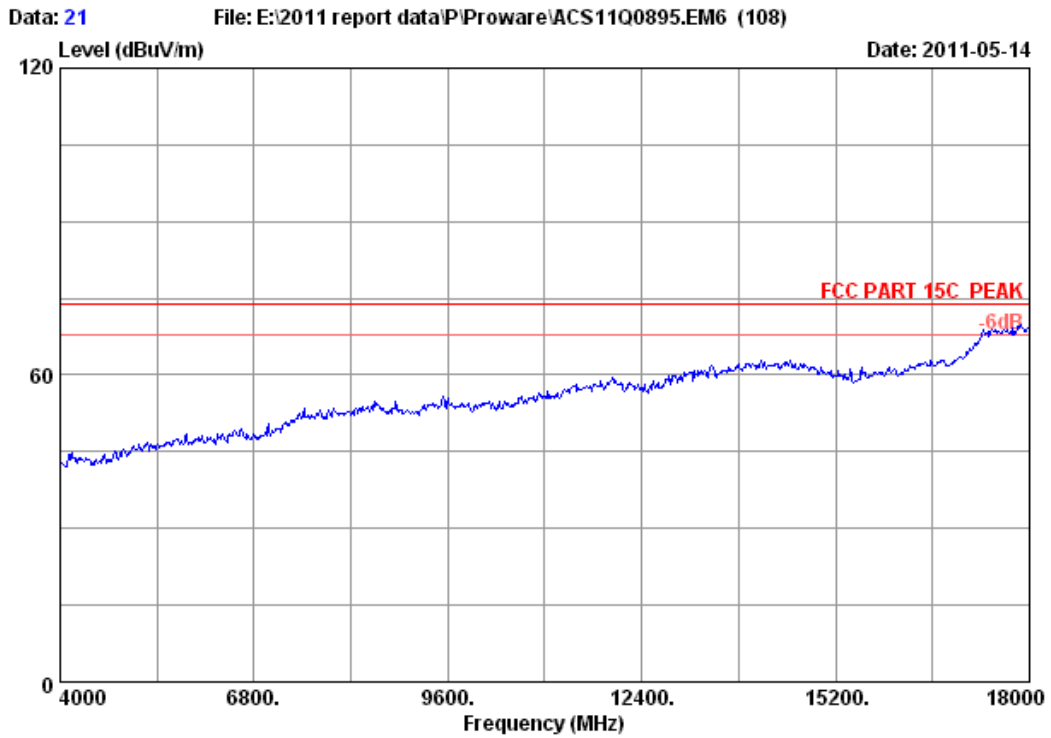

Site no.	: 3m Chamber	Data no. :	21
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23°C/54%	Engineer :	Sunny-lu
EUT	: 300Mbps Wireless N Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH1 2412MHz Tx		
M/N	: PW-RN501D		

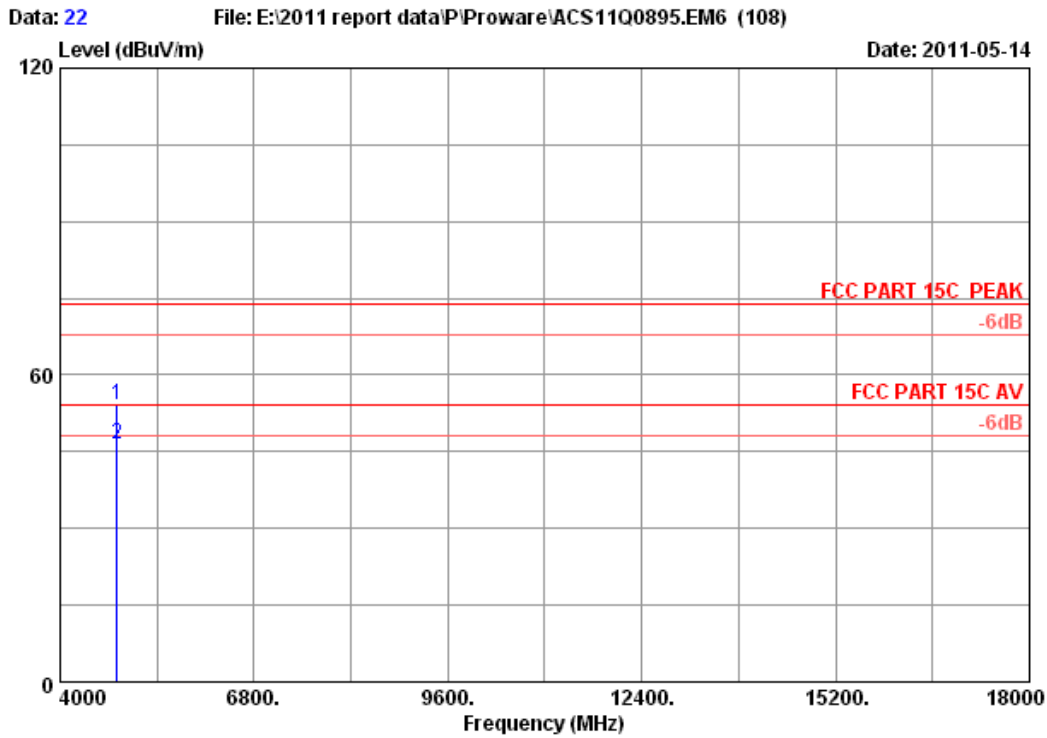


Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	44.16	54.04	74.00	19.96	Peak
2	4824.000	34.32	10.64	35.08	36.49	46.37	54.00	7.63	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



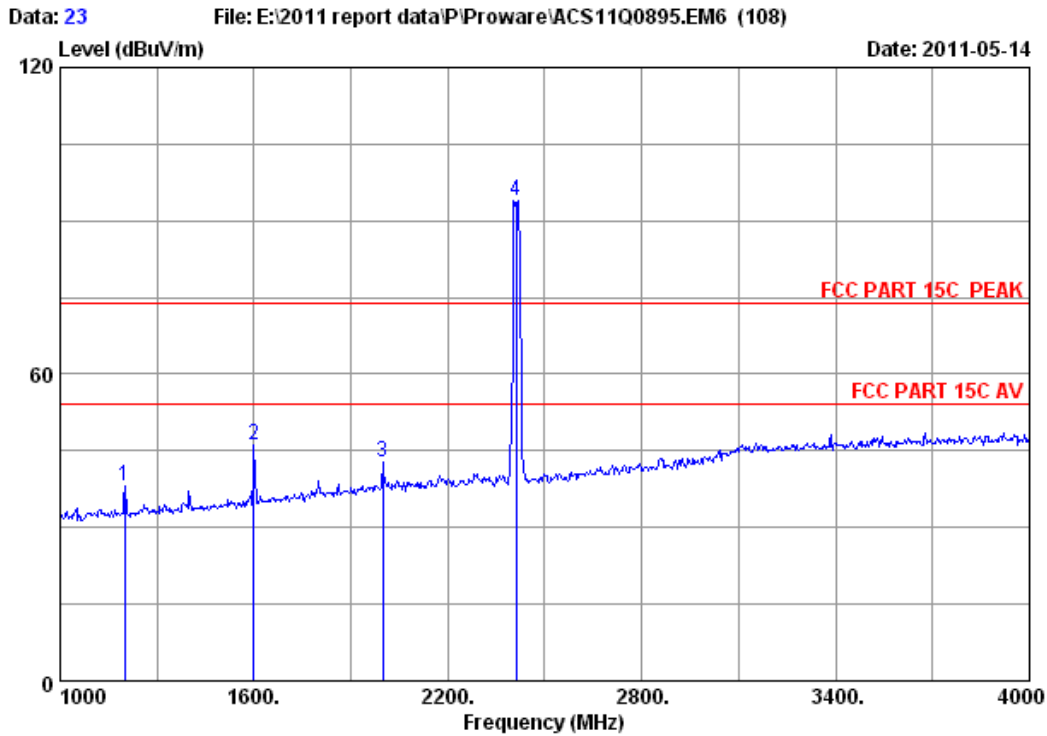


Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.55	37.98	74.00	36.02	Peak
2	1600.000	26.96	5.91	36.94	50.18	46.11	74.00	27.89	Peak
3	1999.000	29.20	6.63	36.70	43.69	42.82	74.00	31.18	Peak
4	2412.000	29.45	7.43	36.62	93.76	94.02	74.00	-20.02	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

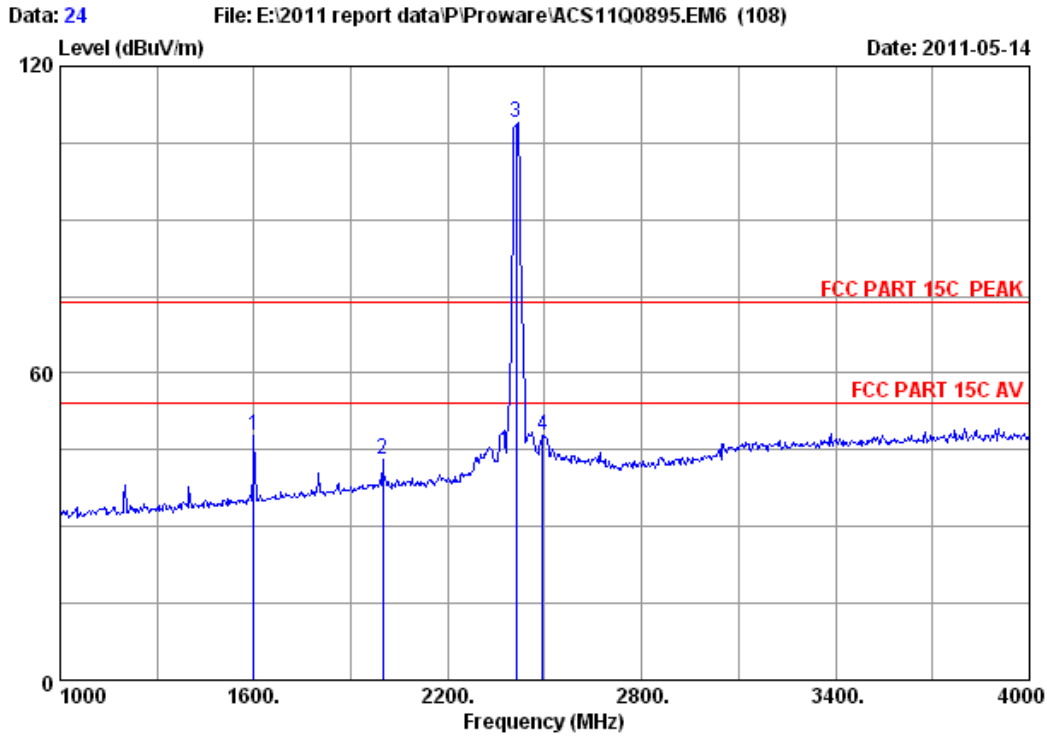


Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1600.000	26.96	5.91	36.94	51.89	47.82	74.00	26.18	Peak
2	1999.000	29.20	6.63	36.70	44.14	43.27	74.00	30.73	Peak
3	2412.000	29.45	7.43	36.62	108.57	108.83	74.00	-34.83	Peak
4	2494.000	29.50	7.58	36.60	47.39	47.87	74.00	26.13	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

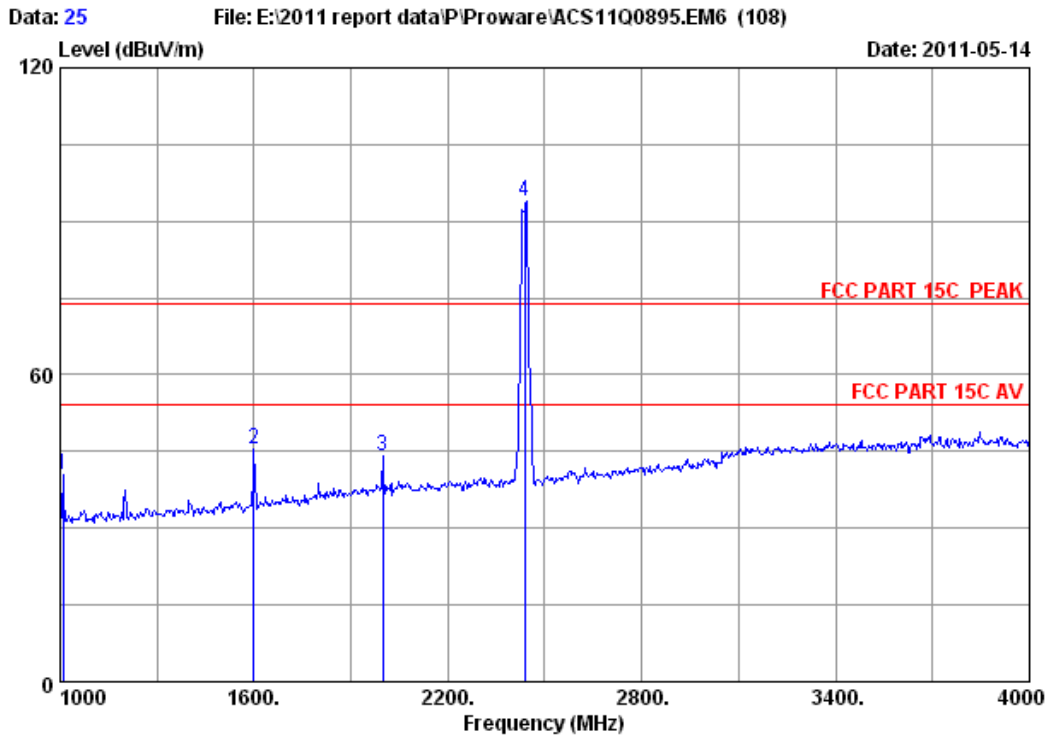


Site no. : 3m Chamber Data no. : 25  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1009.000	25.43	4.78	37.90	48.23	40.54	74.00	33.46	Peak
2	1600.000	26.96	5.91	36.94	49.42	45.35	74.00	28.65	Peak
3	1999.000	29.20	6.63	36.70	44.93	44.06	74.00	29.94	Peak
4	2437.000	29.47	7.46	36.61	93.44	93.76	74.00	-19.76	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

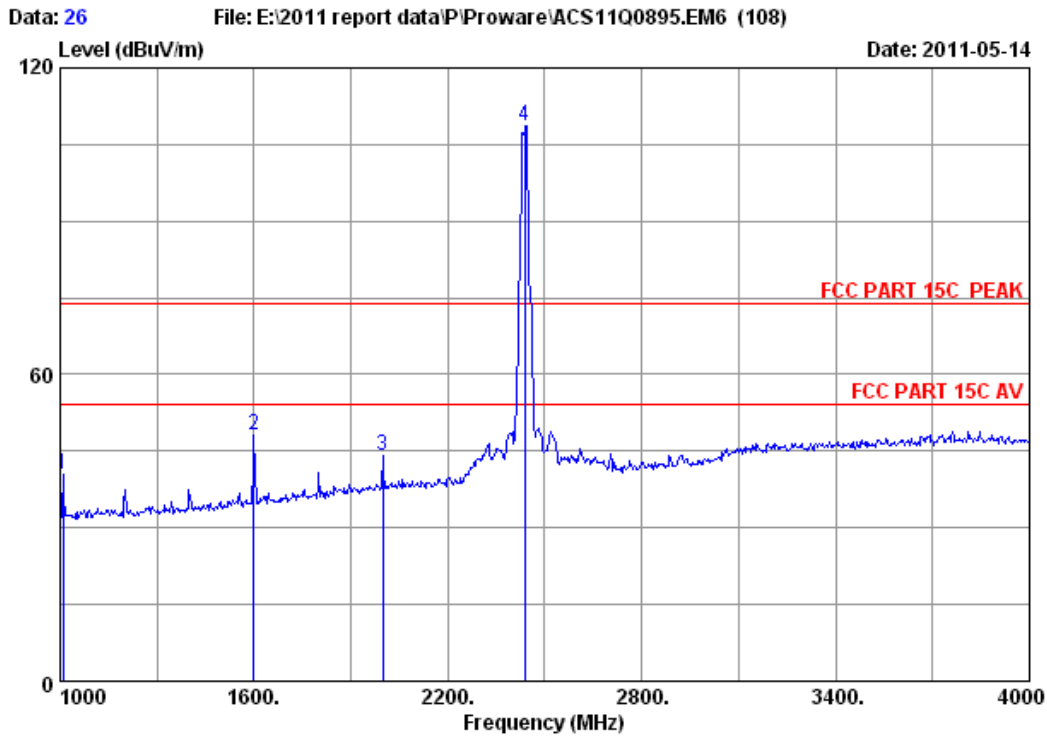


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH6 2437MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1009.000	25.43	4.78	37.90	48.23	40.54	74.00	33.46	Peak
2	1600.000	26.96	5.91	36.94	52.06	47.99	74.00	26.01	Peak
3	1999.000	29.20	6.63	36.70	44.93	44.06	74.00	29.94	Peak
4	2437.000	29.47	7.46	36.61	108.26	108.58	74.00	-34.58	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

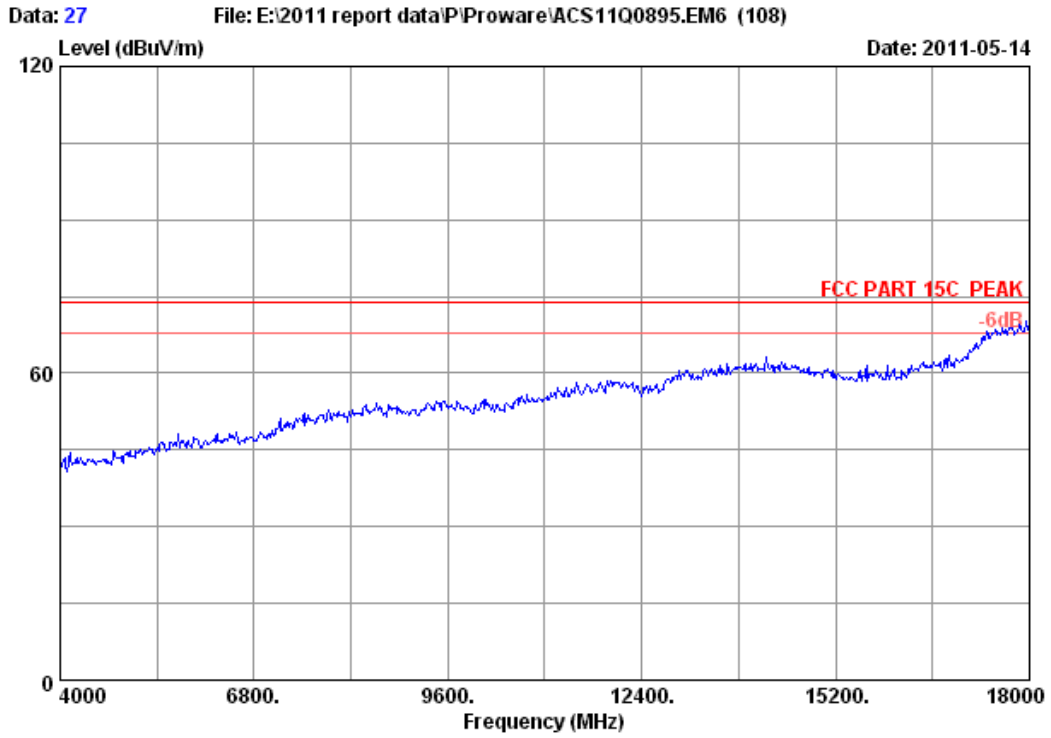

Site no. : 3m Chamber Data no. : 27  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz Tx  
M/N : PW-RN501D

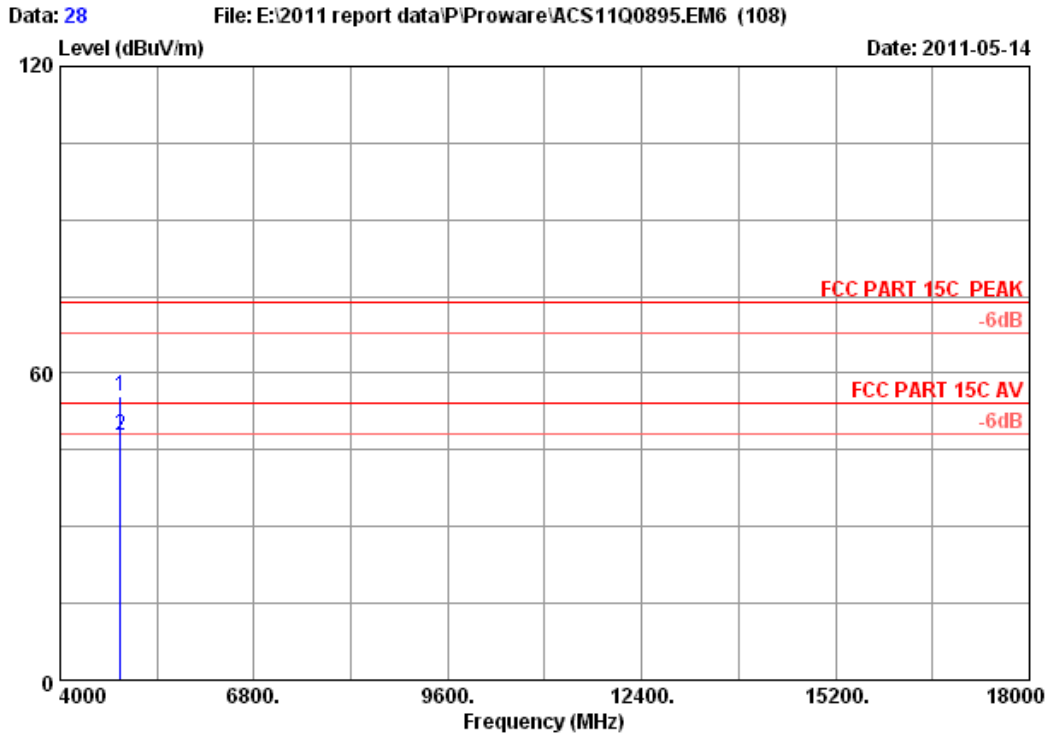


Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH6 2437MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	45.32	55.39	74.00	18.61	Peak
2	4874.000	34.41	10.69	35.03	37.85	47.92	54.00	6.08	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

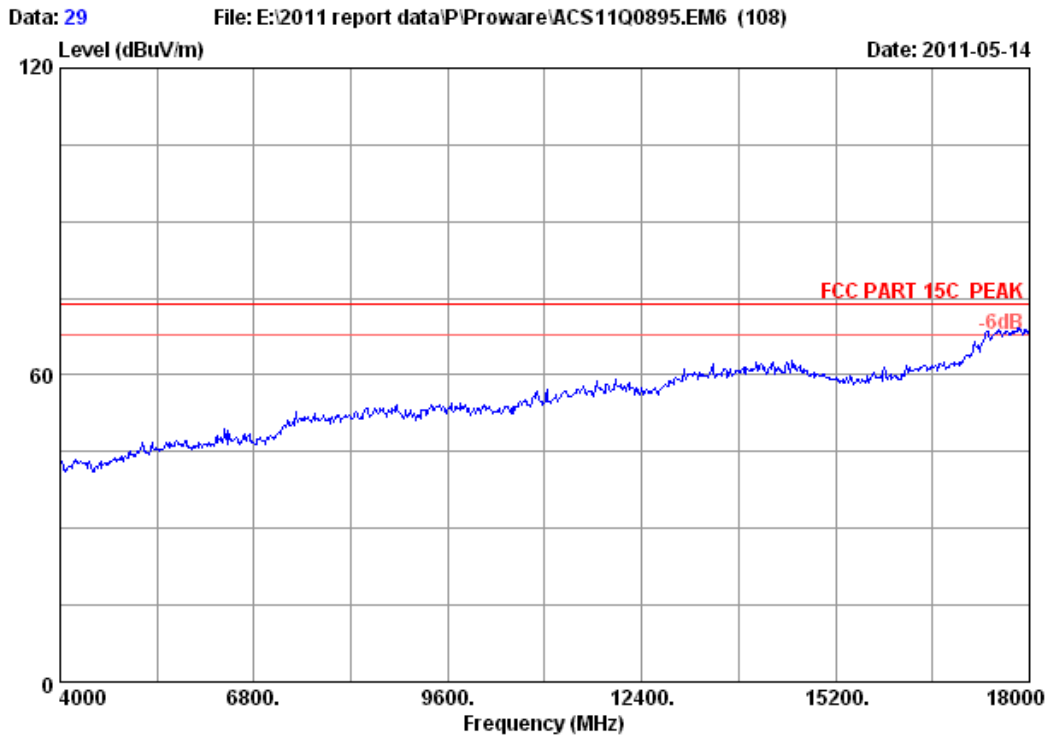

Site no. : 3m Chamber Data no. : 29  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11g CH6 2437MHz Tx  
M/N : PW-RN501D

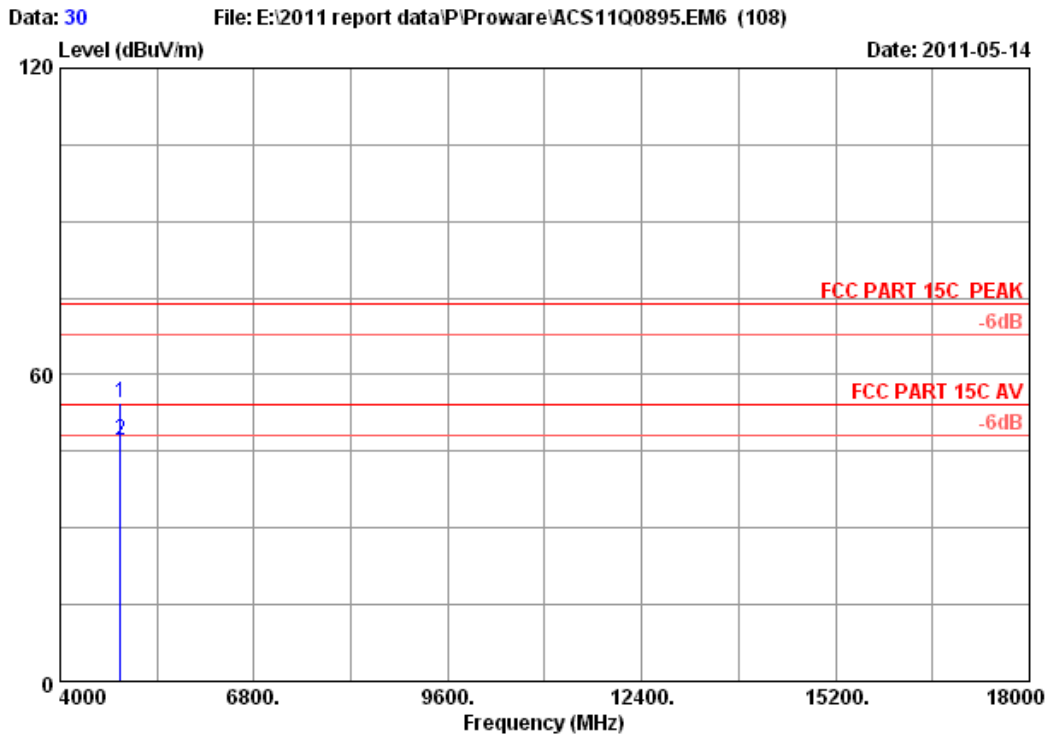


Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	44.50	54.57	74.00	19.43	Peak
2	4874.000	34.41	10.69	35.03	36.98	47.05	54.00	6.95	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



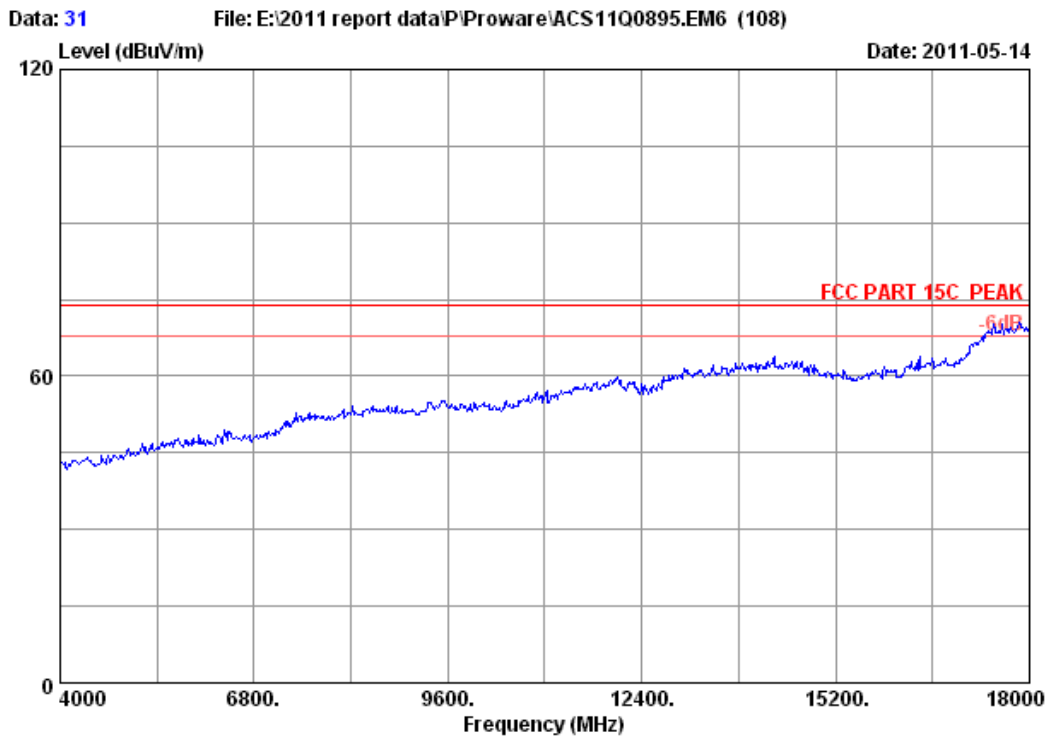

Site no.	: 3m Chamber	Data no. :	31
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23*C/54%	Engineer :	Sunny-lu
EUT	: 300Mbps Wireless N Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11g CH11 2462MHz Tx		
M/N	: PW-RN501D		

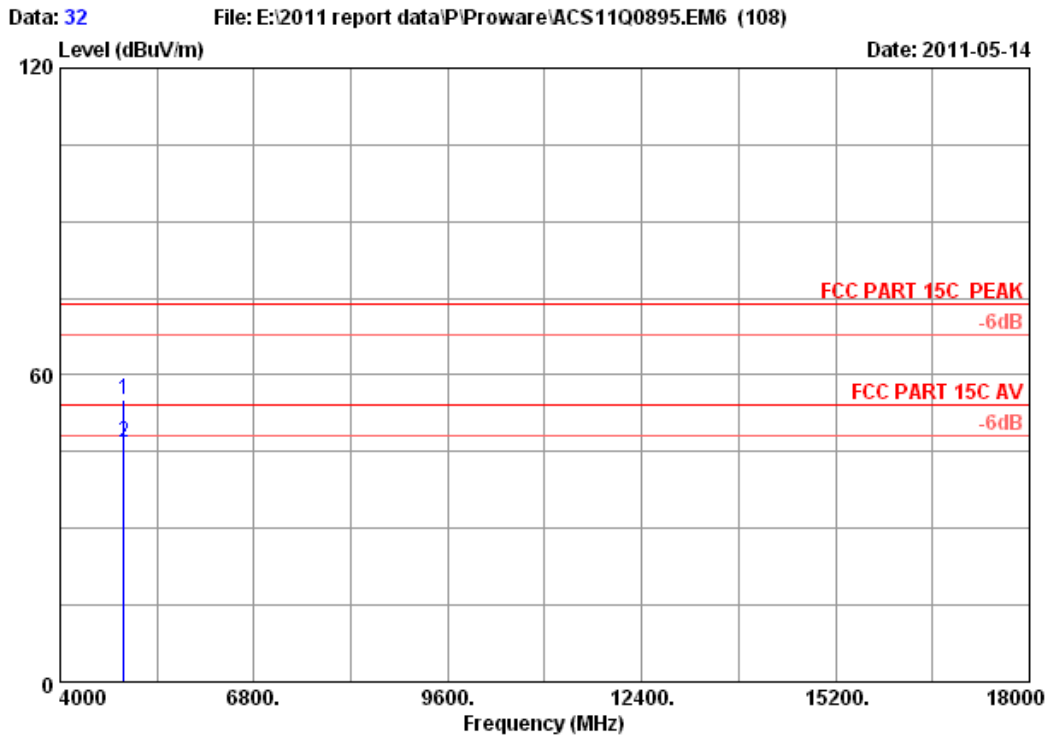


Site no. : 3m Chamber Data no. : 32  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	10.76	34.98	44.95	55.22	74.00	18.78	Peak
2	4924.000	34.49	10.76	34.98	36.47	46.74	54.00	7.26	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

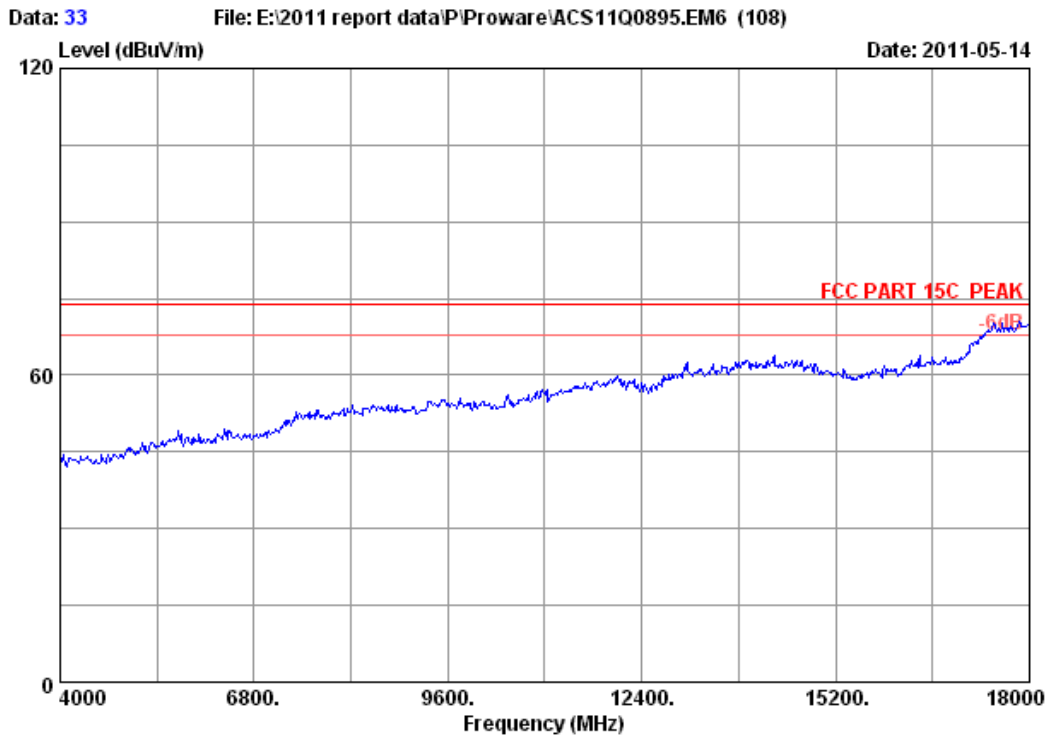

Site no. : 3m Chamber Data no. : 33  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11g CH11 2462MHz Tx  
M/N : PW-RN501D

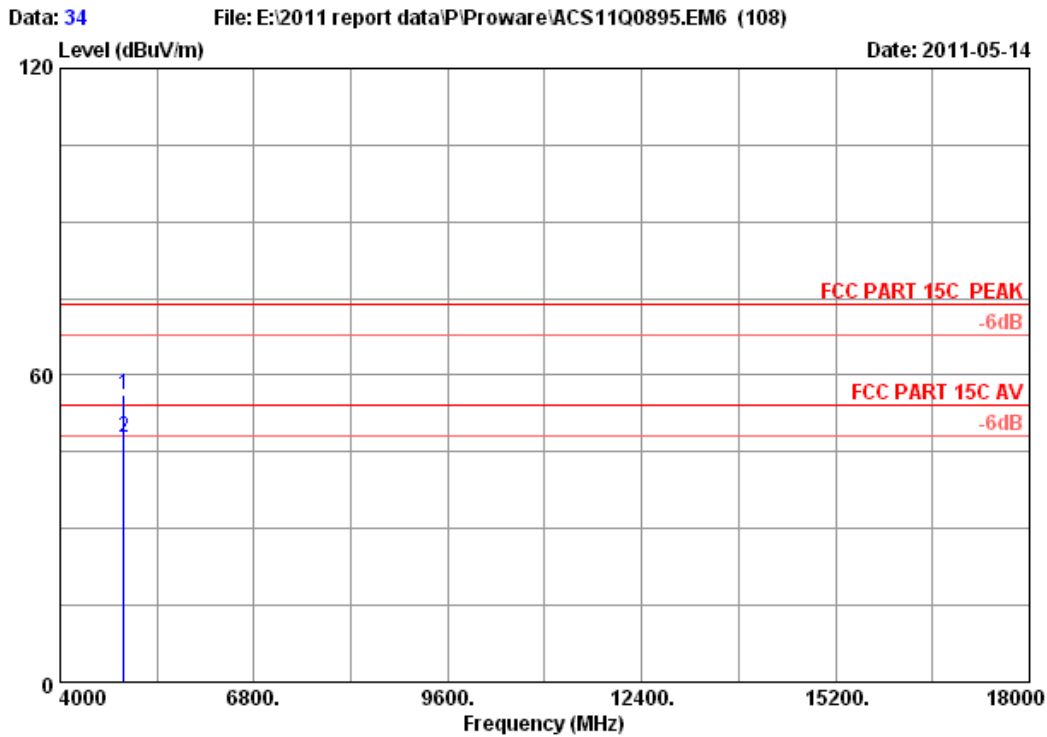


Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	10.76	34.98	45.97	56.24	74.00	17.76	Peak
2	4924.000	34.49	10.76	34.98	37.42	47.69	54.00	6.31	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

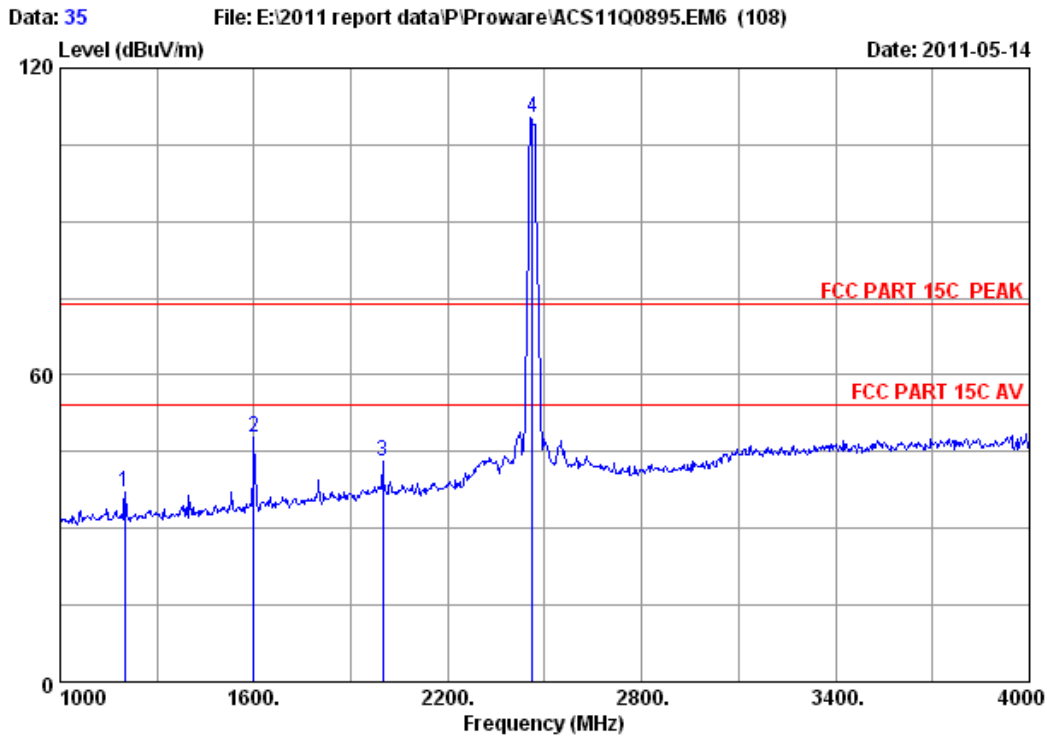


Site no. : 3m Chamber Data no. : 35  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	43.56	36.99	74.00	37.01	Peak
2	1600.000	26.96	5.91	36.94	52.03	47.96	74.00	26.04	Peak
3	1999.000	29.20	6.63	36.70	43.85	42.98	74.00	31.02	Peak
4	2462.000	29.48	7.54	36.61	109.79	110.20	74.00	-36.20	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

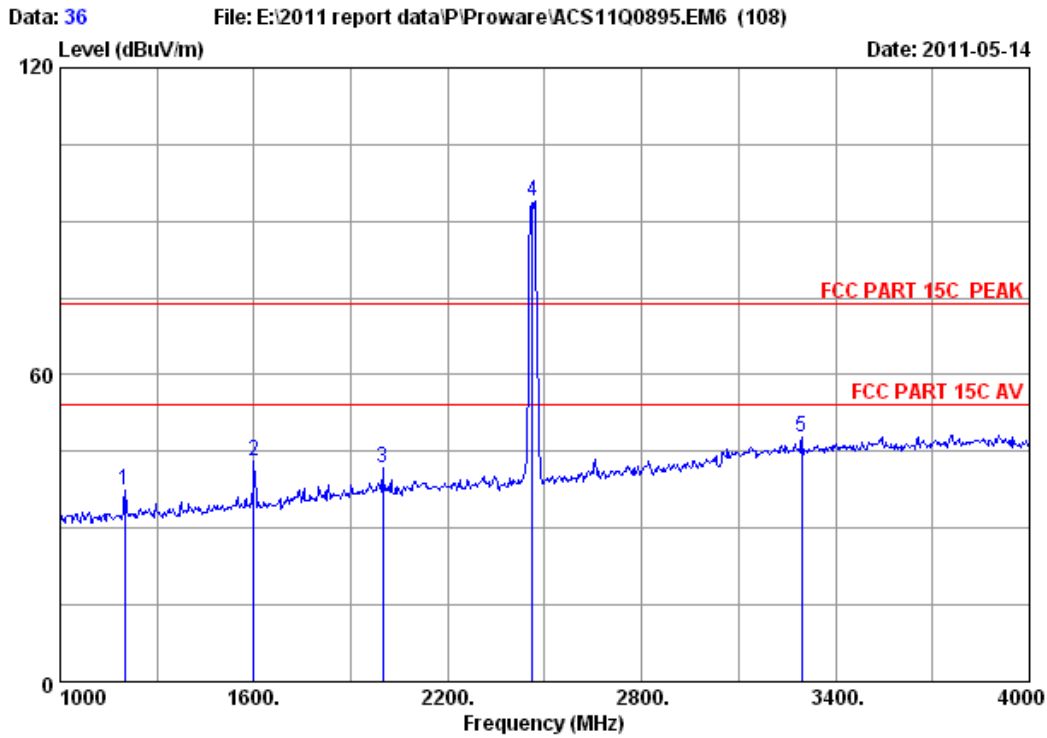


Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	43.85	37.28	74.00	36.72	Peak
2	1600.000	26.96	5.91	36.94	47.33	43.26	74.00	30.74	Peak
3	1999.000	29.20	6.63	36.70	42.75	41.88	74.00	32.12	Peak
4	2462.000	29.48	7.54	36.61	93.46	93.87	74.00	-19.87	Peak
5	3295.000	32.76	8.88	36.20	42.45	47.89	74.00	26.11	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

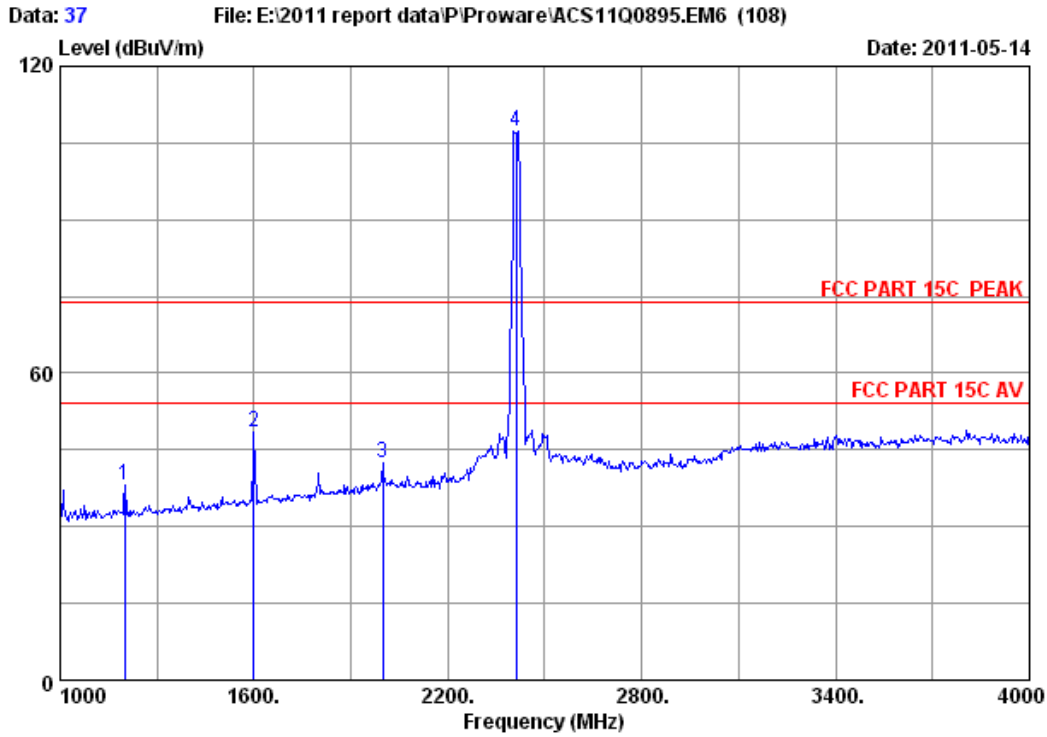


Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.59	38.02	74.00	35.98	Peak
2	1600.000	26.96	5.91	36.94	52.53	48.46	74.00	25.54	Peak
3	1999.000	29.20	6.63	36.70	43.19	42.32	74.00	31.68	Peak
4	2412.000	29.45	7.43	36.62	107.05	107.31	74.00	-33.31	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

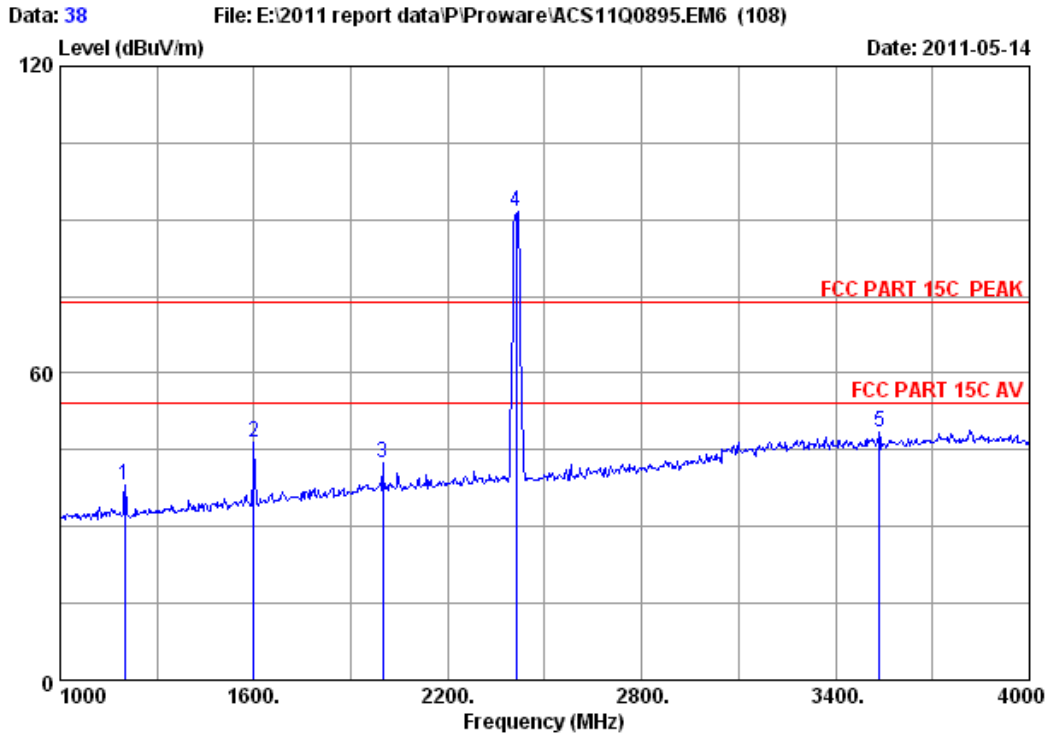


Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.69	38.12	74.00	35.88	Peak
2	1600.000	26.96	5.91	36.94	50.68	46.61	74.00	27.39	Peak
3	1999.000	29.20	6.63	36.70	43.24	42.37	74.00	31.63	Peak
4	2412.000	29.45	7.43	36.62	91.37	91.63	74.00	-17.63	Peak
5	3535.000	33.35	9.16	35.98	41.88	48.41	74.00	25.59	Peak


Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.



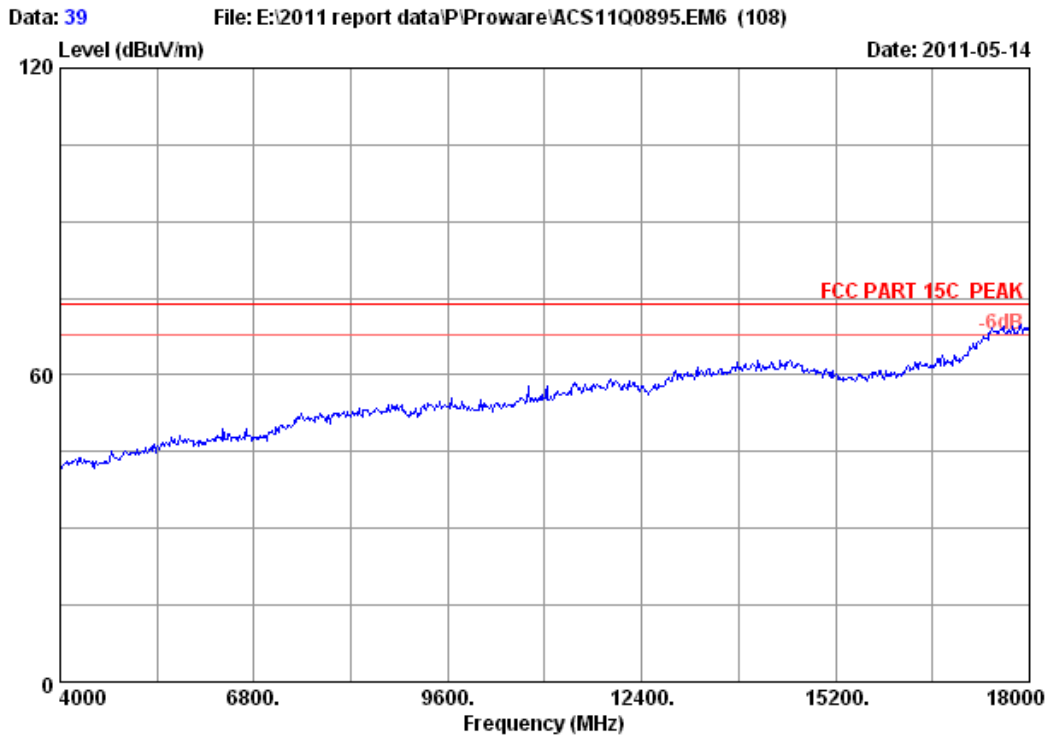

Site no. : 3m Chamber Data no. : 39  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
M/N : PW-RN501D

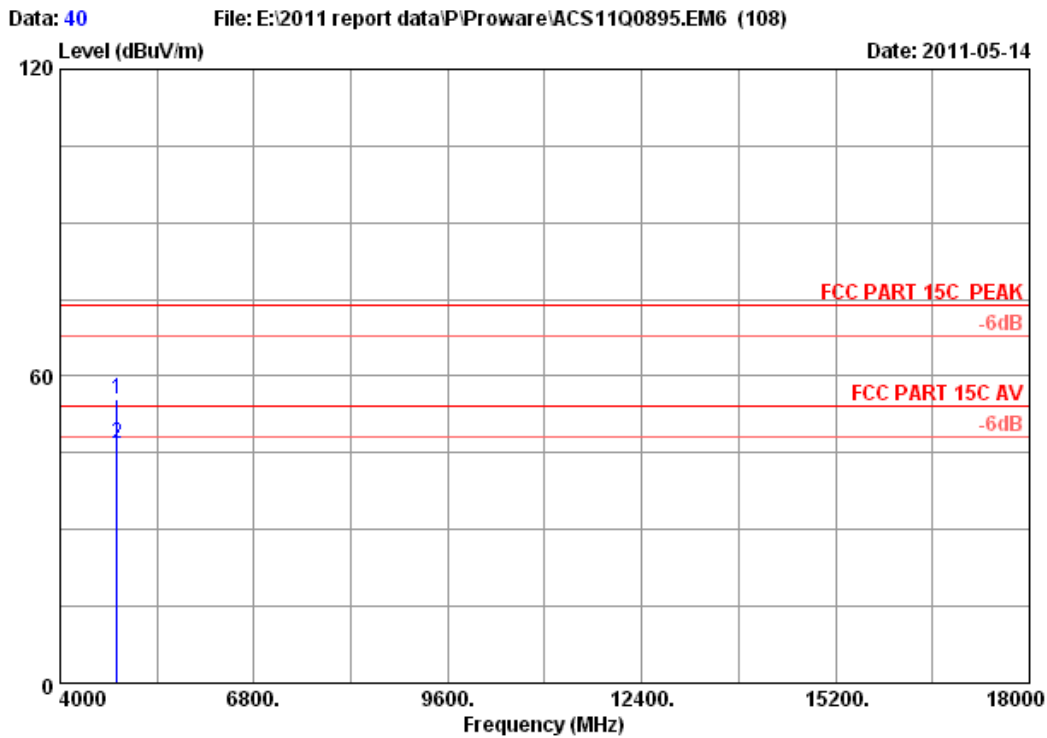


Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	45.76	55.64	74.00	18.36	Peak
2	4824.000	34.32	10.64	35.08	36.85	46.73	54.00	7.27	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

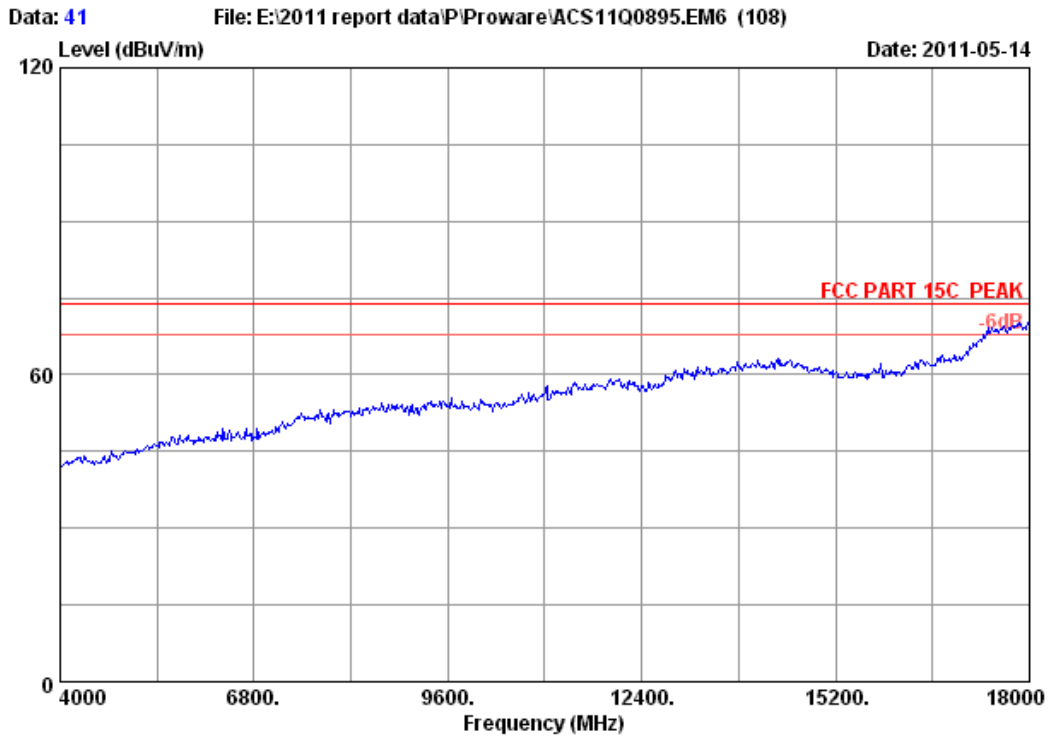

Site no. : 3m Chamber Data no. : 41  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
M/N : PW-RN501D

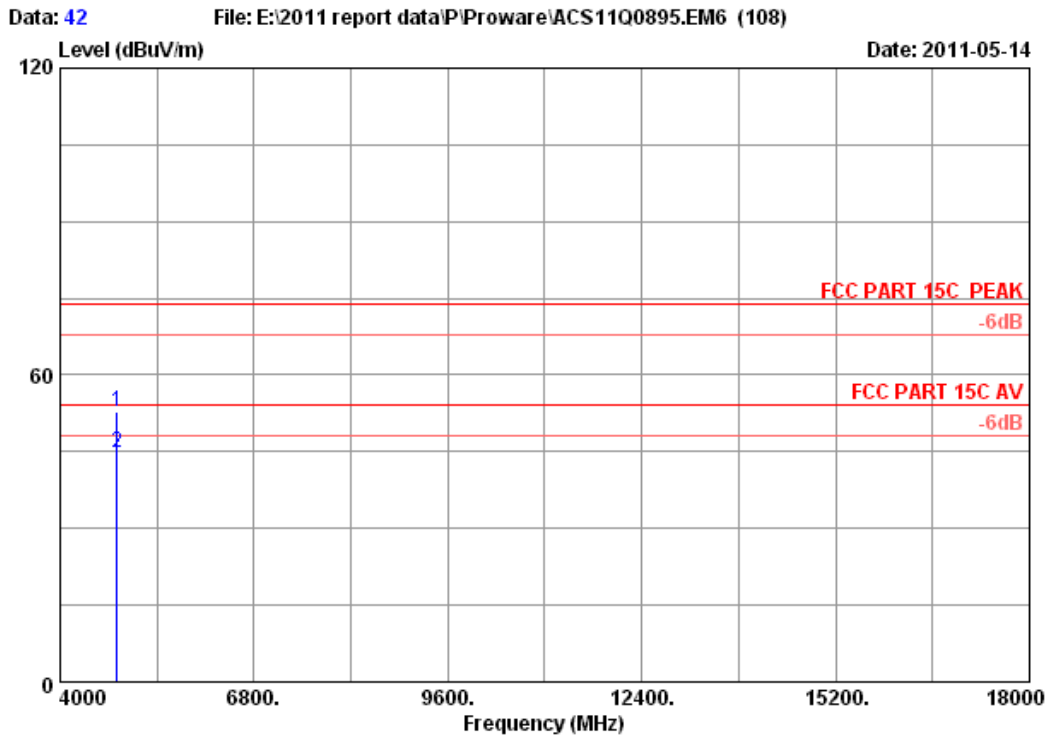


Site no. : 3m Chamber Data no. : 42  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	34.32	10.64	35.08	42.91	52.79	74.00	21.21	Peak
2	4824.000	34.32	10.64	35.08	34.99	44.87	54.00	9.13	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

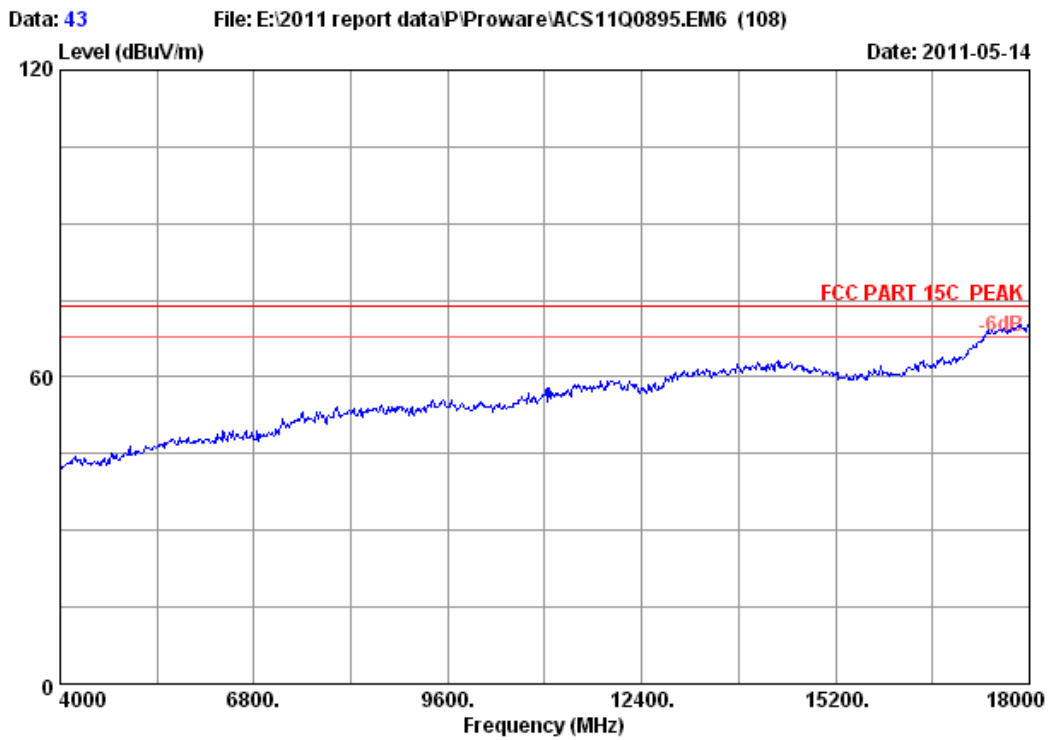

Site no. : 3m Chamber Data no. : 43  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
M/N : PW-RN501D

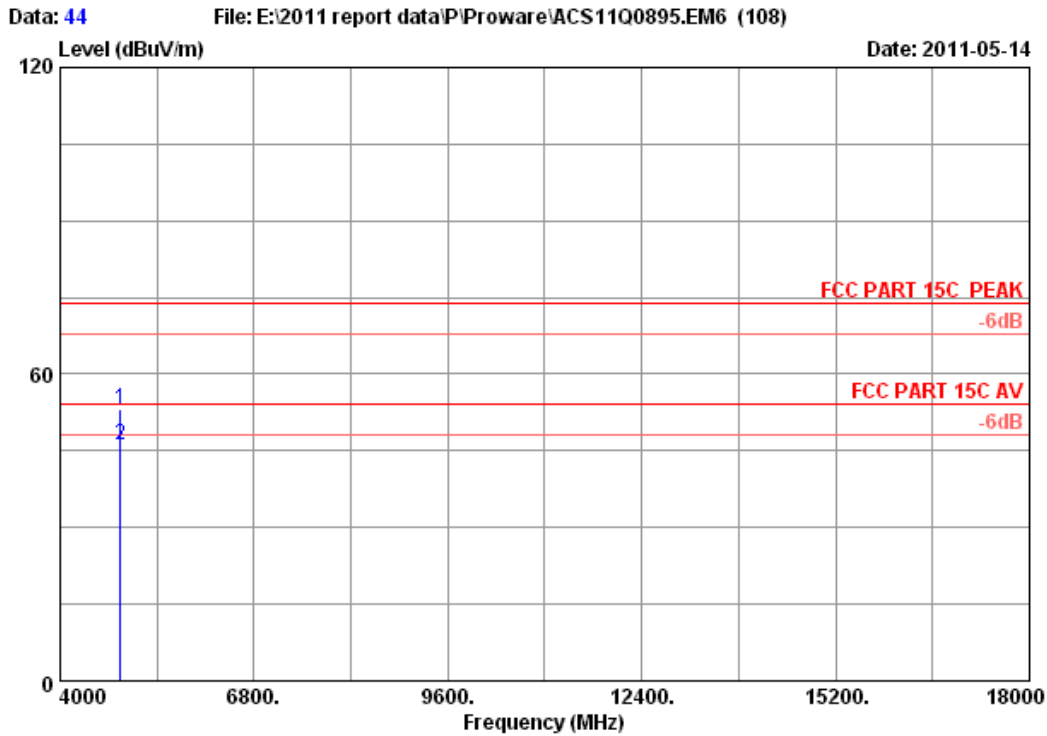


Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	43.04	53.11	74.00	20.89	Peak
2	4874.000	34.41	10.69	35.03	36.10	46.17	54.00	7.83	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

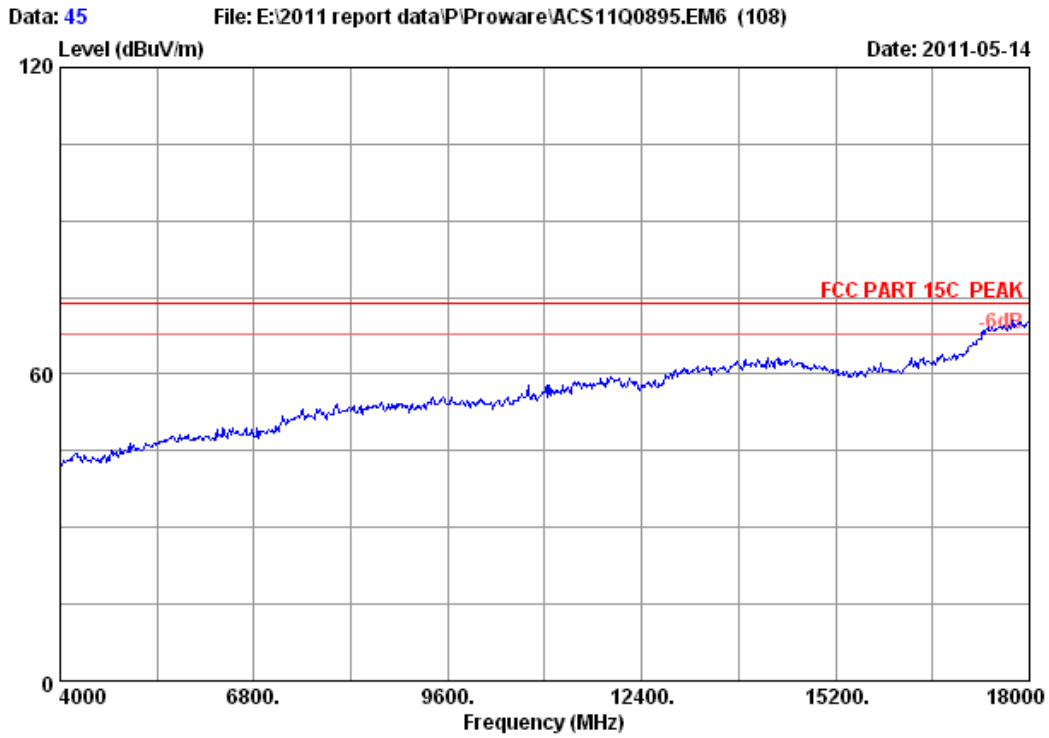

Site no. : 3m Chamber Data no. : 45  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
M/N : PW-RN501D

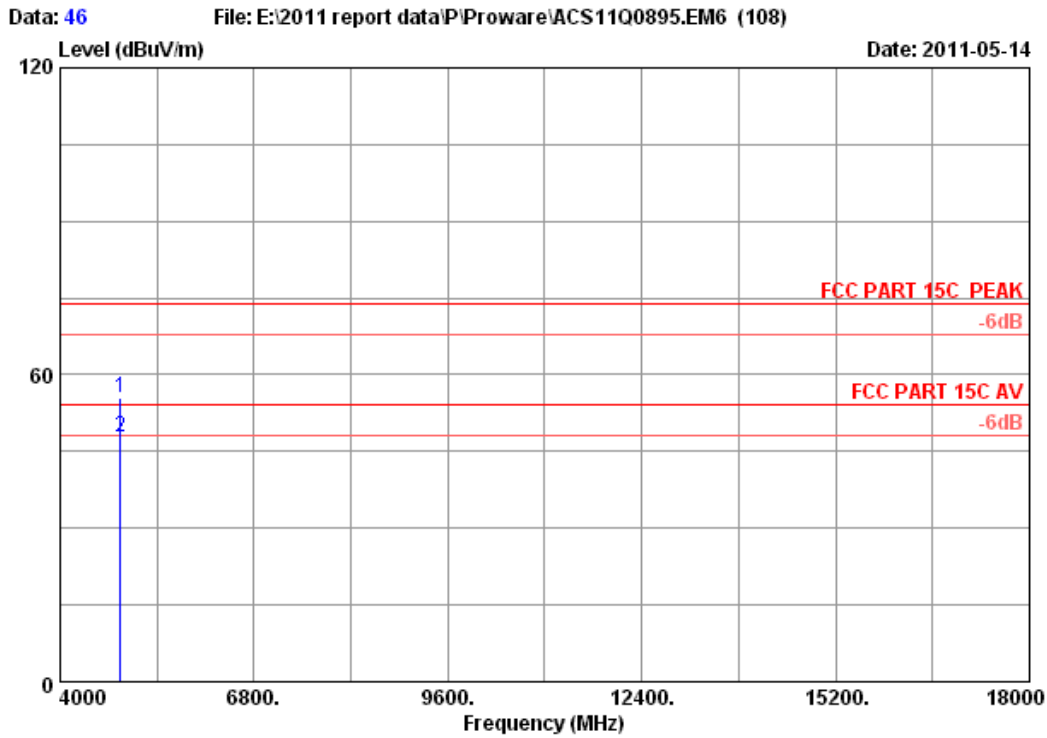


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	45.41	55.48	74.00	18.52	Peak
2	4874.000	34.41	10.69	35.03	37.86	47.93	54.00	6.07	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



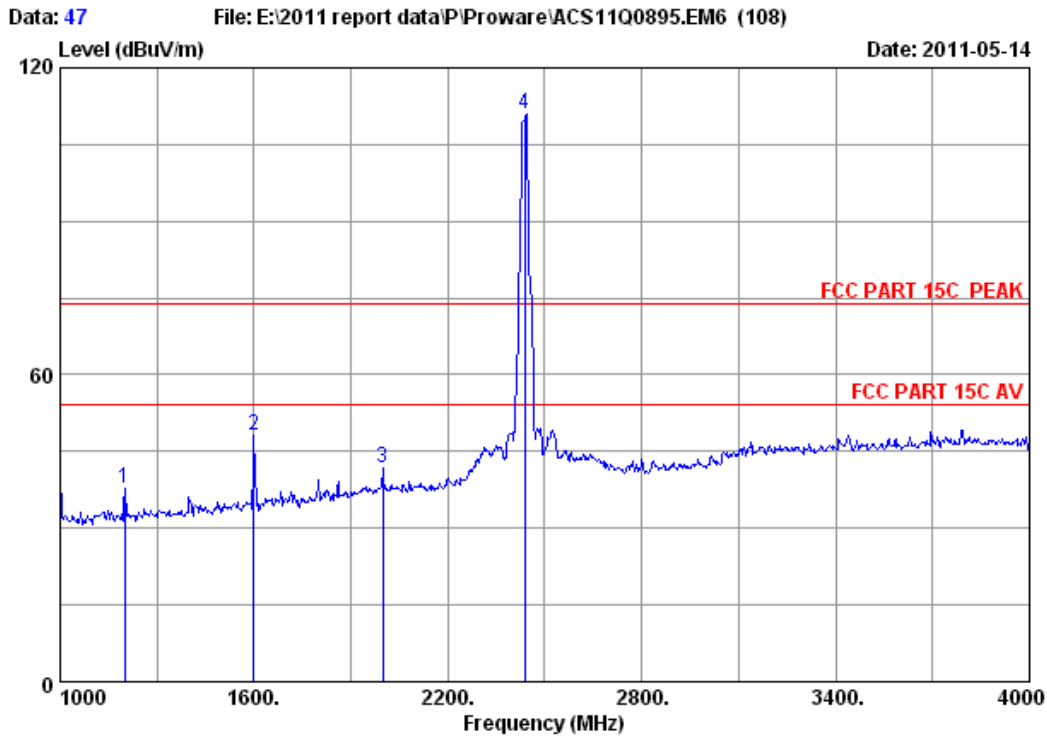


Site no. : 3m Chamber Data no. : 47  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.46	37.89	74.00	36.11	Peak
2	1600.000	26.96	5.91	36.94	52.13	48.06	74.00	25.94	Peak
3	1999.000	29.20	6.63	36.70	42.80	41.93	74.00	32.07	Peak
4	2437.000	29.47	7.46	36.61	110.55	110.87	74.00	-36.87	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

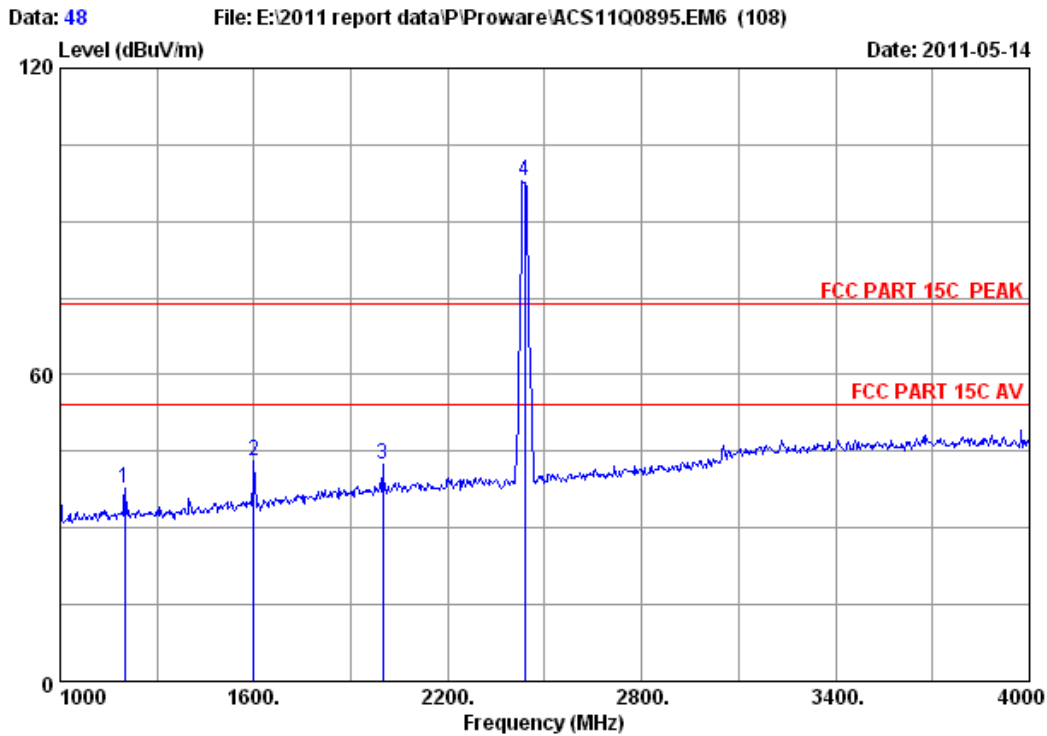


Site no. : 3m Chamber Data no. : 48  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH6 2437MHz Tx  
 M/N : PW-RN501D

	Ant.	Cable	Amp.	Emission					
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	1201.000	25.81	5.16	37.54	44.50	37.93	74.00	36.07	Peak
2	1600.000	26.96	5.91	36.94	47.25	43.18	74.00	30.82	Peak
3	1999.000	29.20	6.63	36.70	43.37	42.50	74.00	31.50	Peak
4	2437.000	29.47	7.46	36.61	97.49	97.81	74.00	-23.81	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

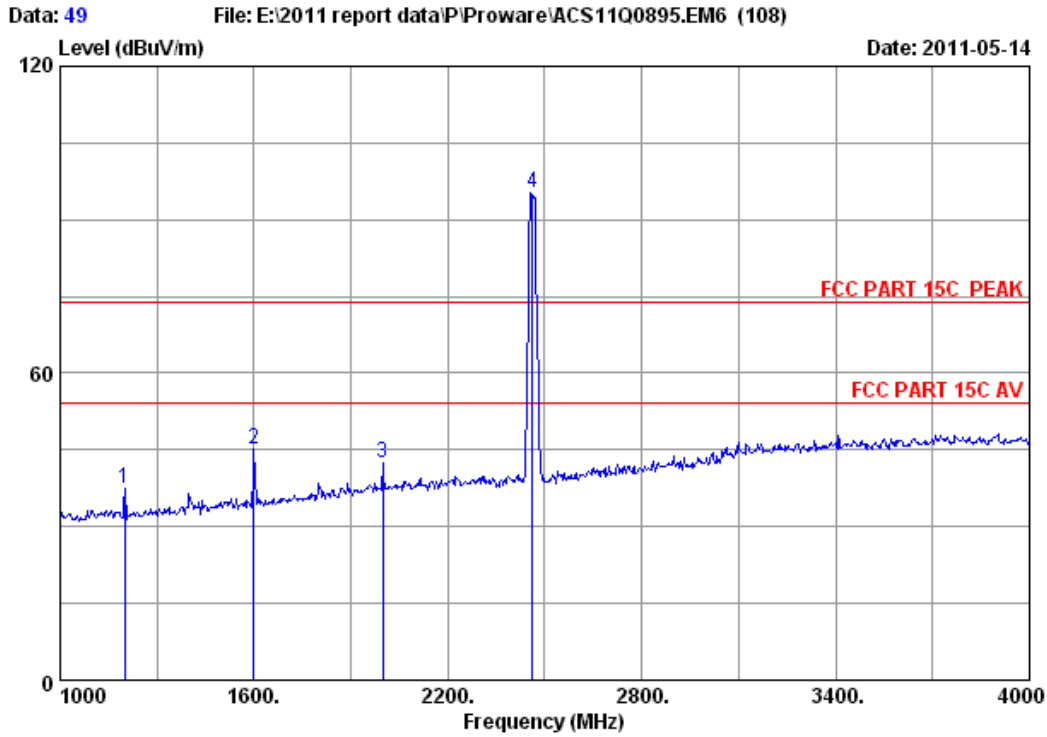


Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.02	37.45	74.00	36.55	Peak
2	1600.000	26.96	5.91	36.94	49.21	45.14	74.00	28.86	Peak
3	1999.000	29.20	6.63	36.70	43.38	42.51	74.00	31.49	Peak
4	2462.000	29.48	7.54	36.61	94.84	95.25	74.00	-21.25	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

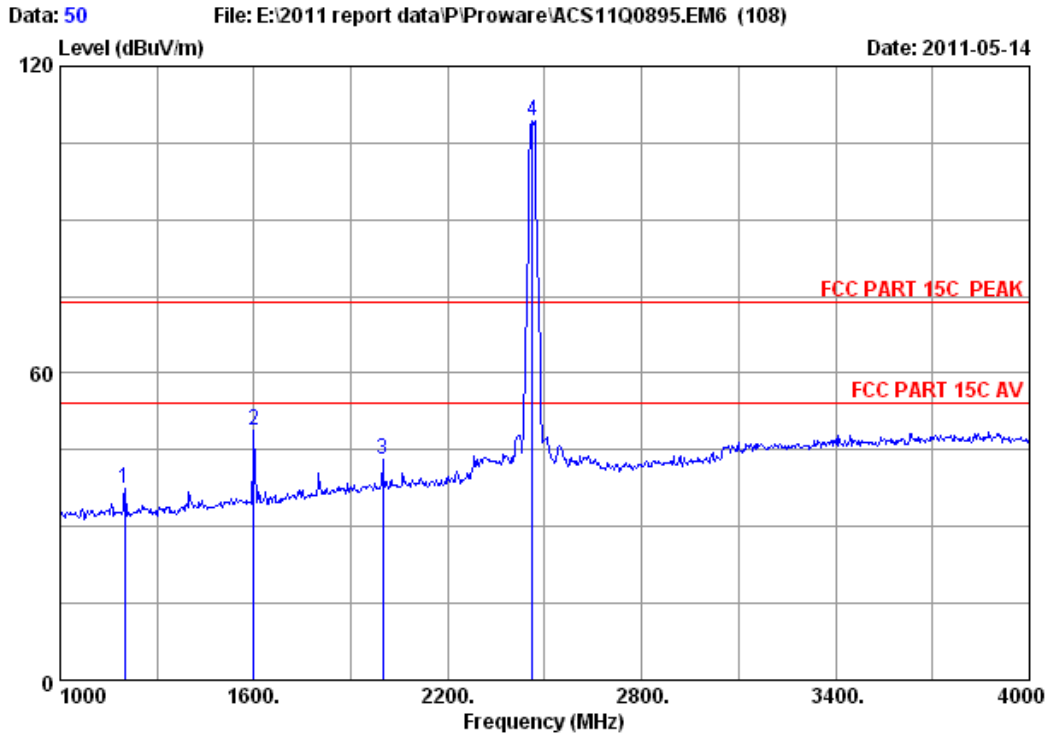


Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.02	37.45	74.00	36.55	Peak
2	1600.000	26.96	5.91	36.94	52.91	48.84	74.00	25.16	Peak
3	1999.000	29.20	6.63	36.70	43.90	43.03	74.00	30.97	Peak
4	2462.000	29.48	7.54	36.61	108.89	109.30	74.00	-35.30	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

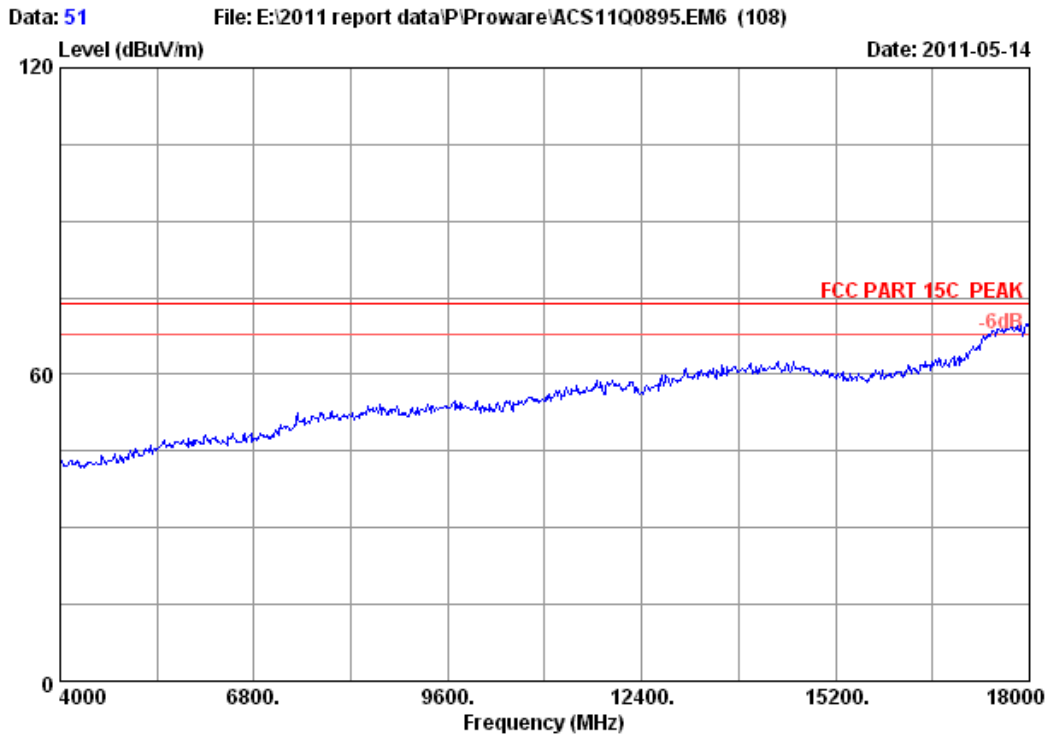

Site no. : 3m Chamber Data no. : 51  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
M/N : PW-RN501D

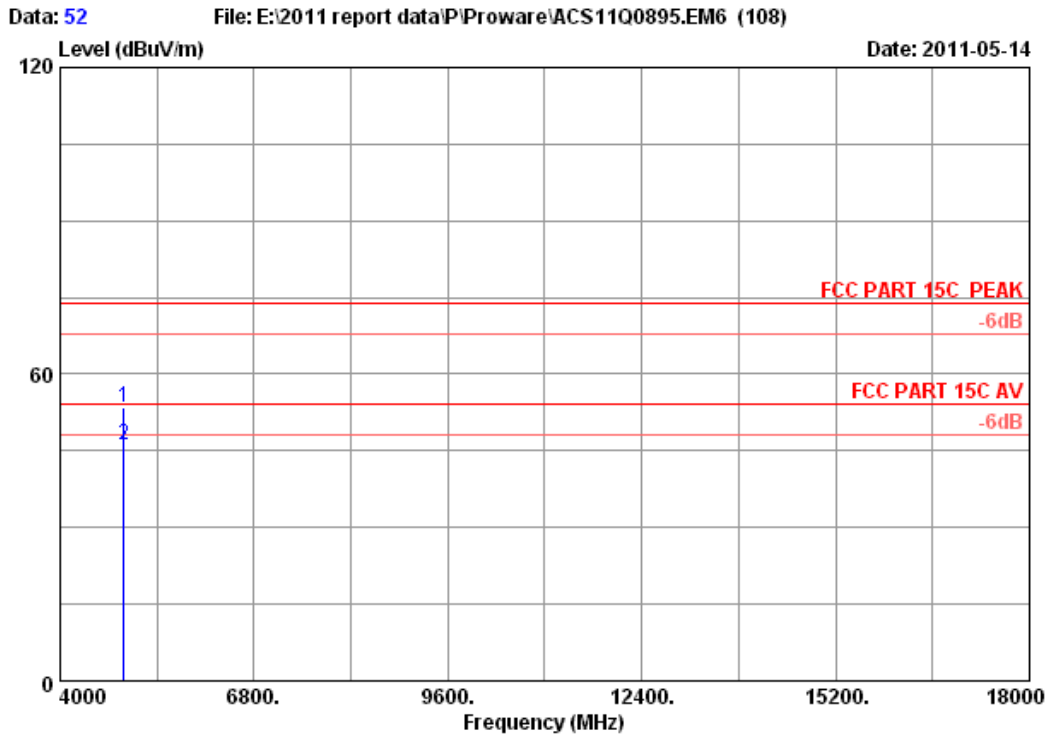


Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.000	34.49	10.76	34.98	43.11	53.38	74.00	20.62	Peak
2	4924.000	34.49	10.76	34.98	35.78	46.05	54.00	7.95	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

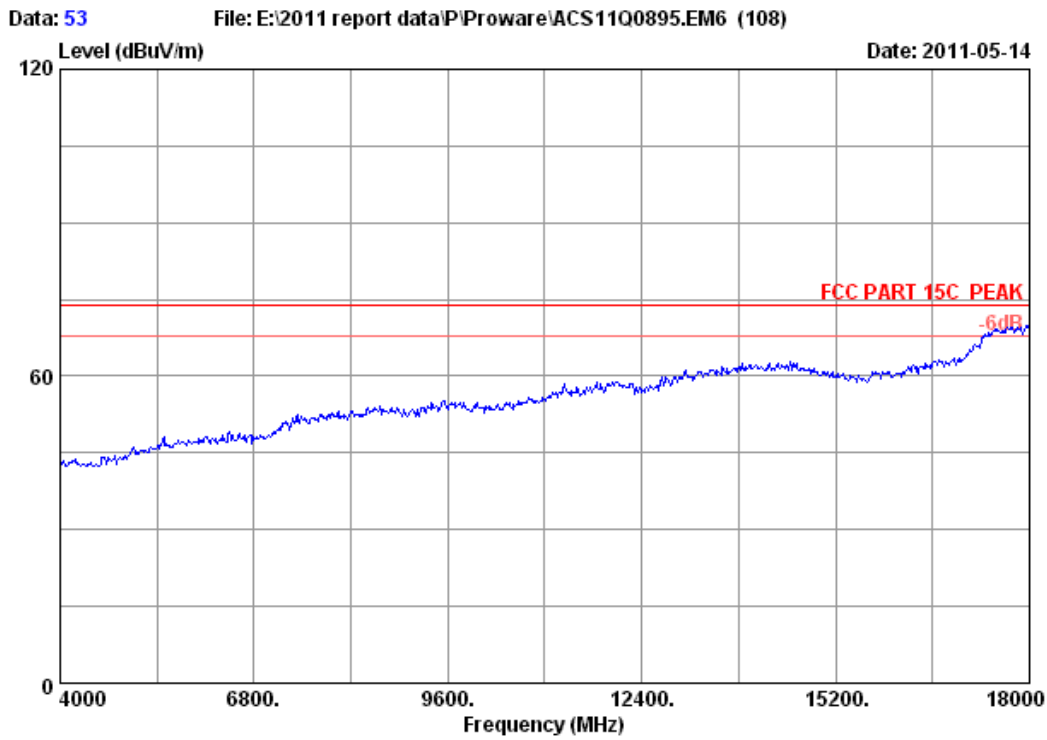

Site no. : 3m Chamber Data no. : 53  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
M/N : PW-RN501D

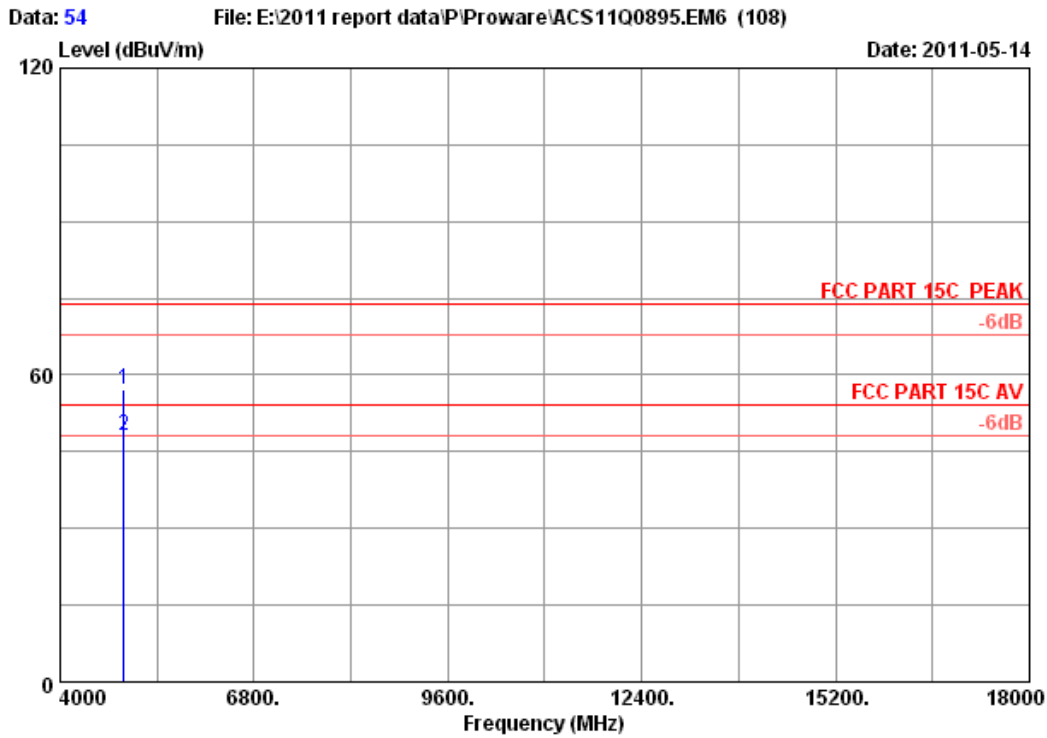


Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant.	Cable	Amp.	Emission					
Freq.	Factor	loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	4924.000	34.49	10.76	34.98	46.89	57.16	74.00	16.84	Peak
2	4924.000	34.49	10.76	34.98	37.86	48.13	54.00	5.87	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



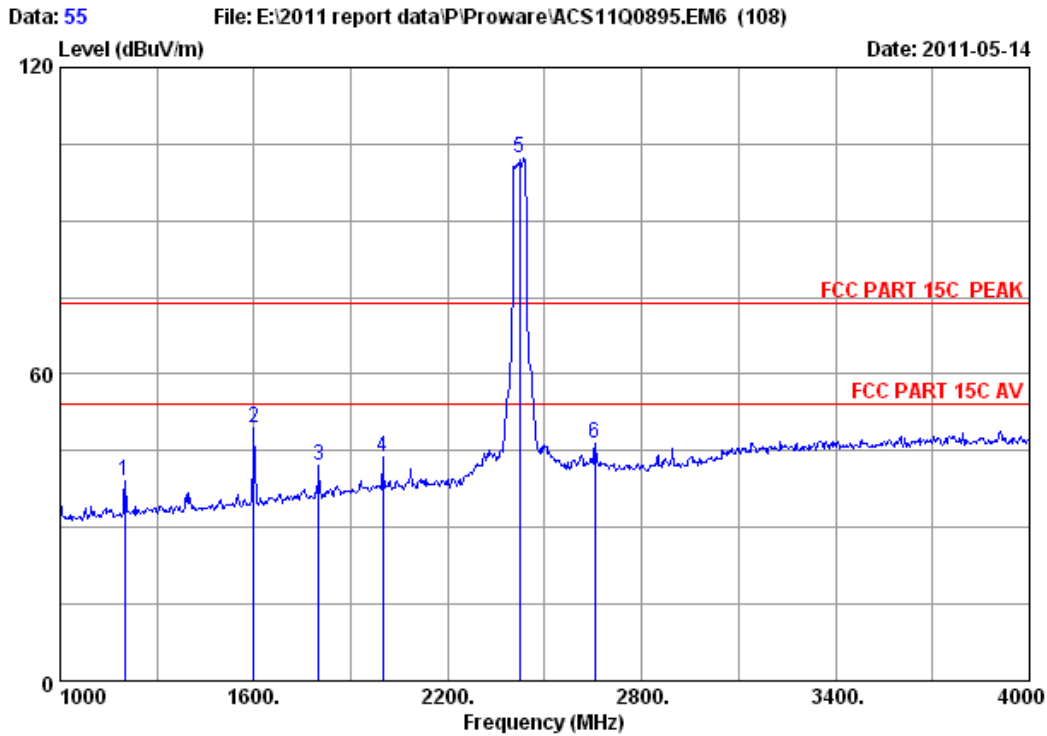


Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.78	39.21	74.00	34.79	Peak
2	1600.000	26.96	5.91	36.94	53.58	49.51	74.00	24.49	Peak
3	1801.000	28.08	6.29	36.83	44.41	41.95	74.00	32.05	Peak
4	1999.000	29.20	6.63	36.70	44.73	43.86	74.00	30.14	Peak
5	2422.000	29.46	7.46	36.61	101.92	102.23	74.00	-28.23	Peak
6	2656.000	30.25	7.88	36.57	44.79	46.35	74.00	27.65	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

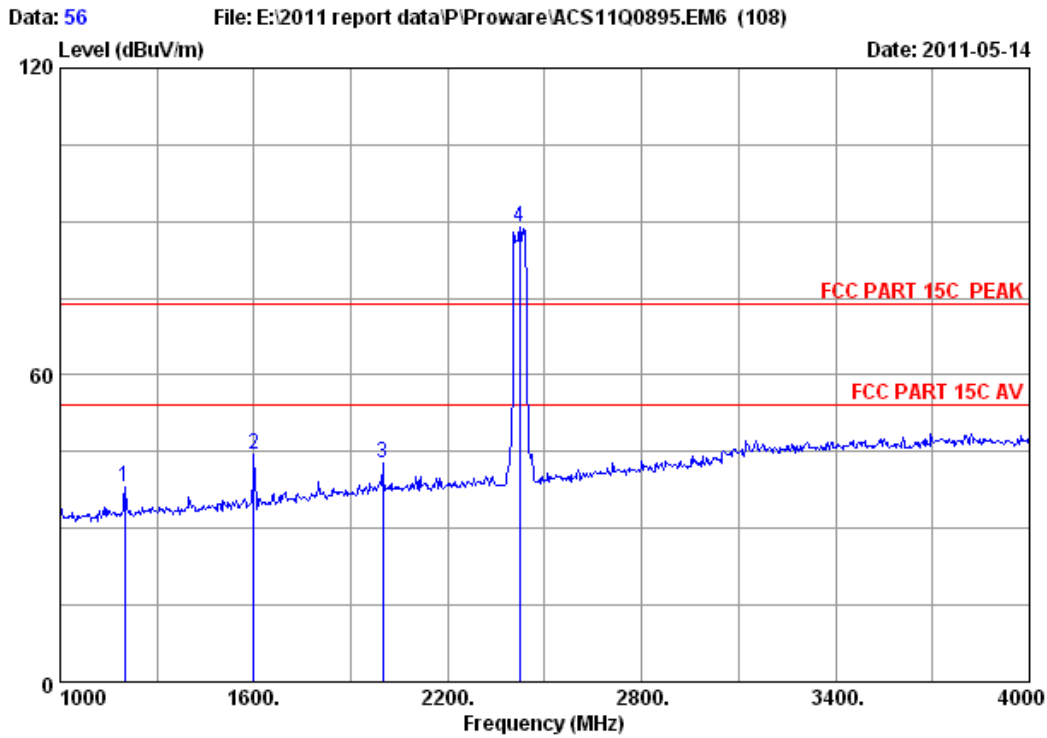


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.81	38.24	74.00	35.76	Peak
2	1600.000	26.96	5.91	36.94	48.38	44.31	74.00	29.69	Peak
3	1999.000	29.20	6.63	36.70	43.57	42.70	74.00	31.30	Peak
4	2422.000	29.46	7.46	36.61	88.46	88.77	74.00	-14.77	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

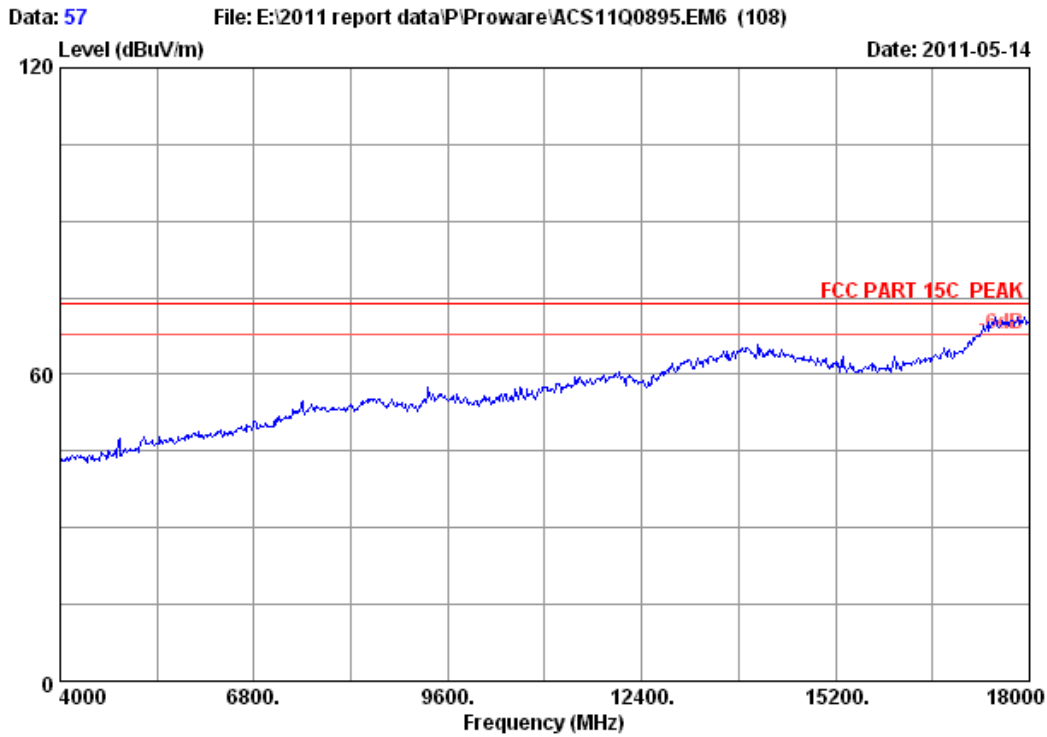

Site no. : 3m Chamber Data no. : 57  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
M/N : PW-RN501D

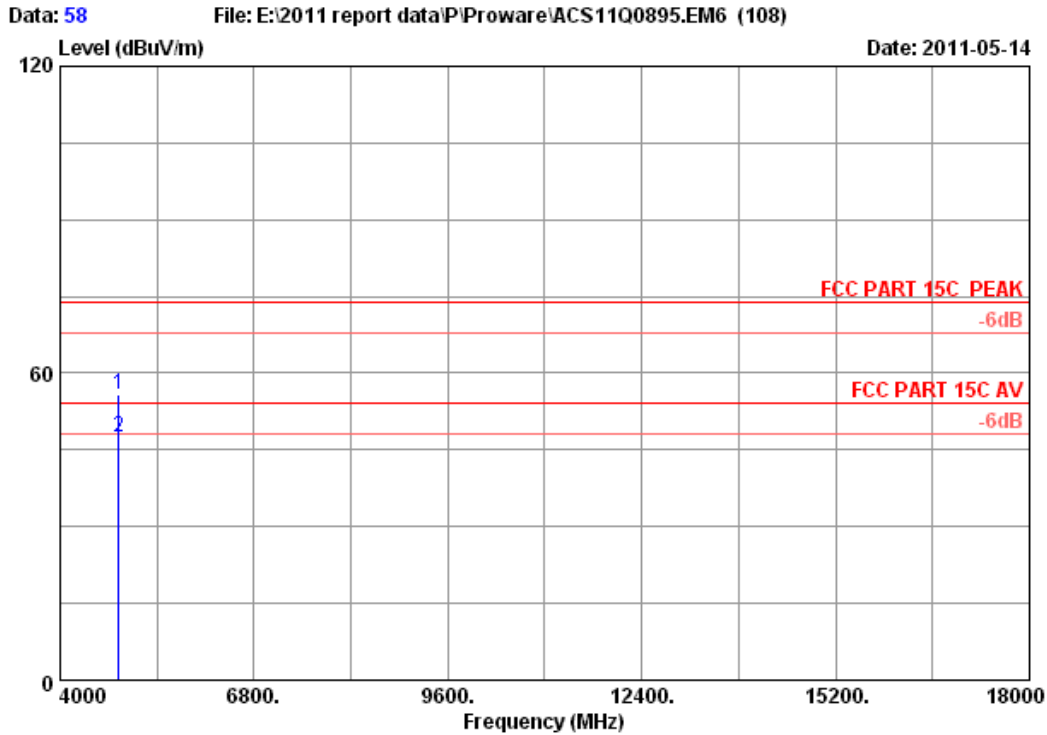


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	34.35	10.67	35.05	45.80	55.77	74.00	18.23	Peak
2	4844.000	34.35	10.67	35.05	37.47	47.44	54.00	6.56	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

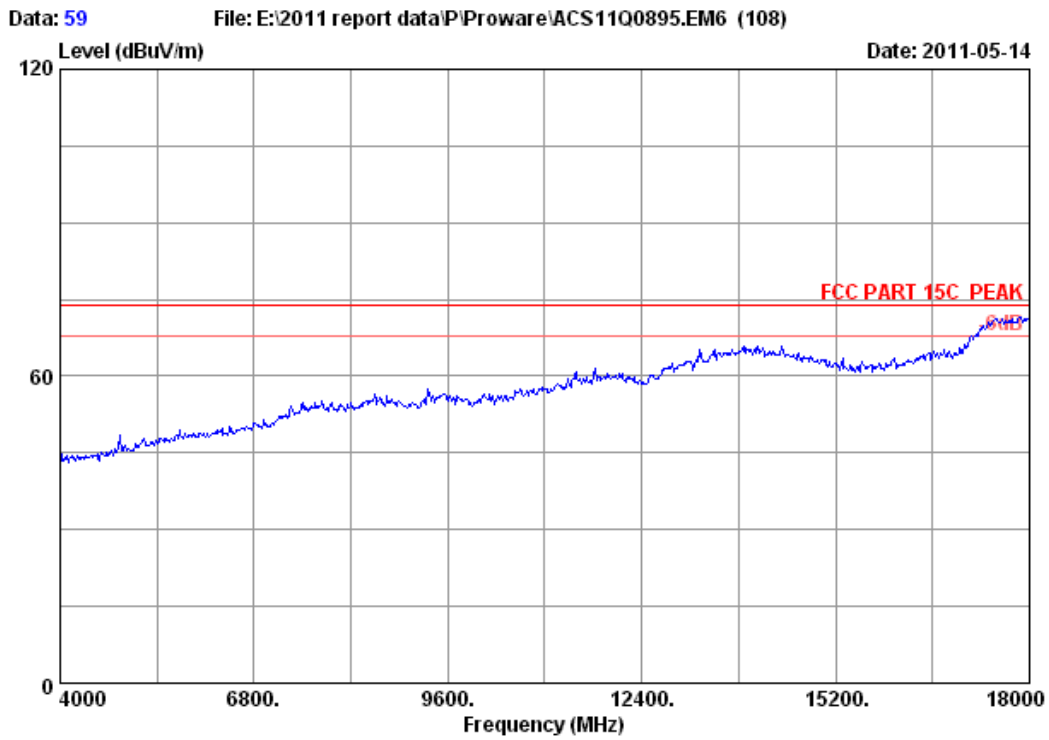

Site no. : 3m Chamber Data no. : 59  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
M/N : PW-RN501D

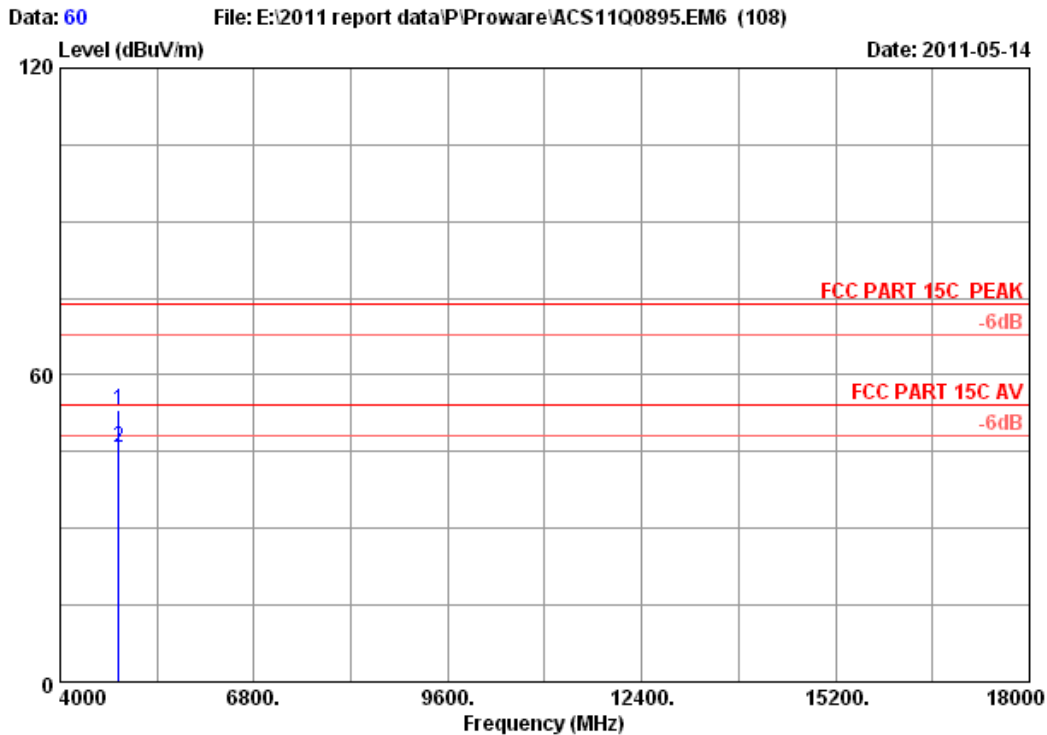


Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.000	34.35	10.67	35.05	43.04	53.01	74.00	20.99	Peak
2	4844.000	34.35	10.67	35.05	35.78	45.75	54.00	8.25	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

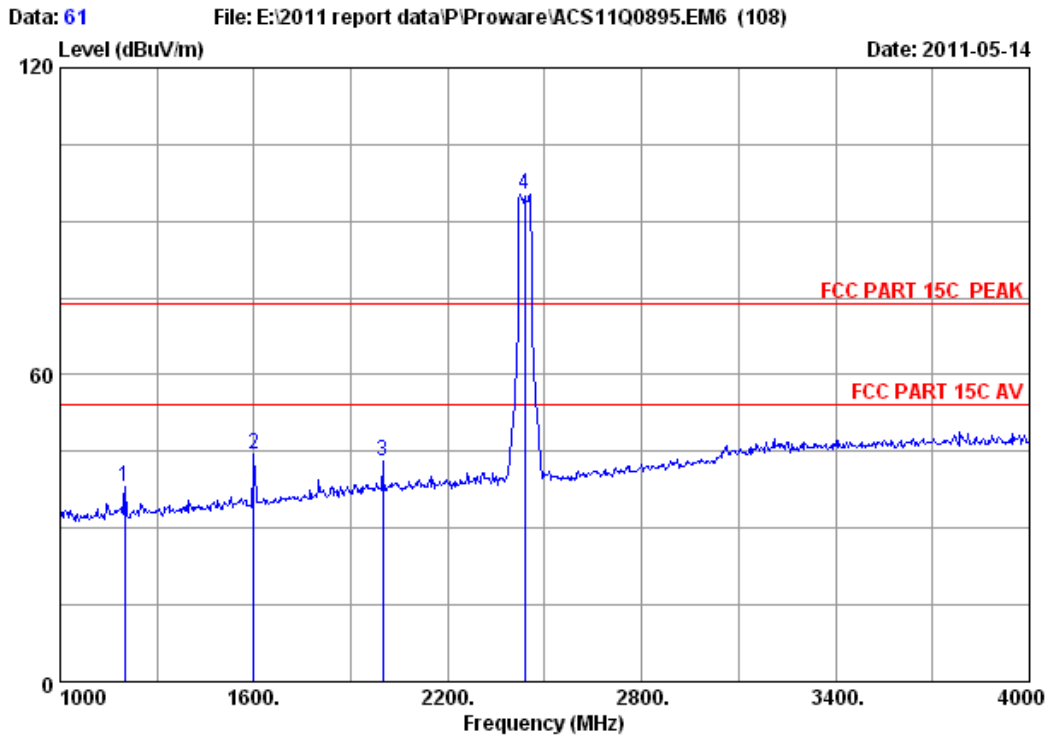


Site no. : 3m Chamber Data no. : 61  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	44.72	38.15	74.00	35.85	Peak
2	1600.000	26.96	5.91	36.94	48.48	44.41	74.00	29.59	Peak
3	1999.000	29.20	6.63	36.70	43.94	43.07	74.00	30.93	Peak
4	2437.000	29.47	7.46	36.61	95.05	95.37	74.00	-21.37	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

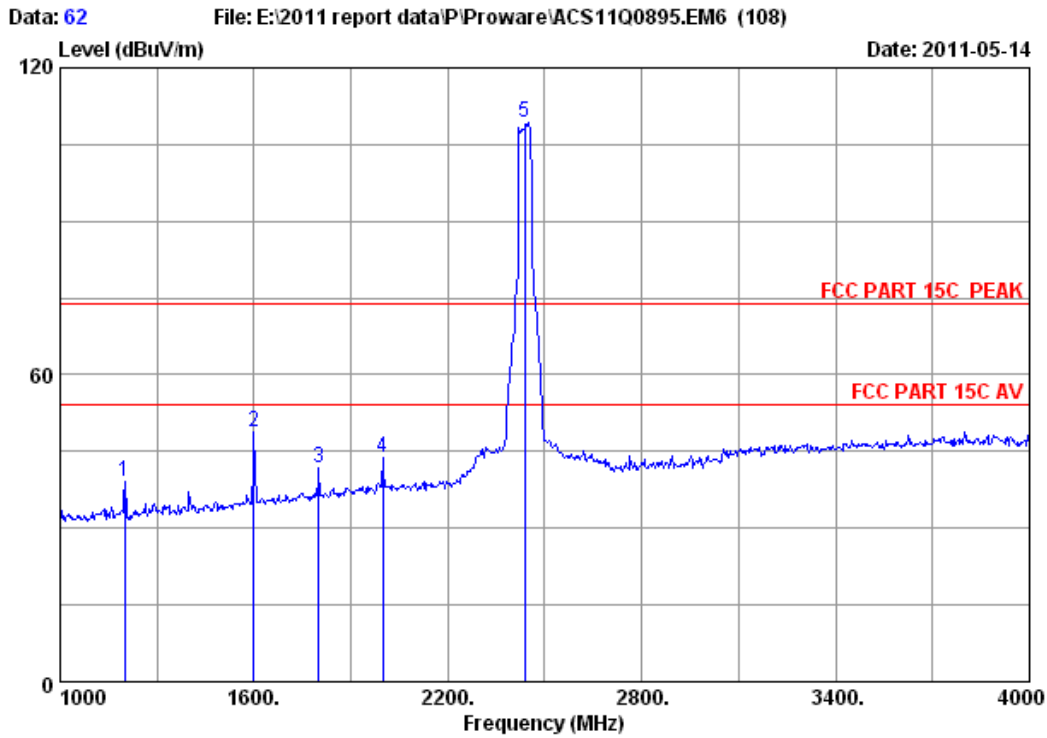


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.68	39.11	74.00	34.89	Peak
2	1600.000	26.96	5.91	36.94	52.78	48.71	74.00	25.29	Peak
3	1801.000	28.08	6.29	36.83	44.20	41.74	74.00	32.26	Peak
4	1999.000	29.20	6.63	36.70	44.61	43.74	74.00	30.26	Peak
5	2437.000	29.47	7.46	36.61	108.98	109.30	74.00	-35.30	Peak


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



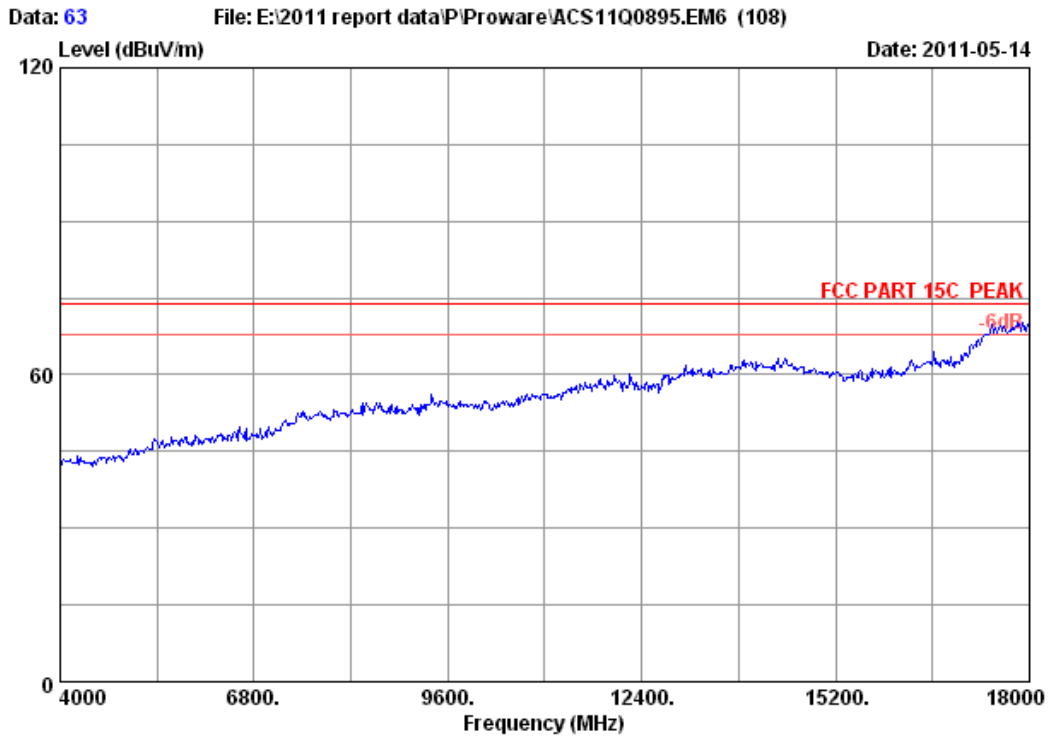

Site no. : 3m Chamber Data no. : 63  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH4 2437MHz Tx  
M/N : PW-RN501D

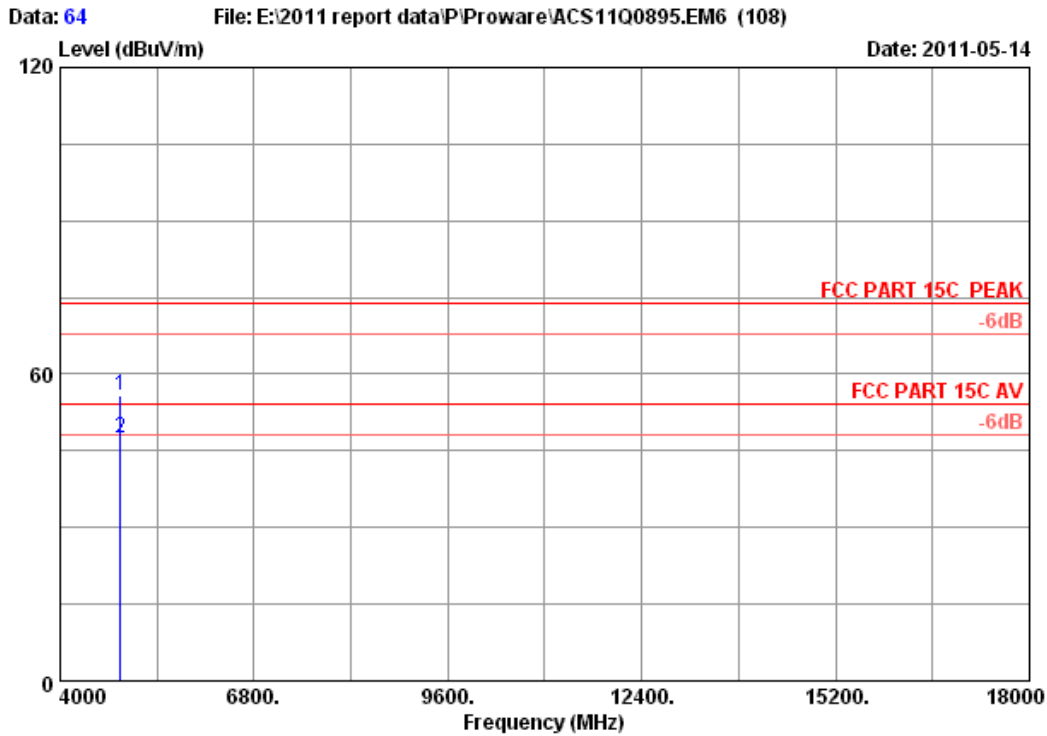


Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx  
 M/N : PW-RN501D


	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	45.86	55.93	74.00	18.07	Peak
2	4874.000	34.41	10.69	35.03	37.49	47.56	54.00	6.44	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

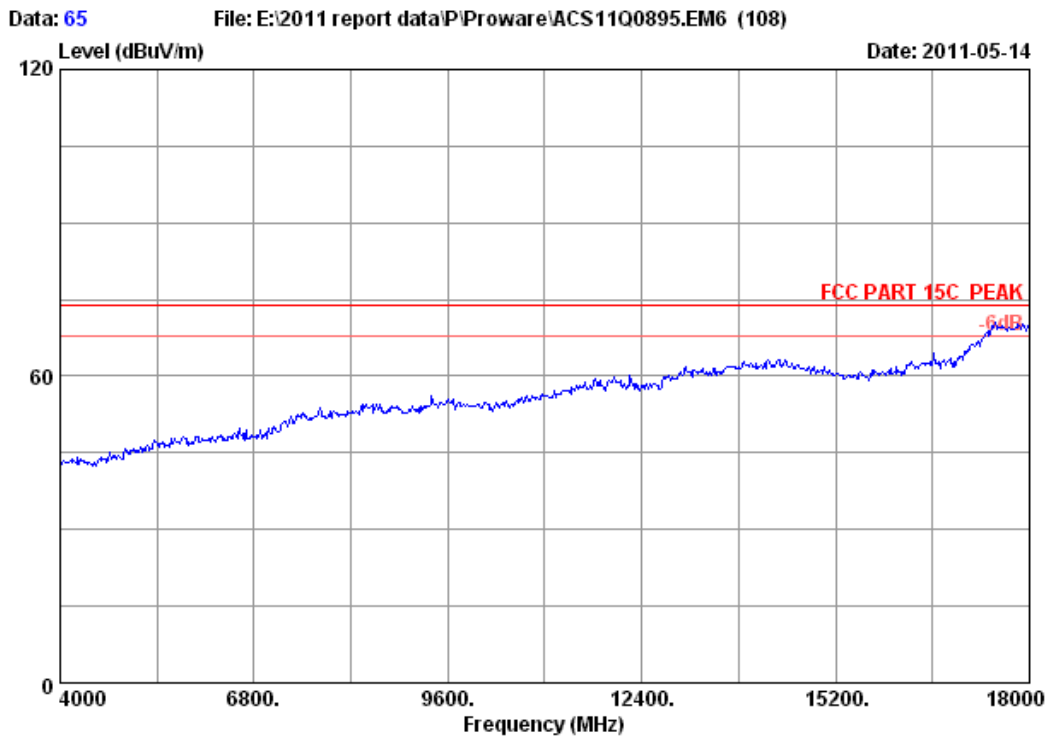

Site no.	: 3m Chamber	Data no. :	65
Dis. / Ant.	: 3m 3115(0911)	Ant. pol. :	HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23*C/54%	Engineer :	Sunny-lu
EUT	: 300Mbps Wireless N Router		
Power	: DC 9V From Adapter Input AC 120V/60Hz		
Test mode	: IEEE802.11n HT40 CH4 2437MHz Tx		
M/N	: PW-RN501D		

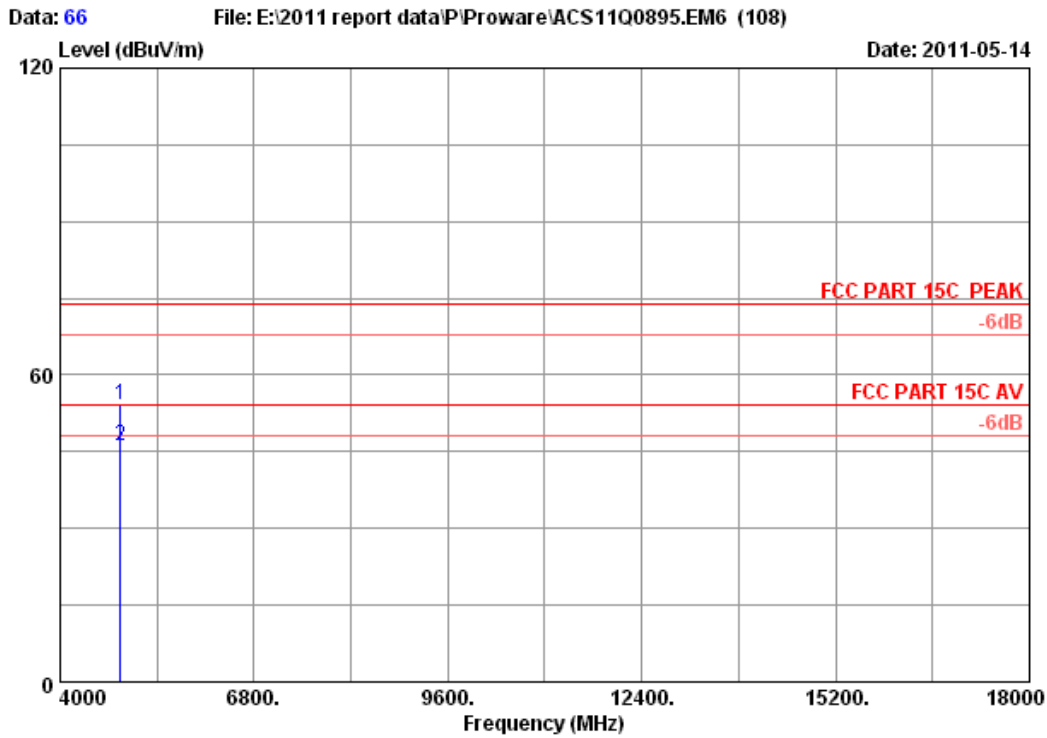


Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH4 2437MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.000	34.41	10.69	35.03	43.93	54.00	74.00	20.00	Peak
2	4874.000	34.41	10.69	35.03	36.07	46.14	54.00	7.86	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

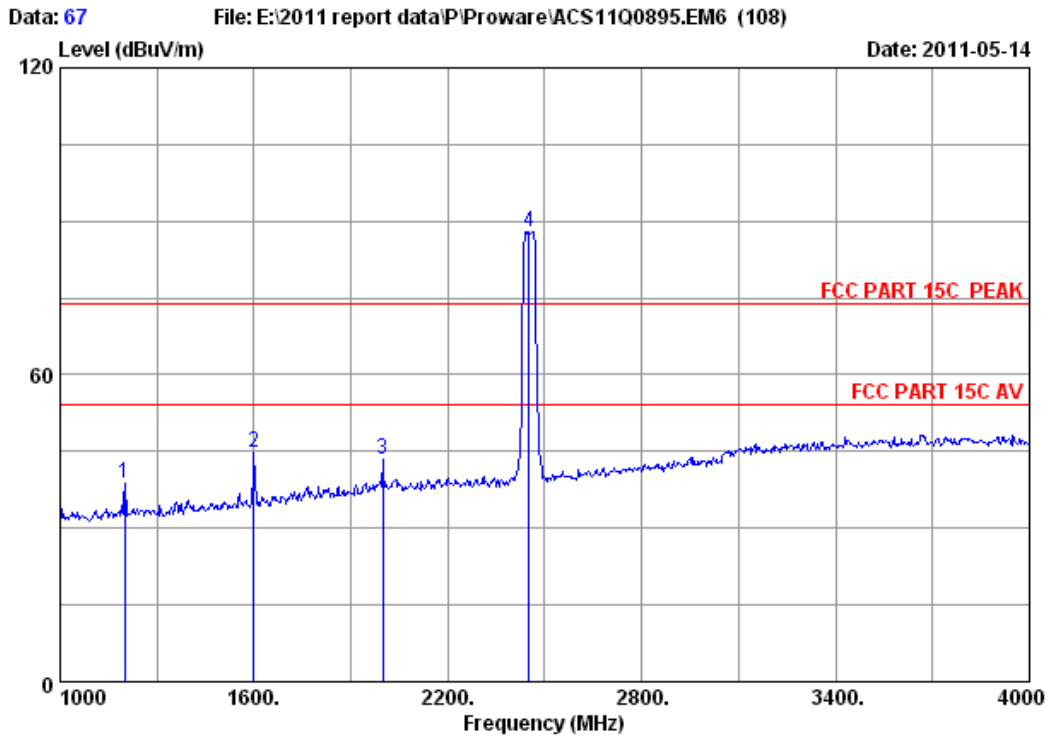


Site no. : 3m Chamber Data no. : 67  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.23	38.66	74.00	35.34	Peak
2	1600.000	26.96	5.91	36.94	48.86	44.79	74.00	29.21	Peak
3	1999.000	29.20	6.63	36.70	44.33	43.46	74.00	30.54	Peak
4	2452.000	29.47	7.50	36.61	87.70	88.06	74.00	-14.06	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

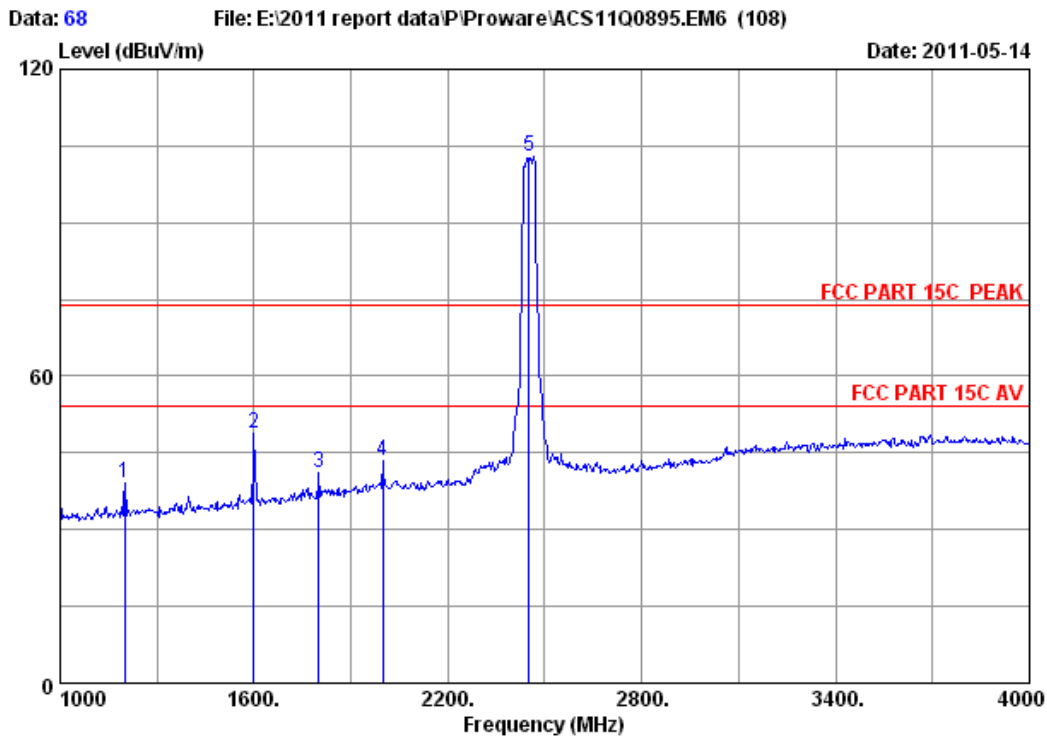


Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D


	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.000	25.81	5.16	37.54	45.71	39.14	74.00	34.86	Peak
2	1600.000	26.96	5.91	36.94	52.74	48.67	74.00	25.33	Peak
3	1801.000	28.08	6.29	36.83	43.42	40.96	74.00	33.04	Peak
4	1999.000	29.20	6.63	36.70	44.33	43.46	74.00	30.54	Peak
5	2452.000	29.47	7.50	36.61	102.53	102.89	74.00	-28.89	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

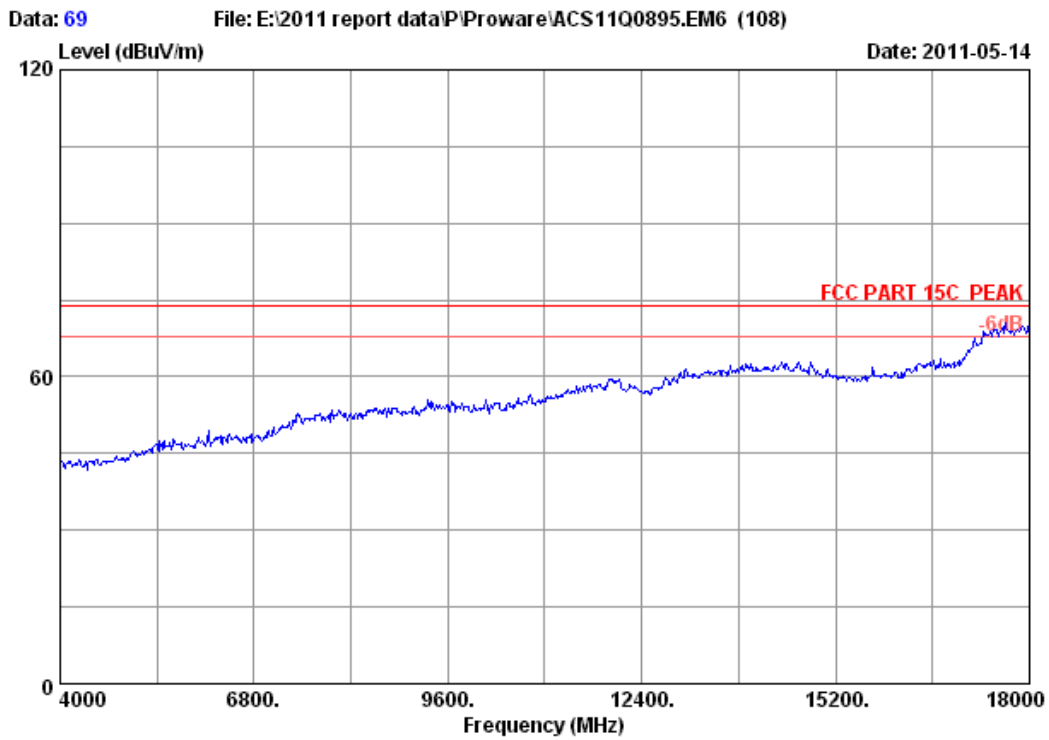

Site no. : 3m Chamber Data no. : 69  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
M/N : PW-RN501D

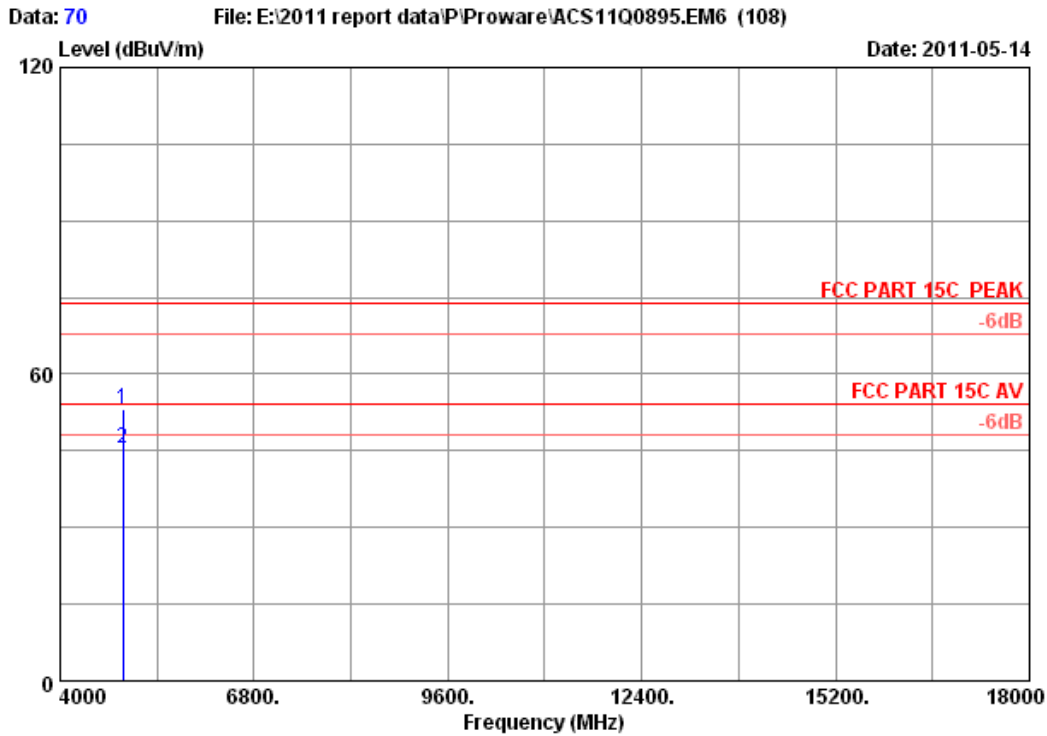


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4904.000	34.46	10.74	35.00	42.99	53.19	74.00	20.81	Peak
2	4904.000	34.46	10.74	35.00	35.19	45.39	54.00	8.61	Average


Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



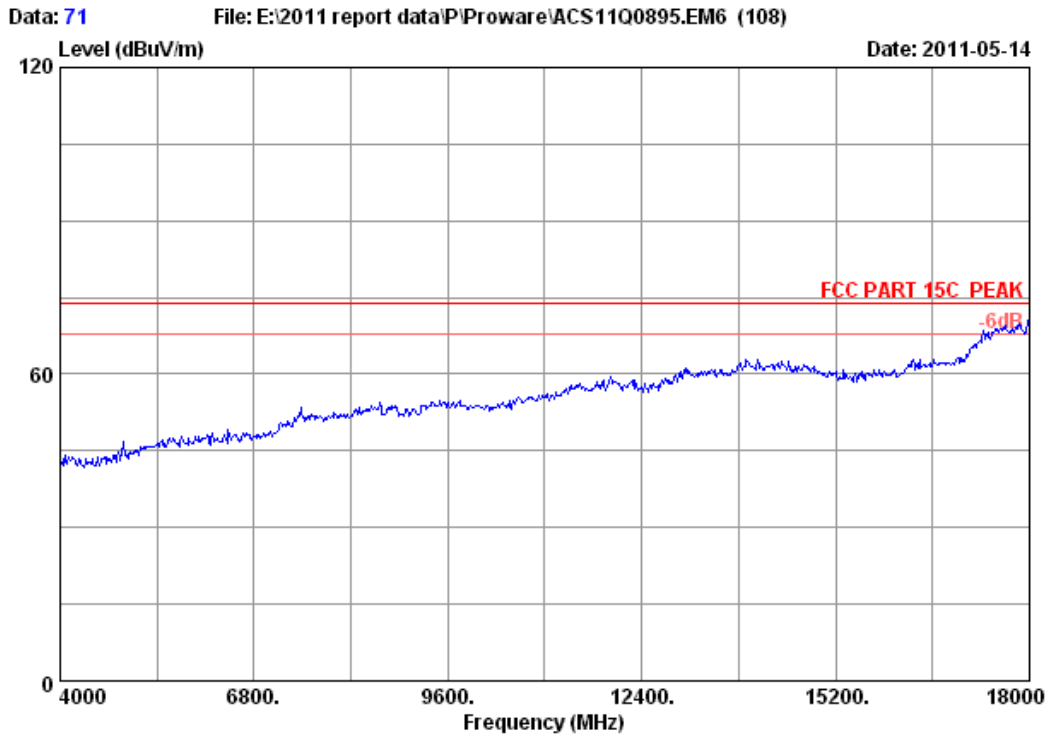

Site no. : 3m Chamber Data no. : 71  
Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
EUT : 300Mbps Wireless N Router  
Power : DC 9V From Adapter Input AC 120V/60Hz  
Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
M/N : PW-RN501D

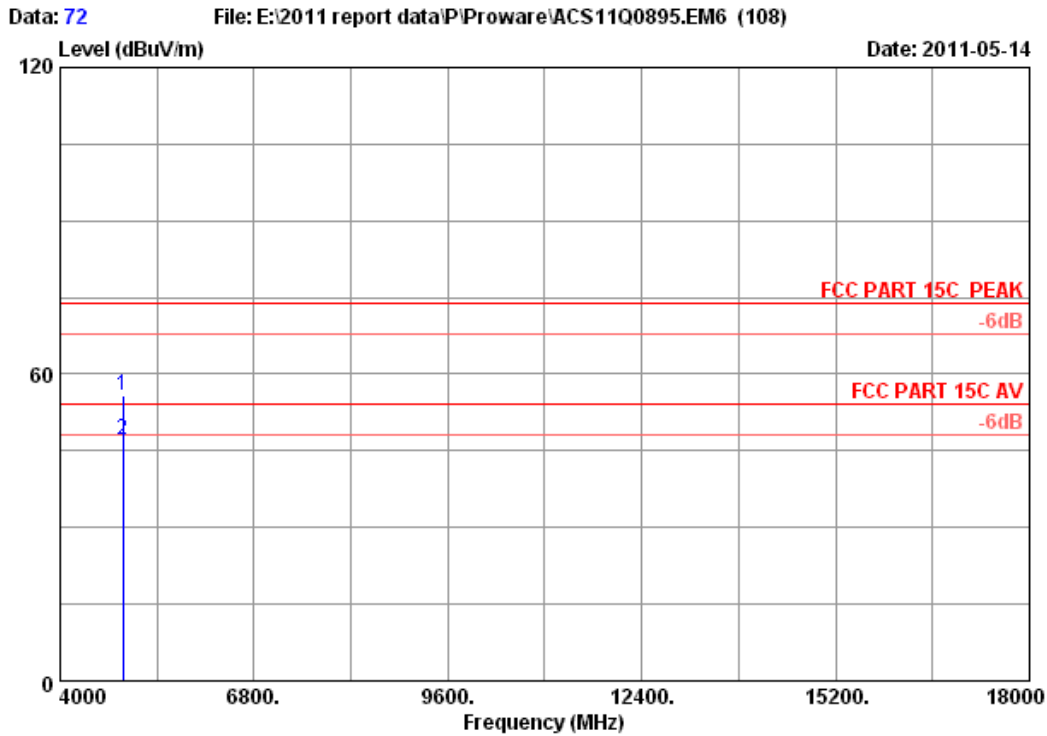

Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	4904.000	34.46	10.74	35.00	45.46	55.66	74.00	18.34	Peak
2	4904.000	34.46	10.74	35.00	36.97	47.17	54.00	6.83	Average

Remarks:  
 1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

## 5. CONDUCTED SPURIOUS EMISSIONS

### 5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1Year

### 5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.



### 5.3. Test Procedure



The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions detected.



### 5.4. Test result


**PASS** (The testing data was attached in the next pages.)

Chain0  
 Test Mode: IEEE 802.11b TX  
 CH1

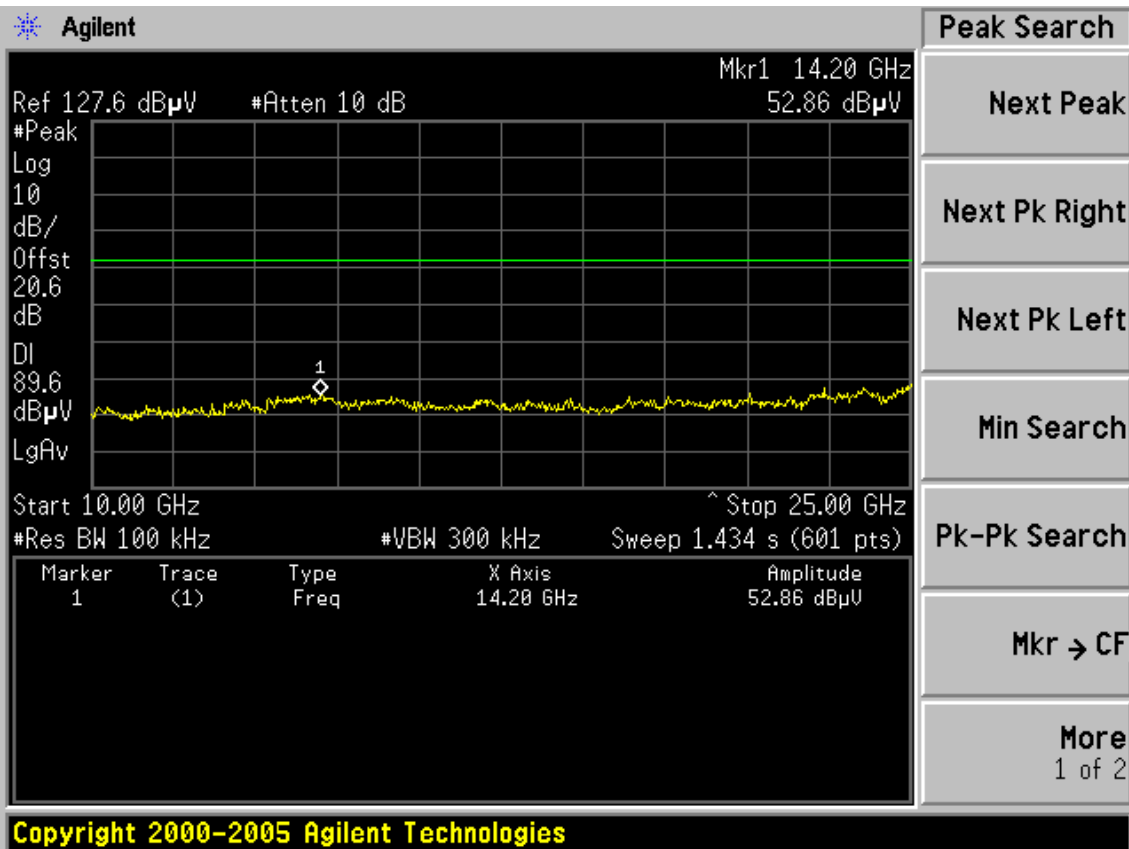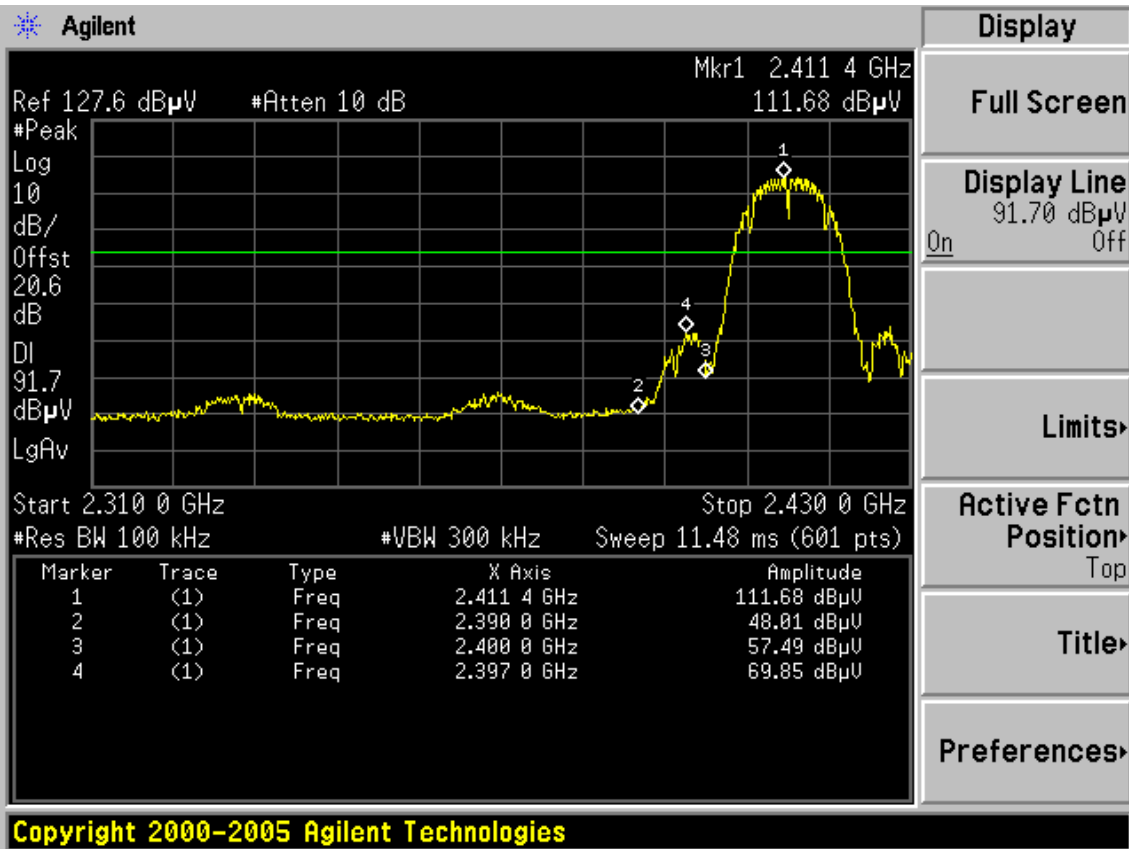

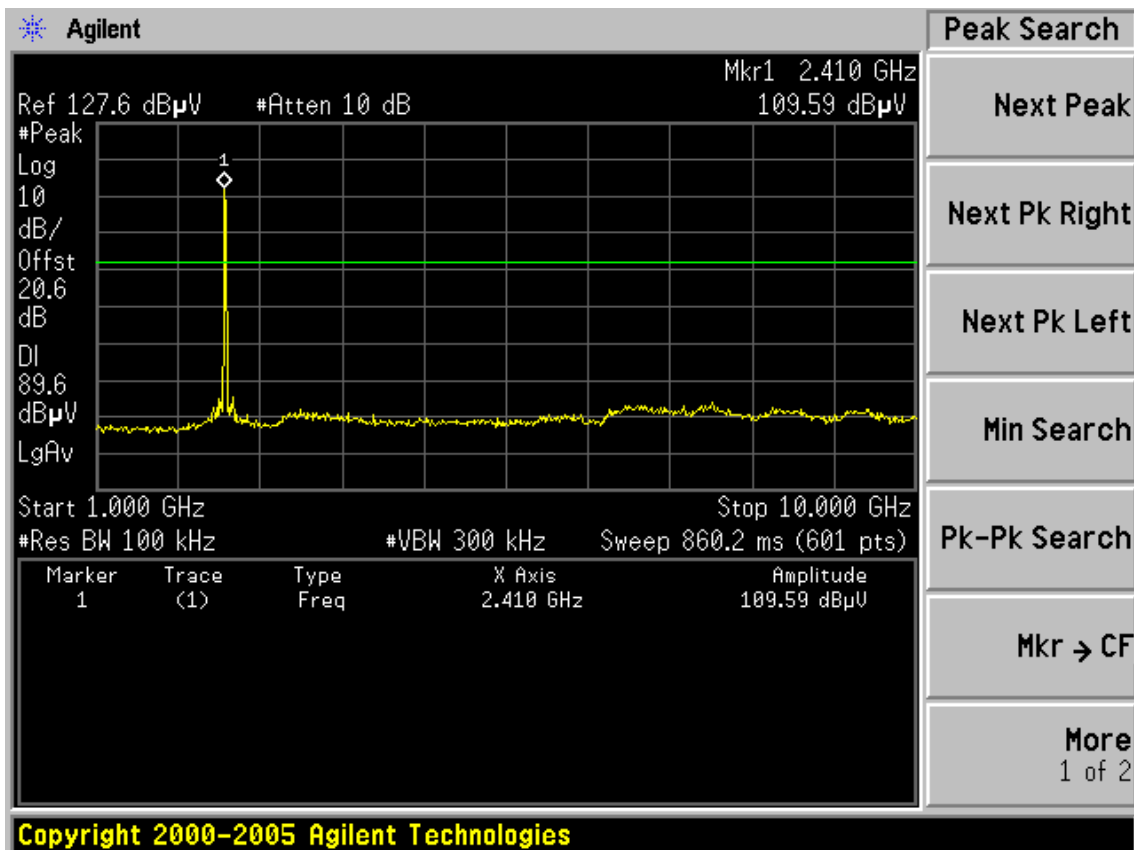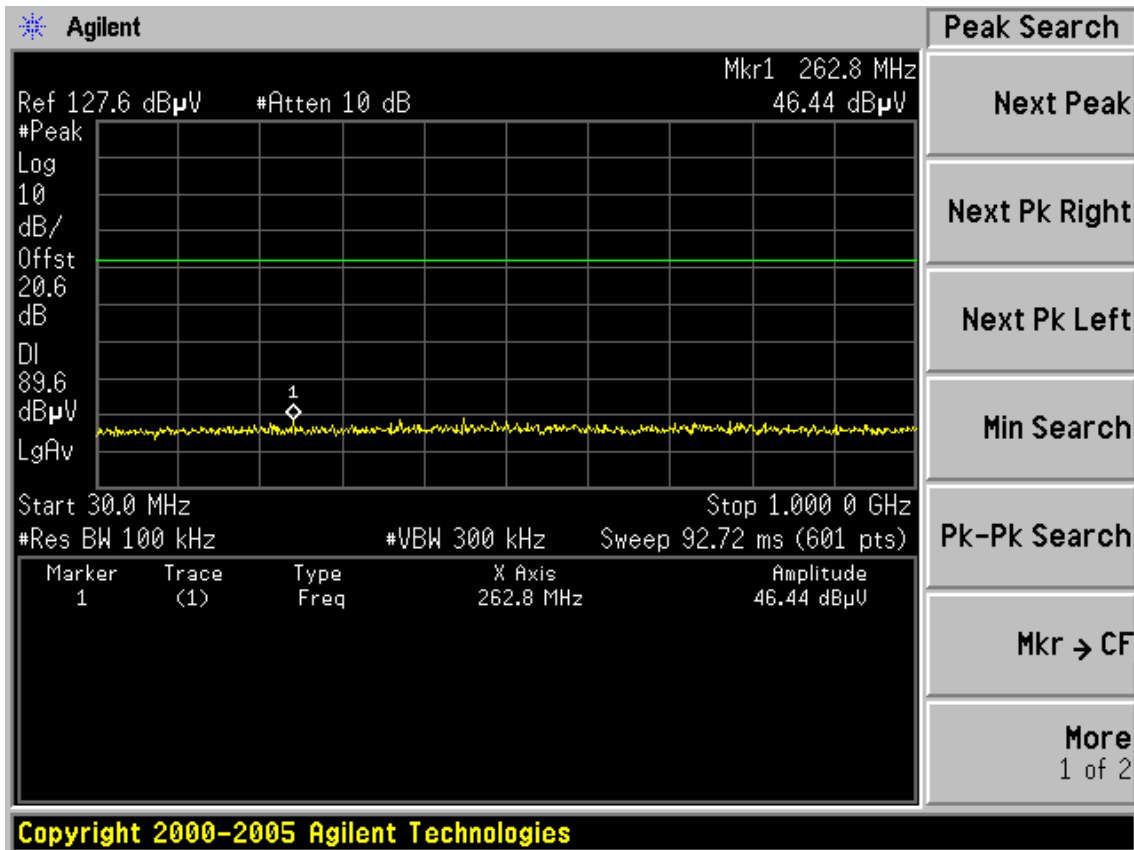


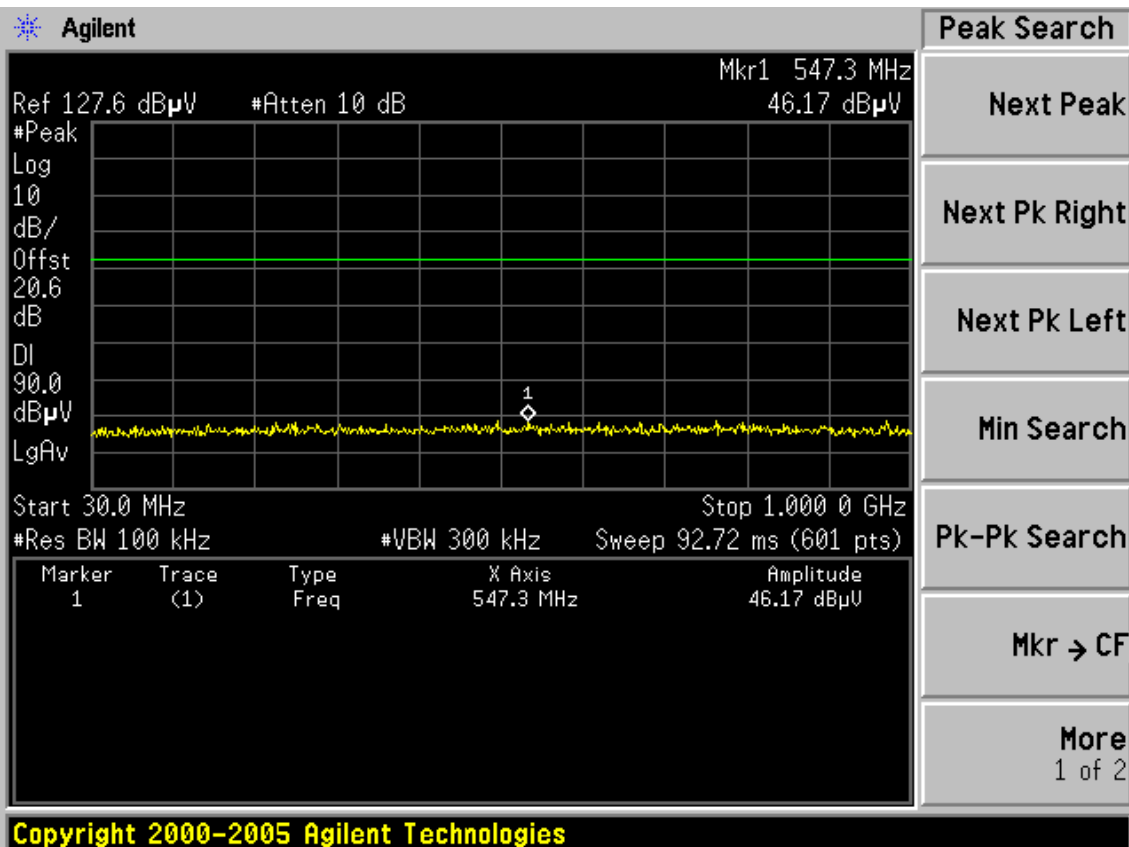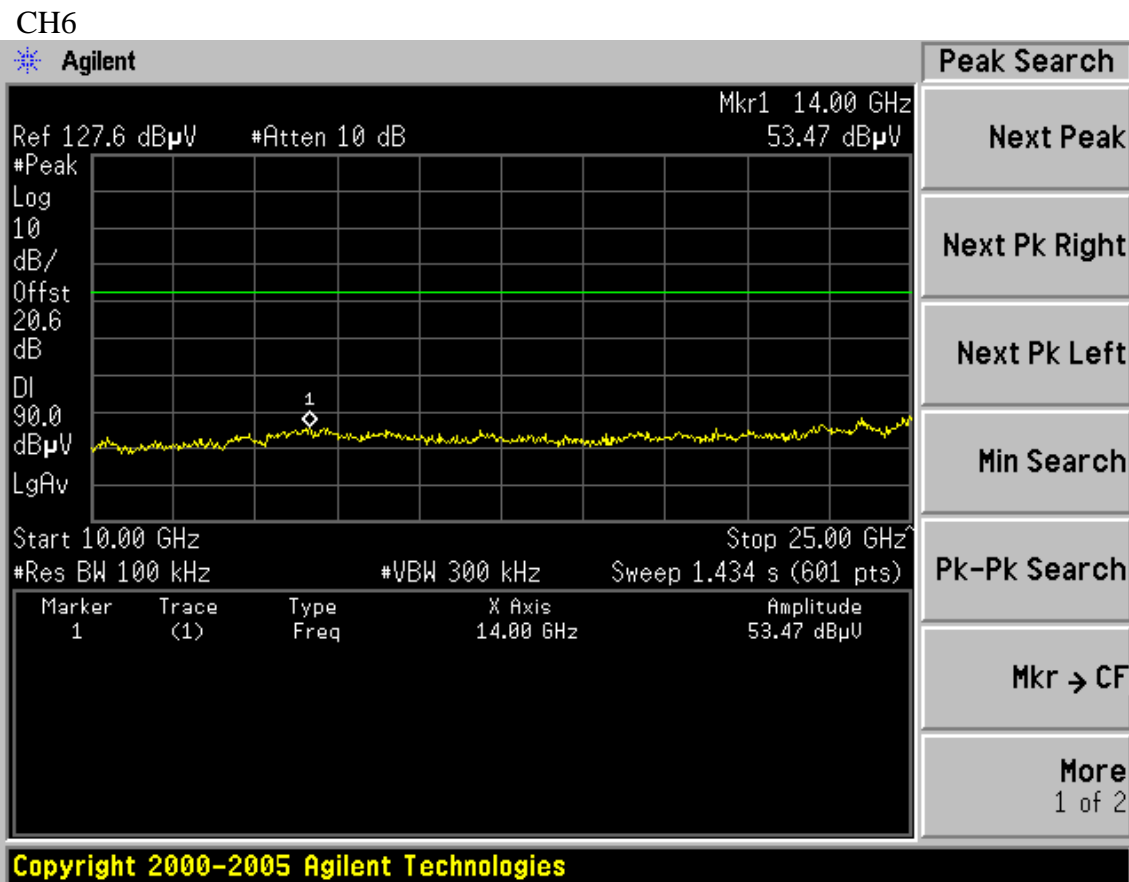


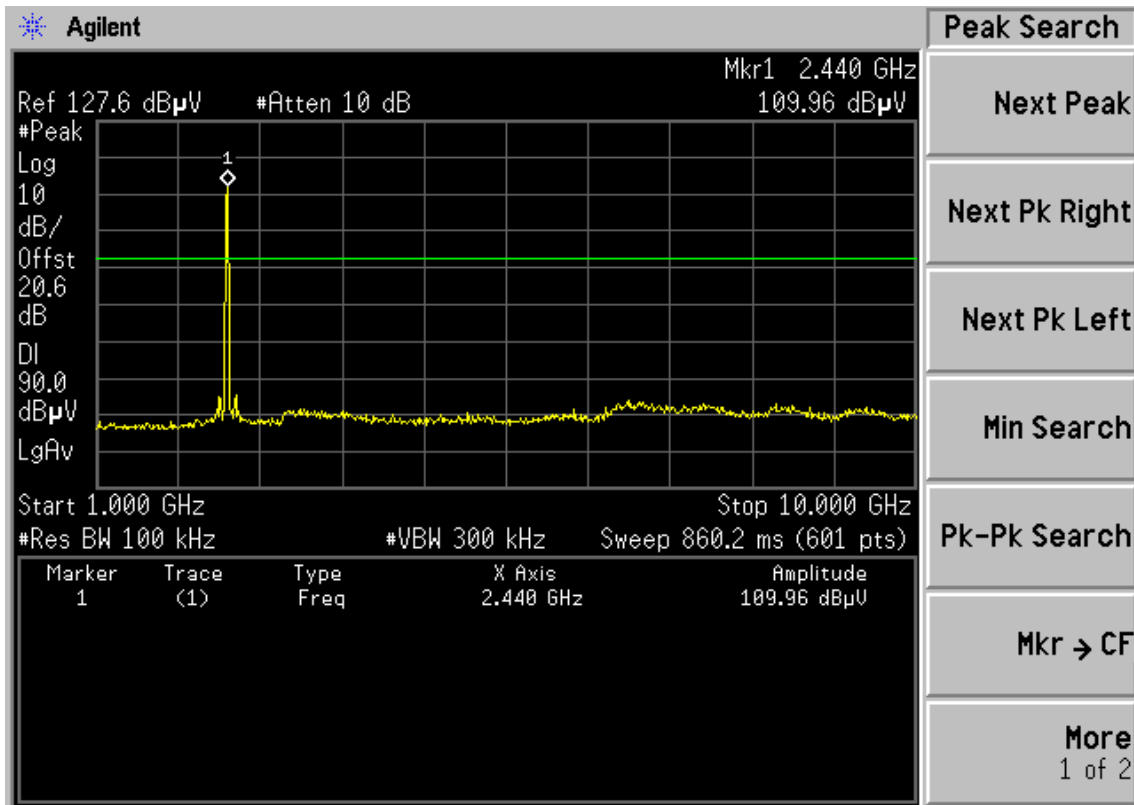


Copyright 2000-2005 Agilent Technologies


CH11

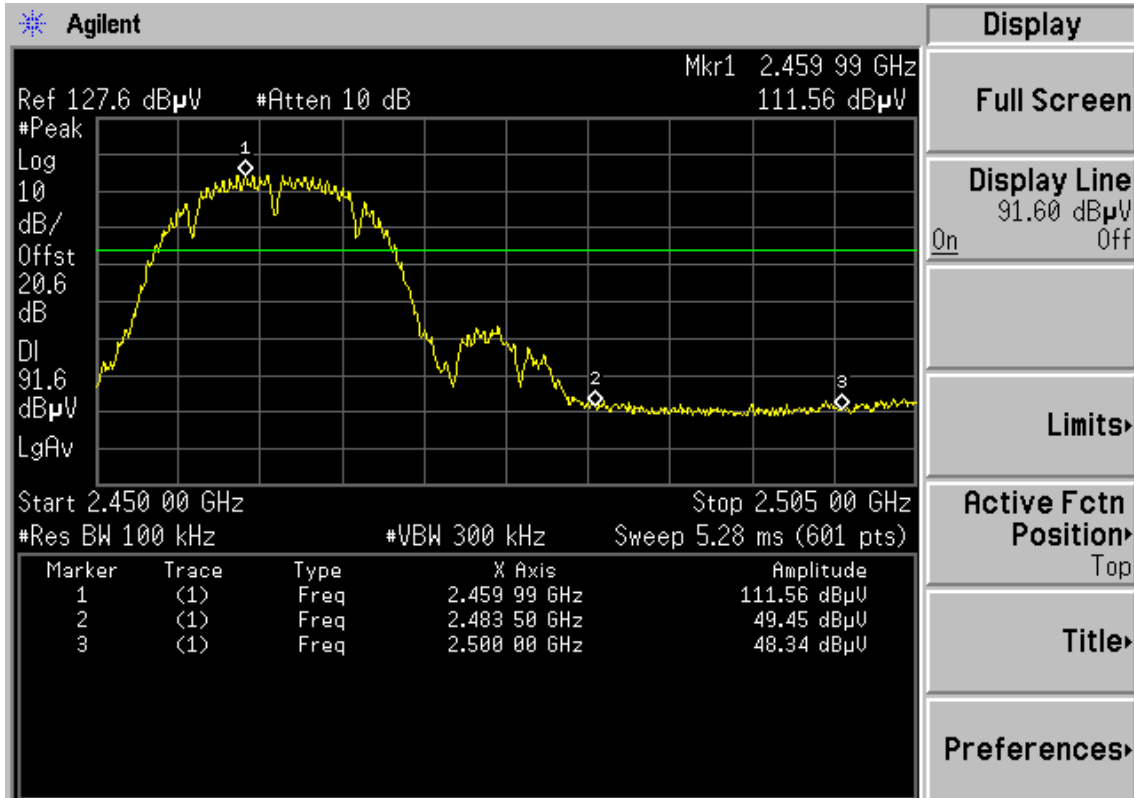


Copyright 2000-2005 Agilent Technologies

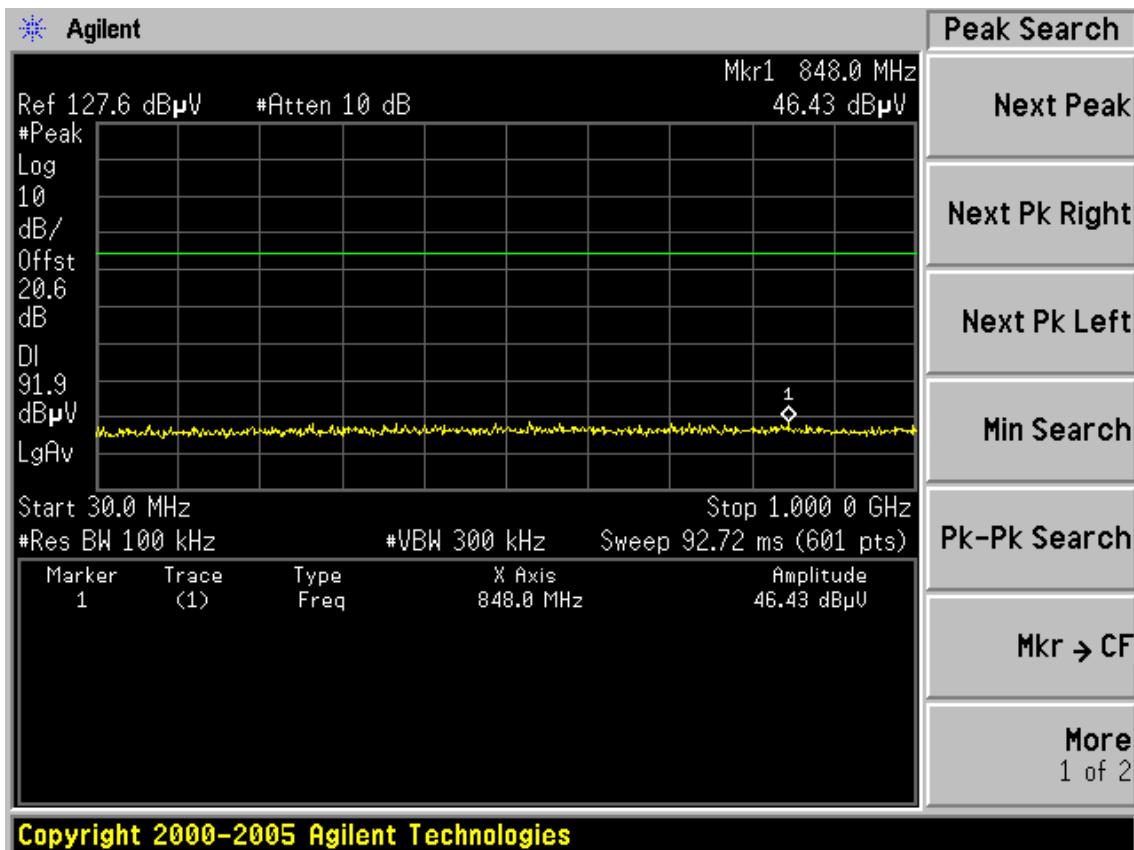
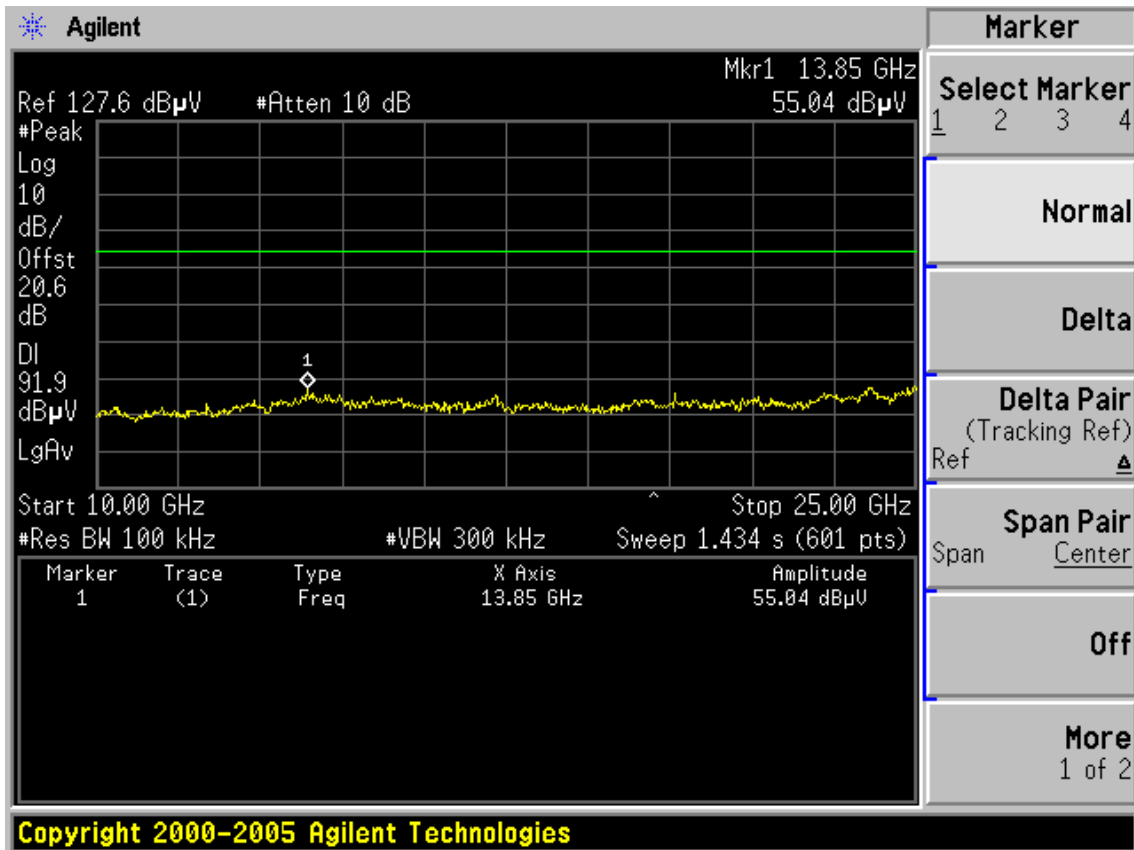





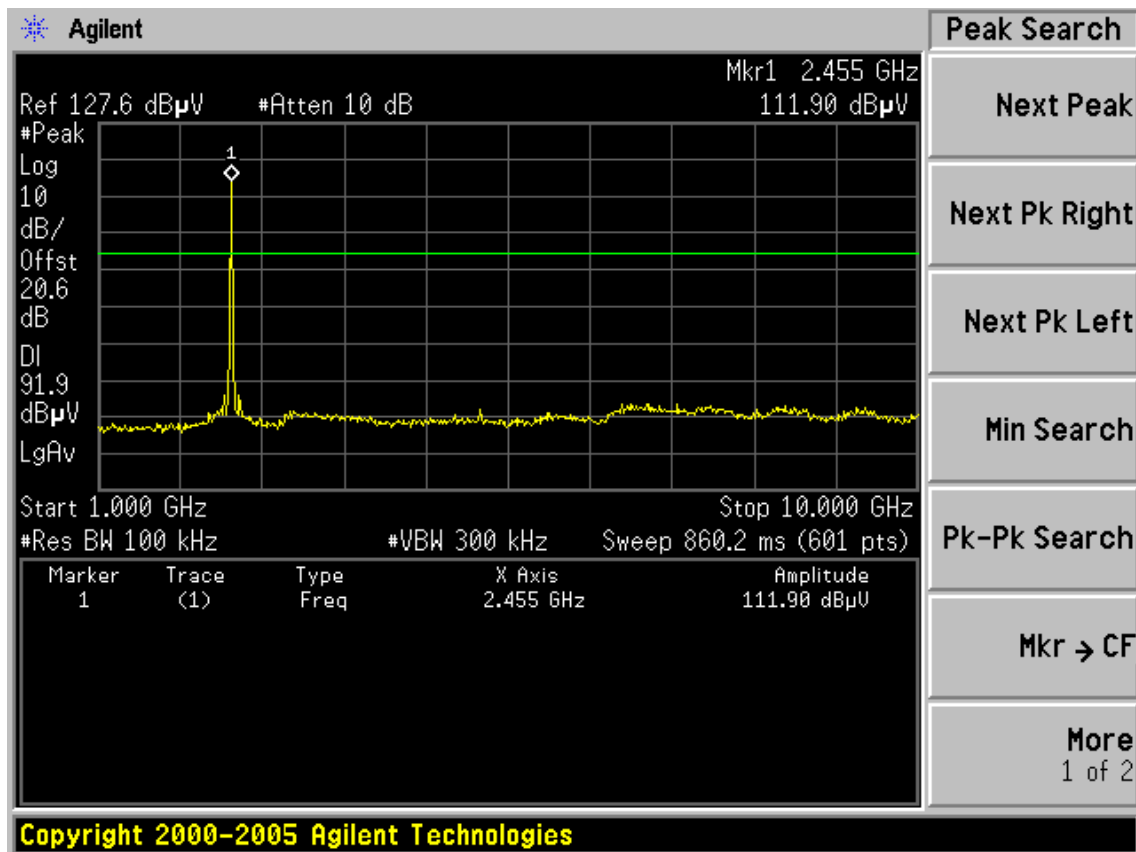


Test Mode: IEEE 802.11g TX  
CH1


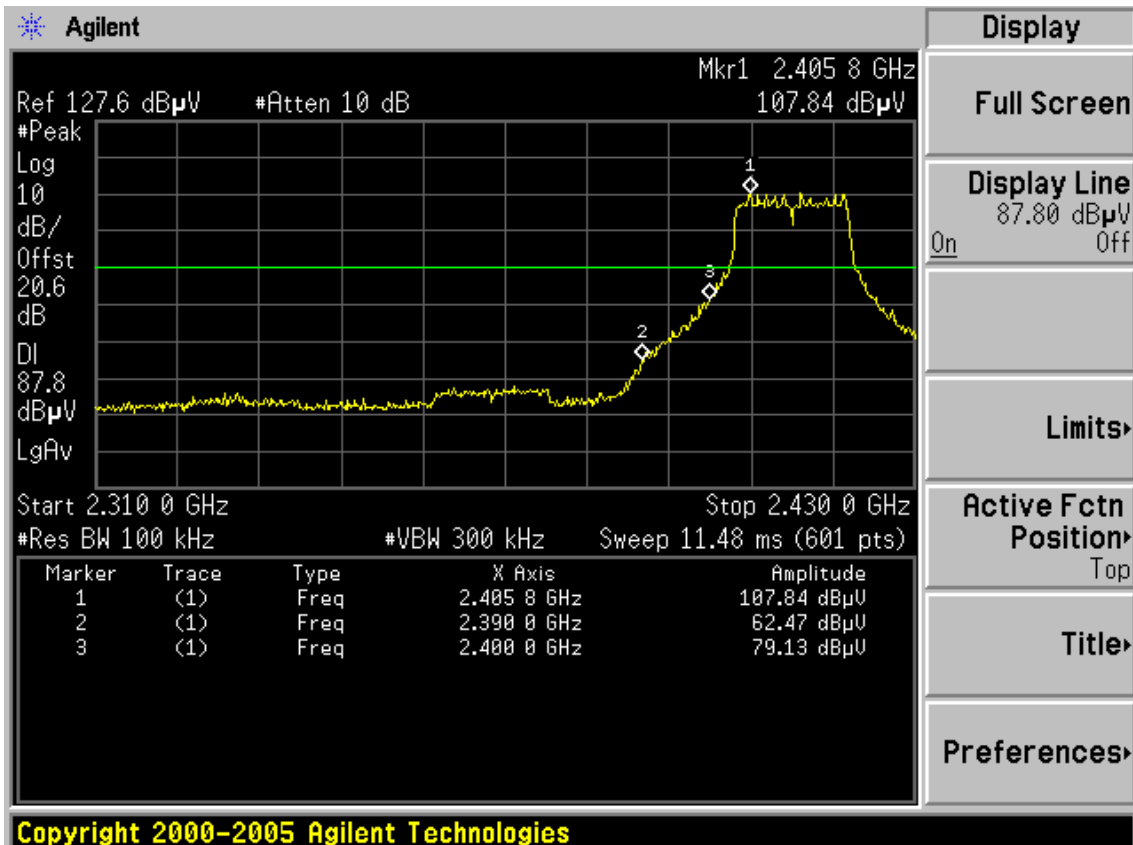


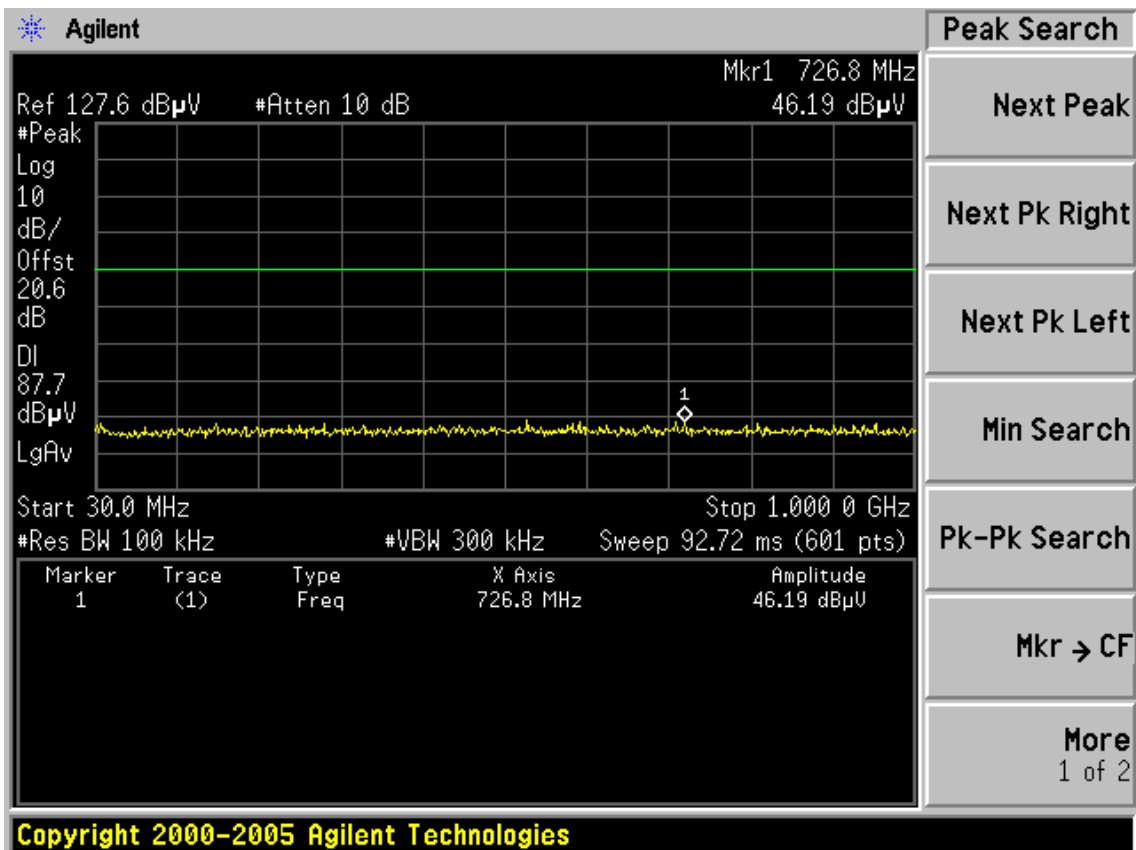
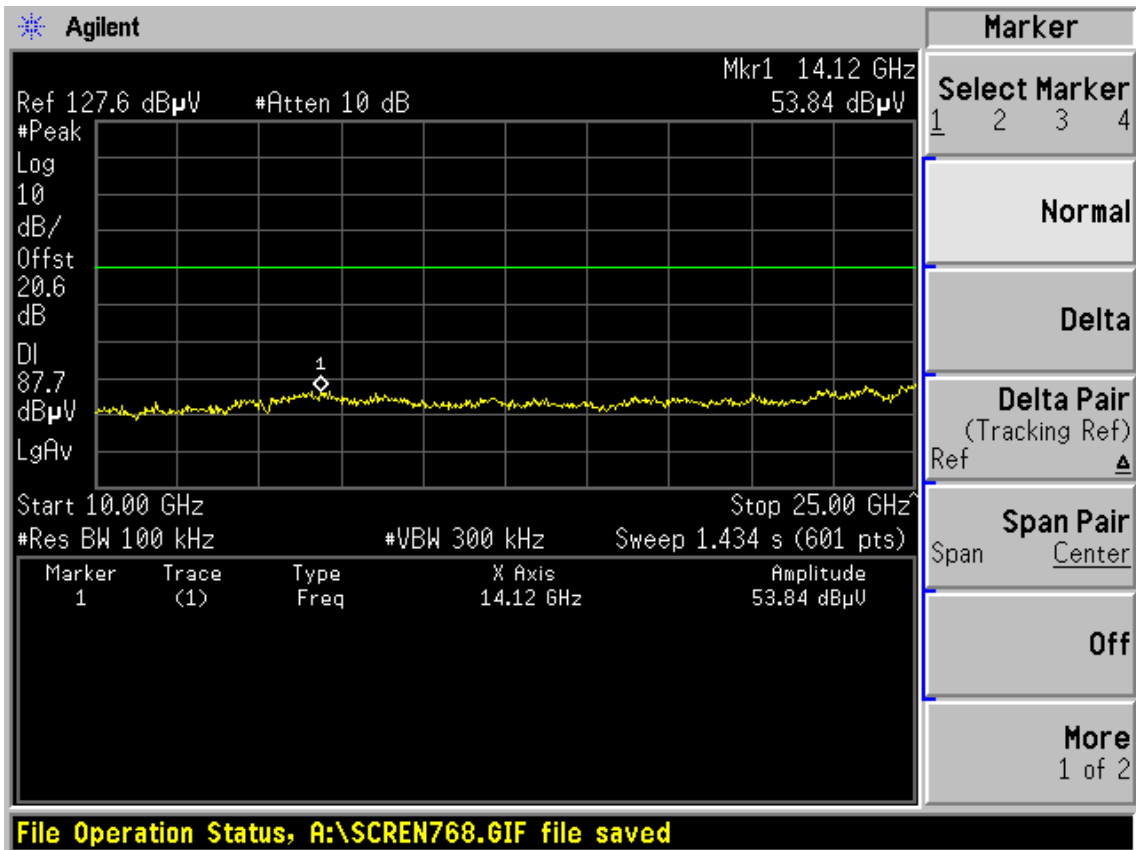



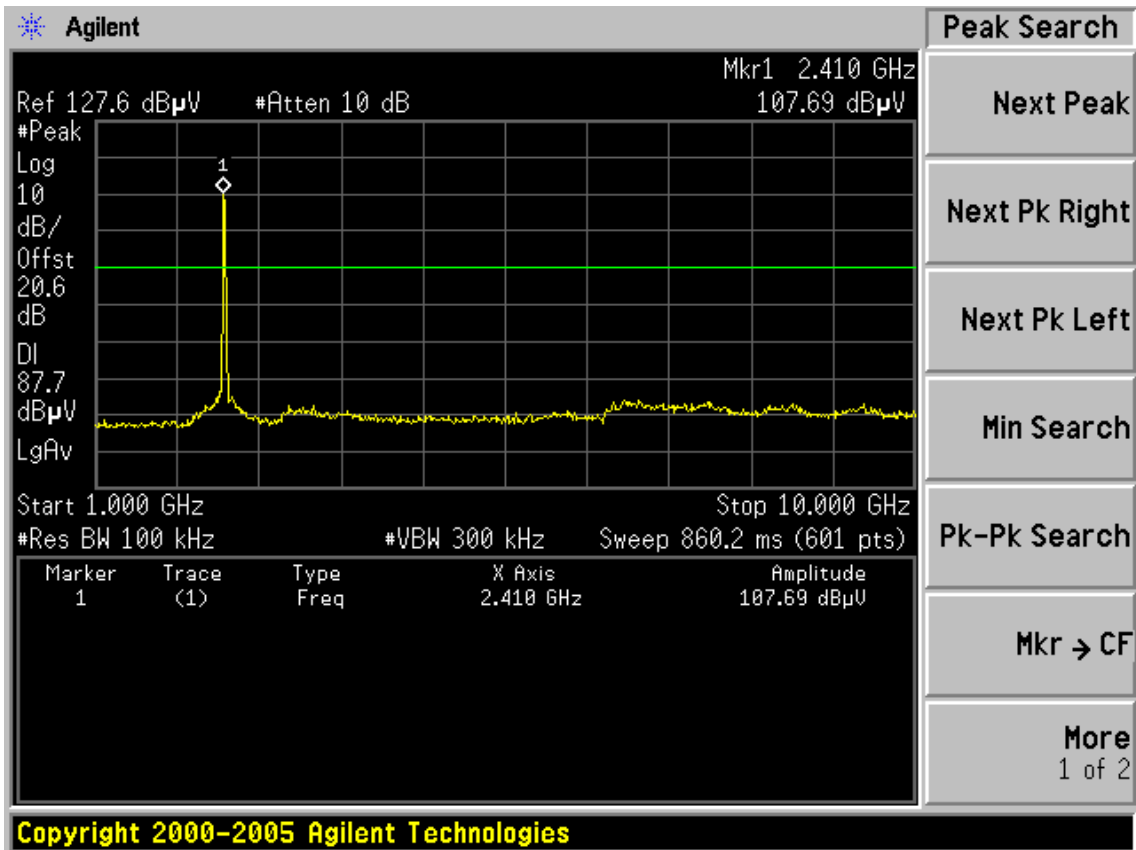


CH6


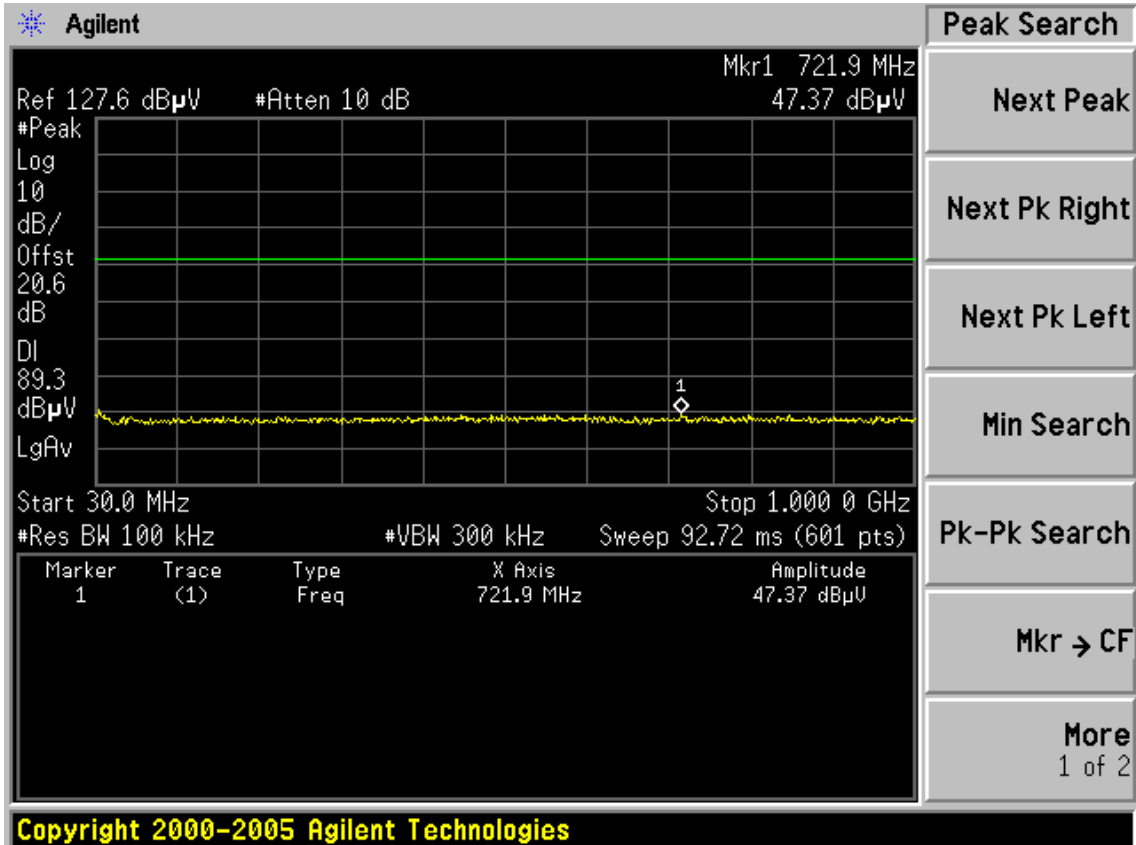


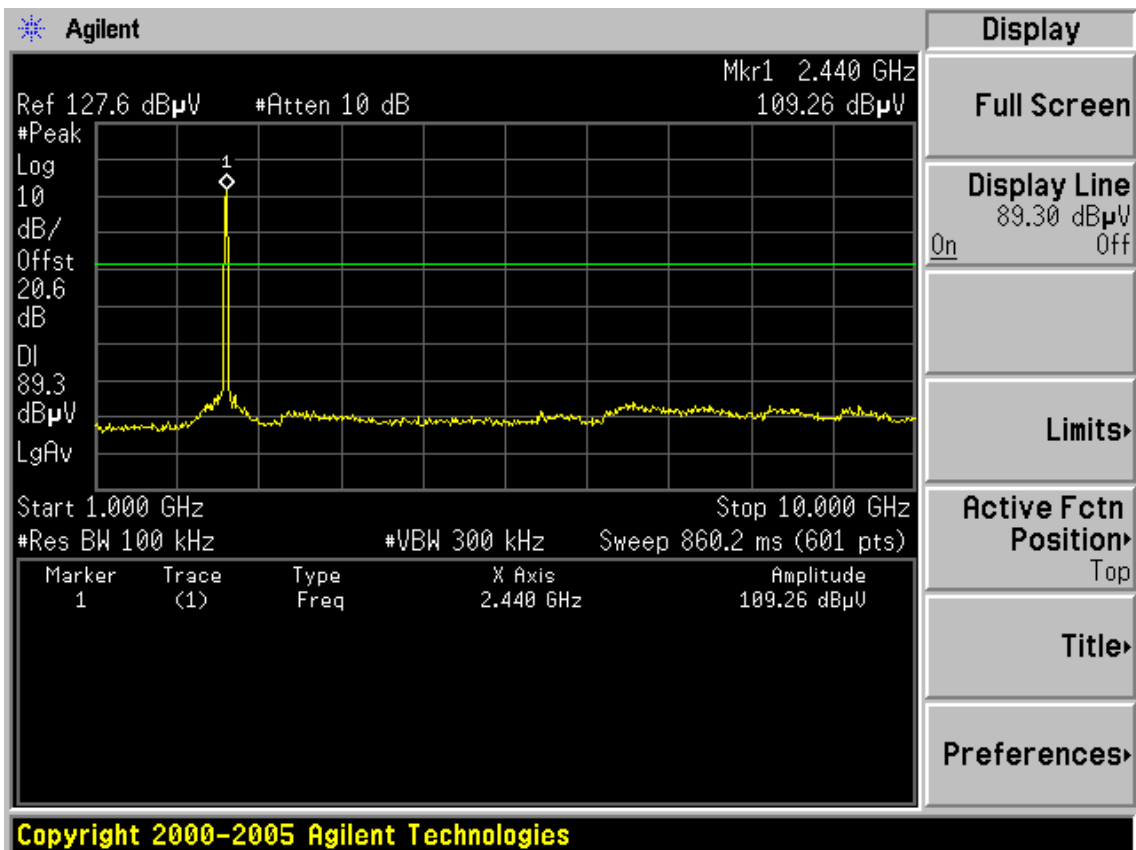
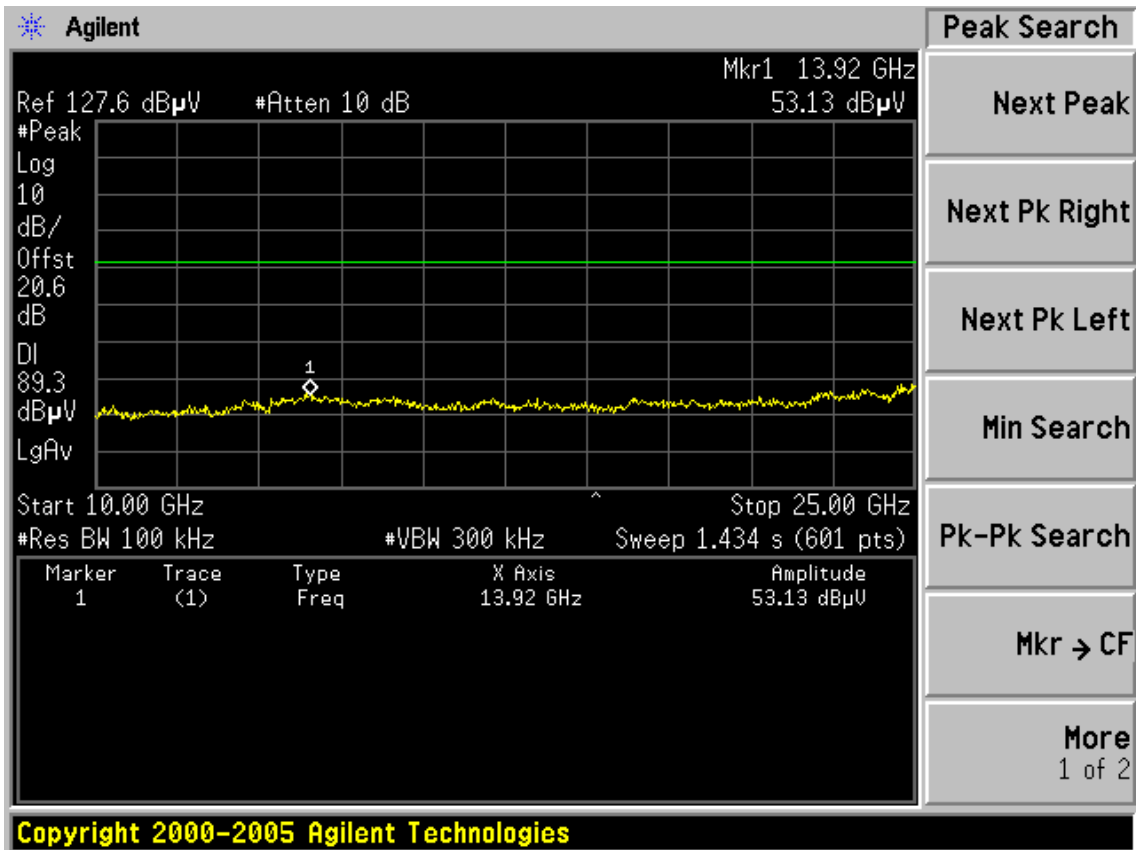


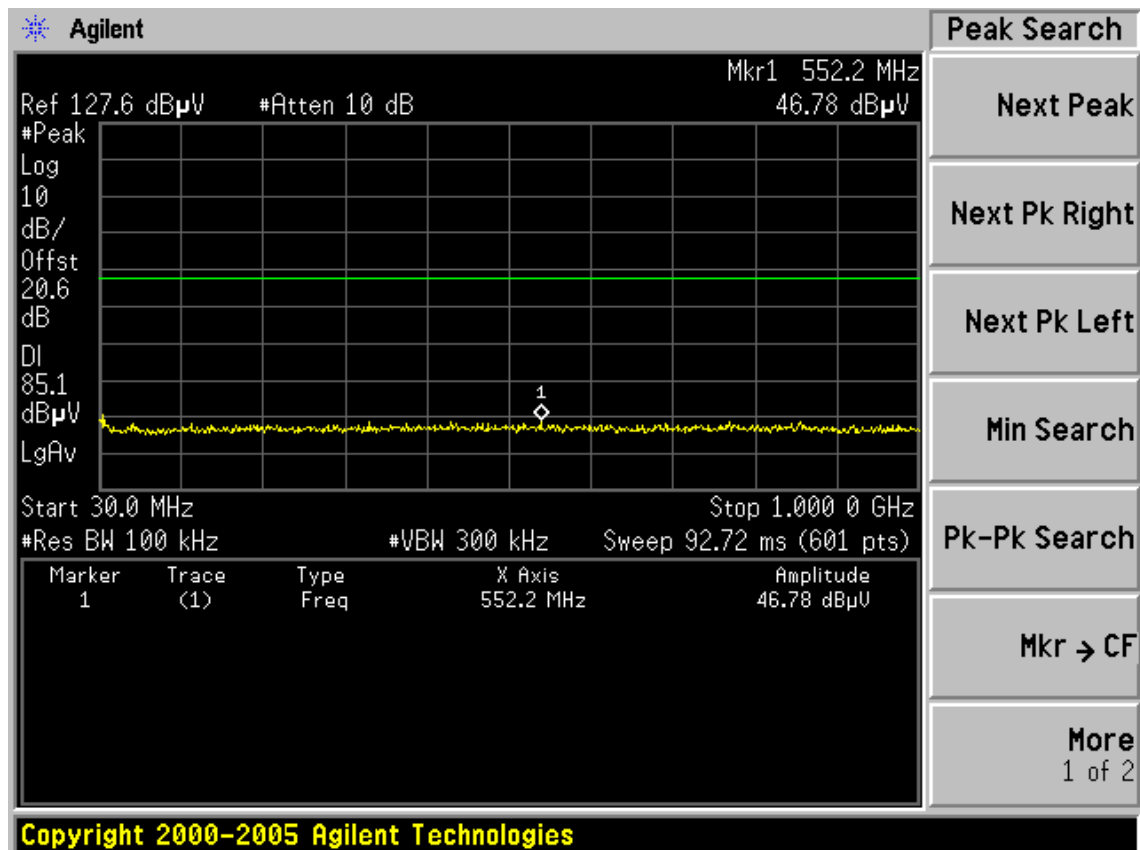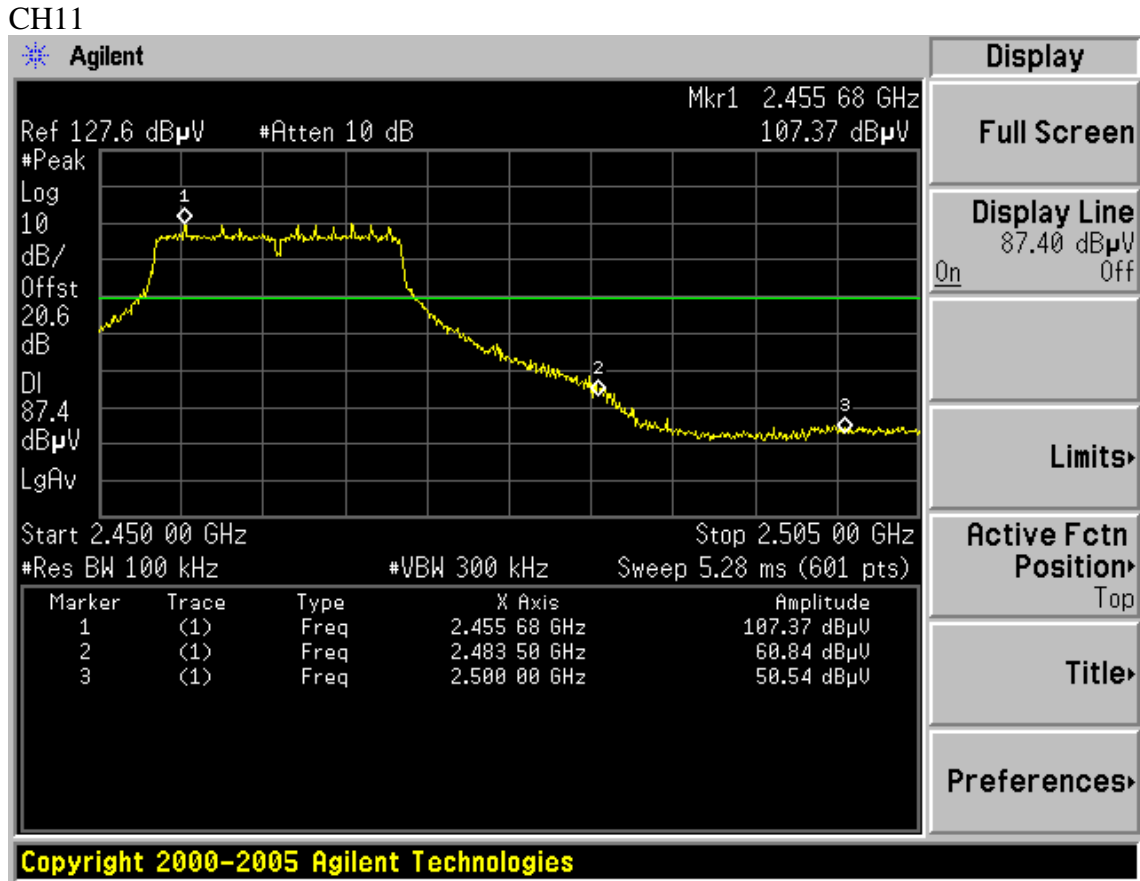

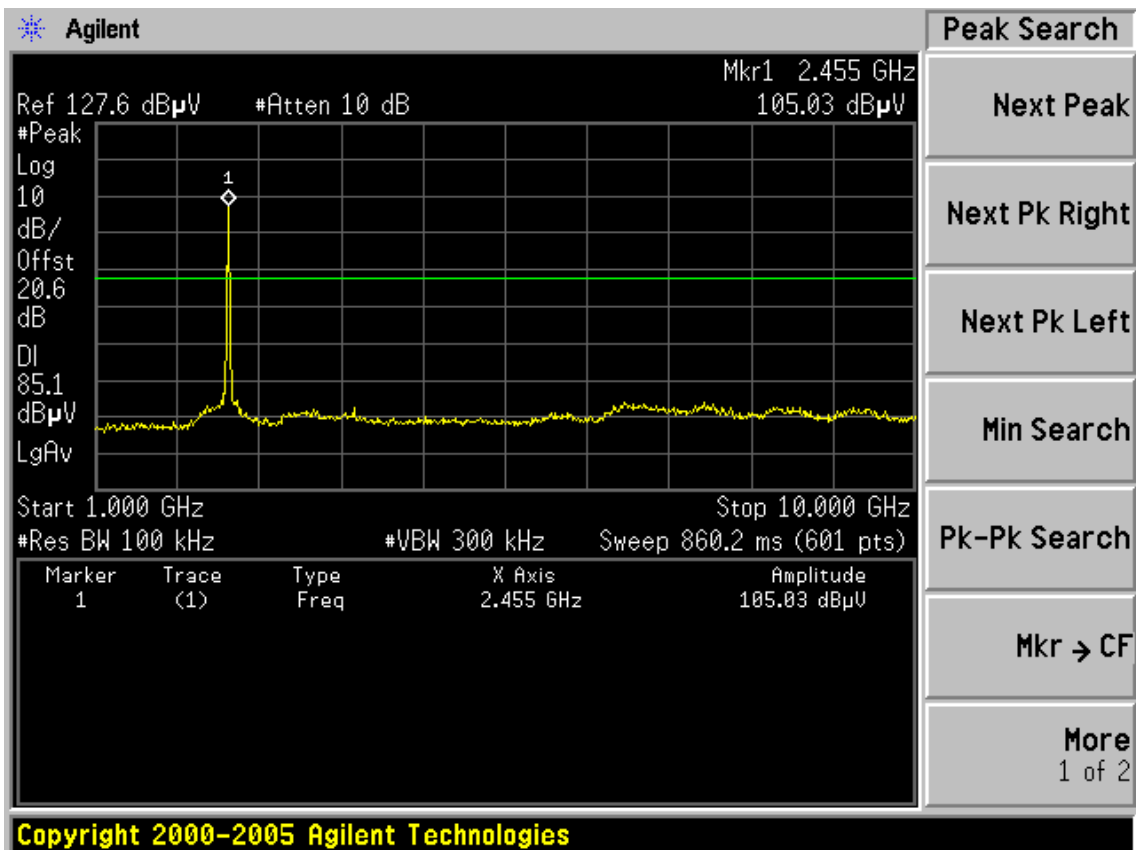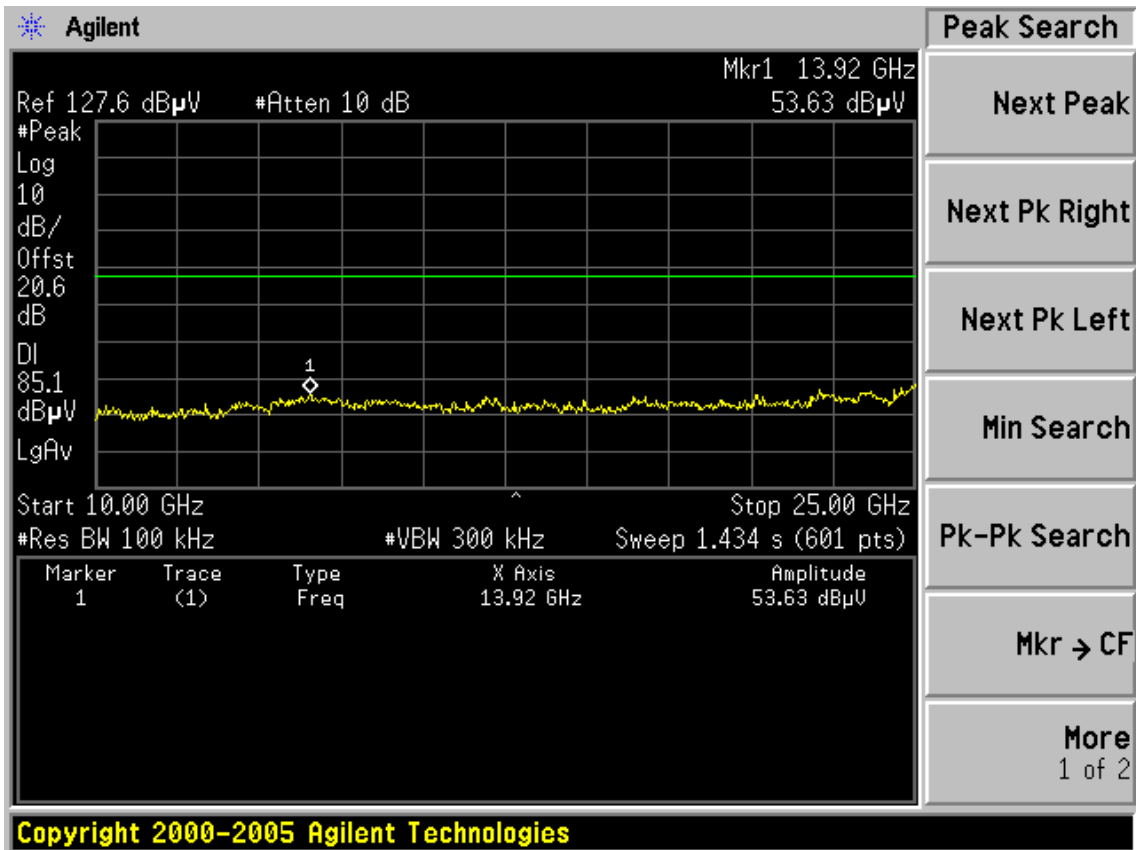



Test Mode: IEEE 802.11n HT20 TX  
CH1

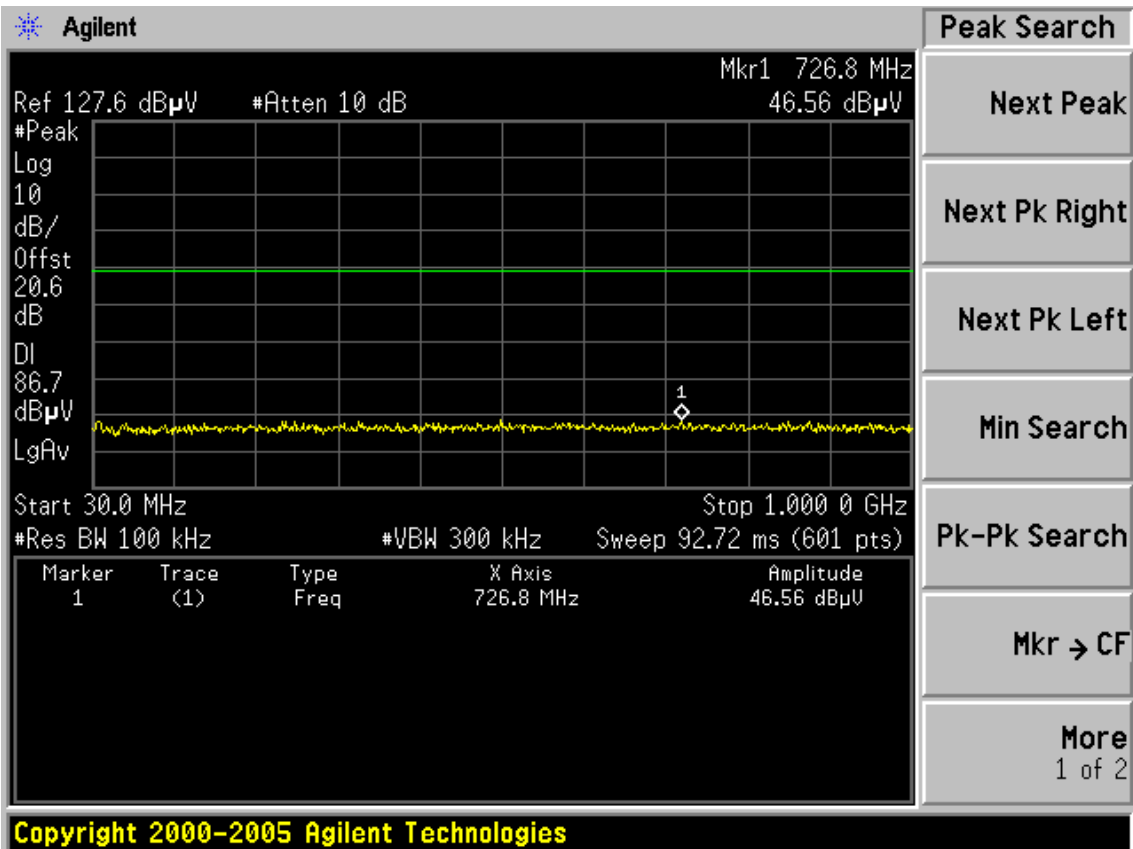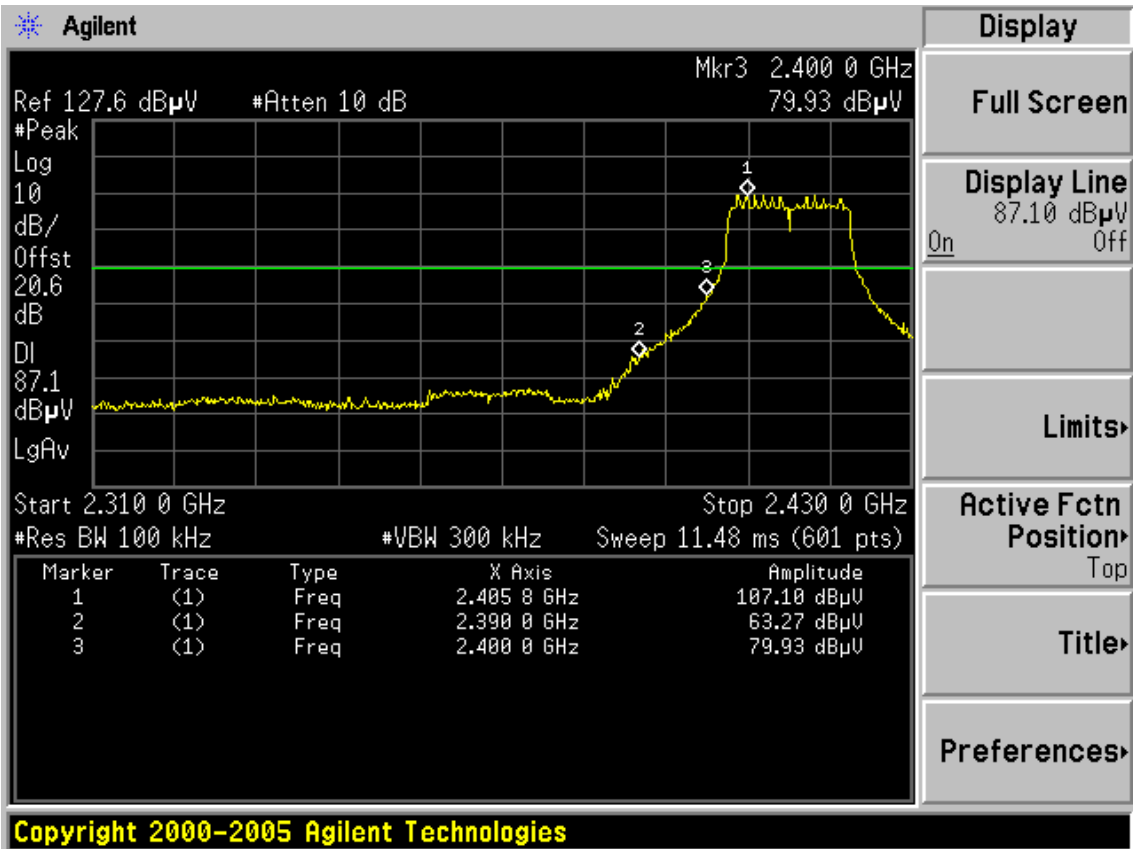


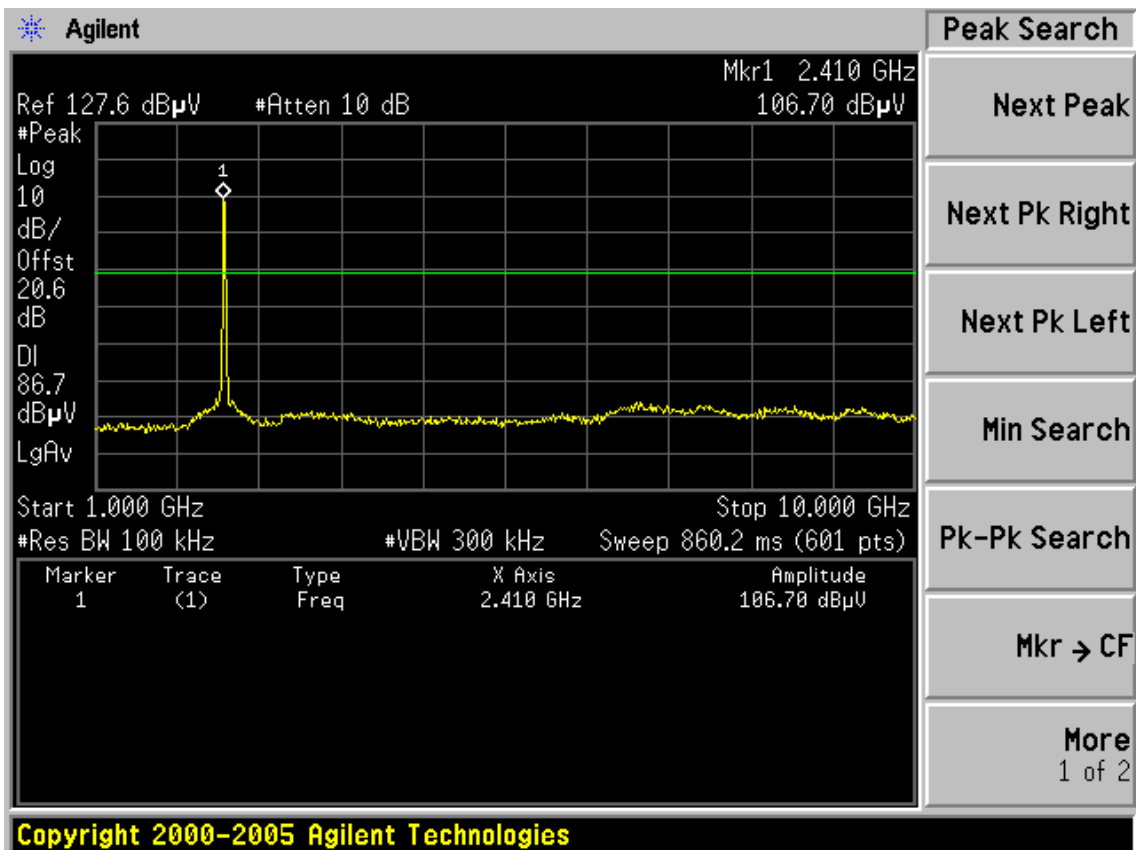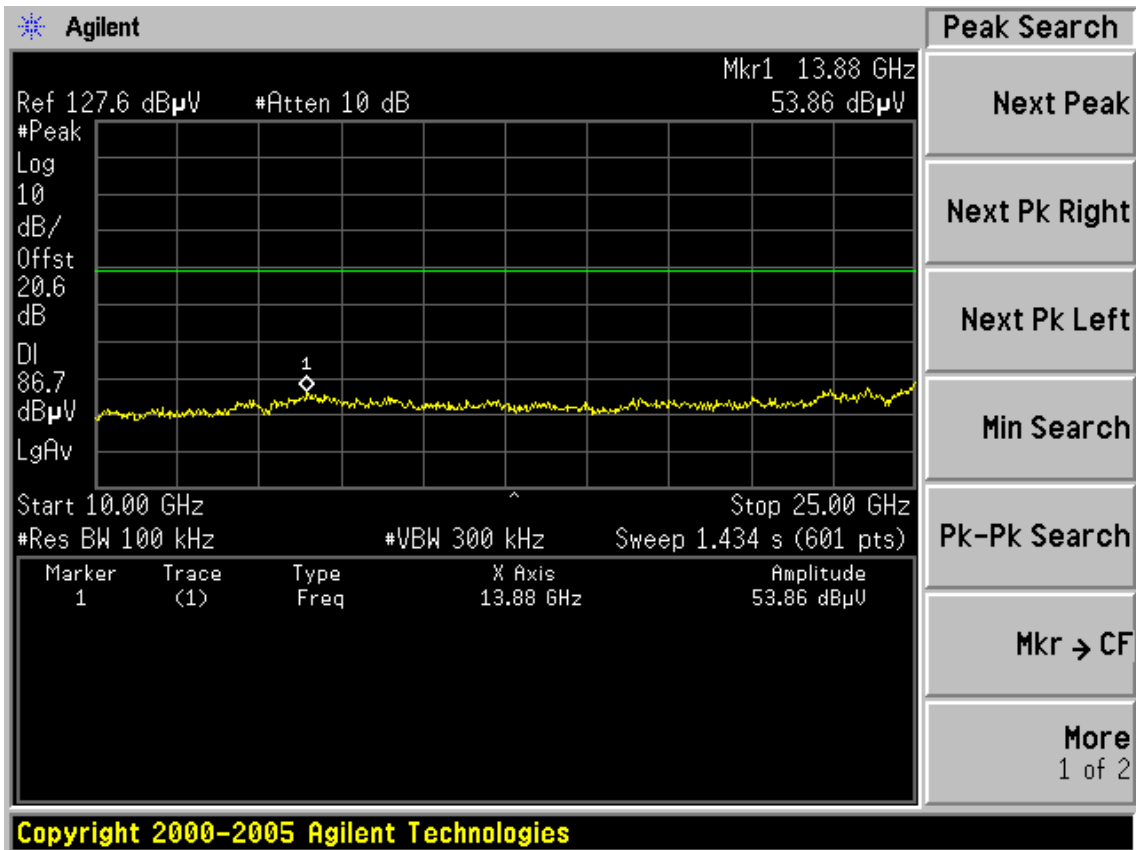






CH6

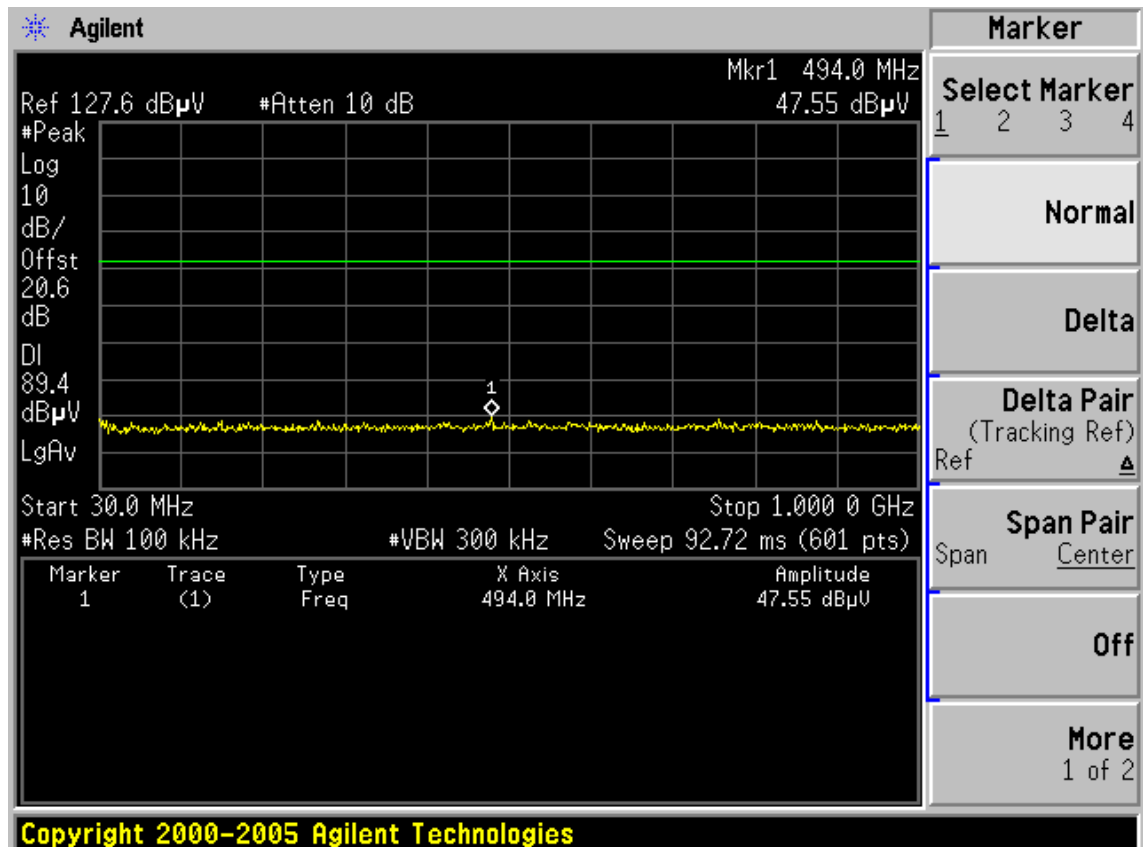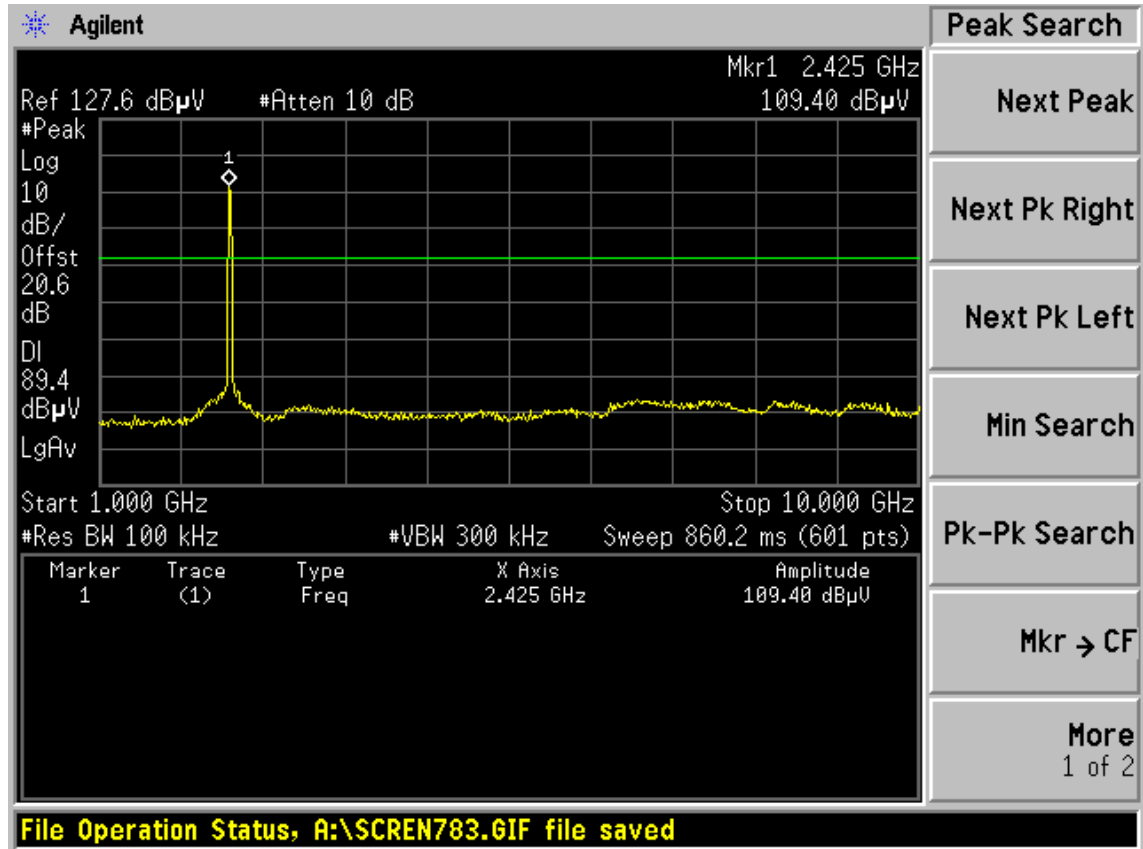


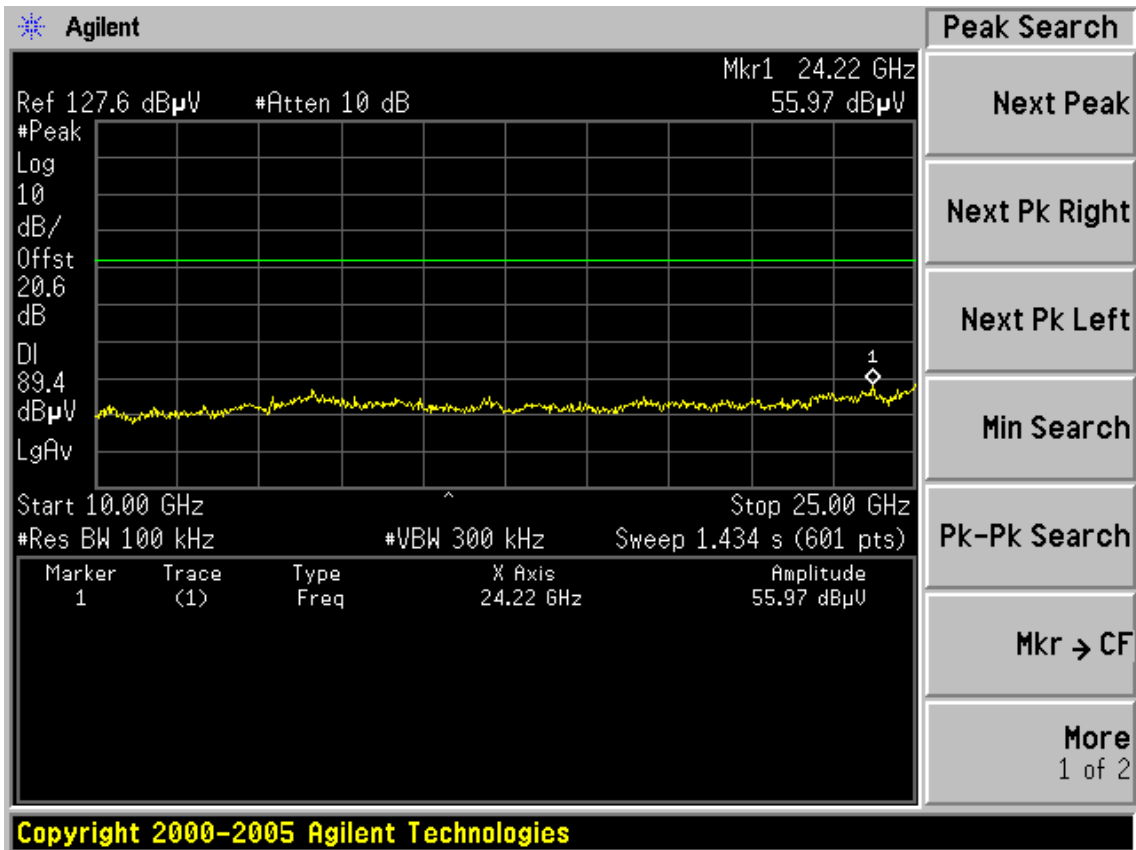

CH11

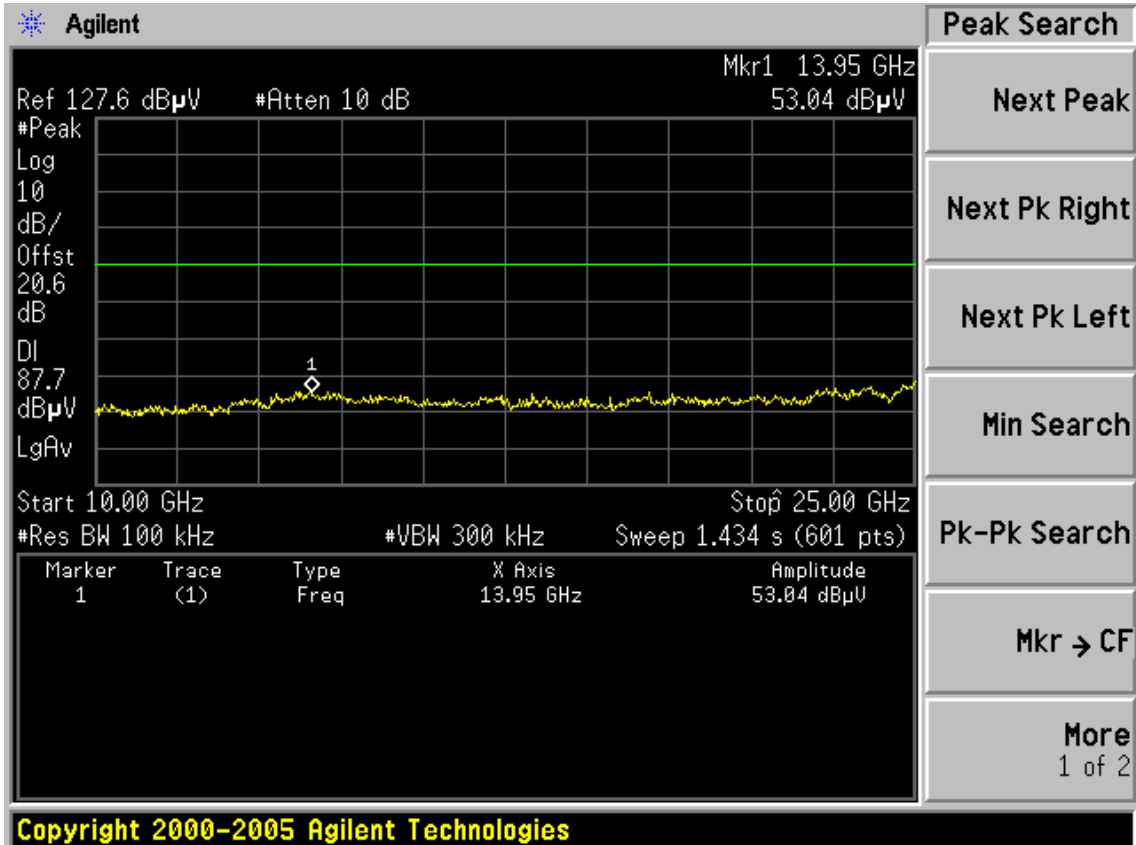


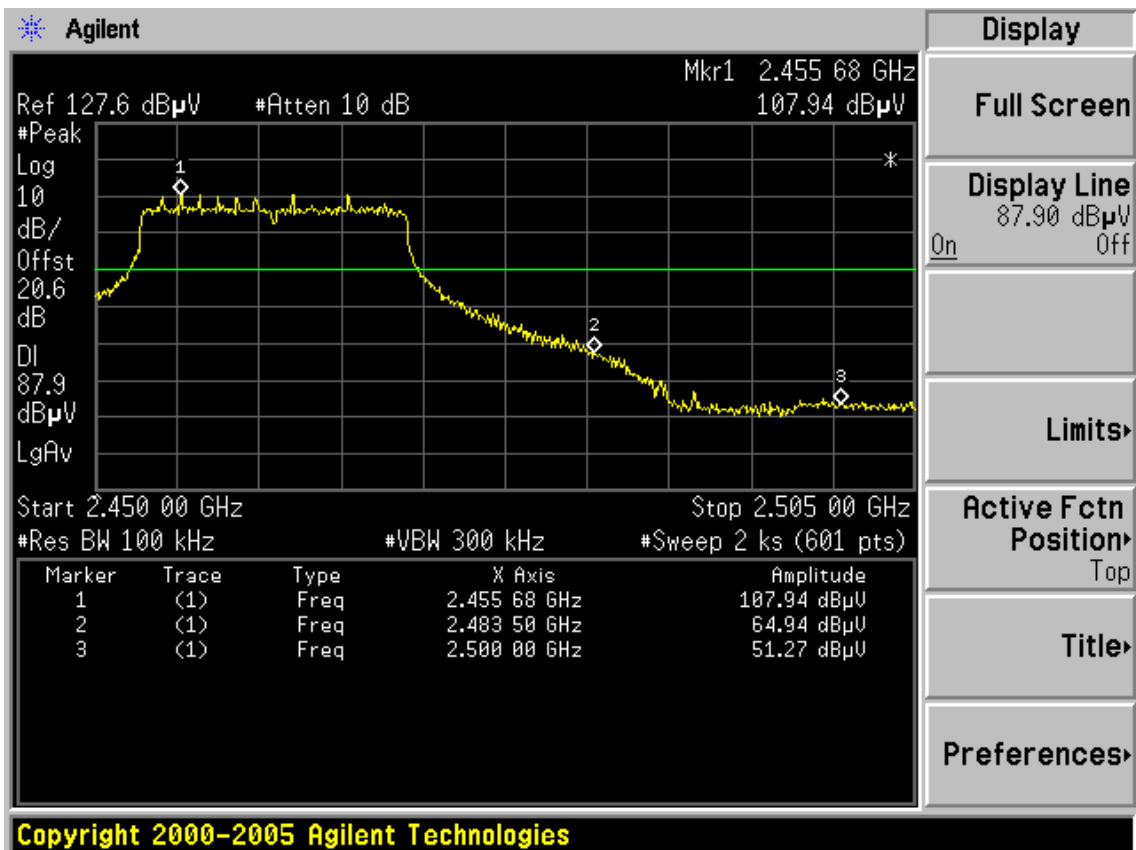
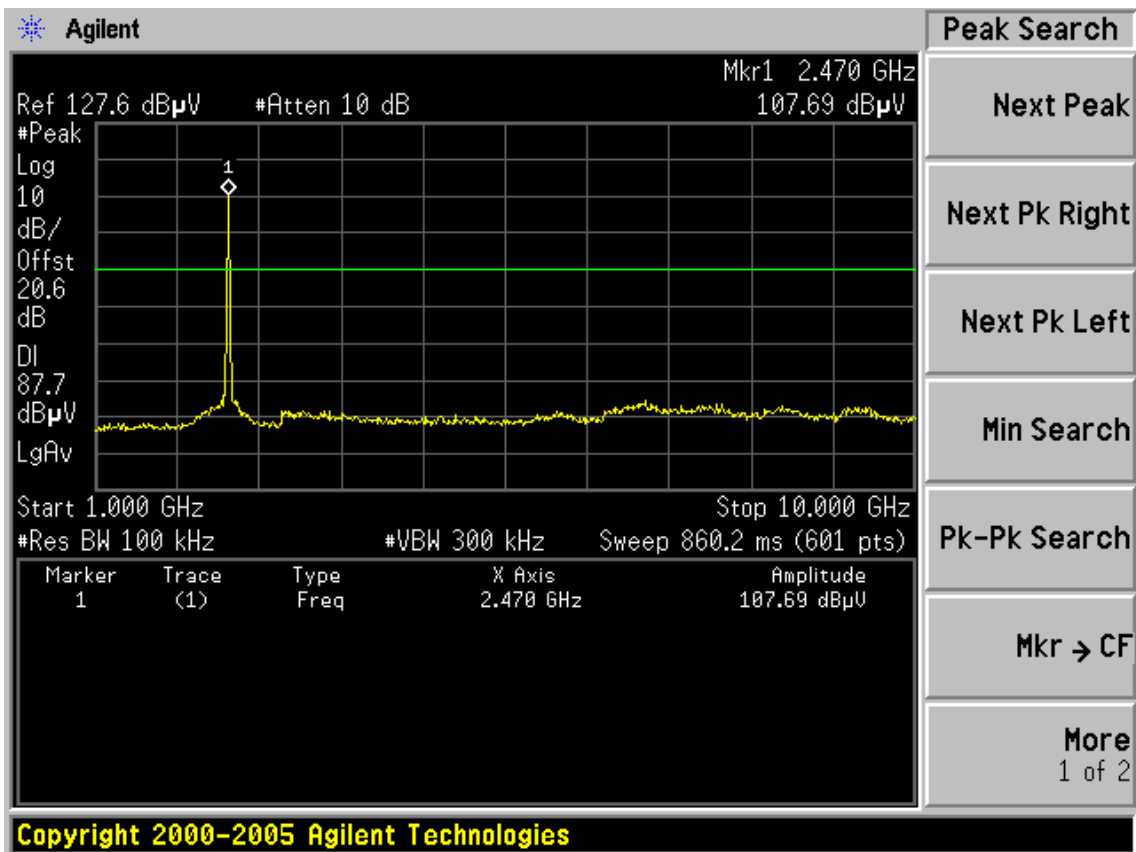


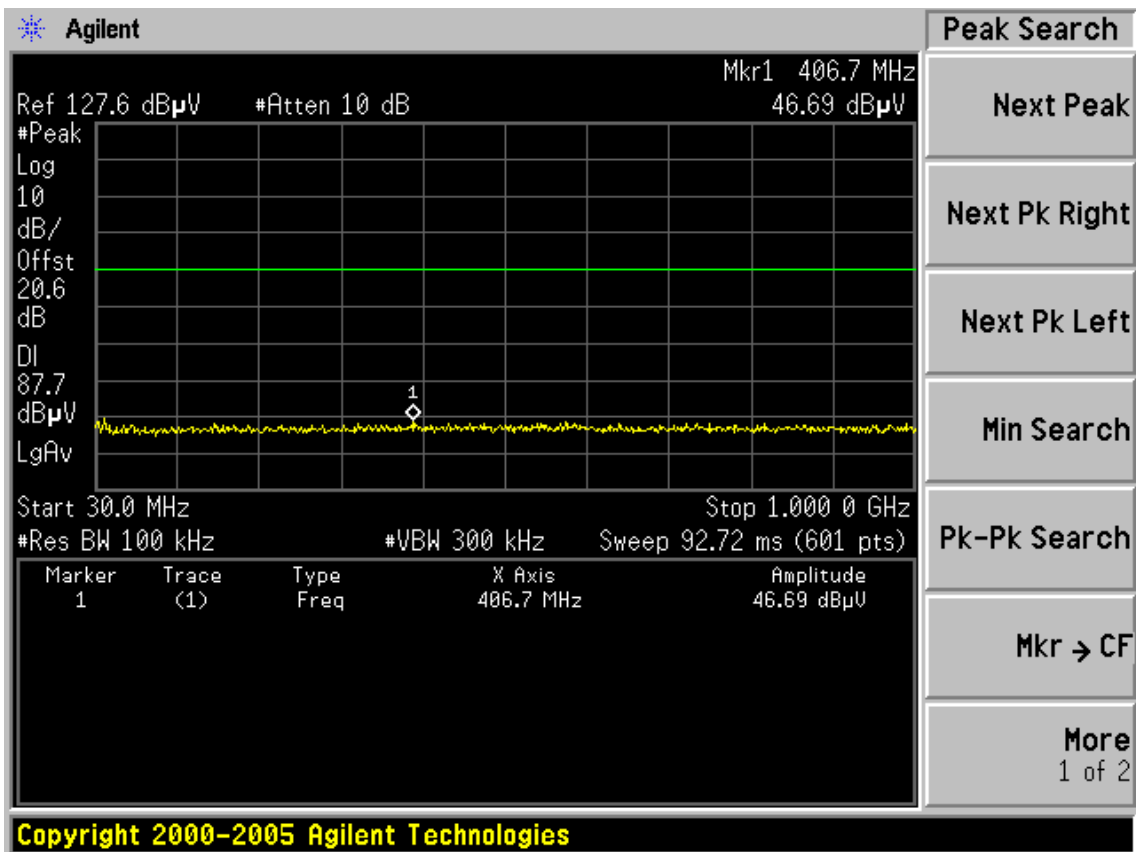


Test Mode: IEEE 802.11n HT40TX


CH1


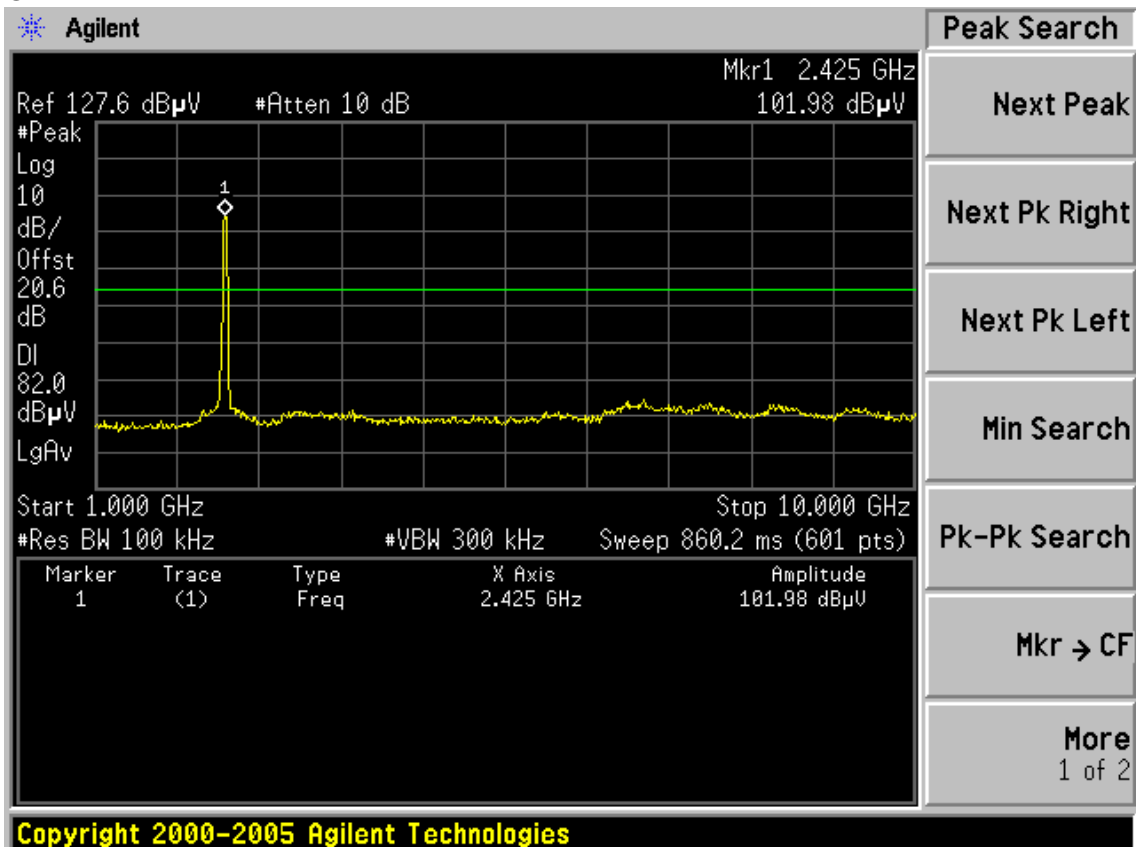


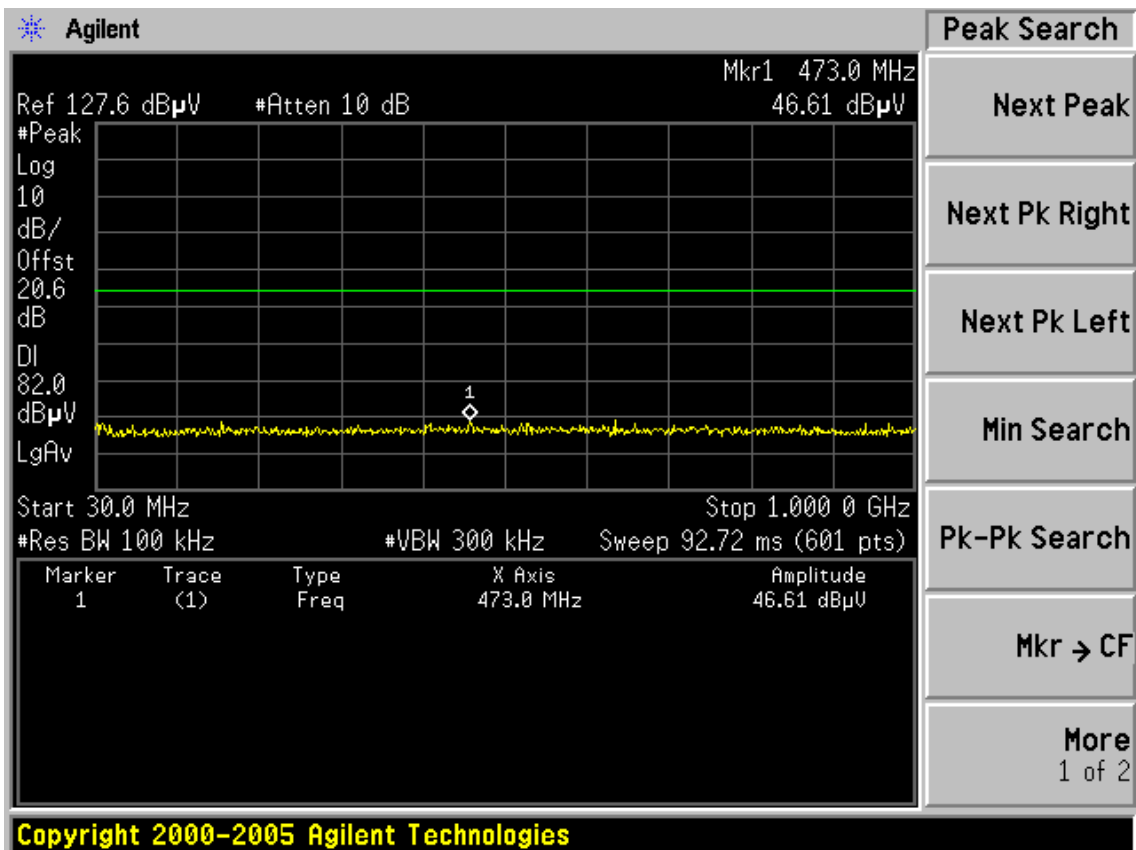
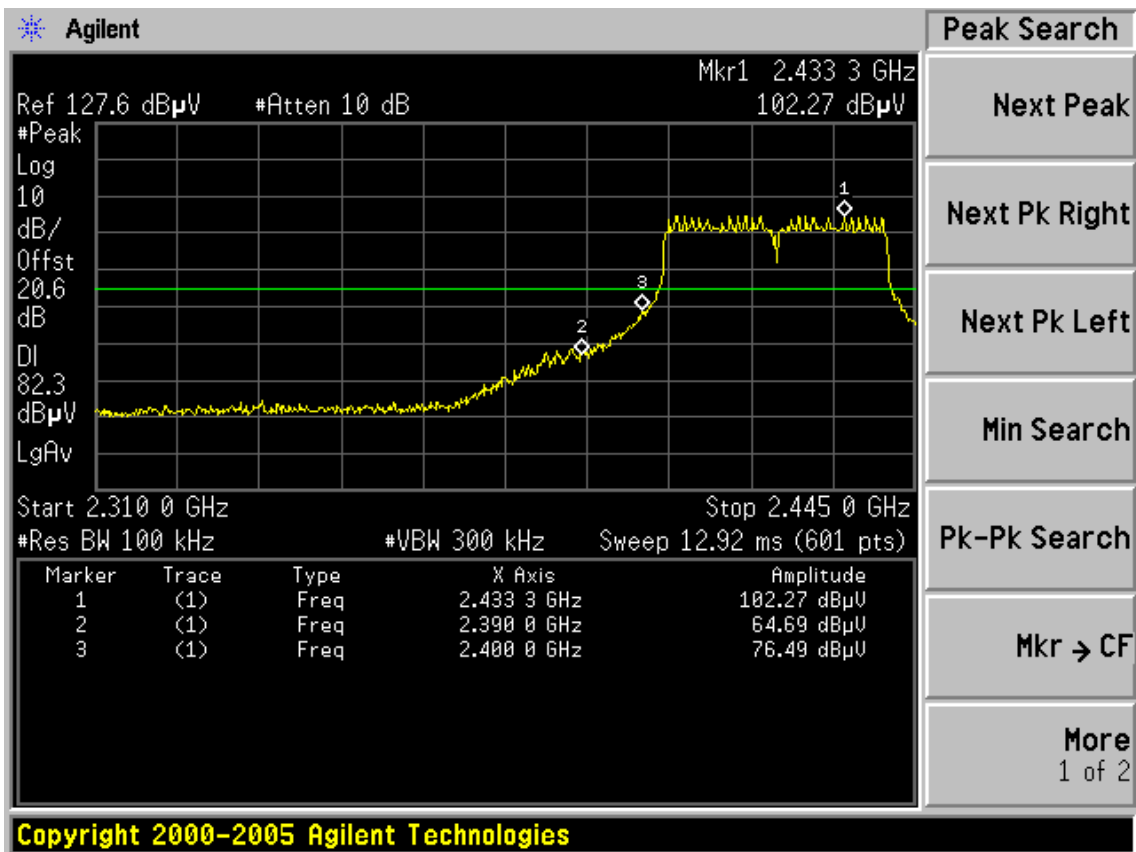


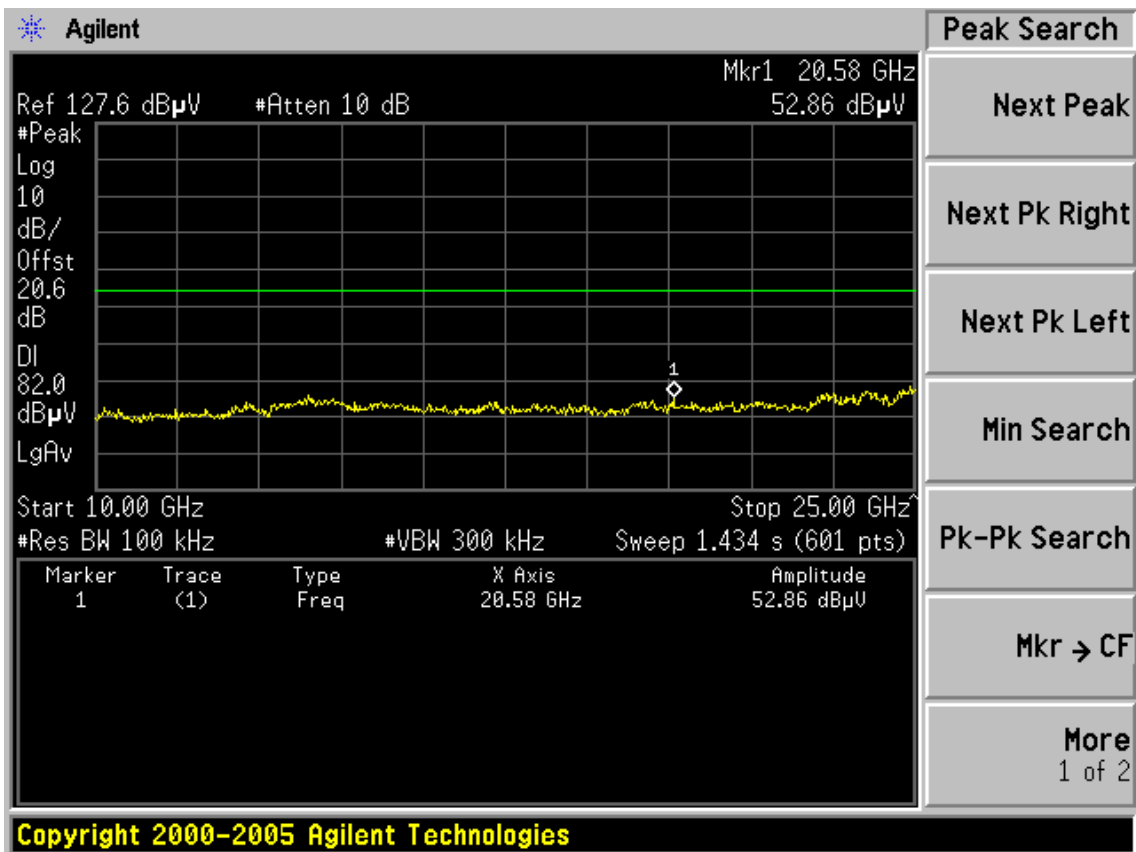



CH4

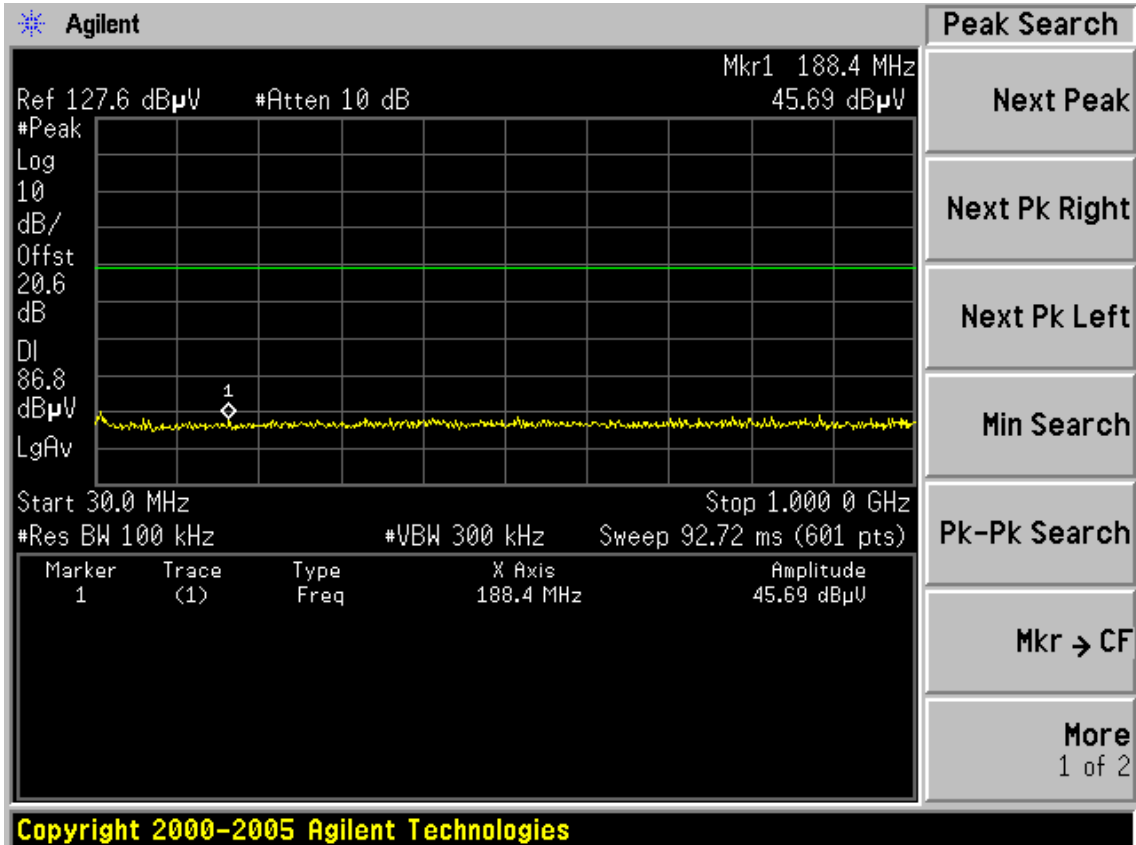

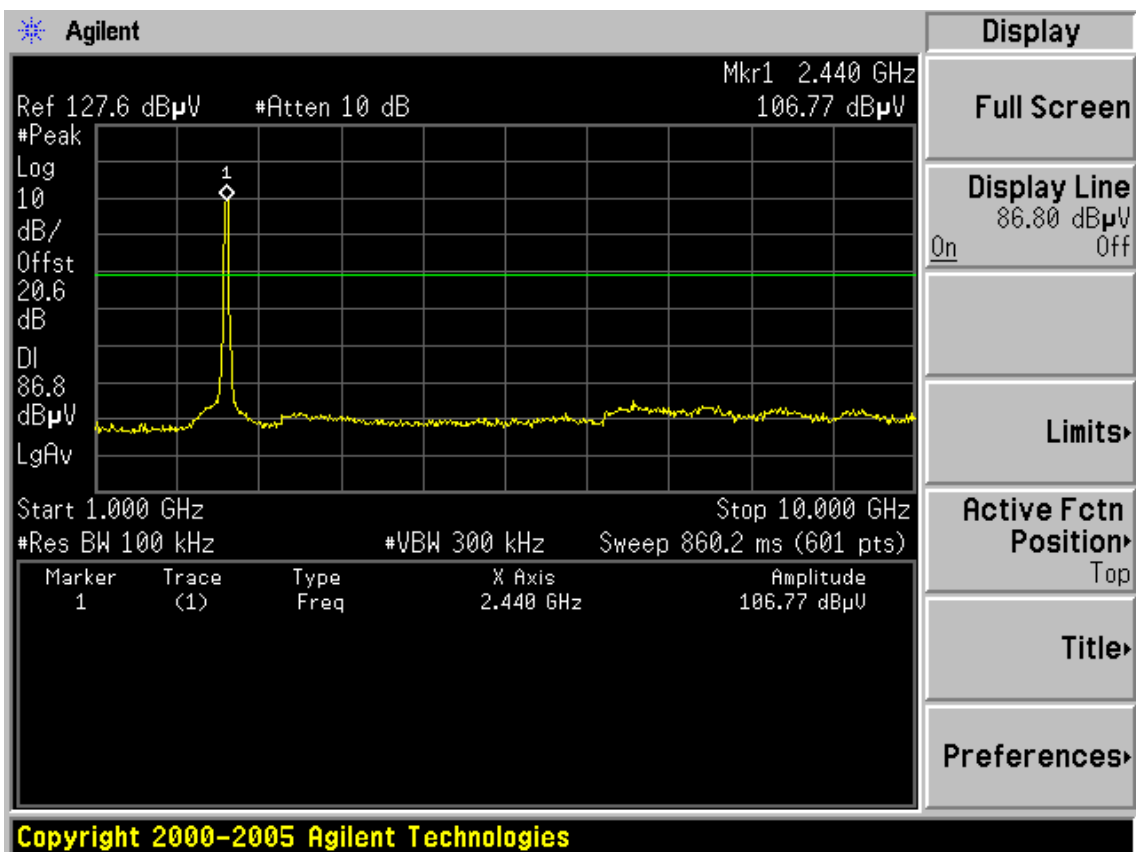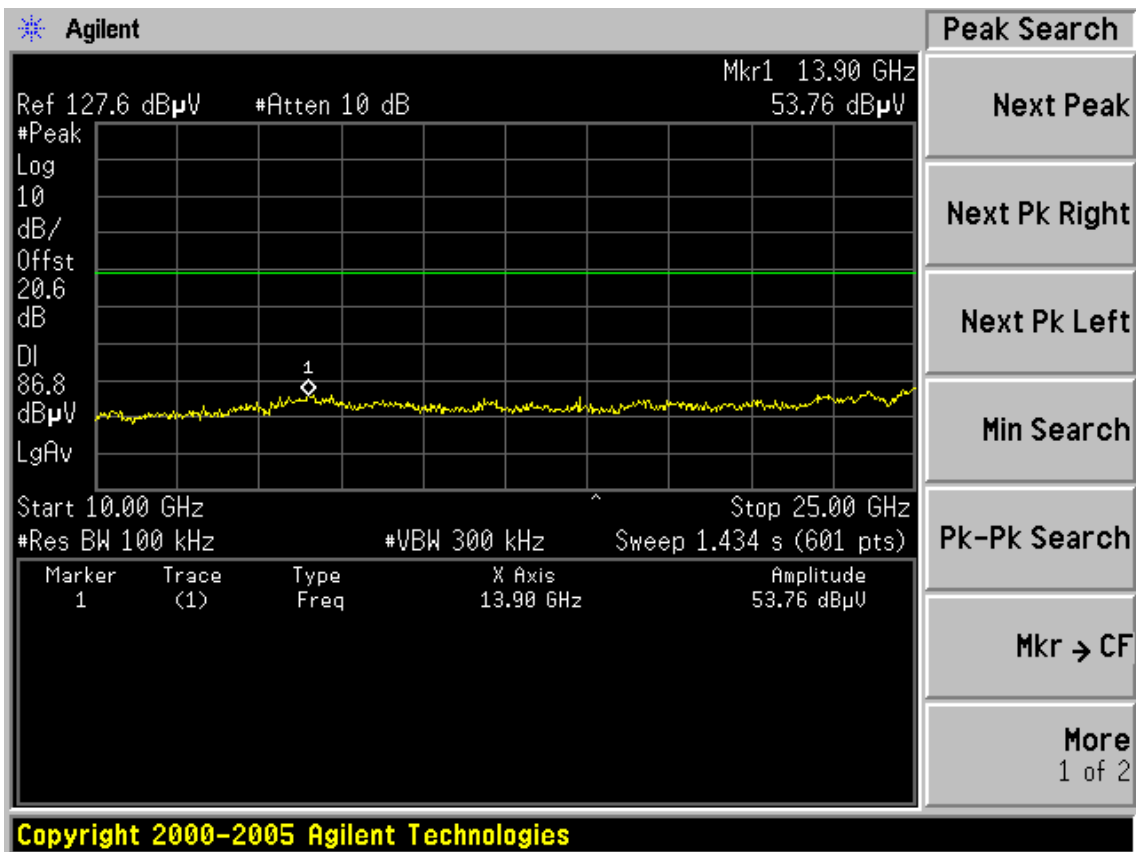


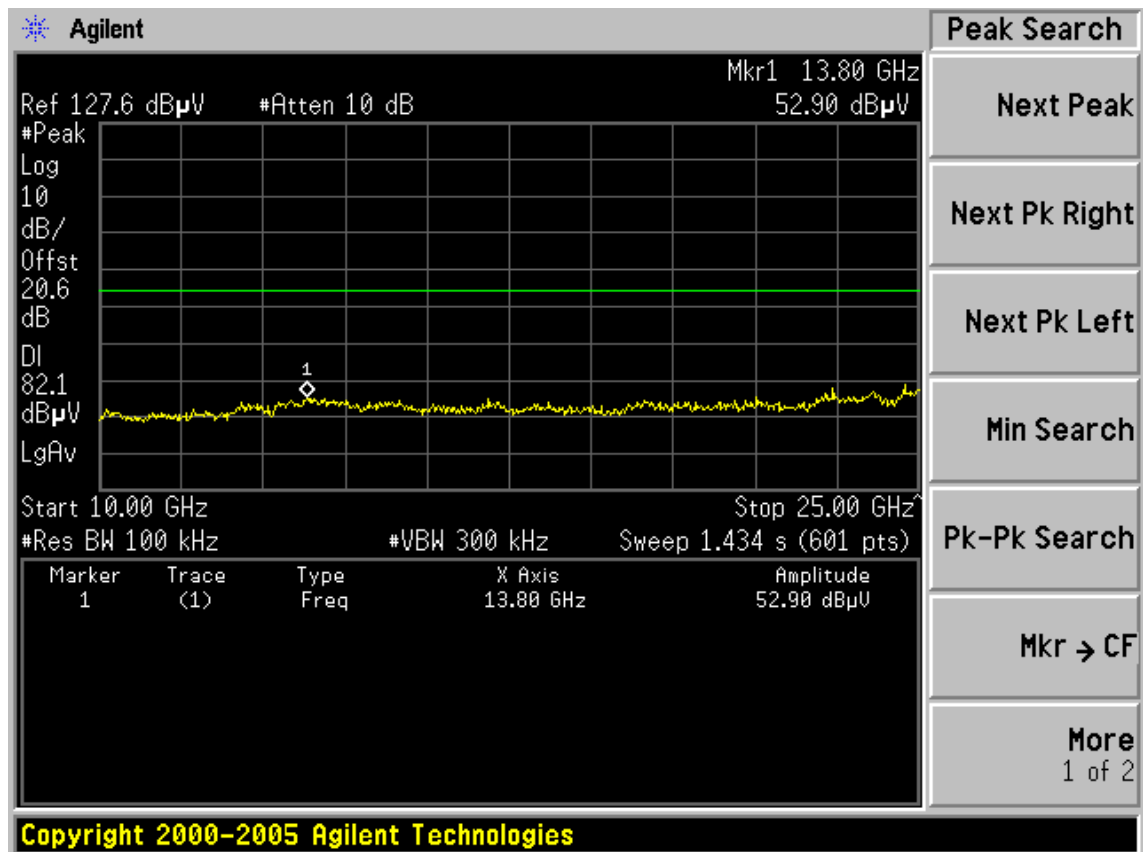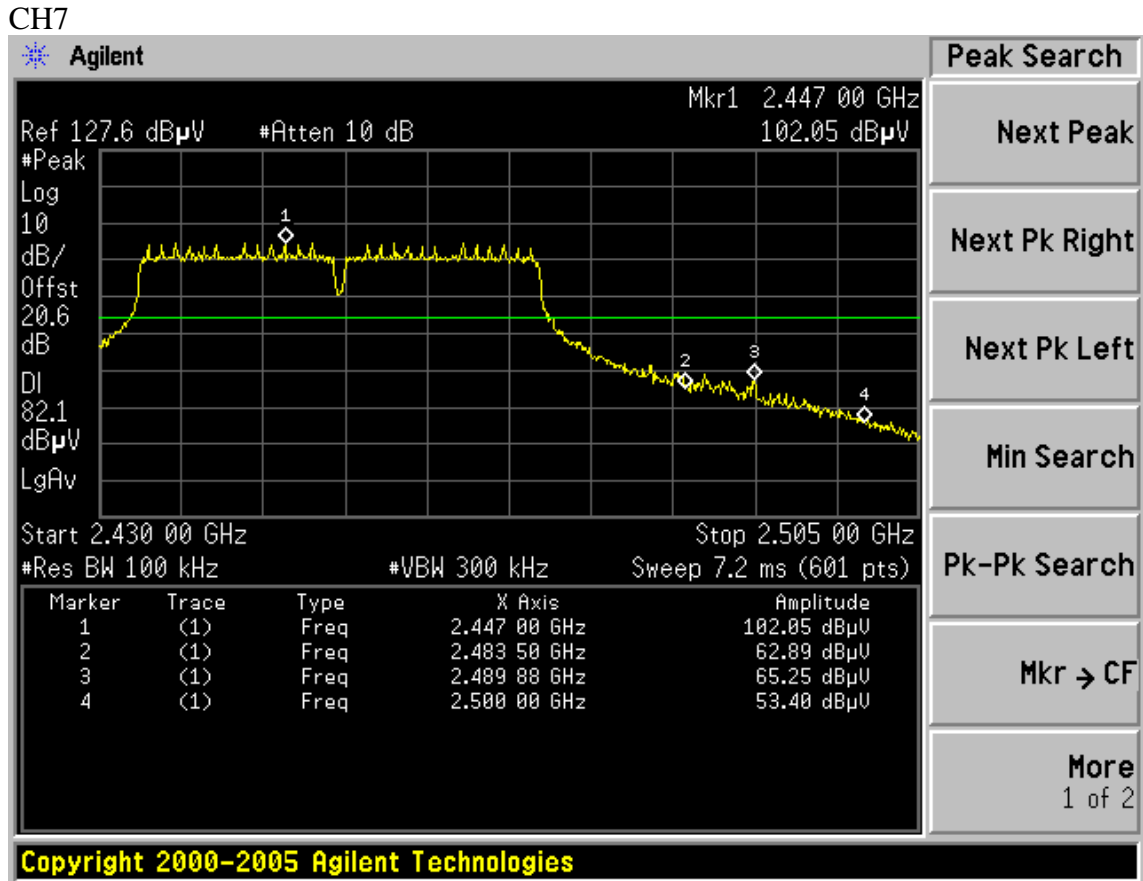




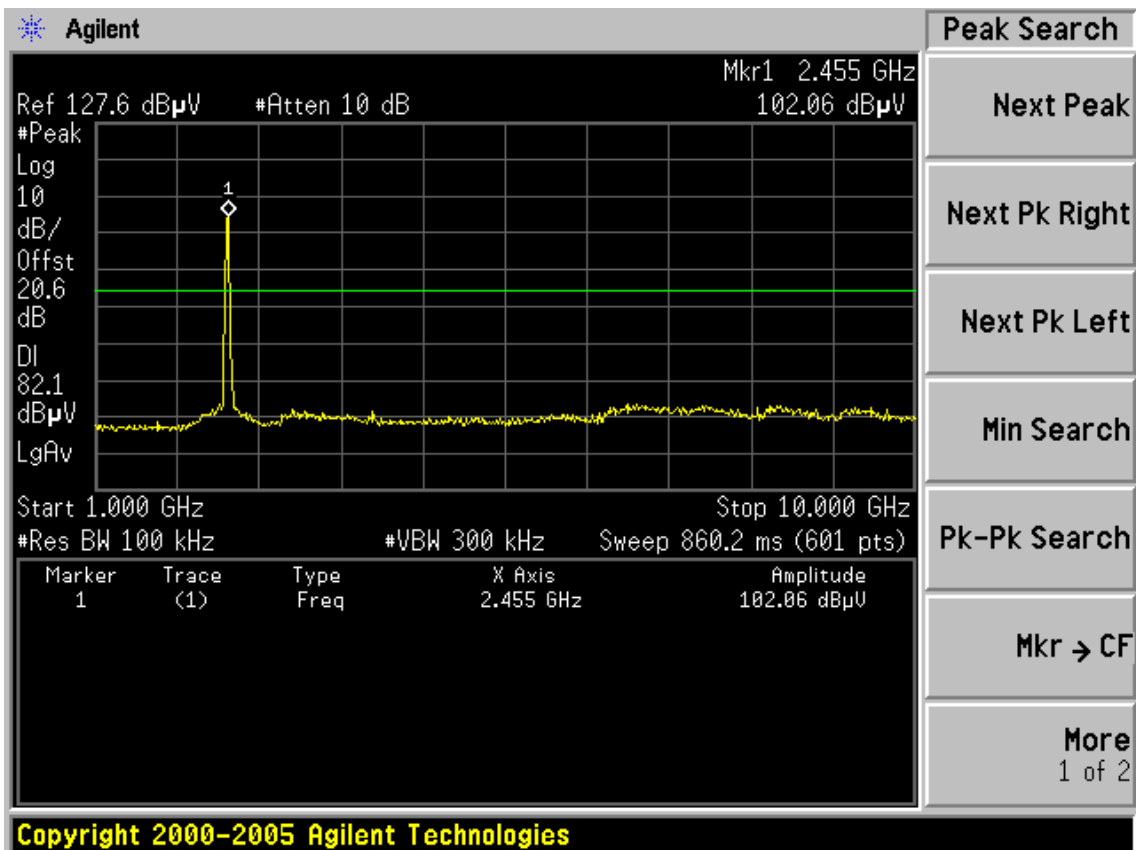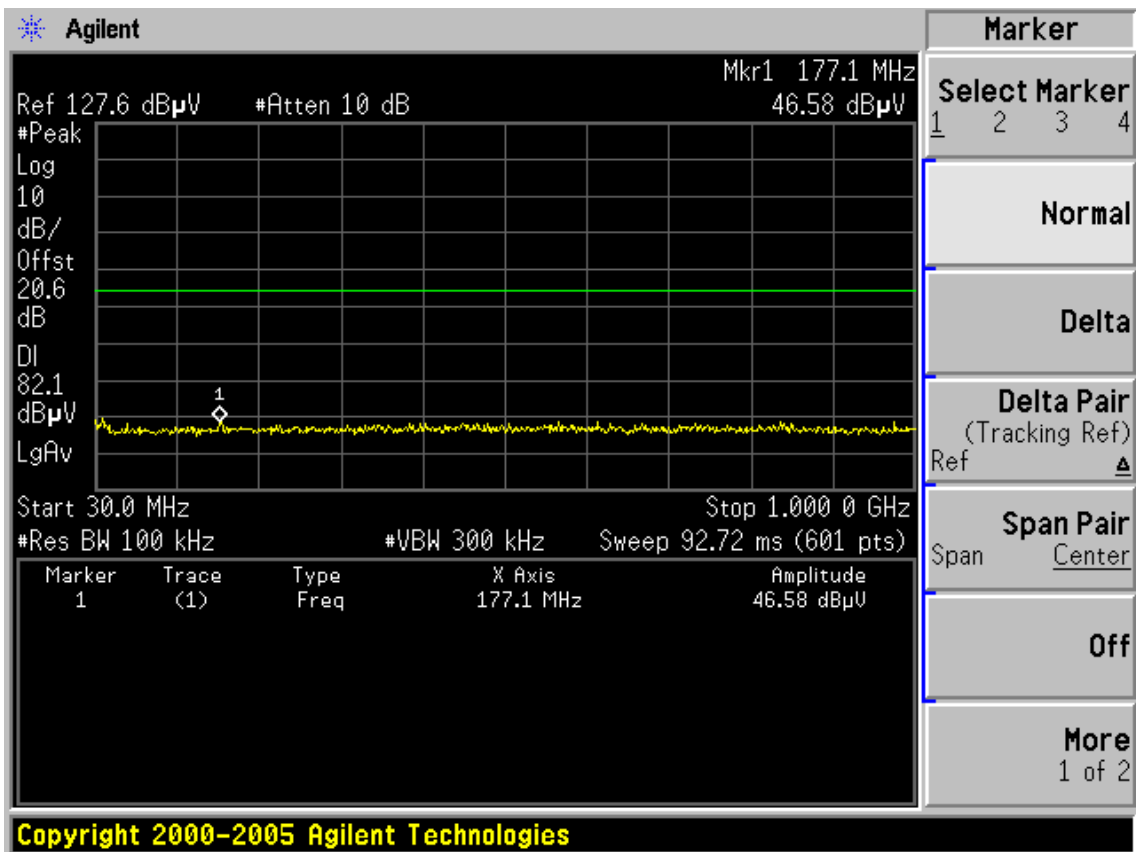



Chain1  
 Test Mode: IEEE 802.11bTX  
 CH1


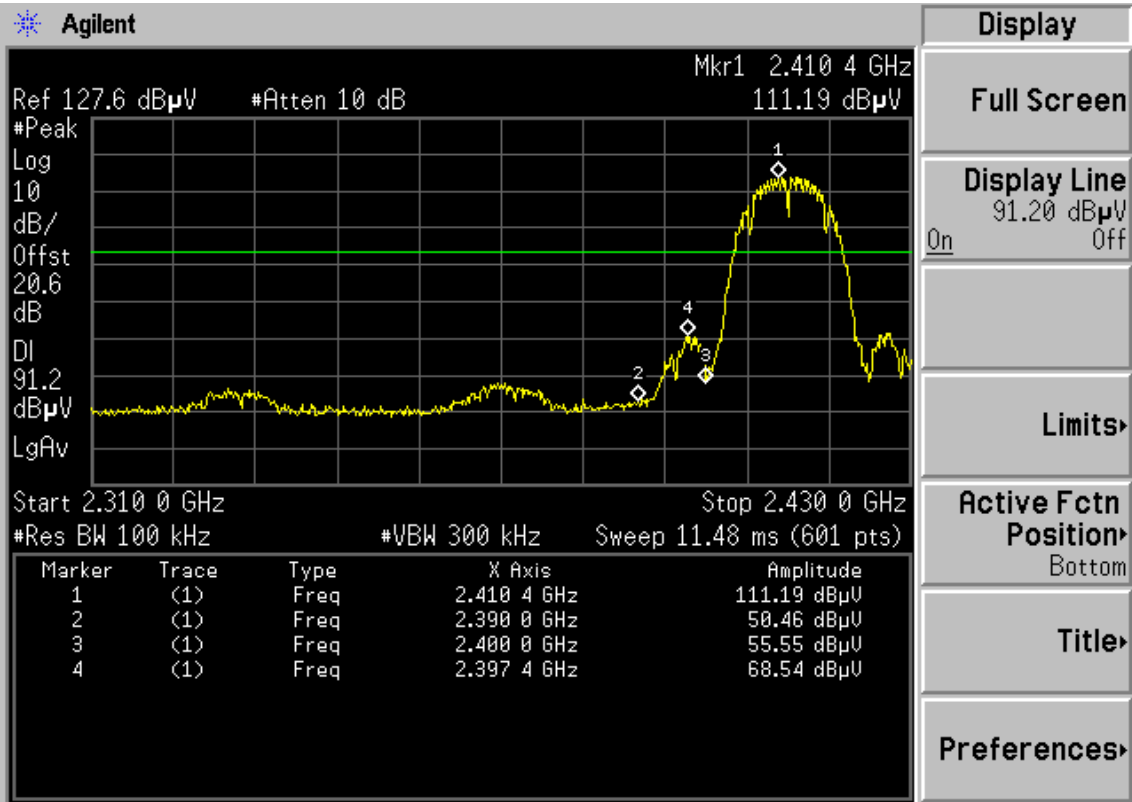



Copyright 2000-2005 Agilent Technologies

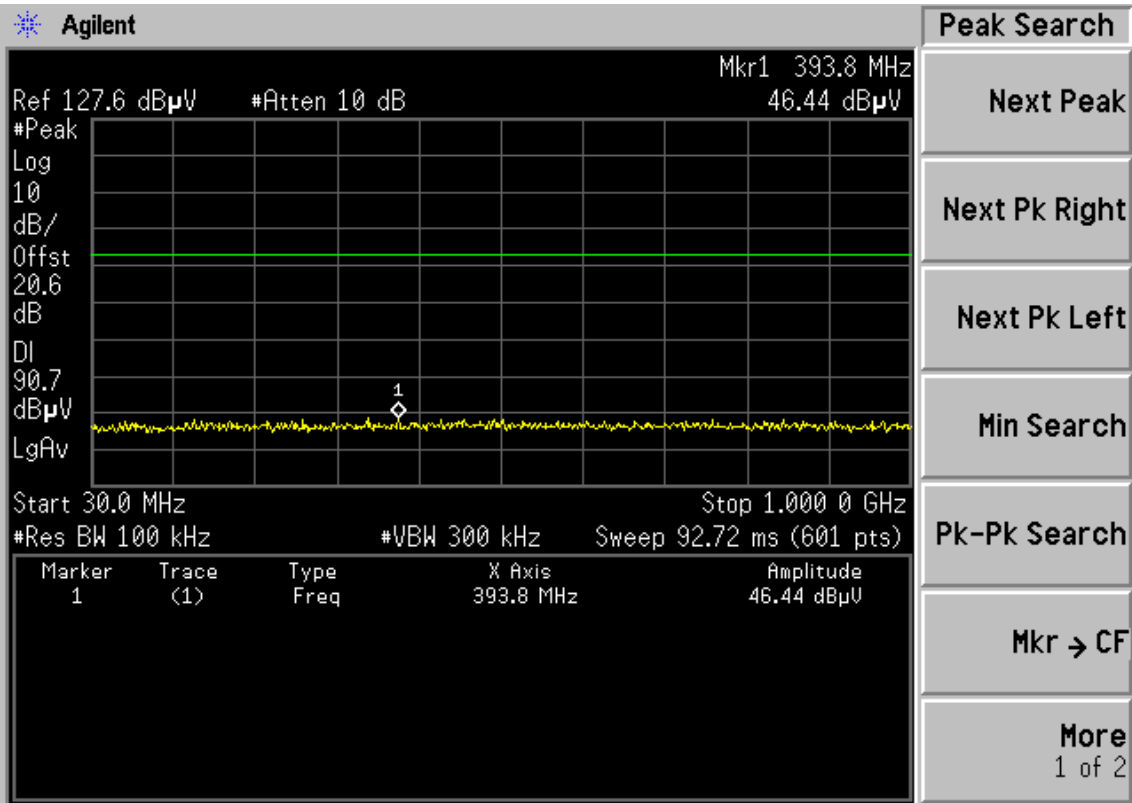


Copyright 2000-2005 Agilent Technologies

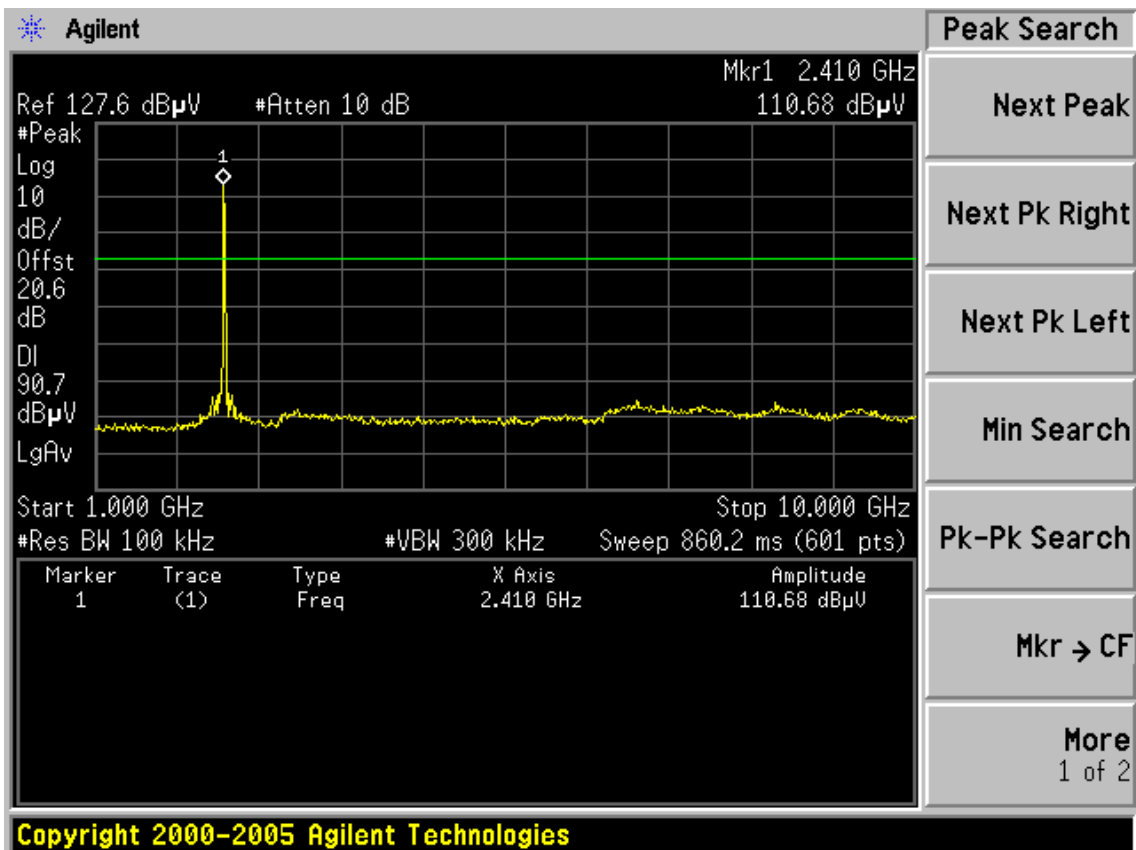
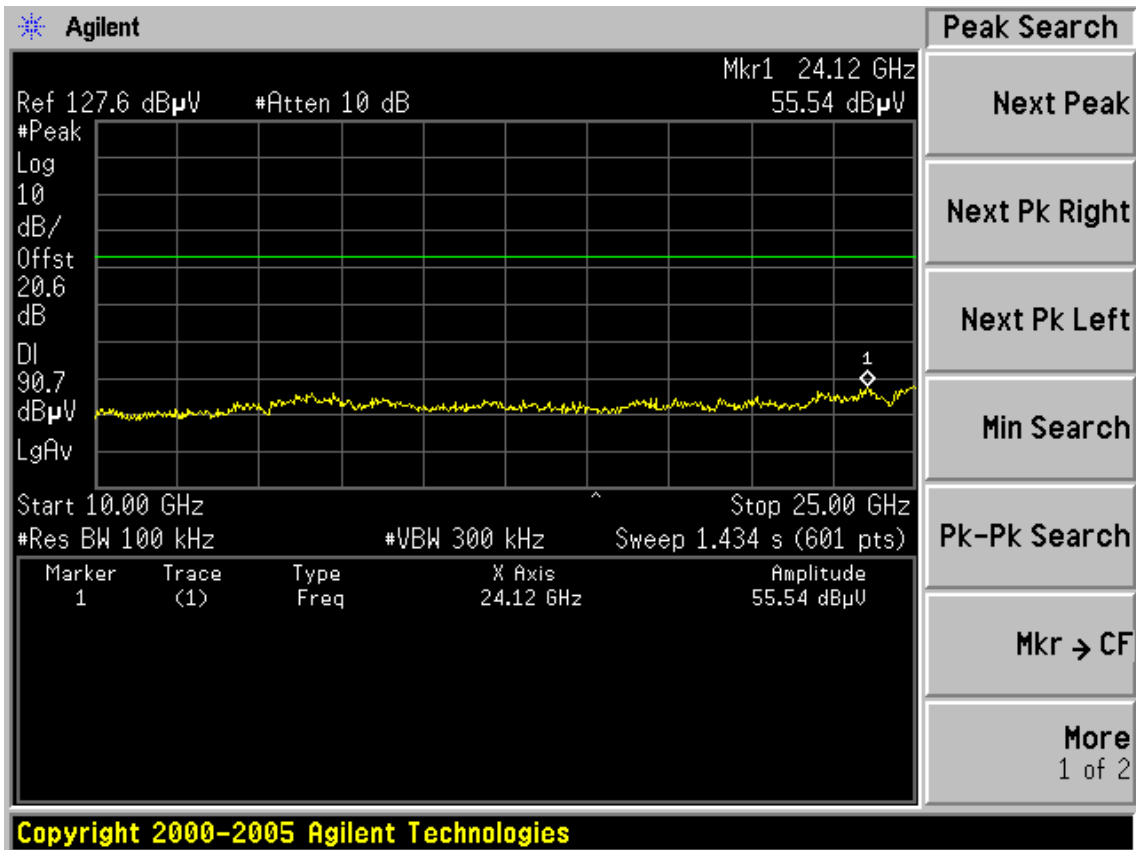


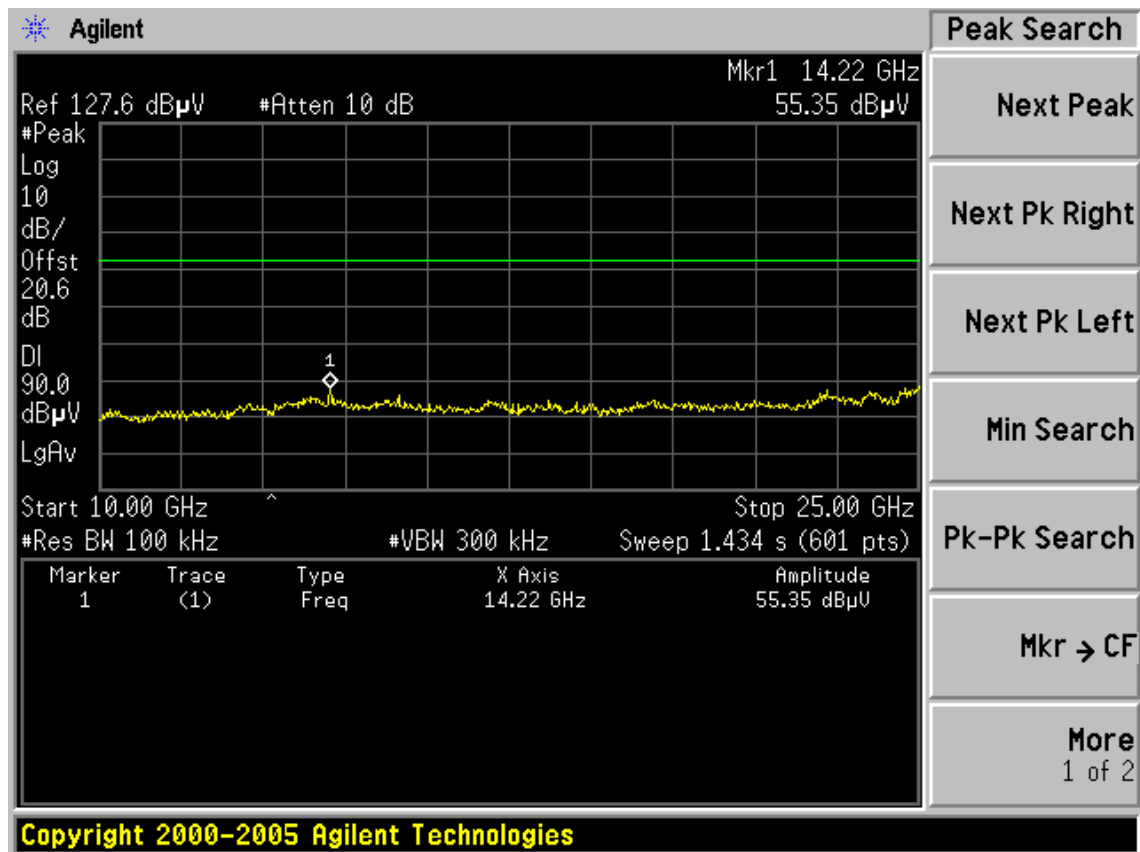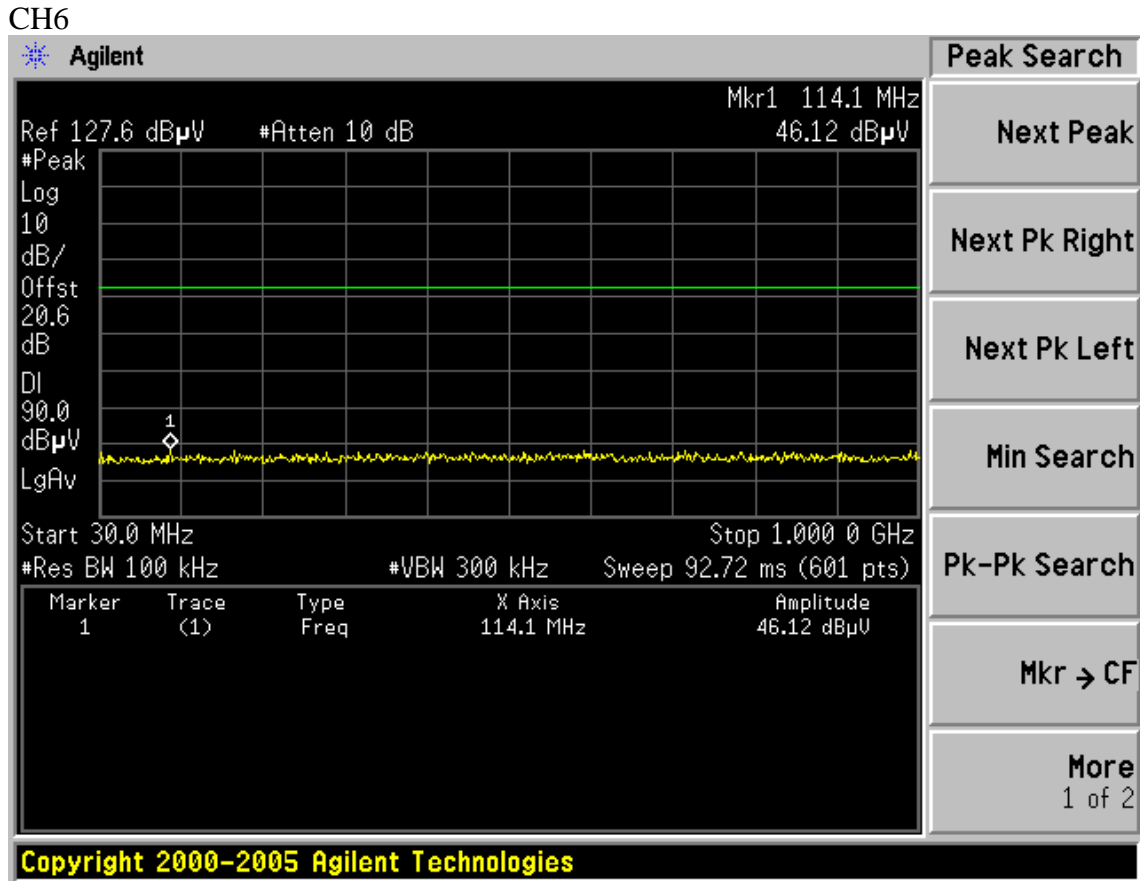


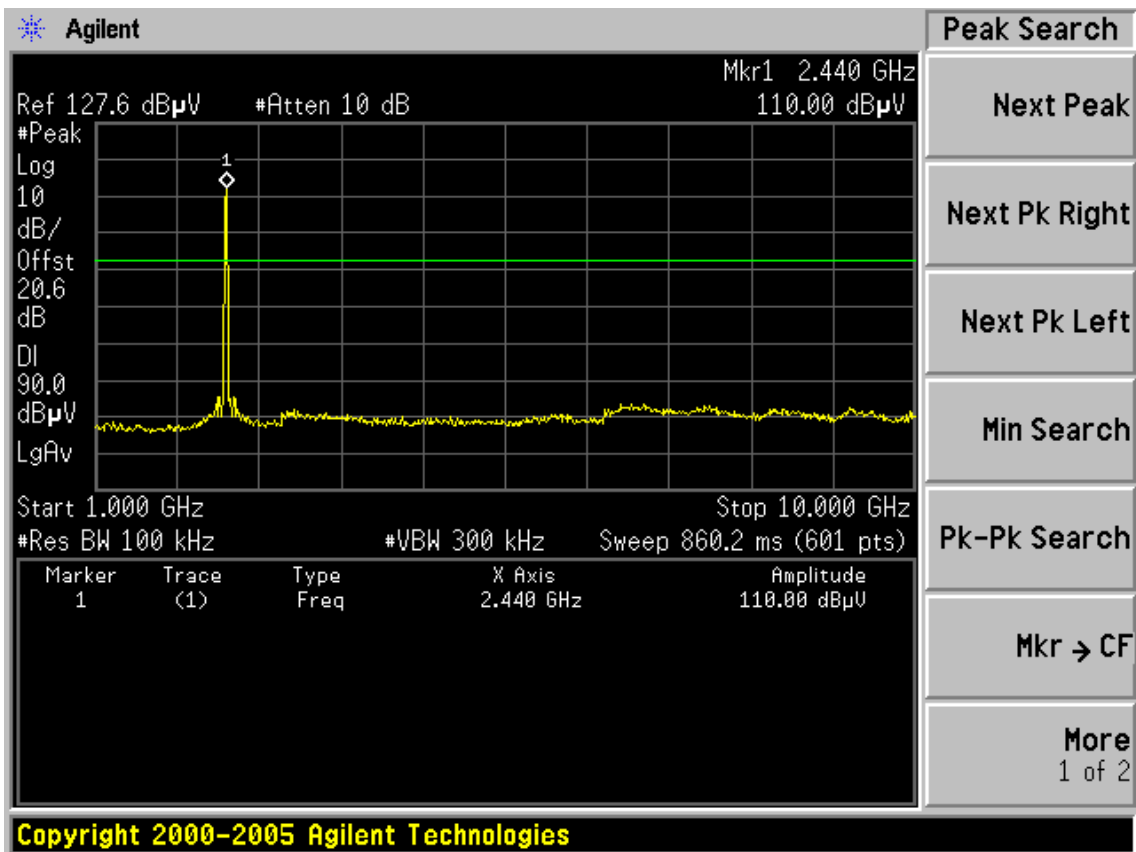


CH11


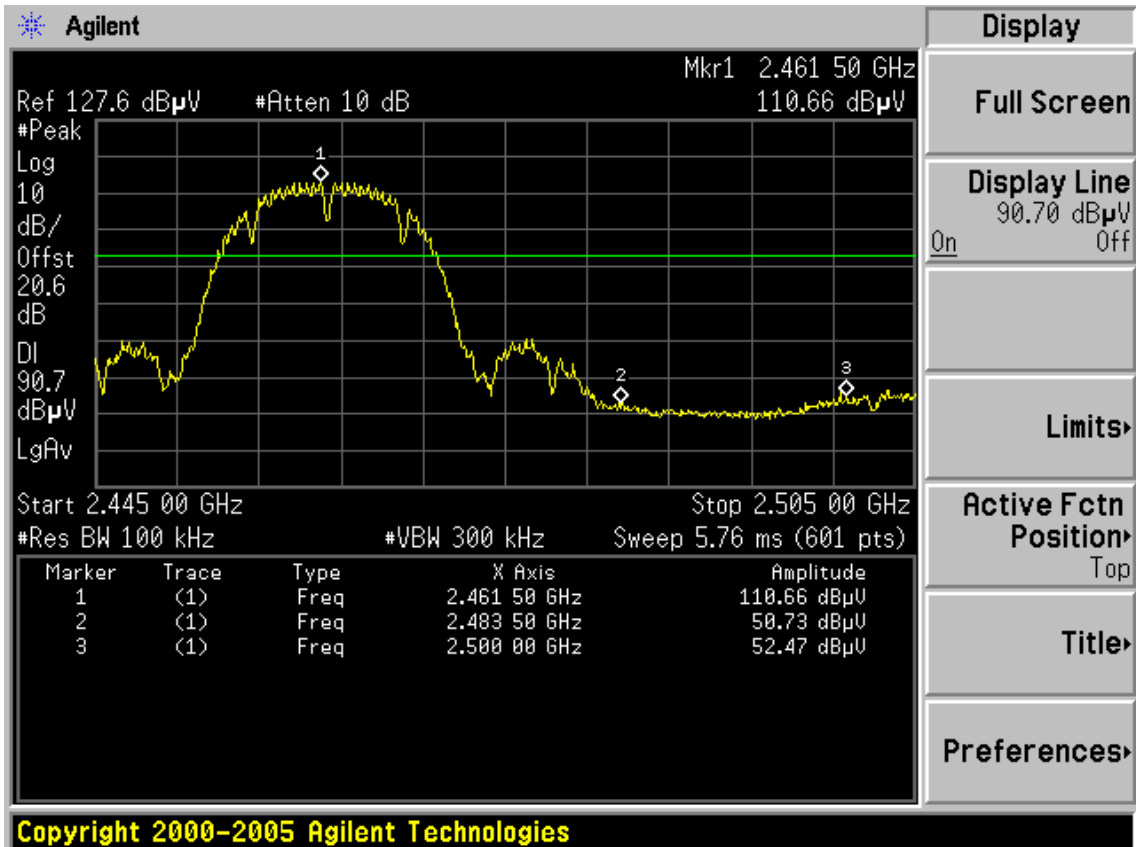


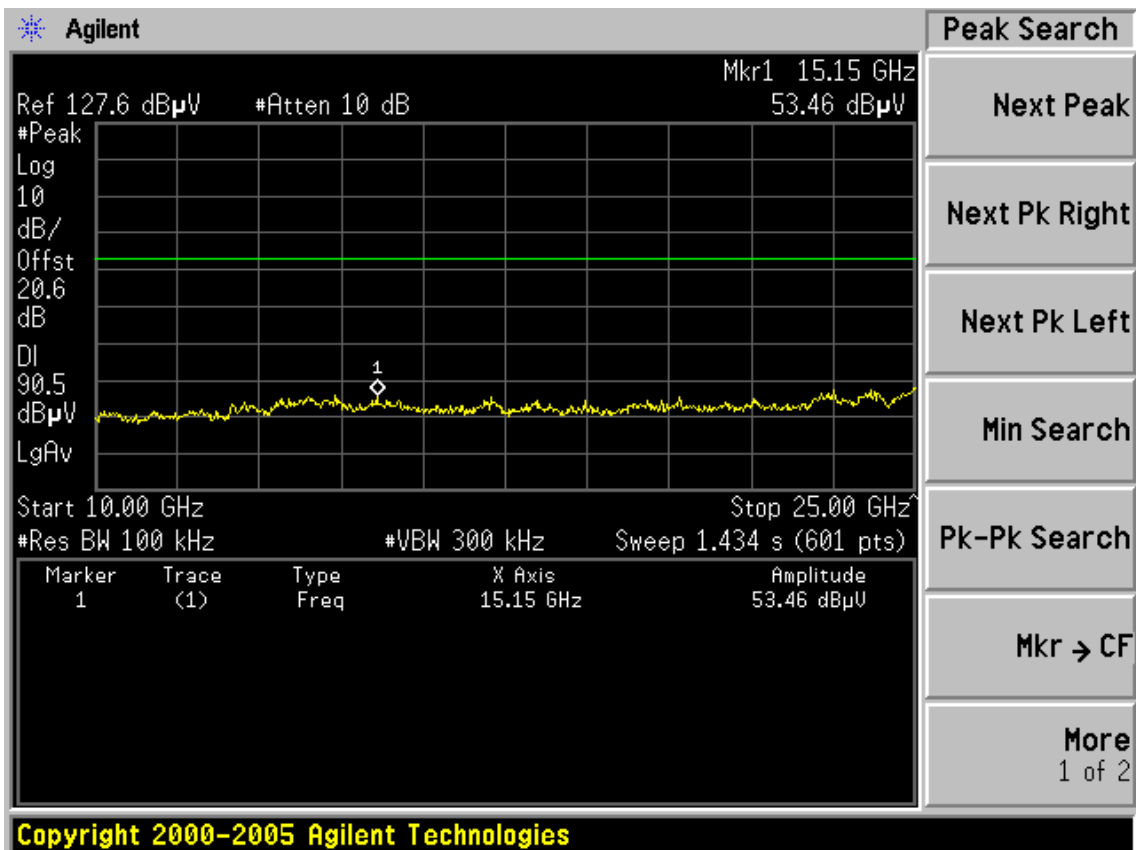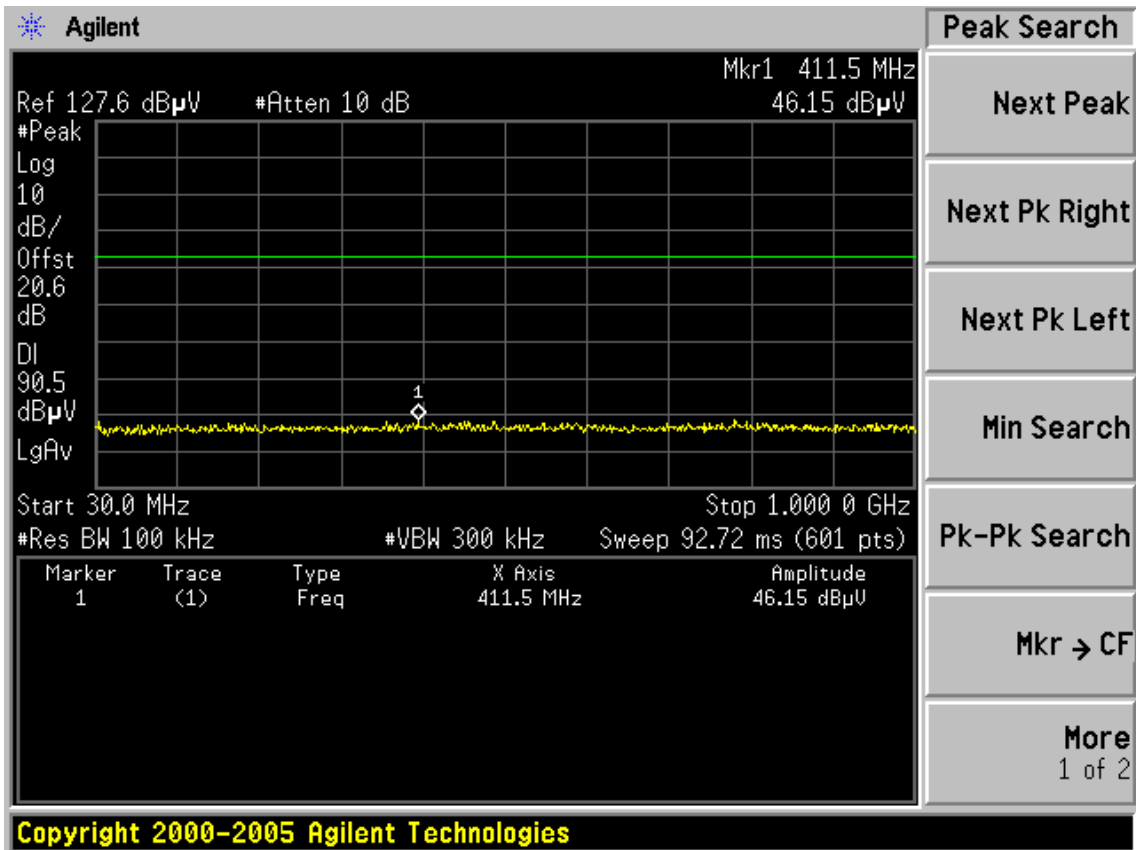

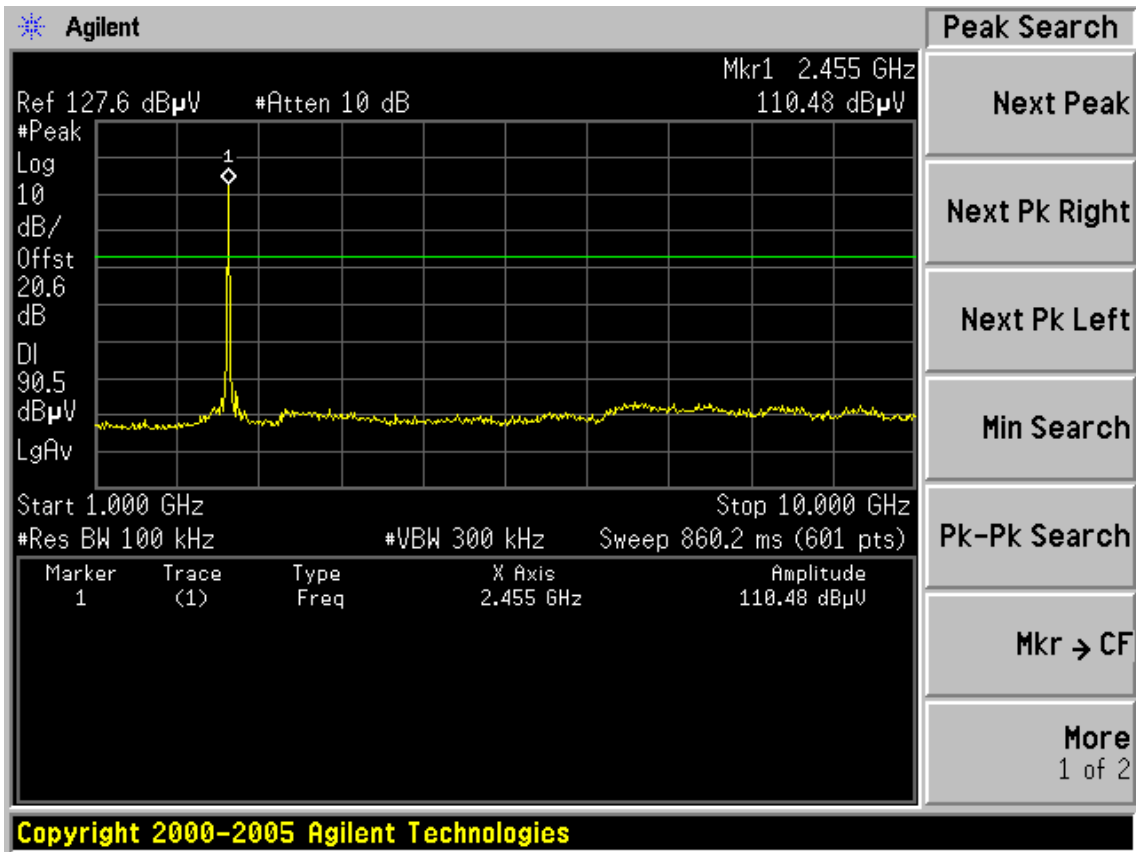


Test Mode: IEEE 802.11gTX  
CH1

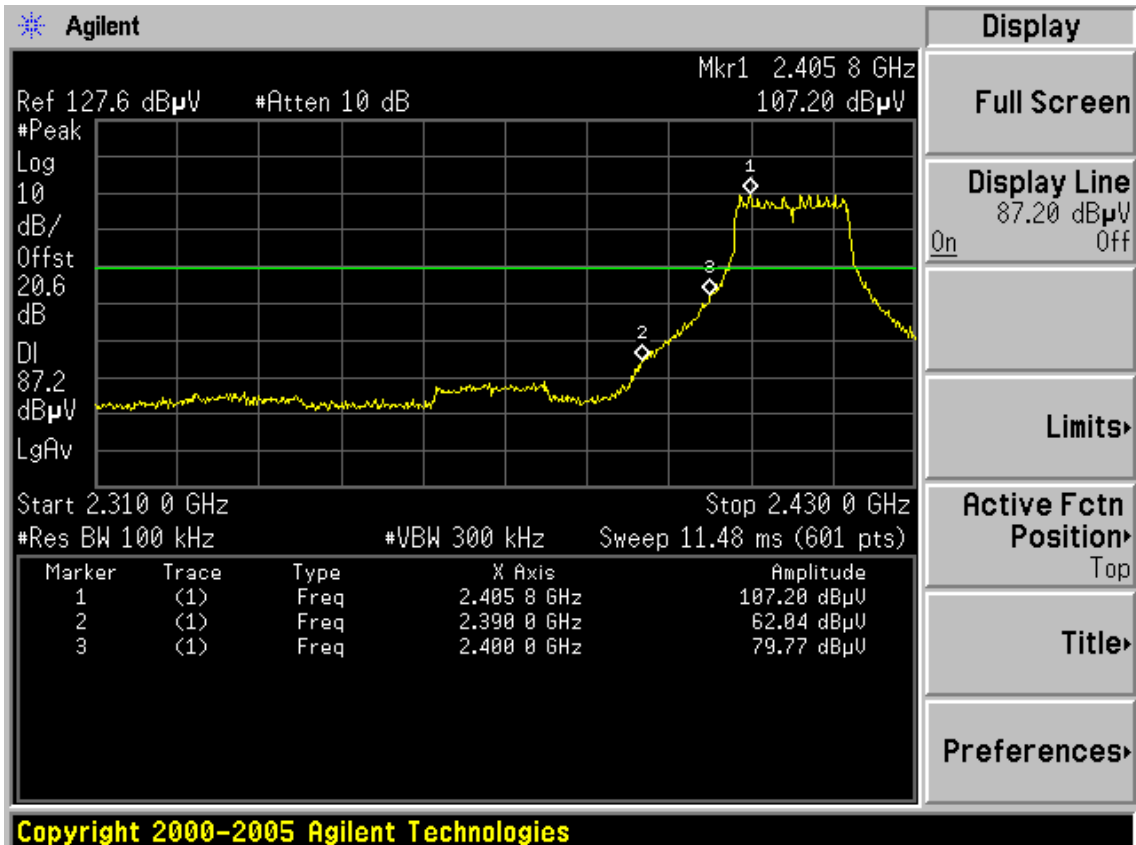


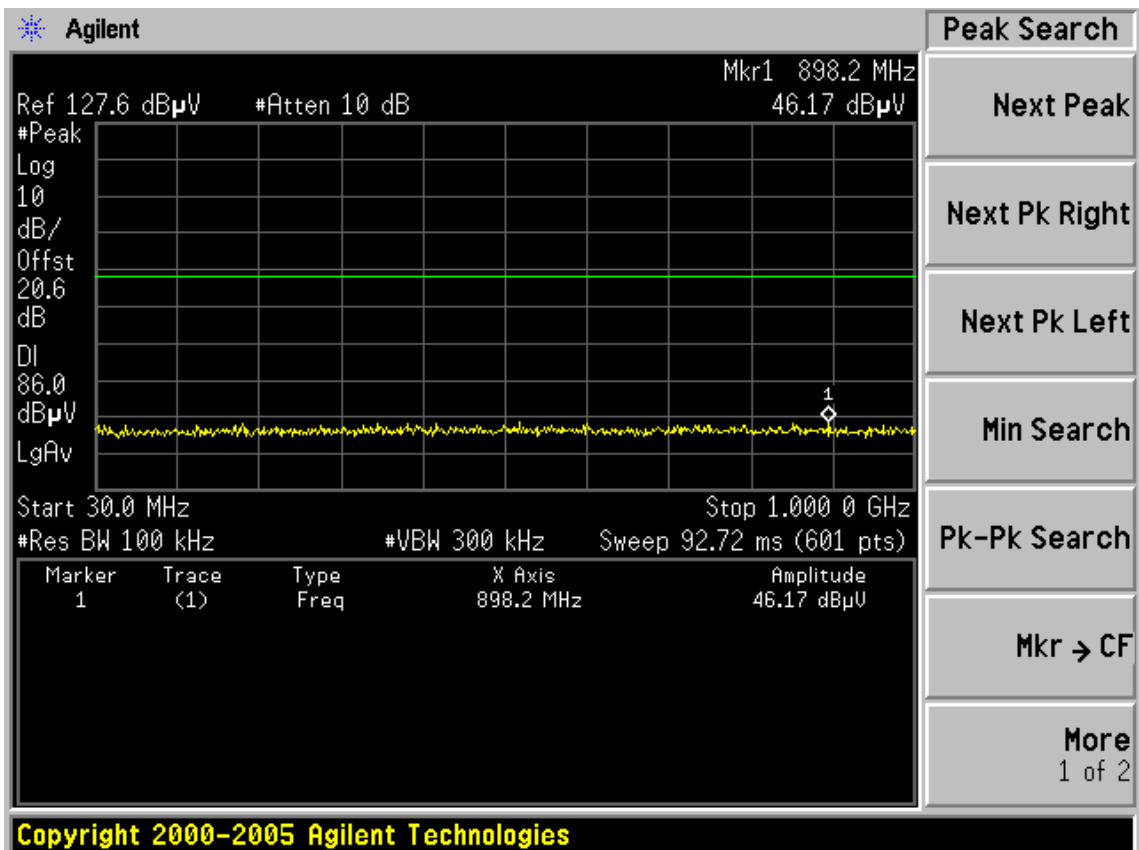
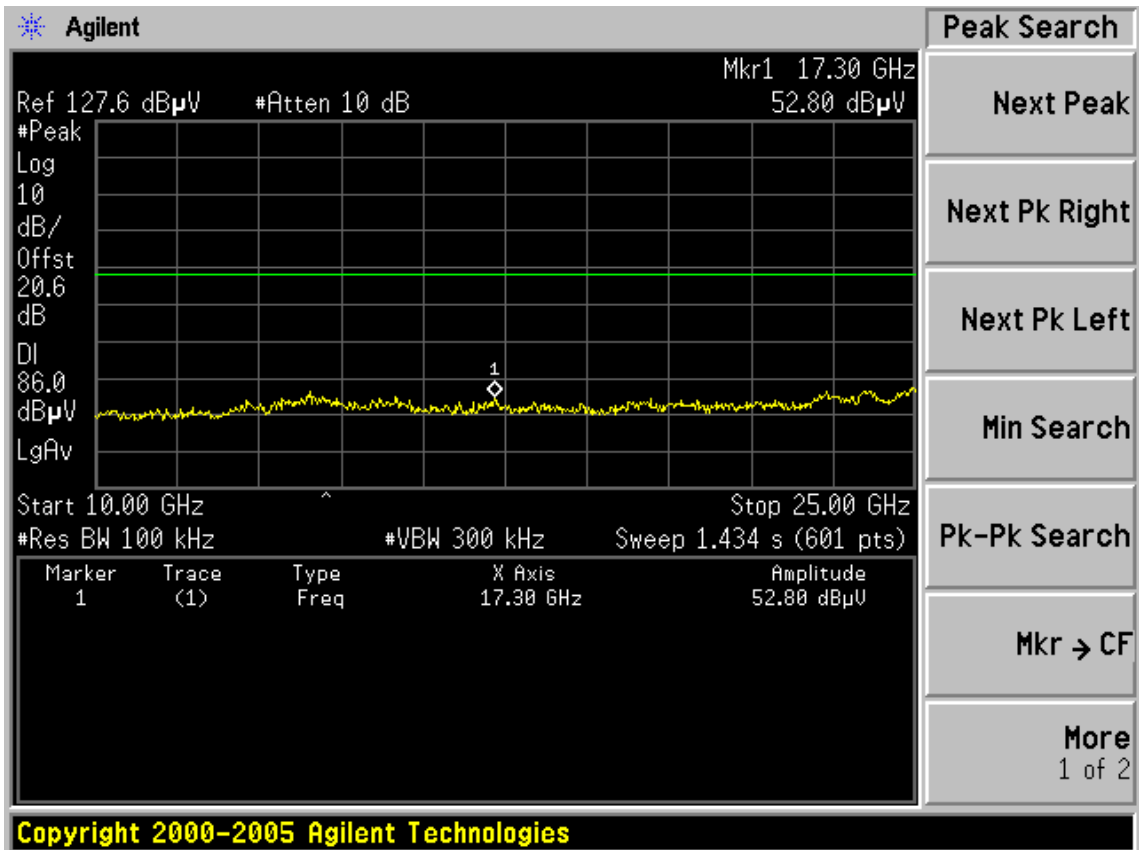





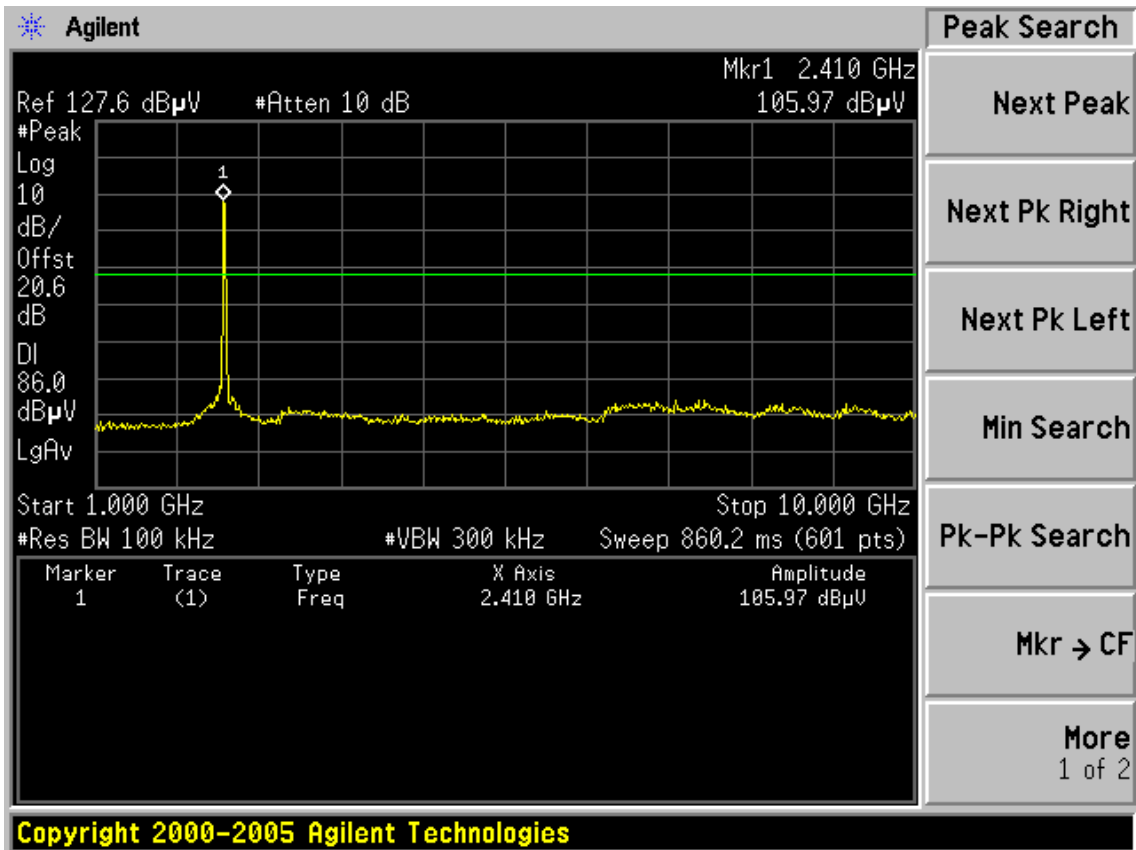




CH6

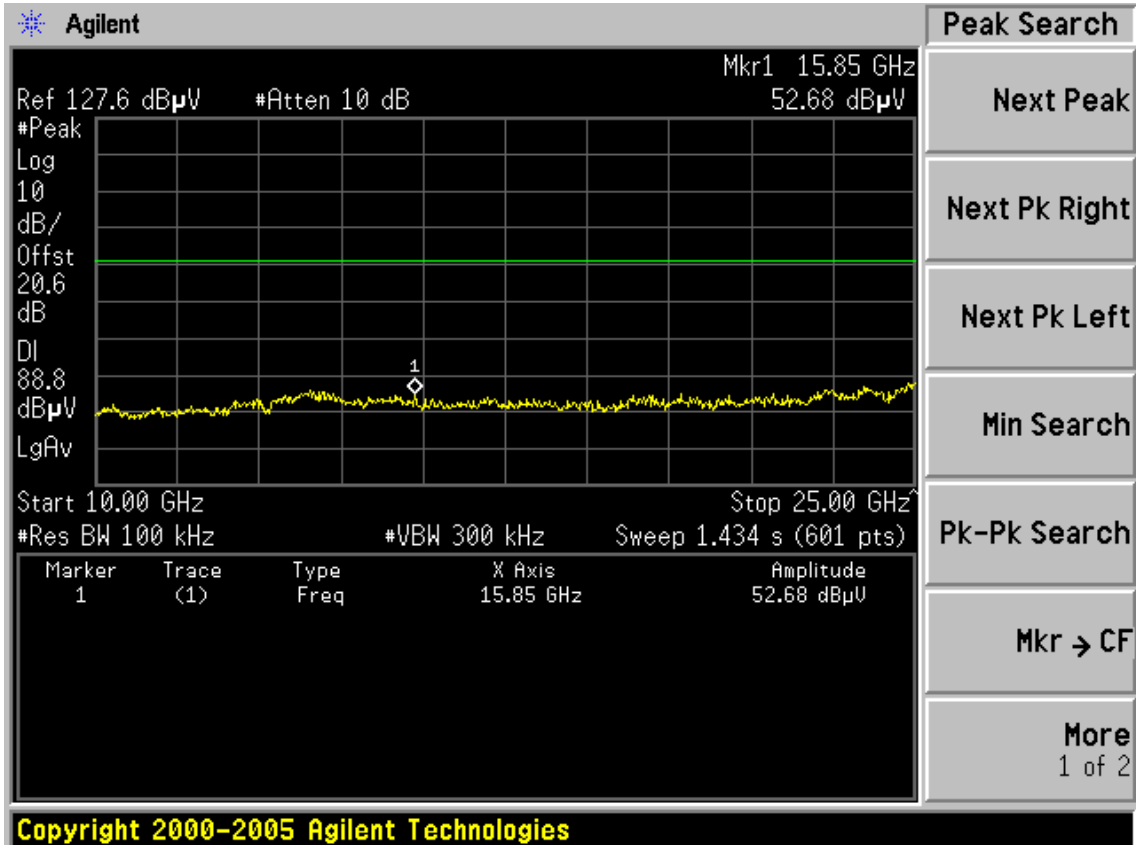

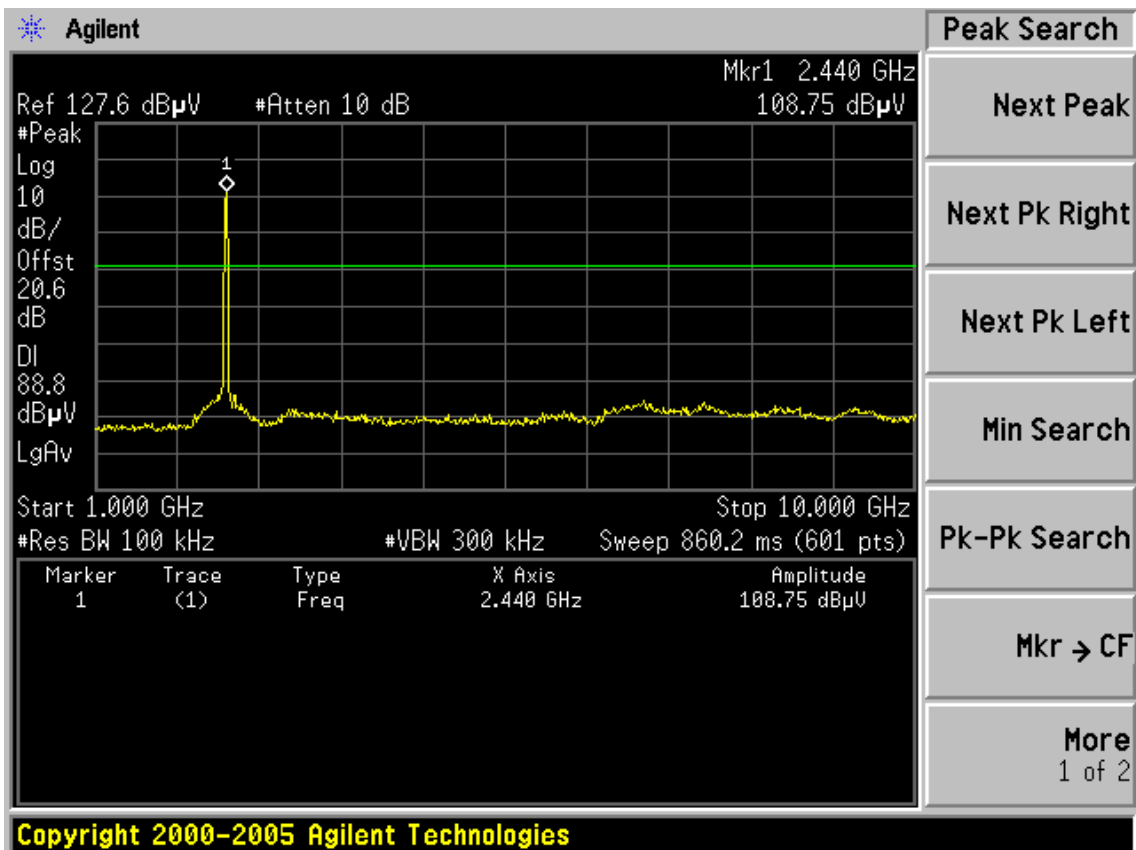
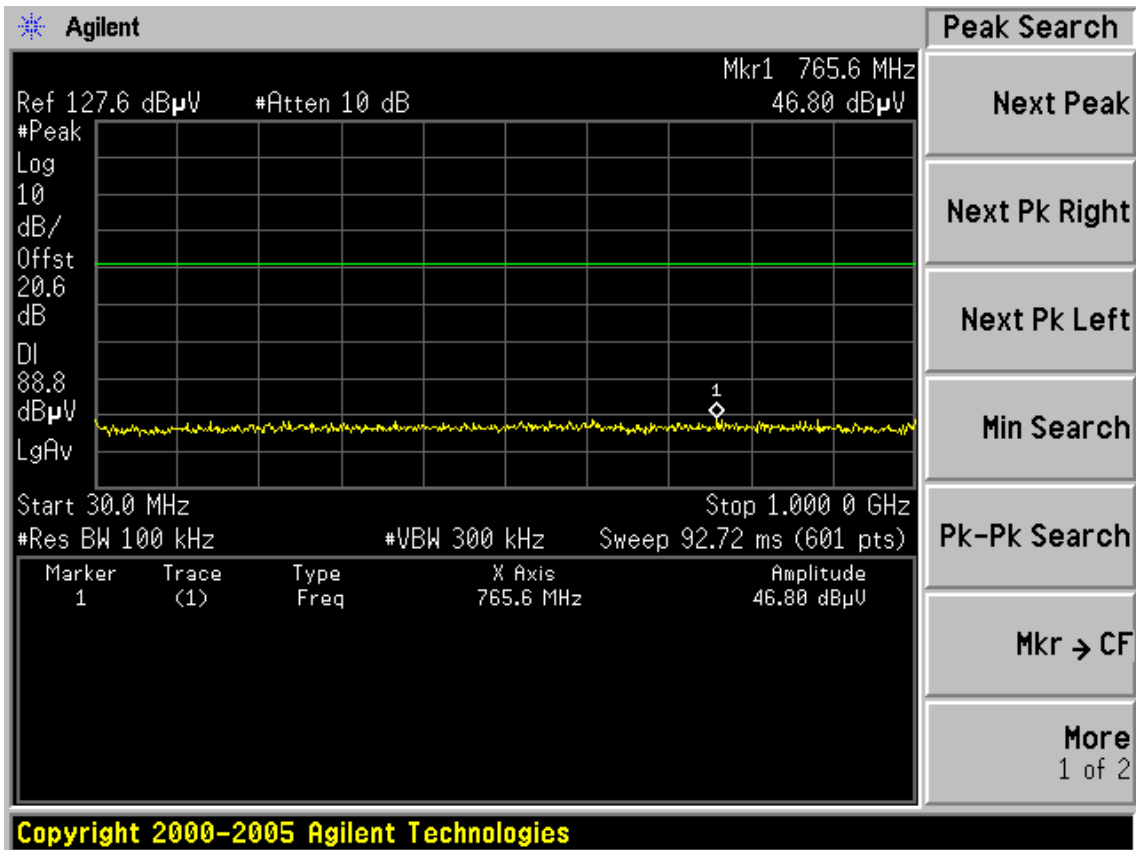




CH11

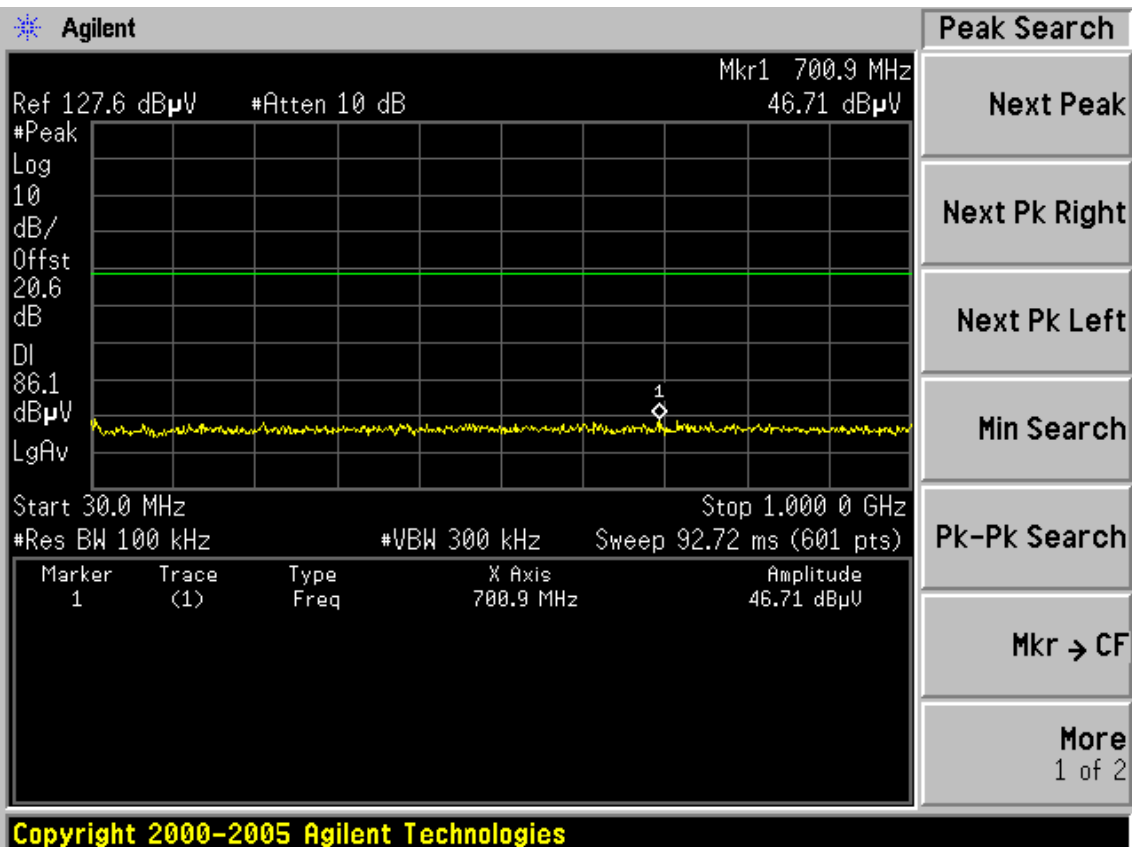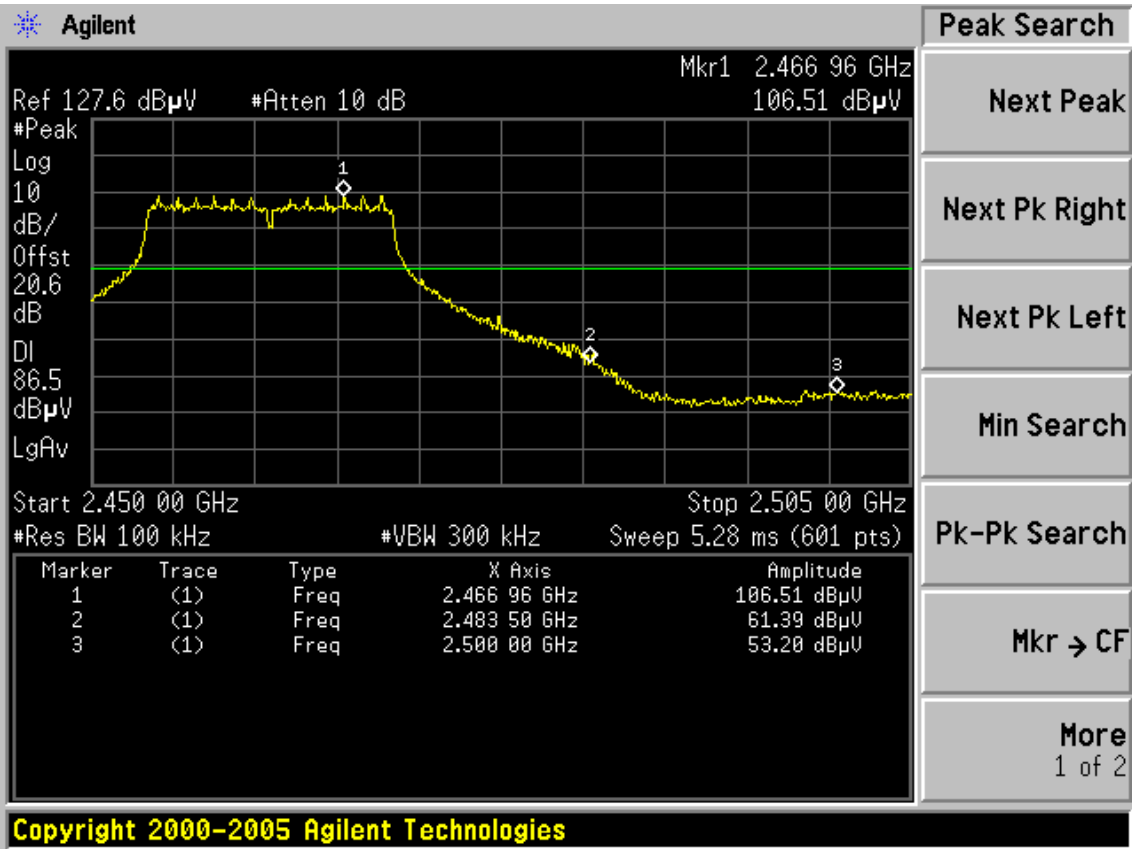

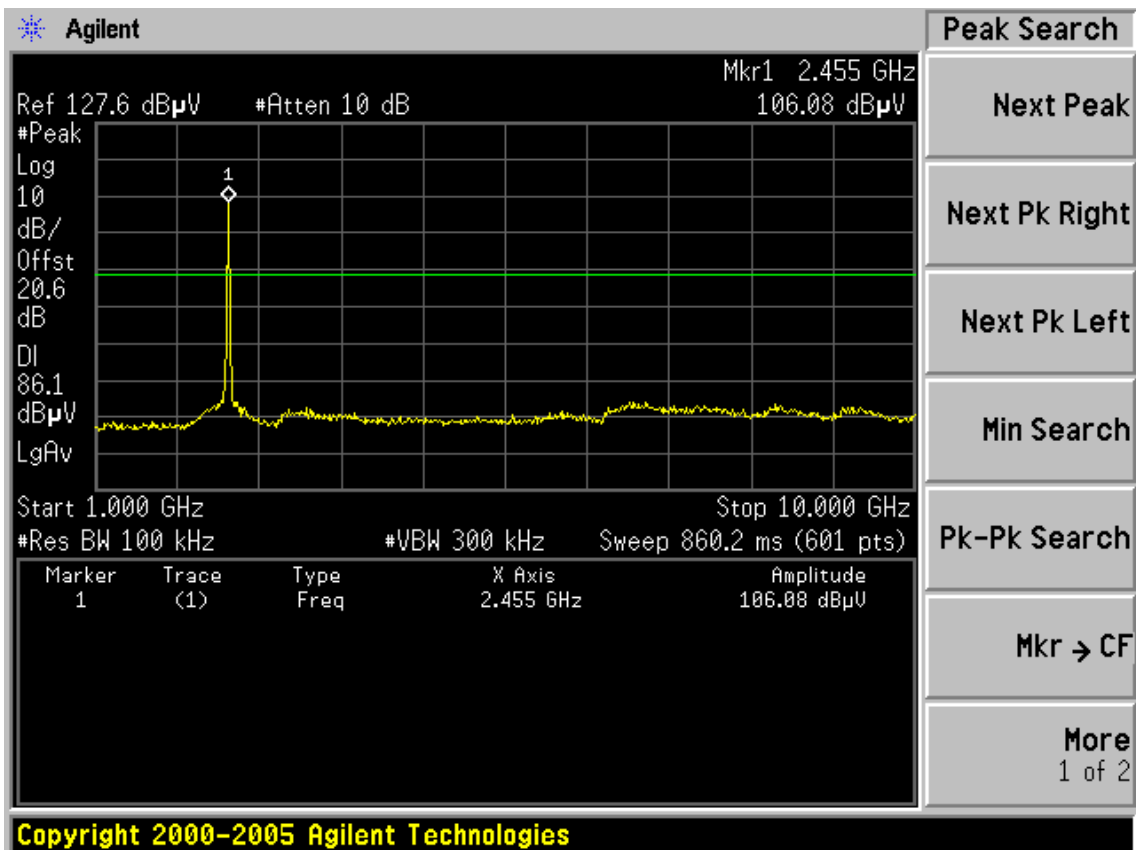
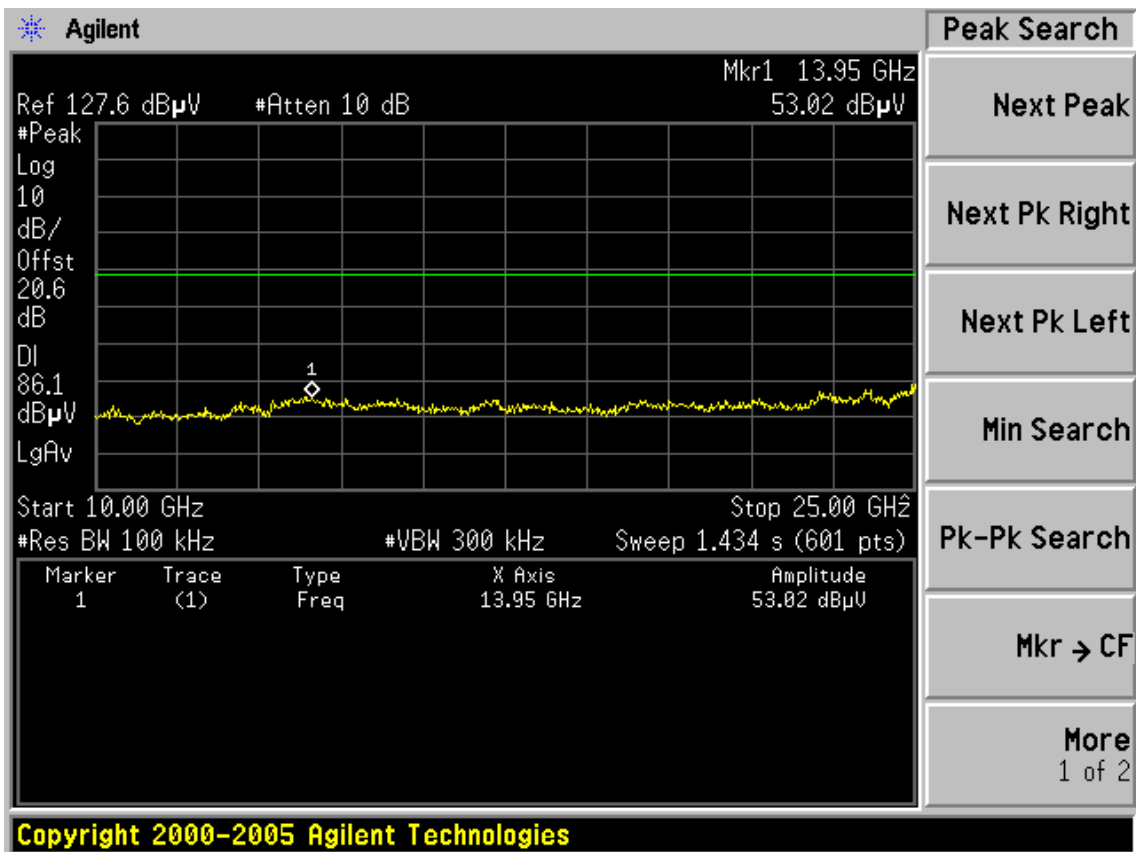



Test Mode: IEEE 802.11n HT20TX  
CH1

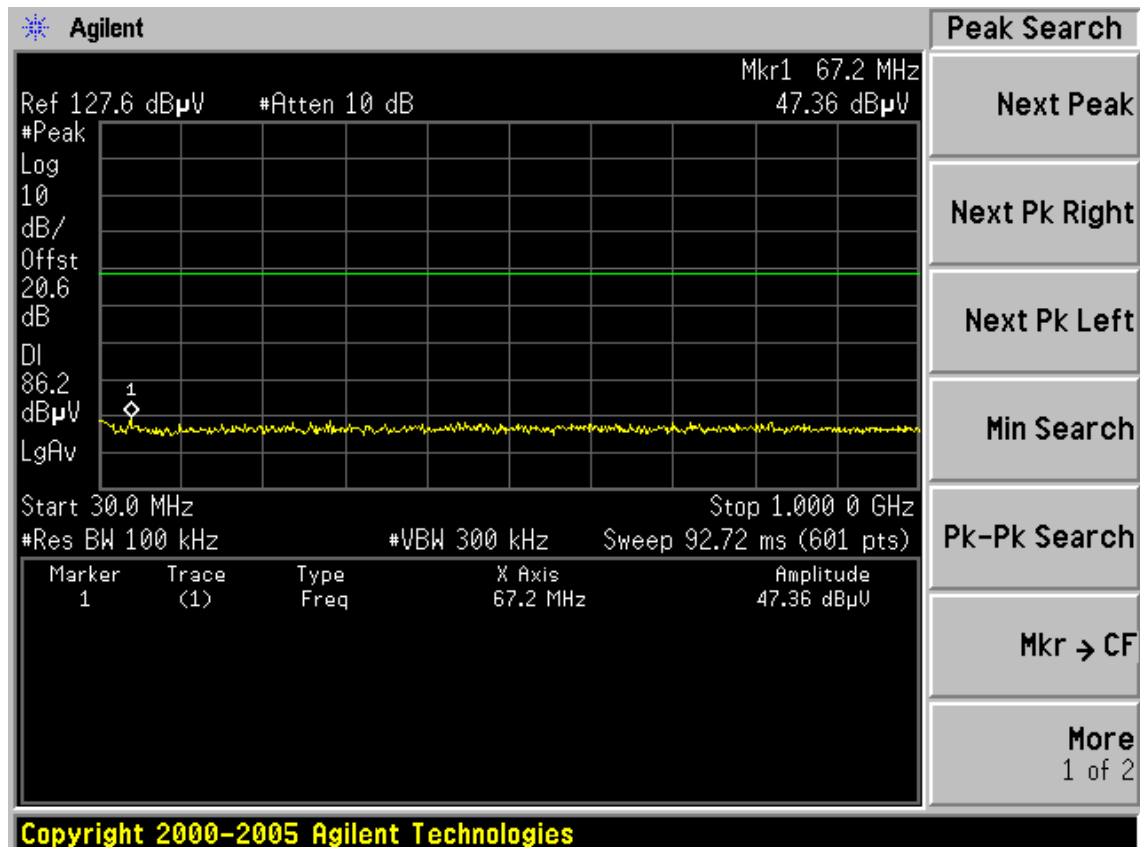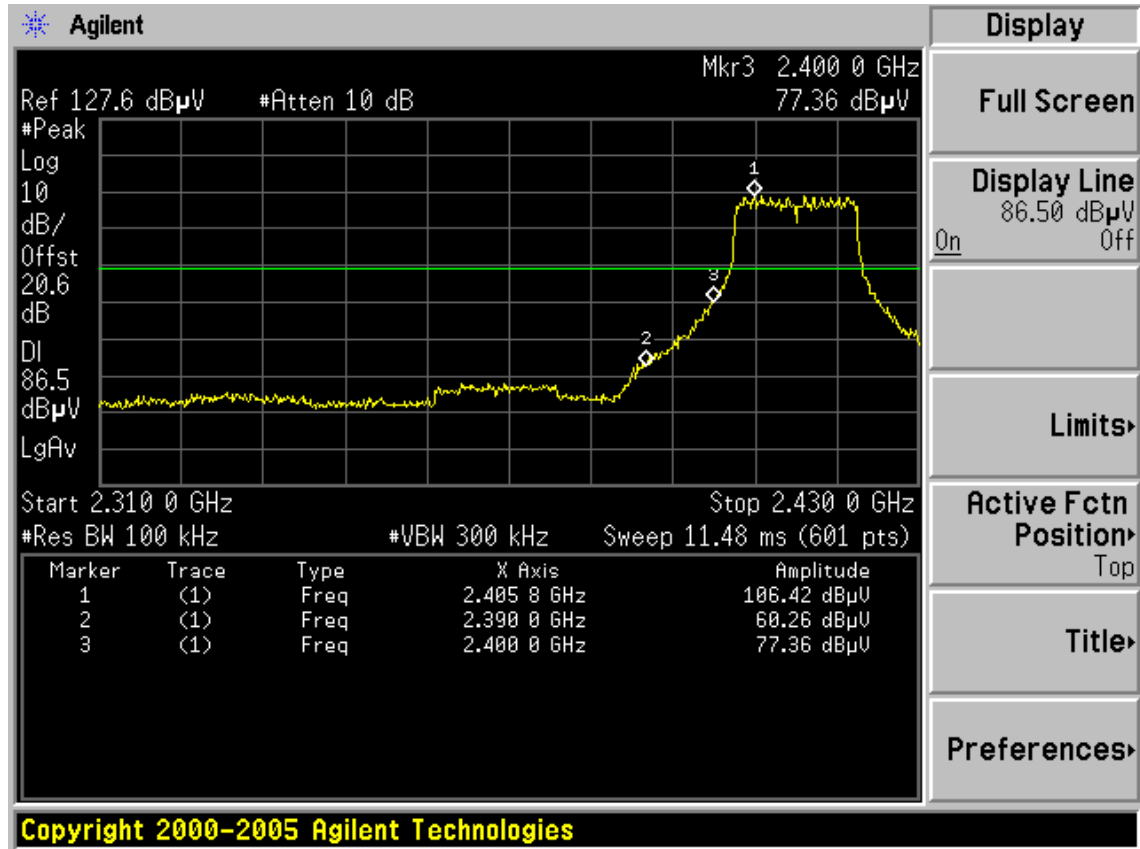

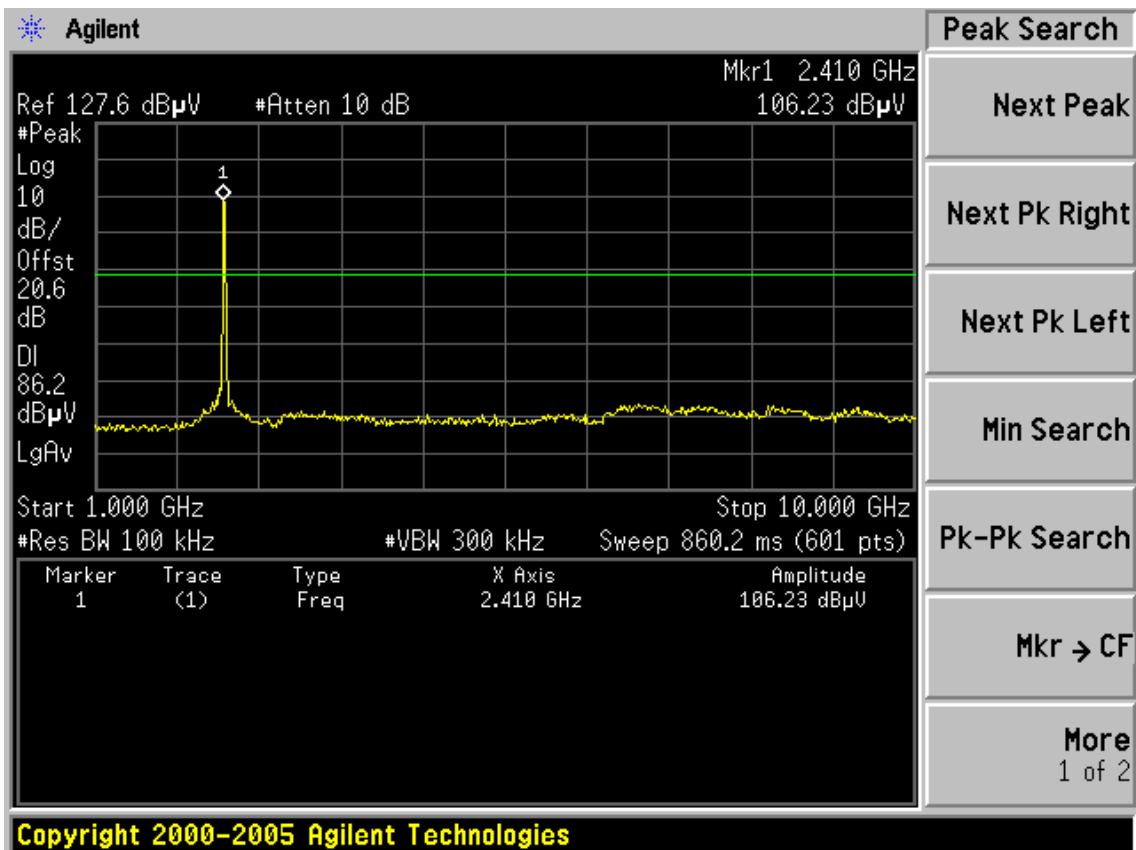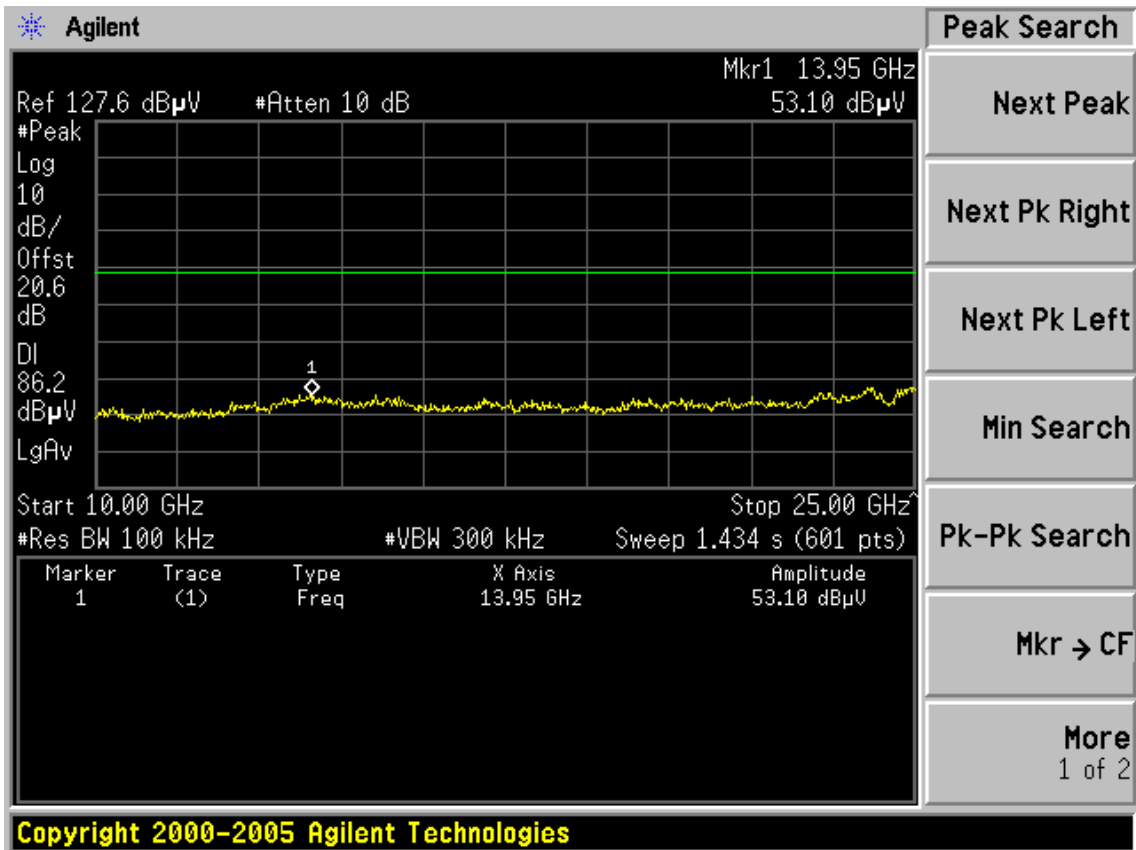


CH6

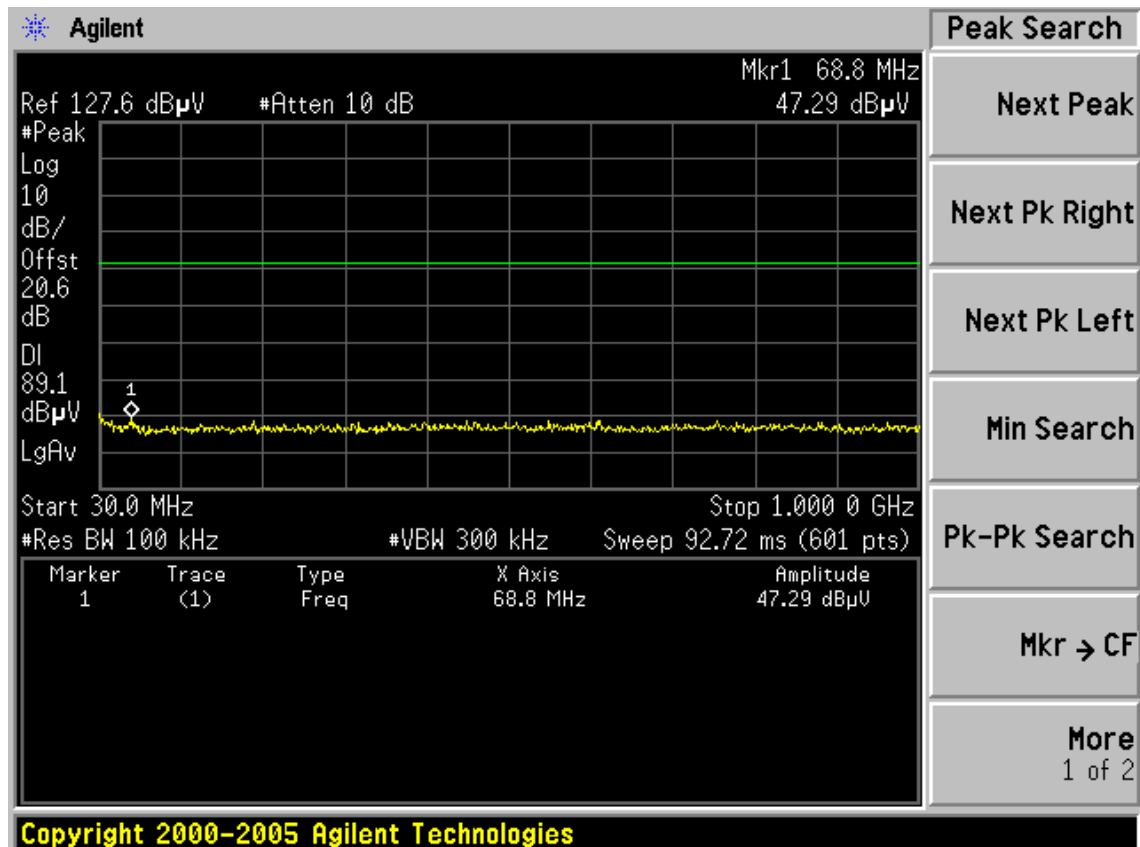
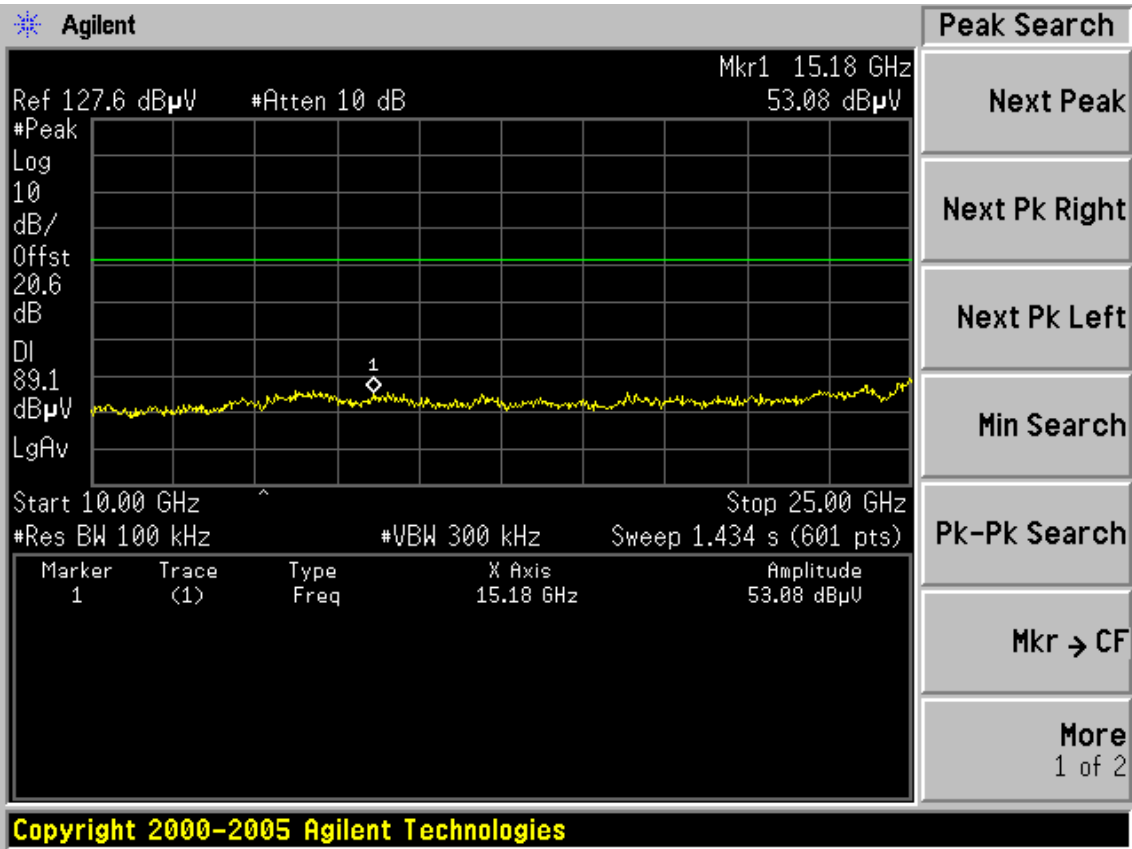


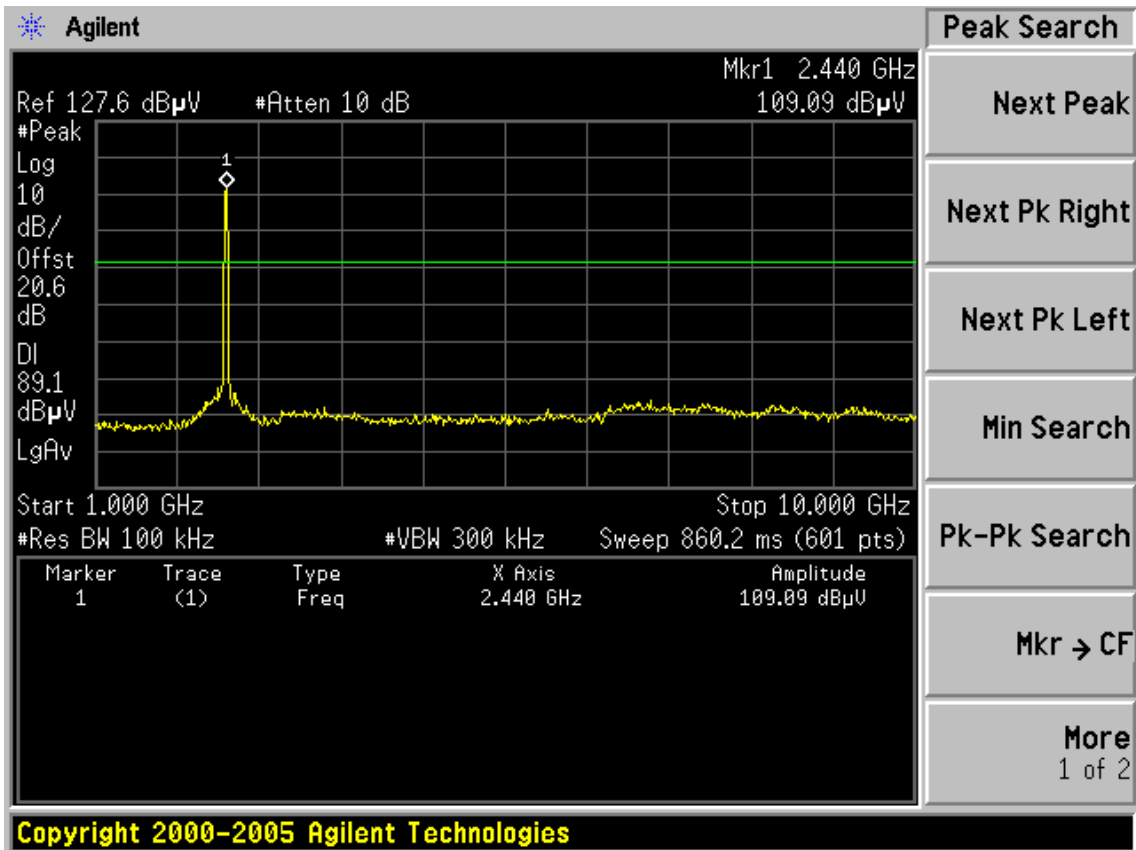


CH11

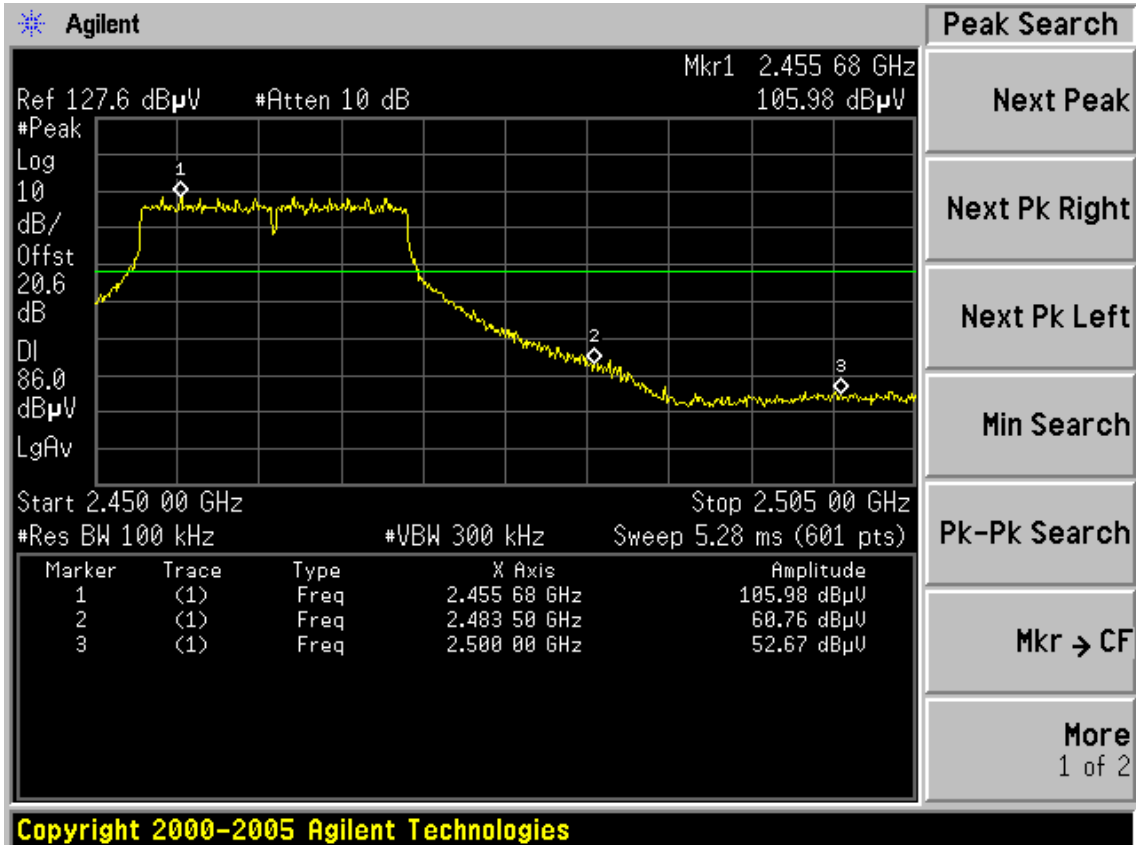






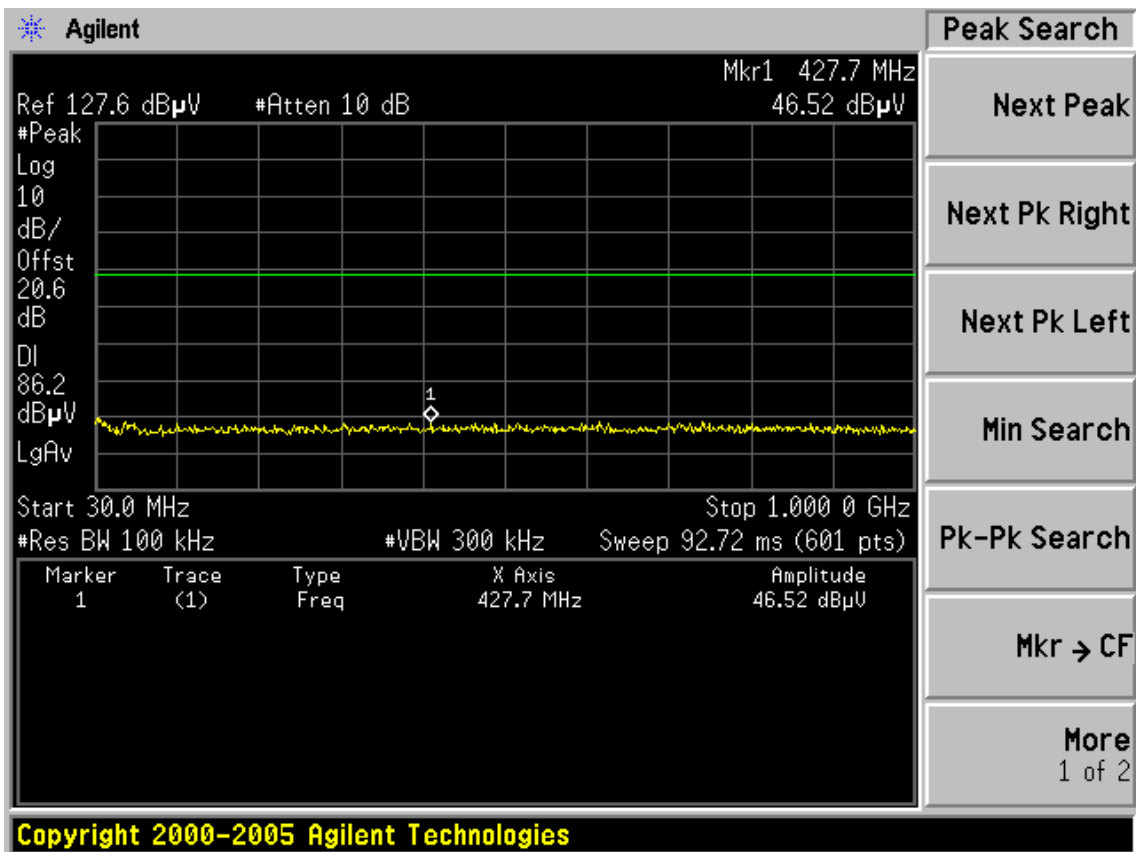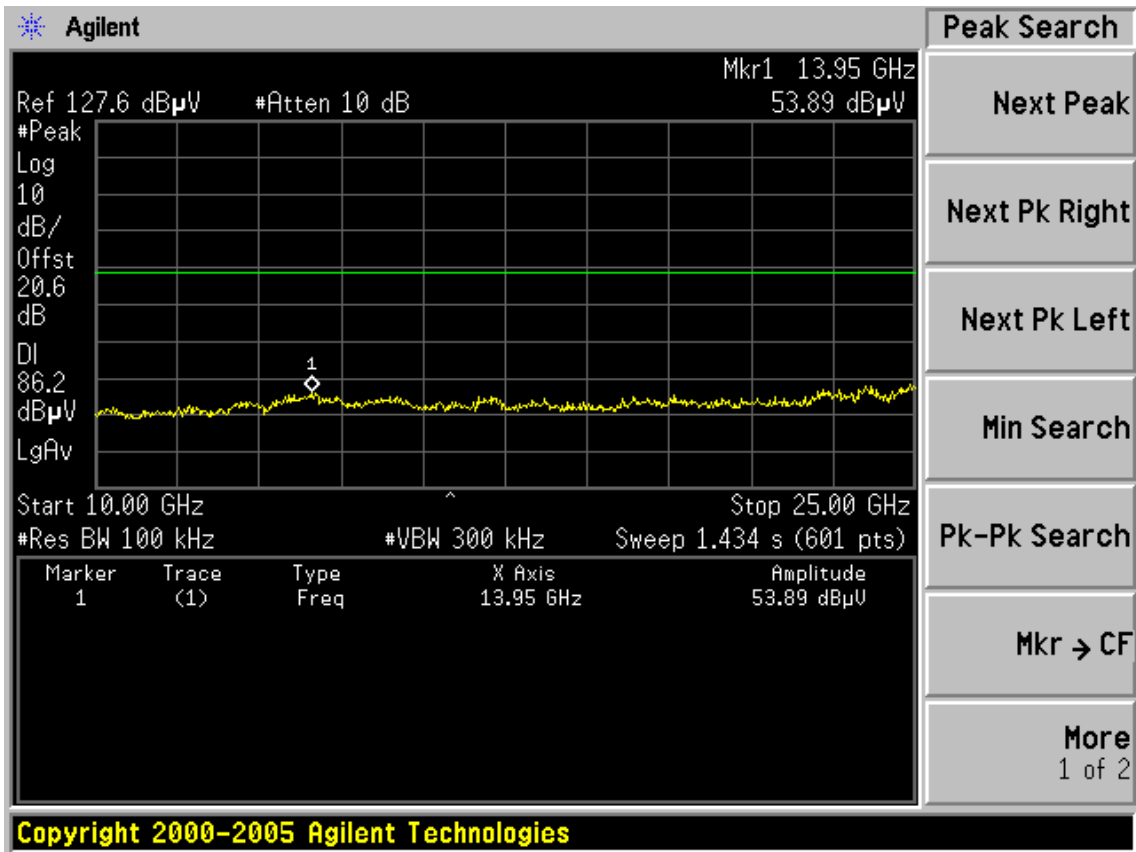


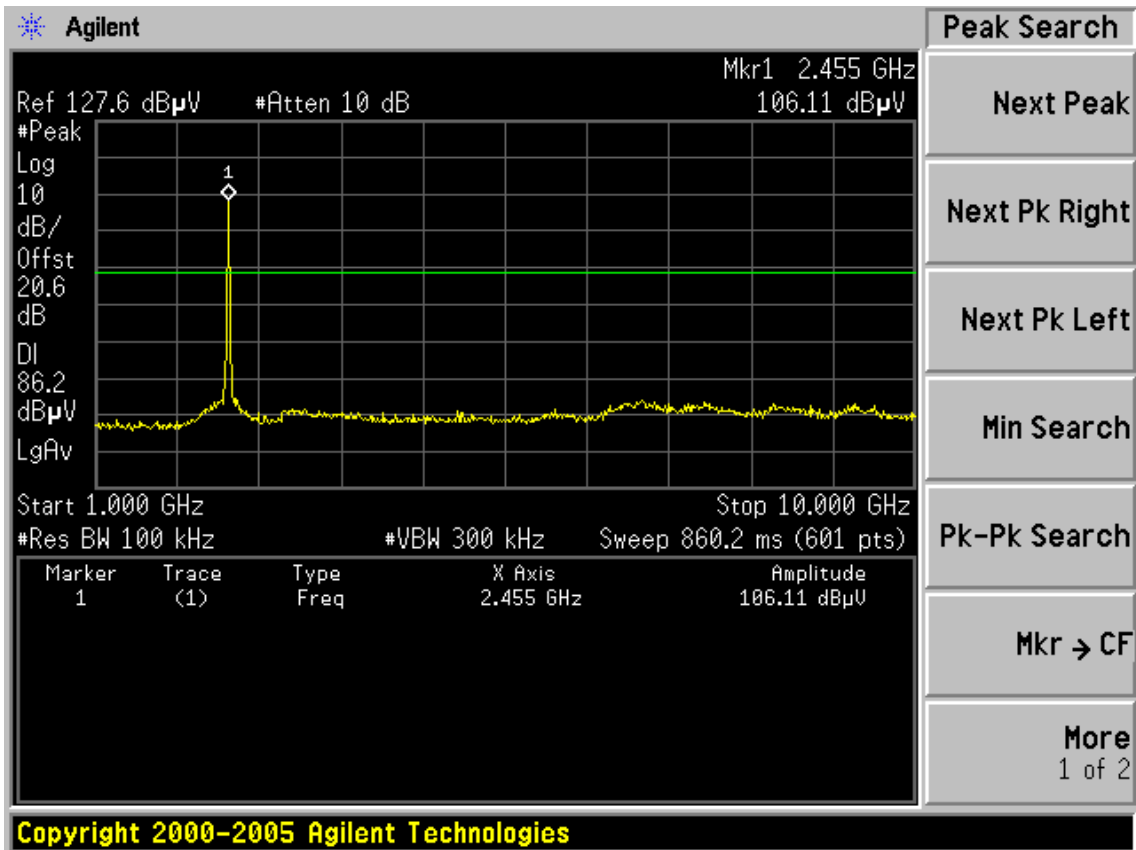


Test Mode: IEEE 802.11n HT40 TX  
CH1


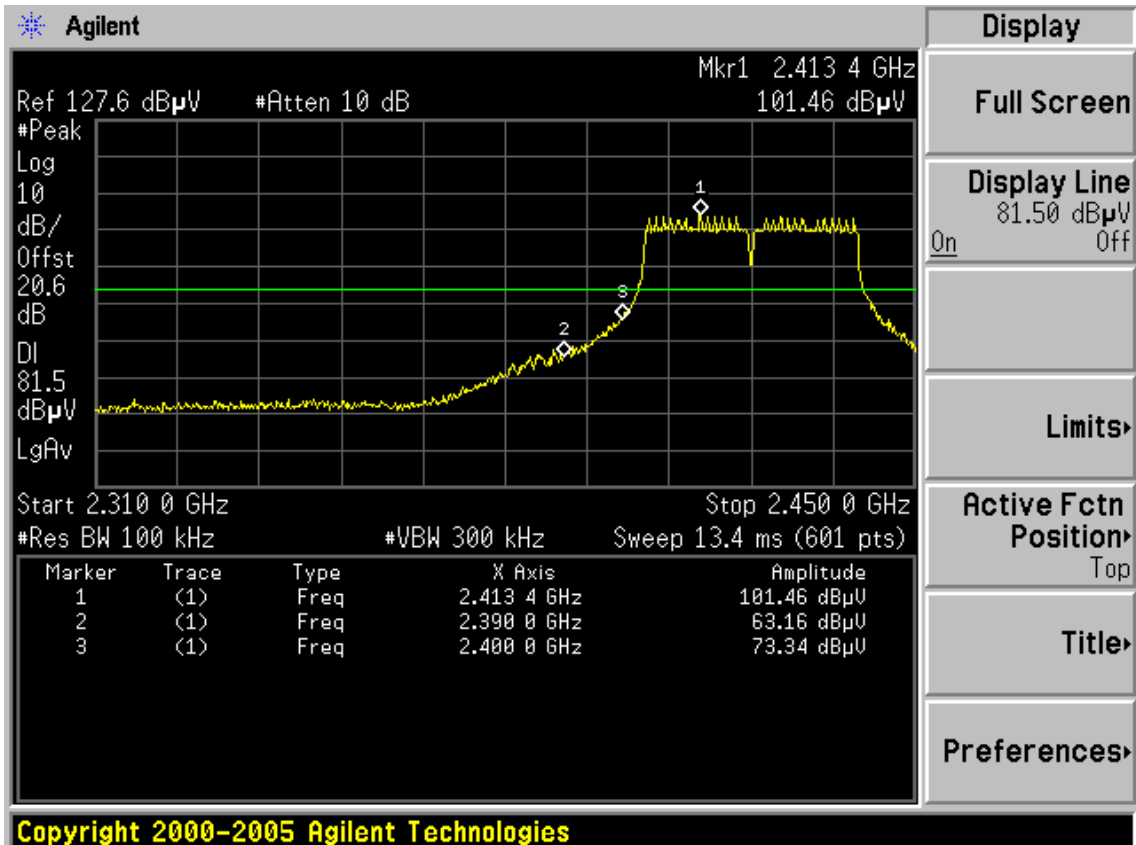


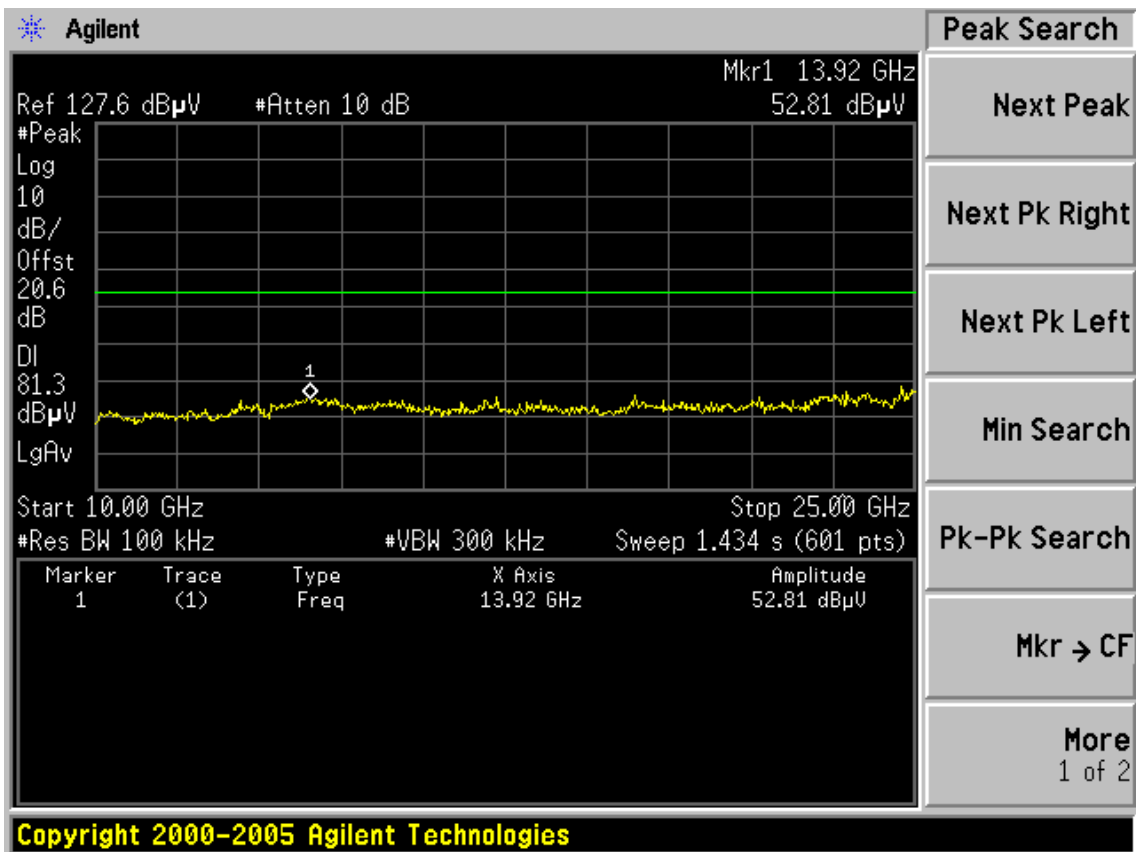
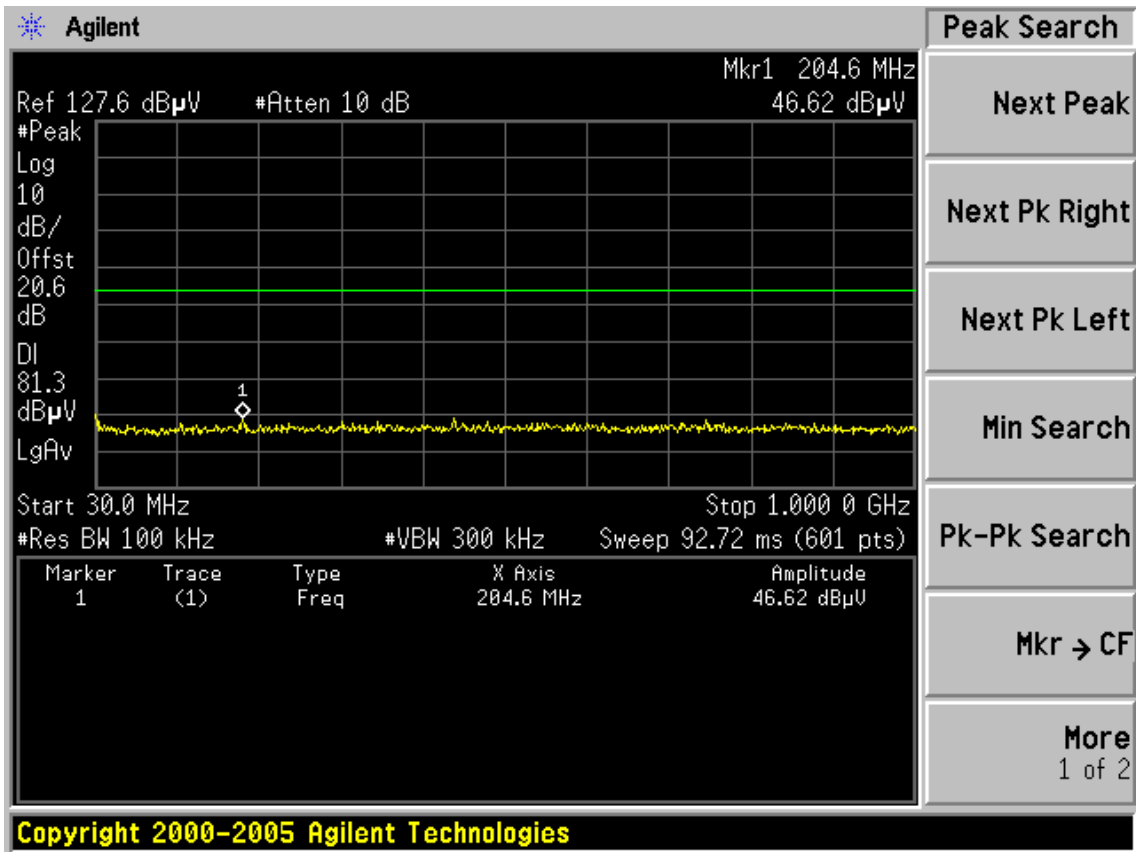



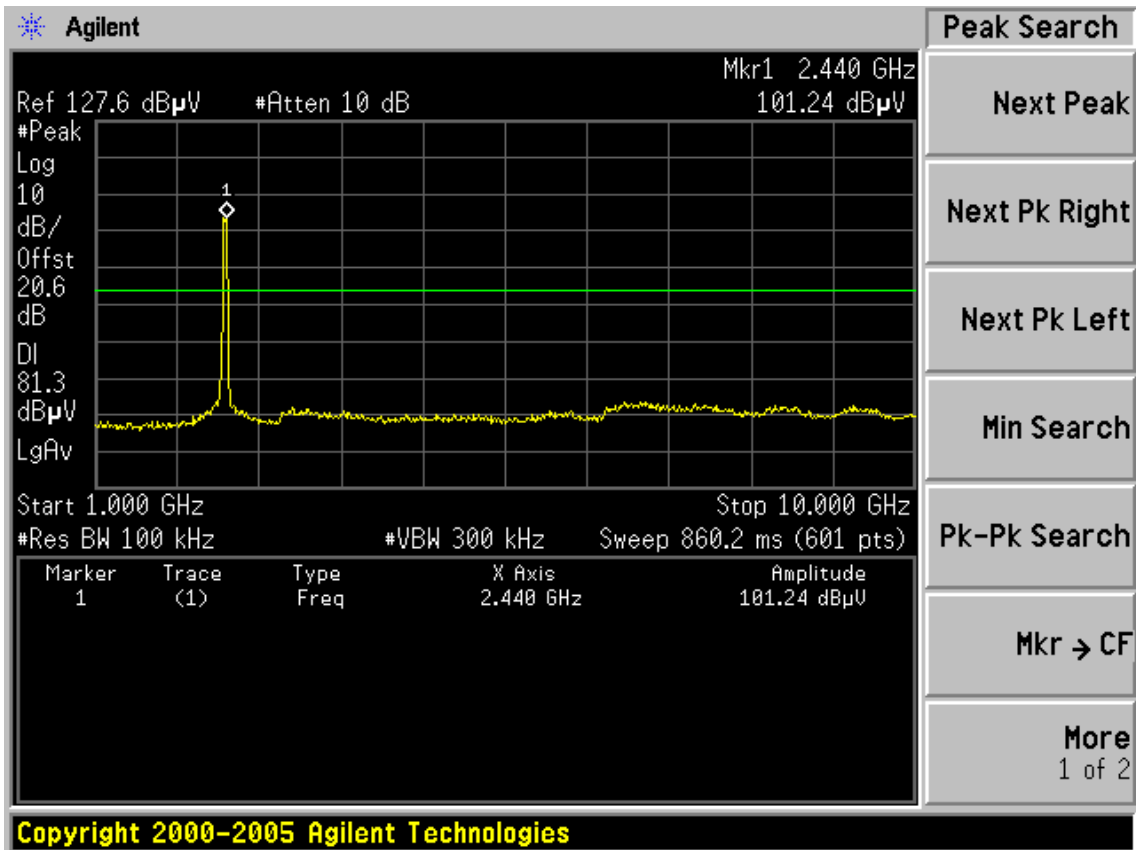


CH4

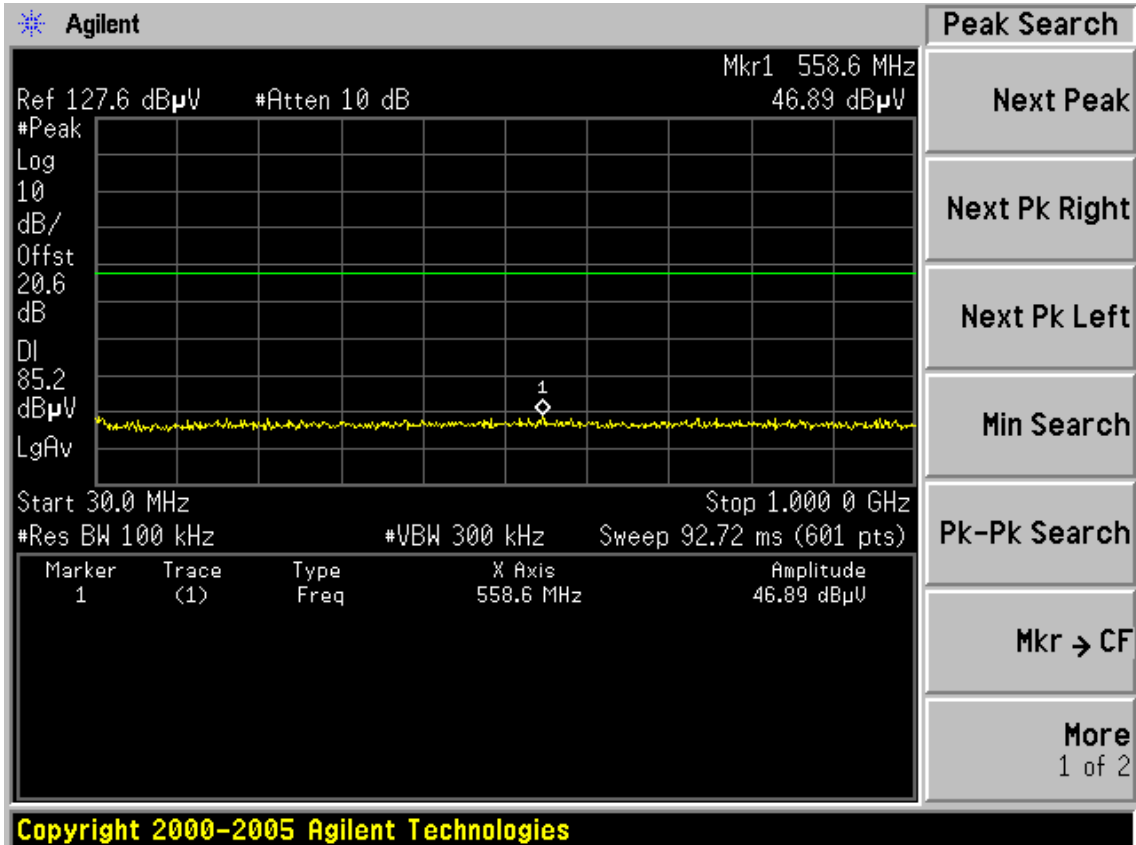

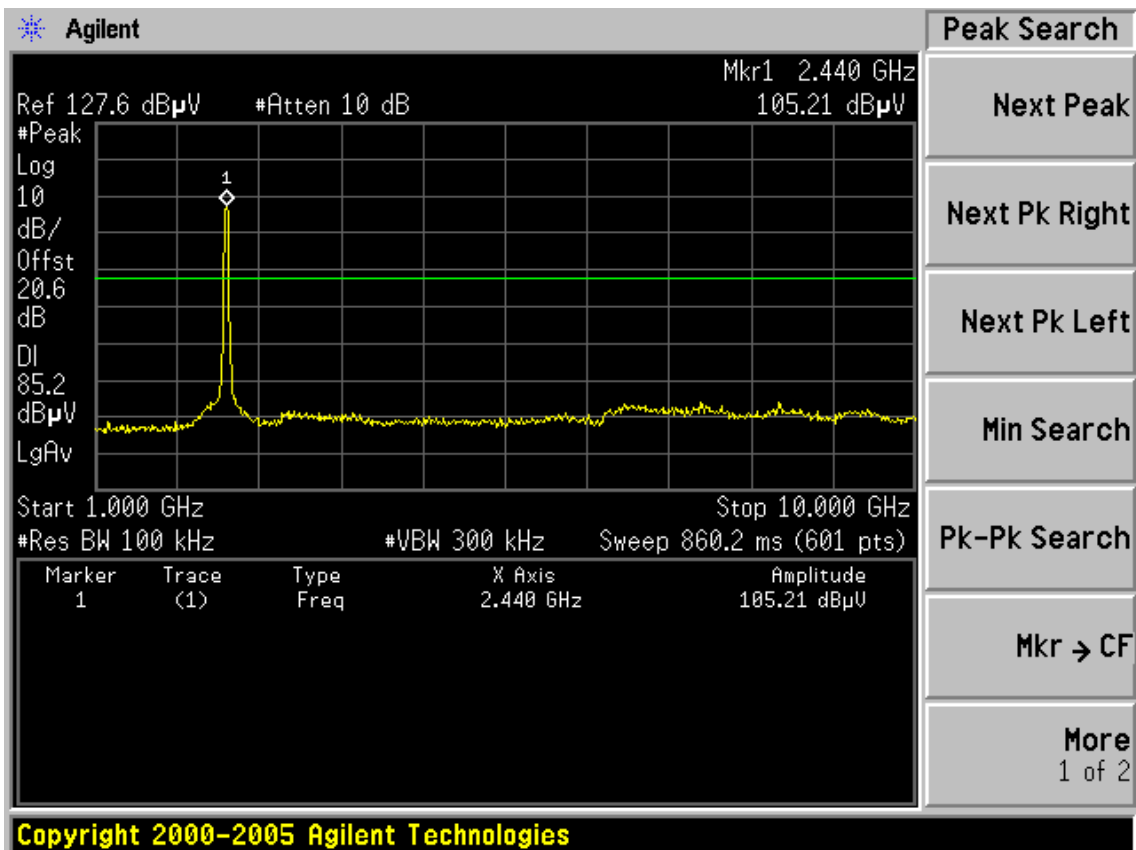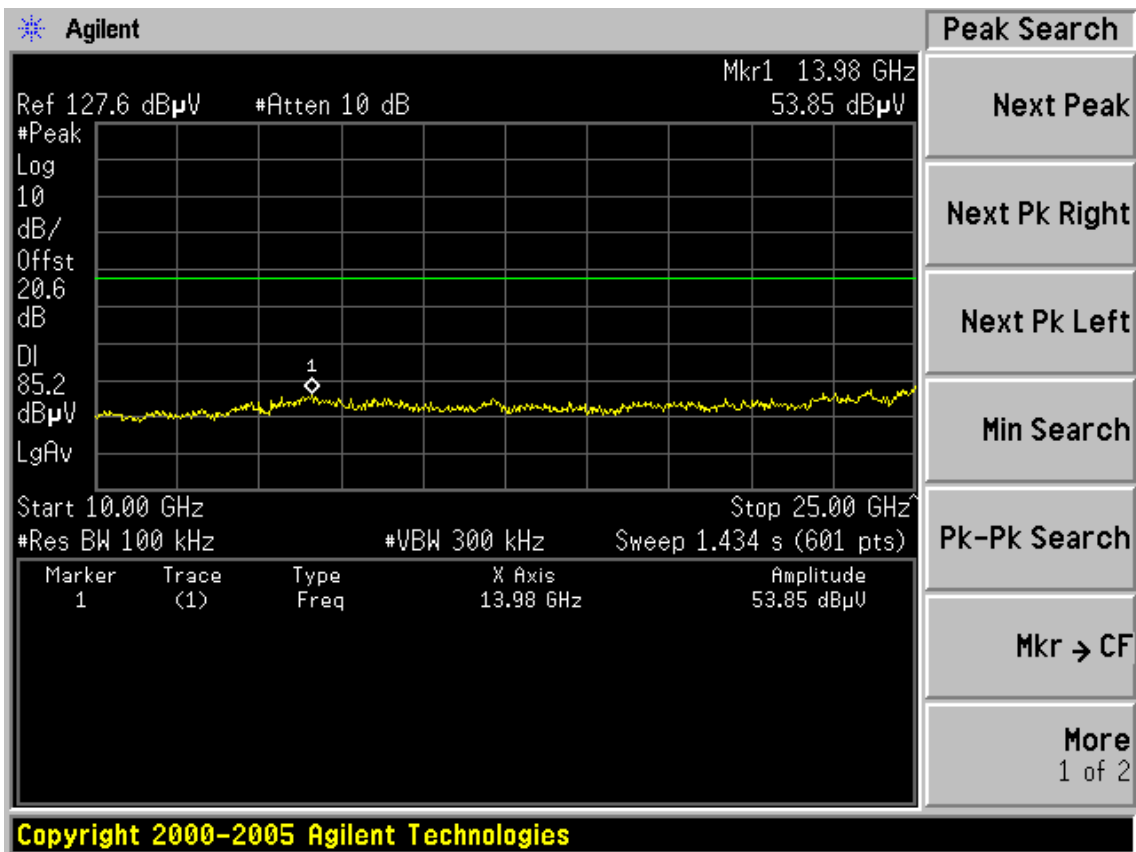

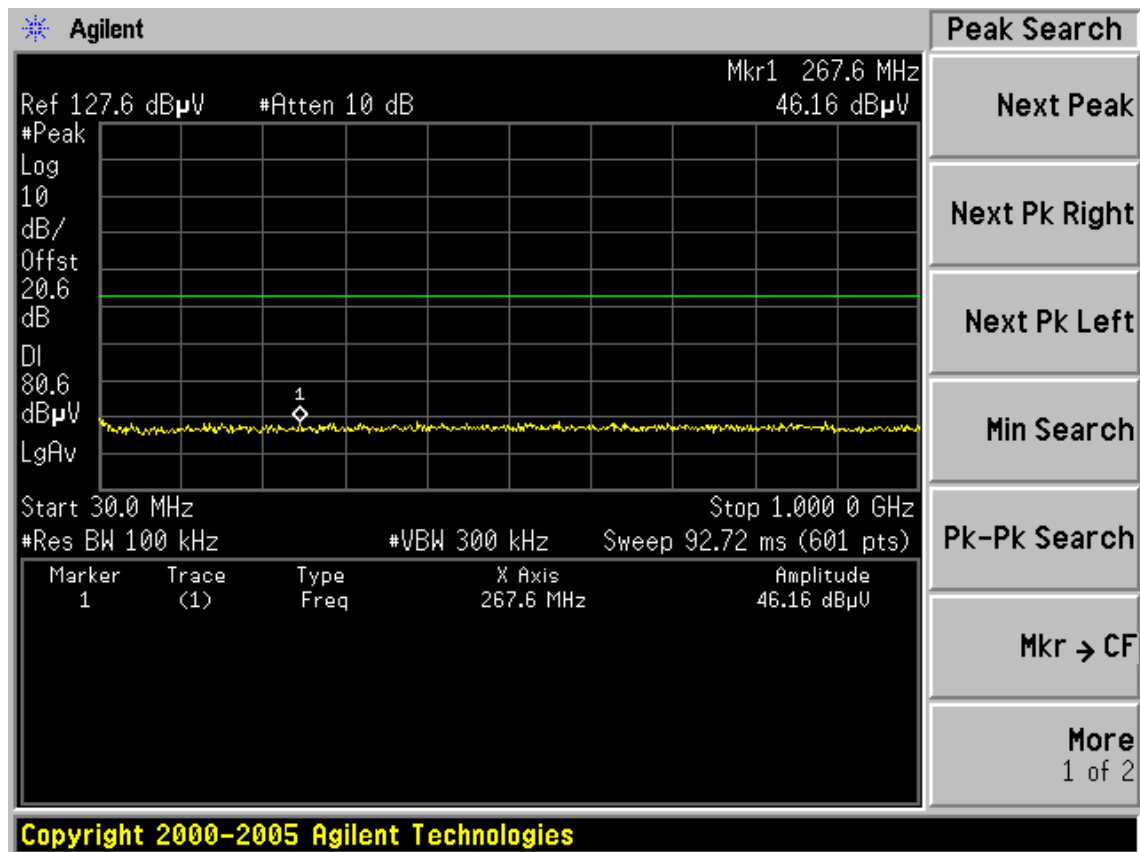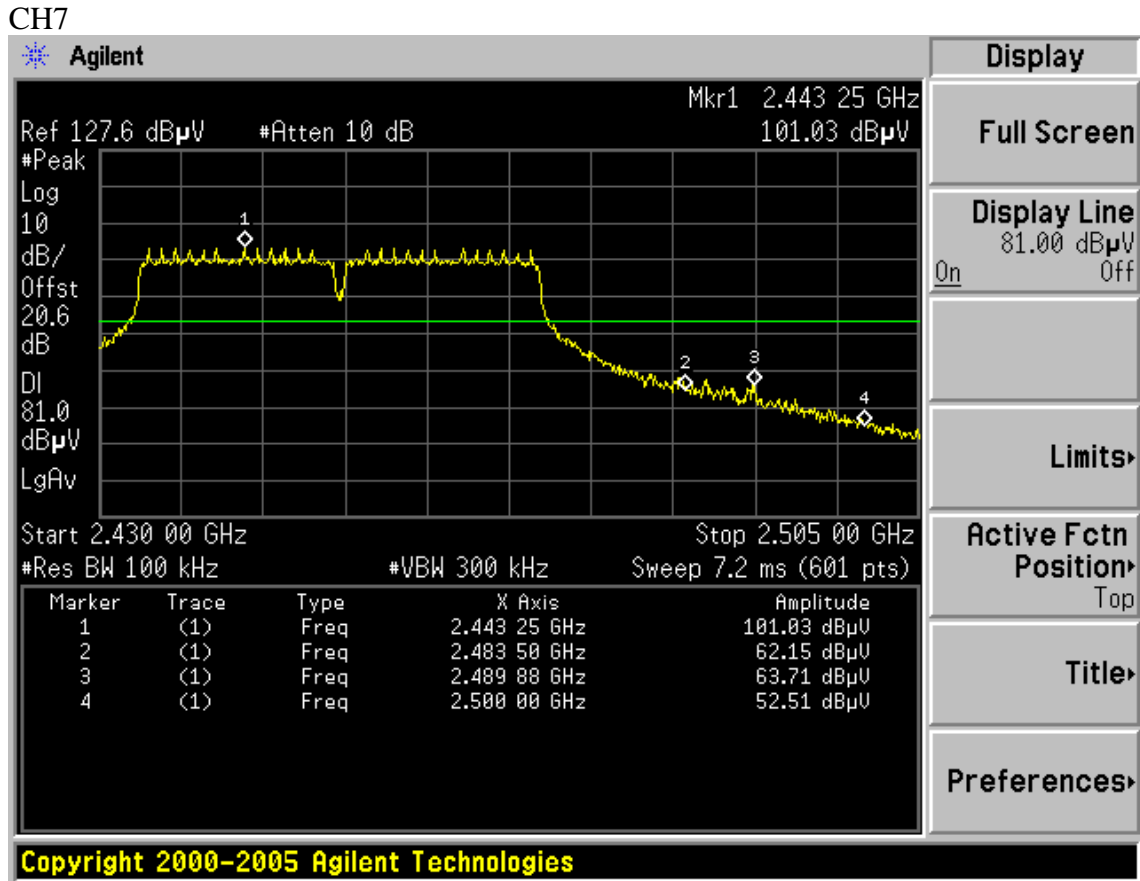

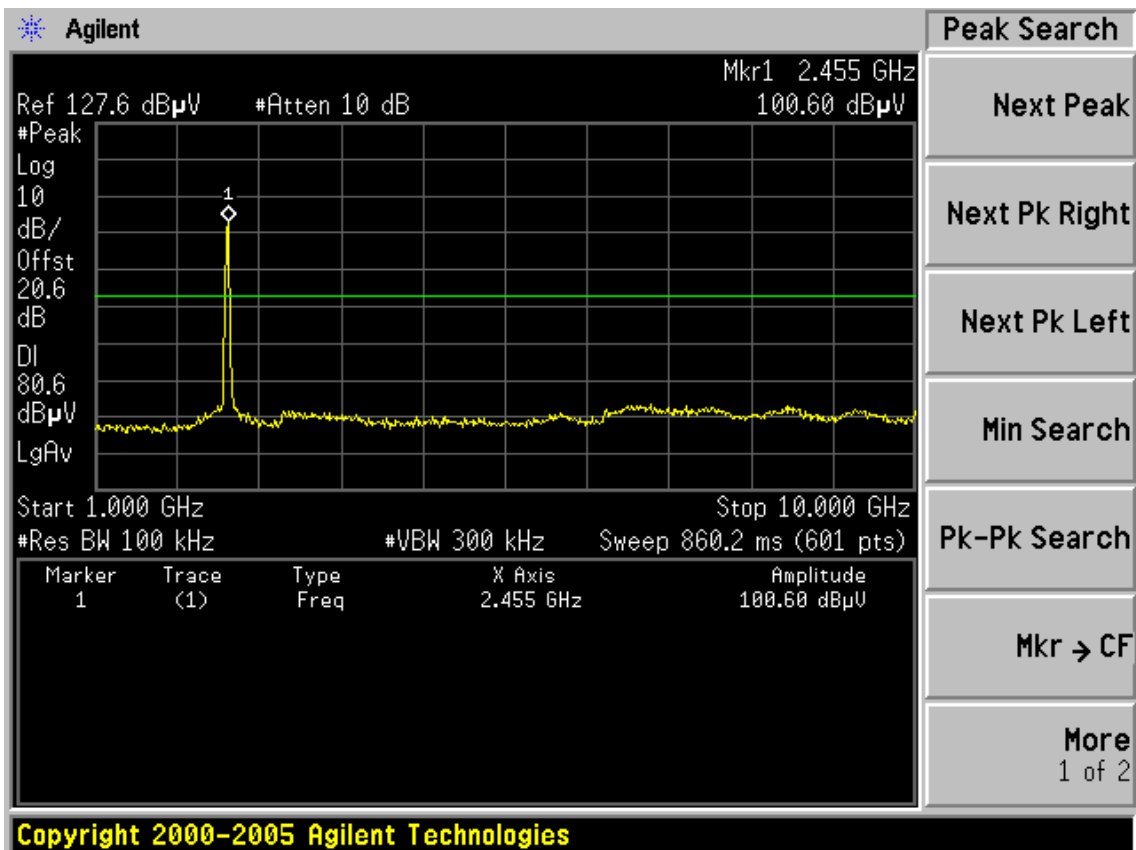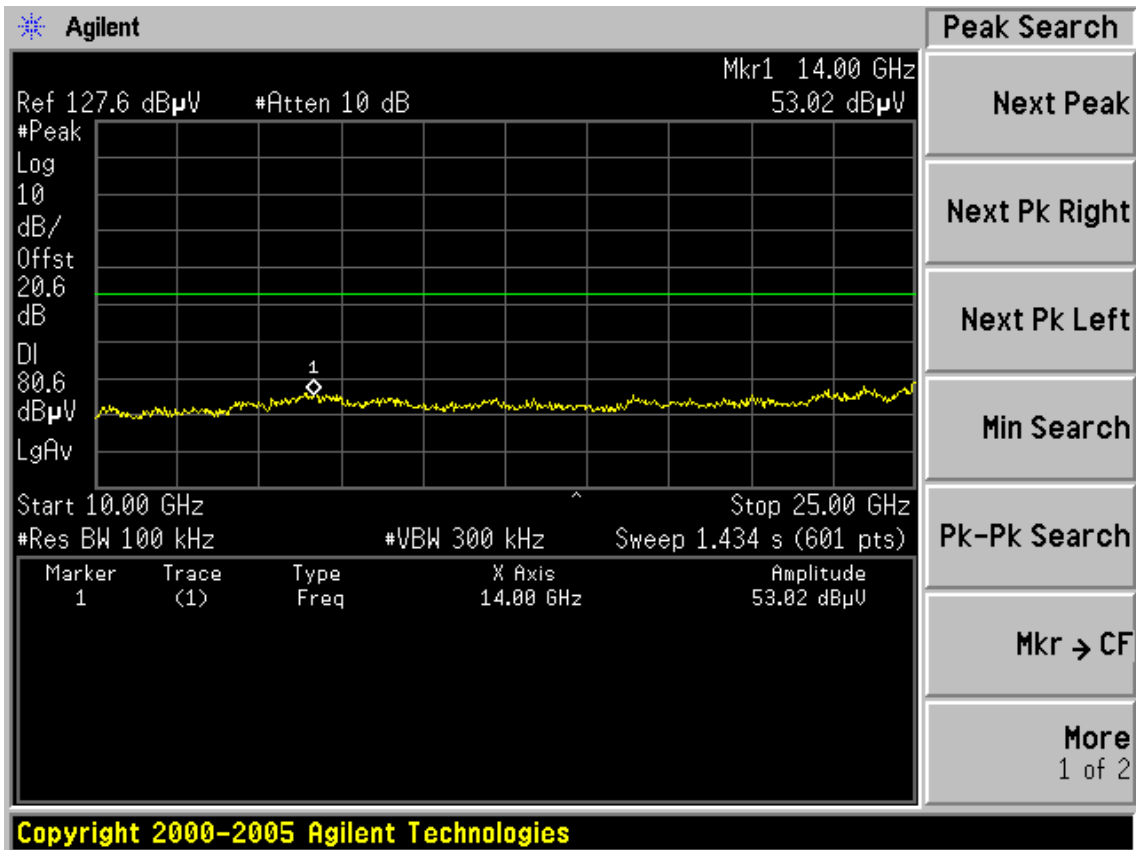

## 6. BAND EDGE COMPLIANCE TEST

### 6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Horn Antenna	EMCO	3115	9607-4877	May 08, 11	1.5 Year
3.	Amplifier	Agilent	8449B	3008A02495	May.08, 11	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	May.08,11	1 Year
5.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year
6.	RF Cable	Hubersuhner	SUCOFLEX102	28610/2	May.08,11	1 Year

### 6.2. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


### 6.3. Test Produce

1. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz; VBW=3MHz; Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz; VBW=10Hz; Sweep=AUTO

### 6.4. Test Results

Pass (The testing data was attached in the next pages.)



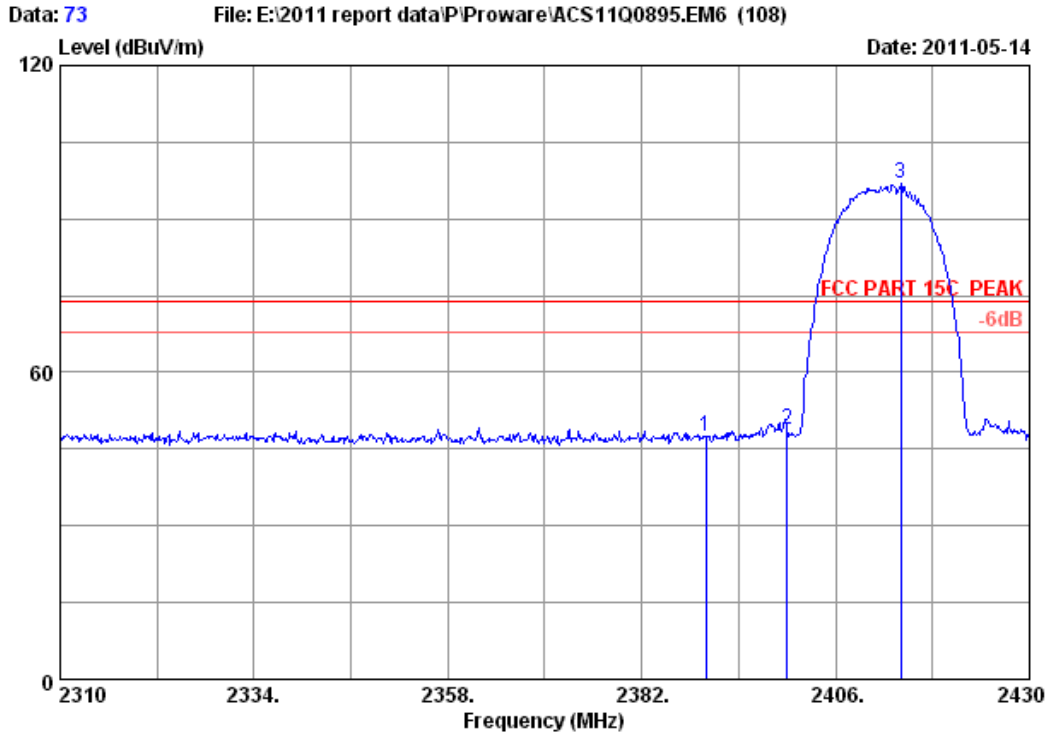


Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	47.32	47.53	74.00	26.47	Peak
2	2400.000	29.44	7.43	36.62	48.60	48.85	74.00	25.15	Peak
3	2414.040	29.45	7.43	36.62	96.55	96.81	74.00	-22.81	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

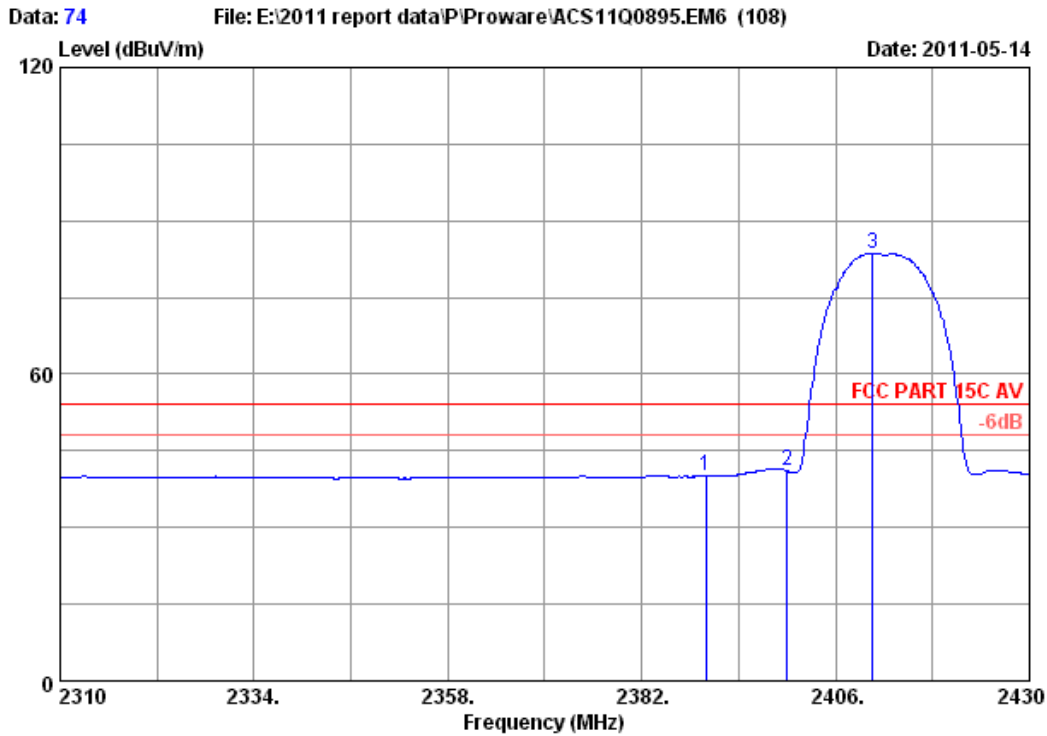


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	39.79	40.00	54.00	14.00	Average
2	2400.000	29.44	7.43	36.62	40.81	41.06	54.00	12.94	Average
3	2410.560	29.45	7.43	36.62	83.43	83.69	54.00	-29.69	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

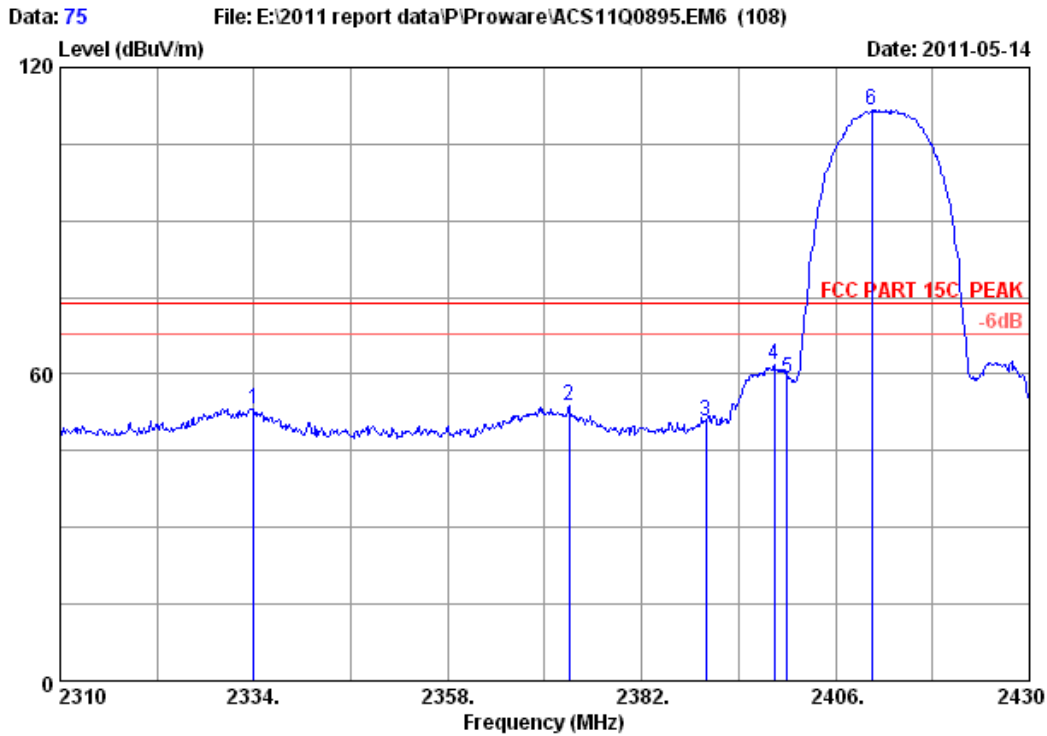


Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2334.000	29.40	7.27	36.63	53.21	53.25	74.00	20.75	Peak
2	2373.000	29.43	7.35	36.62	53.53	53.69	74.00	20.31	Peak
3	2390.000	29.44	7.39	36.62	50.46	50.67	74.00	23.33	Peak
4	2398.440	29.44	7.39	36.62	61.51	61.72	74.00	12.28	Peak
5	2400.000	29.44	7.43	36.62	58.84	59.09	74.00	14.91	Peak
6	2410.440	29.45	7.43	36.62	111.36	111.62	74.00	-37.62	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

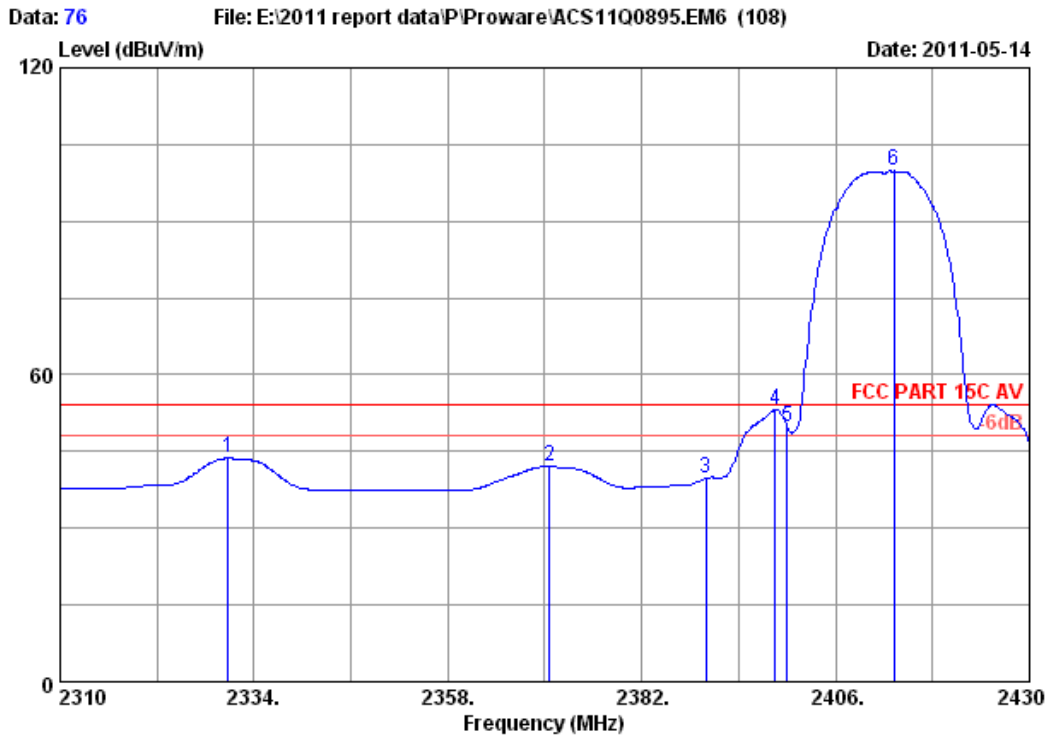


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH1 2412MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2330.760	29.40	7.27	36.63	43.64	43.68	54.00	10.32	Average
2	2370.600	29.43	7.35	36.62	41.96	42.12	54.00	11.88	Average
3	2390.000	29.44	7.39	36.62	39.54	39.75	54.00	14.25	Average
4	2398.560	29.44	7.39	36.62	52.86	53.07	54.00	0.93	Average
5	2400.000	29.44	7.43	36.62	49.70	49.95	54.00	4.05	Average
6	2413.200	29.45	7.43	36.62	99.52	99.78	54.00	-45.78	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

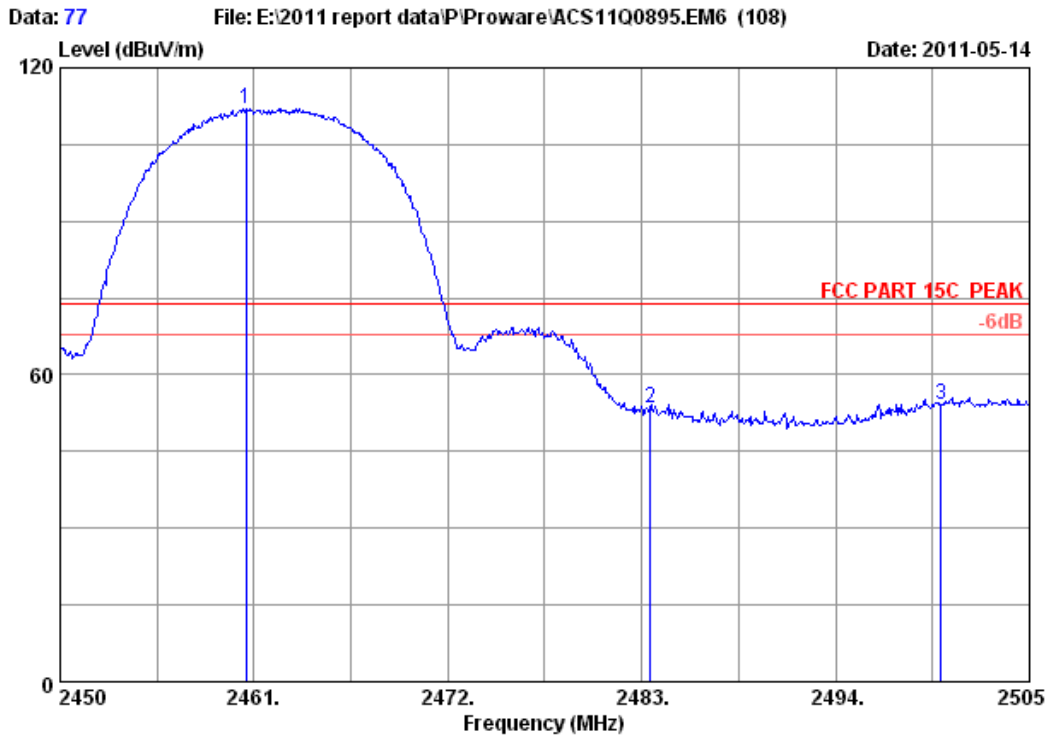


Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2460.560	29.48	7.54	36.61	111.65	112.06	74.00	-38.06	Peak
2	2483.500	29.49	7.58	36.60	52.88	53.35	74.00	20.65	Peak
3	2500.000	29.50	7.62	36.60	53.58	54.10	74.00	19.90	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

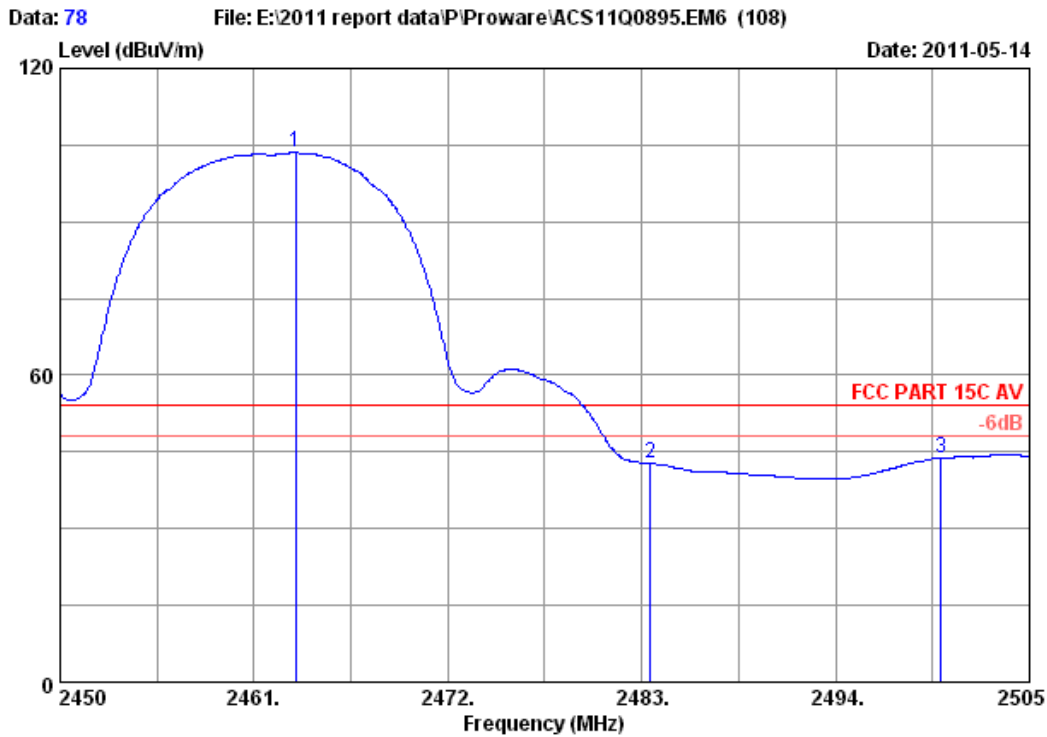


Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.365	29.48	7.54	36.61	103.12	103.53	54.00	-49.53	Average
2	2483.500	29.49	7.58	36.60	42.28	42.75	54.00	11.25	Average
3	2500.000	29.50	7.62	36.60	43.30	43.82	54.00	10.18	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

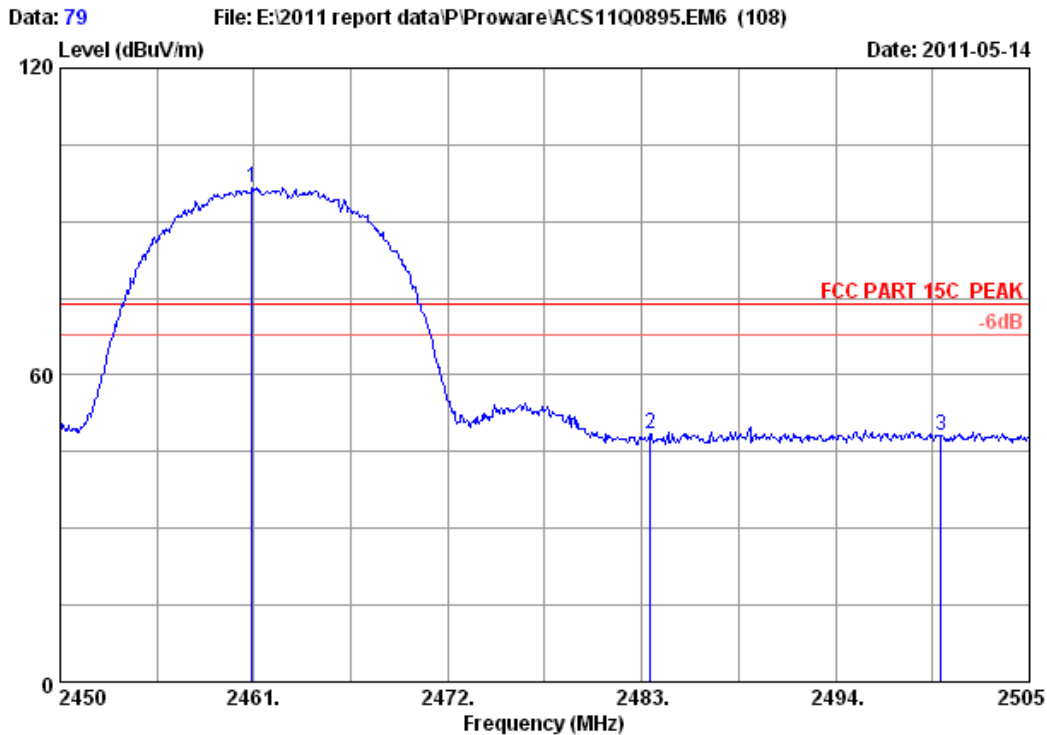


Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.890	29.48	7.54	36.61	96.20	96.61	74.00	-22.61	Peak
2	2483.500	29.49	7.58	36.60	47.94	48.41	74.00	25.59	Peak
3	2500.000	29.50	7.62	36.60	47.74	48.26	74.00	25.74	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

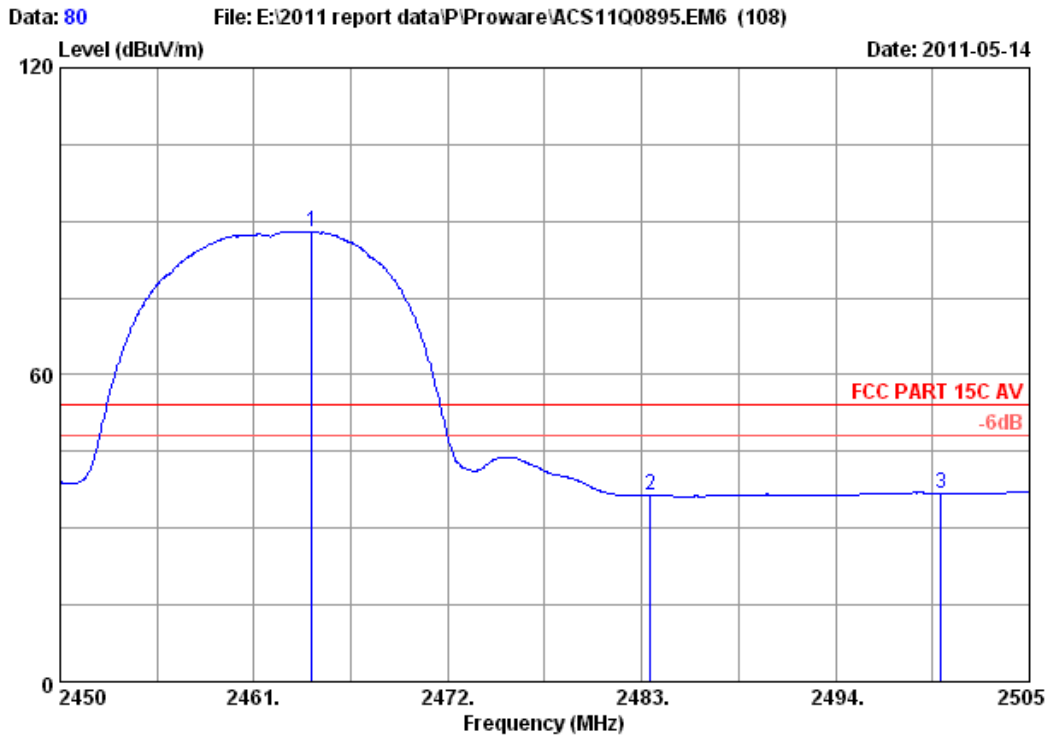


Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11b CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2464.300	29.48	7.54	36.61	87.64	88.05	54.00	-34.05	Average
2	2483.500	29.49	7.58	36.60	35.93	36.40	54.00	17.60	Average
3	2500.000	29.50	7.62	36.60	36.28	36.80	54.00	17.20	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



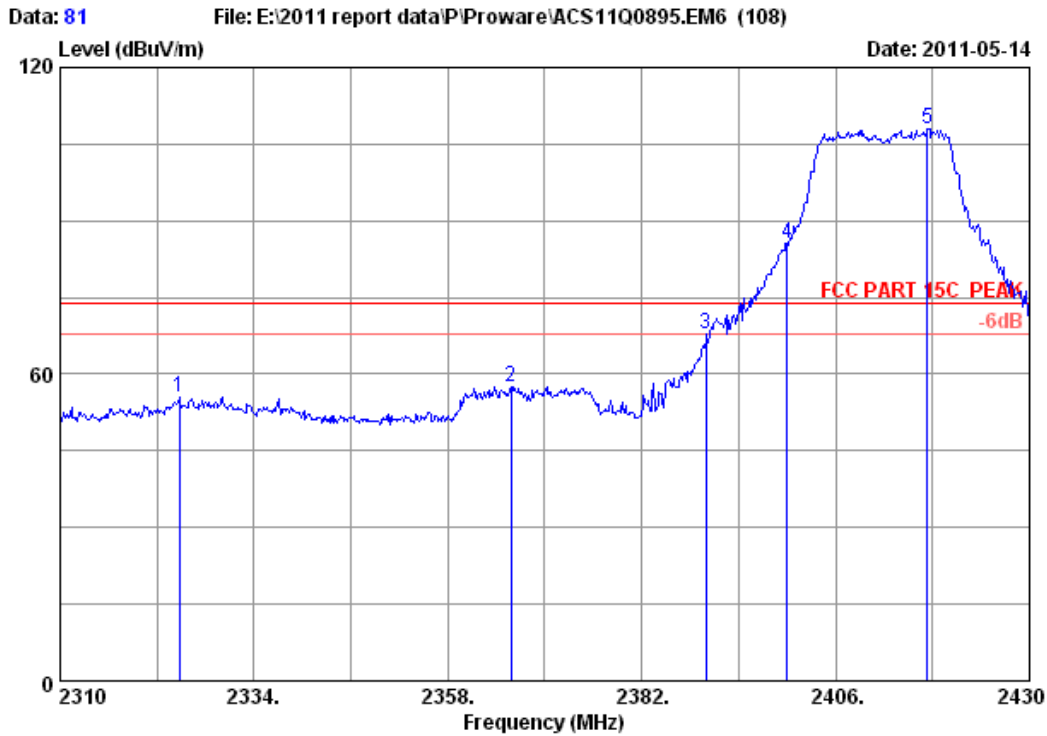


Site no. : 3m Chamber Data no. : 81  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2324.760	29.40	7.27	36.63	55.52	55.56	74.00	18.44	Peak
2	2365.800	29.42	7.35	36.62	57.47	57.62	74.00	16.38	Peak
3	2390.000	29.44	7.39	36.62	67.60	67.81	74.00	6.19	Peak
4	2400.000	29.44	7.43	36.62	85.27	85.52	74.00	-11.52	Peak
5	2417.400	29.45	7.43	36.61	107.80	108.07	74.00	-34.07	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

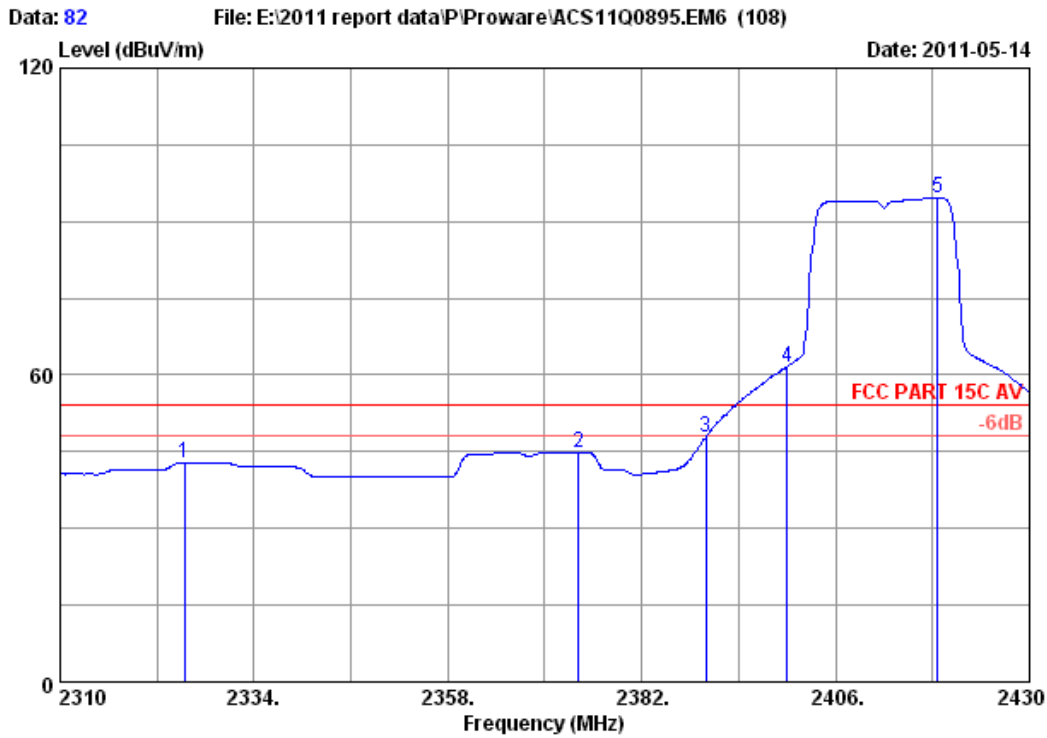


Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2325.360	29.40	7.27	36.63	42.77	42.81	54.00	11.19	Average
2	2374.200	29.43	7.35	36.62	44.78	44.94	54.00	9.06	Average
3	2390.000	29.44	7.39	36.62	47.72	47.93	54.00	6.07	Average
4	2400.000	29.44	7.43	36.62	61.42	61.67	54.00	-7.67	Average
5	2418.600	29.45	7.43	36.61	94.31	94.58	54.00	-40.58	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

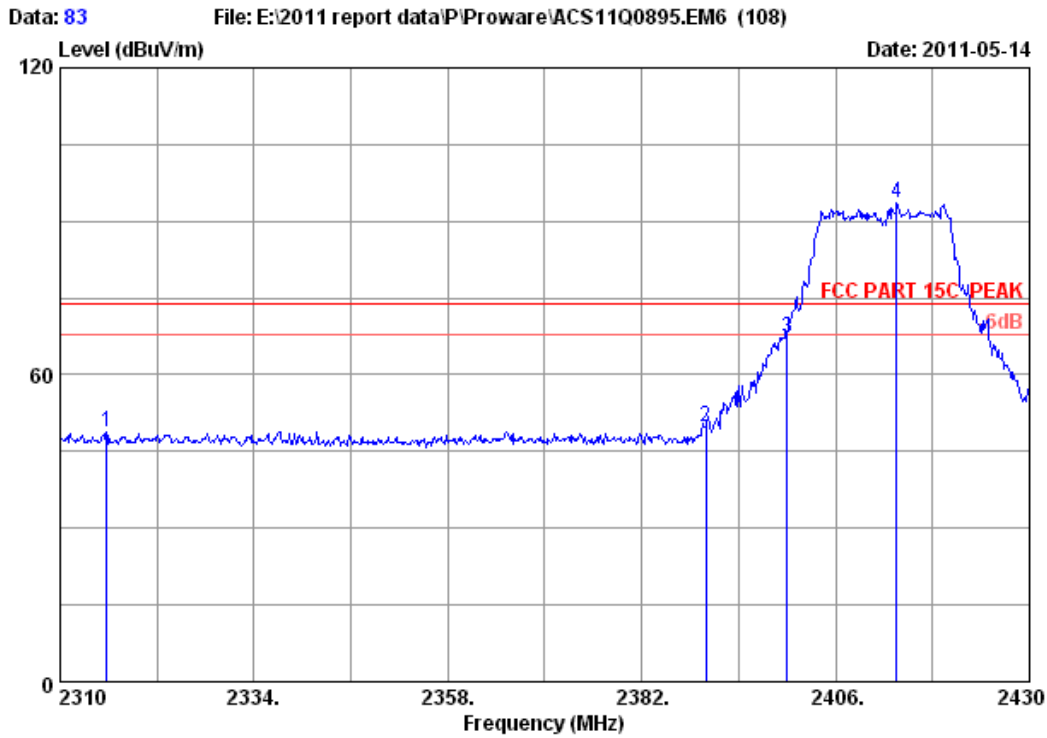


Site no. : 3m Chamber Data no. : 83  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2315.760	29.39	7.24	36.63	48.97	48.97	74.00	25.03	Peak
2	2390.000	29.44	7.39	36.62	49.44	49.65	74.00	24.35	Peak
3	2400.000	29.44	7.43	36.62	66.97	67.22	74.00	6.78	Peak
4	2413.560	29.45	7.43	36.62	93.21	93.47	74.00	-19.47	Peak

Remarks:

- Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
- The emission levels that are 20dB below the official limit are not reported.

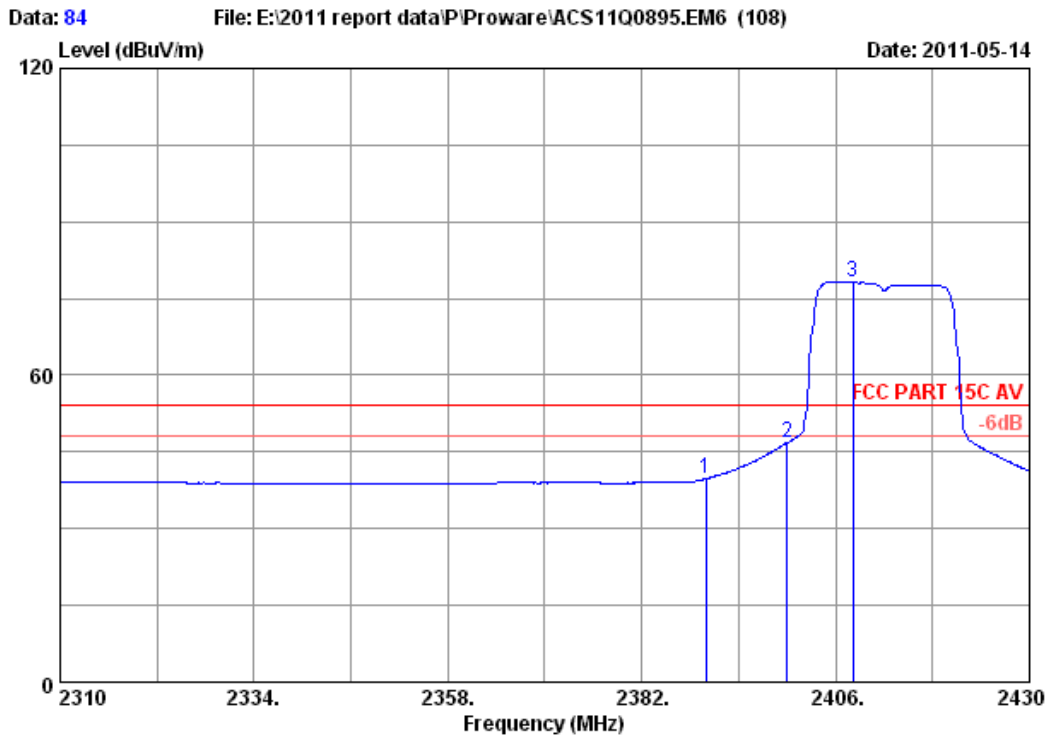


Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH1 2412MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	39.54	39.75	54.00	14.25	Average
2	2400.000	29.44	7.43	36.62	46.54	46.79	54.00	7.21	Average
3	2408.160	29.45	7.43	36.62	77.91	78.17	54.00	-24.17	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

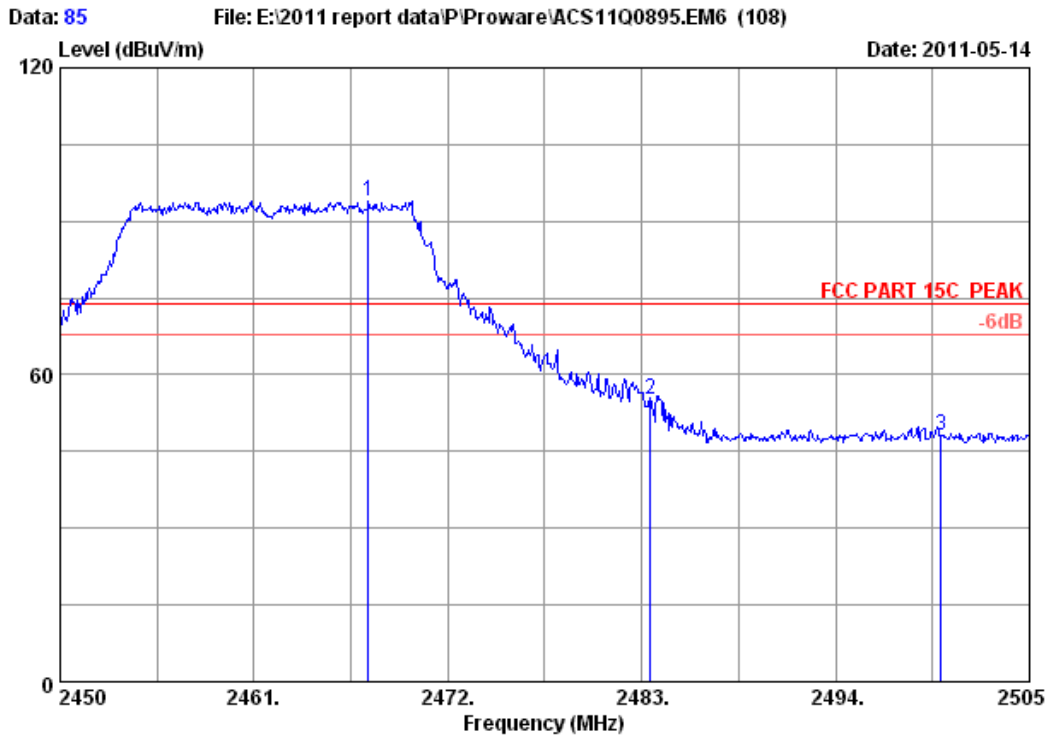


Site no. : 3m Chamber Data no. : 85  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2467.490	29.48	7.54	36.60	93.54	93.96	74.00	-19.96	Peak
2	2483.500	29.49	7.58	36.60	54.68	55.15	74.00	18.85	Peak
3	2500.000	29.50	7.62	36.60	47.48	48.00	74.00	26.00	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

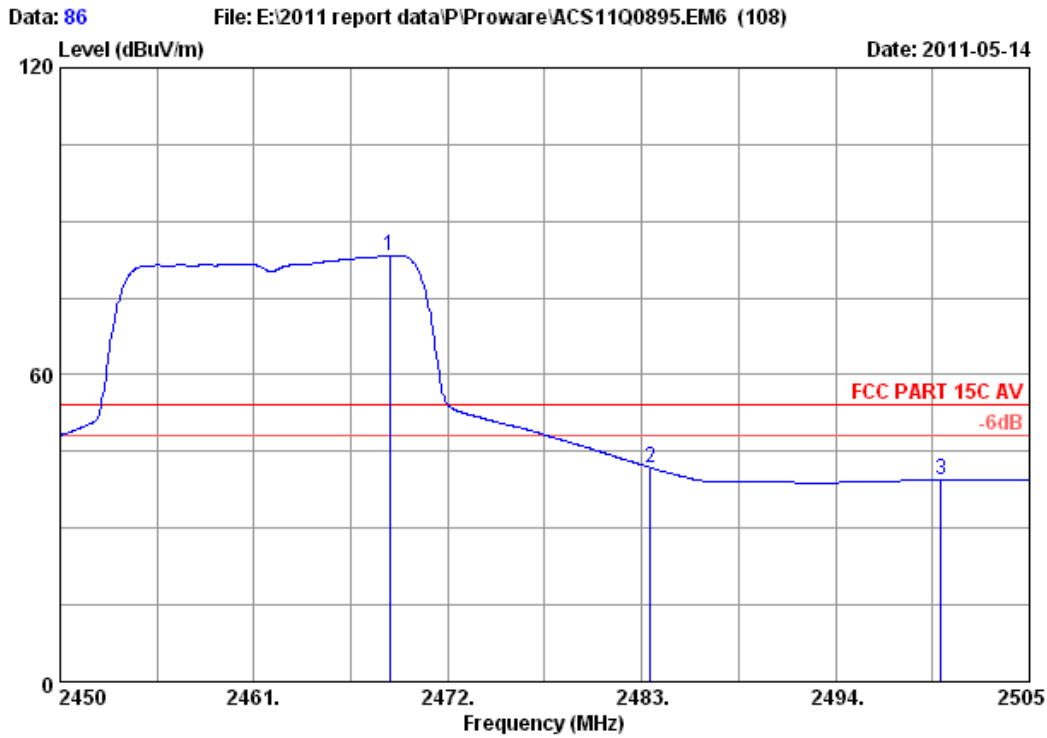


Site no. : 3m Chamber Data no. : 86  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2468.700	29.48	7.54	36.60	82.80	83.22	54.00	-29.22	Average
2	2483.500	29.49	7.58	36.60	41.37	41.84	54.00	12.16	Average
3	2500.000	29.50	7.62	36.60	38.88	39.40	54.00	14.60	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

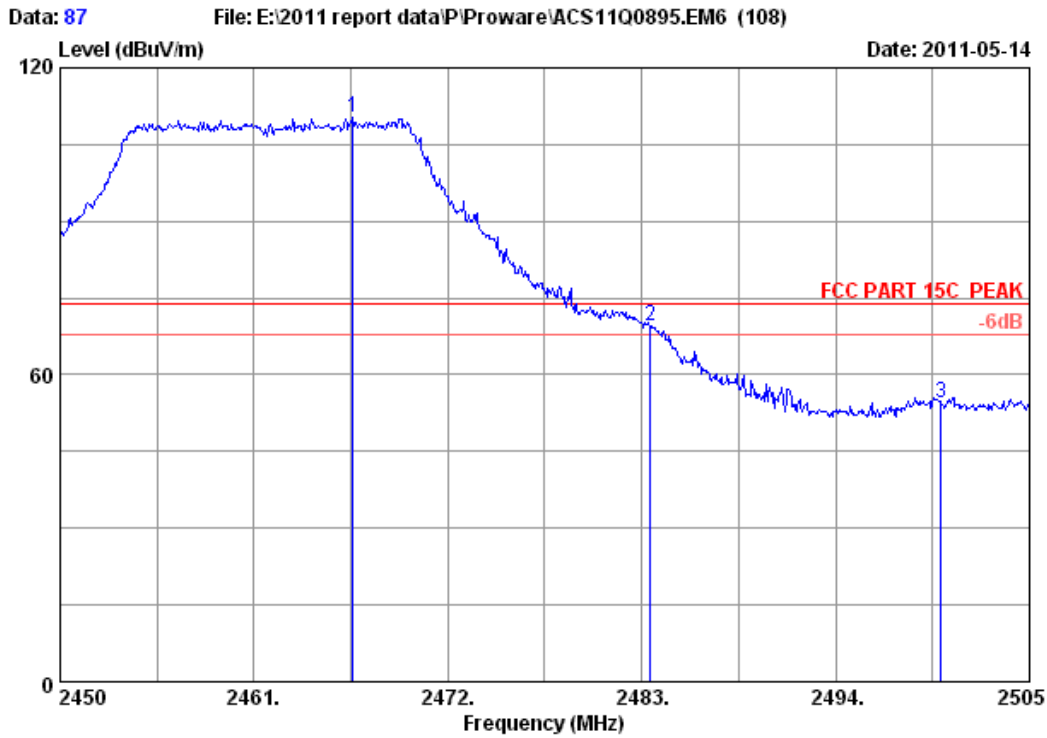


Site no. : 3m Chamber Data no. : 87  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2466.610	29.48	7.54	36.60	109.83	110.25	74.00	-36.25	Peak
2	2483.500	29.49	7.58	36.60	68.96	69.43	74.00	4.57	Peak
3	2500.000	29.50	7.62	36.60	53.92	54.44	74.00	19.56	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

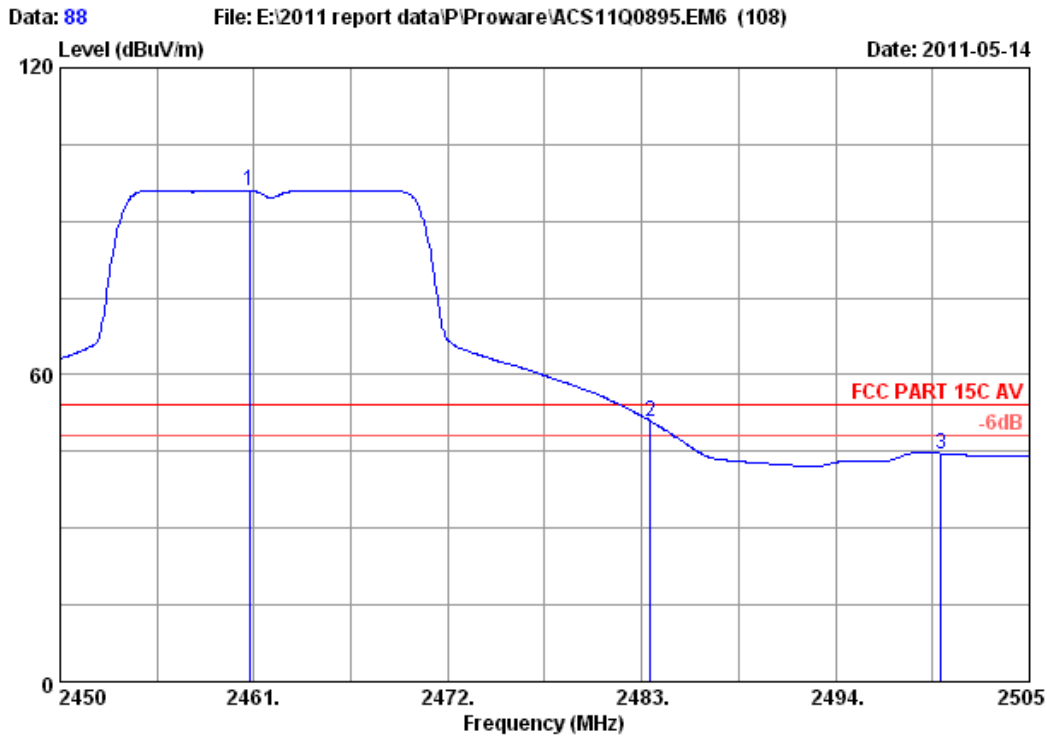


Site no. : 3m Chamber Data no. : 88  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11g CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.725	29.48	7.54	36.61	95.54	95.95	54.00	-41.95	Average
2	2483.500	29.49	7.58	36.60	50.47	50.94	54.00	3.06	Average
3	2500.000	29.50	7.62	36.60	44.09	44.61	54.00	9.39	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



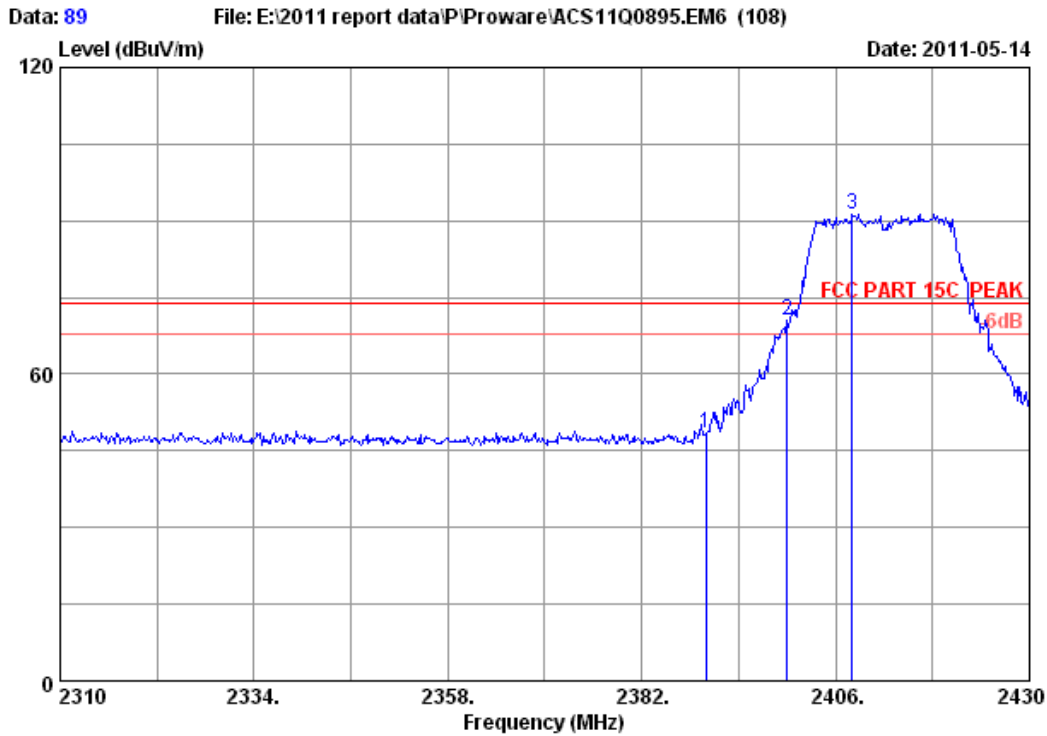


Site no. : 3m Chamber Data no. : 89  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	48.39	48.60	74.00	25.40	Peak
2	2400.000	29.44	7.43	36.62	70.22	70.47	74.00	3.53	Peak
3	2408.040	29.45	7.43	36.62	90.93	91.19	74.00	-17.19	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

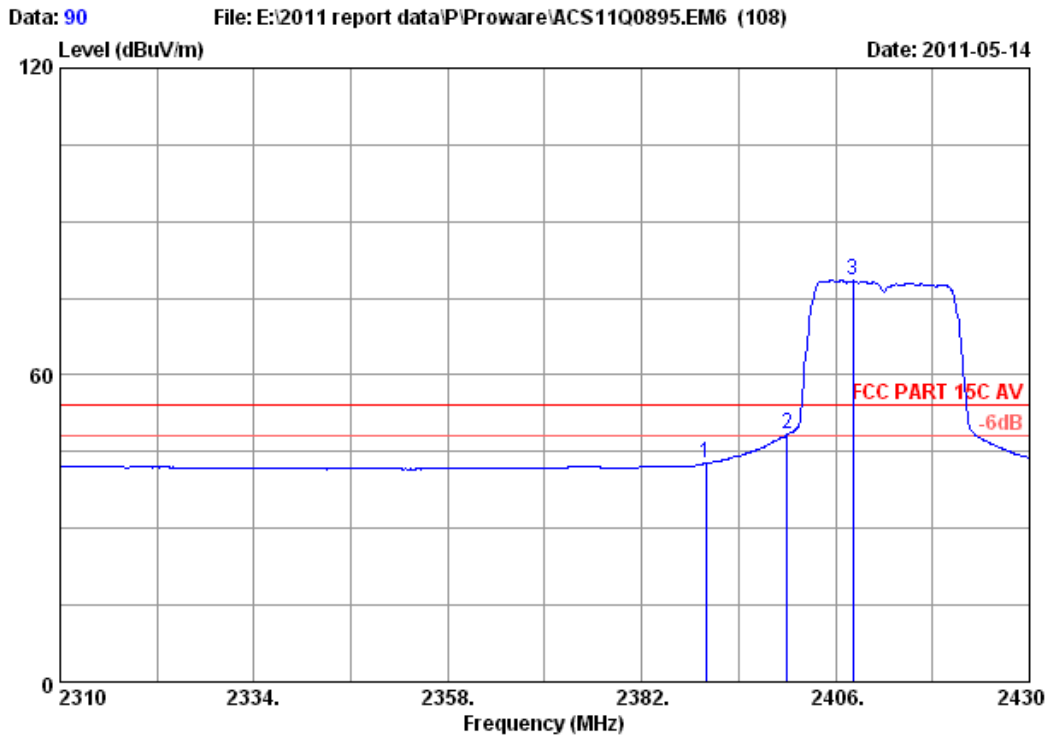


Site no. : 3m Chamber Data no. : 90  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	42.51	42.72	54.00	11.28	Average
2	2400.000	29.44	7.43	36.62	48.11	48.36	54.00	5.64	Average
3	2408.160	29.45	7.43	36.62	78.16	78.42	54.00	-24.42	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

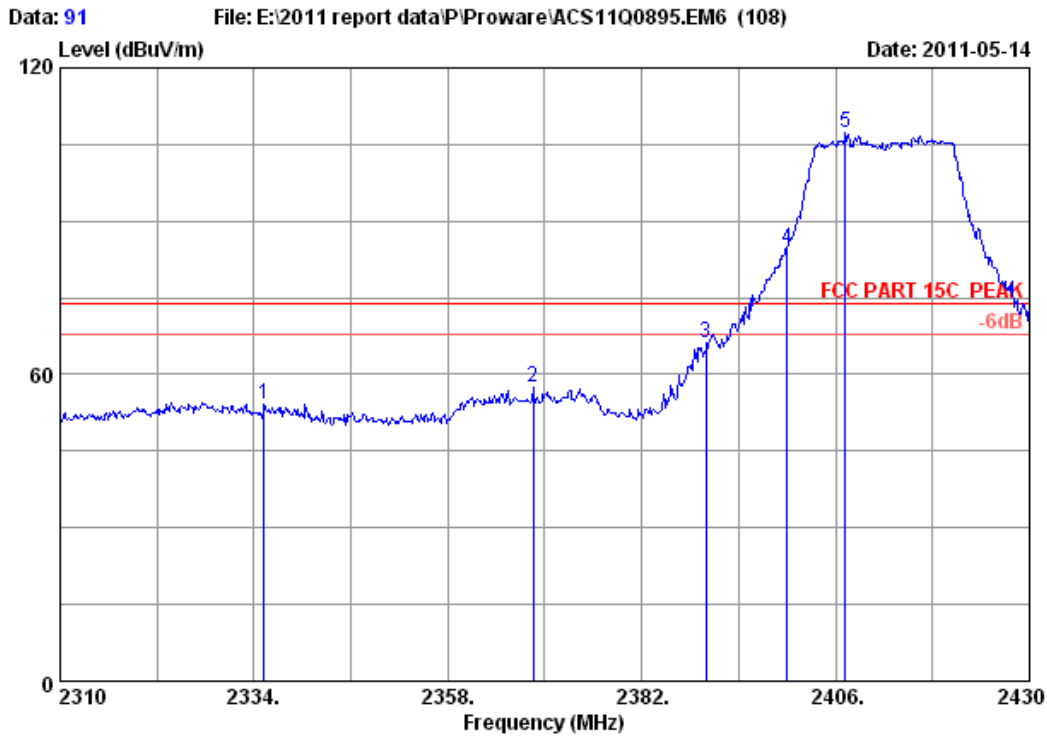


Site no. : 3m Chamber Data no. : 91  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2335.200	29.41	7.27	36.63	54.25	54.30	74.00	19.70	Peak
2	2368.560	29.43	7.35	36.62	57.17	57.33	74.00	16.67	Peak
3	2390.000	29.44	7.39	36.62	65.93	66.14	74.00	7.86	Peak
4	2400.000	29.44	7.43	36.62	84.20	84.45	74.00	-10.45	Peak
5	2407.200	29.45	7.43	36.62	107.01	107.27	74.00	-33.27	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

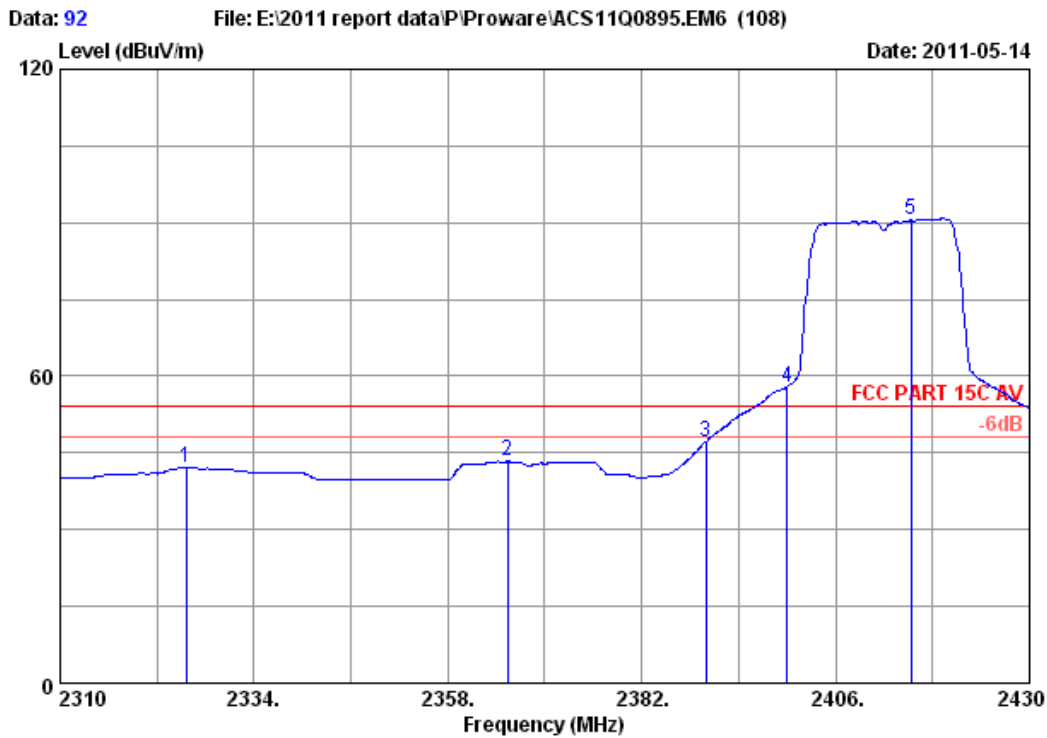


Site no. : 3m Chamber Data no. : 92  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH1 2412MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2325.600	29.40	7.27	36.63	41.96	42.00	54.00	12.00	Average
2	2365.440	29.42	7.35	36.62	43.15	43.30	54.00	10.70	Average
3	2390.000	29.44	7.39	36.62	47.07	47.28	54.00	6.72	Average
4	2400.000	29.44	7.43	36.62	57.72	57.97	54.00	-3.97	Average
5	2415.360	29.45	7.43	36.61	90.18	90.45	54.00	-36.45	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

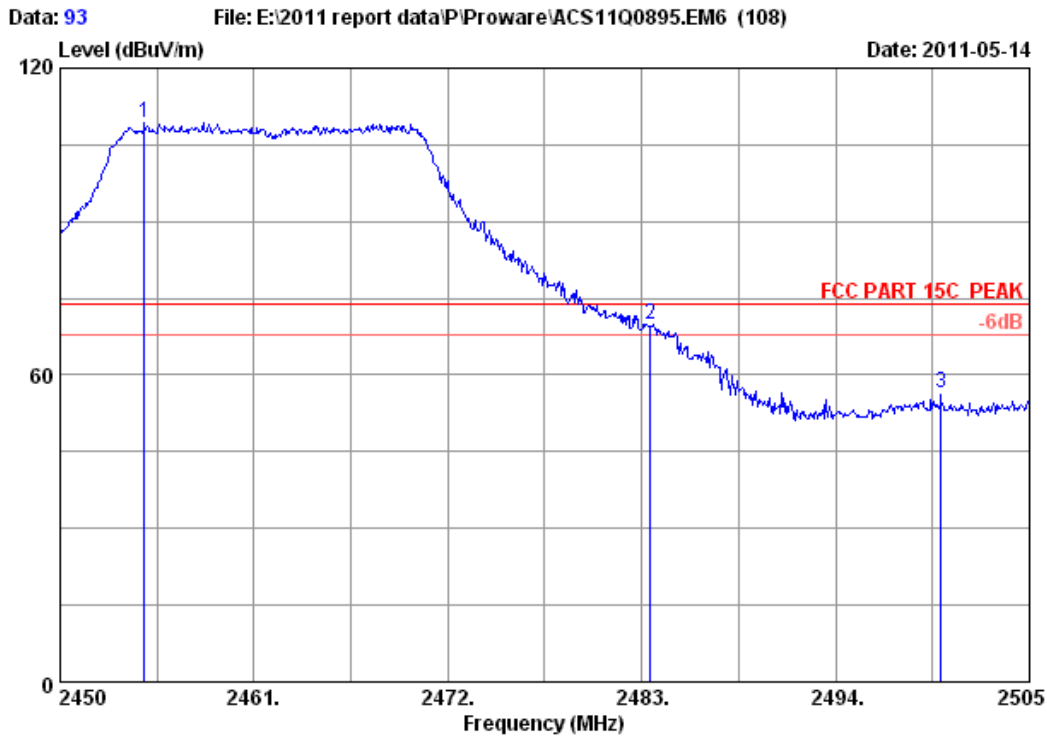


Site no. : 3m Chamber Data no. : 93  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.785	29.48	7.50	36.61	109.09	109.46	74.00	-35.46	Peak
2	2483.500	29.49	7.58	36.60	69.40	69.87	74.00	4.13	Peak
3	2500.000	29.50	7.62	36.60	55.91	56.43	74.00	17.57	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

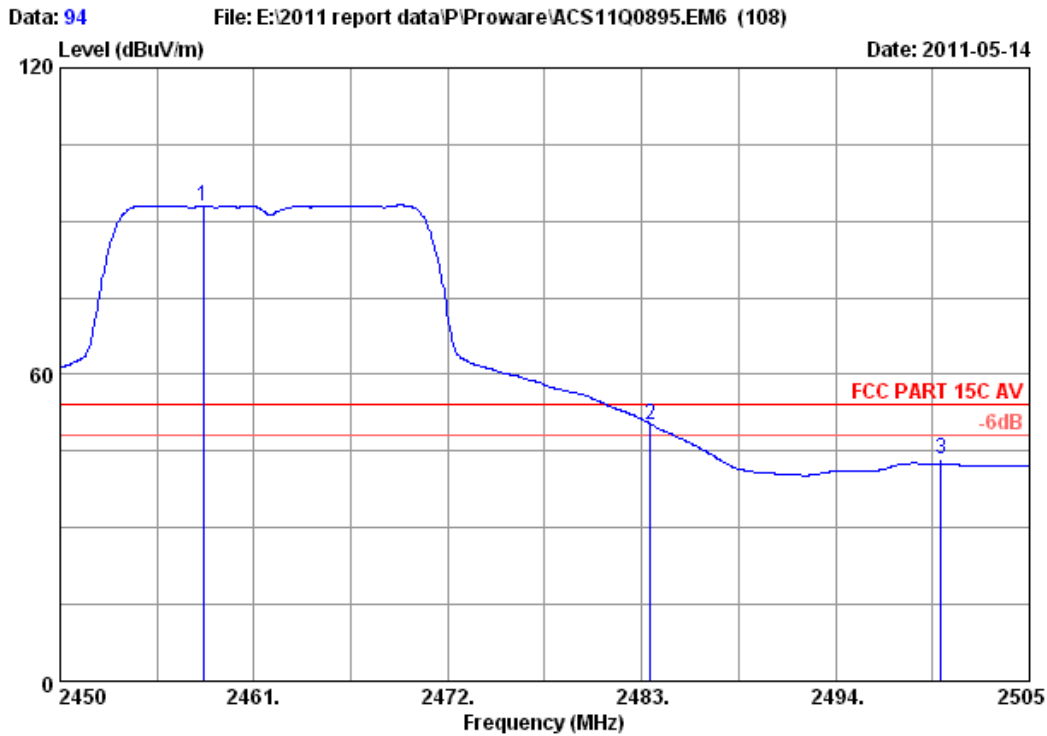


Site no. : 3m Chamber Data no. : 94  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.140	29.48	7.50	36.61	92.71	93.08	54.00	-39.08	Average
2	2483.500	29.49	7.58	36.60	49.80	50.27	54.00	3.73	Average
3	2500.000	29.50	7.62	36.60	42.90	43.42	54.00	10.58	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

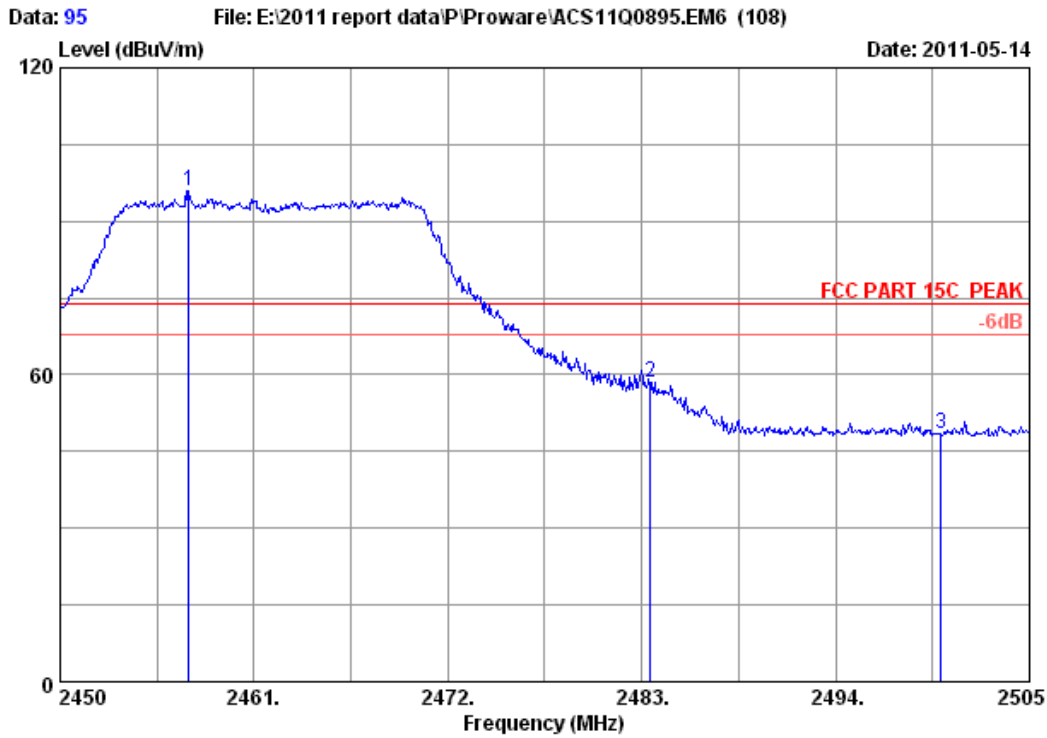


Site no. : 3m Chamber Data no. : 95  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2457.315	29.48	7.50	36.61	95.46	95.83	74.00	-21.83	Peak
2	2483.500	29.49	7.58	36.60	58.14	58.61	74.00	15.39	Peak
3	2500.000	29.50	7.62	36.60	47.79	48.31	74.00	25.69	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

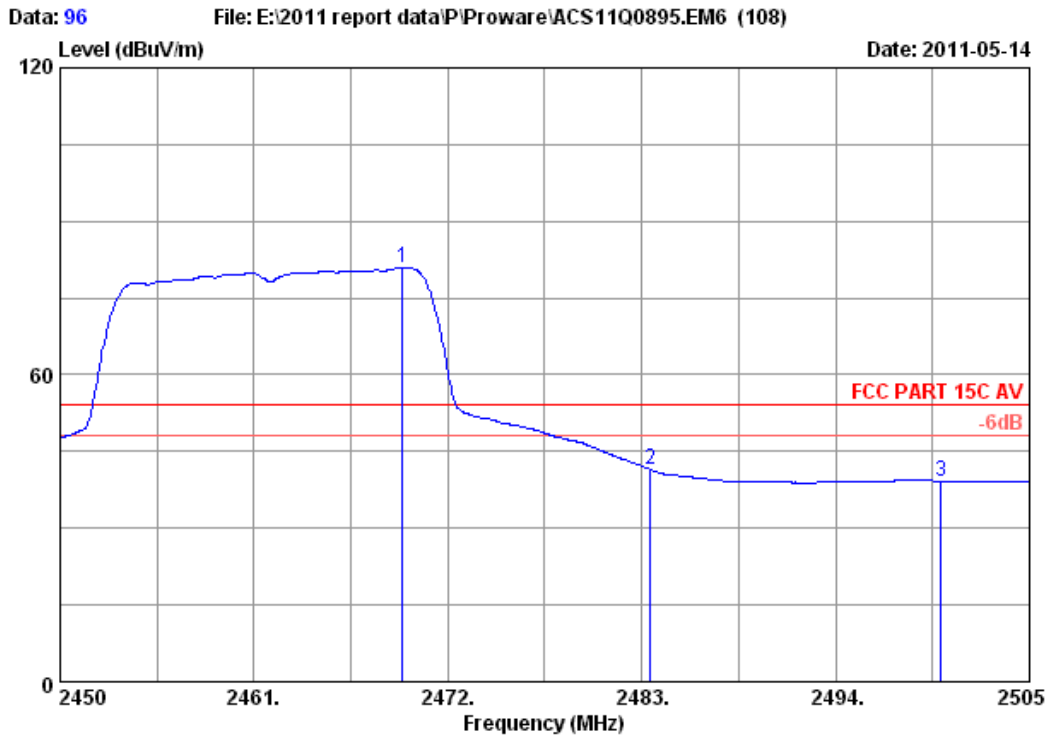


Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT20 CH11 2462MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.415	29.48	7.54	36.60	80.55	80.97	54.00	-26.97	Average
2	2483.500	29.49	7.58	36.60	40.99	41.46	54.00	12.54	Average
3	2500.000	29.50	7.62	36.60	38.62	39.14	54.00	14.86	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



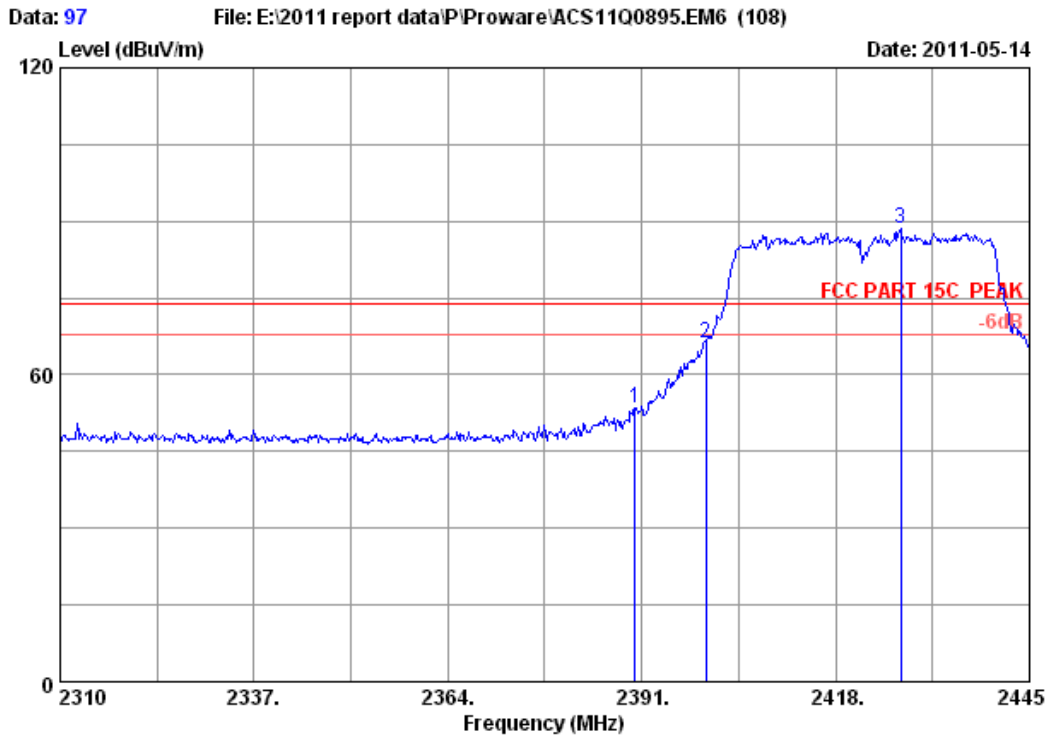


Site no. : 3m Chamber Data no. : 97  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23\*C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	53.32	53.53	74.00	20.47	Peak
2	2400.000	29.44	7.43	36.62	65.95	66.20	74.00	7.80	Peak
3	2427.045	29.46	7.46	36.61	88.15	88.46	74.00	-14.46	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

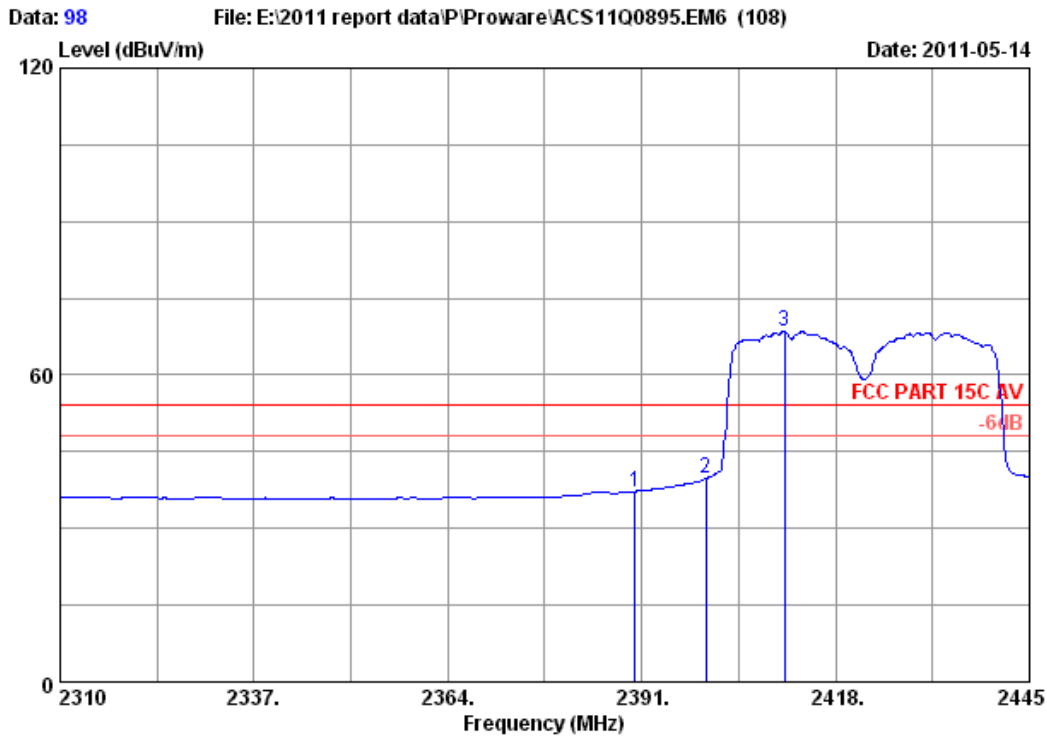


Site no. : 3m Chamber Data no. : 98  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	37.05	37.26	54.00	16.74	Average
2	2400.000	29.44	7.43	36.62	39.54	39.79	54.00	14.21	Average
3	2410.845	29.45	7.43	36.62	68.18	68.44	54.00	-14.44	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

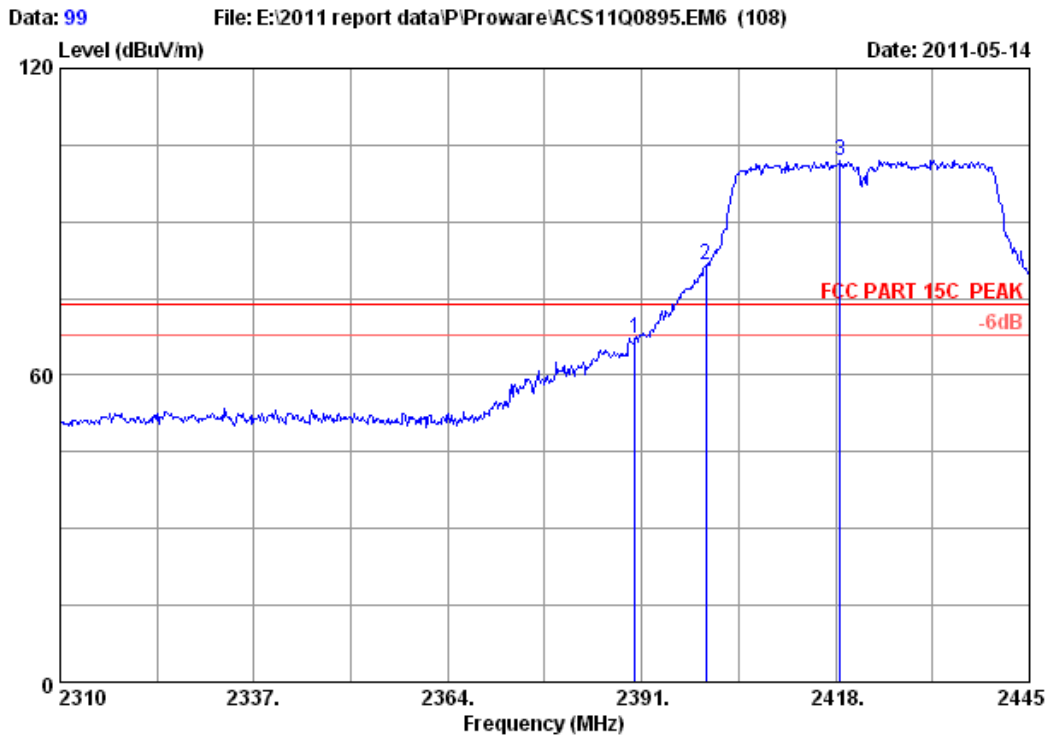


Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	66.99	67.20	74.00	6.80	Peak
2	2400.000	29.44	7.43	36.62	81.34	81.59	74.00	-7.59	Peak
3	2418.675	29.45	7.43	36.61	101.80	102.07	74.00	-28.07	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

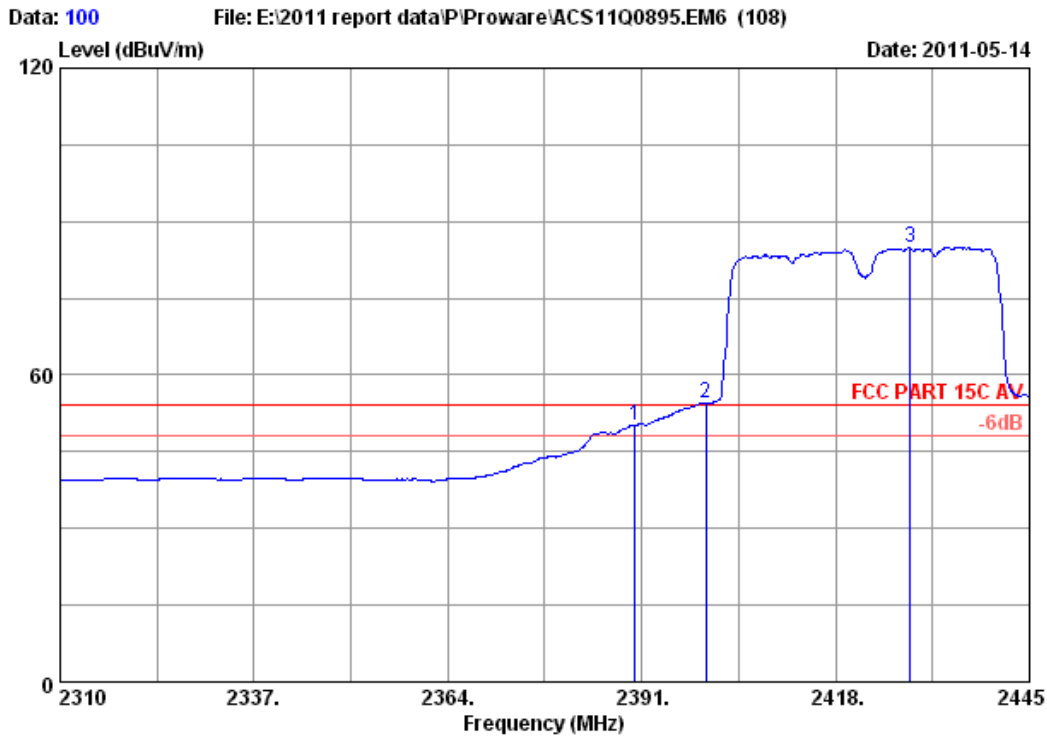


Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH1 2422MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.000	29.44	7.39	36.62	49.81	50.02	54.00	3.98	Average
2	2400.000	29.44	7.43	36.62	54.21	54.46	54.00	-0.46	Average
3	2428.395	29.46	7.46	36.61	84.52	84.83	54.00	-30.83	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

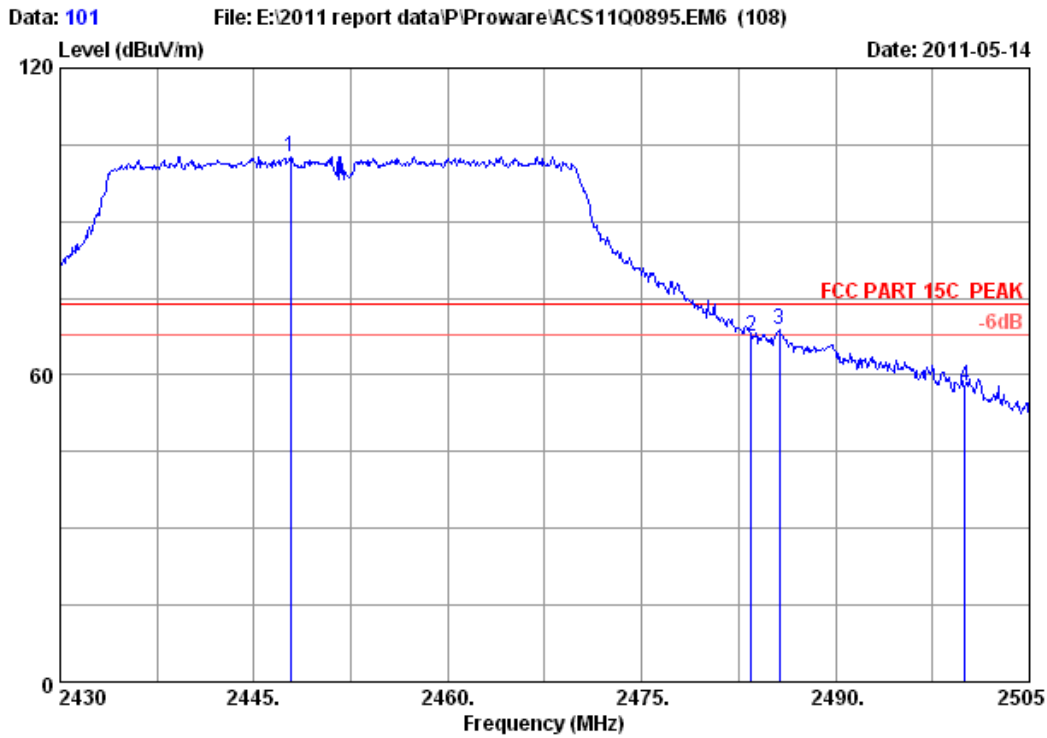


Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2447.850	29.47	7.50	36.61	102.36	102.72	74.00	-28.72	Peak
2	2483.500	29.49	7.58	36.60	67.13	67.60	74.00	6.40	Peak
3	2485.650	29.49	7.58	36.60	68.28	68.75	74.00	5.25	Peak
4	2500.000	29.50	7.62	36.60	57.17	57.69	74.00	16.31	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

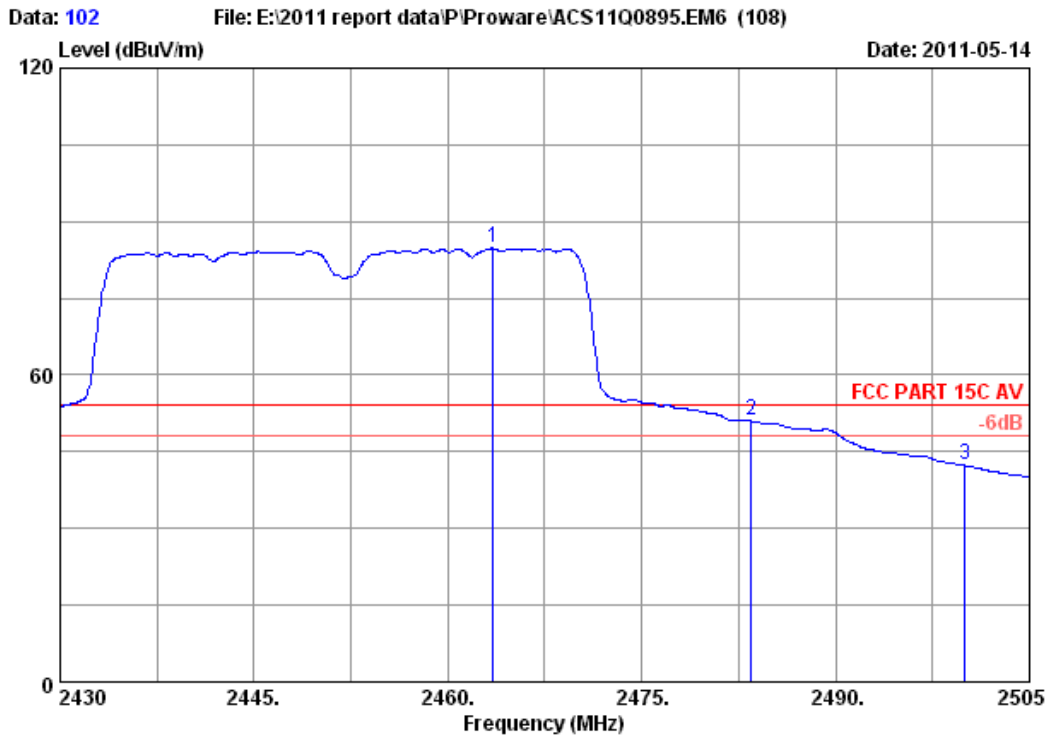


Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.525	29.48	7.54	36.61	84.33	84.74	54.00	-30.74	Average
2	2483.500	29.49	7.58	36.60	50.53	51.00	54.00	3.00	Average
3	2500.000	29.50	7.62	36.60	41.77	42.29	54.00	11.71	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

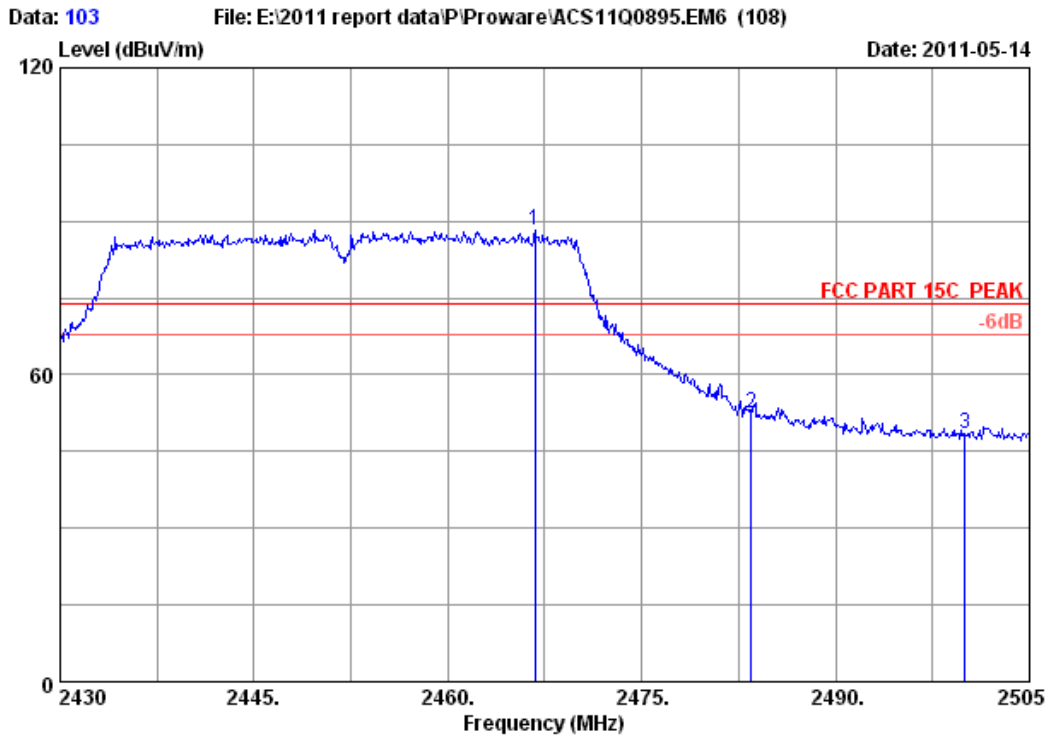


Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2466.750	29.48	7.54	36.60	87.81	88.23	74.00	-14.23	Peak
2	2483.500	29.49	7.58	36.60	51.88	52.35	74.00	21.65	Peak
3	2500.000	29.50	7.62	36.60	48.02	48.54	74.00	25.46	Peak

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

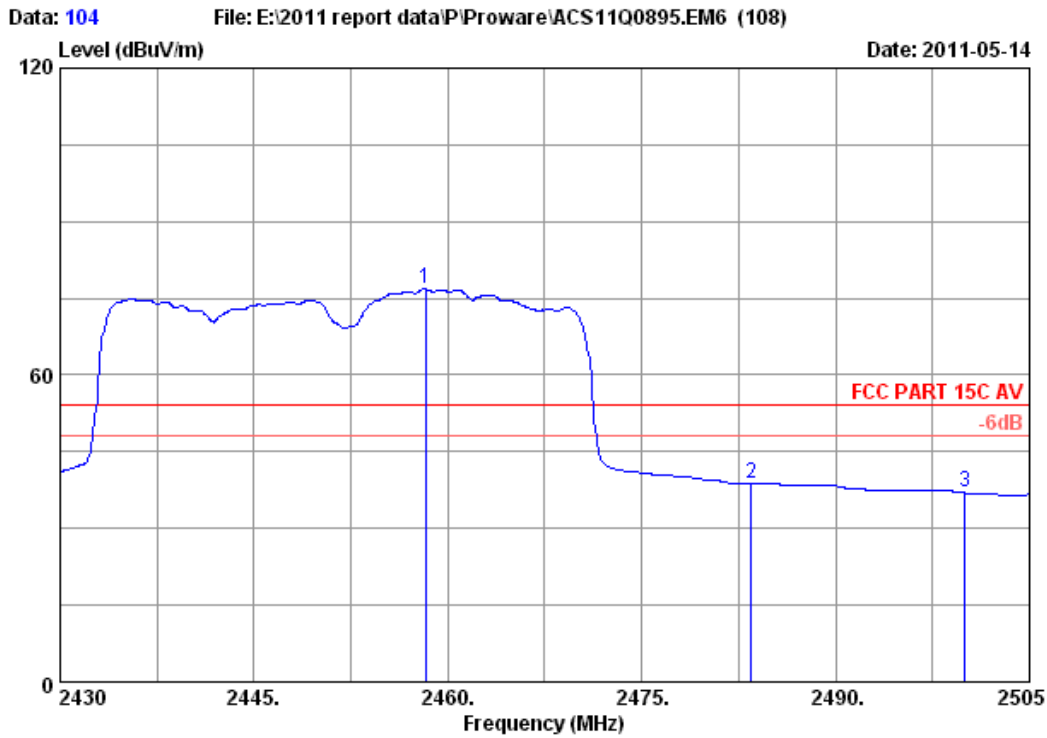

Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 3115(0911) Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23°C/54% Engineer : Sunny-lu  
 EUT : 300Mbps Wireless N Router  
 Power : DC 9V From Adapter Input AC 120V/60Hz  
 Test mode : IEEE802.11n HT40 CH7 2452MHz Tx  
 M/N : PW-RN501D

	Ant. Freq. (MHz)	Ant. Factor (dB/m)	Cable loss (dB)	Amp. Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2458.275	29.48	7.50	36.61	76.40	76.77	54.00	-22.77	Average
2	2483.500	29.49	7.58	36.60	38.29	38.76	54.00	15.24	Average
3	2500.000	29.50	7.62	36.60	36.44	36.96	54.00	17.04	Average

Remarks:

1. Emission Level= Antenna Factor + Cable Loss -Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.



## 7. 6dB Bandwidth Test

### 7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08,11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1Year

### 7.2. Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 7.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300 kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### 7.4. Test Results

EUT: 300Mbps Wireless N Router		
M/N: PW-RN501D		
Test date: 2011-05-20	Pressure: 100.6 kpa	Humidity: 56 %
Tested by: Sunny-lu	Test site: RF Site	Temperature : 25 °C

Cable loss: 0.6 dB		Attenuator loss: 20 dB		Antenna Gain: 5.0 dBi	
Test Mode	CH	Result		Limit (KHz)	
		Chain0 6dB bandwidth ( MHz )	Chain1 6dB bandwidth ( MHz )		
11b	CH1	12.560	12.134	>500	
	CH6	13.042	12.113	>500	
	CH11	12.084	12.607	>500	
11g	CH1	16.520	16.605	>500	
	CH6	16.567	16.550	>500	
	CH11	16.590	16.601	>500	
11n HT20	CH1	17.791	17.780	>500	
	CH6	17.715	17.751	>500	
	CH11	17.698	17.752	>500	
11n HT40	CH1	36.389	36.403	>500	
	CH4	36.171	36.125	>500	
	CH7	36.433	36.184	>500	
Conclusion : PASS					


Chain 0  
 Test Mode: IEEE 802.11b TX  
 Test CH1: 2412MHz

Agilent <span style="float: right;">L</span>		<b>Marker</b> Select Marker 1 2 3 4 Normal Delta Delta Pair (Tracking Ref) Ref <span style="font-size: small;">▲</span> Span Pair Span <u>Center</u> Off More 1 of 2
Ch Freq 2.412 GHz Trig Free Occupied Bandwidth <span style="float: right;">█</span>		
Ref 20.6 dBm #Atten 10 dB #Peak Log 10 dB/ Offst 20.6 dB 		
Center 2.412 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)		
Occupied Bandwidth <span style="float: right;">Occ BW % Pwr 99.00 %</span> 15.8139 MHz <span style="float: right;">x dB -6.00 dB</span> Transmit Freq Error 3.568 kHz x dB Bandwidth 12.560 MHz		
Copyright 2000-2005 Agilent Technologies		

Test CH6: 2437MHz


Agilent <span style="float: right;">L</span>		<b>Trace</b> Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
Ch Freq 2.437 GHz Trig Free Occupied Bandwidth <span style="float: right;">█</span>		
Ref 20.6 dBm #Atten 10 dB #Peak Log 10 dB/ Offst 20.6 dB 		
Center 2.437 00 GHz Span 50 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)		
Occupied Bandwidth <span style="float: right;">Occ BW % Pwr 99.00 %</span> 15.7398 MHz <span style="float: right;">x dB -6.00 dB</span> Transmit Freq Error 66.861 kHz x dB Bandwidth 13.042 MHz		
File Operation Status, A:\SCREN659.GIF file saved		

Test CH1: 2462MHz

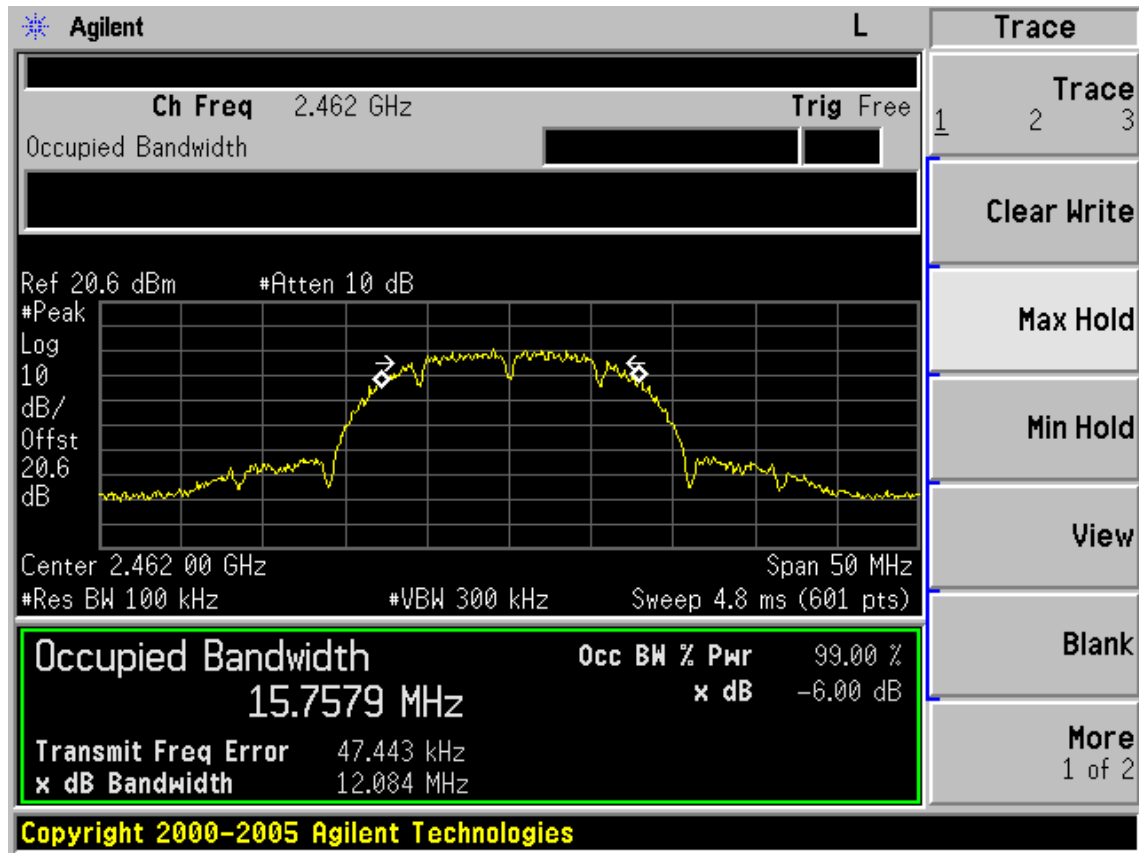

Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

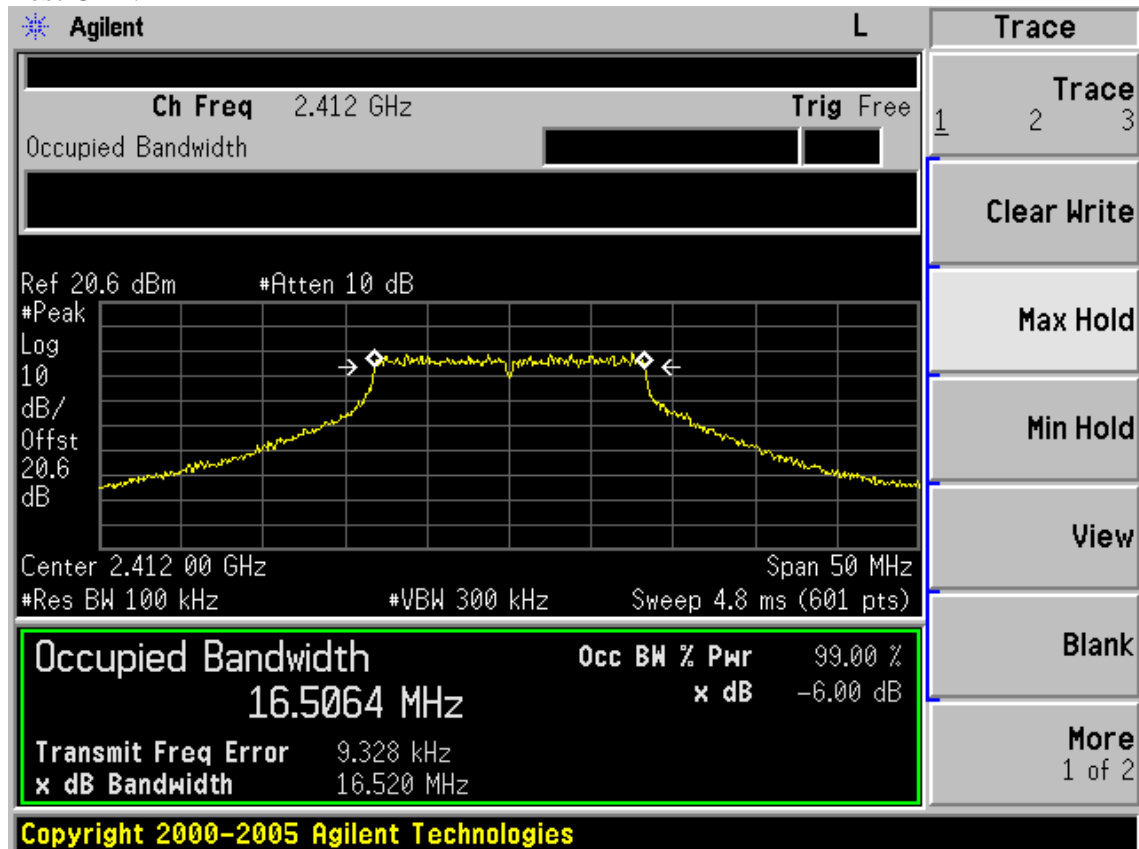

Test CH6: 2437MHz

Agilent L

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10 dB/ Offst 20.6 dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
16.5145 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	2.546 kHz	
<b>x dB Bandwidth</b>	16.567 MHz	

File Operation Status, A:\SCREN665.GIF file saved

Test CH11: 2462MHz

Agilent L

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10 dB/ Offst 20.6 dB

Center 2.462 00 GHz Span 50 MHz


#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
16.5165 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	8.158 kHz	
<b>x dB Bandwidth</b>	16.590 MHz	


Copyright 2000-2005 Agilent Technologies

Test Mode: IEEE 802.11n HT20TX


Test CH1: 2412MHz

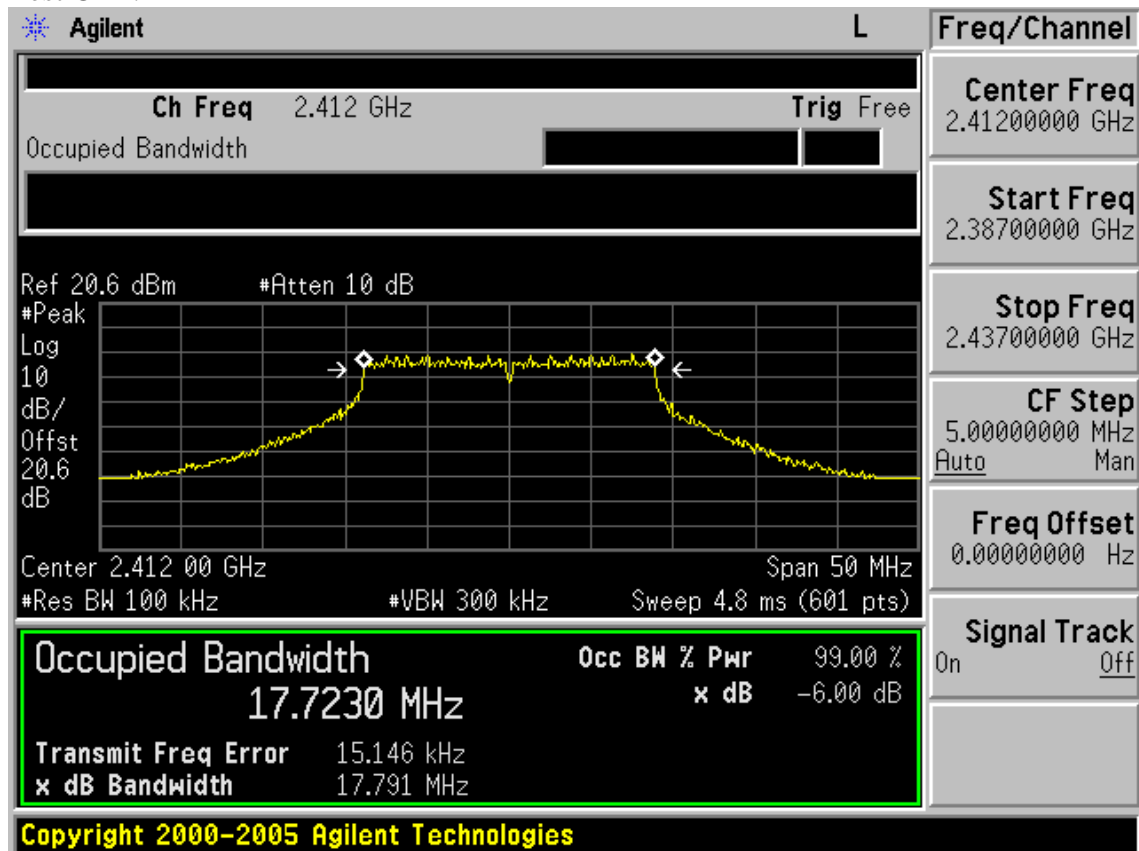

Test CH6: 2437MHz

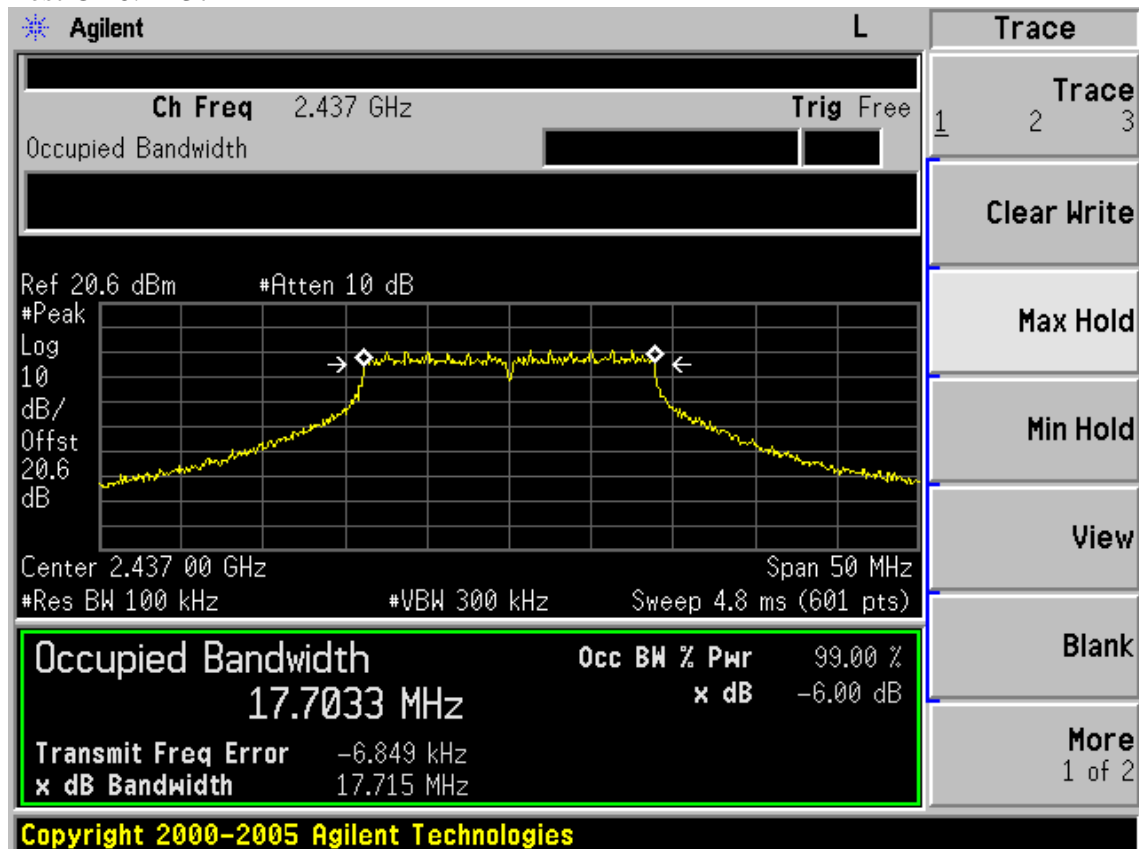


Test CH1: 2462MHz

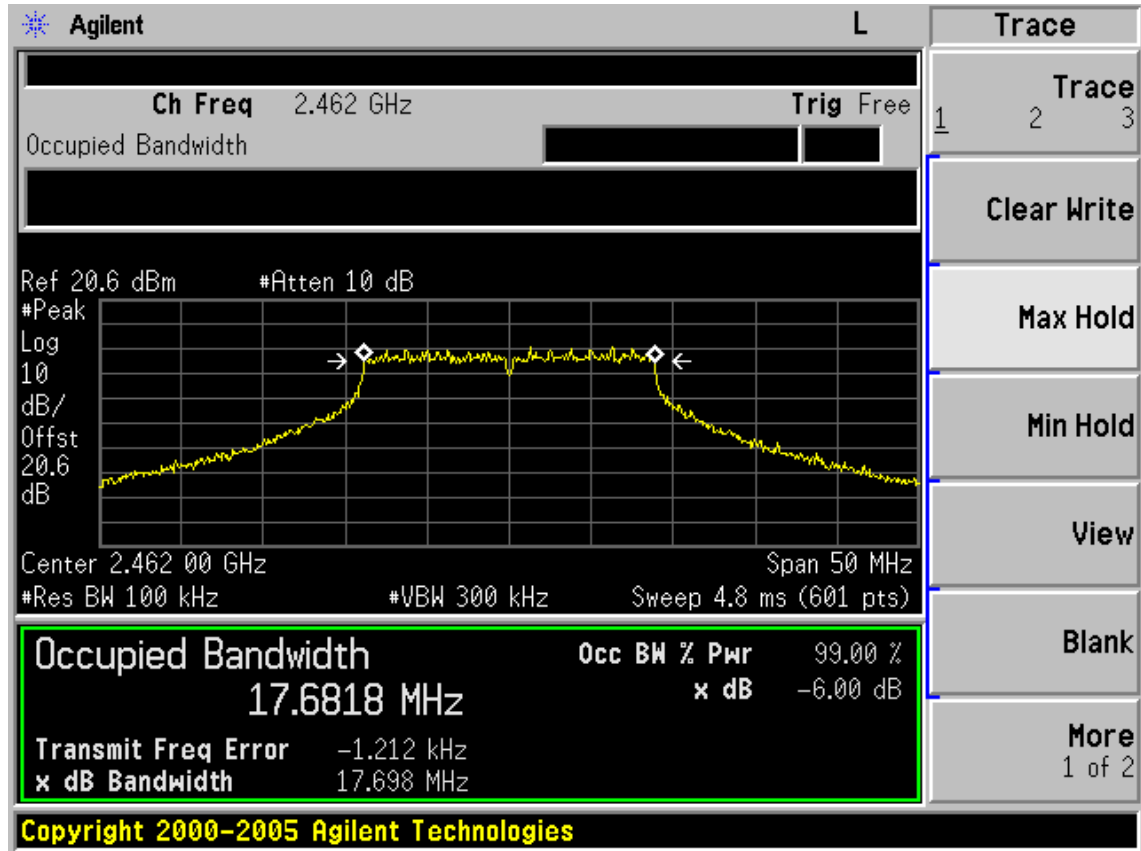


Test Mode: IEEE 802. 11n HT40TX


Test CH1: 2422MHz

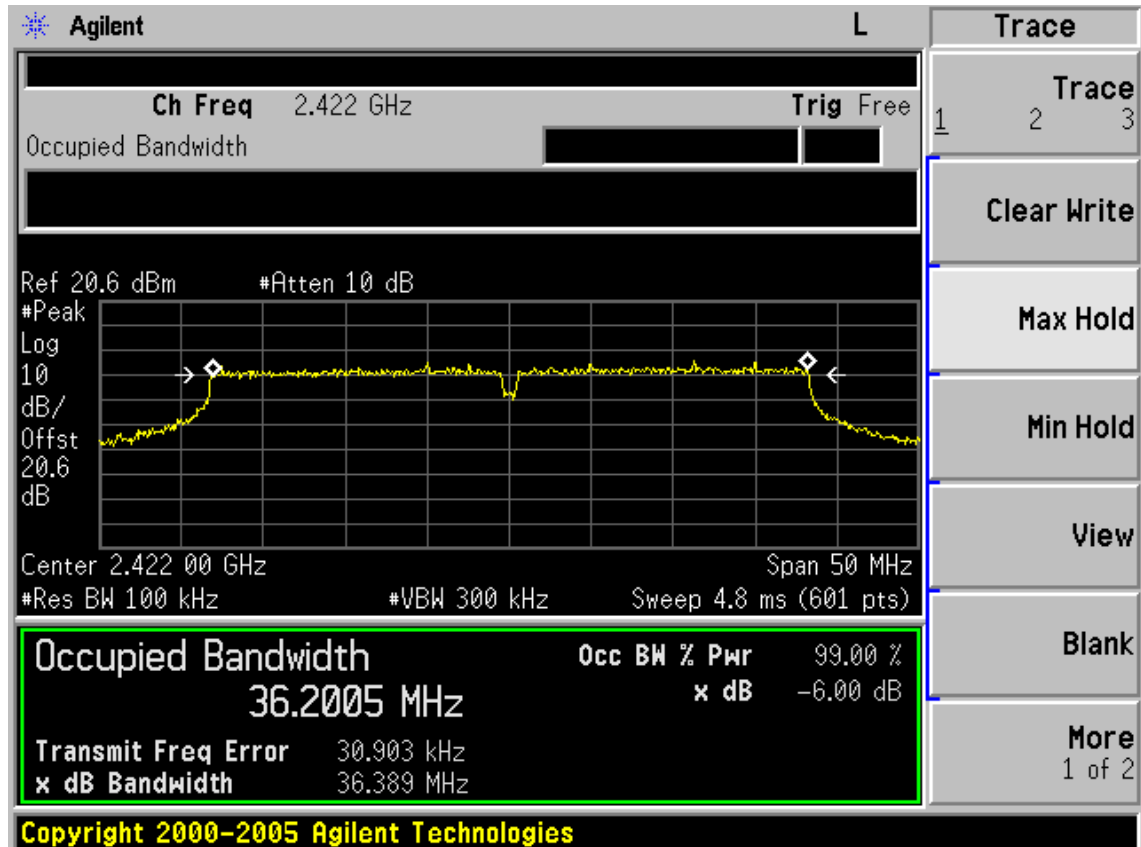


Test CH4: 2437MHz

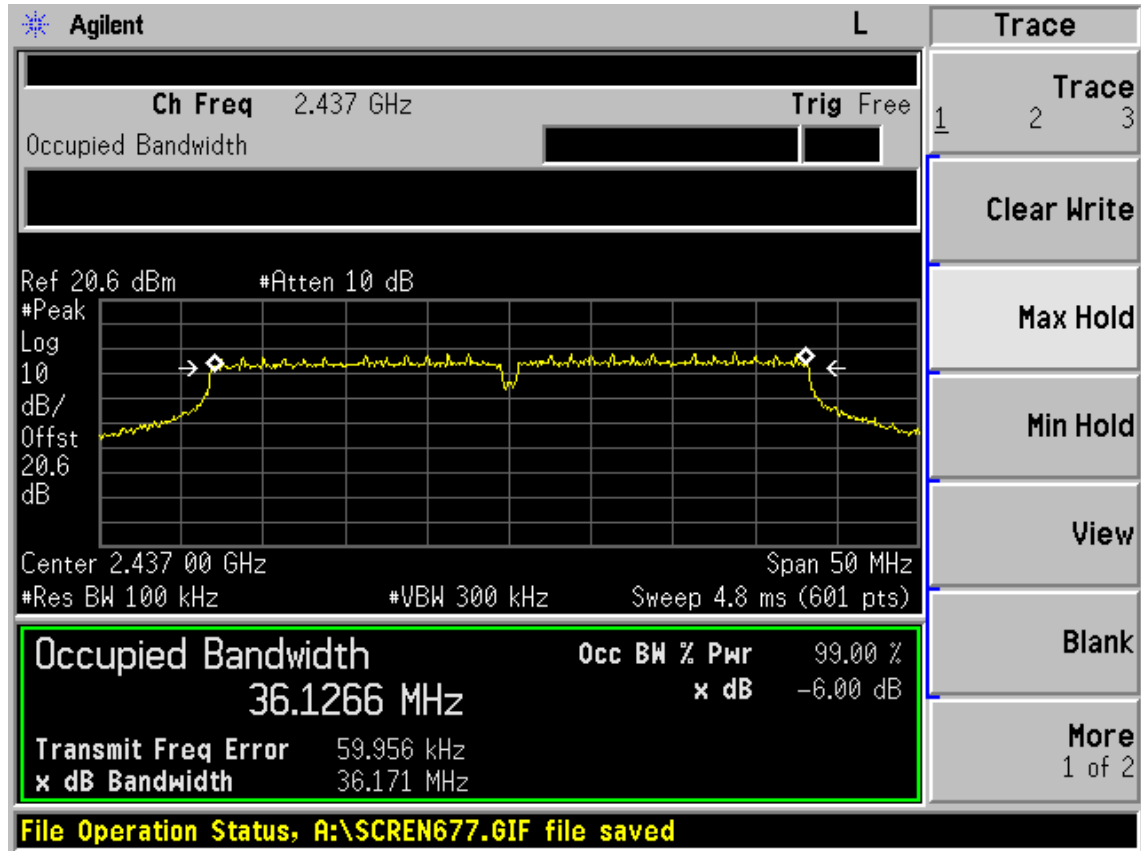


Test CH7: 2452MHz

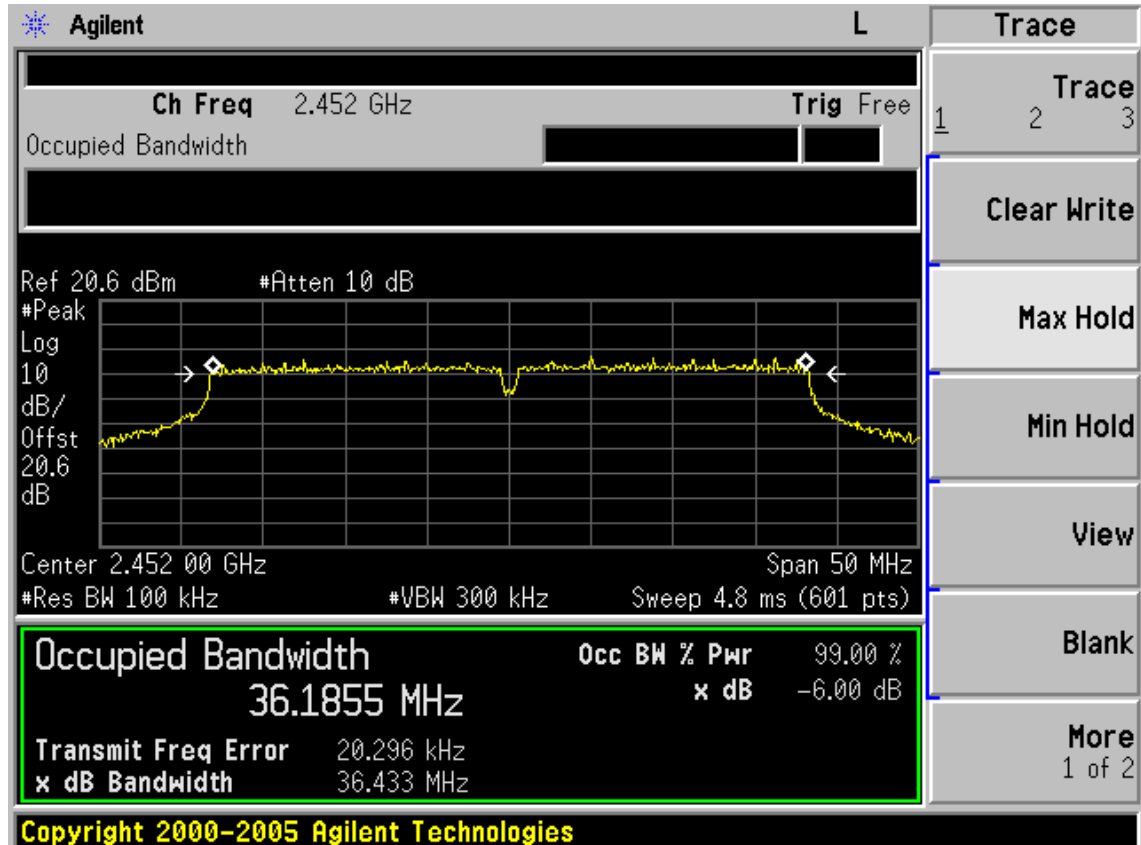

Chain1  
 Test Mode: IEEE 802.11b TX  
 Test CH1: 2412MHz

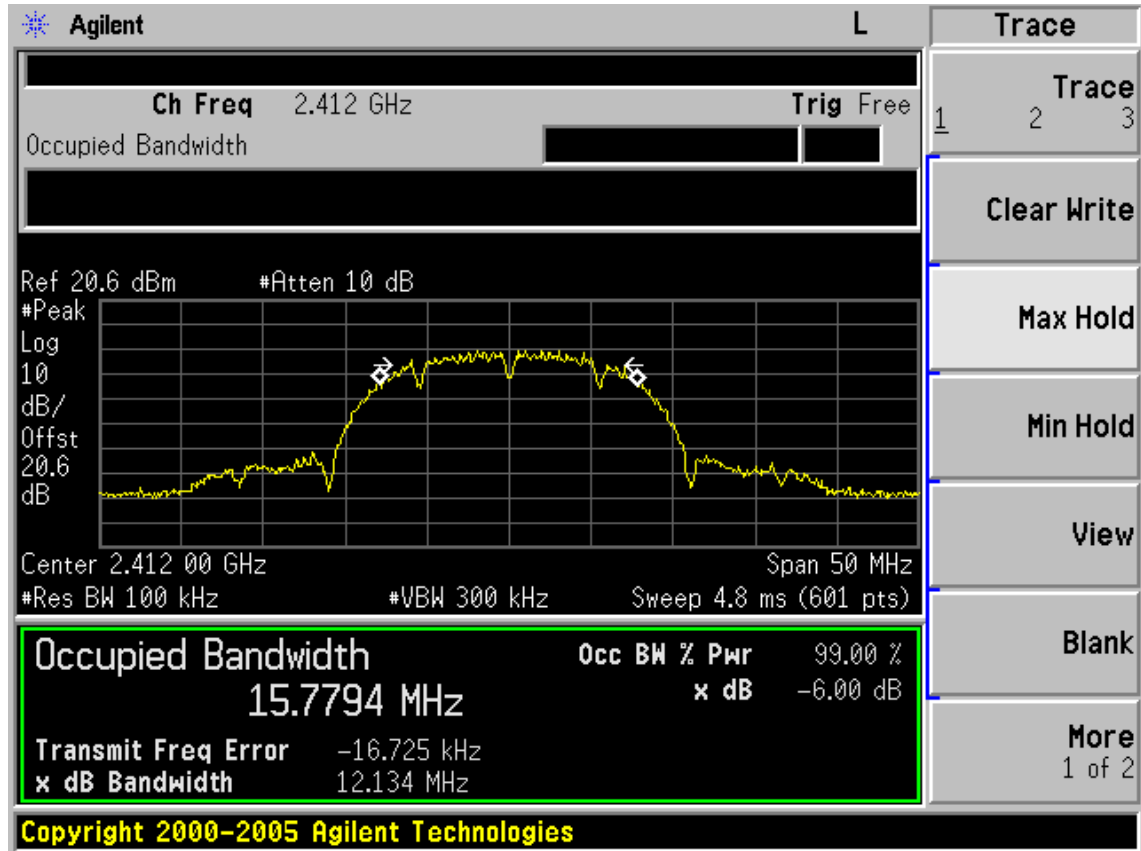

Test CH6: 2437MHz

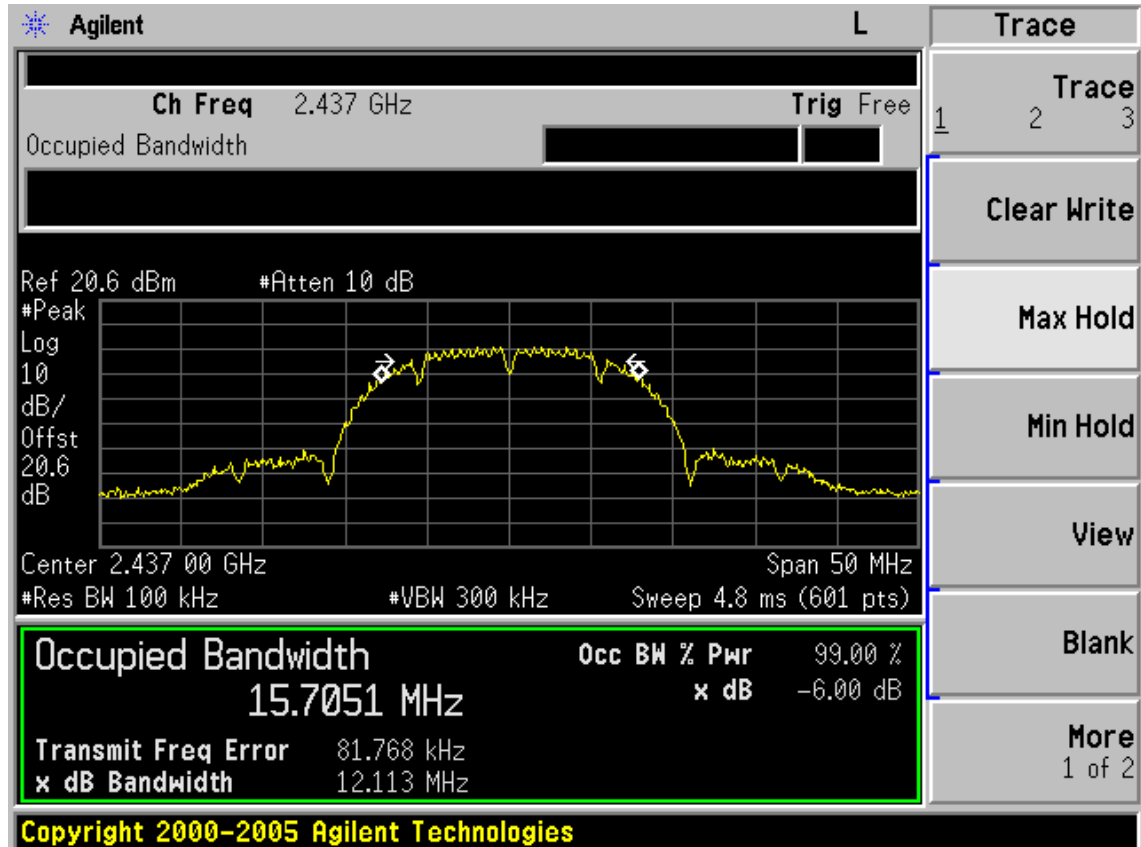



Test CH1 1: 2462MHz

Agilent L

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log

10

dB/

Offst

20.6

dB

Center 2.462 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
15.6933 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	56.244 kHz	
<b>x dB Bandwidth</b>	12.607 MHz	

File Operation Status, A:\SCREN661.GIF file saved

Test Mode: IEEE 802.11g TX

Test CH1: 2412MHz

Agilent L

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log

10

dB/

Offst

20.6

dB

Center 2.412 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
16.5393 MHz	x dB	-6.00 dB
<b>Transmit Freq Error</b>	1.898 kHz	
<b>x dB Bandwidth</b>	16.605 MHz	

File Operation Status, A:\SCREN663.GIF file saved

Test CH6: 2437MHz

Agilent L

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10

dB/ Offst 20.6 dB

Center 2.437 00 GHz Span 50 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.4956 MHz	x dB	-6.00 dB
Transmit Freq Error	2.768 kHz	
x dB Bandwidth	16.550 MHz	

Copyright 2000-2005 Agilent Technologies

Test CH11: 2462MHz

Agilent L

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20.6 dBm #Atten 10 dB

#Peak

Log 10

dB/ Offst 20.6 dB

Center 2.462 00 GHz Span 50 MHz


#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5244 MHz	x dB	-6.00 dB
Transmit Freq Error	11.003 kHz	
x dB Bandwidth	16.601 MHz	


File Operation Status, A:\SCREN667.GIF file saved

Test Mode: IEEE 802.11n HT20TX


Test CH1: 2412MHz

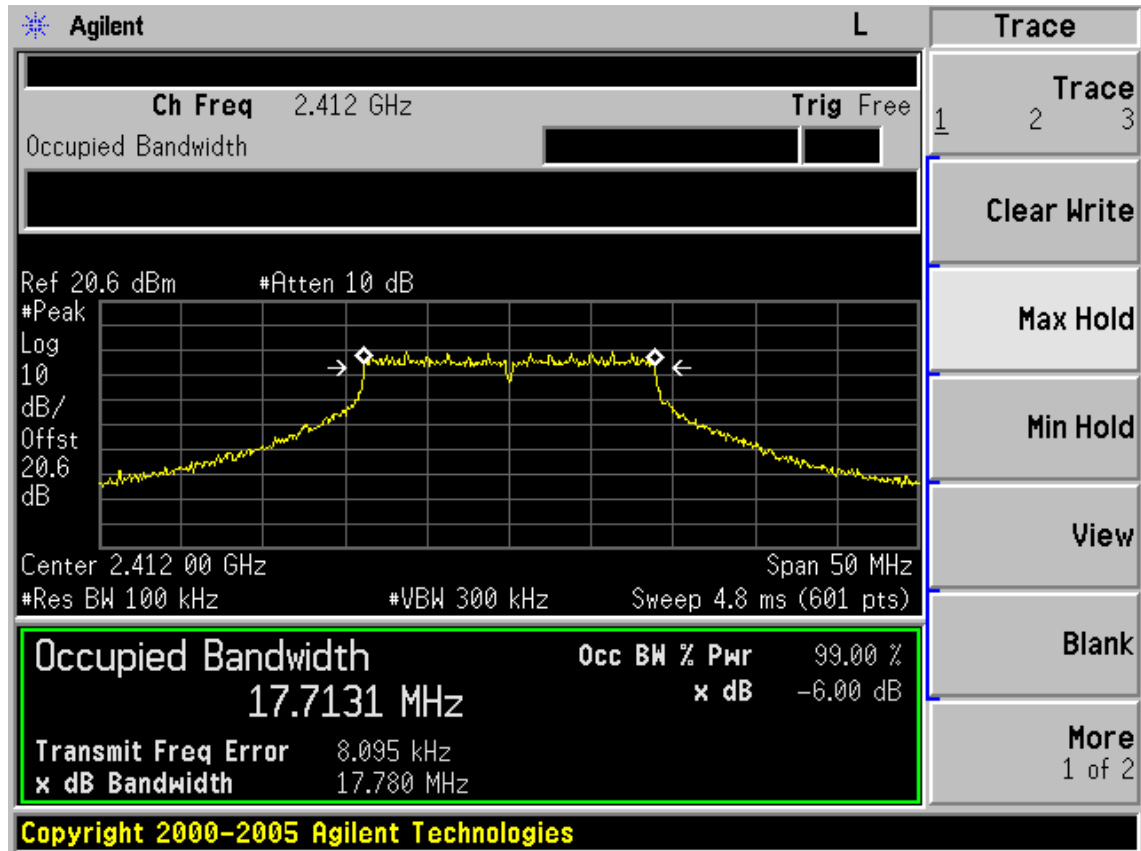

Test CH6: 2437MHz

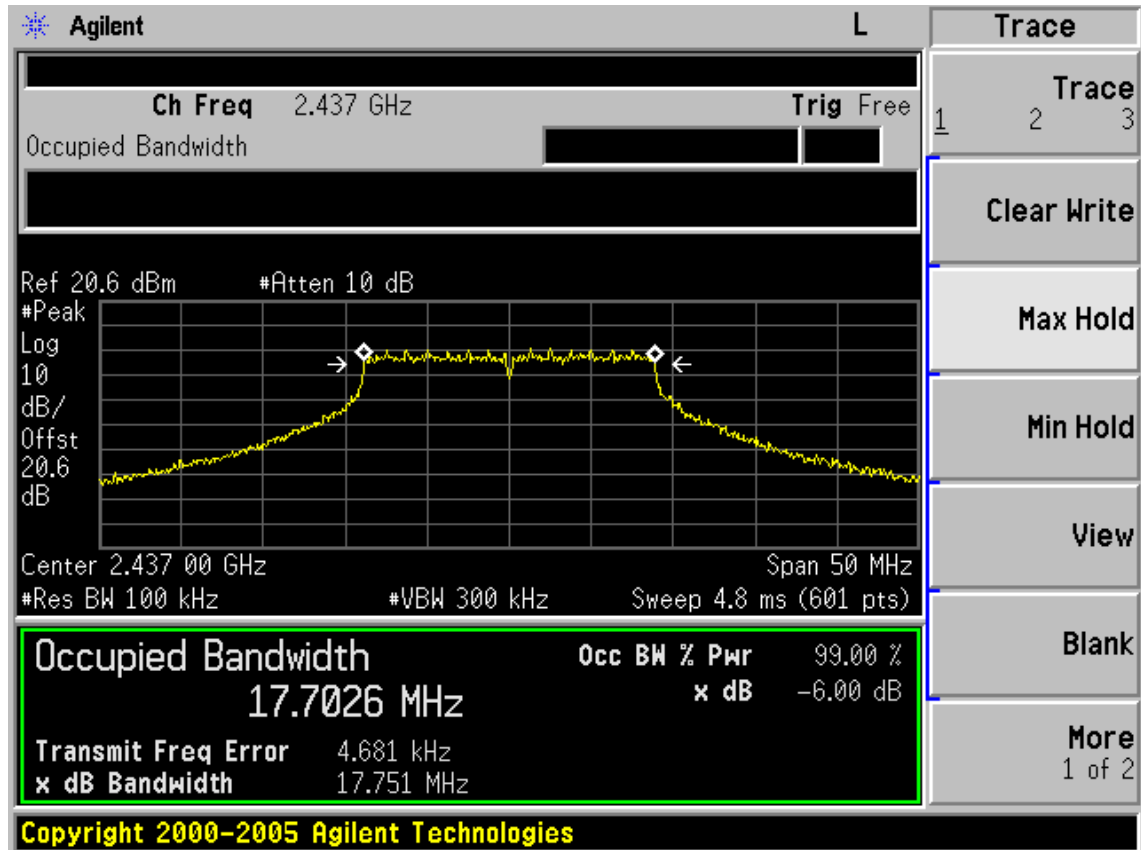


Test CH1: 2462MHz

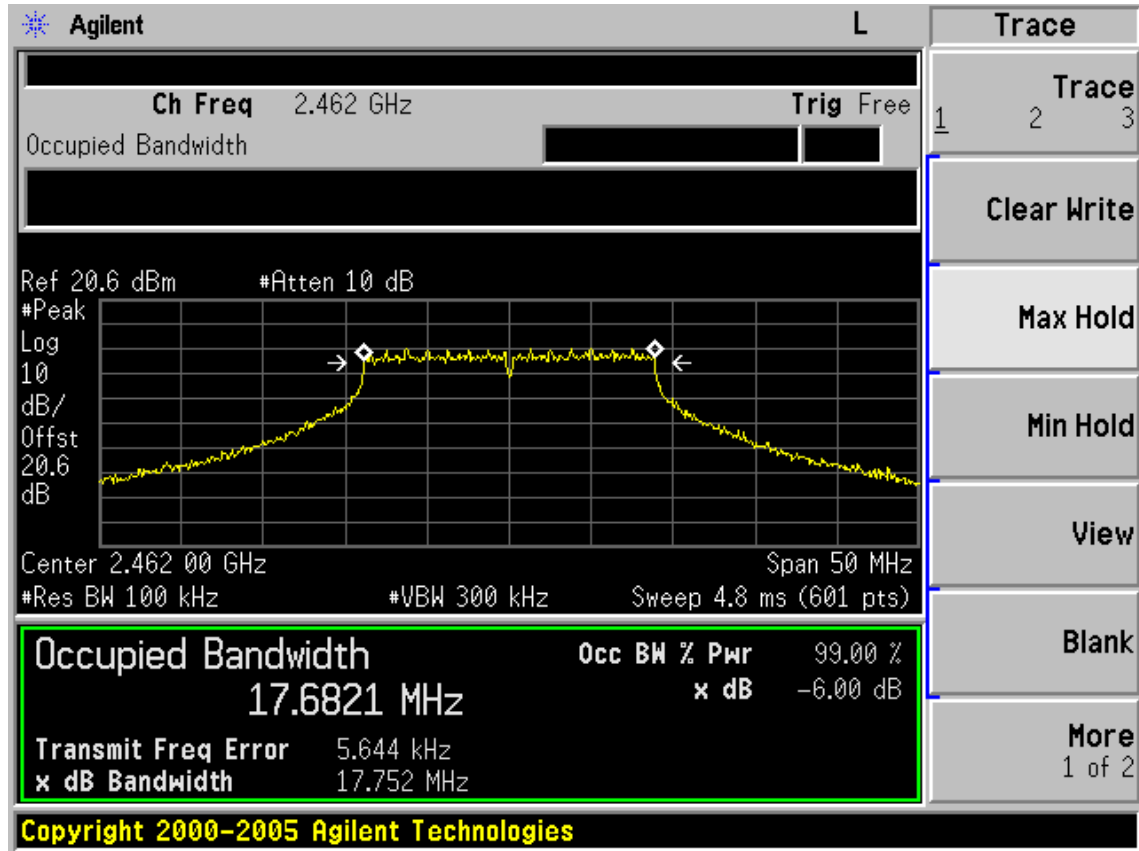


Test Mode: IEEE 802. 11n HT40TX


Test CH1: 2422MHz

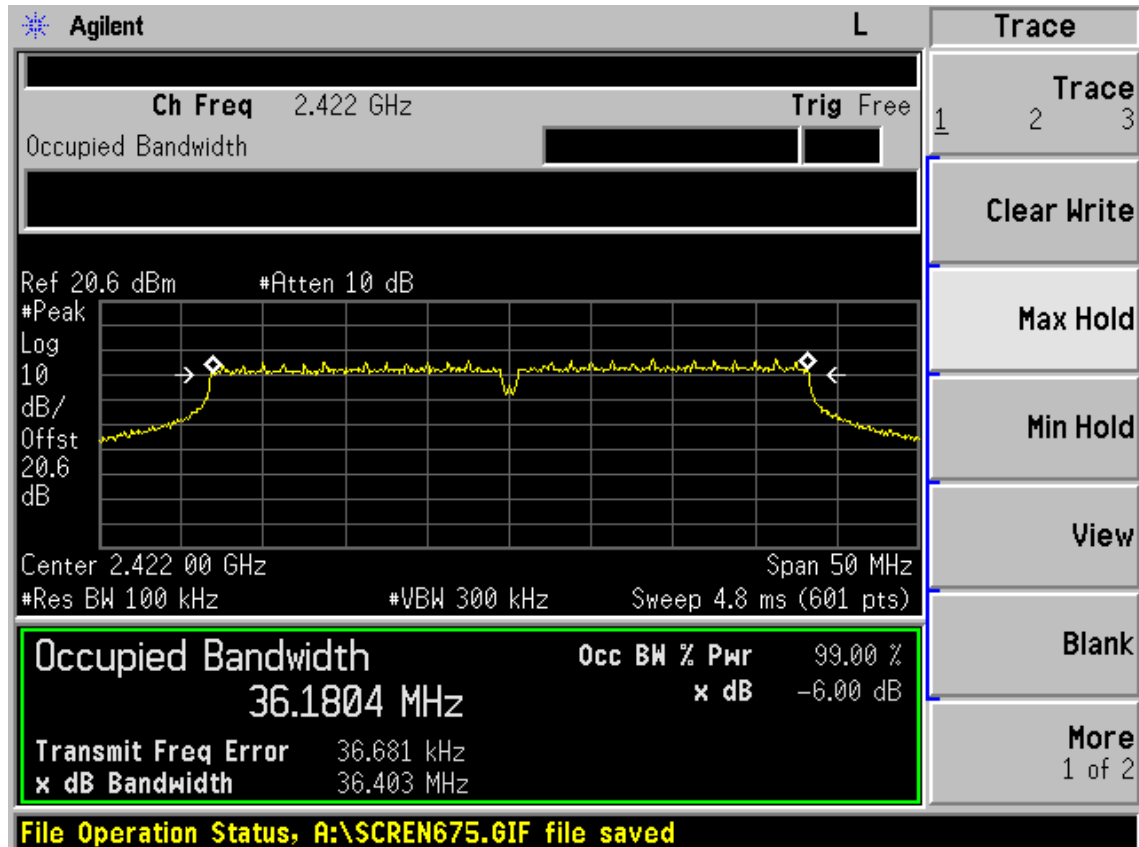

Test CH4: 2437MHz

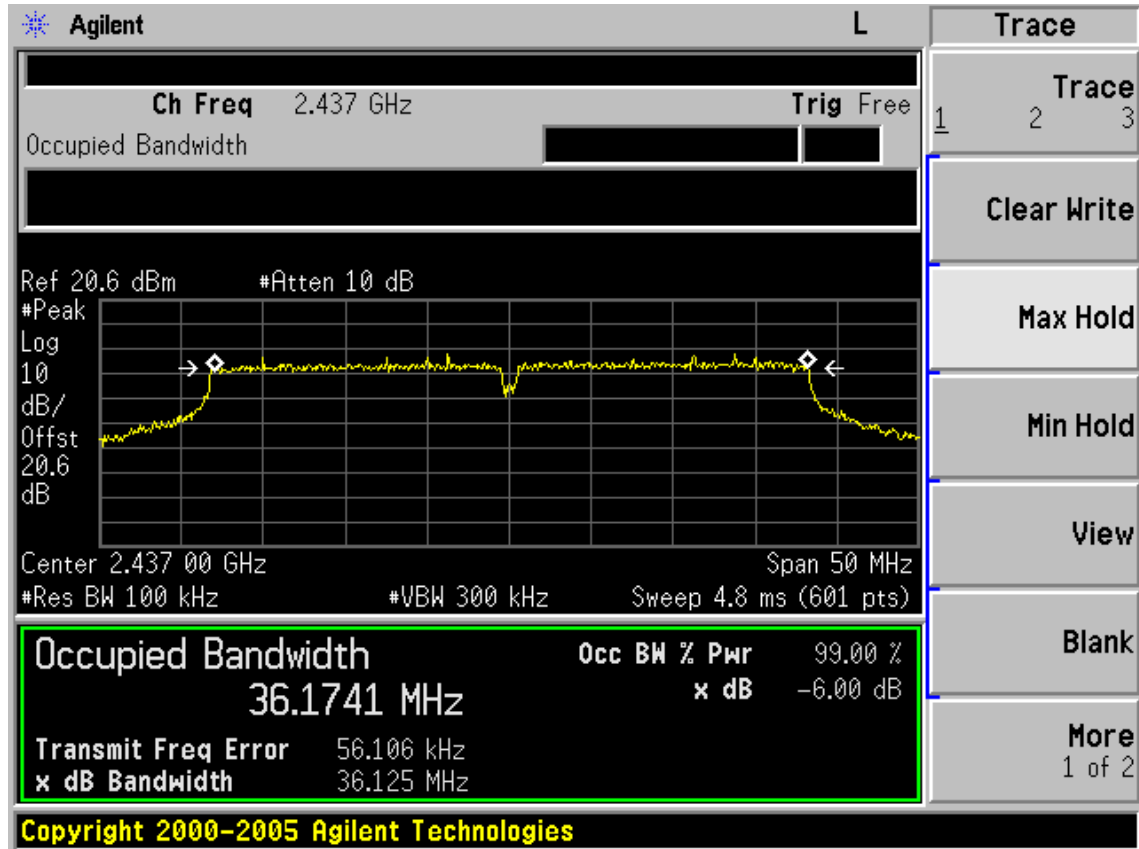

Test CH7: 2452MHz

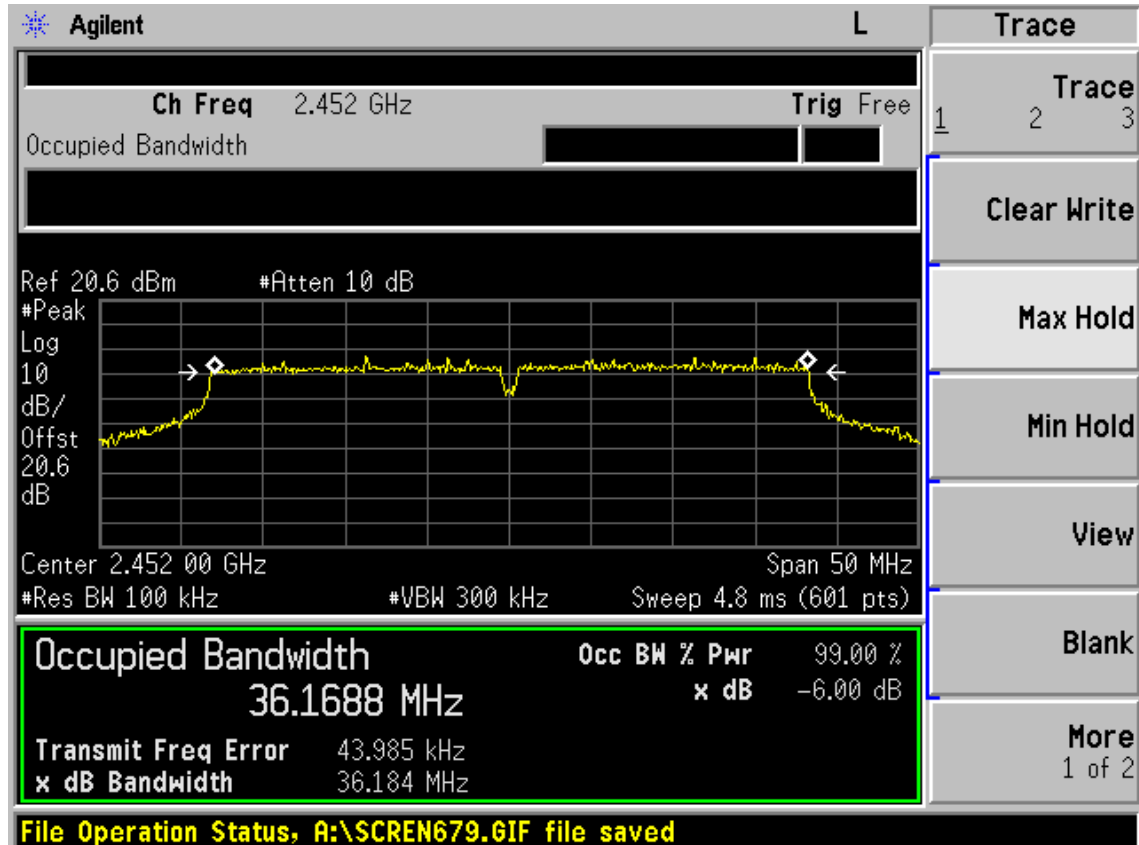

## 8. OUTPUT POWER TEST

### 8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power meter	Anritsu	ML2487A	6K00002472	May.08,11	1 Year
2.	Power sensor	Anritsu	MA2491A	0033005	May.08,11	1 Year
3	Attenuator	Agilent	8491B	MY39262165	May.08,11	1 Year
4	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08,11	1 Year

### 8.2. Limit (FCC Part 15C 15.247 b(3))

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

### 8.3. Test Procedure

- 1, Connected the EUT's antenna port to measure device by 20dB attenuator.
- 2, For IEEE 802.11b/g and IEEE802.11n HT20 mode, use a PK power meter which's bandwidth is 20MHz and above 6dB bandwidth of signal to measure out each test modes' PK output power.
- 3, For IEEE802.11n HT40 mode, because the signal's bandwidth is about 40MHz and above 20MHz bandwidth of power sensor ML2491A. So Bandwidth correction method according to ANSI C63.10 clause 6.10.2.1 part (c) was used:
  - 1) Set the RBW=3MHz and VBW =8MHz
  - 2) Turn averaging off
  - 3) Set sweep to automatic
  - 4) Set the span just large enough to capture the emission
  - 5) Use a peak detector on max hold
  - 6) Record the measured power
  - 7) Calculate Output power of EUT use the formula:

Peak output power =measured power+ 10log[(6dB bandwidth of emission)/(analyzer RBW)]

- 4, For IEEE802.11n mode, it's MIMO technology, so account total PK output power by add each chain's PK output power.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

### 8.4. Test Results

EUT: 300Mbps Wireless N Router					
M/N:PW-RN501D					
Test date: 2011-05-20		Pressure: 101.7 kpa		Humidity: 54 %	
Tested by: Leo-Li		Test site: RF site		Temperature:25 °C	
Cable loss: 1 dB		Attenuator loss: 20 dB		Antenna Gain: 5 dBi	
Test Mode	CH (MHz)	Peak output Power (dBm)			Limit (dBm)
		Chain0	Chain1	Total	
11b	CH1	20.07	19.98	N/A	30
	CH6	20.38	19.83	N/A	30
	CH11	20.05	19.62	N/A	30
11g	CH1	20.45	20.29	N/A	30
	CH6	22.36	22.08	N/A	30
	CH11	20.11	19.81	N/A	30
11n HT20	CH1	20.18	19.07	22.69	30
	CH6	20.23	21.84	24.14	30
	CH11	20.27	19.51	22.94	30

Test Mode	CH	Result					Limit (dBm)
		Measured power(dBm)/3MHz		PK Output power (dBm)			
		Chain0	Chain1	Chain0	Chain1	Total	
11n HT40	CH3	6.73	6.52	17.57	17.36	20.52	30
	CH6	11.31	10.25	22.15	22.09	25.14	30
	CH9	6.60	6.10	17.44	16.94	20.25	30

Chain 0 6dB Bandwidth for 11n HT40: 36.403MHz



Chain 1 6dB Bandwidth for 11n HT40: 36.433MHz

Chain 0 BW correction factor =  $10\log[(36.403\text{MHz})/(3\text{MHz})] = 10.84\text{dB}$


Chain 1 BW correction factor =  $10\log[(36.433\text{MHz})/(3\text{MHz})] = 10.84\text{dB}$

Conclusion: PASS

Chain 0

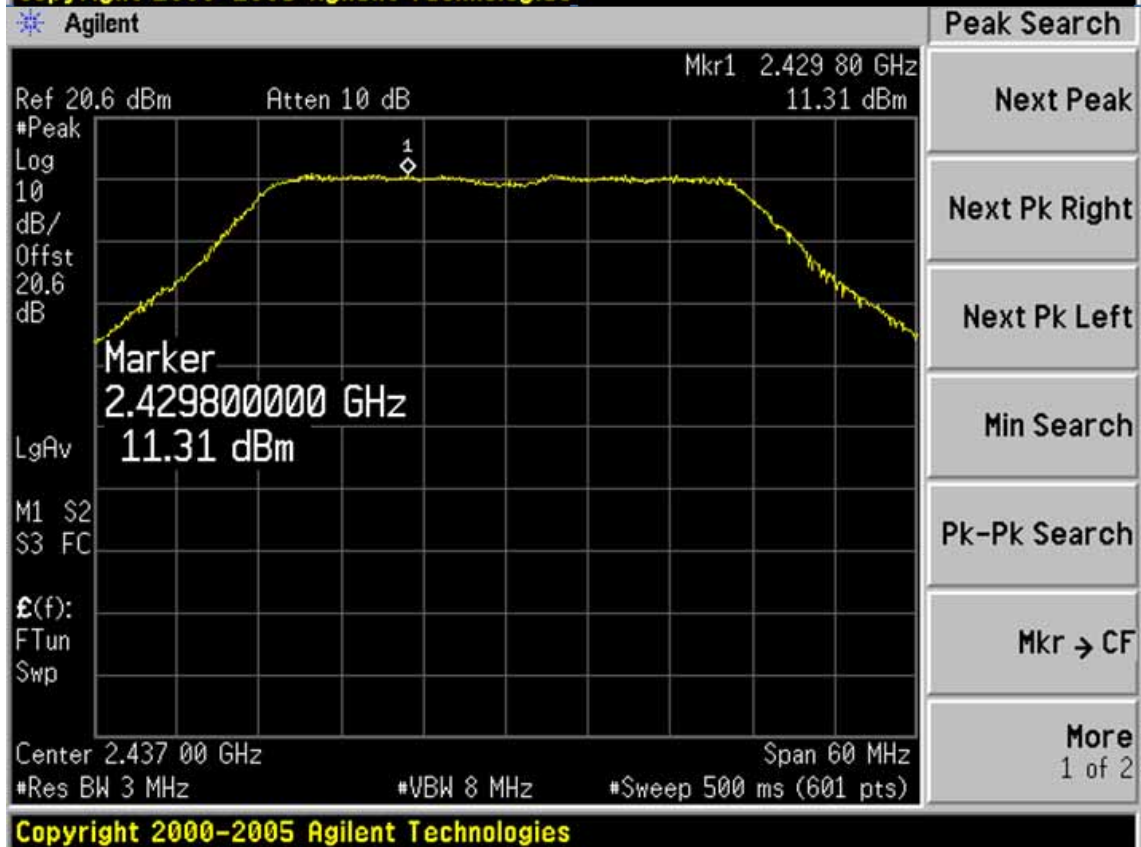
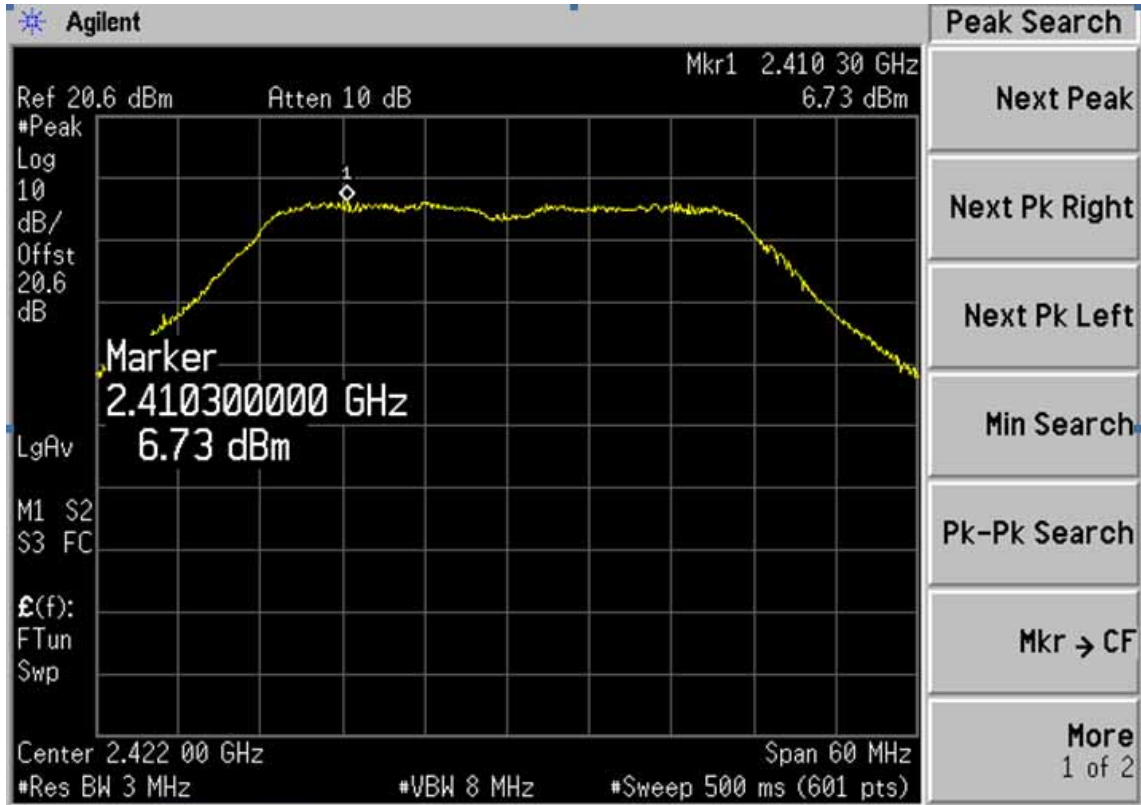




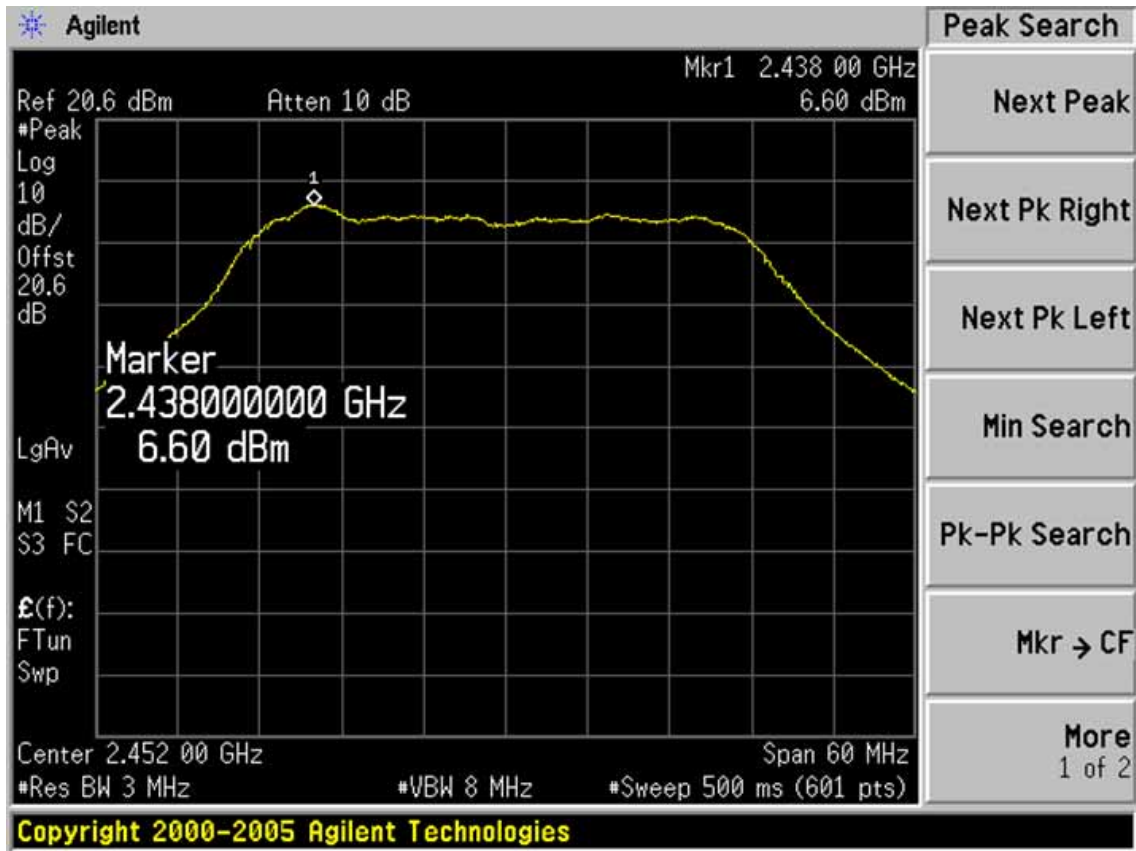

Chain 1



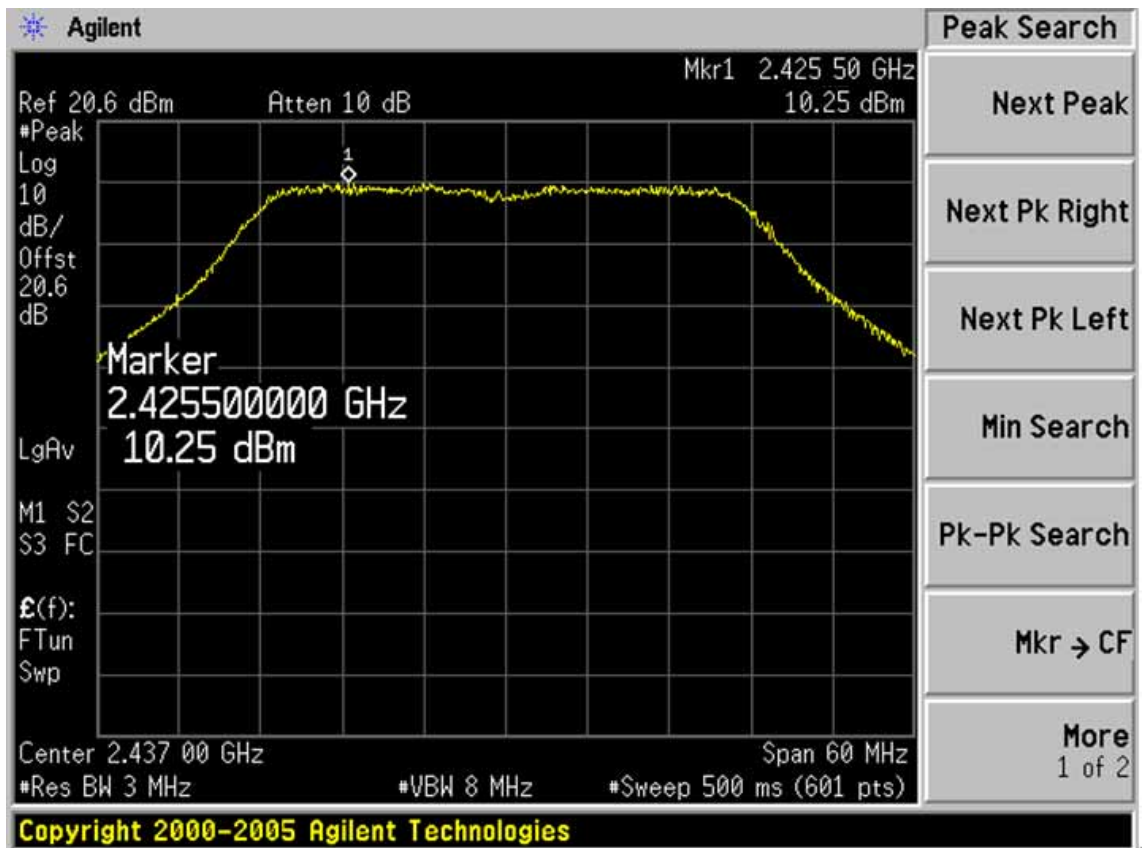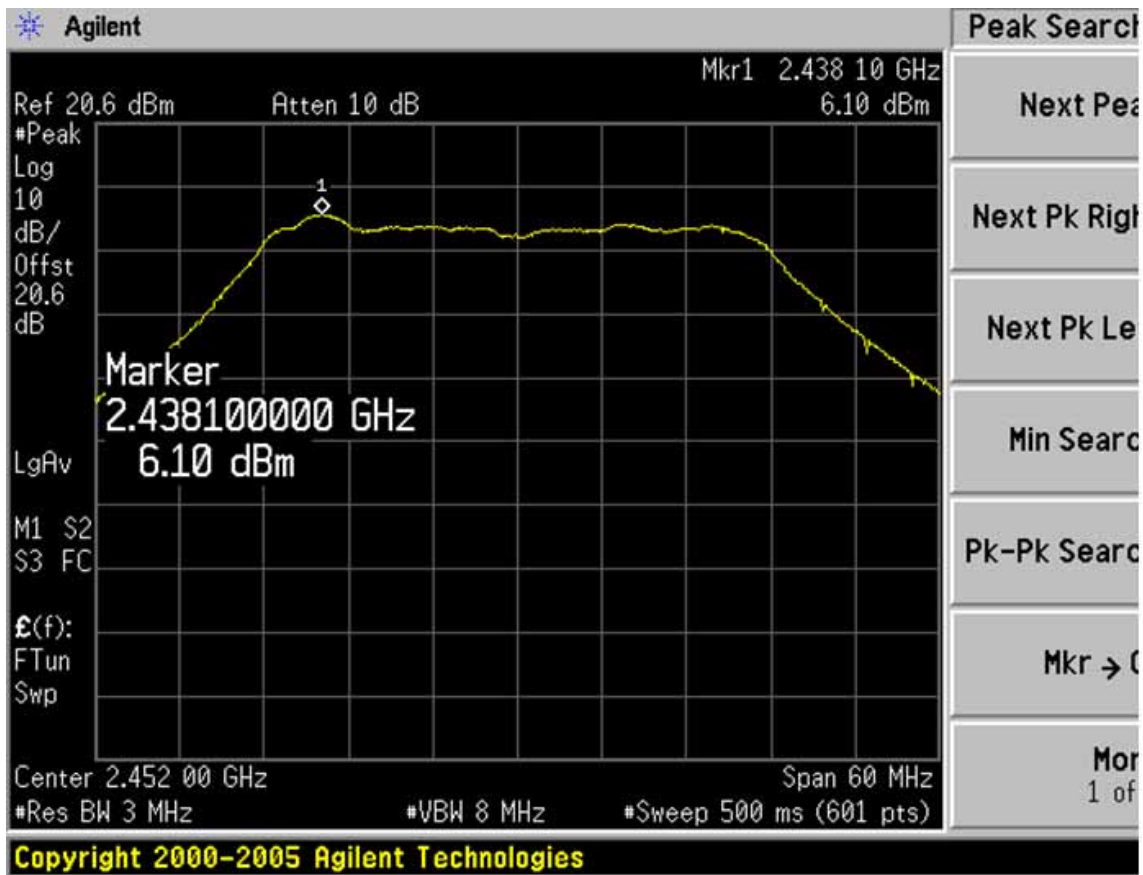

## 9. POWER SPECTRAL DENSITY TEST

### 9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	May.08, 11	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	May.08, 11	1 Year
3.	RF Cable	Hubersuhner	SUCOFLEX102	28618/2	May.08, 11	1 Year

### 9.2. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 9.3. Test Procedure

- 1, Connected the EUT's antenna port to spectrum analyzer device by 20dB attenuator.
- 2, Follow the test procedure as described in ANSI C.10: 2009 Clause 6.11.2.3 to measure out each test modes and chain's power density with 3KHz.



### 9.4. Test Results


EUT: 300Mbps Wireless N Router		
M/N: PW-RN501D		
Test date: 2011-05-20	Pressure: 100.6kpa	Humidity: 60%
Tested by: Sunny-lu	Test site: RF site	Temperature : 25°C

Cable loss: 0.6dB		Attenuator loss: 20dB		Antenna Gain: 5.0dBi	
Mode	CH	Result			Limit (dBm/3KHz)
		Chain0 Power density (dBm/3KHz)	Chain1 Power density (dBm/3KHz)	Total Power density (dBm/3KHz)	
11b	CH1	-8.34	-8.59	-5.45	8
	CH6	-9.54	-9.80	-6.66	8
	CH11	-8.90	-10.25	-6.51	8
11g	CH1	-13.15	-13.48	-10.30	8
	CH6	-9.31	-11.49	-7.25	8
	CH11	-12.83	-12.53	-9.67	8
11n HT20	CH1	-13.27	-13.82	-10.53	8
	CH6	-9.39	-11.61	-7.35	8
	CH11	-14.34	-13.14	-10.69	8
11n HT40	CH1	-18.65	-17.59	-15.08	8
	CH5	-12.83	-14.30	-10.49	8
	CH9	-14.47	-18.21	-12.94	8
Conclusion: PASS					


**Chain 0**



Test Mode: IEEE 802.11b TX

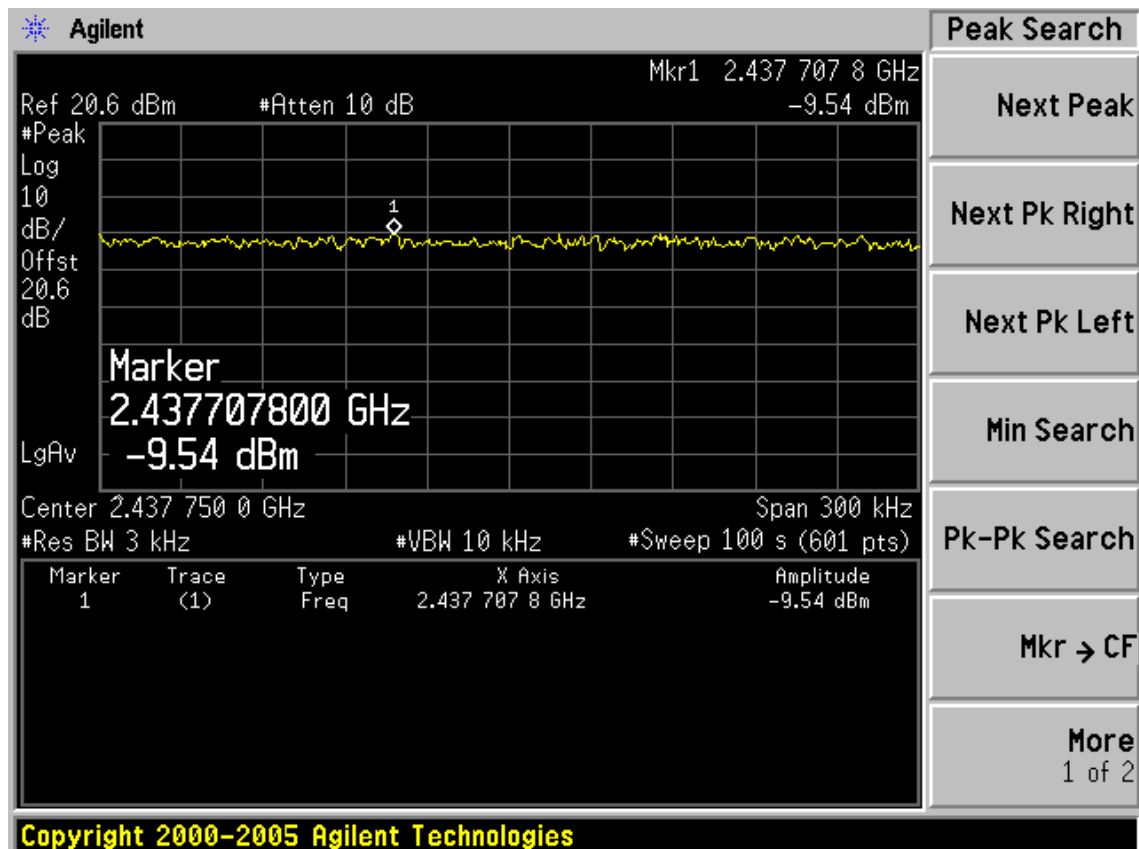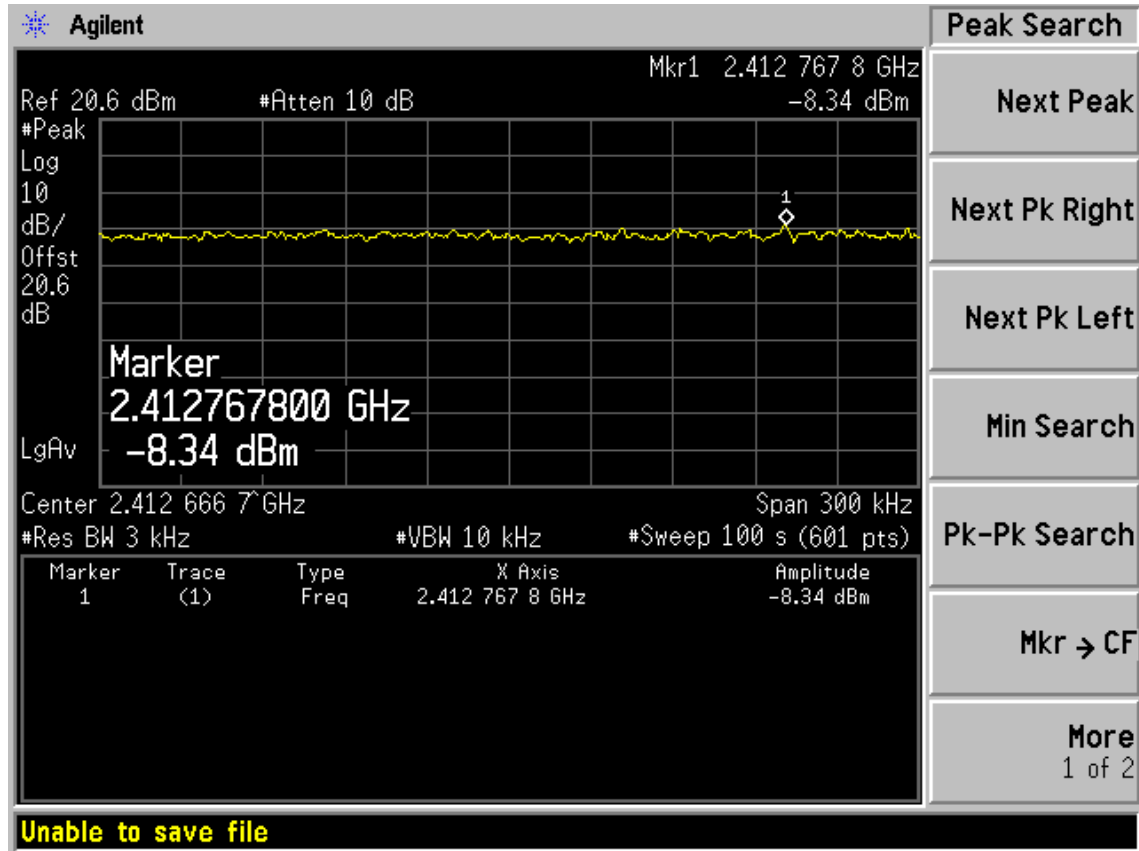


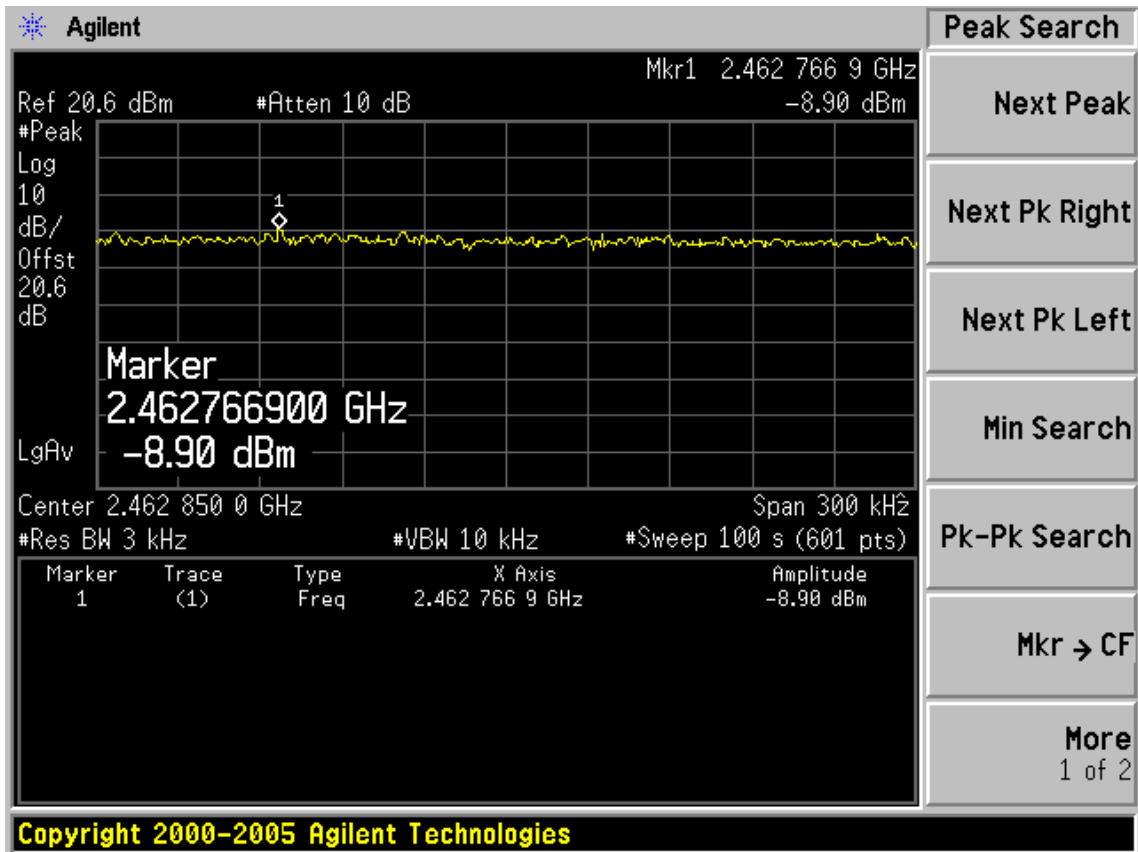


Test Mode: IEEE 802.11g TX

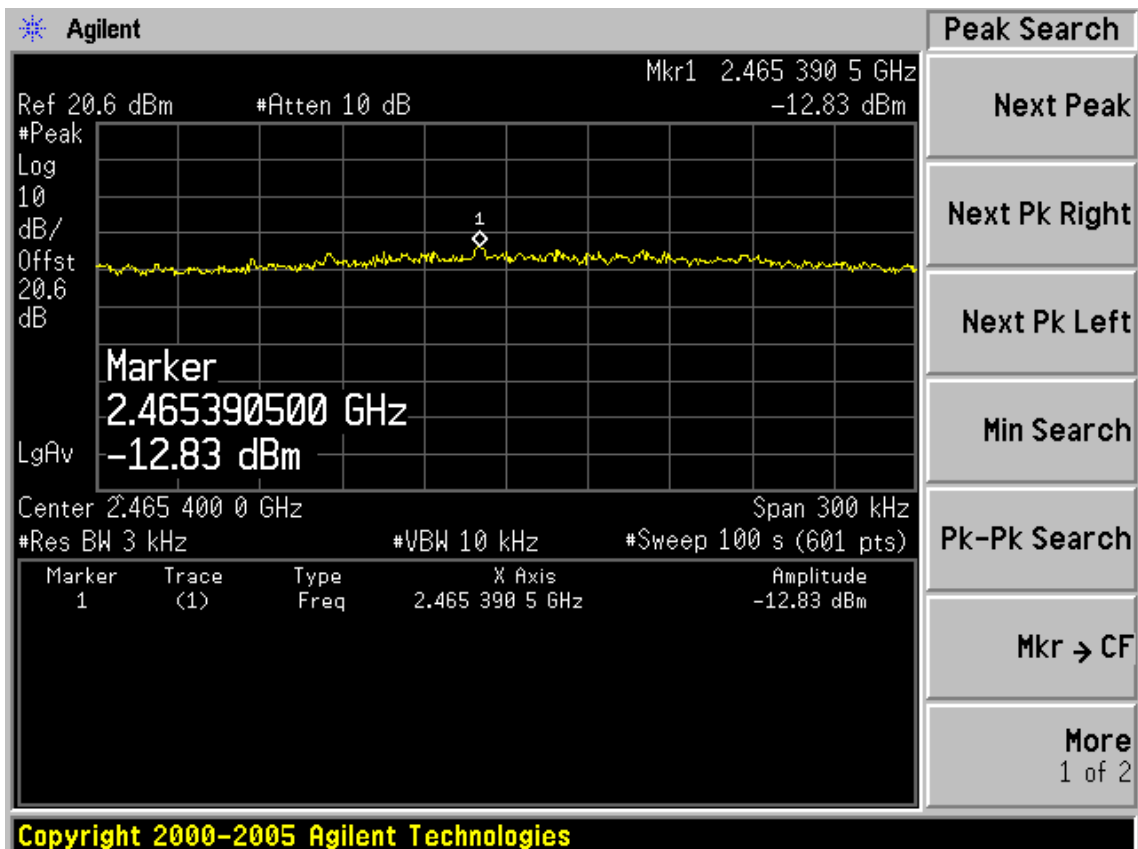


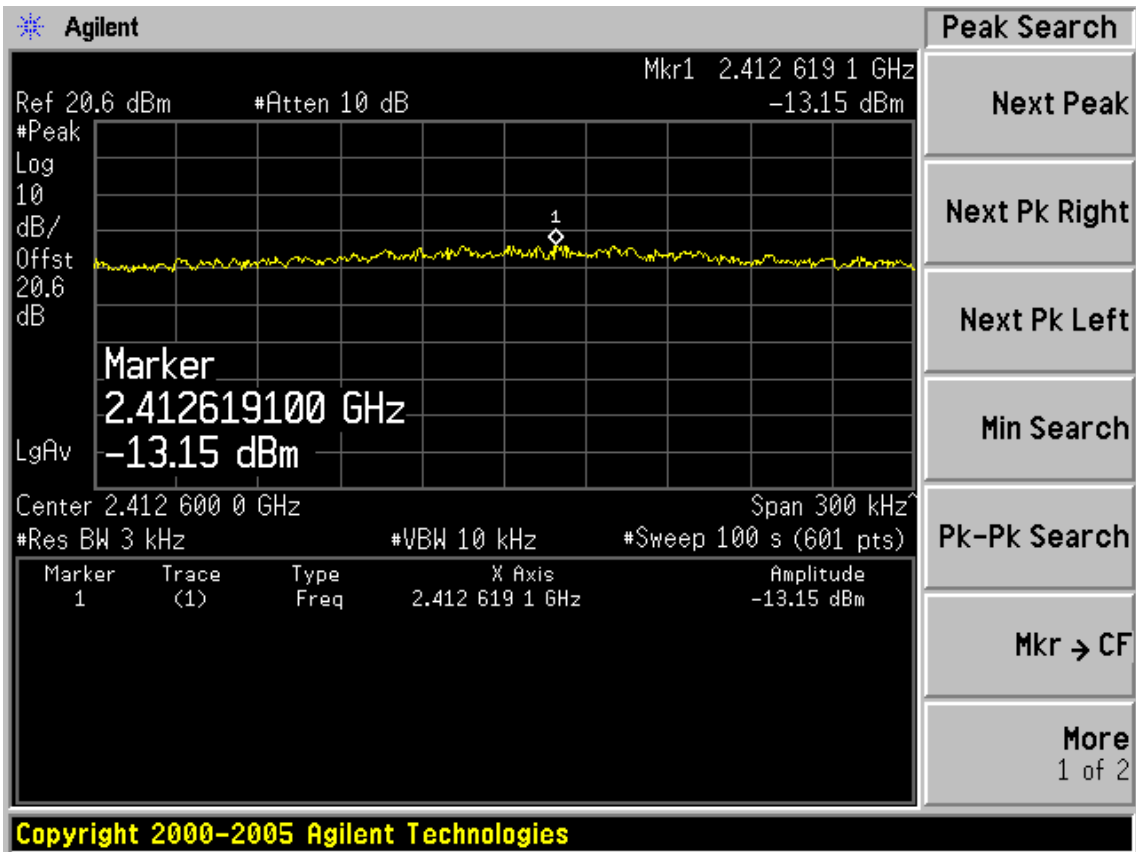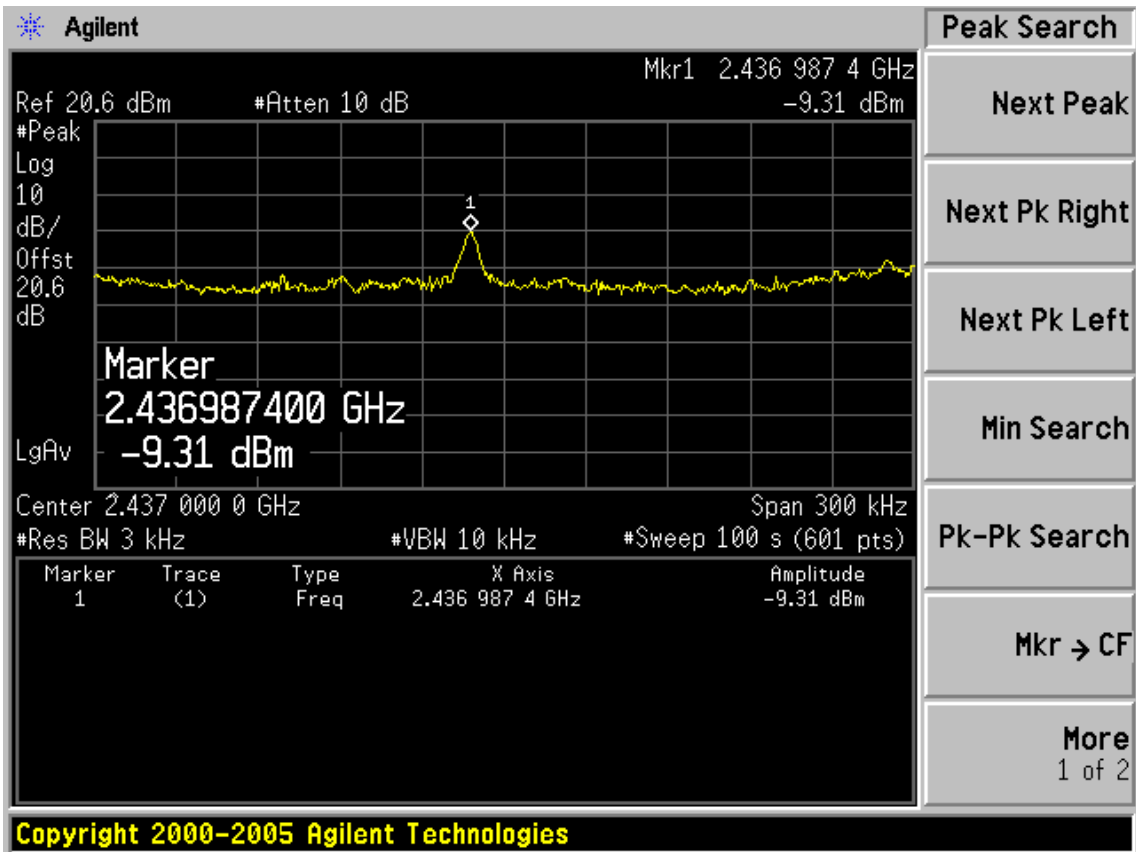

Test Mode: IEEE 802.11n HT20 TX

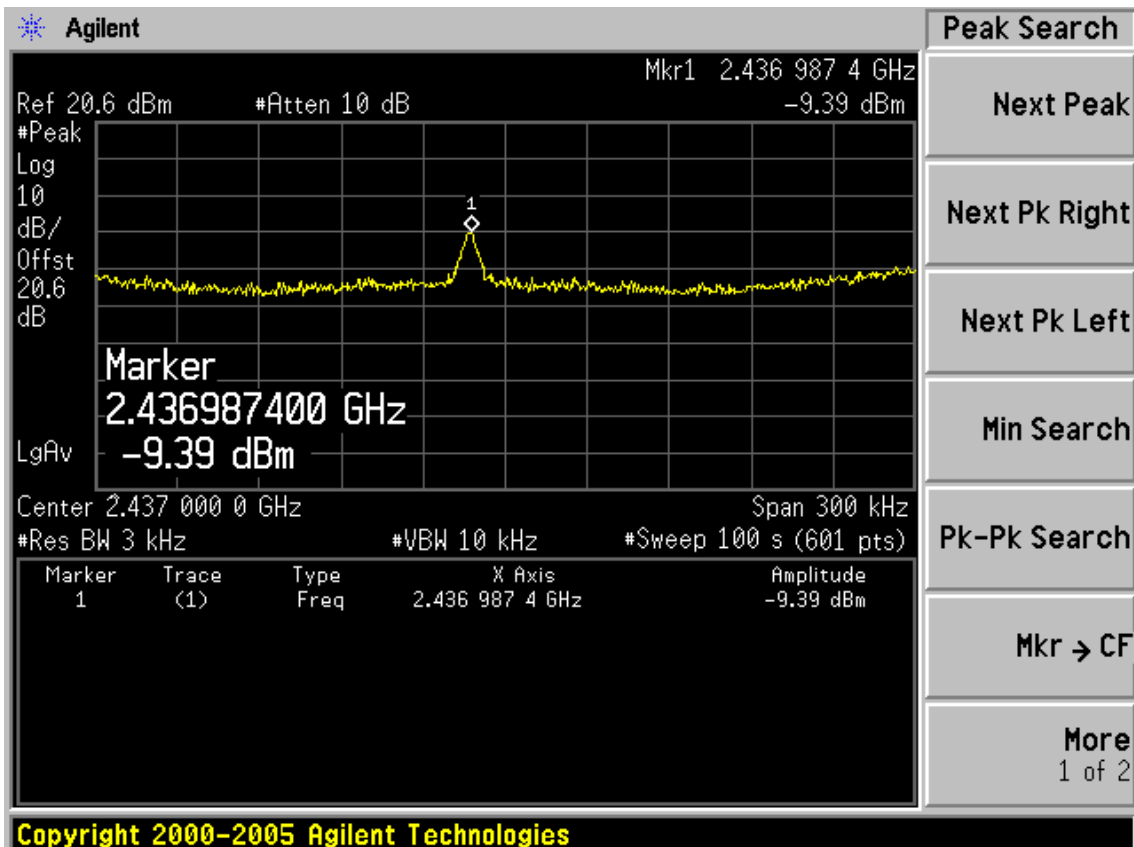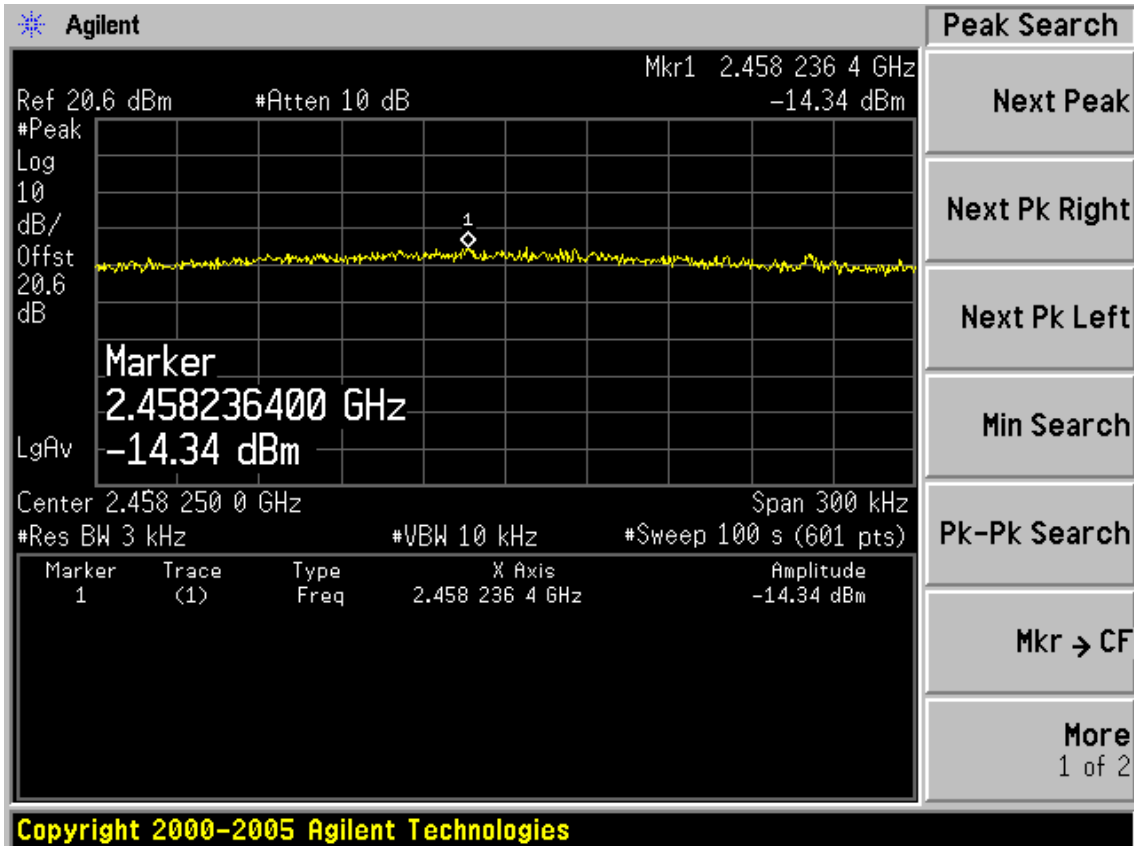





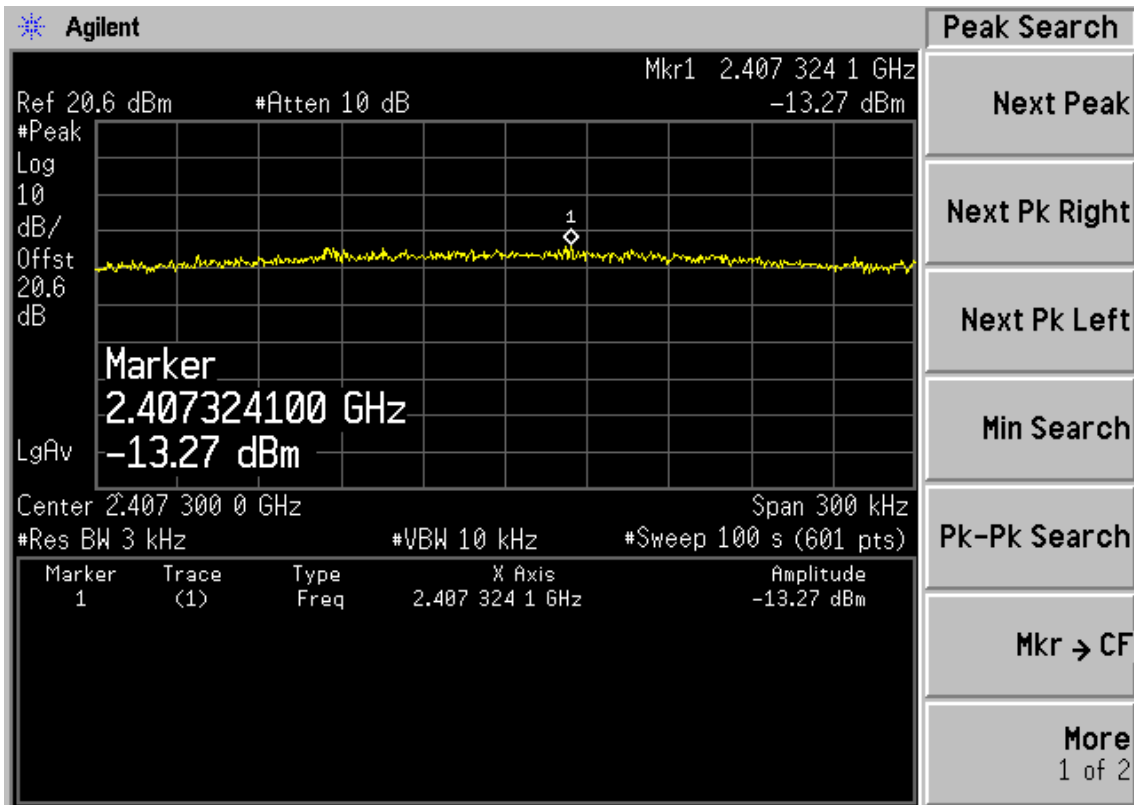


Copyright 2000-2005 Agilent Technologies

Test Mode: IEEE 802. 11n HT40 TX

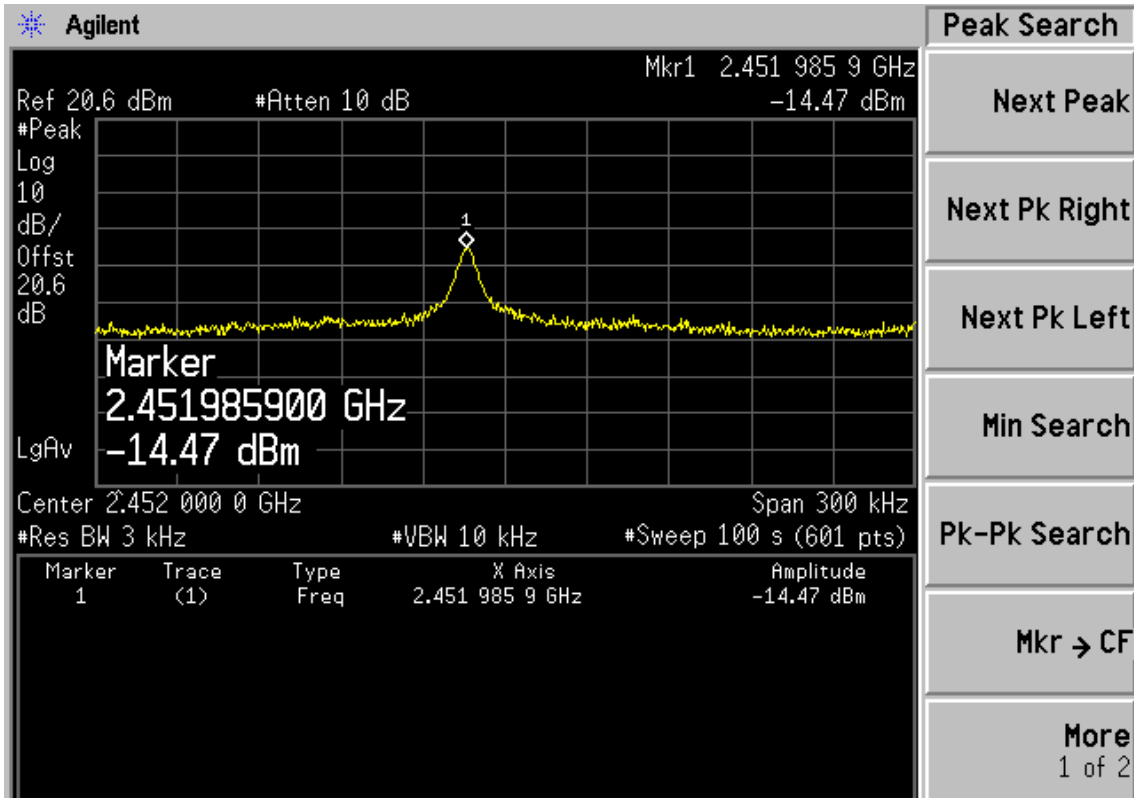


Copyright 2000-2005 Agilent Technologies

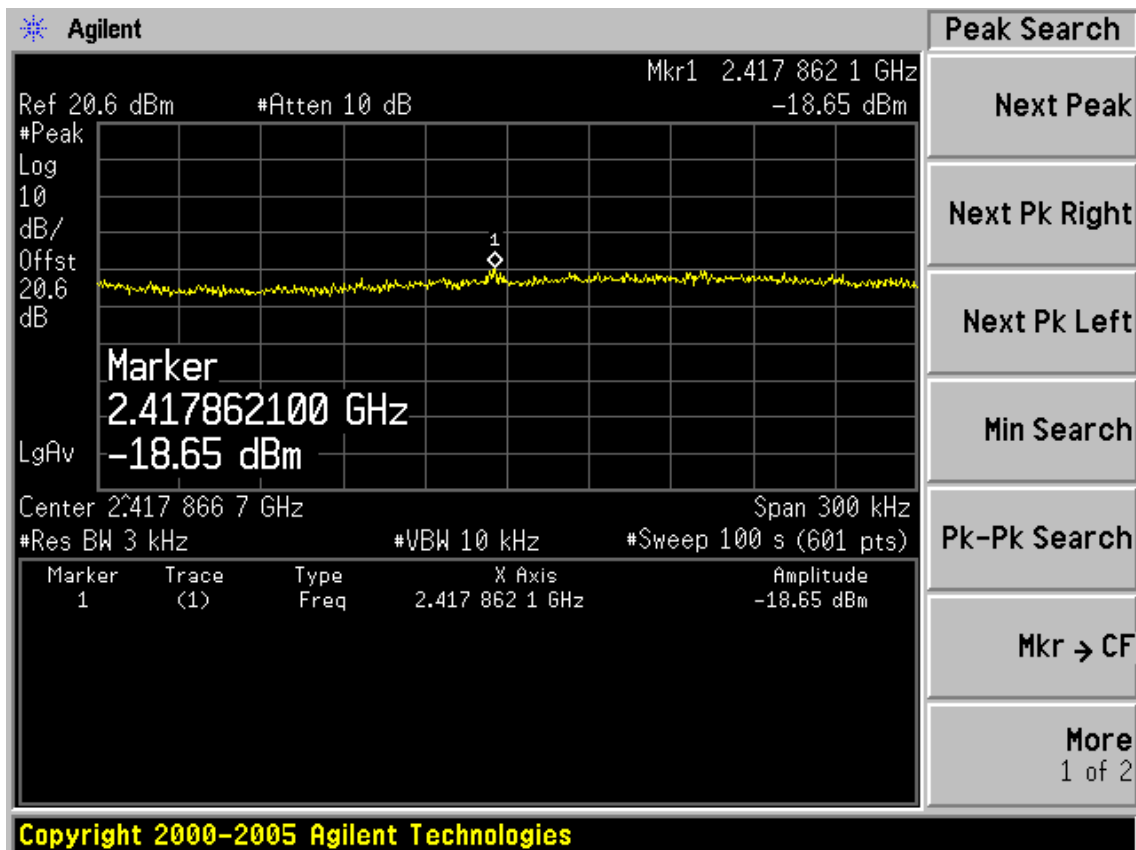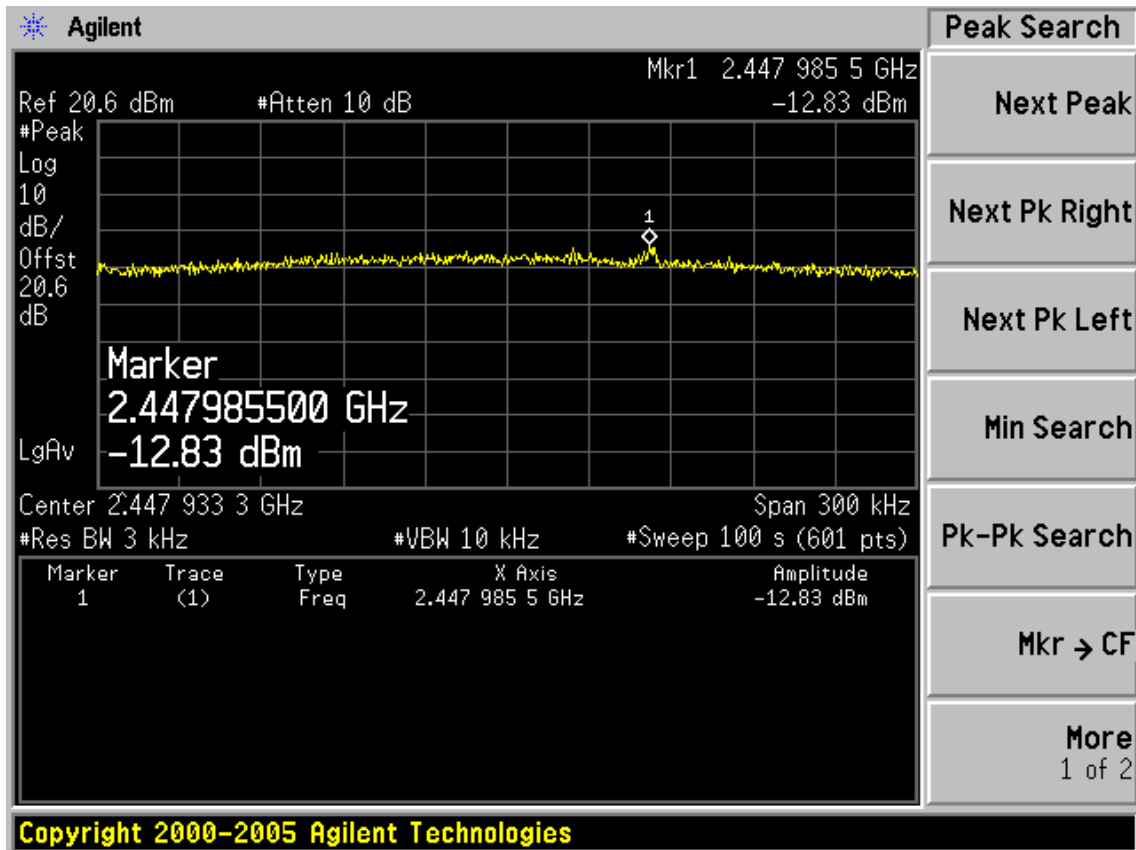


**Chain 1**


Test Mode: IEEE 802.11b TX

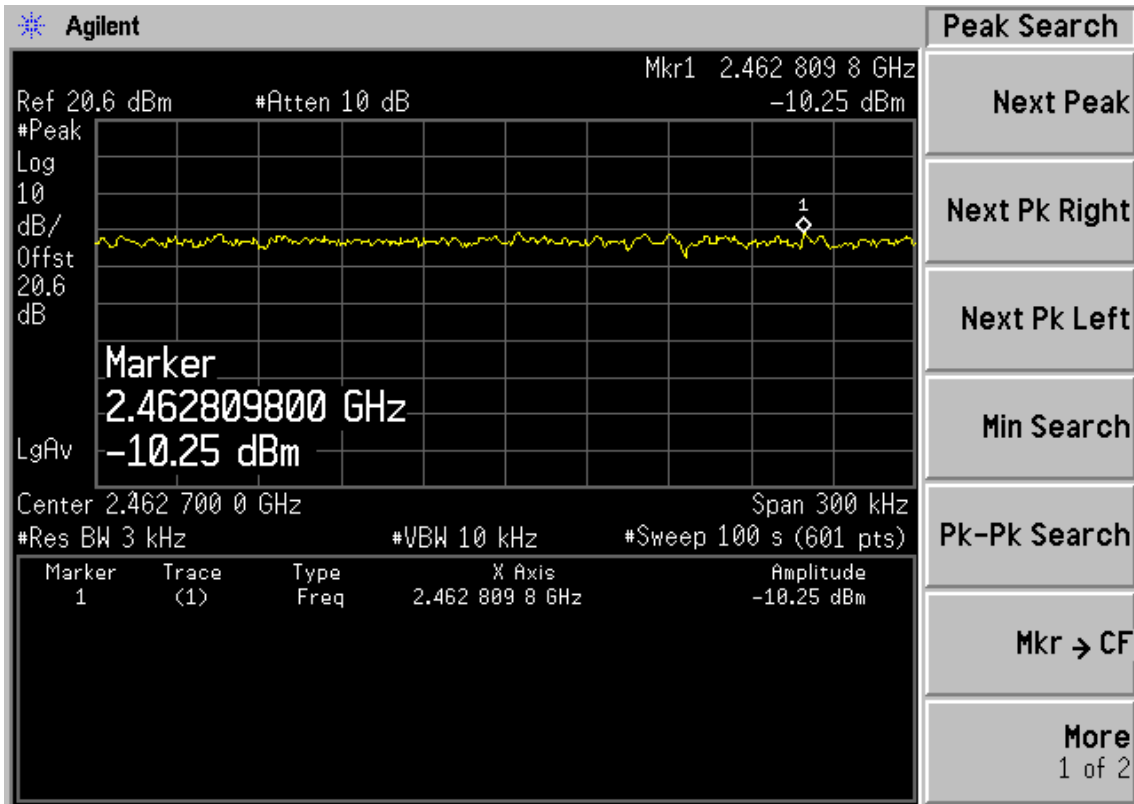

Copyright 2000-2005 Agilent Technologies

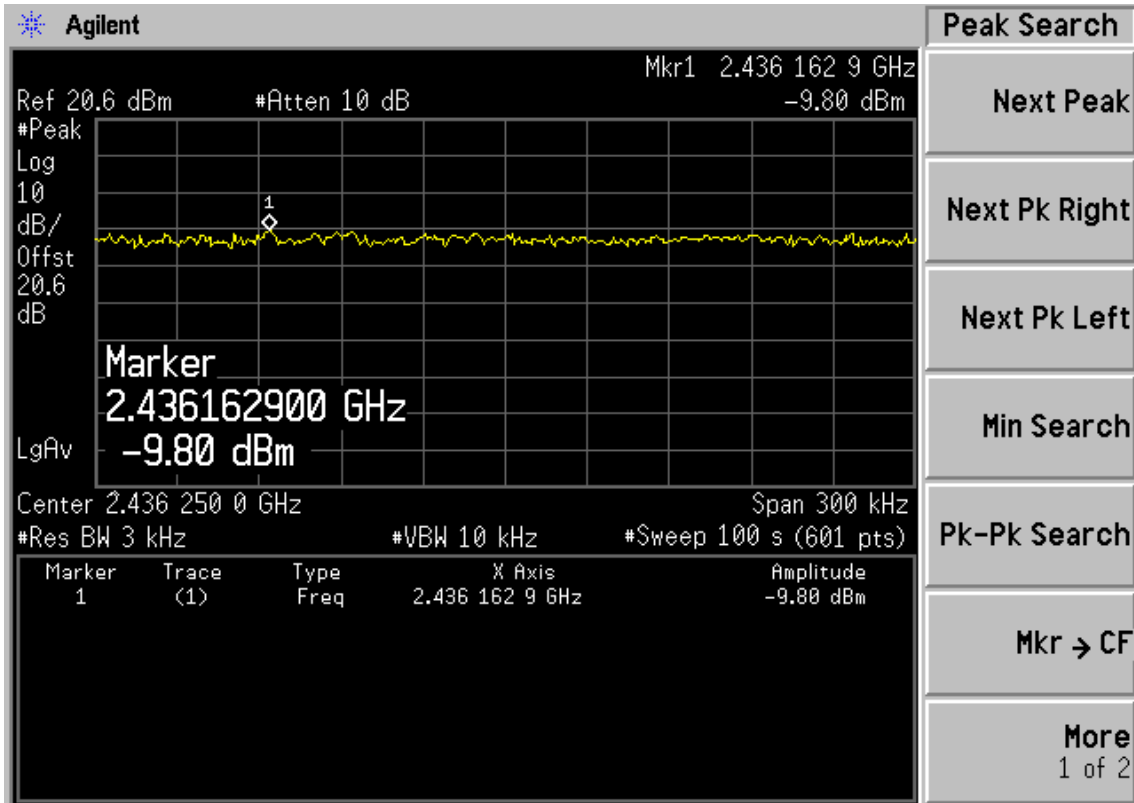


Copyright 2000-2005 Agilent Technologies


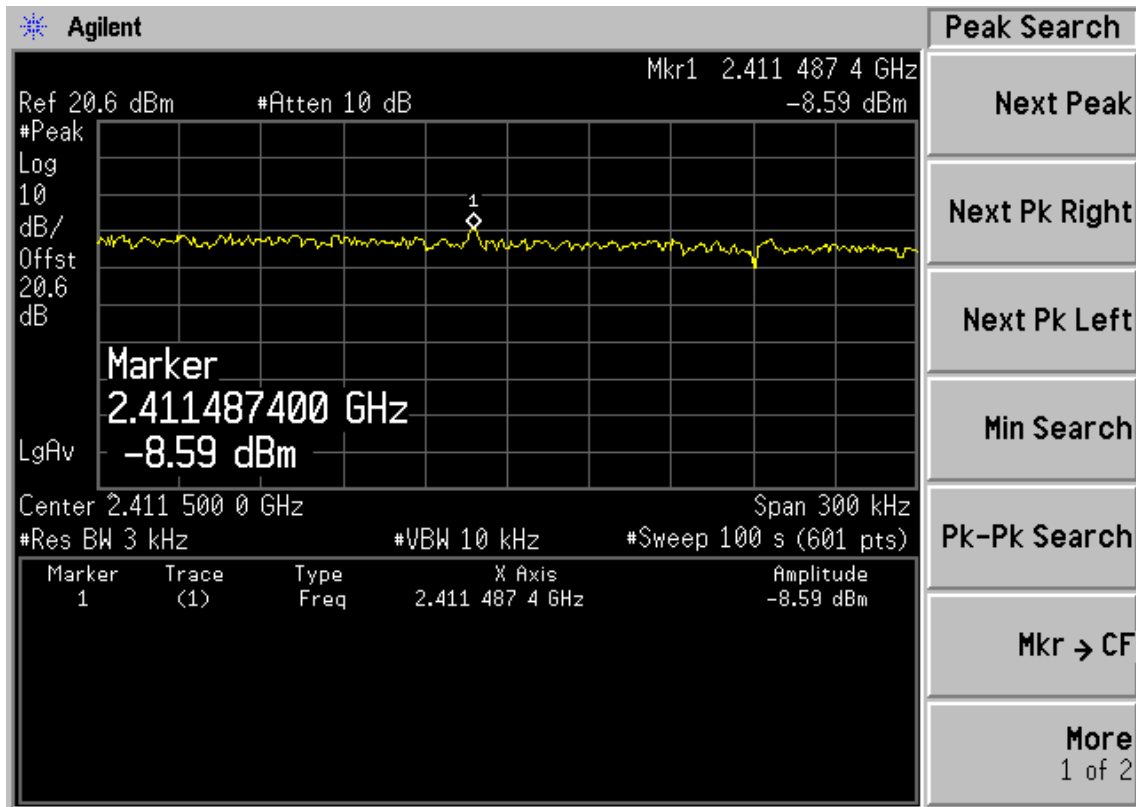


Copyright 2000-2005 Agilent Technologies


Test Mode: IEEE 802.11g TX

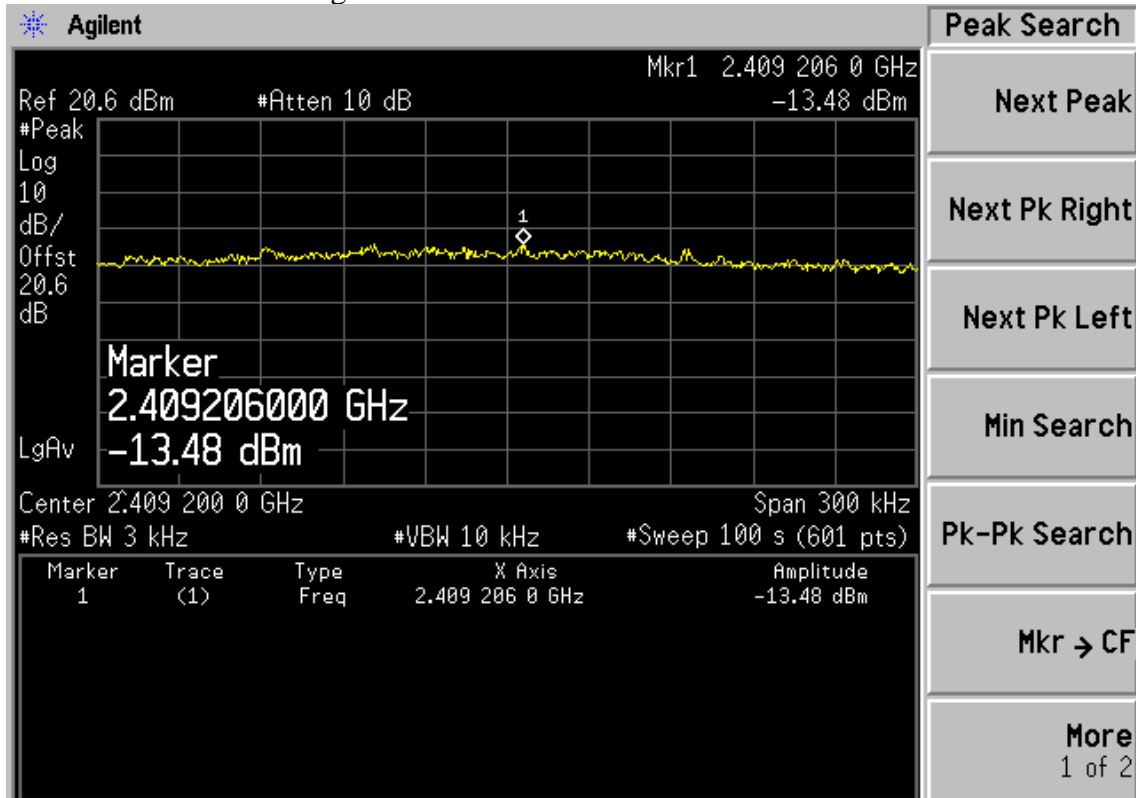


Copyright 2000-2005 Agilent Technologies

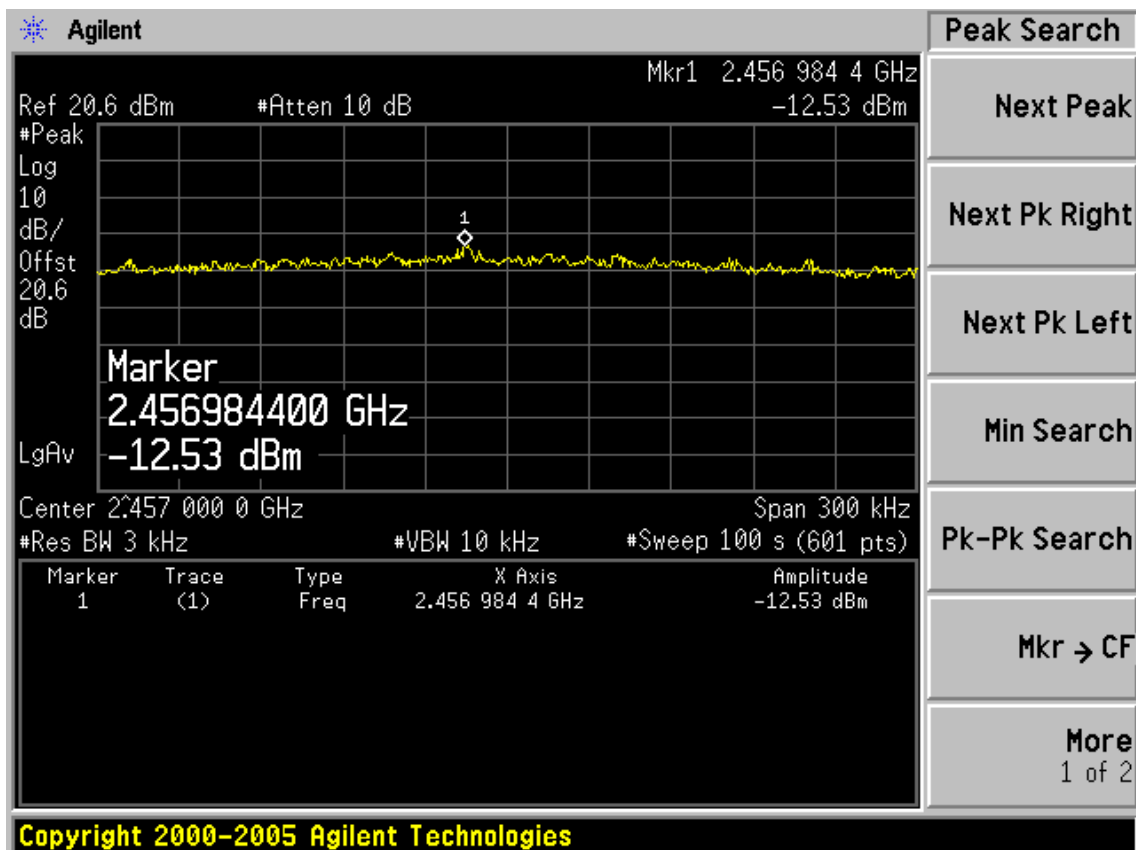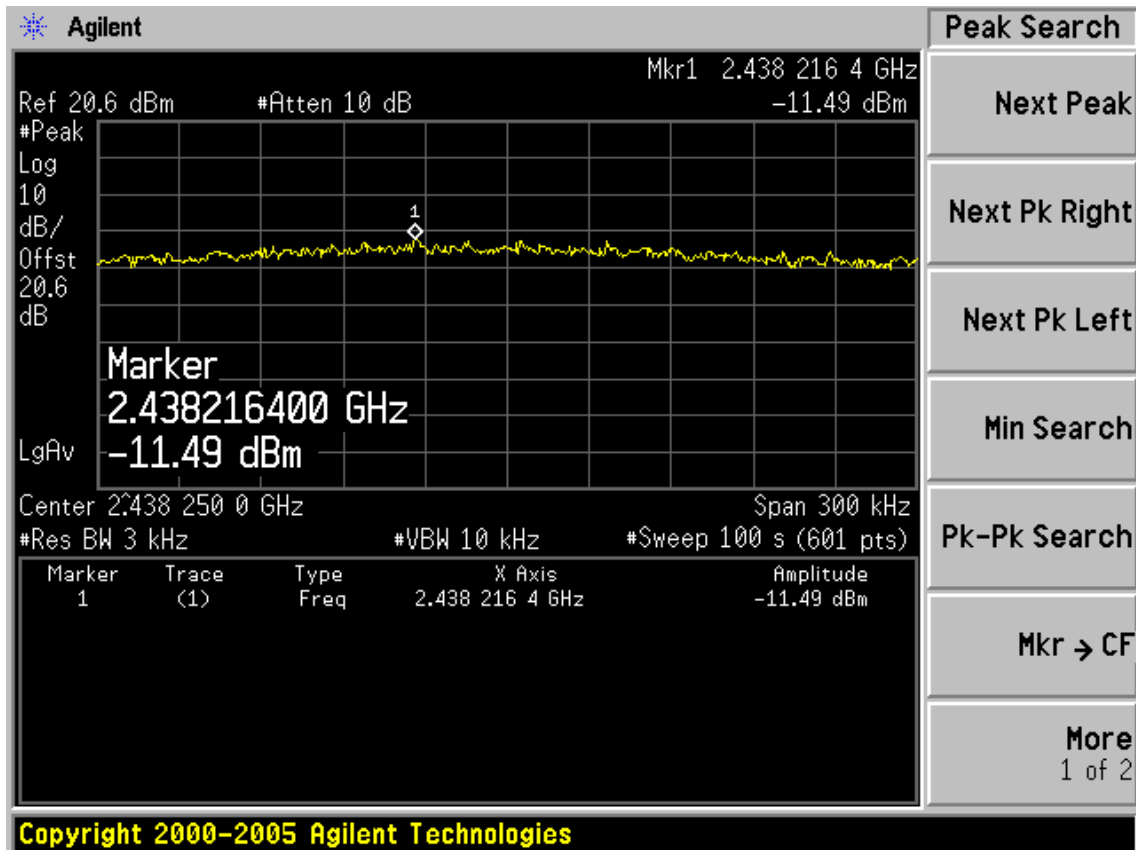


Test Mode: IEEE 802.11n HT20TX

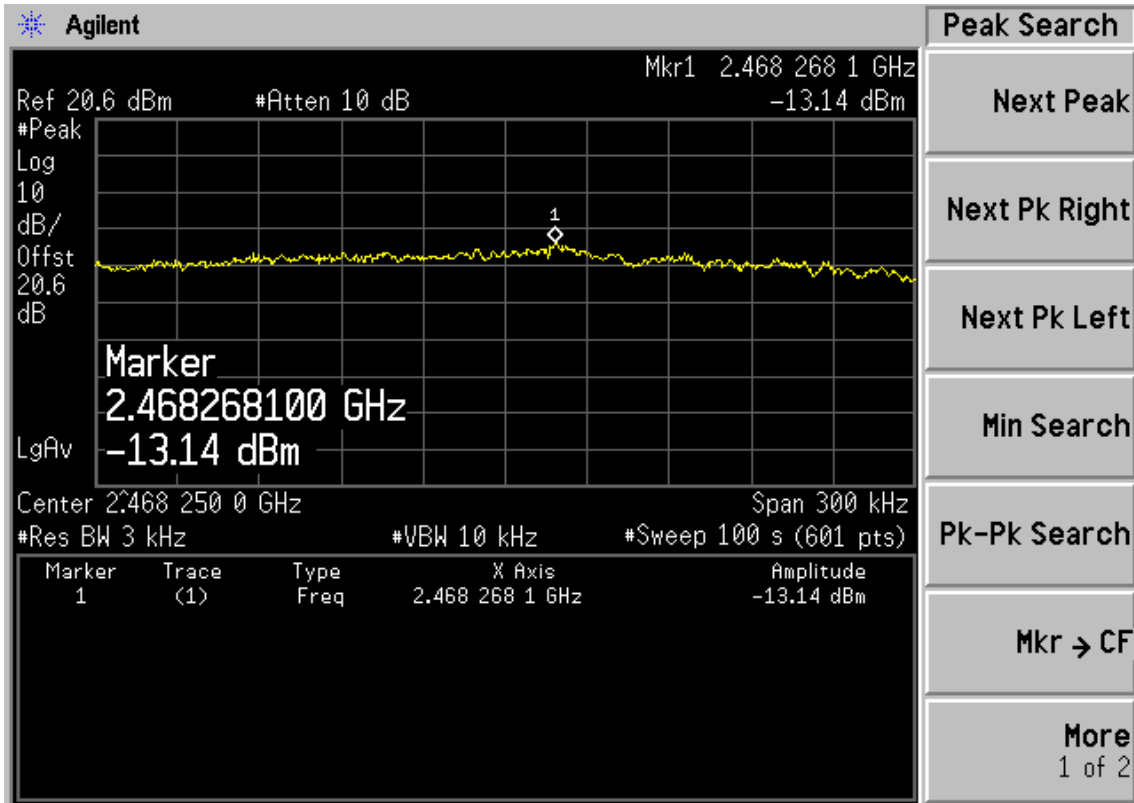

Copyright 2000-2005 Agilent Technologies

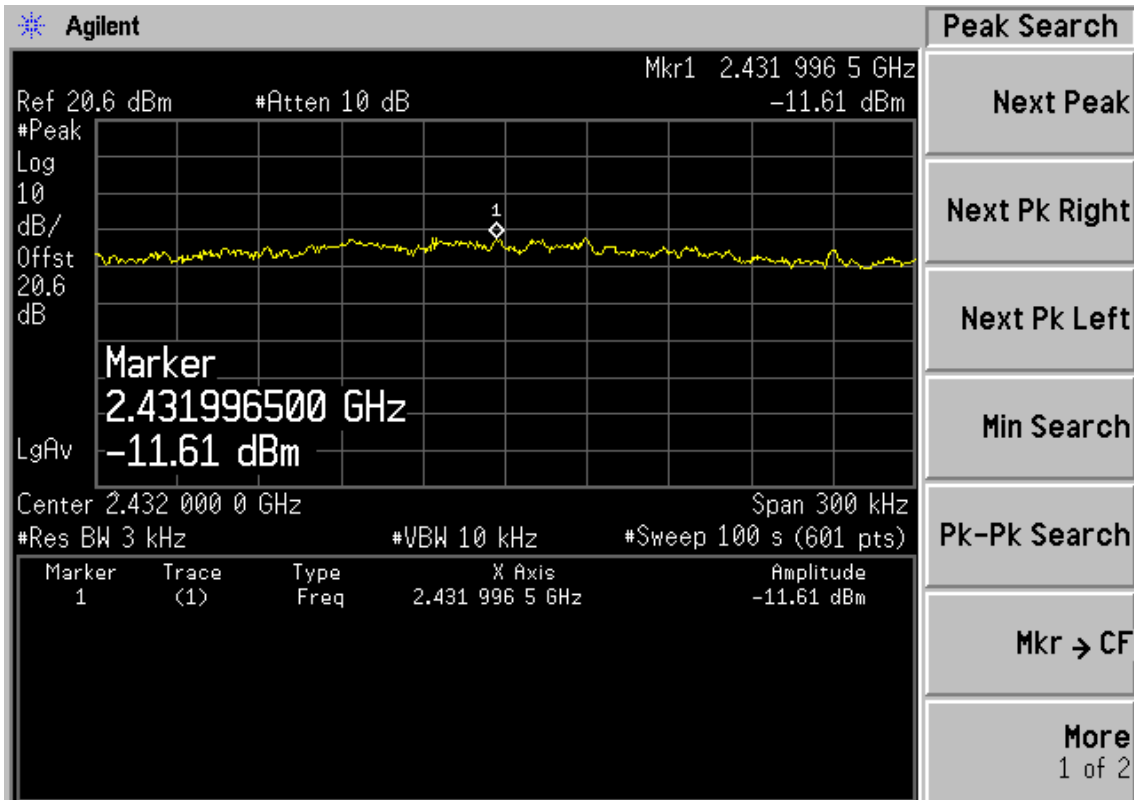


Copyright 2000-2005 Agilent Technologies


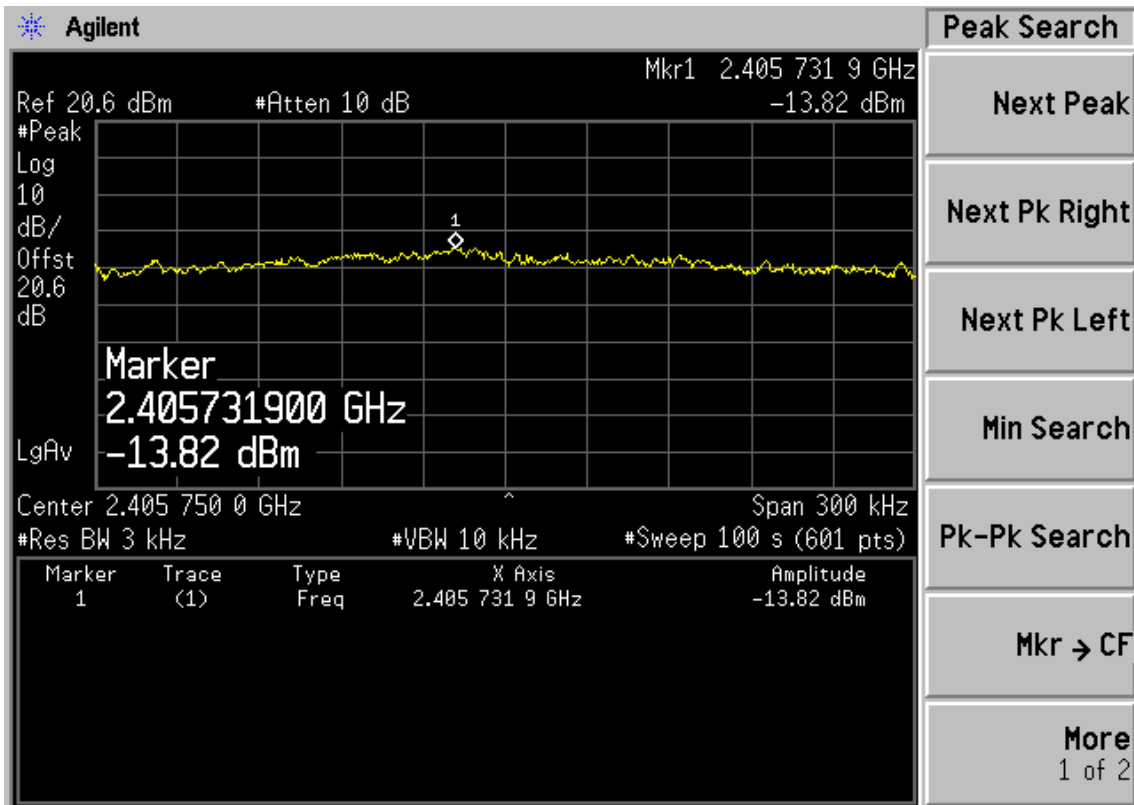


Copyright 2000-2005 Agilent Technologies

Test Mode: IEEE 802.11n HT20TX

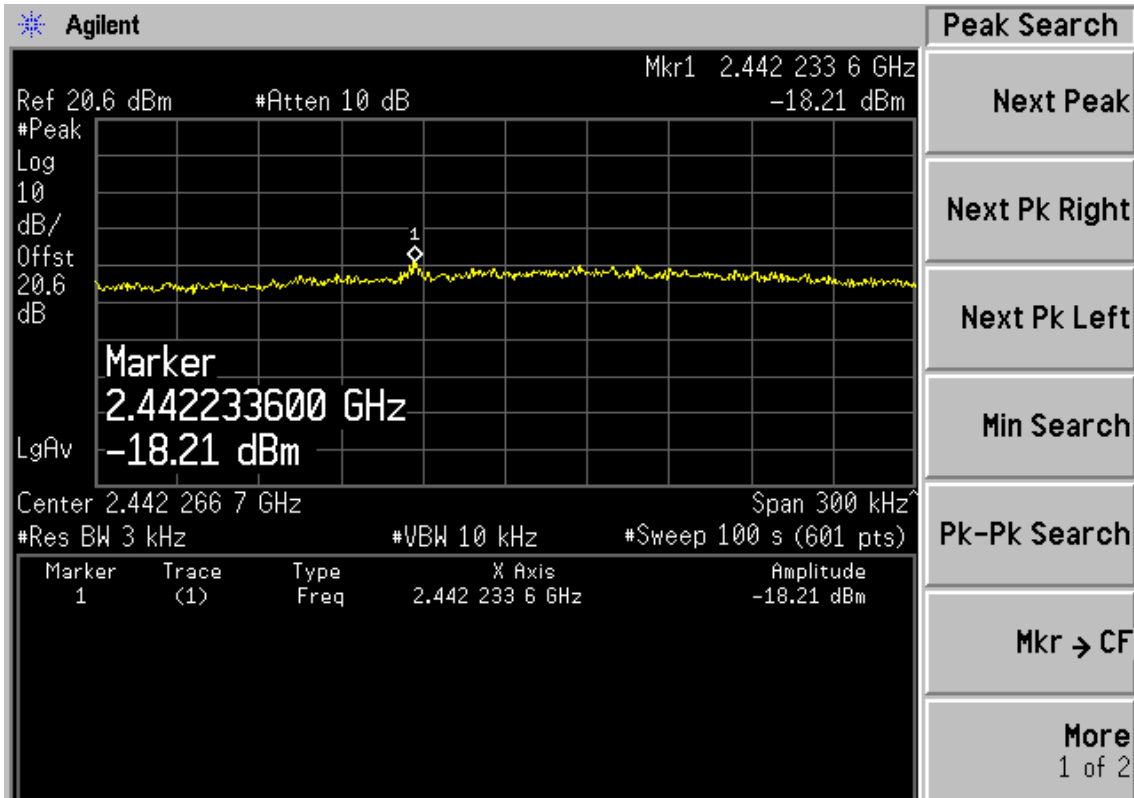

Copyright 2000-2005 Agilent Technologies

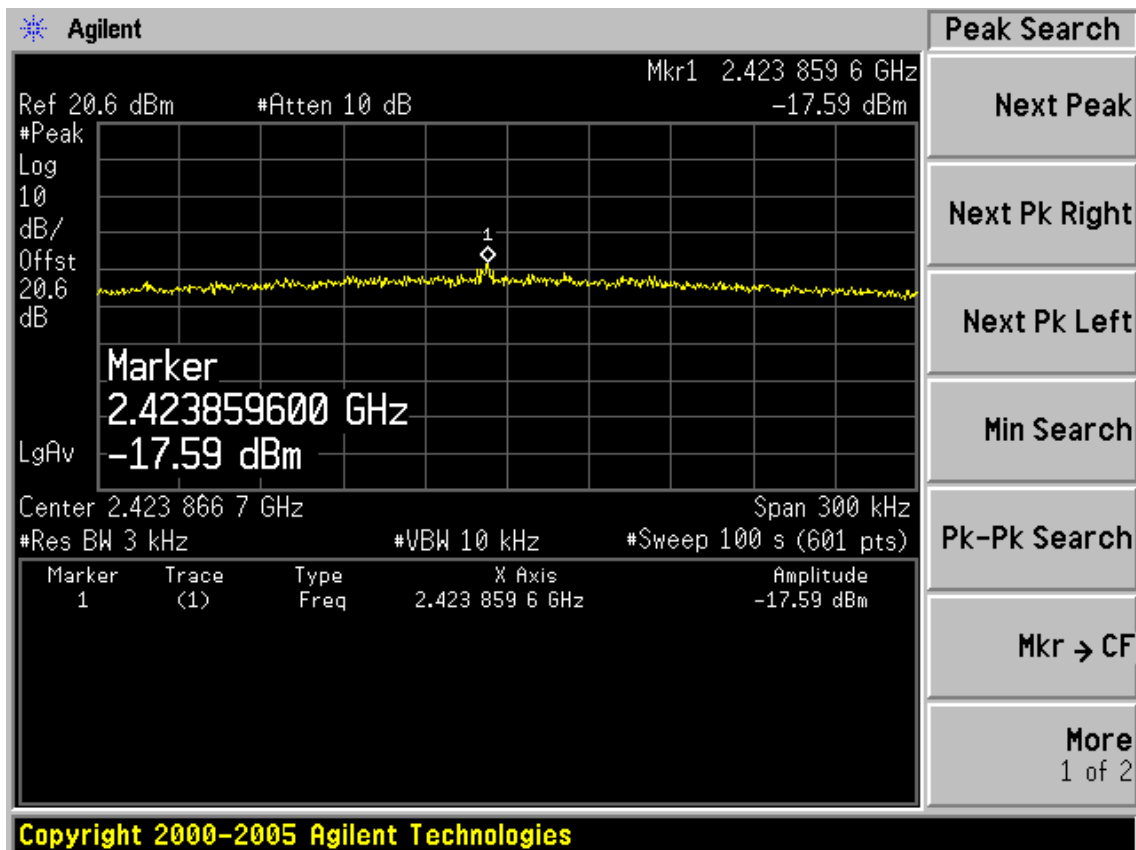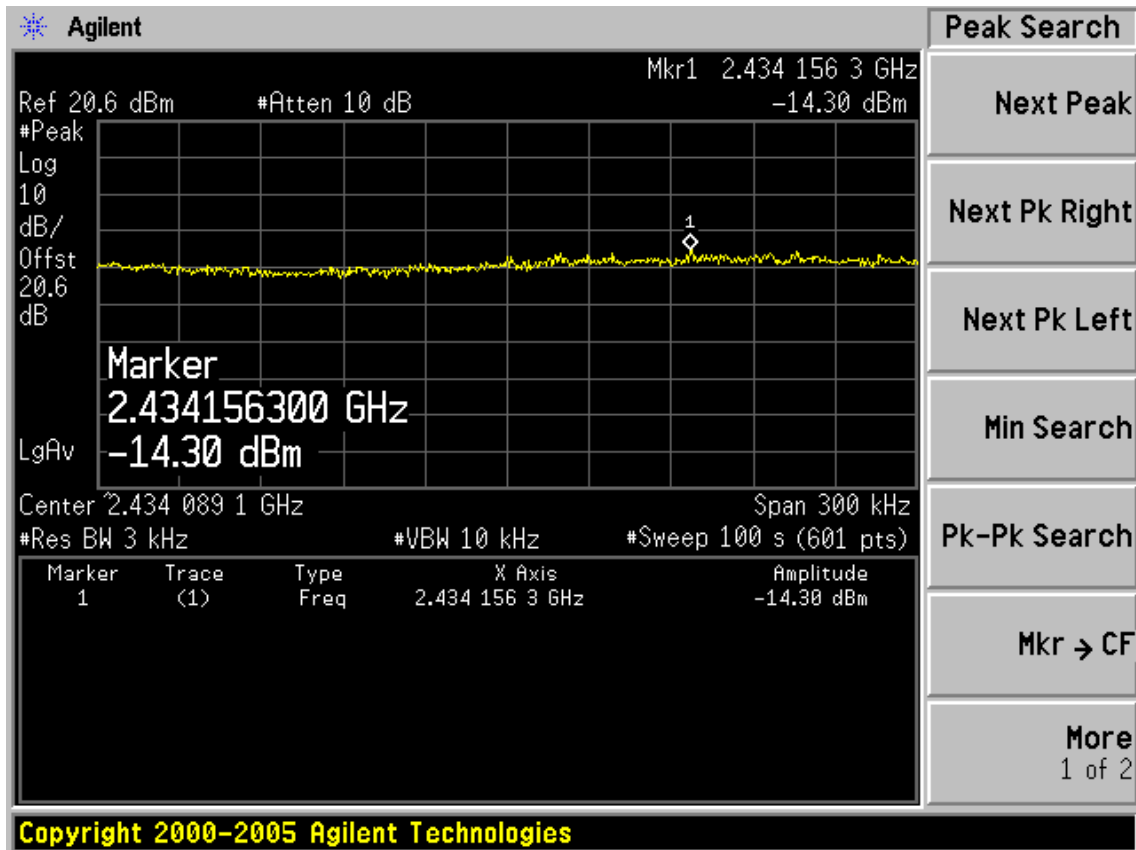



## **10. ANTENNA REQUIREMENT**

### **10.1. STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **10.2. ANTENNA CONNECTED CONSTRUCTION**

The antennas used for this product are MIMO 2X2 dipole antenna with SMA-B connector that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 5dBi.

## 11.MPE ESTIMATION

### 11.1.Limit for General Population/ Uncontrolled Exposures

Frequency	Power density (mW/ cm <sup>2</sup> )	Averaging time(minutes)
300MHz----1.5GHz	F/1500	30
1.5GHz---100GHz	1.0	30

Frequency(MHz)	Power density (mW/ cm <sup>2</sup> )	Averaging time(minutes)
2412	1	30
2437	1	30
2462	1	30

Note: F= Frequency in MHz

### 11.2.2, Estimation Result

Mode	CH	Frequency (MHz)	PK Output power (dBm)	Output power (mW)	Antenna Gain (dBi)	Antenna Gain(linear)	MPE
11b	1	2412	23.13	205.59	5	3.16	0.1294
	6	2437	23.26	211.84	5	3.16	0.1333
	11	2462	23.00	199.53	5	3.16	0.1256
11g	1	2412	23.54	225.94	5	3.16	0.1422
	6	2437	25.37	344.35	5	3.16	0.2167
	11	2462	23.08	203.24	5	3.16	0.1279
11n HT20	1	2412	22.79	190.11	5	3.16	0.1197
	6	2437	25.22	332.66	5	3.16	0.2094
	11	2462	23.07	202.77	5	3.16	0.1276
11n HT40	1	2422	20.63	115.61	5	3.16	0.0728
	4	2437	24.93	311.17	5	3.16	0.1959
	7	2452	20.31	107.40	5	3.16	0.0676

Note: The estimation distance is 20cm

## 12. DEVIATION TO TEST SPECIFICATIONS

[ NONE ]