



ELECTRONIC BALLAST 400W

Model - ISE-400-DLN

INPUT VOLTAGE - 120V - 240V - 50/60Hz
MAX INPUT CURRENT - 3.5A - 1.8A
INPUT WATTS - 400W
ONE BULB - 400W HPS or MH
OPEN CIRCUIT VOLTAGE - < 300Vrms
PEAK VOLTAGE - < 4.5kV
THD - < 8%
SOUND RATING - A

THERMALLY PROTECTED <RESET POWER TO RESTORE OUTPUT>
MINIMUM STARTING TEMPERATURE - 30°C / - 20°F
HIGH POWER FACTOR
MAXIMUM CASE TEMPERATURE 85 C
IF THE LAMP DOES NOT IGNITE BALLAST OUTPUT WILL SHUT
DOWN IN 20 MINUTES

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference, and
(2) this device must accept any interference received,
including interference that may cause undesired operation.




WARNING

RISK of ELECTRIC SHOCK

TURN POWER OFF BEFORE
INSTALLING OR REPLACING
PROPERLY GROUND BALLAST
AND FUTURE

WIRING DIAGRAM

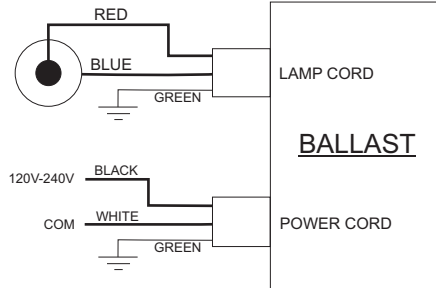

FCC ID: WWNISE-400-DLN



229089

US