



FCC TEST REPORT

for

Razer Charging Dock
MODEL: RC30-001202
Brand Name: RAZER

Test Report Number:
SZ081204B02-RP

Issued for

RAZER (ASIA-PACIFIC) PTE LTD
514 Chai Chee Lane #07-01~06, Singapore 469029

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
(aka Compliance Engineering Service (China))
NO. 5, JINAO INDUSTRIAL PARK, NO. 35 JUKENG ROAD,
DASHUIKENG VILLAGE, GUANLAN TOWN, BAOAN
DISTRICT, SHENZHEN, CHINA, 518102
TEL: 86-755-28055000
FAX: 86-755-28055221

Issued Date: December 18, 2008



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	December 18, 2008	Initial Issue	ALL	Clinton Kao

**TABLE OF CONTENTS**

1 TEST CERTIFICATION	4
2 EUT DESCRIPTION.....	5
3 TEST METHODOLOGY.....	6
3.1. DESCRIPTION OF TEST MODES	6
4 TEST METHODOLOGY.....	7
4.1. EUT EXERCISE.....	7
4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
5 INSTRUMENT CALIBRATION	8
6 SETUP OF EQUIPMENT UNDER TEST	8
6.1. DESCRIPTION OF SUPPORT UNITS.....	8
6.2. CONFIGURATION OF SYSTEM UNDER TEST	8
7 FACILITIES AND ACCREDITATIONS	9
7.1. FACILITIES	9
7.2. ACCREDITATIONS	9
7.3. MEASUREMENT UNCERTAINTY	9
8 FCC PART 15.249 REQUIREMENTS	10
8.1. 20dB bandwidth	10
8.2. BAND EDGES MEASUREMENT	13
8.3. POWER LINE CONDUCTED EMISSIONS MEASUREMENT	19
8.4. SPURIOUS EMISSIONS MEASUREMENT.....	23



1 TEST CERTIFICATION

Product: Razer Charging Dock

Model: RC30-001202

Brand: RAZER

Tested: December 04-18, 2008

Applicant: RAZER (ASIA-PACIFIC) PTE LTD
514 Chai Chee Lane #07-01~06, Singapore 469029

Manufacturer: Razer Technology and Development (Shenzhen) Co., Ltd.
East Wing, 3rd Floor, Block 2, Phase1 of Vision Shenzhen Business Park Keji South
Road, Shenzhen Hi Tech Industrial Park, Shenzhen 518057, China

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
DEVIATION FROM APPLICABLE STANDARD	
None	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.249.

The test results of this report relate only to the tested sample EUT identified in this report.

Clinton Kao
Approved by:

Vincent Yao
Reviewed by:

Clinton Kao
Manager
Compliance Certification Service Inc.

Vincent Yao
Assistant manager
Compliance Certification Service Inc.



2 EUT DESCRIPTION

Product	Razer Charging Dock
Brand Name	RAZER
Model Number	RC30-001202
Model Discrepancy	N/A
Serial Number	N/A
Power Supply	DC5V supplied by the Notebook
Frequency Range	2402-2480MHz
Transmit Power	83.16 dBuV/m (Max.)
Modulation Technique	GFSK
Number of Channels	79 Channel
Antenna Specification	Ceramic antenna with 2.50 dBi gain(Max)

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: WX9RC30001202 filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and powerline conducted emission below 30MHz, which worst case was in normal link mode with charging only.

Channel Low (2402MHz), Channel Mid (2441MHz) and Channel High (2480MHz) were chosen for the final testing.



4 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2003 and FCC CFR 15.207, 15.209 and 15.249.

4.1. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

4.2. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6 SETUP OF EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Notebook	2672	992F2VG	DoC	IBM	N/A	Unshielded, 1.80m
2	Razer Mamba Wireless Laser Gaming Mouse	RC30-001201	N/A	WX9RC30001201	RAZER	N/A	N/A

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



7 FACILITIES AND ACCREDITATIONS

7.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 5, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.4:2003, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI
Canada	INDUSTRY CANADA
Taiwan	BSMI

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsemc.com.tw>

7.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETR 028:

Measurement	Frequency		Uncertainty
Conducted emissions	9kHz~30MHz		± 3.5863
Radiated emissions	Horizontal	30MHz ~ 200MHz	± 4.7685
		200MHz ~1000MHz	± 4.9330
	Vertical	30MHz ~ 200MHz	± 5.0411
		200MHz ~1000MHz	± 4.9262

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



8 FCC PART 15.249 REQUIREMENTS

8.1. 20dB bandwidth

LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION


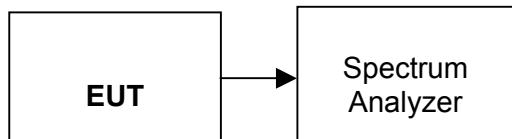


TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Span=25MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.


TEST RESULTS

No non-compliance noted

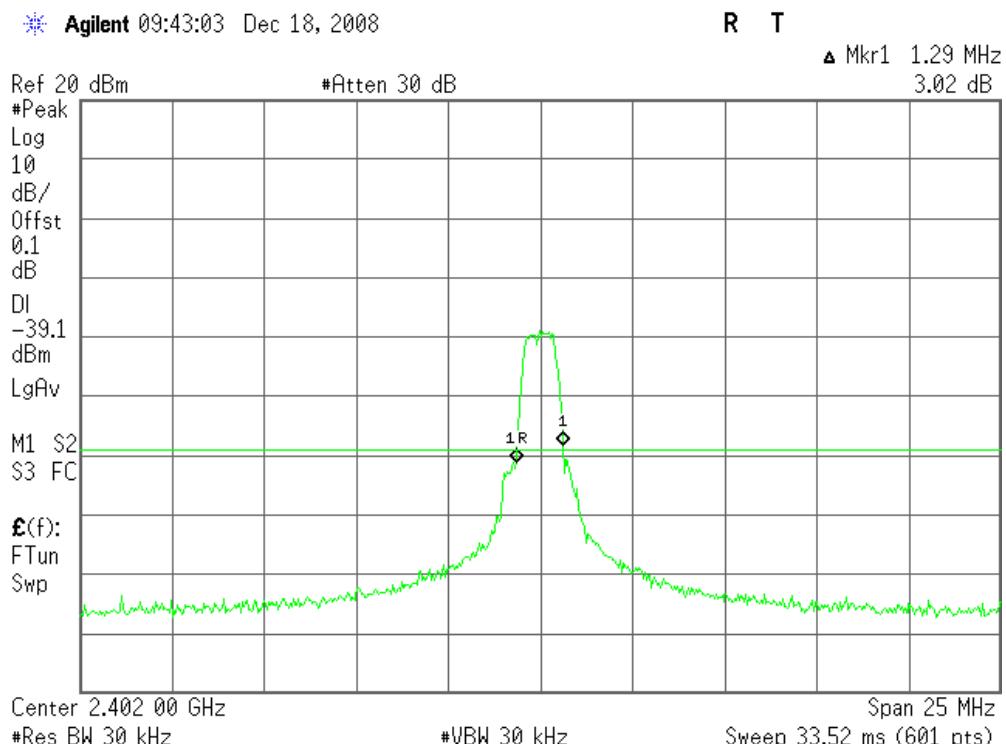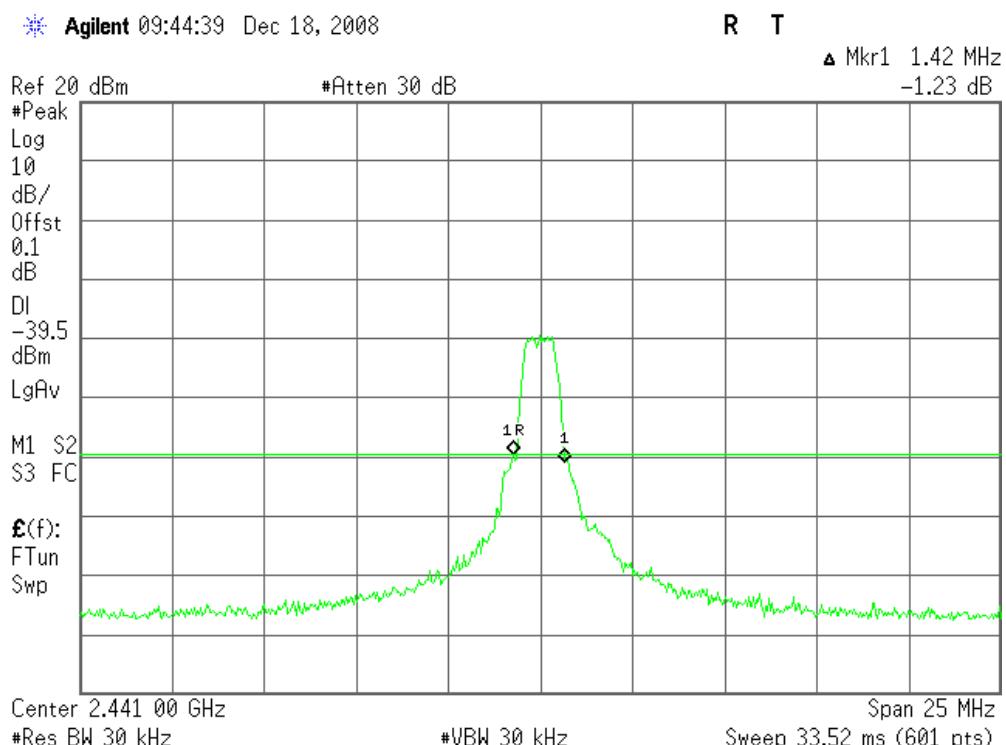Test Plot**20dB Bandwidth (CH Low)****20dB Bandwidth (CH Mid)**



20dB Bandwidth (CH High)

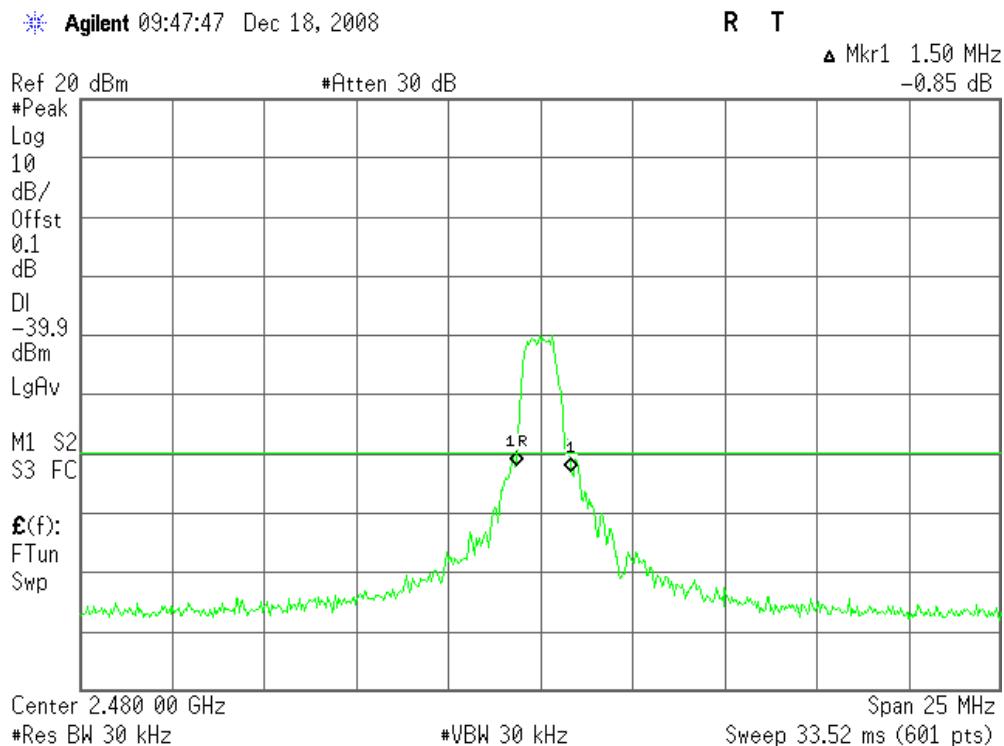



8.2. BAND EDGES MEASUREMENT

LIMIT

1. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.
3. As shown in Section 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2009
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/14/2009
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2009
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
High Noise Amplifier	Agilent	89842	N/A	06/09/2009
Site NSA	C&C	N/A	N/A	06/09/2009
Horn Antenna	TRC	N/A	N/A	03/04/2009
Signal Generator	Anritsu	MG3694A	#050125	02/24/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION

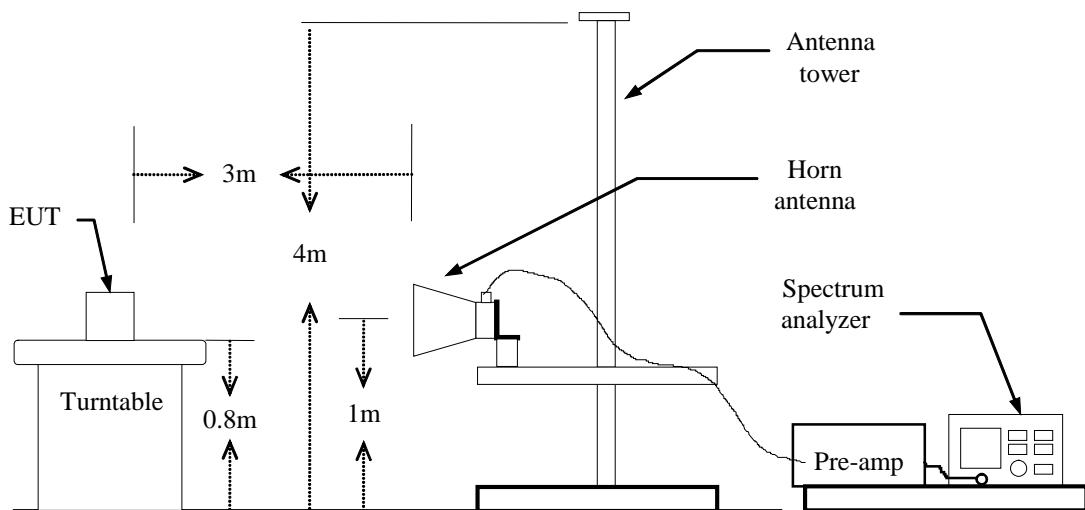

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Data

Band Edges (CH-Low)


Detector mode: Peak

Polarity: Vertical

* Agilent 15:33:00 Dec 4, 2008

R T

Mkr1 2.390 0 GHz
55.44 dB μ V

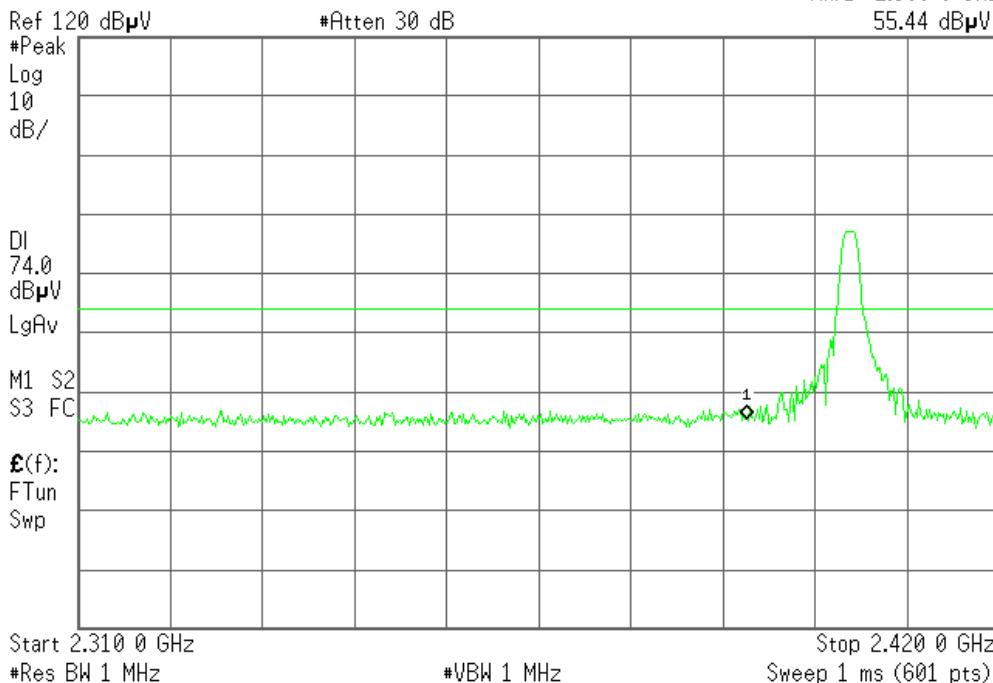


Detector mode: Average

Polarity: Vertical

* Agilent 15:33:45 Dec 4, 2008

R T

Mkr1 2.390 0 GHz
46.49 dB μ V

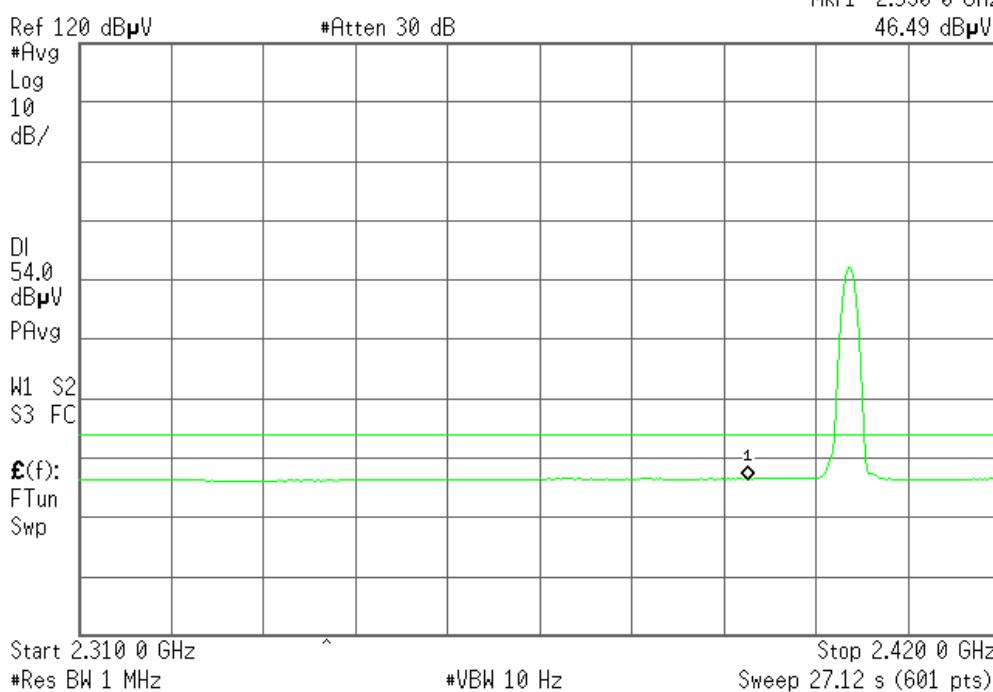

**Detector mode: Peak****Polarity: Horizontal**

* Agilent 15:36:35 Dec 4, 2008

Ref 120 dB μ V

#Atten 30 dB

R T

Mkr1 2.390 0 GHz

55.79 dB μ V

Log
10
dB/

DI
74.0
dB μ V

LgAv

M1 S2
S3 FC

$\mathfrak{f}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.420 0 GHz

Sweep 1 ms (601 pts)

Detector mode: Average**Polarity: Horizontal**

* Agilent 15:37:25 Dec 4, 2008

Ref 120 dB μ V
#Avg
Log
10
dB/

#Atten 30 dB

R T

Mkr1 2.390 0 GHz

46.50 dB μ V

DI
54.0
dB μ V
PAvg

W1 S2
S3 FC

$\mathfrak{f}(f)$:
FTun
Swp

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.420 0 GHz

Sweep 27.12 s (601 pts)



Band Edges (CH-High)

Detector mode: Peak

Polarity: Vertical

* Agilent 15:26:29 Dec 4, 2008

R T

Mkr1 2.483 50 GHz
60.24 dB μ V

Ref 120 dB μ V

#Atten 30 dB

#Peak
Log
10
dB/

DI
74.0
dB μ V

LgAv

M1 S2
S3 FC

$E(f)$:
FTun
Swp

Start 2.450 00 GHz
#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz
Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

* Agilent 15:27:14 Dec 4, 2008

R T

Mkr1 2.483 50 GHz
46.60 dB μ V

Ref 120 dB μ V

#Avg
Log
10
dB/

DI
54.0
dB μ V

PAvg



W1 S2
S3 FC

$E(f)$:
FTun
Swp

Start 2.450 00 GHz
#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz
Sweep 12.33 s (601 pts)

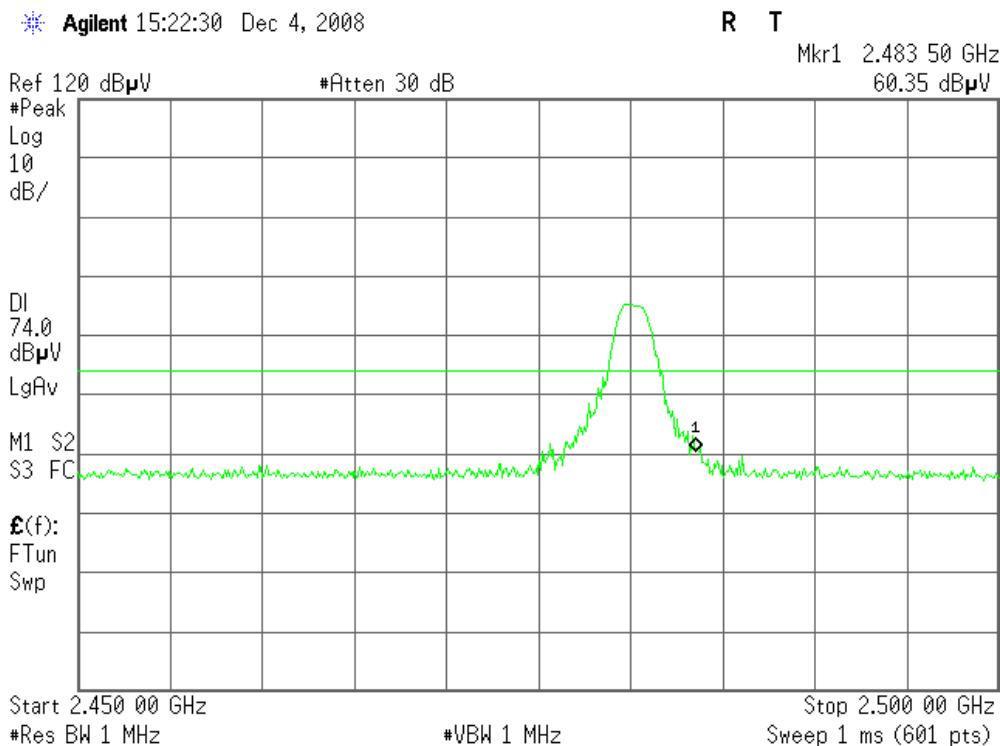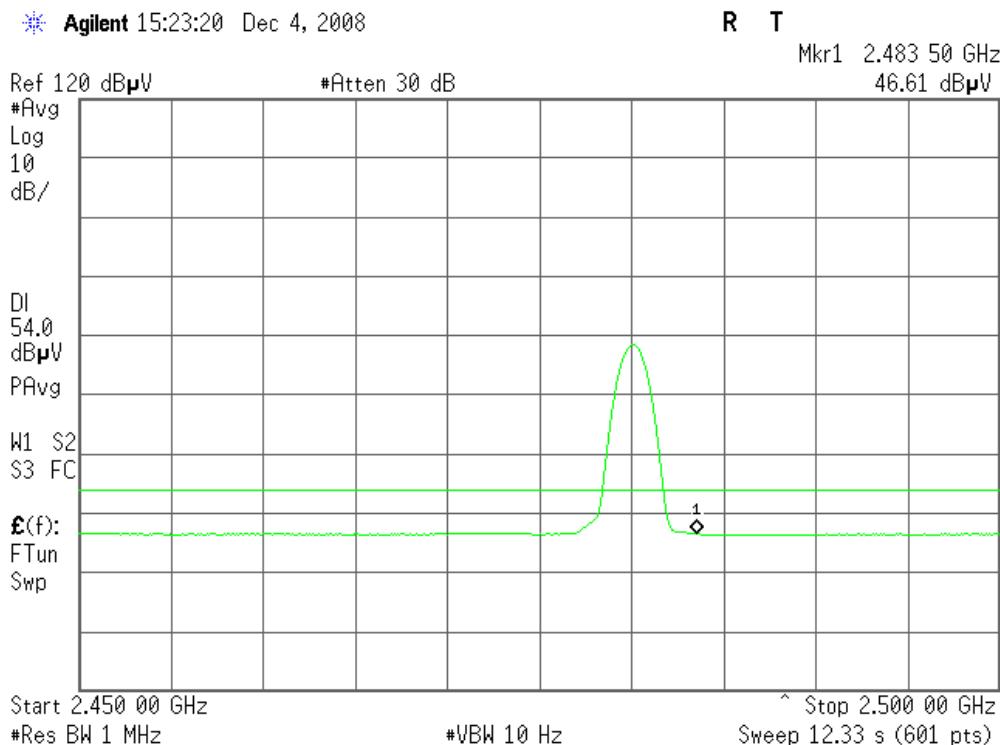**Detector mode: Peak****Polarity: Horizontal****Detector mode: Average****Polarity: Horizontal**



8.3. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

8.3.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

TEST INSTRUMENTS

Conducted Emission Test Site G				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESCI EMI TEST RECEIV.ESCI	ROHDE&SCHWARZ	1166.5950 03	100088	02/24/2009
LISN	EMCO	3825/2	1371	02/24/2009
LISN	EMCO	3825/2	8901-1459	02/24/2009

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. N.C.R = No Calibration Request.



8.3.2. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

8.3.3. TEST SETUP

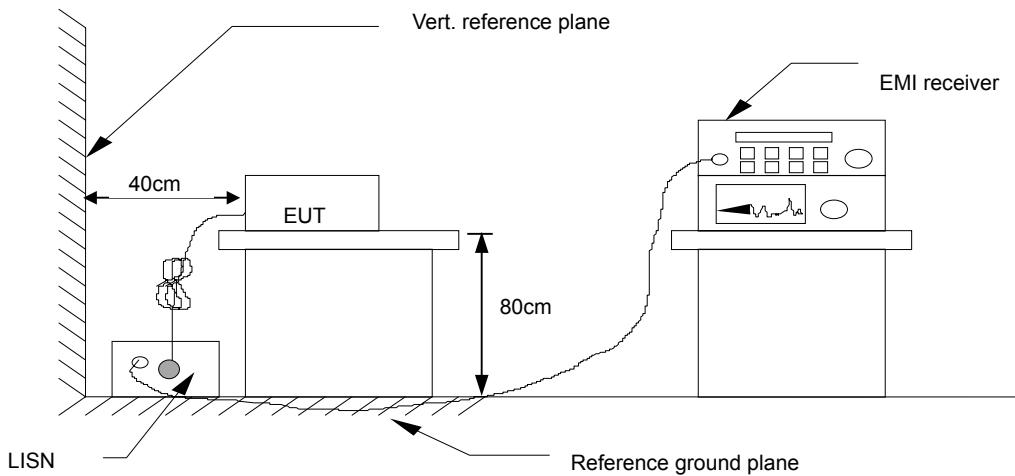

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

8.3.4. Data Sample:

Freq. (MHz)	Q.P. Raw (dBuV)	Average Raw (dBuV)	Q.P. Limit (dBuV)	Average Limit (dBuV)	Q.P. Margin (dB)	Average Margin (dB)	Note
x.xx	43.95	33.00	56.00	46.00	-12.05	-13.00	L1

Frequency (MHz) = Emission frequency in MHz
Reading (dBuV) = Uncorrected Analyzer/Receiver reading
Correction factor (dB) = Insertion loss of LISN
Limit (dBuV) = Limit stated in standard
Margin (dB) = Reading (dBuV) – Limit (dBuV)
Note = Current carrying line of reading



8.3.5. TEST RESULTS

Test No.	RC30-001202	Test Mode	Normal Link
Environmental Conditions	27deg.C, 56% RH, 992 hPa	6dB BANDWIDTH	9 kHz
Tested by:	Simple Guan		

FREQ MHz	PEAK dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.153	56.13	48.42	41.73	65.89	55.89	-17.47	-14.16	L1
0.201	50.03	---	---	64.52	54.52	---	-4.49	L1
0.238	46.44	---	---	63.46	53.46	---	-7.02	L1
0.561	30.67	---	---	56.00	46.00	---	-15.33	L1
3.114	27.66	---	---	56.00	46.00	---	-18.34	L1
5.478	28.76	---	---	60.00	50.00	---	-21.24	L1
0.183	52.14	---	---	65.05	55.05	---	-2.91	L2
0.231	47.47	---	---	63.67	53.67	---	-6.20	L2
0.398	35.90	---	---	58.90	48.90	---	-13.00	L2
1.295	29.16	---	---	56.00	46.00	---	-16.84	L2
3.146	28.43	---	---	56.00	46.00	---	-17.57	L2
4.917	27.06	---	---	56.00	46.00	---	-18.94	L2

REMARKS: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



8.4. SPURIOUS EMISSIONS MEASUREMENT

8.4.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT

1. In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μ V/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54



8.4.2. TEST INSTRUMENTS

966 RF CHAMBER 2				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2009
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2009
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/14/2009
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2009
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
High Noise Amplifier	Agilent	89842	N/A	06/09/2009
Site NSA	C&C	N/A	N/A	06/09/2009
Horn Antenna	TRC	N/A	N/A	03/04/2009
Signal Generator	Anritsu	MG3694A	#050125	02/24/2009

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

4. N.C.R = No Calibration Required.

8.3.3 TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.

8.4.2.1. TEST SETUP

Below 1 GHz

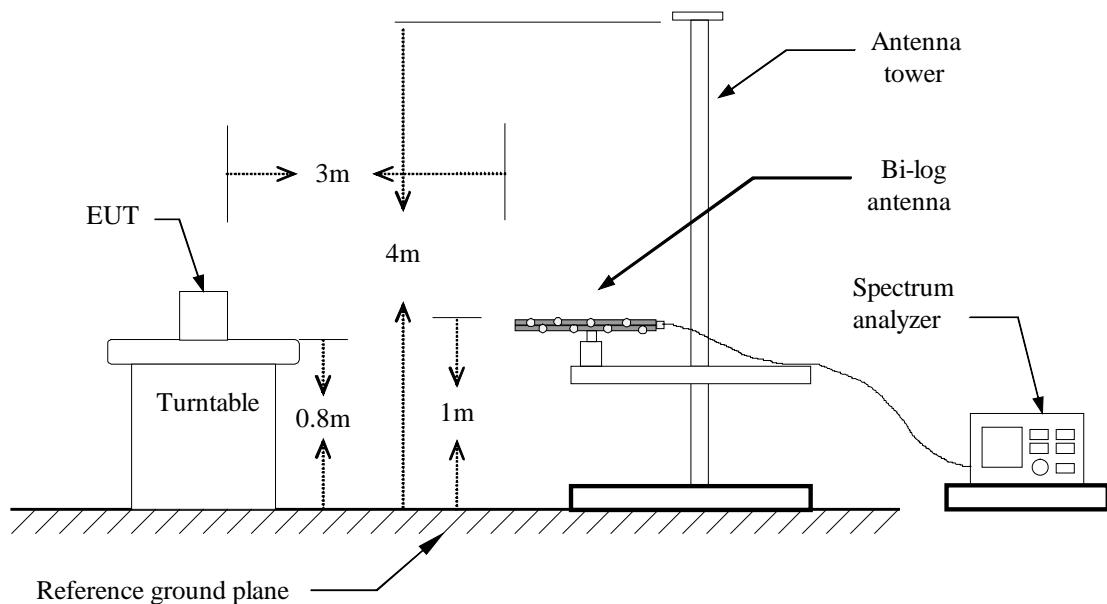

Above 1 GHz

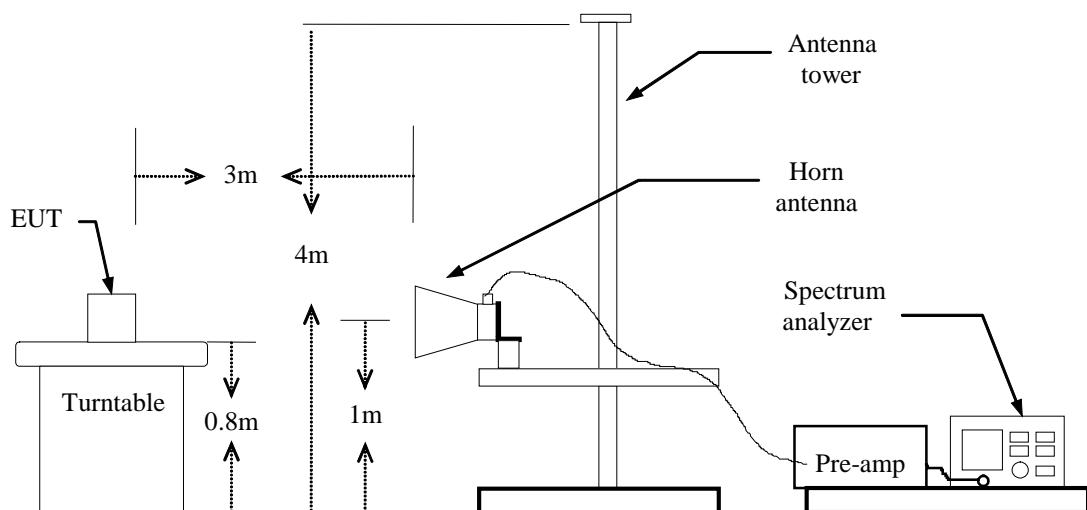

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**8.4.2.2. Data Sample:****Below 1 GHz**

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Remark) (dBuV)	Correction Factor (dB/m)	Result (Remark) (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (dB)	Remark
xxx	V	12.12	10.21	22.33	40.00	-17.67	Peak

Above 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
xxx	V	65.45	63.00	-11.12	54.33	51.88	74.00	54.00	-2.12	AVG

Frequency (MHz)	= Emission frequency in MHz
Ant.Pol. (H/V)	= Antenna polarization
Reading (dBuV)	= Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m)	= Reading (dBuV) + Correction Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Remark Result (dBuV/m) – Limit (dBuV/m)
Peak	= Peak Reading
QP	= Quasi-peak Reading
AVG	= Average Reading



8.4.2.3. TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link **Test Date:** December 08, 2008
Temperature: 27°C **Tested by:** Simple Guan
Humidity: 56 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol.	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
40.280	V	Q	53.48	-27.00	26.48	40.00	-13.52
96.012	V	Q	56.79	-27.06	29.73	43.50	-13.77
121.984	V	Q	54.56	-27.04	27.52	43.50	-15.98
142.004	V	Q	55.70	-27.02	28.68	43.50	-14.82
197.735	V	Q	49.24	-25.09	24.15	43.50	-19.35
216.132	V	Q	55.72	-24.63	31.09	46.00	-14.91
96.012	H	Q	53.37	-27.06	26.31	43.50	-17.19
144.168	H	Q	48.00	-26.95	21.05	43.50	-22.45
166.893	H	Q	49.40	-26.23	23.17	43.50	-20.33
240.481	H	Q	58.39	-24.04	34.35	46.00	-11.65
319.639	H	Q	58.51	-21.99	36.52	46.00	-9.48
335.070	H	Q	60.51	-21.77	38.74	46.00	-7.26

****Remark:** No emission found between lowest internal used/generated frequency to 30 MHz.

REMARKS:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / CH Low**Test Date:** December 08, 2008**Temperature:** 27°C**Tested by:** Simple Guan**Humidity:** 56% RH**Polarity:** Ver. / Hor.**Fundamental**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2402	V	87.04	78.00	-3.88	83.16	74.12	114	94	-30.84	-19.88
2402	H	86.18	79.51	-3.88	82.30	75.63	114	94	-31.70	-18.37

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1070.00	V	59.95	---	-11.79	48.16	---	74.00	54.00	-5.84	Peak
1196.66	V	61.22	---	-11.09	50.13	---	74.00	54.00	-3.87	Peak
1726.66	V	60.56	56.83	-7.62	52.94	49.21	74.00	54.00	-4.79	AVG.
3508.33	V	47.54	---	-0.93	46.61	---	74.00	54.00	-7.39	Peak
N/A										
1203.33	H	56.24	---	-11.05	45.19	---	74.00	54.00	-8.81	Peak
1410.00	H	56.12	---	-9.91	46.21	---	74.00	54.00	-7.79	Peak
1600.00	H	62.05	59.92	-8.63	53.42	51.29	74.00	54.00	-2.71	AVG.
3241.66	H	48.74	---	-2.52	46.22	---	74.00	54.00	-7.78	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH Mid

Test Date: December 08, 2008

Temperature: 27°C

Tested by: Simple Guan

Humidity: 56% RH

Polarity: Ver. / Hor.

Fundamental

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2441	V	86.87	77.38	-3.72	83.15	73.66	114	94	-30.85	-20.34
2441	H	86.29	74.57	-3.72	82.57	70.85	114	94	-31.43	-23.15

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1383.33	V	54.88	---	-10.06	44.82	---	74.00	54.00	-9.18	Peak
1546.66	V	55.04	---	-9.05	45.99	---	74.00	54.00	-8.01	Peak
3133.33	V	47.06	---	-1.79	45.27	---	74.00	54.00	-8.73	Peak
3391.66	V	47.24	---	-1.21	46.03	---	74.00	54.00	-7.97	Peak
N/A										
1170.00	H	56.48	---	-11.23	45.25	---	74.00	54.00	-8.75	Peak
1663.33	H	55.39	---	-8.13	47.26	---	74.00	54.00	-6.74	Peak
3091.66	H	47.58	---	-2.25	45.33	---	74.00	54.00	-8.67	Peak
3783.33	H	45.94	---	-0.35	45.59	---	74.00	54.00	-8.41	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / CH High

Test Date: December 08, 2008

Temperature: 27°C

Tested by: Simple Guan

Humidity: 56 % RH

Polarity: Ver. / Hor.

Fundamental

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2480	V	84.56	74.80	-3.56	81.00	71.24	114	94	-33.00	-22.76
2480	H	84.74	74.49	-3.56	81.18	70.93	114	94	-32.82	-23.07

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1273.33	V	56.97	---	-10.67	46.30	---	74.00	54.00	-7.70	Peak
1470.00	V	55.30	---	-9.58	45.72	---	74.00	54.00	-8.28	Peak
3341.66	V	46.84	---	-1.32	45.52	---	74.00	54.00	-8.48	Peak
3591.66	V	45.99	---	-0.49	45.50	---	74.00	54.00	-8.50	Peak
N/A										
1236.66	H	56.78	---	-10.87	45.91	---	74.00	54.00	-8.09	Peak
1353.33	H	54.92	---	-10.23	44.69	---	74.00	54.00	-9.31	Peak
3741.66	H	46.67	---	-0.73	45.94	---	74.00	54.00	-8.06	Peak
4283.33	H	46.27	---	1.92	48.19	---	74.00	54.00	-5.81	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).