

---

# FCC Test Report

---

<b>Report No:</b> WD-RF-R-220267-C0
-------------------------------------

**Product Name** : RFID Reader  
**Model Name** : AC908A-00  
**Series Model Name** : AC908A-F1020  
**FCC ID** : WXAAC908A  
**Applicant** : GIGA-TMS INC  
**Received Date** : Mar. 08, 2022  
**Tested Date** : Jul. 12, 2022 ~ Aug. 22, 2022  
**Applicable Standard** : 47 CFR FCC Part 15, Subpart C (Section 15.31)  
47 CFR FCC Part 2, Subpart J (Section 2.947(f))  
ANSI C63.10 : 2013



**Wendell Industrial Co., Ltd**  
**Wendell EMC & RF Laboratory**

**Caution:**

This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment.

Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Wendell Industrial Co., Ltd..

# Test Report

Issued Date: August 23, 2022

Project No.: 22Q030802

<b>Product Name</b>	RFID Reader
<b>Trade Name</b>	PROMAG, GIGATEK, ProxData
<b>Model Name</b>	AC908A-00
<b>Series Model Name</b>	AC908A-F1020
<b>FCC ID</b>	WXAAC908A
<b>Applicant</b>	GIGA-TMS INC
<b>Manufacturer</b>	GIGATEK INC.
<b>EUT Rated Voltage</b>	DC 9V ~ 24V
<b>EUT Test Voltage</b>	DC 12V
<b>EUT Supports Radios Application</b>	Bluetooth LE RFID 13.56MHz
<b>Applicable Standard</b>	47 CFR FCC Part 15, Subpart C (Section 15.31) 47 CFR FCC Part 2, Subpart J (Section 2.947(f)) ANSI C63.10 : 2013
<b>Test Result</b>	Complied

Documented :




( Specialist / Emma Lu )

Technical Engineer :



( Section Manager / Jack Chang )

Approved :

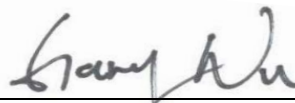

( Project Manager / Gary Wu )

## Table of Contents

<b>Document Revision History .....</b>	<b>4</b>
<b>Summary of Test Result.....</b>	<b>5</b>
<b>1 Generation Information .....</b>	<b>6</b>
<b>1.1 Applicant.....</b>	<b>6</b>
<b>1.2 Manufacturer.....</b>	<b>6</b>
<b>1.3 Description of Equipment under Test.....</b>	<b>6</b>
<b>1.4 Test Mode Applicability.....</b>	<b>7</b>
<b>1.5 Configuration of Tested System .....</b>	<b>8</b>
<b>1.6 EUT Exercise Software .....</b>	<b>8</b>
<b>1.7 Tested System Details.....</b>	<b>8</b>
<b>1.8 Test Facility .....</b>	<b>9</b>
<b>1.9 Measurement Uncertainty .....</b>	<b>10</b>
<b>1.10 List of Test Equipment.....</b>	<b>11</b>
<b>2 Test Result .....</b>	<b>13</b>
<b>2.1 Spurious Emission Measurement.....</b>	<b>13</b>
2.1.1 Limit .....	13
2.1.2 Test Setup.....	13
2.1.3 Test Procedure.....	15
2.1.4 Test Result of Radiated Spurious Emission Measurement .....	16
<b>2.2 AC Conducted Emissions Measurement.....</b>	<b>21</b>
2.2.1 Limit .....	21
2.2.2 Test Setup.....	21
2.2.3 Test Procedure.....	22
2.2.4 Test Result .....	23

## Document Revision History

Report No.	Issue date	Description
WD-RF-R-220267-C0	August 23, 2022	Initial report

## Summary of Test Result

<b>Ref. Std. Clause</b>	<b>Test Items</b>	<b>Result</b>
15.247(d)	Radiated Spurious Emission	Pass
15.207	AC Conducted Emission	N/A

# 1 Generation Information

## 1.1 Applicant

GIGA-TMS INC  
 8F. NO.31, Lane 169, Kang-Ning St., His-Chih, New Taipei City 22180, Taiwan, R.O.C

## 1.2 Manufacturer

GIGATEK INC.  
 NO.47, Hsiang Ho Road, Tantzú Dist., Taichung City 42741, Taiwan R.O.C.

## 1.3 Description of Equipment under Test

<b>Product Name</b>	RFID Reader
<b>Model No.</b>	AC908A-00
<b>Series Model Name</b>	AC908A-F1020
<b>Model Difference</b>	Trademark differences
<b>FCC ID</b>	WXAAC908A
<b>Frequency Range</b>	Bluetooth LE 2402 ~ 2480 MHz RFID 13.56 MHz
<b>Type of Modulation</b>	ASK
<b>Antenna Information</b>	Refer to the table "Antenna List"
<b>EUT Supports Radios Application</b>	Bluetooth LE RFID 13.56MHz
<b>EUT Rated Voltage</b>	DC 9V ~ 24V
<b>EUT Test Voltage</b>	DC 12V

### Antenna List

	<b>Manufacturer</b>	<b>Model No.</b>	<b>Antenna Type</b>	<b>Peak Gain</b>
1	ACX	AT7020-E3R0HBA	Multilayer Chip Antenna	1.3 dBi for 2.4GHz
2	N/A	N/A	Loop Antenna	N/A

## 1.4 Test Mode Applicability


1. These tests were performed on equipment samples to demonstrate compliance with the 15.31(k) chapter simultaneous launch requirements.
2. Select the combination of the highest power transmission mode, only the worst case is shown in the report.
3. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report.

### Test Mode

Mode 1: Bluetooth LE+RFID(13.56MHz)
-------------------------------------

## 1.5 Configuration of Tested System

Radiation

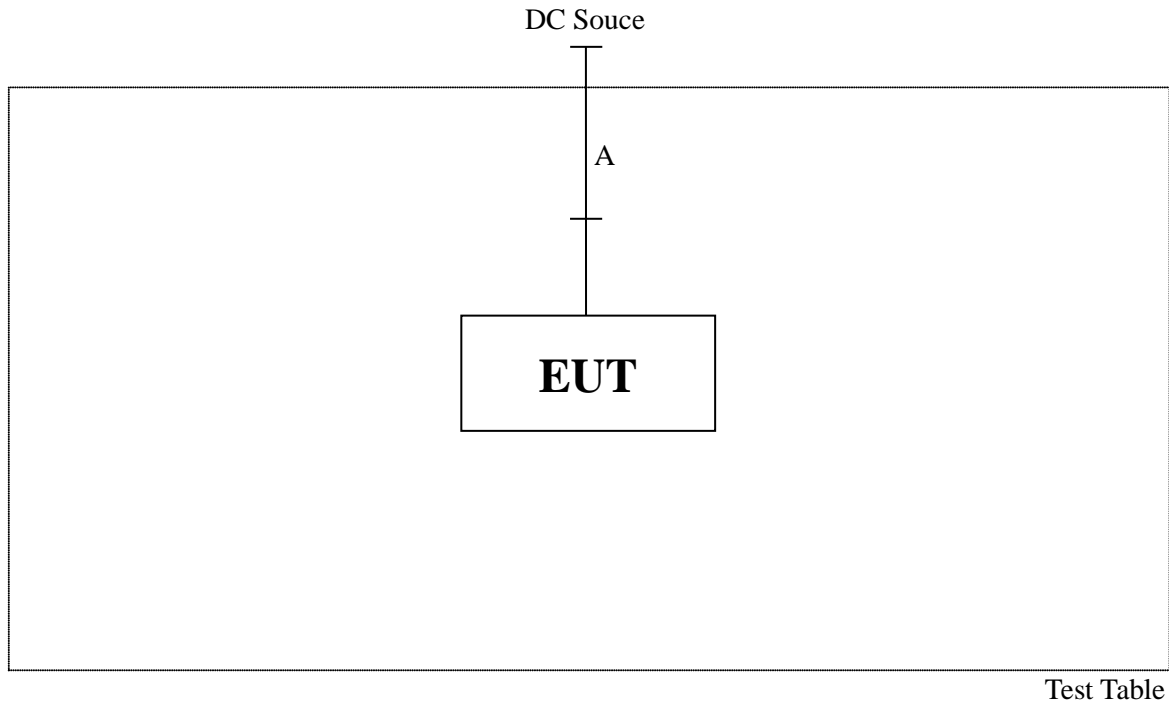

Test Table

## 1.6 EUT Exercise Software

1. Setup the EUT as shown in Section 1.6
2. Configure the test mode, the test channel, and the data rate.
3. Press “OK” to start the continuous transmit.
4. Verify that the EUT works properly.

## 1.7 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

No.	Signal Cable Type	Signal cable Description
A	Power Cable	Non-shielded, Non-Core, 1m



## 1.8 Test Facility

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	25
Humidity (% RH)	25-75	65
Barometric pressure (mbar)	860-1060	1001

**Description:** Accredited by TAF  
Accredited Number: 2965

**Issued by:** Wendell Industrial Co., Ltd

**Lab Address:** 6F/6F-1, No.188, Baoqiao Rd., Xindian Dist.,  
New Taipei City 23145, Taiwan R.O.C

**Test Lab:** Wendell EMC & RF Laboratory

**Test Location:** No.67-9, Shimen Rd., Tucheng Dist.,  
New Taipei City 236, Taiwan R.O.C

**Designation Number:** TW0025

**Test Firm Registration Number:** 665221

## 1.9 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence (level based on a coverage factor K=2)

Measurement Project	Condition	Expended Uncertainty
AC Conducted Emission	0.150 ~ 30 MHz	2.64 dB
Radiated Emission	0.009 ~ 30 MHz	± 4.2 dB
	30 ~ 1000 MHz	± 3.9 dB
	1000 ~ 18000 MHz	± 4.1 dB
	18000 ~ 40000 MHz	± 3.9 dB
RF Power, Conducted	Conducted Measuring	± 0.5 dB
Occupied Bandwidth	Conducted Measuring	± 2.4 %
Power Density	Conducted Measuring	± 1.7 dB
Duty Cycle and Dwell Time	Conducted Measuring	± 1.3 %
Conducted Unwanted Emission Strength	Conducted Measuring	± 1.8 dB
DC Power Supply	--	± 3.2 %
Temperature	--	± 1.1 °C
Humidity	--	± 3.4 %

**Note:** Please note that the measurement uncertainty are provided for informational purpose only and are not used in determining the Pass/Fail results.

## 1.10 List of Test Equipment

### For AC Conduction measurements / Conducted Room

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
EMI Test Receiver	R&S	ESR3	102309	2022/6/15	2023/6/14
2-Line V-Network LISN	R&S	ENV216	101185	2022/6/20	2023/6/19
LISN	SCHWARZBECK	NSLK 8127RC	05028	2022/6/20	2023/6/19
Transient Limiter	EM Electronics Corporation	EM-7600	857	2022/6/20	2023/6/19
50ohm Cable	EMCI	EMCCFD300-BM-BM-5000	170612	2022/6/17	2023/6/16
50 ohm terminal impedance	HUBER+SUHNER	50 ohm terminal impedance	CT-1-109-1	2022/6/17	2023/6/16

Remark:

1. All equipments are calibrated every one year.
2. The test instruments marked with “✓” are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.EMC-CON 3A1

**For Radiated measurements / 9x6x6 Semi Anechoic Room**

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
✓ EMI Receiver	Keysight	N9038A	MY51210173	2021/08/20	2022/08/19
✓ Spectrum Analyzer	Keysight	N9010A	MY52220228	2021/08/24	2022/08/23
✓ Loop Antenna	EMCI	LPA600	277	2021/09/02	2022/09/01
✓ TRILOG super broad Antenna	Schwarzbeck	VULB 9168	VULB 9168-700 & 1421	2021/08/11	2022/08/10
✓ Horn Antenna	Schwarzbeck	BBHA 9120D	01767	2021/08/11	2022/08/10
✓ Horn Antenna	Schwarzbeck	BBHA 9170	703	2021/12/17	2022/12/16
✓ Pre-Amplifier	EM	EMC330	060774	2021/08/24	2022/08/23
✓ Pre-Amplifier	EMEC	EM01G18G	060648	2021/08/24	2022/08/23
✓ Pre-Amplifier	JPT	JPA0118-55-303K	1910001800055003	2021/08/25	2022/08/24
✓ Pre-Amplifier	EMCI	EMC184045SE	980515	2021/08/24	2022/08/23
✓ Cable	EMEC	EM-CB400	105060103	2021/08/24	2022/08/23
✓ Cable	EMEC	EM-CB400	105060102	2021/08/24	2022/08/23
✓ Cable	EMEC	EM-CB400	105060101	2021/08/24	2022/08/23
✓ RF Cable	HUBER+SUHNER	SF102	MY2752/2	2021/08/24	2022/08/23
✓ Cable	MVE	280280.LL266.1200	B60028C	2021/08/24	2022/08/23
✓ RF Cable	HUBER+SUHNER	SF102	MY2751/2	2021/08/24	2022/08/23
✓ Cable	MVE	140140.LL404.300	B90006C	2021/10/04	2022/10/03
RF Filter	EMEC	BRF-2400-2500	002	2021/08/26	2022/08/25
RF Filter	EMEC	BRF-5150-5350	104	2021/08/26	2022/08/25
RF Filter	EMEC	BRF-5470-5725	092	2021/08/26	2022/08/25
✓ RF Filter	EMEC	BRF-5725-5875	091	2021/08/26	2022/08/25
RF Filter	EMEC	HPF-2800	002	2021/08/26	2022/08/25
RF Filter	EMEC	HPF-5850	059	2021/08/26	2022/08/25
SMA Notch Filter	MVE	MFN-902.928.S1	190604001	2021/09/02	2022/09/01

**Remark:**

1. All equipments are calibrated every one year.
2. The test instruments marked with "✓" are used to measure the final test results.
3. Test Software version: FARAD EZ-EMC Ver.WD-03A1-1

## 2 Test Result

### 2.1 Spurious Emission Measurement

#### 2.1.1 Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) =  $20 \log \text{RF Voltage}(\mu\text{V})$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

#### 2.1.2 Test Setup


##### Below 30MHz

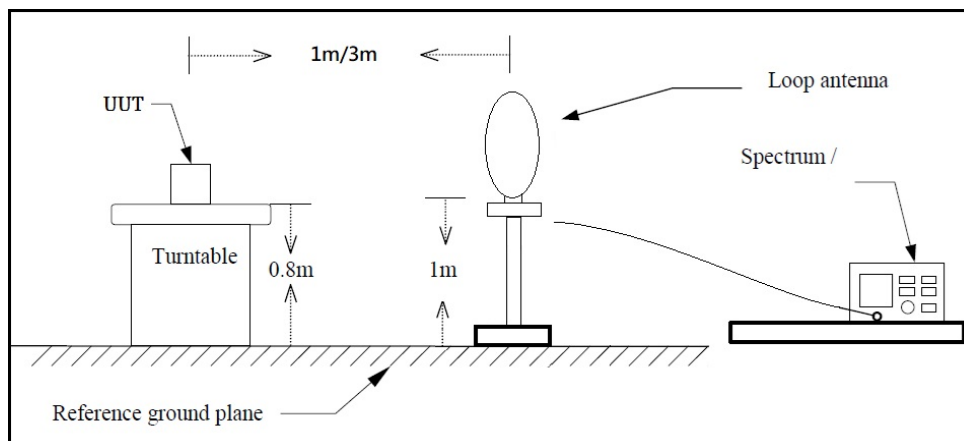

**30MHz~1GHz**

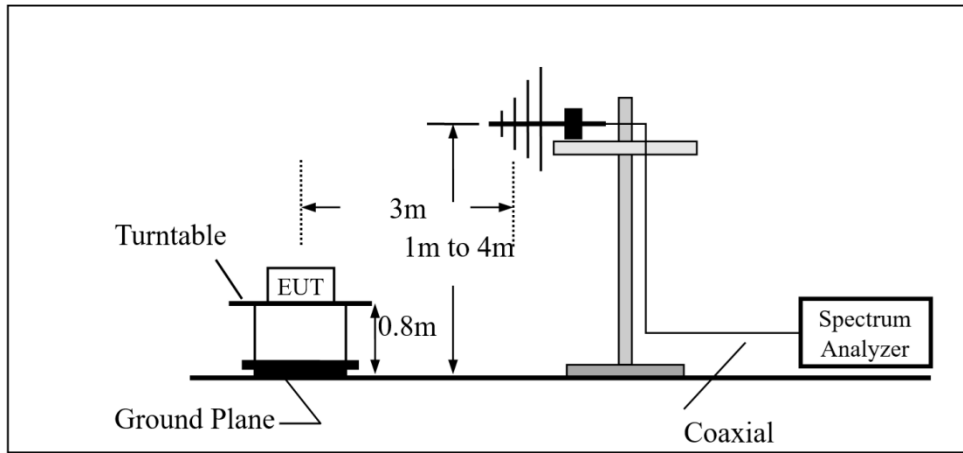

**Above 1GHz**

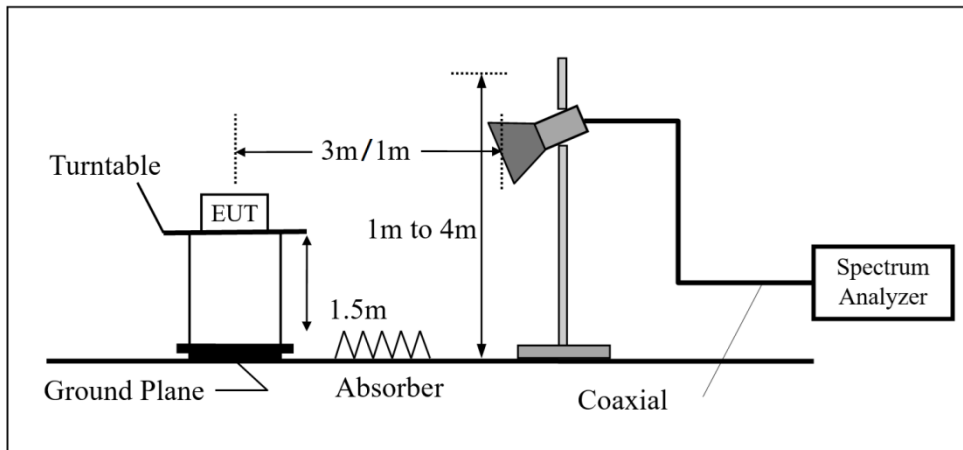

### 2.1.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### **For Radiated emission below 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### **For Radiated emission Above 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.


## 2.1.4 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5G/40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.



### Above 1GHz Data

<b>Test Mode :</b>	Mode 1: Bluetooth LE+RFID(13.56MHz)	<b>Test Date :</b>	2022/07/13
<b>Test Voltage :</b>	AC 120V/60Hz	<b>Temperature :</b>	25.8 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	30 %

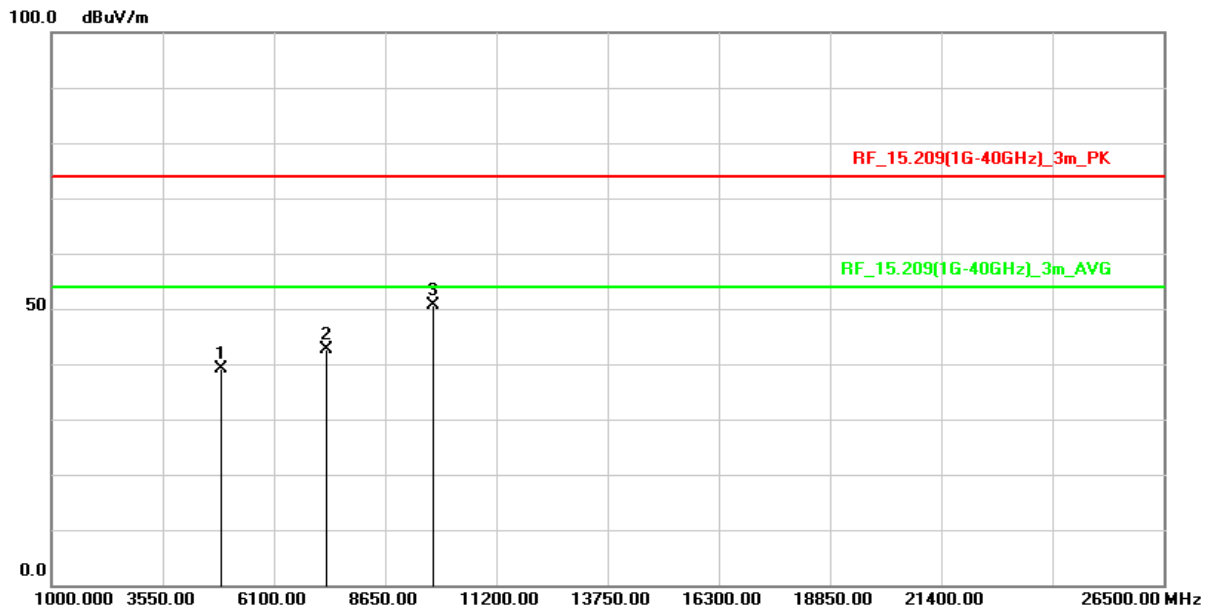


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	59.92	-20.73	39.19	74.00	-34.81	peak
2	7320.000	57.55	-14.95	42.60	74.00	-31.40	peak
3	9760.000	61.30	-10.69	50.61	74.00	-23.39	peak

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Mode 1: Bluetooth LE+RFID(13.56MHz)	<b>Test Date :</b>	2022/07/13
<b>Test Voltage :</b>	AC 120V/60Hz	<b>Temperature :</b>	25.8 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	30 %

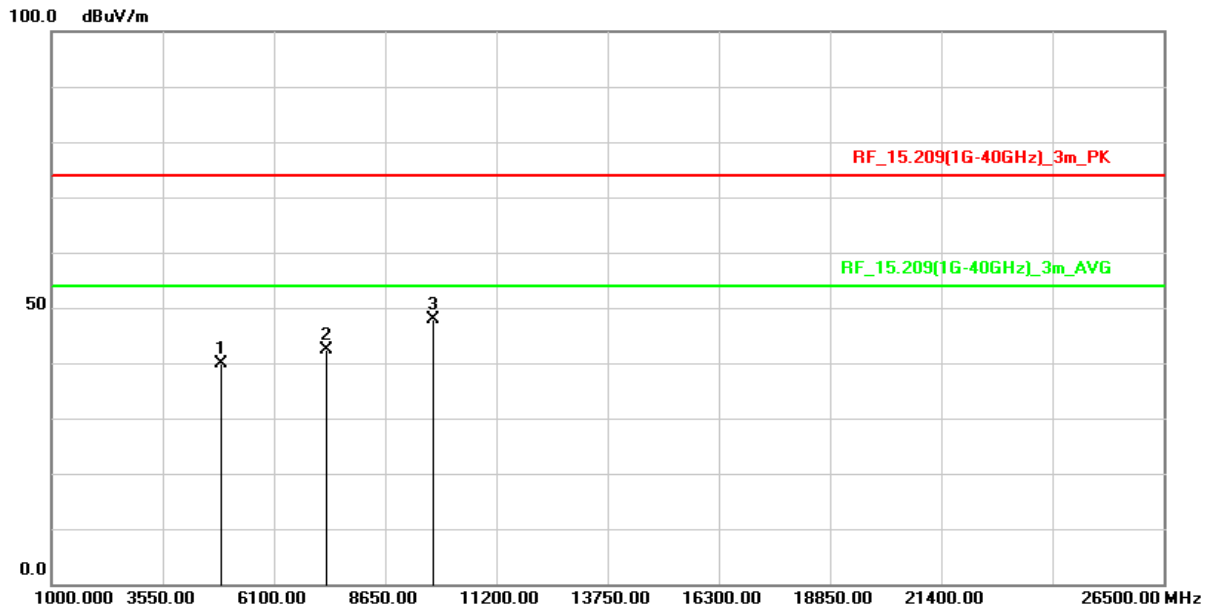


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4880.000	60.56	-20.73	39.83	74.00	-34.17	peak
2	7320.000	57.26	-14.95	42.31	74.00	-31.69	peak
3	9760.000	58.59	-10.69	47.90	74.00	-26.10	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

### Below 1GHz Data

<b>Test Mode :</b>	Mode 1: Bluetooth LE+RFID(13.56MHz)	<b>Test Date :</b>	2022/07/12
<b>Test Voltage :</b>	AC 120V/60Hz	<b>Temperature :</b>	25.8 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	30 %

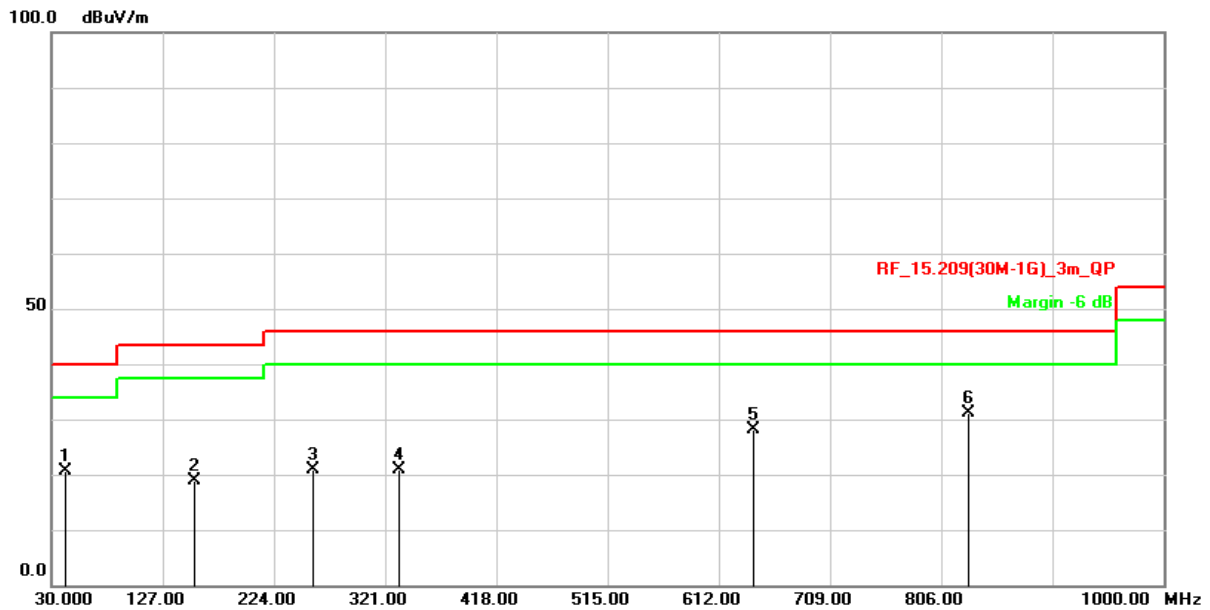


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	42.6100	32.01	-11.34	20.67	40.00	-19.33	QP
2	155.1300	30.14	-11.14	19.00	43.50	-24.50	QP
3	257.9500	33.03	-12.14	20.89	46.00	-25.11	QP
4	333.6100	30.36	-9.41	20.95	46.00	-25.05	QP
5	642.0700	29.98	-1.90	28.08	46.00	-17.92	QP
6	830.2500	29.98	1.17	31.15	46.00	-14.85	QP

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Mode 1: Bluetooth LE+RFID(13.56MHz)	<b>Test Date :</b>	2022/07/13
<b>Test Voltage :</b>	AC 120V/60Hz	<b>Temperature :</b>	25.8 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	30 %

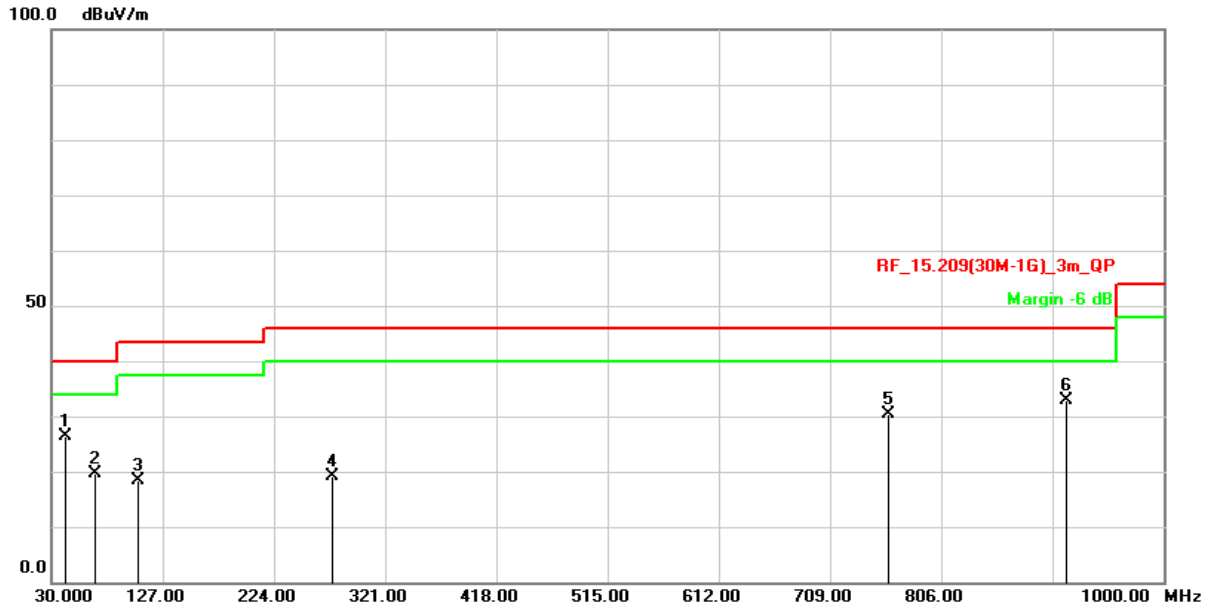

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	41.6400	37.88	-11.53	26.35	40.00	-13.65	QP
2	67.8300	32.46	-12.82	19.64	40.00	-20.36	QP
3	105.6600	33.65	-15.16	18.49	43.50	-25.01	QP
4	275.4100	30.23	-11.20	19.03	46.00	-26.97	QP
5	759.4400	29.97	0.40	30.37	46.00	-15.63	QP
6	914.6400	30.17	2.62	32.79	46.00	-13.21	QP

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


## 2.2 AC Conducted Emissions Measurement

### 2.2.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB $\mu$ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

\*Decreases with the logarithm of the frequency

### 2.2.2 Test Setup

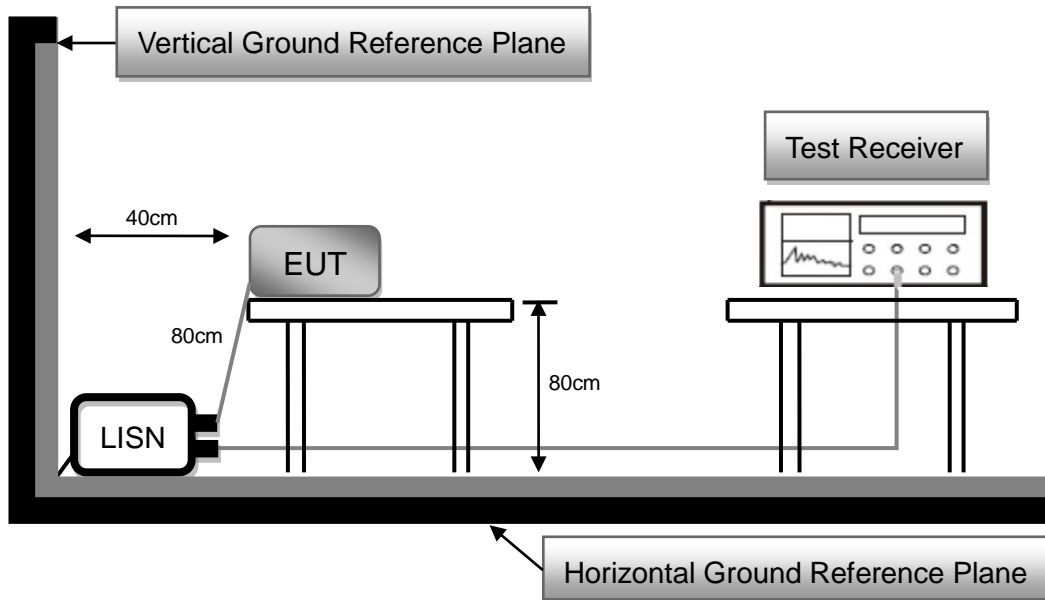

### 2.2.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

## 2.2.4 Test Result

Owing to the DC operation of EUT, this test item is not performed.

--- END ---