





Test Report



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	ER3580-4
Client	Onset Computer Corporation Jim Corrigan
Address	470 MacArthur Blvd. Bourne, MA 02532
Phone	508-743-3195
Items tested	CX600/CX700
FCC ID	WXF-ONST5
IC ID	7936A-ONST5
FRN	0009380064
Equipment Type	Digital Transmission System
Equipment Code	DTS
FCC/IC Rule Parts	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2
Test Dates	December 4 th to 7 th , 2017
Results	As detailed within this report
Prepared by	 Zachary Johnson – Test Engineer
Authorized by	 Jason Haley – Sr. EMC Engineer
Issue Date	1/10/2018
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 24 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Contents

Contents.....	2
Summary.....	3
Test Methodology.....	4
Product Tested - Configuration Documentation.....	5
Clock Frequencies.....	5
Statement of Conformity.....	6
Modifications Required for Compliance.....	6
Test Results.....	7
<i>Bandwidth</i>	7
<i>Peak Output Power</i>	9
<i>Radiated Spurious Emissions</i>	11
<i>Duty Cycle Correction Factor</i>	16
<i>Conducted Spurious Emissions</i>	18
Power Spectral Density.....	19
<i>Occupied Bandwidth</i>	21
Measurement Uncertainty.....	23
Conditions of Testing.....	24

Form Final Report REV 12-07-15



Summary

This test report supports an application for certification of a transmitter operating pursuant to: CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2

CX600/CX700 is a Bluetooth Low Energy transmitter operating in the 2402 MHz to 2480 MHz frequency range.

Antenna Type: Internal surface mount chip

Gain: 1.3dBi

We found that the product met the above requirements without modification.

Test samples were received in good condition.

Test Methodology

All testing was performed according to the following rules/procedures/documents;
CFR 47 FCC Part 15.247, RSS-247 Issue 2, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS
Measurement Guidance v04 and ANSI C63.10-2013.

Radiated emissions were maximized by rotating the device around 3 orthogonal planes (X, Y and Z) as well as varying the test antenna's height and polarity. The device antenna could not be maximized separately.

RF measurements were performed at the antenna port. Three channels were tested as follows:

- Low Channel - 2402MHz
- Mid Channel - 2440MHz
- High Channel - 2480MHz

EUT operating voltage is 3VDC from battery.

The following bandwidths were used during radiated spurious emissions testing.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration										
Work Order:	R3580									
Company:	Onset Computer Corporation									
Company Address:	470 MacArthur Blvd. Bourne, MA, 02532									
Contact:	Jim Corrigan									
EUT:	MN CX600/CX700			PN --			SN Test Sample 1			
EUT Description:	Battery Powered Temperature Logger									
EUT Max Frequency:	2440 MHz									
EUT Min Frequency:	0.0032768 MHz									
Support Equipment	MN					SN				
iPad	--					--				
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	max length (m)	in/out	comment
RTD Thermal cable	other	1	1	other	No	No	1.2	1.2	in	
Software Operating Mode Description:										
EUT is logging temperature data or is in Standby mode.										

Clock Frequencies

Clock Frequencies	
frequencies (MHz)	2440, 32, 0.0032768

Statement of Conformity

The EUT has been found to conform to the following parts of FCC 15.247 and RSS 247 as detailed below:

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	3.2		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1, 6.5			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna for this device is a permanently installed PCB antenna with a 1.3dBi peak gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	Not applicable since the EUT operating voltage is 3VDC from battery.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.

Modifications Required for Compliance

No modifications required for compliance

Test Results


Bandwidth

Limit: The minimum 6 dB bandwidth shall be at least 500 kHz.
[15.247(a) (2)]


MEASUREMENTS / RESULTS

6dB Bandwidth				
Date: 12/4/2017	Company: Onset	Work Order: R3580		
Engineer: Zac Johnson	EUT: CX600/CX700	Operating Voltage/Frequency: Battery 3V DC		
Temp: 21.8°C	Humidity: 31%	Pressure: 1028mBar		
Frequency Range: 2402-2480 MHz		Measurement Type: Conducted		
Measurement Method: FCC KDB 558074 D01 DTS Meas Guidance V04				
Notes:				
Frequency (MHz)	Reading (kHz)	6dB Bandwidth		
		Limit (kHz)	Margin (kHz)	Result (Pass/Fail)
2402	702.0	≥500	202	Pass
2440	704.2	≥500	204	Pass
2480	700.8	≥500	201	Pass
Test Site: EMI-5		Cable: 2287 Cbl	Attenuator: 2107 Pad	
Analyzer: 1168255 SA		Copyright Curtis-Straus LLC 2000		


PLOTS:

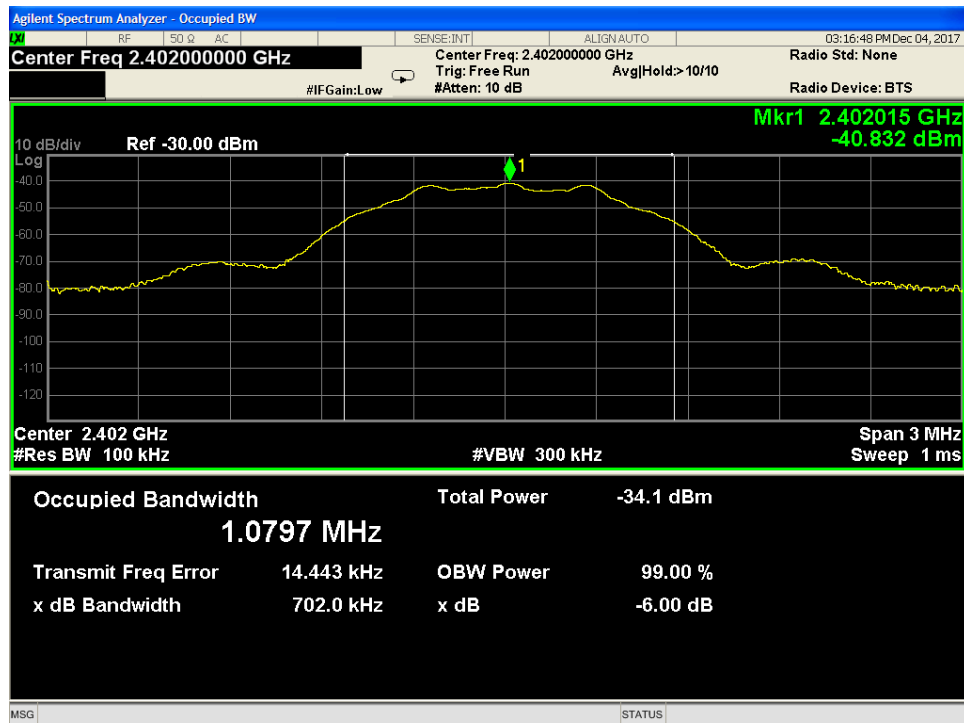

6dB Bandwidth – Low Channel

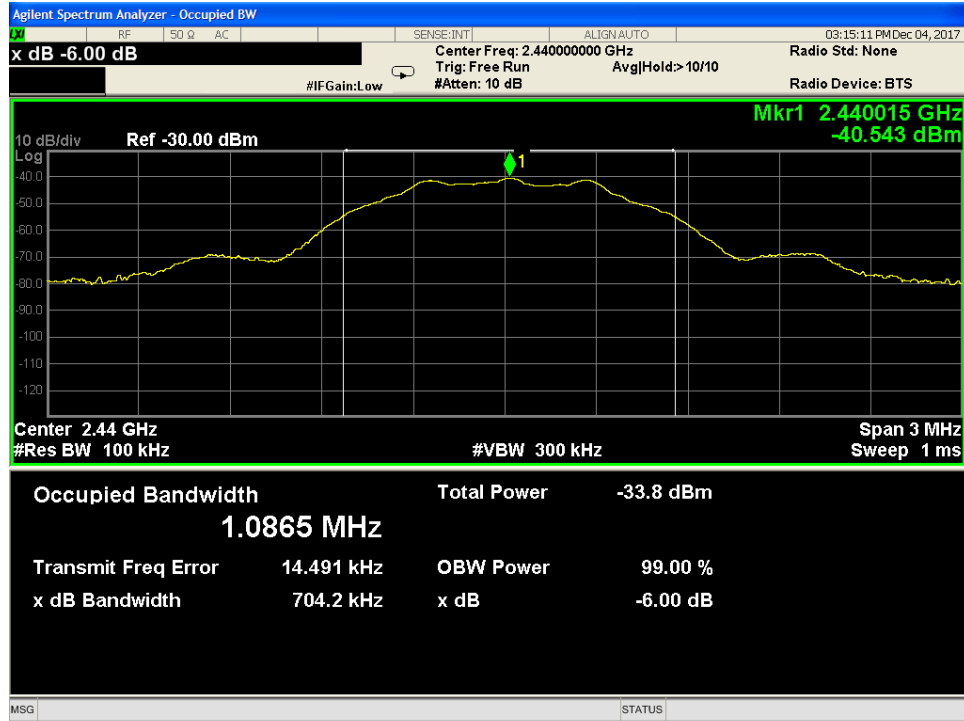

6dB Bandwidth – Mid Channel

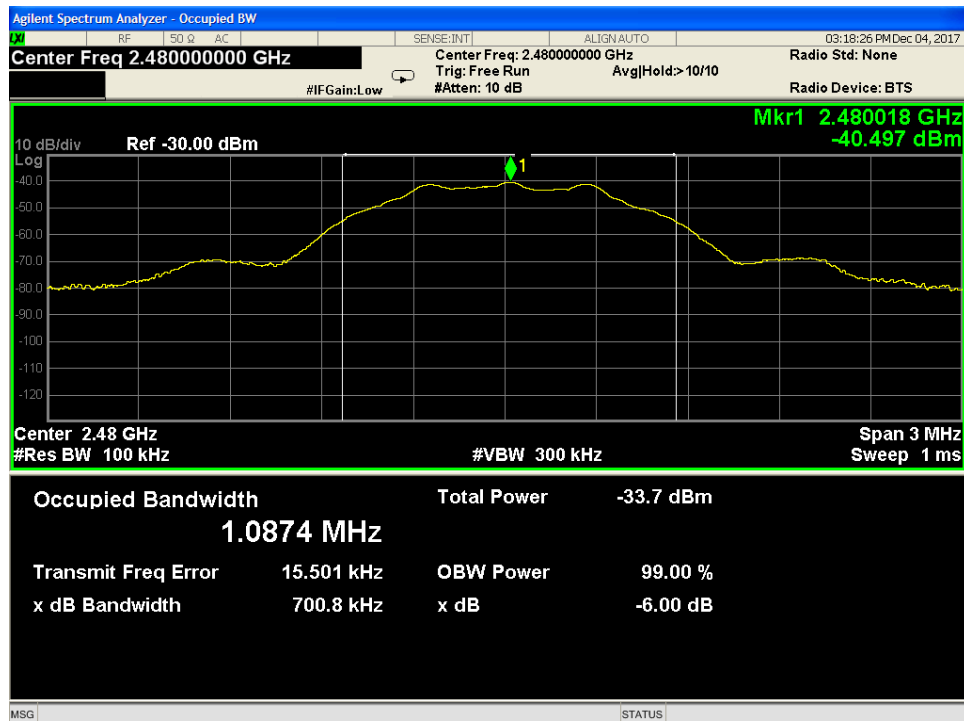

6dB Bandwidth – High Channel




Peak Output Power

LIMIT: 1 Watt Conducted Output Power
[15.247(b) (3)]


MEASUREMENTS / RESULTS

Peak Output Power							
Date: 12/4/2017		Company: Onset		Work Order: R3580			
Engineer: Zac Johnson		EUT: CX600/CX700		Operating Voltage/Frequency: Battery 3V DC			
Temp: 21.8°C		Humidity: 31%		Pressure: 1028mBar			
Frequency Range: 2402-2480 MHz				Measurement Type: Conducted			
Notes:							
Frequency (MHz)	Peak Reading (dBm)	Cable Loss (dB)	Attenuator Loss (dB)	Peak Output Power (dBm)	Limit (dBm)	Margin (dB)	Result (Pass/Fail)
2402	-40.963	0.47	39.64	-0.85	30.0	-30.85	Pass
2440	-40.564	0.47	39.64	-0.45	30.0	-30.45	Pass
2480	-40.649	0.47	39.64	-0.54	30.0	-30.54	Pass
Test Site: EMI-5		Cable: 2287 Cbl		Attenuator: 2107 Pad			
Analyzer: 1168255 SA							
Peak Output Power (dBm) = Peak Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dB)							


PLOTS

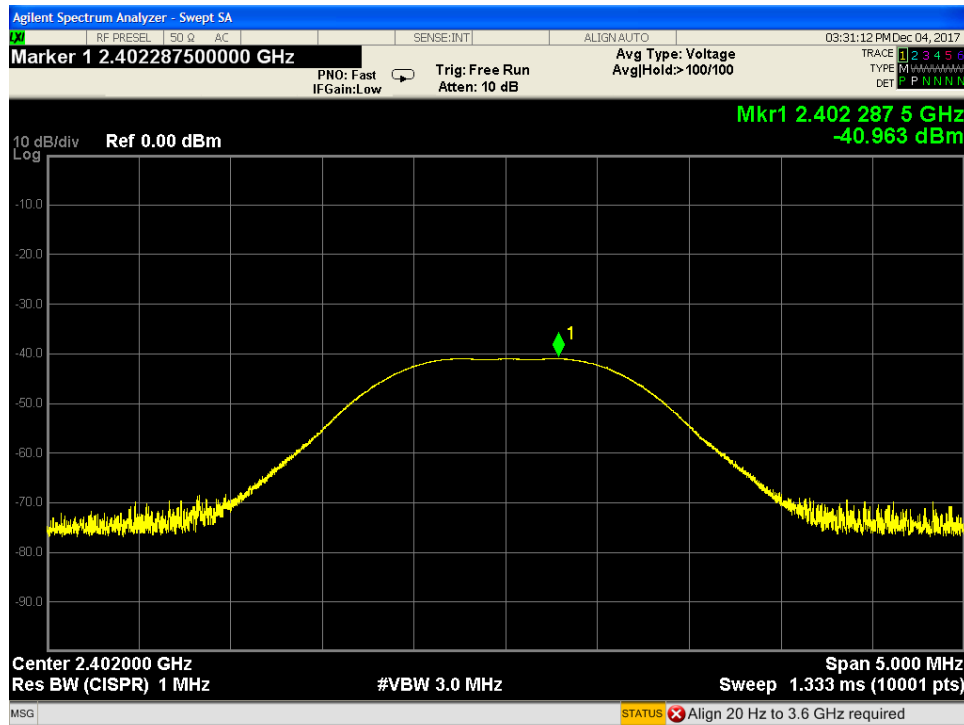

Peak Output Power – Low Channel

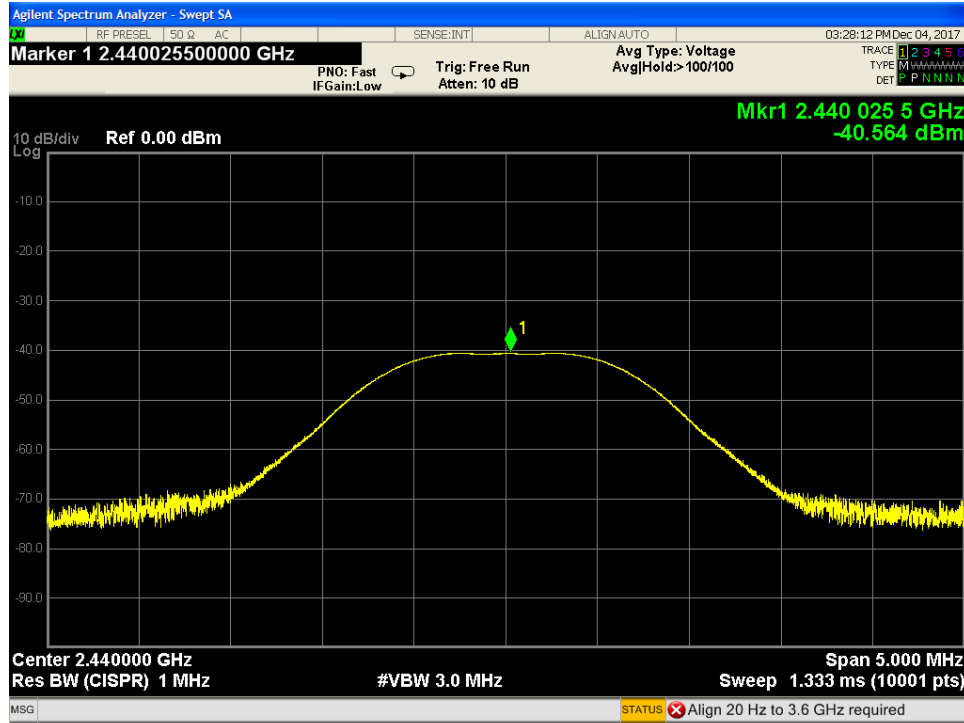

Peak Output Power – Mid Channel

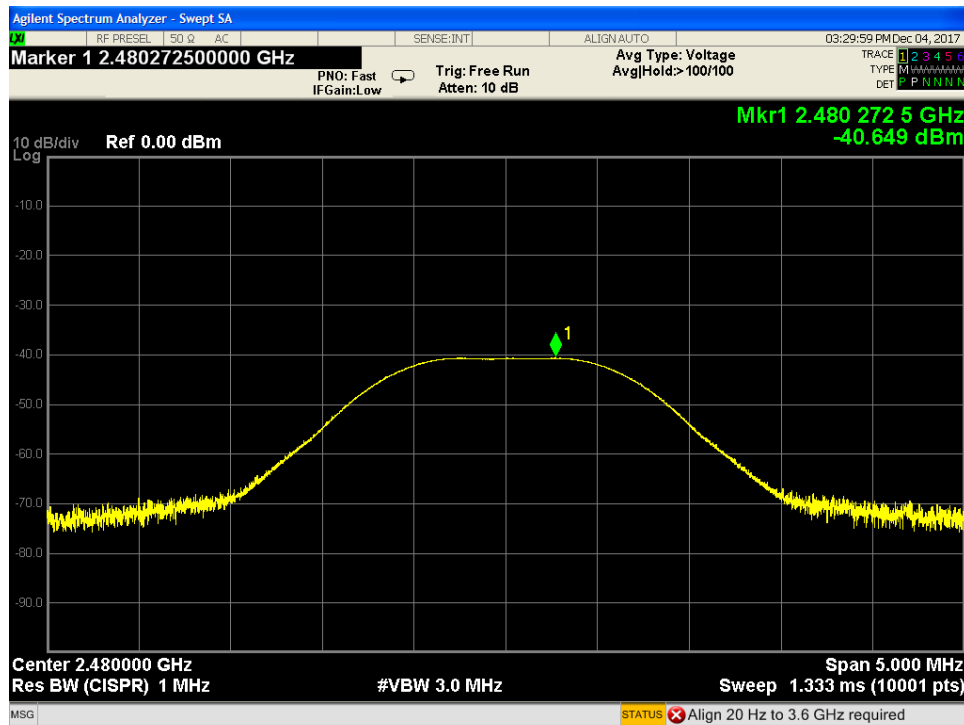

Peak Output Power – High Channel




Radiated Spurious Emissions

Limits: Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). [15.247(d)]


EUT was tested in worst case upright orientation. Center channel 19 was tested. When harmonics were visible high and low channels 0 and 39 were also tested. For radiated bandedges channels 0 and 39 were tested.

MEASUREMENTS / RESULTS

Radiated Band Edge

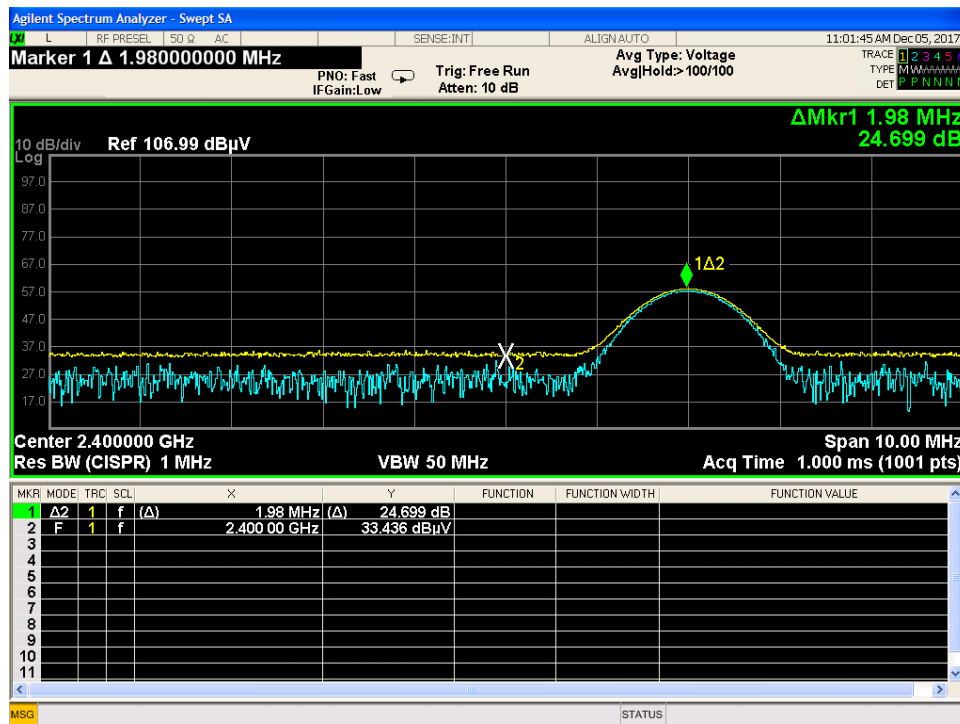

Low Bandedge

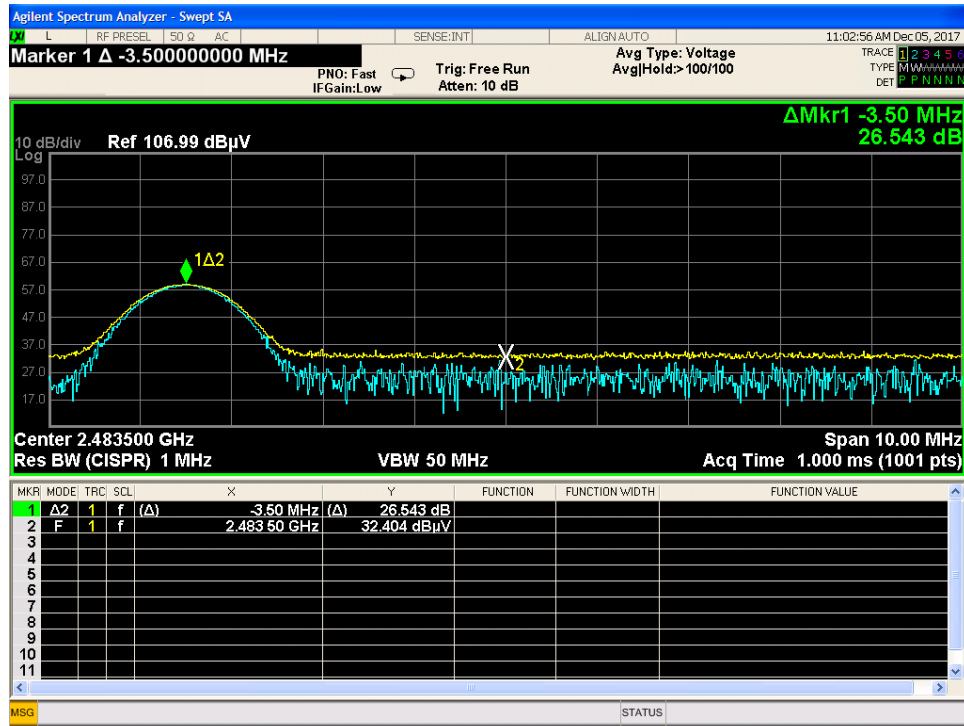

High Bandedge

Radiated Spurious 30 to 25 GHz

Curtis Straus - a Bureau Veritas Company						Work Order - R3580							
Radiated Emissions Electric Field 3m Distance						EUT Power Input - 3V DC							
30-1000MHz Vertical Data						Test Site - CH2							
Operator: ZJ						Conditions - 21.8°C; 31%RH; 1028mBar							
EUT Maximum Frequency - 2480MHz													
Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Lim1: FCC_pt15_1 09_Class_B	Margin to Lim1	Test Results Lim1	Worst Margin Lim1	Lim2: FCC_pt15_10 9_Class_B	Margin to Lim2	Test Results Lim2	Worst Margin Lim2	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
36.025	40.8	-12.3	28.5	40	-11.5	PASS		40	-11.5	PASS		100	3
48.161	49.4	-20.4	29	40	-11	PASS		40	-11	PASS		111	70
96.072	51.1	-19.6	31.5	43.5	-12	PASS		43.5	-12	PASS		106	117
104.511	51	-16.8	34.2	43.5	-9.4	PASS	-9.4	43.5	-9.4	PASS	-9.4	115	123
143.936	43.8	-15.8	28	43.5	-15.5	PASS		43.5	-15.5	PASS		125	100
192.558	45.3	-17	28.4	43.5	-15.2	PASS		43.5	-15.2	PASS		125	239

Curtis Straus - a Bureau Veritas Company						Work Order - R3580							
Radiated Emissions Electric Field 3m Distance						EUT Power Input - 3V DC							
30-1000MHz Horizontal Data						Test Site - CH2							
Operator: ZJ						Conditions - 21.8°C; 31%RH; 1028mBar							
EUT Maximum Frequency - 2480MHz													
Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Lim1: FCC_pt15_10 9_Class_B	Margin to Lim1	Test Results Lim1	Worst Margin Lim1	Lim2: FCC_pt15_1 09_Class_B	Margin to Lim2	Test Results Lim2	Worst Margin Lim2	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
30.655	28	-8.2	19.8	40	-20.2	PASS		40	-20.2	PASS		175	25
96.089	49.4	-19.6	29.8	43.5	-13.7	PASS		43.5	-13.7	PASS		275	258
104.521	46.8	-16.8	30	43.5	-13.5	PASS	-13.5	43.5	-13.5	PASS	-13.5	162	290
192.199	45.7	-17	28.7	43.5	-14.8	PASS		43.5	-14.8	PASS		100	123
335.937	32.5	-13.8	18.7	46	-27.3	PASS		46	-27.3	PASS		100	61
360.038	41.6	-12.9	28.7	46	-17.3	PASS		46	-17.3	PASS		100	61

30-1000MHz Radiated Emissions

Curtis Straus - a Bureau Veritas Company						Work Order - R3580									
Radiated Emissions Electric Field 3m Distance						EUT Power Input - 3V DC									
1-6GHz Vertical Data						Test Site - CH2									
Operator: ZJ						Conditions - 21.8°C; 31%RH; 1028mBar									
EUT Maximum Frequency - 2480MHz															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
2167.9	46.5	37.8	-7.7	38.8	74	-35.2	PASS		30.1	54	-23.9	PASS		298	302
2608.4	49.7	40.2	-109.4	-59.7	74	-133.7	PASS		-69.2	54	-123.2	PASS		212	44
4879.9	48.2	42.8	-3.5	44.7	74	-29.2	PASS	-29.2	39.3	54	-14.7	PASS	-14.7	175	295
5558.7	43.4	34.8	-1.8	41.6	74	-32.4	PASS		32.9	54	-21	PASS		293	279



Curtis Straus - a Bureau Veritas Company					Work Order - R3580										
Radiated Emissions Electric Field 3m Distance					EUT Power Input - 3V DC										
1-6GHz Horizontal Data					Test Site - CH2										
Operator: ZJ					Conditions - 21.8°C; 31%RH; 1028mBar										
EUT Maximum Frequency - 2480MHz															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Average Margin	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
2143.8	46	38.1	-7.7	38.3	74	-35.7	PASS		30.3	54	-23.6	PASS		282	24
2616.9	50.2	40.2	-109.4	-59.2	74	-133.2	PASS		-69.2	54	-123.2	PASS		282	125
4500.5	44.7	35.9	-4.5	40.2	74	-33.8	PASS		31.4	54	-22.5	PASS		116	259
4879.9	50.1	45.6	-3.5	46.6	74	-27.4	PASS	-27.4	42.1	54	-11.9	PASS	-11.9	100	133
5261.2	43	33.8	-1.8	41.2	74	-32.8	PASS		32	54	-22	PASS		299	48

1-6GHz Radiated Emissions

Curtis Straus - a Bureau Veritas Company					Work Order - R3580										
Radiated Emissions Electric Field 1m Distance					EUT Power Input - 3V DC										
6-18GHz Vertical Data					Test Site - CH2										
Operator: ZJ					Conditions - 21.8°C; 31%RH; 1028mBar										
EUT Maximum Frequency - 2480MHz															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7320.4	44.5	38.8	-1.1	43.4	83.5	-40.1	PASS		37.6	63.5	-25.9	PASS		115	102
11499.7	41.9	33	2.7	44.7	83.5	-38.8	PASS		35.8	63.5	-27.7	PASS		200	309
12694	43.4	33.9	2.6	46	83.5	-37.5	PASS		36.6	63.5	-26.9	PASS		100	1
13342.1	42.8	34.2	5	47.8	83.5	-35.7	PASS		39.1	63.5	-24.4	PASS		127	177
13965.5	43	33.9	6.2	49.2	83.5	-34.3	PASS		40.1	63.5	-23.4	PASS		200	229
17680.3	41.6	32.7	11	52.6	83.5	-30.9	PASS	-30.9	43.6	63.5	-19.9	PASS	-19.9	100	34

Curtis Straus - a Bureau Veritas Company					Work Order - R3580										
Radiated Emissions Electric Field 1m Distance					EUT Power Input - 3V DC										
6-18GHz Horizontal Data					Test Site - CH2										
Operator: ZJ					Conditions - 21.8°C; 31%RH; 1028mBar										
EUT Maximum Frequency - 2480MHz															
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Pk Lim: FCC_pt15_109 ClassB_Peak	Peak Margin	Peak Test Results	Worst Peak Margin	Adjusted Avg Amplitude	Av Lim: FCC_pt15_109 ClassB_AVG	Avg Margin	Avg Test Results	Worst Avg Margin	Antenna Height	EUT Azimuth
(MHz)	(dBµV)	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(dB)	(cm)	(degrees)
7320.1	52.9	50.6	-1.1	51.8	83.5	-31.7	PASS		49.5	63.5	-14	PASS	-14	139	150
8734.4	42.8	34.2	0.4	43.2	83.5	-40.3	PASS		34.6	63.5	-28.9	PASS		150	71
13377.9	42.5	33.8	5.1	47.6	83.5	-35.9	PASS		38.9	63.5	-24.6	PASS		197	1
13988.5	41.2	33.1	6.5	47.7	83.5	-35.8	PASS		39.6	63.5	-23.9	PASS		100	78
17447.9	40.5	31.9	8.9	49.3	83.5	-34.2	PASS		40.8	63.5	-22.7	PASS		200	234
17677.9	41.3	32.7	11	52.3	83.5	-31.2	PASS	-31.2	43.7	63.5	-19.8	PASS		150	138

6-18GHz Radiated Emissions



Radiated Emissions Table												
Date: 04-Dec-17			Company: Onset			Work Order: R3580						
Engineer: Zac Johnson			EUT Desc: CX600/CX700			EUT Operating Voltage/Frequency: 3V DC						
Temp: 21.8			Humidity: 31%			Pressure: 1028						
Frequency Range: 18-26.5GHz						Measurement Distance: 0.1 m						
Notes:												
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC 15.247			---		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
No Emissions Found												
Table Result: Pass by --- dB Worst Freq: --- MHz												
Test Site: EMI Chamber 2			Cable 1: Asset #2323			Cable 2: ---			Cable 3: ---			
Analyzer: Gold			Preamp: 18-26.5GHz			Antenna: 18-26.5GHz Horn			Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.190						Copyright Curtis-Straus LLC 2000						
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												

18-26.5GHz Radiated Emissions

Rev. 12/4/2017

Spectrum Analyzers / Receivers/Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Gold	100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
2093 MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	11/16/2018	11/16/2017
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2	719150	2762A-7	A-0015	30-1000MHz	1686	I	12/21/2018	12/21/2016
EMI Chamber 2	719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016
Preamps/Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
2311 PA	1-1000MHz	PAM-103	COM-POWER	441174	2311	II	10/29/2018	10/29/2017
2111 HF Preamp	0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	11/19/2018	11/19/2017
HF (Yellow)	18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2018	10/16/2017
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Red-Black Bilog	30-2000MHz	JB1	Sunol	A091604-2	1106	I	2/28/2019	2/28/2017
Orange Horn	1-18GHz	3115	EMCO	0004-6123	390	I	10/13/2018	10/13/2016
HF (White) Horn	18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test
Meteorological Meters/Chambers		MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016
TH A#2085		HTC-1	HDE		2085	II	3/23/2018	3/23/2017
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #2458	9KHz-18GHz		MegaPhase			II	10/29/2018	10/29/2017
Asset #2459	9KHz-18GHz		MegaPhase			II	10/29/2018	10/29/2017
Asset #2464	9KHz-18GHz		MegaPhase			II	10/29/2018	10/29/2017
Asset #2323	1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 002	2323	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Duty Cycle Correction Factor


Limits:

Unless otherwise specified, e.g., §§15.255(b), and 15.256(l)(5), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.


[15.35(c)]

MEASUREMENTS / RESULTS

PLOTS

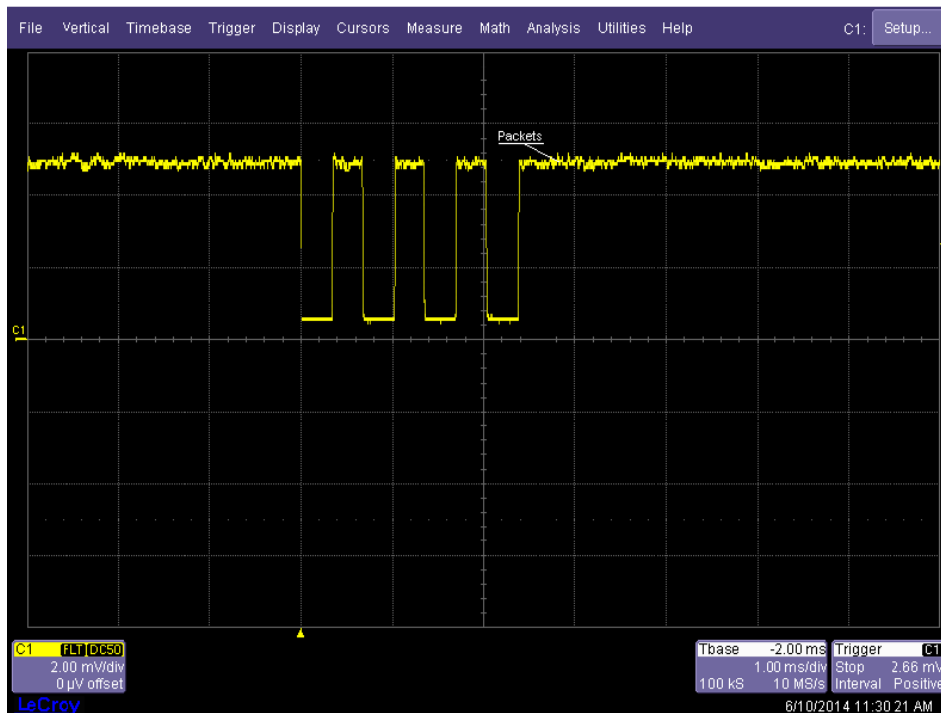


10ms Window

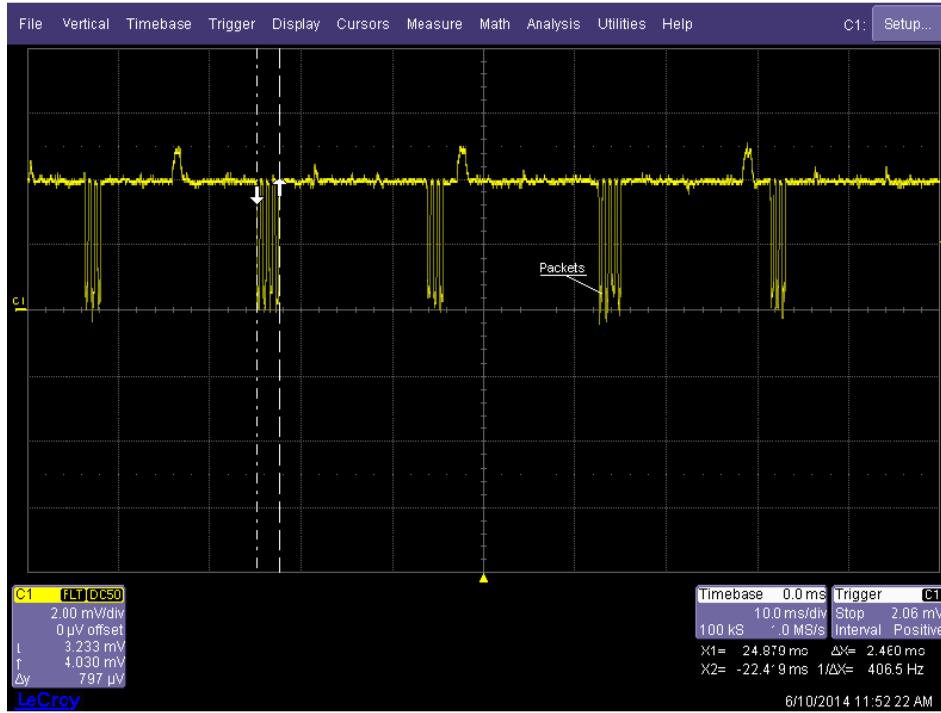

100ms Window

BLE Packet Transmission Timing

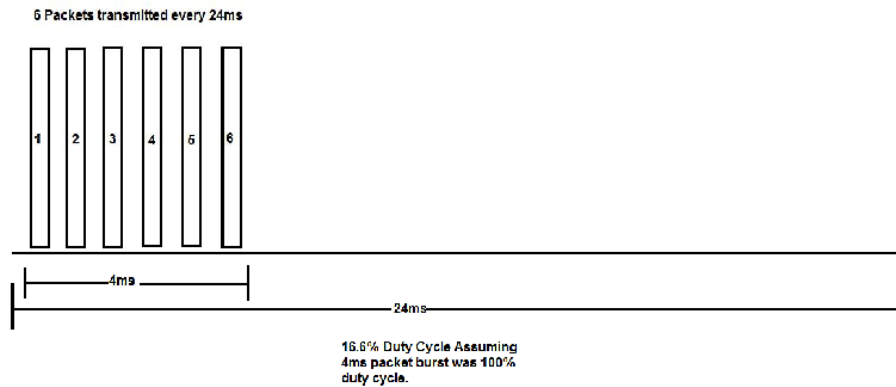

**Duty cycle info was provided by client
 $20 \cdot \log(0.166) = -15.6\text{dB}$


Conducted Spurious Emissions

Limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth that contains the highest level of desired power.

[15.247(d)]

MEASUREMENTS / RESULTS

PLOTS

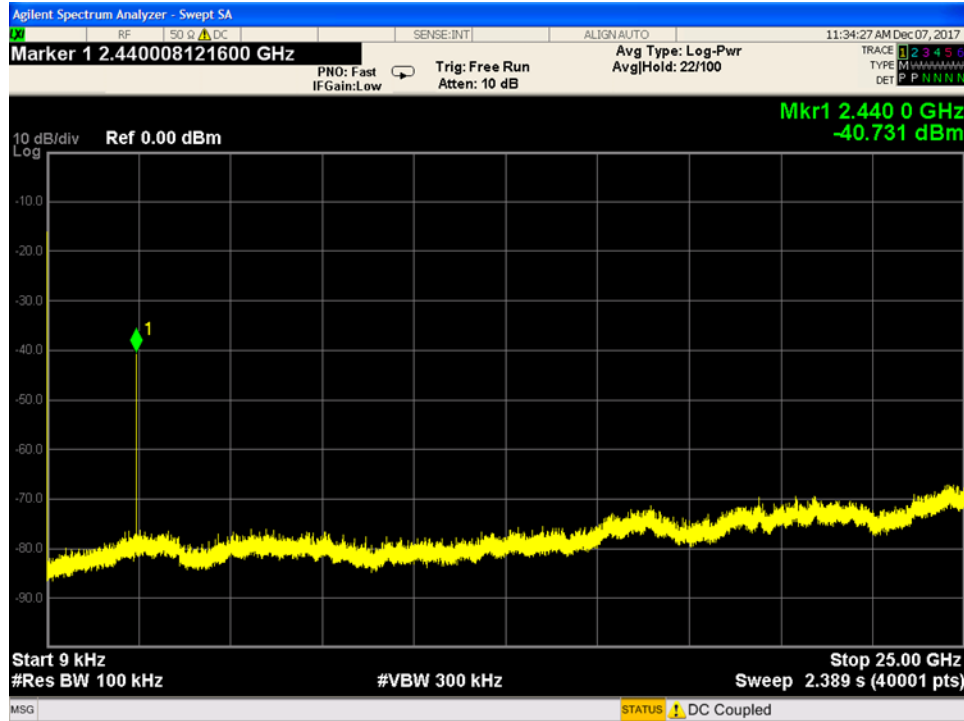

Conducted Spurious 9KHz to 25GHz


Power Spectral Density

Limit: The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission. [15.247(e)]


MEASUREMENTS / RESULTS

Peak Power Spectral Density							
Date: 12/4/2017		Company: Onset			Work Order: R3580		
Engineer: Zac Johnson		EUT: CX600/CX700			Operating Voltage/Frequency: Battery 3V DC		
Temp: 21.8°C		Humidity: 31%		Pressure: 1028mBar			
Frequency Range: 2402-2480 MHz				Measurement Type: Conducted			
Notes:							
Frequency (MHz)	Peak Reading (dBm)	Cable Loss (dB)	Attenuator Loss (dB)	Peak PSD (dBm)	Limit (dBm)	Margin (dB)	Result
2402	-58.39	0.47	39.64	-18.28	8.0	-26.28	Pass
2440	-58.09	0.47	39.64	-17.98	8.0	-25.98	Pass
2480	-58.11	0.47	39.64	-18.00	8.0	-26.00	Pass
Test Site: EMI-5		Cable: 2287 Cbl		Attenuator: 2107 Pad			
Analyzer: 1168255 SA							
PSD(dBm) = Reading (dBm) + Cable Loss (dB) + Attenuator Loss (dBm)							


PLOTS

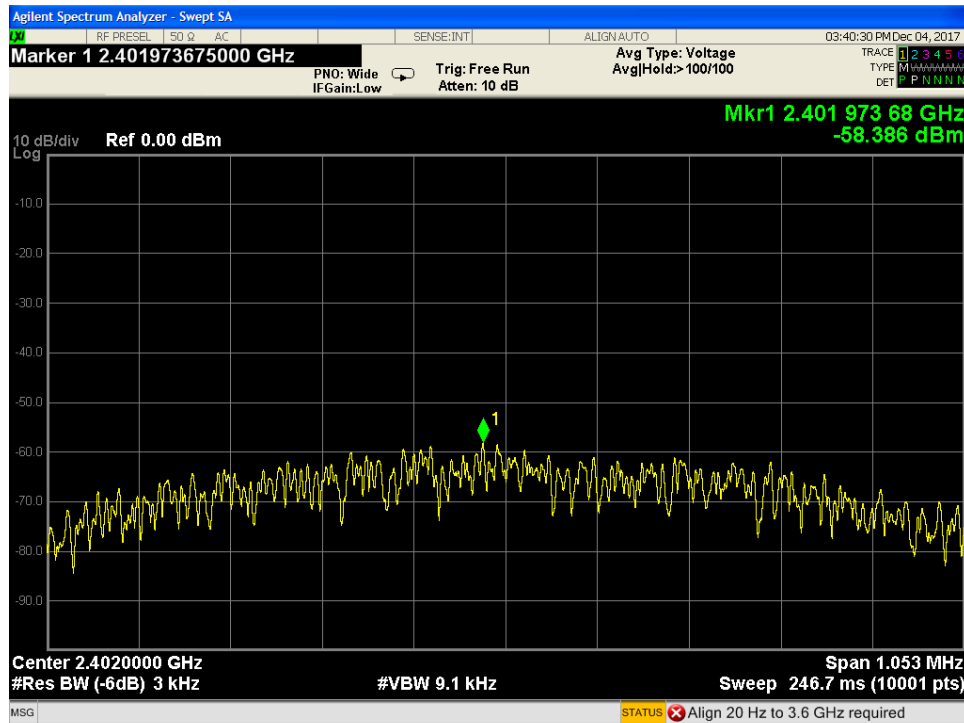

PSD – Low Channel

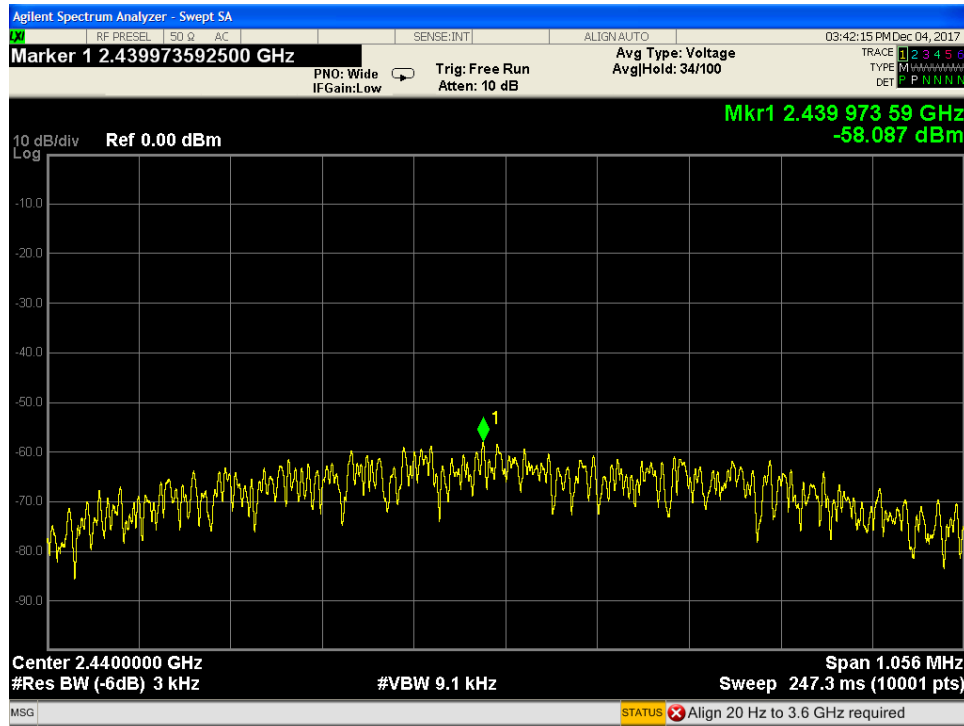

PSD – Mid Channel

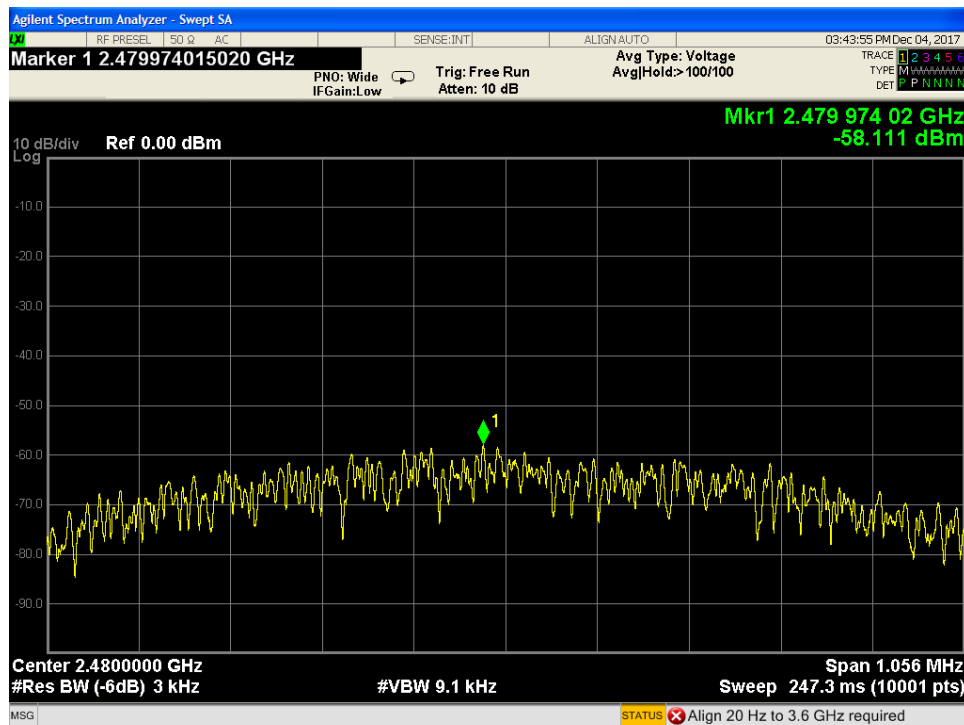

PSD – High Channel



Occupied Bandwidth


Requirement: When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is its 99% emission bandwidth, as calculated or measured.

[RSS-GEN 4.6.1]


MEASUREMENTS / RESULTS

99% Occupied Bandwidth			
Date: 12/4/2017	Company: Onset	Work Order: R3580	
Engineer: Zac Johnson	EUT: CX600/CX700	Operating Voltage/Frequency: Battery 3V DC	
Temp: 21.8°C	Humidity: 31%	Pressure: 1028mBar	
Frequency Range: 2402-2480 MHz		Measurement Type: Conducted	
Notes:			
Frequency (MHz)			99% OBW (MHz)
2402			1.0619
2440			1.0625
2480			1.0655
Test Site: EMI-5	Cable: 2287 Cbl	Attenuator: 2107 Pad	
Analyzer: 1168255 SA			Copyright Curtis-Straus LLC 2000


PLOTS:

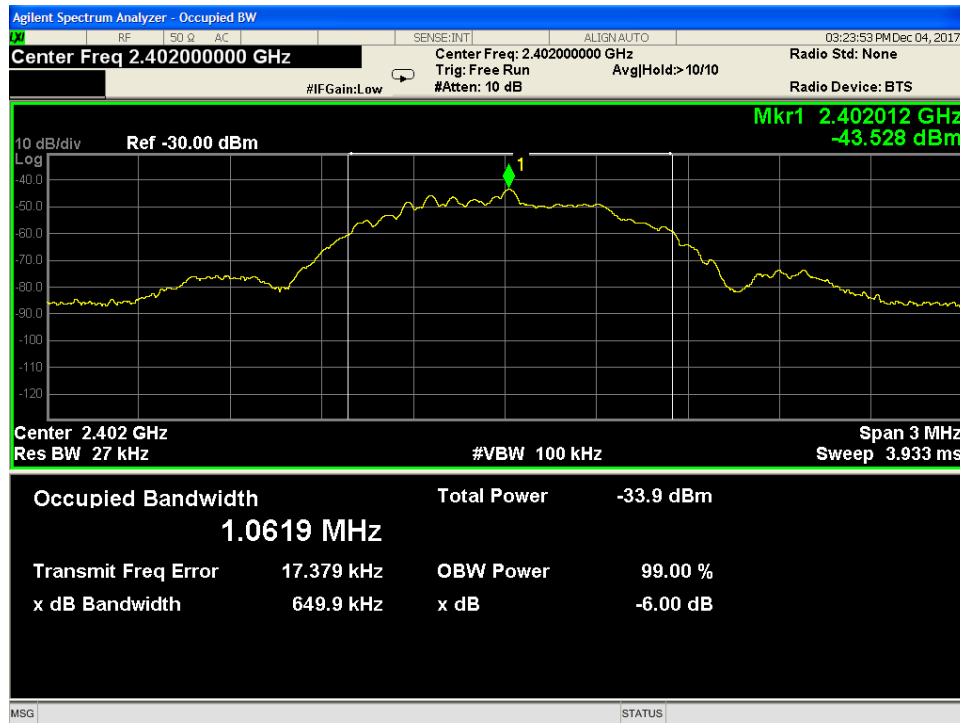

99% Occupied Bandwidth Low Channel

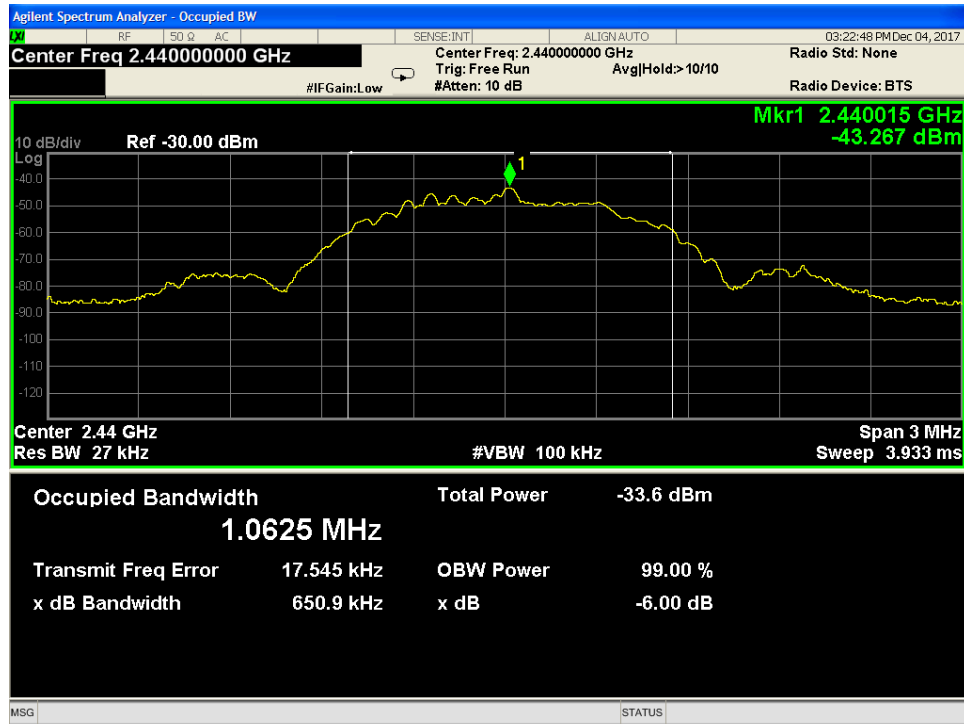

99% Occupied Bandwidth Mid Channel

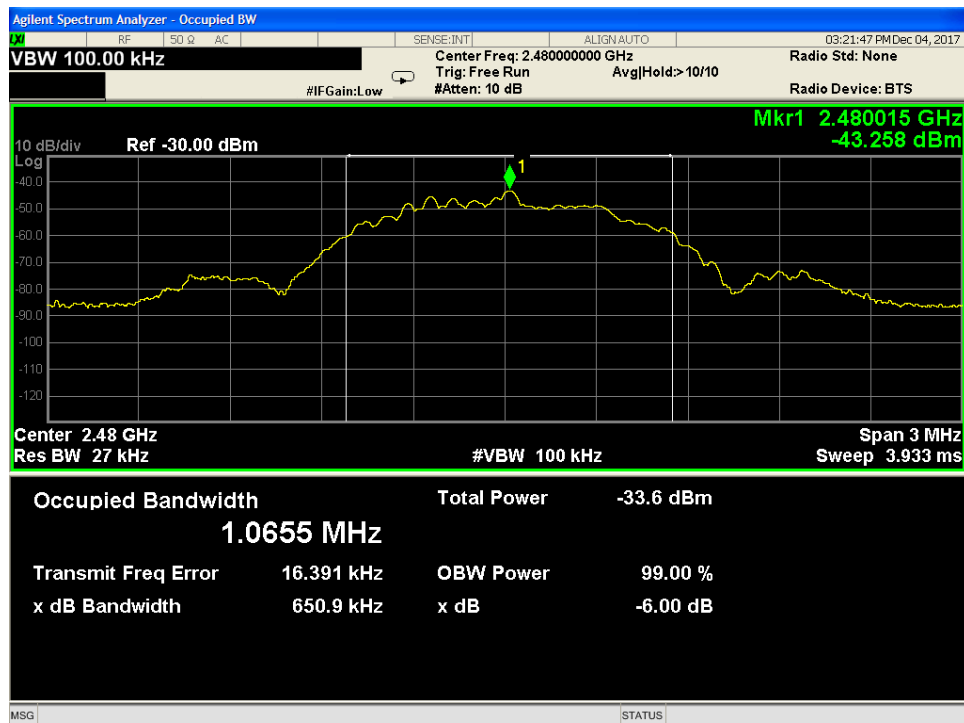

99% Occupied Bandwidth High Channel



Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisprr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4%	5%
Adjacent channel power	0.3dB	3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

