



RADIO TEST REPORT

Test Report No. : 11343921H-A-R2

Applicant : SHIMANO INC.
Type of Equipment : Communication module
Model No. : TYPE1FJ
FCC ID : WY7-TYPE1FJ
Test regulation : FCC Part 15 Subpart C: 2016
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11343921H-A-R1. 11343921H-A-R1 is replaced with this report.

Date of test: August 1 to September 2, 2016

Representative test engineer:

Keisuke Kawamura

Engineer

Consumer Technology Division

Approved by:

Tsubasa Takayama

Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address,

http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	5
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission.....	11
SECTION 6: Radiated Spurious Emission	12
SECTION 7: Antenna Terminal Conducted Tests.....	14
APPENDIX 1: Test data	15
Conducted Emission	15
6dB Bandwidth	18
Maximum Peak Output Power	21
Average Output Power	25
Radiated Spurious Emission	29
Conducted Spurious Emission	46
Power Density	50
99%Occupied Bandwidth	54
APPENDIX 2: Test instruments	56
APPENDIX 3: Photographs of test setup	58
Conducted Emission	58
Radiated Spurious Emission	59
Worst Case Position	61

SECTION 1: Customer information

Company Name : SHIMANO INC.
Address : 3-77 Oimatsu-cho, Sakai-ku, Sakai City, Osaka 590-8577 Japan
Telephone Number : +81-72-223-3385
Facsimile Number : +81-72-223-3388
Contact Person : Hitoshi Hamada

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Communication module
Model No. : TYPE1FJ
Serial No. : Refer to Section 4, Clause 4.2
Rating : DC 3.3 V
Receipt Date of Sample : July 1, 2016
Country of Mass-production : China
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model: TYPE1FJ (referred to as the EUT in this report) is a Communication module.

General Specification

Clock frequency (crystal) : 37.4 MHz for communication module
Operating temperature : -30 deg. C to +70 deg. C

Radio Specification

< Communication module >

WLAN (IEEE802.11b/g/n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz - 2462 MHz
Type of Modulation	DSSS, OFDM
Bandwidth & Channel spacing	20 MHz & 5 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 1.2 V / DC 3.3 V
Antenna Type	Monopole Pattern Antenna
Antenna Gain	0.8 dBi

Bluetooth (Ver. 4.1 Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz - 2480 MHz
Type of Modulation	GFSK
Bandwidth & Channel spacing	2 MHz & 2 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 1.2 V / DC 3.3 V
Antenna Type	Monopole Pattern Antenna
Antenna Gain	0.8 dBi

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods IC: RSS-Gen 8.8	FCC: Section 15.207 IC: RSS-Gen 8.8	QP 30.3 dB, 0.15364 MHz, L AV 21.7 dB, 24.94471 MHz/ 24.94499 MHz, L	Complied	-
6dB Bandwidth	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: -	FCC: Section 15.247(a)(2) IC: RSS-247 5.2(1)	See data.	Complied	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: RSS-Gen 6.12	FCC: Section 15.247(b)(3) IC: RSS-247 5.4(4)		Complied	Conducted
Power Density	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: -	FCC: Section 15.247(e) IC: RSS-247 5.2(2)		Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 IC: RSS-Gen 6.13	FCC: Section15.247(d) IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	1.0 dB 2483.500 MHz, AV, Hori.	Complied	Conducted (below 30 MHz)/ Radiated (above 30 MHz) *1)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.
*1) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 DTS Meas Guidance v03r05 12.2.7.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The RF Module has its own regulator.

The RF Module is constantly provided voltage (DC 1.2 / 3.3 V) through the regulator regardless of input voltage.

Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

It is impossible for end users to replace the antenna, because it is soldered on the circuit board. Therefore the equipment complies with the requirement of 15.203/212.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 6.6	IC: -	N/A	-	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.
Ise EMC Lab.

Antenna terminal test Uncertainty (+/-)							
Power meter		Conducted emission and Power density			Conducted emission		Channel power
Below 1 GHz	Above 1 GHz	Below 1 GHz	1 GHz - 3 GHz	3 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz	
0.9 dB	1.0 dB	1.4 dB	1.7 dB	2.8 dB	2.8 dB	2.9 dB	2.6 dB

Frequency range	Conducted emission using AMN(LISN) (+/-)
0.009 – 0.15MHz	3.5 dB
0.15 – 30MHz	3.0 dB

Test distance	Radiated emission (+/-) 9 kHz - 30 MHz
3m	3.8 dB
10m	3.7 dB

Polarity	Radiated emission (Below 1GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	4.7 dB	5.9 dB	5.0 dB	5.1 dB

Radiated emission (Above 1GHz)				
(3 m*) (+/-)		(1 m*) (+/-)		(10 m*) (+/-)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.2 dB	5.4 dB	5.5 dB	5.5 dB	5.4 dB

*Measurement distance

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11b (11b)	11 Mbps, PN9
IEEE 802.11g (11g)	24 Mbps, PN9
IEEE 802.11n 20 MHz BW (11n-20)	MCS 3, PN9
Bluetooth Low Energy (BT LE)	Maximum Packet Size, PRBS9
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel)	
*Power of the EUT was set by the software as follows (power setting value might be different from product specification value); Power settings: 11b/g/n-20: 9 dBm BT LE: 5.5 dBm Software: C59B1 wireless test firmware Ver.1.0	
*This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*Details of Operating mode for WLAN

Test Item	Operating Mode	Tested frequency
Conducted Emission	11n-20 Tx *1)	2412MHz
Spurious Emission (Conducted)	11n-20 Tx *1)	2412MHz
6dB Bandwidth, 99% Occupied Bandwidth	11b Tx 11g Tx 11n-20 Tx	2412MHz 2437MHz 2462MHz
Maximum Peak Output Power, Power Density	11b Tx 11g Tx 11n-20 Tx	2412MHz 2437MHz 2462MHz
Spurious Emission (Radiated)	11b Tx 11n-20 Tx *2)	2412MHz 2437MHz 2462MHz
<p>*1) The test was performed on the mode as a representative, because it had the highest power at antenna terminal test. *2) The test was performed on 11n-20 Tx mode according to "Section 1 of 6 802.11 a/b/g/n testing- Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009, as the 11n-20 Tx mode had higher power than 11g mode at antenna terminal test.</p>		

*Details of Operating mode for BT LE

Test Item	Operating Mode	Tested frequency
Conducted Emission, 6dB Bandwidth, Maximum Peak Output Power, Power Density, 99% Occupied Bandwidth, Spurious Emission (Radiated / Conducted)	BT LE	2402MHz 2440MHz 2480MHz

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

4.2 Configuration and peripherals


[Antenna Terminal Conducted Tests]

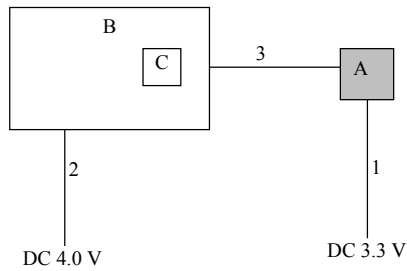

[Conducted Emission Test]

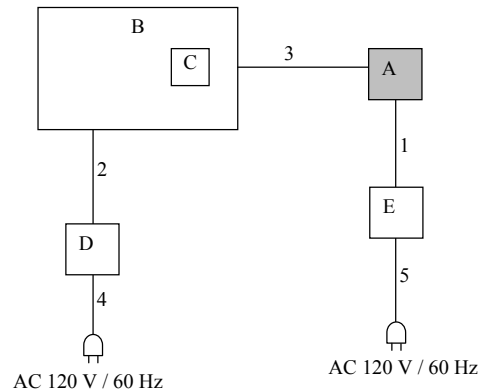

[Radiated Spurious Emission test]

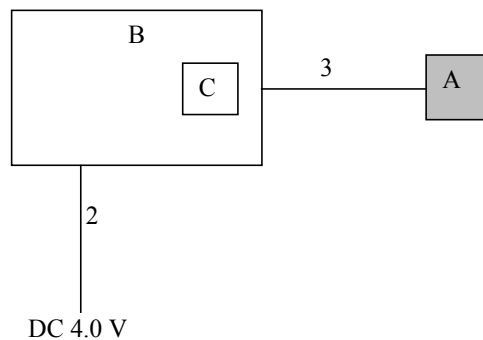

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Communication module	TYPE1FJ	SHIMANO-002	SHIMANO INC.	EUT
B	Jig board	-	-	SHIMANO INC.	-
C	Micro SD Card	SD-C01G	-	Toshiba	-
D	DC Power Supply	PW16-5ADP	17116347	TEXIO	-
E	DC Power Supply	PMC35-2H	13090501	KIKUSUI	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	0.4	Unshielded	Unshielded	-
2	DC Cable	0.4 for CE, AT* 3.0 for RE*	Unshielded	Unshielded	-
3	Signal Cable	0.1 for CE, AT* 0.2 for RE*	Unshielded	Unshielded	-
4	AC Cable	1.5	Unshielded	Unshielded	-
5	AC Cable	1.5	Unshielded	Unshielded	*1)

*CE: Conducted Emission test, AT: Antenna Terminal Conducted Tests, RE: Radiated Spurious Emission test

*1) Conducted Emission test was performed on this AC Cable.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80 cm from a Line Impedance Stabilization Network (LISN) / Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. All unused 50ohm connectors of the LISN (AMN) were resistivity terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector : QP and CISPR AV
Measurement range : 0.15 MHz – 30 MHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "558074 D01 DTS Meas Guidance v03r05".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Average Power Method: RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces If duty cycle was less than 98%, a duty factor was added to the results.	RBW: 100 kHz VBW: 300kHz
Test Distance	3 m	3.75 m *2) (1 GHz – 10 GHz), 1 m *3) (10 GHz – 26.5 GHz)		3.75 m *2) (1 GHz – 10 GHz), 1 m *3) (10 GHz – 26.5 GHz)

*1) Average Power Measurement was performed based on 6.0 & 12.2.5 of "KDB 558074 D01 DTS Meas Guidance v03r05".

*2) Distance Factor: $20 \times \log(3.75 \text{ m} / 3.0 \text{ m}) = 1.94 \text{ dB}$

*3) Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	20 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak/Average *2)	-	Power Meter (Sensor: 50 MHz BW)
Peak Power Density	1.5 times the 6dB Bandwidth	3 kHz	10 kHz	Auto	Peak	Max Hold	Spectrum Analyzer *3)
Conducted Spurious Emission *4)	9kHz to 150kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150kHz to 30MHz	9.1 kHz	27 kHz				

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) Section 10.2 Method PKPSD (peak PSD) of "KDB 558074 D01 DTS Meas Guidance v03r05".

*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was low enough as shown in the chart.
(9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz).

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : **APPENDIX**
Test result : **Pass**

APPENDIX 1: Test data

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Ise EMC Lab. No.4 Semi Anechoic Chamber
Date : 2016/09/02

Report No. : 11343921H
Temp./Humi. : 24deg. C / 50% RH
Engineer : Tomoki Matsui

Mode / Remarks : Tx 11n-20 2412MHz

LIMIT : FCC15.207 QP
FCC15.207 AV

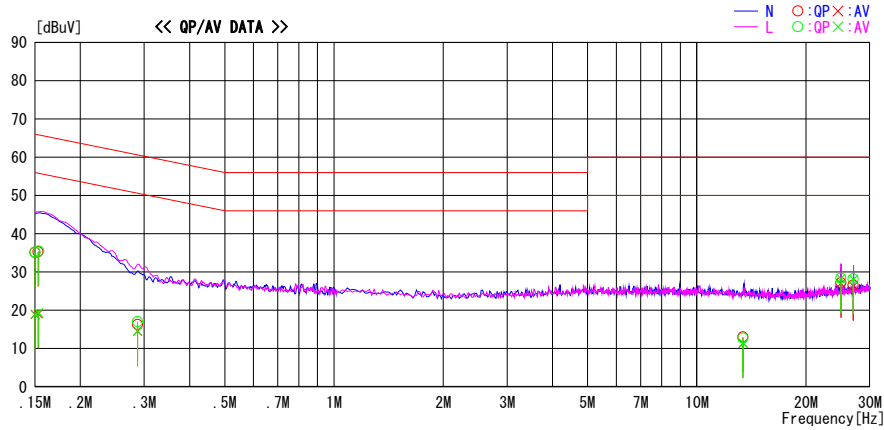

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15000	21.6	5.5	13.5	35.1	19.0	66.0	56.0	30.9	37.0	N	
0.15300	21.8	5.6	13.5	35.3	19.1	65.8	55.8	30.5	36.7	N	
0.28774	2.8	1.0	13.5	16.3	14.5	60.6	50.6	44.3	36.1	N	
13.40541	-1.5	-3.1	14.5	13.0	11.4	60.0	50.0	47.0	38.6	N	
24.94474	12.2	12.1	15.0	27.2	27.1	60.0	50.0	32.8	22.9	N	
26.99949	11.6	11.3	15.0	26.6	26.3	60.0	50.0	33.4	23.7	N	
0.15000	21.7	5.4	13.5	35.2	18.9	66.0	56.0	30.8	37.1	L	
0.15364	22.0	5.8	13.5	35.5	19.3	65.8	55.8	30.3	36.5	L	
0.28774	3.5	1.1	13.5	17.0	14.6	60.6	50.6	43.6	36.0	L	
13.40541	-1.8	-3.2	14.5	12.7	11.3	60.0	50.0	47.3	38.7	L	
24.94471	13.4	13.3	15.0	28.4	28.3	60.0	50.0	31.6	21.7	L	
26.99949	13.2	13.1	15.0	28.2	28.1	60.0	50.0	31.8	21.9	L	

CHART : WITH FACTOR, Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + ATTEN + CABLE)
Except for the above table : adequate margin data below the limits.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Ise EMC Lab. No. 4 Semi Anechoic Chamber
Date : 2016/09/02

Report No. : 11343921H

Temp./Humi. : 24deg. C / 50% RH
Engineer : Tomoki Matsui

Mode / Remarks : Tx BTLE 2402MHz

LIMIT : FCC15.207 QP
FCC15.207 AV

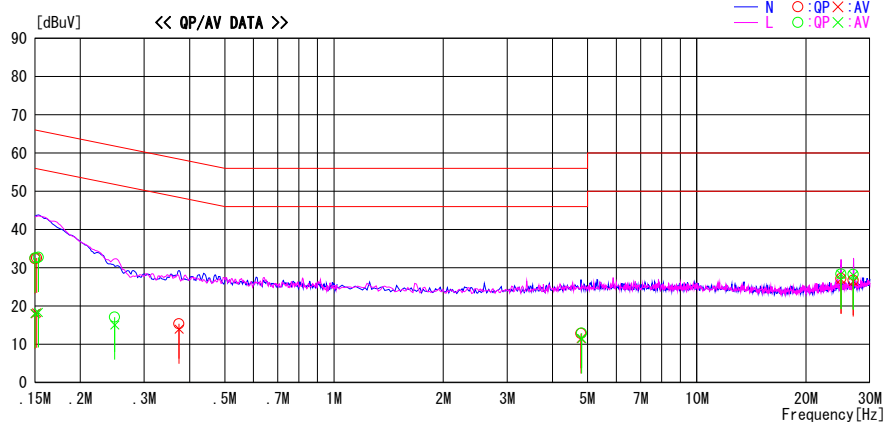


Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15000	18.9	4.5	13.5	32.4	18.0	66.0	56.0	33.6	38.0	N	
0.15000	19.1	4.6	13.5	32.6	18.1	66.0	56.0	33.4	37.9	L	
0.15314	19.2	4.8	13.5	32.7	18.3	65.8	55.8	33.1	37.5	L	
0.15155	19.1	4.7	13.5	32.6	18.2	65.9	55.9	33.3	37.7	N	
0.24860	3.6	1.6	13.5	17.1	15.1	61.8	51.8	44.7	36.7	L	
0.37400	1.9	0.5	13.5	15.4	14.0	58.4	48.4	43.0	34.4	N	
4.79704	-1.2	-2.5	14.0	12.8	11.5	56.0	46.0	43.2	34.5	N	
4.81521	-1.1	-2.5	14.0	12.9	11.5	56.0	46.0	43.1	34.5	L	
24.94499	13.4	13.3	15.0	28.4	28.3	60.0	50.0	31.6	21.7	L	
24.94519	12.2	12.0	15.0	27.2	27.0	60.0	50.0	32.8	23.0	N	
26.99929	13.3	13.1	15.0	28.3	28.1	60.0	50.0	31.7	21.9	L	
26.99929	11.7	11.4	15.0	26.7	26.4	60.0	50.0	33.3	23.6	N	

CHART : WITH FACTOR, Peak hold data. CALCULATION : RESULT = READING + C.F (LISN + ATTEN + CABLE)
Except for the above table : adequate margin data below the limits.

Conducted Emission

Test place : Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No. : 11343921H
Date : September 2, 2016
Temperature / Humidity : 24 deg. C / 50 % RH
Engineer : Tomoki Matsui
Mode : Tx BT LE

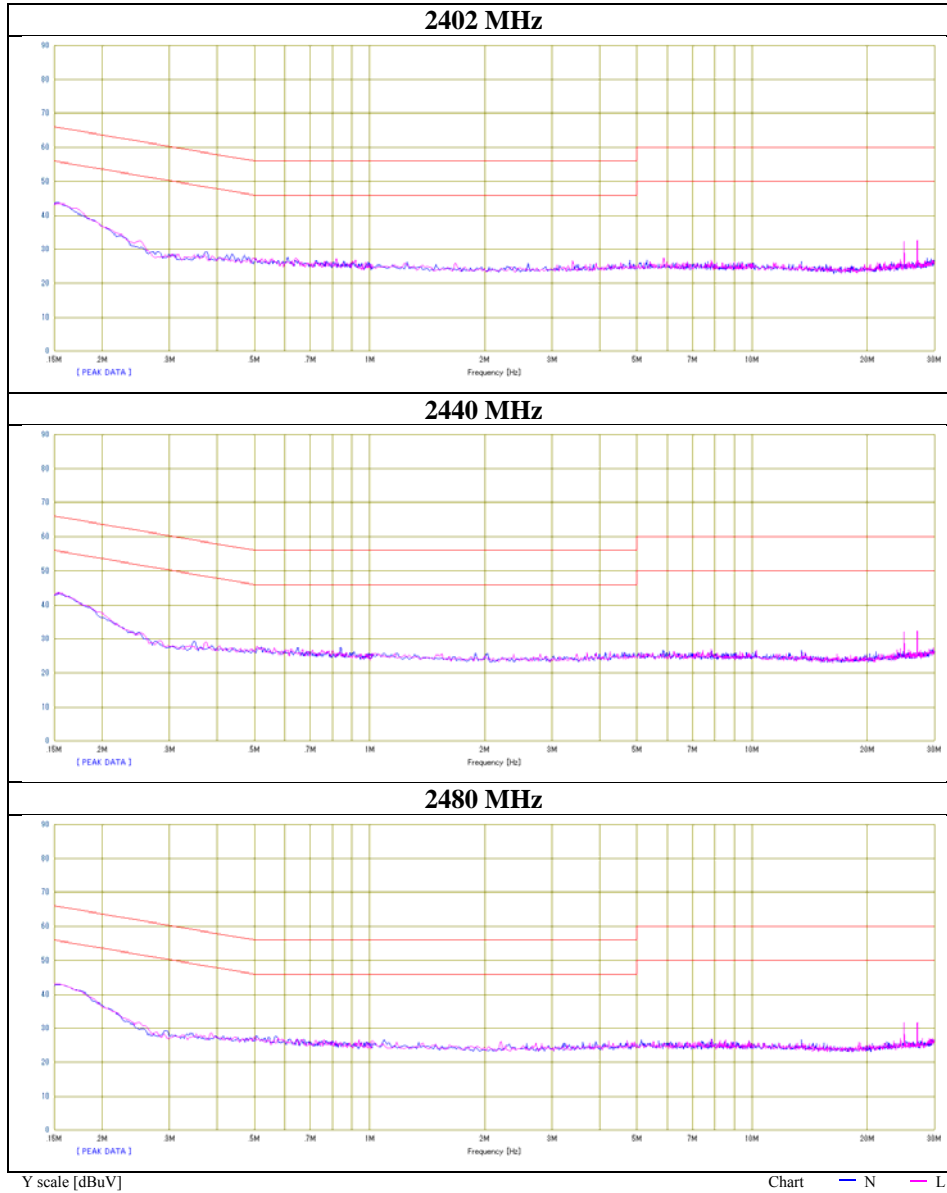

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

6dB Bandwidth


Test place Ise EMC Lab. No.6 Measurement Room
Report No. 11343921H
Date August 29, 2016
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Koji Yamamoto
Mode Tx

Mode	Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
11b	2412	8.500	> 500
	2437	7.726	> 500
	2462	9.249	> 500
11g	2412	15.088	> 500
	2437	14.832	> 500
	2462	15.079	> 500
11n-20	2412	15.037	> 500
	2437	15.092	> 500
	2462	15.067	> 500
BT LE	2402	0.707	> 500
	2440	0.708	> 500
	2480	0.714	> 500

6dB Bandwidth

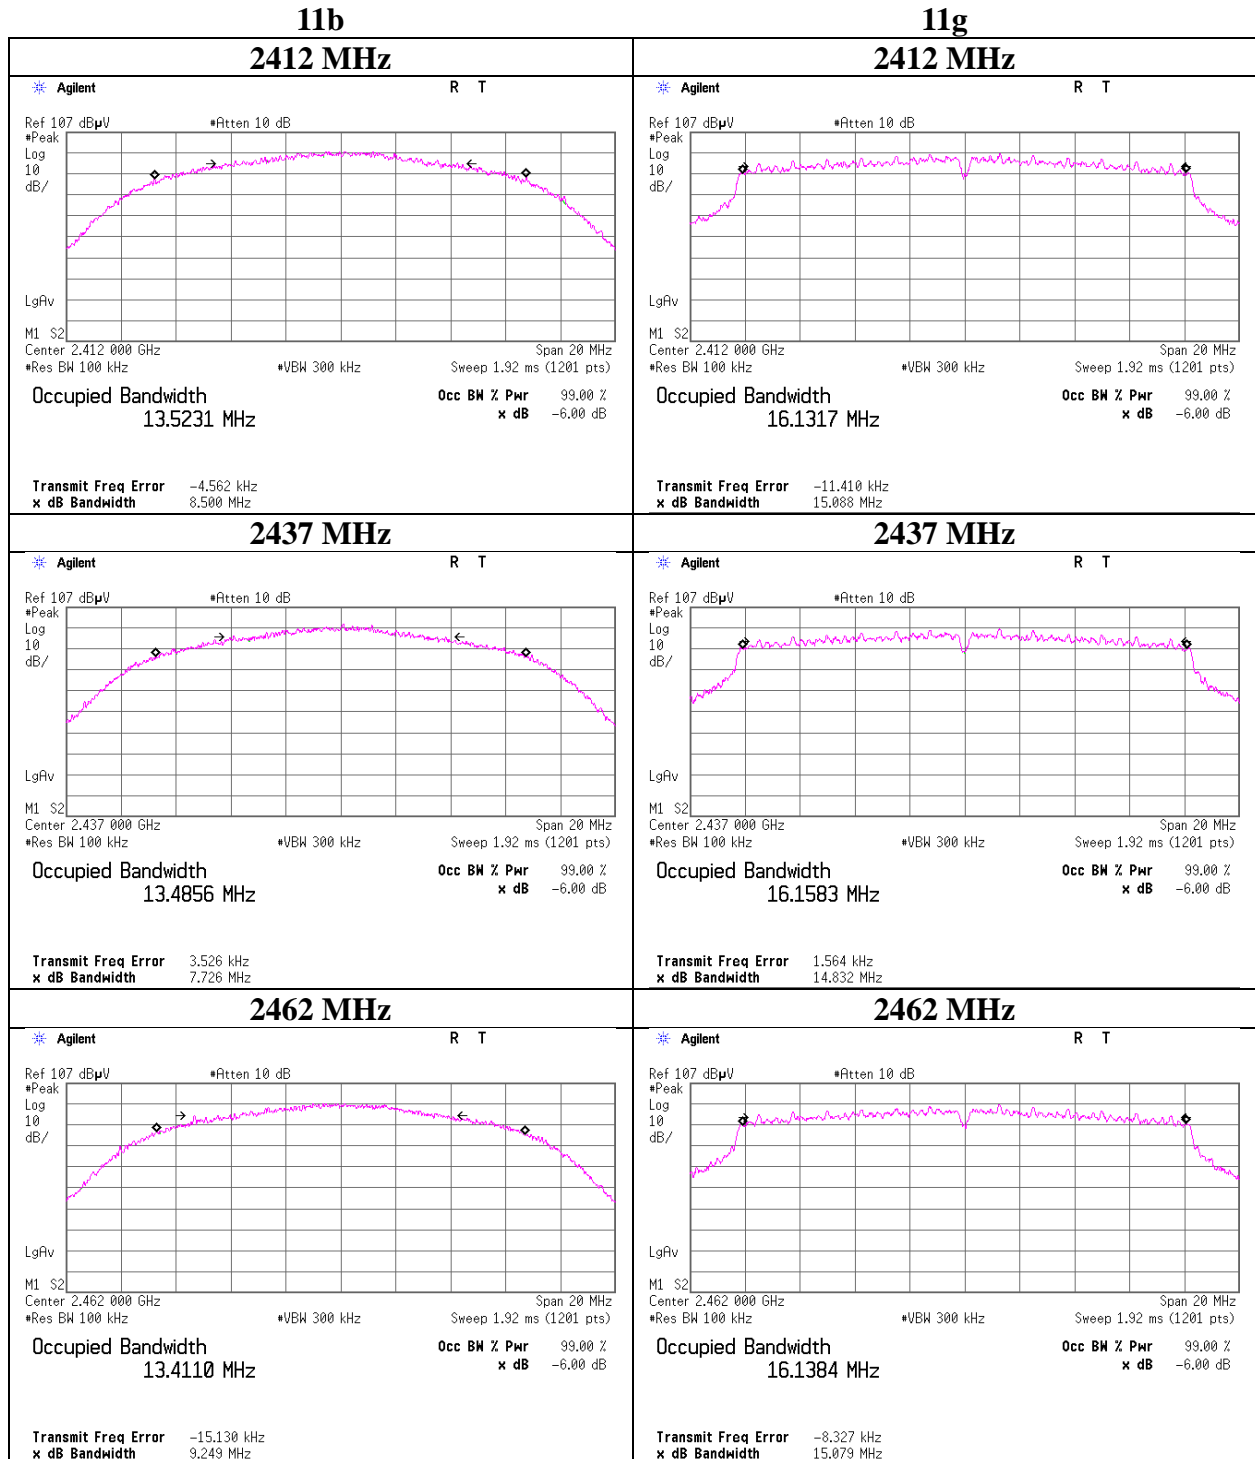

6dB Bandwidth

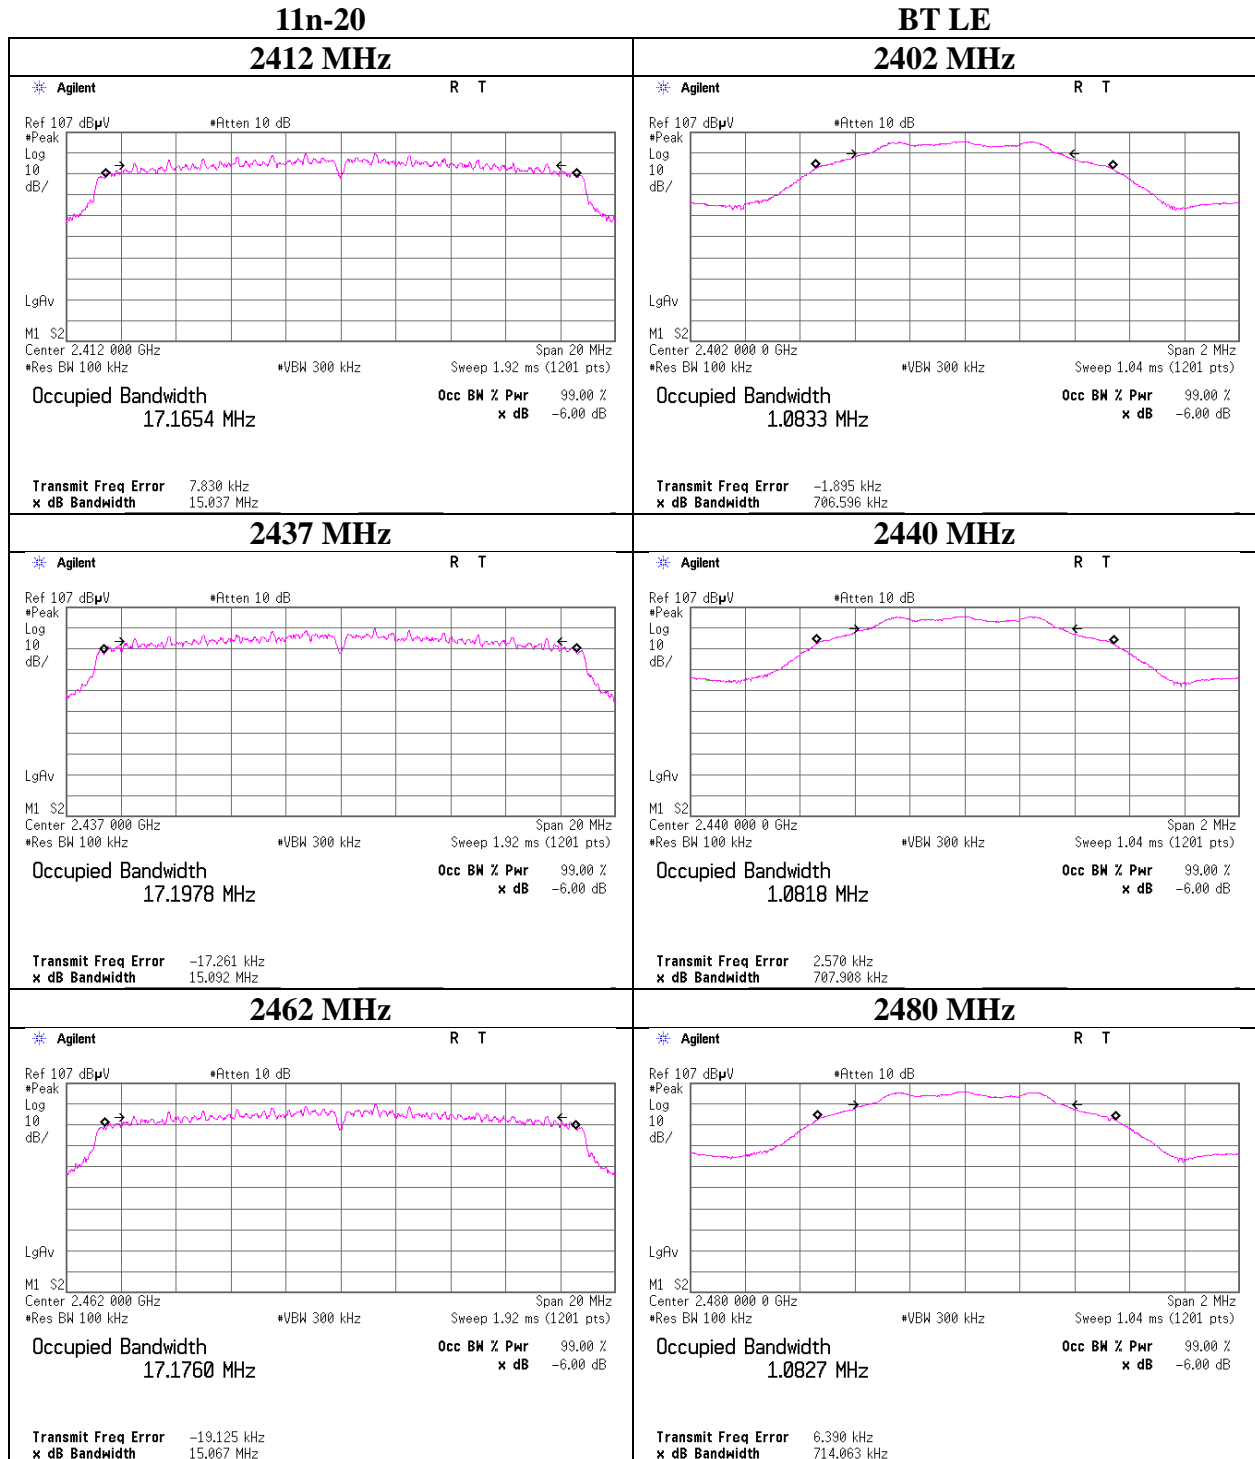

Maximum Peak Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx 11b

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	1.94	0.85	10.03	12.82	19.14	30.00	1000	17.18
2437	1.81	0.85	10.03	12.69	18.58	30.00	1000	17.31
2462	1.69	0.85	10.03	12.57	18.07	30.00	1000	17.43

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437 MHz

Rate	Reading	Remark
[Mbps]	[dBm]	
1	1.36	
2	1.47	
5.5	1.54	
11	1.81	*

*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx 11g

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	8.31	0.85	10.03	19.19	82.99	30.00	1000	10.81
2437	8.26	0.85	10.03	19.14	82.04	30.00	1000	10.86
2462	8.18	0.85	10.03	19.06	80.54	30.00	1000	10.94

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437 MHz

Rate [Mbps]	Reading [dBm]	Remark
6	7.93	
9	8.01	
12	8.12	
18	8.19	
24	8.26	*
36	8.09	
48	8.12	
54	8.13	

*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx 11n-20

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2412	8.43	0.85	10.03	19.31	85.31	30.00	1000	10.69
2437	8.39	0.85	10.03	19.27	84.53	30.00	1000	10.73
2462	8.21	0.85	10.03	19.09	81.10	30.00	1000	10.91

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

2437 MHz

MCS Number	Reading [dBm]	Remark
0	8.22	
1	8.18	
2	8.13	
3	8.39	*
4	8.09	
5	8.37	
6	8.31	
7	8.29	

*: Worst Rate

All comparison were carried out on same frequency and measurement factors.

Maximum Peak Output Power

Test place Ise EMC Lab. No.4 Measurement Room
Report No. 11343921H
Date August 29, 2016
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Koji Yamamoto
Mode Tx BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2402	-4.26	0.70	10.09	6.53	4.50	30.00	1000	23.47
2440	-4.25	0.70	10.09	6.54	4.51	30.00	1000	23.46
2480	-4.15	0.70	10.09	6.64	4.61	30.00	1000	23.36

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Average Output Power
(Reference data for RF Exposure)

Test place : Ise EMC Lab. No.4 Measurement Room
Report No. : 11343921H
Date : August 29, 2016
Temperature / Humidity : 23 deg. C / 57 % RH
Engineer : Koji Yamamoto
Mode : Tx

11b 1Mbps

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-1.34	0.85	10.03	9.54	8.99	0.04	9.58	9.08
2437	-1.46	0.85	10.03	9.42	8.75	0.04	9.46	8.83
2462	-1.69	0.85	10.03	9.19	8.30	0.04	9.23	8.38

11g 6Mbps

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-1.03	0.85	10.03	9.85	9.66	0.28	10.13	10.30
2437	-1.16	0.85	10.03	9.72	9.38	0.28	10.00	10.00
2462	-1.25	0.85	10.03	9.63	9.18	0.28	9.91	9.79

11n20 MCS0

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2412	-1.55	0.85	10.03	9.33	8.57	0.31	9.64	9.20
2437	-1.60	0.85	10.03	9.28	8.47	0.31	9.59	9.10
2462	-1.67	0.85	10.03	9.21	8.34	0.31	9.52	8.95

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Result (Burst power average) = Frame power + Duty factor

The test was performed with condition that obtained the maximum frame power in pre-check.

Average Output Power
(Reference data for RF Exposure)

Test place : Ise EMC Lab. No.4 Measurement Room
Report No. : 11343921H
Date : August 29, 2016
Temperature / Humidity : 23 deg. C / 57 % RH
Engineer : Koji Yamamoto
Mode : Tx

BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
				[dBm]	[mW]		[dBm]	[mW]
2402	-6.48	0.70	10.09	4.31	2.70	1.80	6.11	4.08
2440	-6.49	0.70	10.09	4.30	2.69	1.80	6.10	4.07
2480	-6.28	0.70	10.09	4.51	2.82	1.80	6.31	4.28

Sample Calculation:


Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Result (Burst power average) = Frame power + Duty factor


Burst rate confirmation

Test place : Ise EMC Lab. No.4 and 6 Measurement Room
 Report No. : 11343921H
 Date : August 29, 2016
 Temperature / Humidity : 23 deg. C / 57 % RH
 Engineer : Koji Yamamoto
 Mode : Tx


11b 11 Mbps

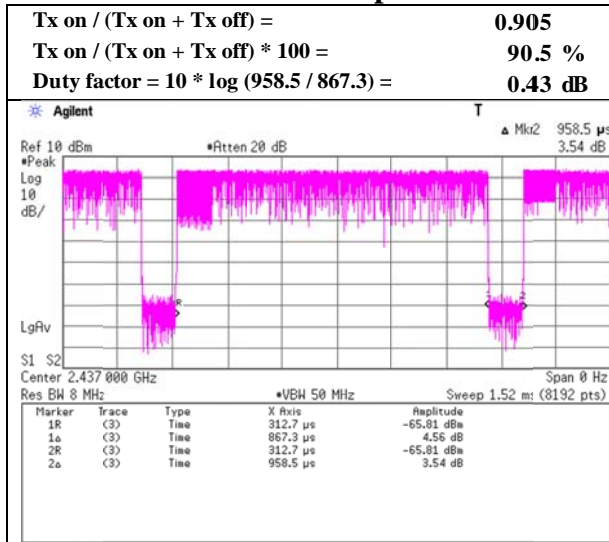


11g 24 Mbps

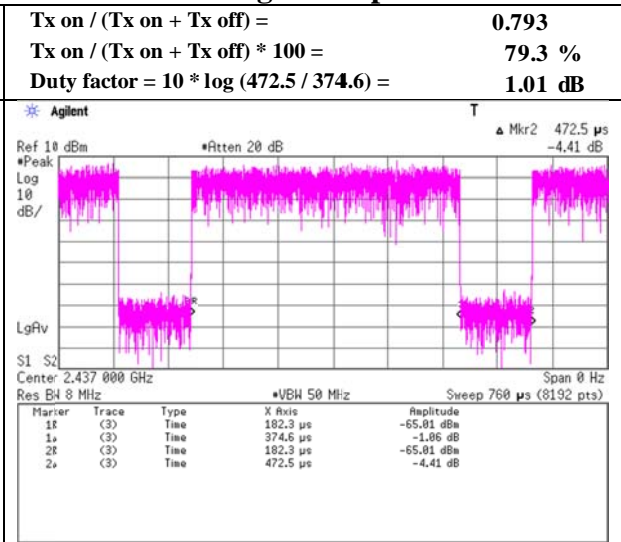

11n-20 MCS 3

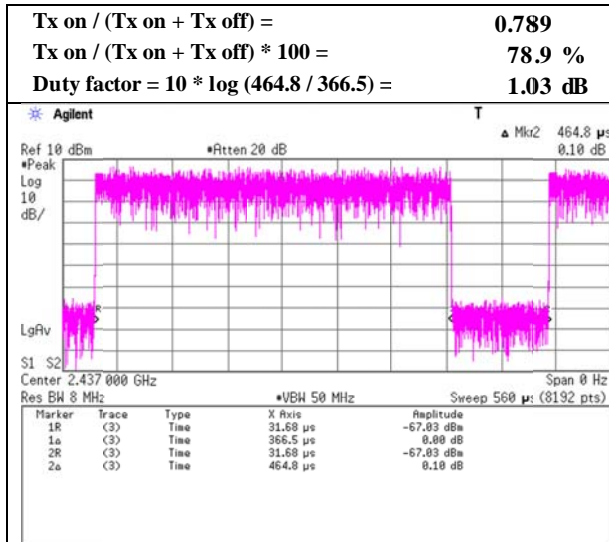


BT LE

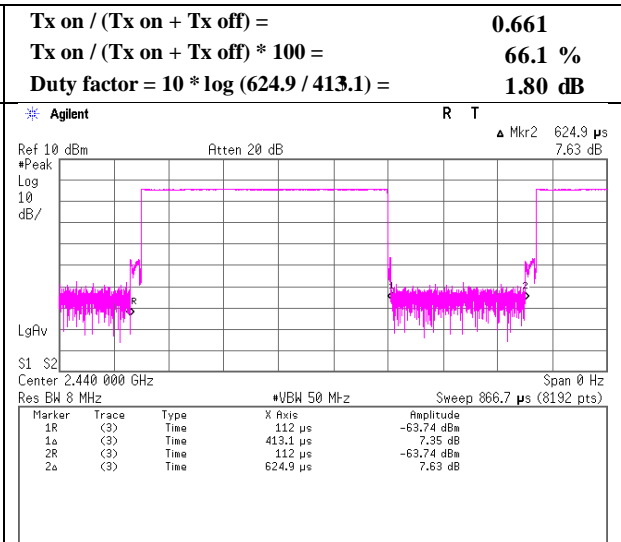


Burst rate confirmation
(Reference data for RF Exposure)

Test place : Ise EMC Lab. No.4 and 6 Measurement Room
Report No. : 11343921H
Date : August 29, 2016
Temperature / Humidity : 23 deg. C / 57 % RH
Engineer : Koji Yamamoto
Mode : Tx


11b 1 Mbps

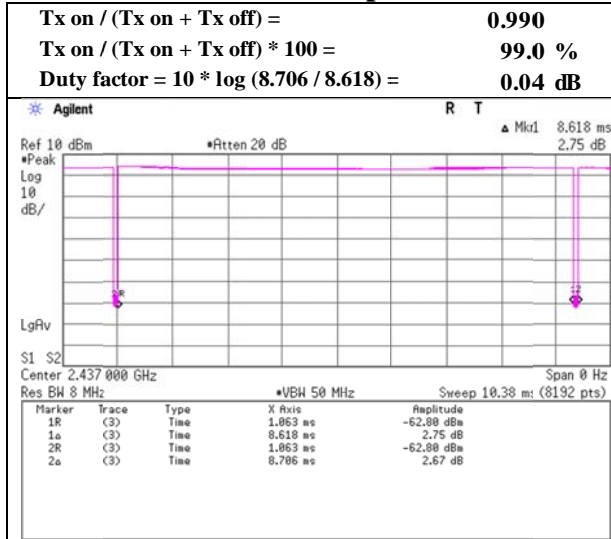


11g 6 Mbps

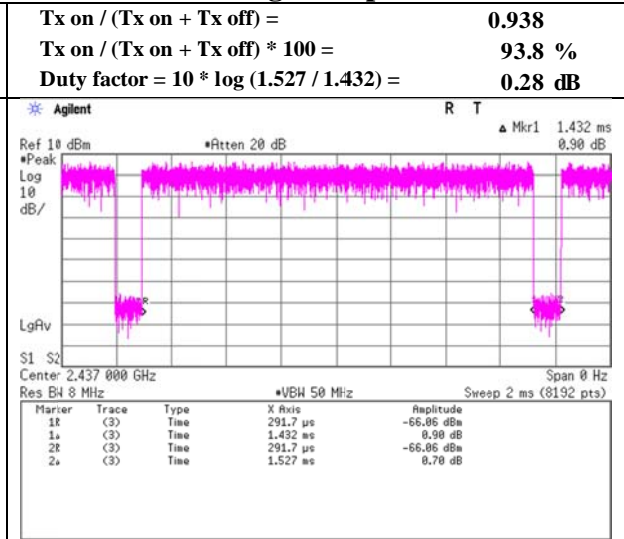

11n-20 MCS 0


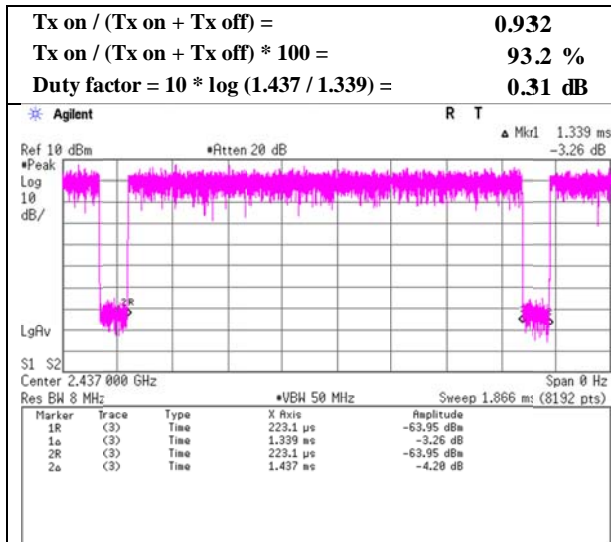


BT LE

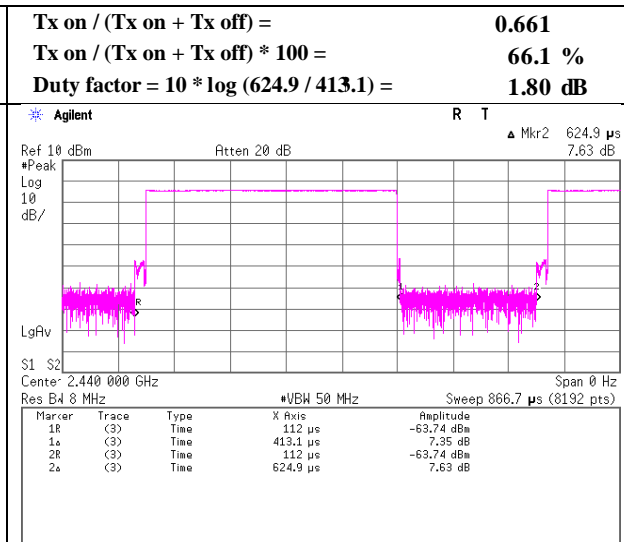

Radiated Spurious Emission (Reference Plot for band-edge)



Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11343921H
Date	August 1, 2016
Temperature / Humidity	22 deg. C / 51 % RH
Engineer	Koji Yamamoto
	(1GHz - 10GHz)
Mode	Tx 11b 2412 MHz

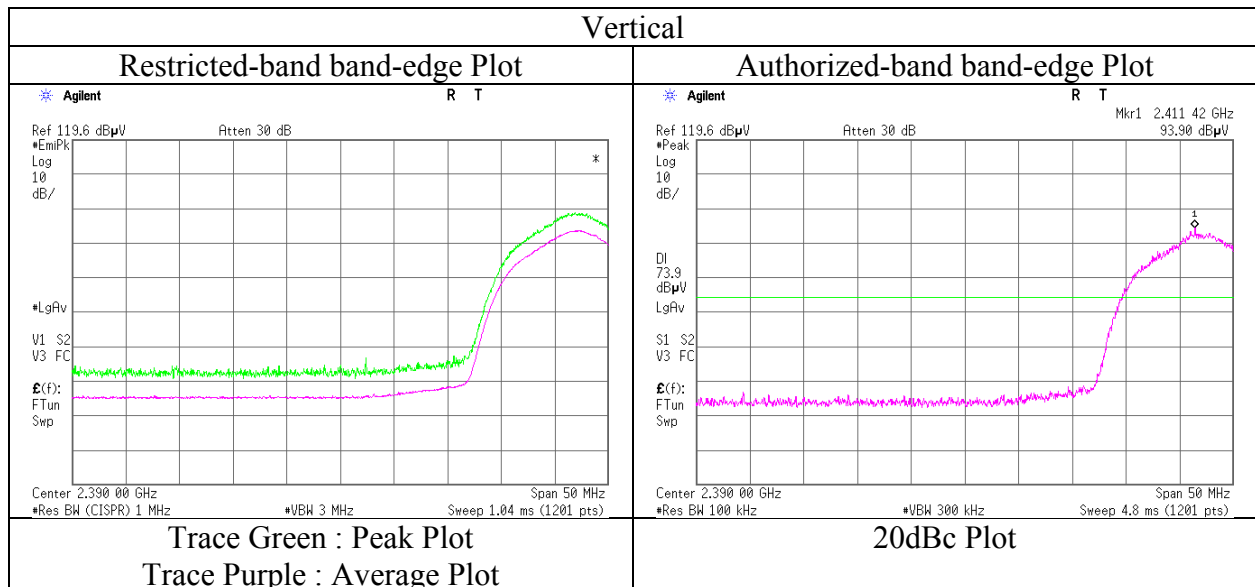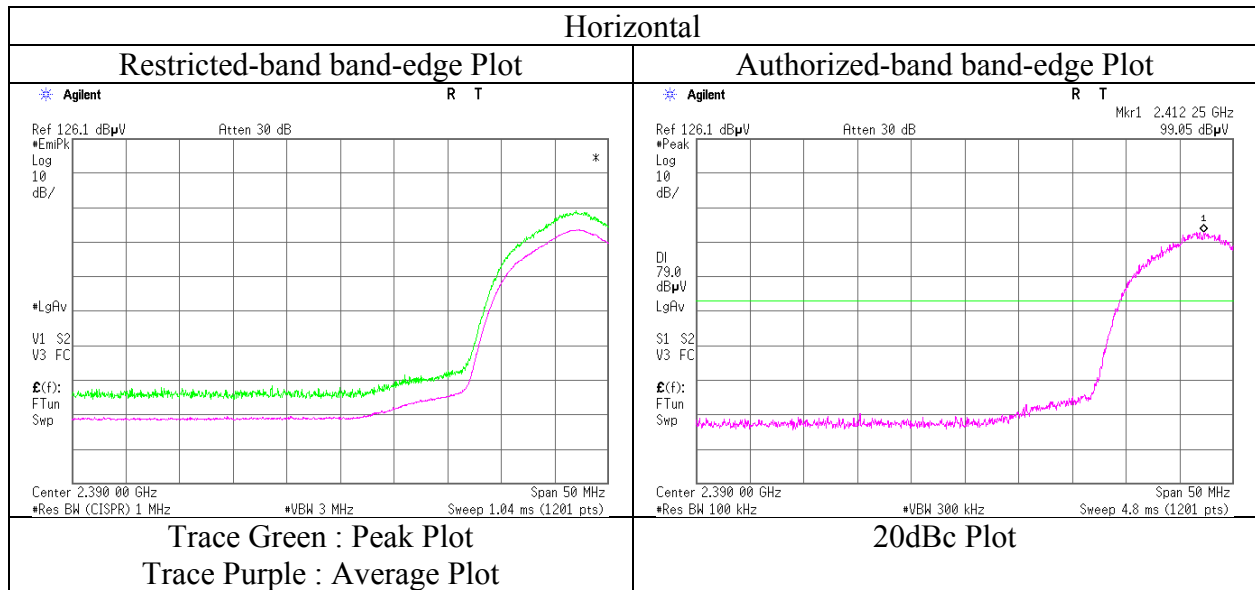

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11343921H
Date August 1, 2016
Temperature / Humidity 22 deg. C / 51 % RH
Engineer Koji Yamamoto
(1GHz - 10GHz)
Mode Tx 11b 2462 MHz

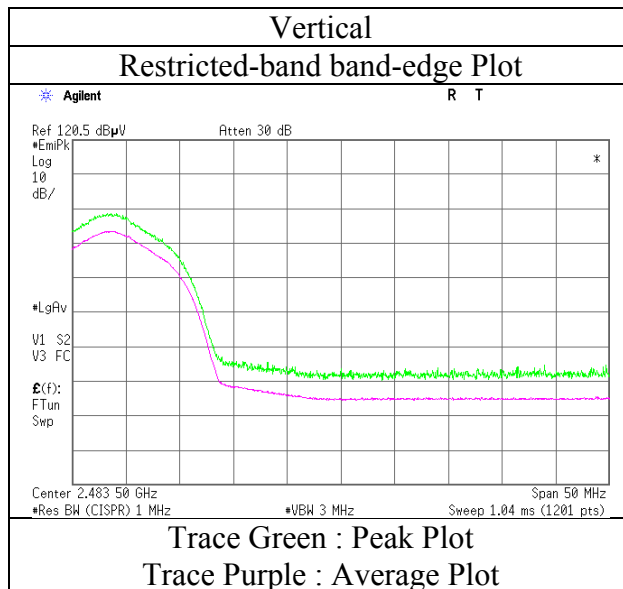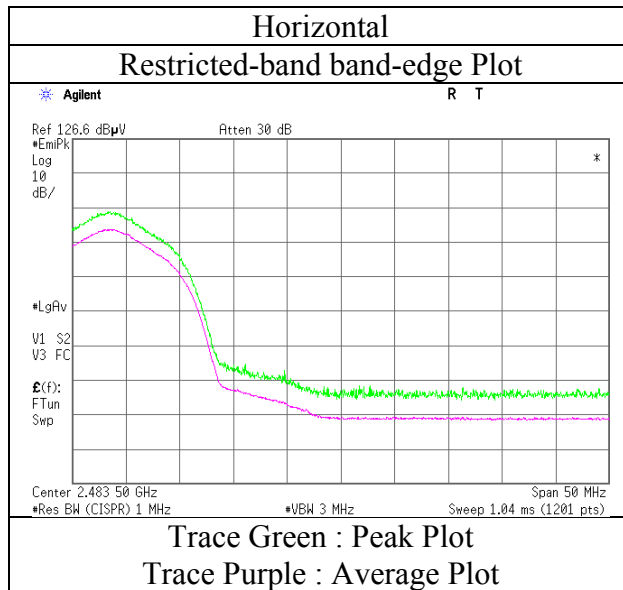

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.	
Report No.	11343921H	
Semi Anechoic Chamber	No.2	No.4
Date	August 1, 2016	September 2, 2016
Temperature / Humidity	20 deg. C / 63 % RH	24 deg. C / 50 % RH
Engineer	Keisuke Kawamura (Above 1GHz)	Tomoki Matsui (Below 1GHz)
Mode	Tx 11n-20 2412 MHz	

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	71.998	QP	35.8	6.2	7.9	32.1	-	17.8	40.0	22.2	
Hori	144.000	QP	37.9	14.7	8.7	32.0	-	29.3	43.5	14.2	
Hori	512.999	QP	43.2	17.8	11.1	32.2	-	39.9	46.0	6.1	
Hori	656.497	QP	35.0	19.5	11.9	32.2	-	34.2	46.0	11.8	
Hori	731.824	QP	27.2	20.1	12.2	32.0	-	27.5	46.0	18.5	
Hori	769.494	QP	30.4	20.5	12.4	31.8	-	31.5	46.0	14.5	
Hori	2390.000	PK	65.7	27.6	5.2	34.8	-	63.7	73.9	10.2	
Hori	3617.983	PK	52.8	28.8	6.0	33.9	-	53.7	73.9	20.2	
Hori	4824.000	PK	42.3	31.6	7.5	34.1	-	47.3	73.9	26.6	Floor noise
Hori	7236.000	PK	43.3	36.2	8.7	34.1	-	54.1	73.9	19.8	Floor noise
Hori	2390.000	AV	52.5	27.6	5.2	34.8	1.0	51.5	53.9	2.4	*1)
Hori	3617.983	AV	49.8	28.8	6.0	33.9	1.0	51.7	53.9	2.2	
Hori	4824.000	AV	32.1	31.6	7.5	34.1	-	37.1	53.9	16.8	Floor noise
Hori	7236.000	AV	33.6	36.2	8.7	34.1	-	44.4	53.9	9.5	Floor noise
Vert	71.998	QP	46.7	6.2	7.9	32.1	-	28.7	40.0	11.3	
Vert	143.997	QP	38.8	14.7	8.7	32.0	-	30.2	43.5	13.3	
Vert	216.032	QP	35.6	11.5	9.3	31.9	-	24.5	46.0	21.5	
Vert	512.991	QP	42.0	17.8	11.1	32.2	-	38.7	46.0	7.3	
Vert	642.209	QP	30.3	19.4	11.8	32.2	-	29.3	46.0	16.7	
Vert	716.299	QP	28.6	19.9	12.2	32.1	-	28.6	46.0	17.4	
Vert	2390.000	PK	62.0	27.6	5.2	34.8	-	60.0	73.9	13.9	
Vert	3617.983	PK	53.5	28.8	6.0	33.9	-	54.4	73.9	19.5	
Vert	4824.000	PK	42.2	31.6	7.5	34.1	-	47.2	73.9	26.7	Floor noise
Vert	7236.000	PK	43.7	36.2	8.7	34.1	-	54.5	73.9	19.4	Floor noise
Vert	2390.000	AV	48.1	27.6	5.2	34.8	1.0	47.1	53.9	6.8	*1)
Vert	3617.983	AV	50.9	28.8	6.0	33.9	1.0	52.8	53.9	1.1	
Vert	4824.000	AV	31.9	31.6	7.5	34.1	-	36.9	53.9	17.0	Floor noise
Vert	7236.000	AV	33.5	36.2	8.7	34.1	-	44.3	53.9	9.6	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor
*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.0 m / 3.0 m) = 2.5 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB



20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	97.9	27.6	5.2	34.7	96.0	-	-	Carrier
Hori	2400.000	PK	63.7	27.6	5.2	34.8	61.7	76.0	14.3	
Hori	9648.000	PK	40.0	38.5	9.5	34.8	53.2	76.0	22.8	
Vert	2412.000	PK	93.3	27.6	5.2	34.7	91.4	-	-	Carrier
Vert	2400.000	PK	59.7	27.6	5.2	34.8	57.7	71.4	13.7	
Vert	9648.000	PK	42.0	38.5	9.5	34.8	55.2	71.4	16.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Radiated Spurious Emission
(Reference Plot for band-edge)



Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 1, 2016
Temperature / Humidity : 20 deg. C / 63 % RH
Engineer : Keisuke Kawamura
Mode : Tx 11n-20 2412 MHz

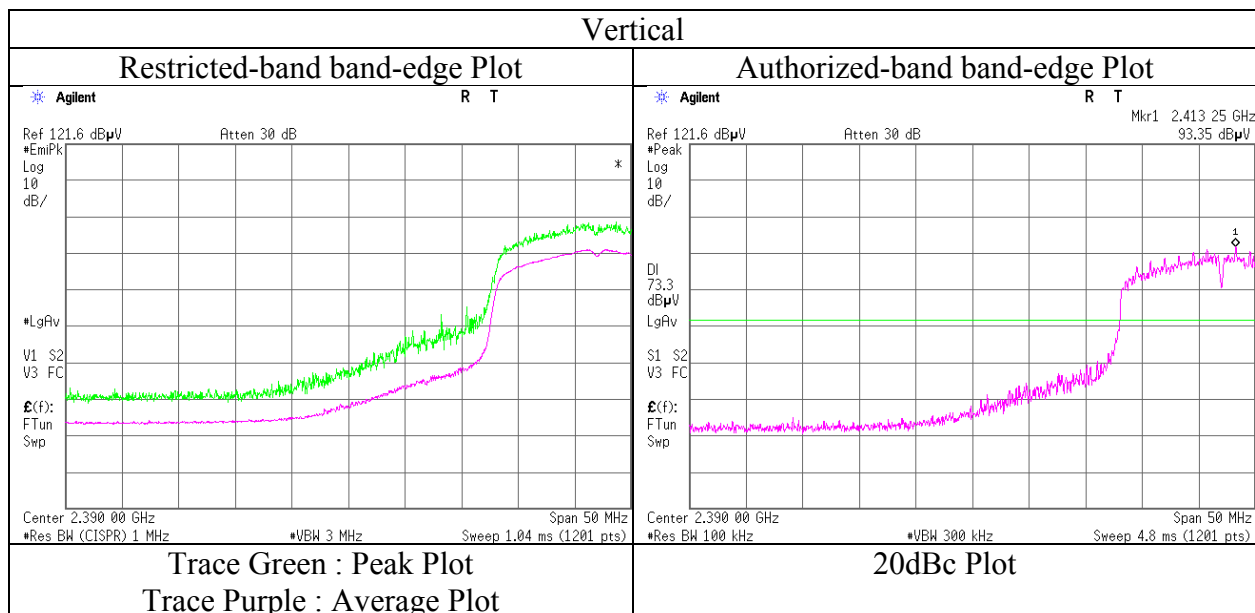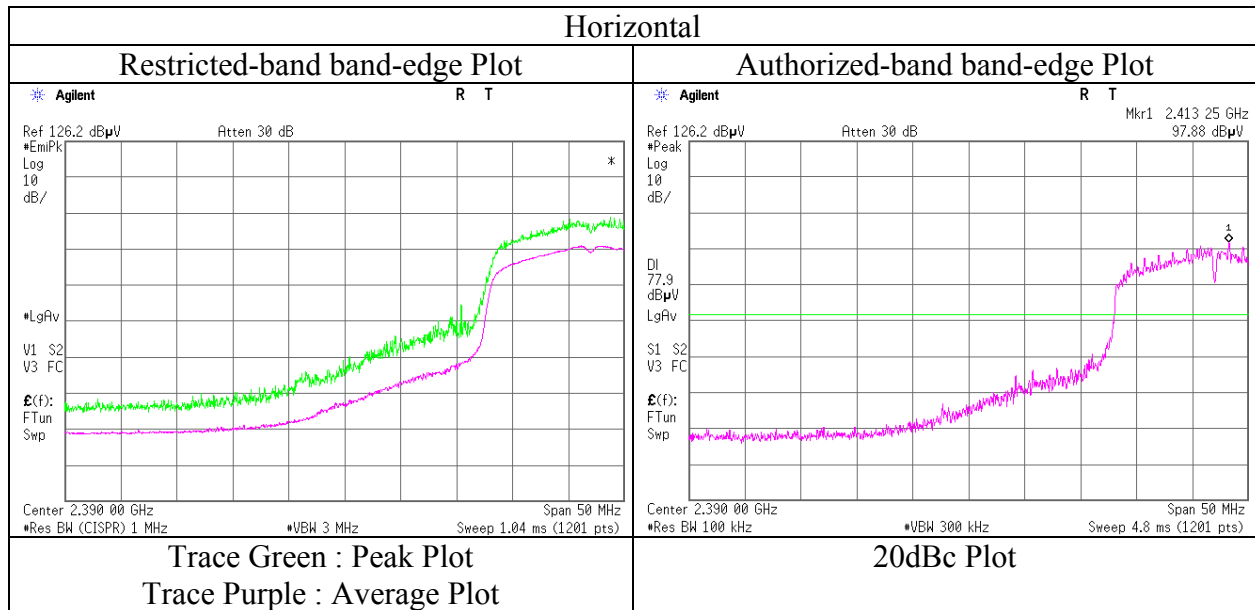

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)

Test place	Ise EMC Lab.	
Report No.	11343921H	
Semi Anechoic Chamber	No.2	No.4
Date	August 1, 2016	September 2, 2016
Temperature / Humidity	20 deg. C / 63 % RH	24 deg. C / 50 % RH
Engineer	Keisuke Kawamura (Above 1GHz)	Tomoki Matsui (Below 1GHz)
Mode	Tx 11n-20 2412 MHz	

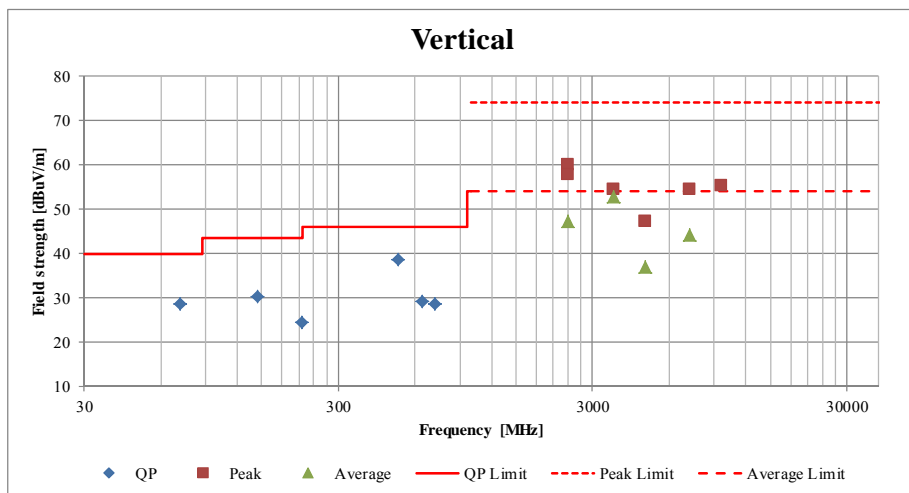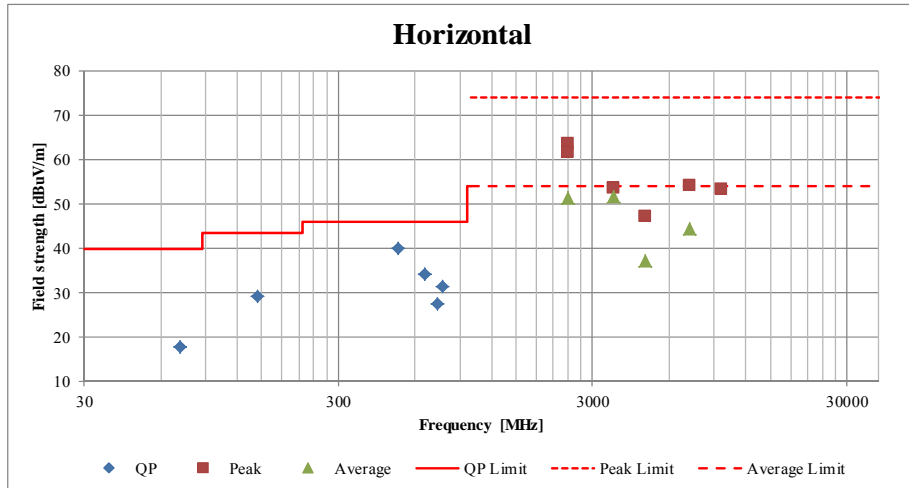

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 and No.1 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 1, 2016
Temperature / Humidity : 20 deg. C / 63 % RH
Engineer : Keisuke Kawamura
(Above 1GHz)
Mode : Tx 11n-20 2437 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3655.500	PK	51.3	28.9	6.0	33.9	-	52.3	73.9	21.6	
Hori	4874.000	PK	42.3	31.7	7.5	34.1	-	47.4	73.9	26.5	Floor noise
Hori	7311.000	PK	43.3	36.3	8.7	34.1	-	54.2	73.9	19.7	Floor noise
Hori	3655.500	AV	48.2	28.9	6.0	33.9	-	49.2	53.9	4.7	
Hori	4874.000	AV	32.1	31.7	7.5	34.1	-	37.2	53.9	16.7	Floor noise
Hori	7311.000	AV	33.6	36.3	8.7	34.1	-	44.5	53.9	9.4	Floor noise
Vert	3655.500	PK	52.6	28.9	6.0	33.9	-	53.6	73.9	20.3	
Vert	4874.000	PK	42.2	31.7	7.5	34.1	-	47.3	73.9	26.6	Floor noise
Vert	7311.000	PK	43.7	36.3	8.7	34.1	-	54.6	73.9	19.3	Floor noise
Vert	3655.500	AV	50.0	28.9	6.0	33.9	-	51.0	53.9	2.9	
Vert	4874.000	AV	31.9	31.7	7.5	34.1	-	37.0	53.9	16.9	Floor noise
Vert	7311.000	AV	33.5	36.3	8.7	34.1	-	44.4	53.9	9.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2437.000	PK	97.6	27.7	5.2	34.7	95.8	-	-	Carrier
Hori	9748.000	PK	41.8	38.5	9.6	34.8	55.1	75.8	20.7	
Vert	2437.000	PK	91.8	27.7	5.2	34.7	90.0	-	-	Carrier
Vert	9748.000	PK	45.7	38.5	9.6	34.8	59.0	70.0	11.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 1, 2016
Temperature / Humidity : 20 deg. C / 63 % RH
Engineer : Keisuke Kawamura
(Above 1GHz)
Mode : Tx 11n-20 2462 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	69.1	27.7	5.2	34.7	-	67.3	73.9	6.6	
Hori	3693.000	PK	50.4	29.0	6.1	33.9	-	51.6	73.9	22.3	
Hori	4924.000	PK	42.3	31.9	7.4	34.1	-	47.5	73.9	26.4	Floor noise
Hori	7386.000	PK	43.3	36.4	8.6	34.1	-	54.2	73.9	19.7	Floor noise
Hori	2483.500	AV	53.7	27.7	5.2	34.7	1.0	52.9	53.9	1.0	*1)
Hori	3693.000	AV	46.9	29.0	6.1	33.9	-	48.1	53.9	5.8	
Hori	4924.000	AV	32.1	31.9	7.4	34.1	-	37.3	53.9	16.6	Floor noise
Hori	7386.000	AV	33.6	36.4	8.6	34.1	-	44.5	53.9	9.4	Floor noise
Vert	2483.500	PK	61.3	27.7	5.2	34.7	-	59.5	73.9	14.4	
Vert	3693.000	PK	52.4	29.0	6.1	33.9	-	53.6	73.9	20.3	
Vert	4924.000	PK	42.2	31.9	7.4	34.1	-	47.4	73.9	26.5	Floor noise
Vert	7386.000	PK	43.7	36.4	8.6	34.1	-	54.6	73.9	19.3	Floor noise
Vert	2483.500	AV	46.8	27.7	5.2	34.7	1.0	46.0	53.9	7.9	*1)
Vert	3693.000	AV	49.2	29.0	6.1	33.9	-	50.4	53.9	3.5	
Vert	4924.000	AV	31.9	31.9	7.4	34.1	-	37.1	53.9	16.8	Floor noise
Vert	7386.000	AV	33.5	36.4	8.6	34.1	-	44.4	53.9	9.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$

10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2462.000	PK	98.0	27.7	5.2	34.7	96.2	-	-	Carrier
Hori	9848.000	PK	42.7	38.5	9.6	34.9	55.9	76.2	20.3	
Vert	2462.000	PK	92.5	27.7	5.2	34.7	90.7	-	-	Carrier
Vert	9848.000	PK	45.6	38.5	9.6	34.9	58.8	70.7	11.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11343921H
Date August 1, 2016
Temperature / Humidity 20 deg. C / 63 % RH
Engineer Keisuke Kawamura
Mode Tx 11n-20 2462 MHz

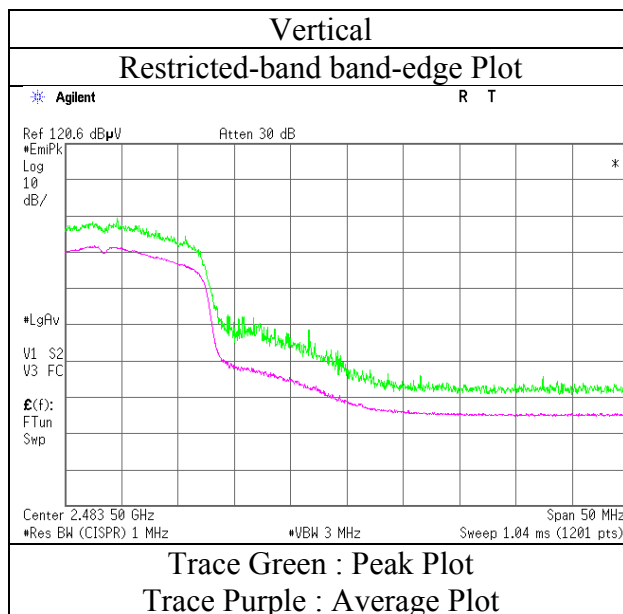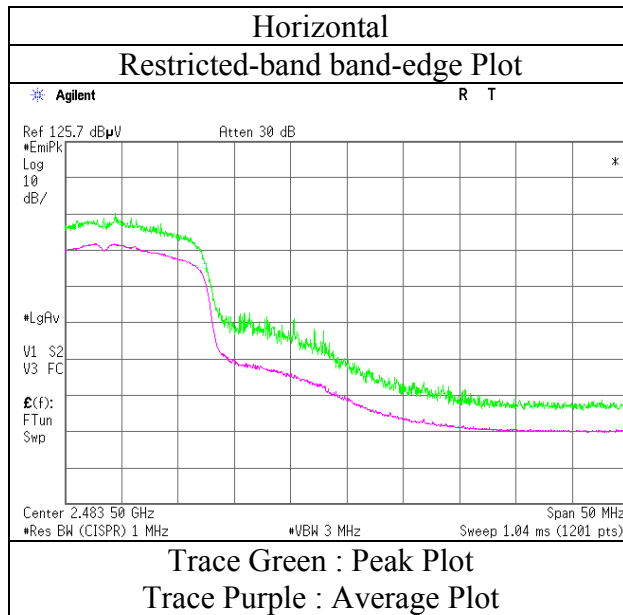

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 and No.4 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 17, 2016
Temperature / Humidity : 22 deg. C / 48 % RH
Engineer : Takafumi Noguchi
Mode : Tx BT LE 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	76.920	QP	23.5	6.2	7.8	32.2	-	5.3	40.0	34.7	
Hori	218.578	QP	27.5	11.8	9.2	32.0	-	16.5	46.0	29.5	
Hori	222.612	QP	30.5	11.9	9.3	32.0	-	19.7	46.0	26.3	
Hori	226.668	QP	31.0	12.0	9.3	32.0	-	20.3	46.0	25.7	
Hori	299.199	QP	29.0	13.5	9.9	31.9	-	20.5	46.0	25.5	
Hori	336.600	QP	26.7	14.3	10.2	31.9	-	19.3	46.0	26.7	
Hori	2390.000	PK	42.4	27.9	6.8	32.1	-	45.0	73.9	28.9	
Hori	4804.000	PK	42.0	32.8	9.2	31.3	-	52.7	73.9	21.2	
Hori	7206.000	PK	41.4	36.8	8.9	32.6	-	54.5	73.9	19.4	Floor noise
Hori	9608.000	PK	41.0	38.1	9.6	32.6	-	56.1	73.9	17.8	Floor noise
Hori	2390.000	AV	33.1	27.9	6.8	32.1	1.8	37.5	53.9	16.4	*1)
Hori	4804.000	AV	33.2	32.8	9.2	31.3	1.8	45.7	53.9	8.2	
Hori	7206.000	AV	32.8	36.8	8.9	32.6	-	45.9	53.9	8.0	Floor noise
Hori	9608.000	AV	31.9	38.1	9.6	32.6	-	47.0	53.9	6.9	Floor noise
Vert	76.920	QP	24.9	6.2	7.8	32.2	-	6.7	40.0	33.3	
Vert	218.578	QP	26.3	11.8	9.2	32.0	-	15.3	46.0	30.7	
Vert	222.612	QP	26.4	11.9	9.3	32.0	-	15.6	46.0	30.4	
Vert	226.668	QP	26.8	12.0	9.3	32.0	-	16.1	46.0	29.9	
Vert	299.199	QP	28.2	13.5	9.9	31.9	-	19.7	46.0	26.3	
Vert	336.600	QP	23.0	14.3	10.2	31.9	-	15.6	46.0	30.4	
Vert	2390.000	PK	42.4	27.9	6.8	32.1	-	45.0	73.9	28.9	
Vert	4804.000	PK	43.4	32.8	9.2	31.3	-	54.1	73.9	19.8	
Vert	7206.000	PK	41.4	36.8	8.9	32.6	-	54.5	73.9	19.4	Floor noise
Vert	9608.000	PK	41.0	38.1	9.6	32.6	-	56.1	73.9	17.8	Floor noise
Vert	2390.000	AV	33.1	27.9	6.8	32.1	1.8	37.5	53.9	16.4	*1)
Vert	4804.000	AV	33.9	32.8	9.2	31.3	1.8	46.4	53.9	7.5	
Vert	7206.000	AV	32.7	36.8	8.9	32.6	-	45.8	53.9	8.1	Floor noise
Vert	9608.000	AV	32.0	38.1	9.6	32.6	-	47.1	53.9	6.8	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.53\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	97.1	28.0	6.8	32.1	99.8	-	-	Carrier
Hori	2400.000	PK	41.9	28.0	6.8	32.1	44.6	79.8	35.2	
Vert	2402.000	PK	96.5	28.0	6.8	32.1	99.2	-	-	Carrier
Vert	2400.000	PK	41.4	28.0	6.8	32.1	44.1	79.2	35.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11343921H
Date	August 17, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Takafumi Noguchi
Mode	Tx BT LE 2402 MHz

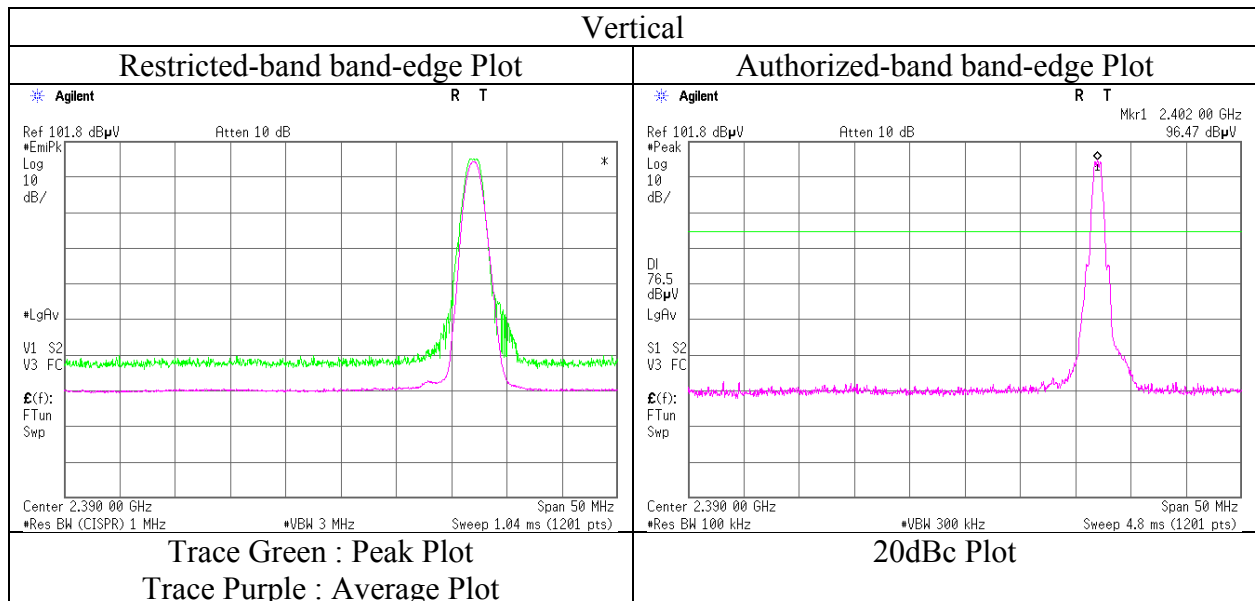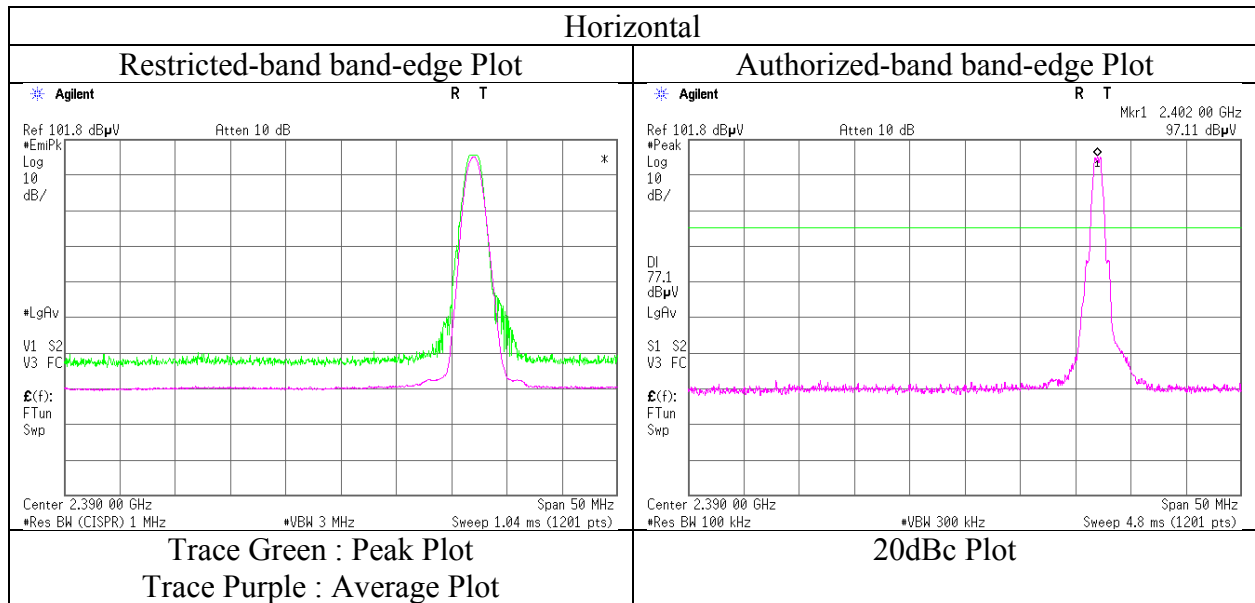

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 and No.4 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 17, 2016
Temperature / Humidity : 22 deg. C / 48 % RH
Engineer : Takafumi Noguchi
Mode : Tx BT LE 2440 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.873	QP	25.1	5.9	7.7	32.2	-	6.5	40.0	33.5	
Hori	202.353	QP	26.9	11.4	9.1	32.0	-	15.4	43.5	28.1	
Hori	222.612	QP	23.0	11.9	9.3	32.0	-	12.2	46.0	33.8	
Hori	226.668	QP	23.5	12.0	9.3	32.0	-	12.8	46.0	33.2	
Hori	299.199	QP	25.8	13.5	9.9	31.9	-	17.3	46.0	28.7	
Hori	336.600	QP	22.4	14.3	10.2	31.9	-	15.0	46.0	31.0	
Hori	4880.000	PK	42.6	33.1	9.2	31.3	-	53.6	73.9	20.3	
Hori	7320.000	PK	40.7	36.8	8.9	32.6	-	53.8	73.9	20.1	Floor noise
Hori	9760.000	PK	40.7	38.2	9.6	32.7	-	55.8	73.9	18.1	Floor noise
Hori	4880.000	AV	33.9	33.1	9.2	31.3	1.8	46.7	53.9	7.2	
Hori	7320.000	AV	32.3	36.8	8.9	32.6	-	45.4	53.9	8.5	Floor noise
Hori	9760.000	AV	31.7	38.2	9.6	32.7	-	46.8	53.9	7.1	Floor noise
Vert	72.873	QP	31.0	5.9	7.7	32.2	-	12.4	40.0	27.6	
Vert	202.353	QP	26.7	11.4	9.1	32.0	-	15.2	43.5	28.3	
Vert	222.612	QP	22.7	11.9	9.3	32.0	-	11.9	46.0	34.1	
Vert	226.668	QP	23.0	12.0	9.3	32.0	-	12.3	46.0	33.7	
Vert	299.199	QP	25.6	13.5	9.9	31.9	-	17.1	46.0	28.9	
Vert	336.600	QP	22.1	14.3	10.2	31.9	-	14.7	46.0	31.3	
Vert	4880.000	PK	42.7	33.1	9.2	31.3	-	53.7	73.9	20.2	
Vert	7320.000	PK	40.7	36.8	8.9	32.6	-	53.8	73.9	20.1	Floor noise
Vert	9760.000	PK	41.0	38.2	9.6	32.7	-	56.1	73.9	17.8	Floor noise
Vert	4880.000	AV	34.1	33.1	9.2	31.3	1.8	46.9	53.9	7.0	
Vert	7320.000	AV	32.4	36.8	8.9	32.6	-	45.5	53.9	8.4	Floor noise
Vert	9760.000	AV	31.9	38.2	9.6	32.7	-	47.0	53.9	6.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.53\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 and No.4 Semi Anechoic Chamber
Report No. : 11343921H
Date : August 17, 2016
Temperature / Humidity : 22 deg. C / 48 % RH
Engineer : Takafumi Noguchi
Mode : Tx BT LE 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	72.842	QP	24.9	5.9	7.7	32.2	-	6.3	40.0	33.7	
Hori	202.353	QP	22.6	11.4	9.1	32.0	-	11.1	43.5	32.4	
Hori	230.769	QP	29.6	12.1	9.3	32.0	-	19.0	46.0	27.0	
Hori	234.791	QP	29.0	12.2	9.4	32.0	-	18.6	46.0	27.4	
Hori	299.199	QP	27.0	13.5	9.9	31.9	-	18.5	46.0	27.5	
Hori	336.600	QP	23.7	14.3	10.2	31.9	-	16.3	46.0	29.7	
Hori	2483.500	PK	52.2	28.1	6.9	32.1	-	55.1	73.9	18.8	
Hori	4960.000	PK	44.0	33.4	9.2	31.2	-	55.4	73.9	18.5	
Hori	7440.000	PK	41.3	36.8	9.0	32.7	-	54.4	73.9	19.5	Floor noise
Hori	9920.000	PK	41.3	38.3	9.7	32.8	-	56.5	73.9	17.4	Floor noise
Hori	2483.500	AV	39.3	28.1	6.9	32.1	1.8	44.0	53.9	9.9	*1)
Hori	4960.000	AV	35.3	33.4	9.2	31.2	1.8	48.5	53.9	5.4	
Hori	7440.000	AV	32.5	36.8	9.0	32.7	-	45.6	53.9	8.3	Floor noise
Hori	9920.000	AV	32.7	38.3	9.7	32.8	-	47.9	53.9	6.0	Floor noise
Vert	72.842	QP	30.5	5.9	7.7	32.2	-	11.9	40.0	28.1	
Vert	202.353	QP	26.5	11.4	9.1	32.0	-	15.0	43.5	28.5	
Vert	230.769	QP	24.4	12.1	9.3	32.0	-	13.8	46.0	32.2	
Vert	234.791	QP	24.1	12.2	9.4	32.0	-	13.7	46.0	32.3	
Vert	299.199	QP	27.6	13.5	9.9	31.9	-	19.1	46.0	26.9	
Vert	336.600	QP	22.4	14.3	10.2	31.9	-	15.0	46.0	31.0	
Vert	2483.500	PK	51.8	28.1	6.9	32.1	-	54.7	73.9	19.2	
Vert	4960.000	PK	44.6	33.4	9.2	31.2	-	56.0	73.9	17.9	
Vert	7440.000	PK	41.3	36.8	9.0	32.7	-	54.4	73.9	19.5	Floor noise
Vert	9920.000	PK	41.3	38.3	9.7	32.8	-	56.5	73.9	17.4	Floor noise
Vert	2483.500	AV	39.1	28.1	6.9	32.1	1.8	43.8	53.9	10.1	*1)
Vert	4960.000	AV	35.8	33.4	9.2	31.2	1.8	49.0	53.9	4.9	
Vert	7440.000	AV	32.6	36.8	9.0	32.7	-	45.7	53.9	8.2	Floor noise
Vert	9920.000	AV	32.6	38.3	9.7	32.8	-	47.8	53.9	6.1	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.53\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)



Test place	Ise EMC Lab. No.4 Semi Anechoic Chamber
Report No.	11343921H
Date	August 17, 2016
Temperature / Humidity	22 deg. C / 48 % RH
Engineer	Takafumi Noguchi
Mode	Tx BT LE 2480 MHz

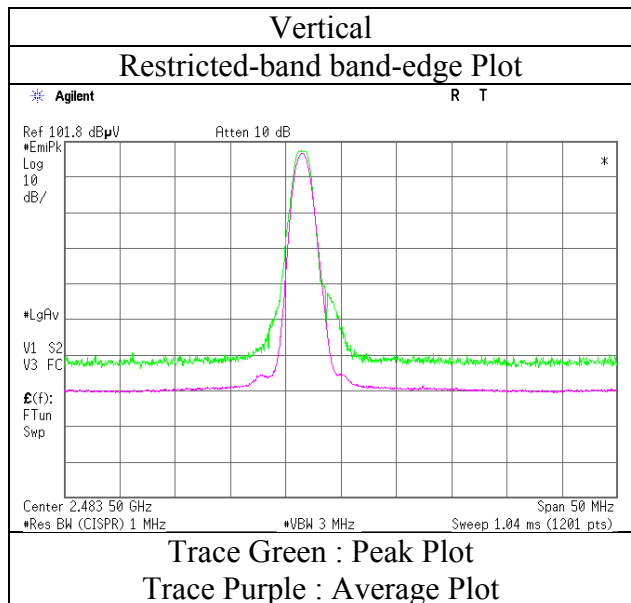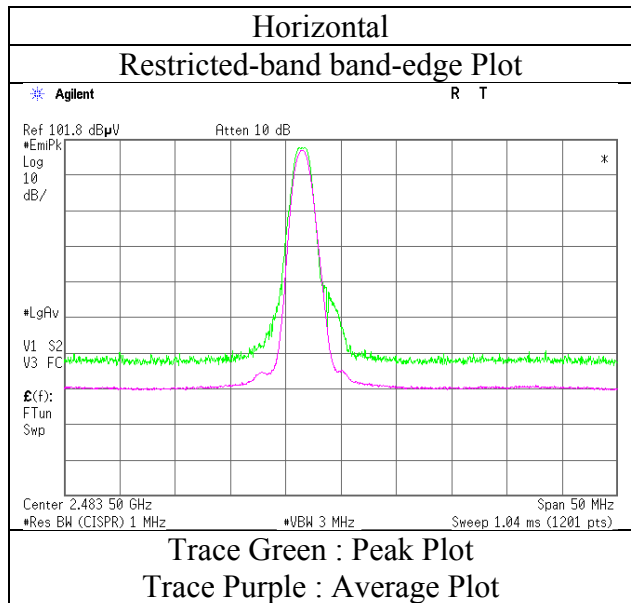

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Plot data, Worst case)


Test place Ise EMC Lab. No.3 and No.4 Semi Anechoic Chamber
Report No. 11343921H
Date August 17, 2016
Temperature / Humidity 22 deg. C / 48 % RH
Engineer Takafumi Noguchi
Mode Tx BT LE 2480 MHz

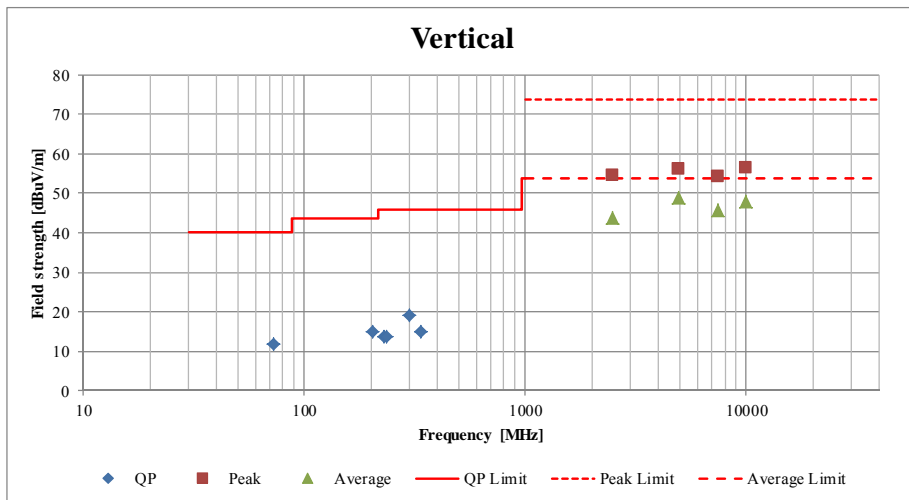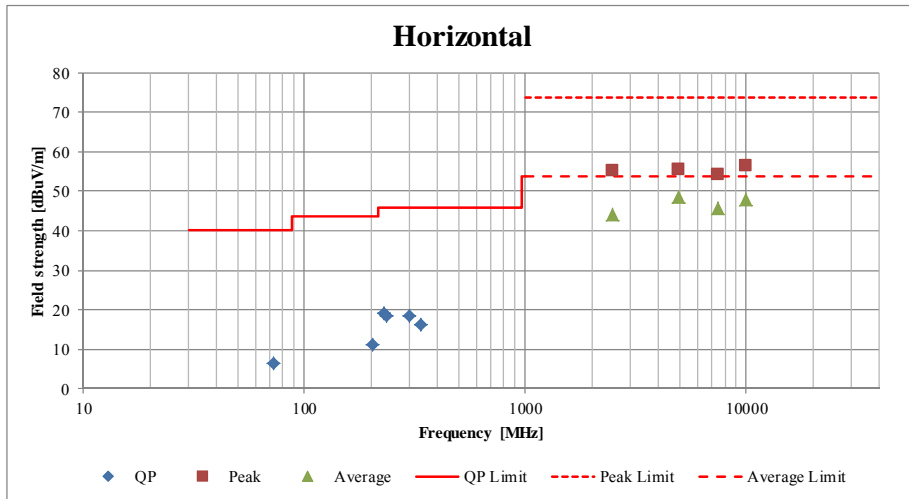

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx 11n-20 2412 MHz

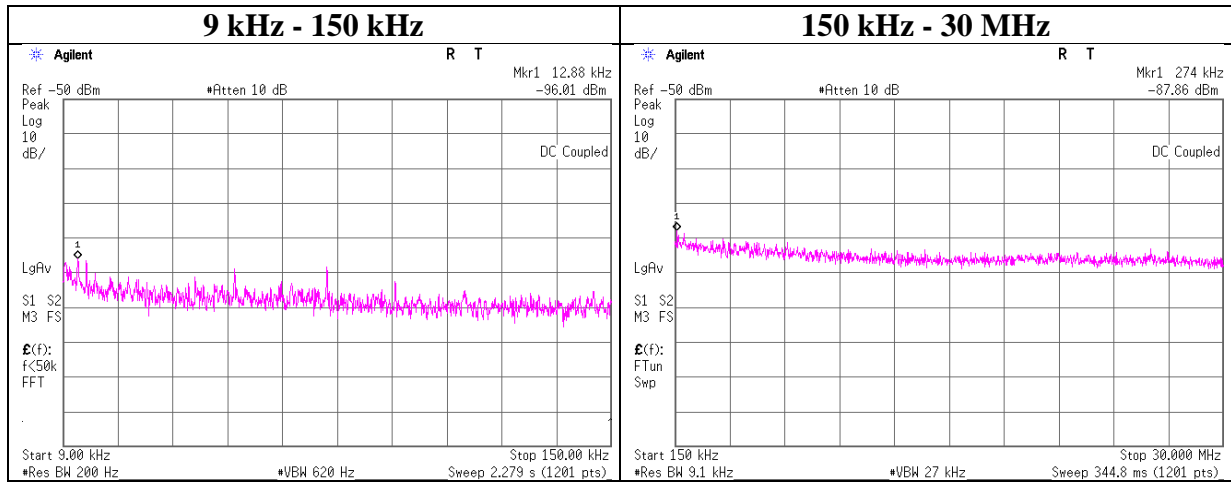

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
12.88	-96.0	0.03	9.9	2.0	1	-84.0	300	6.0	-22.8	45.4	68.2	
274.00	-87.9	0.23	10.0	2.0	1	-75.7	300	6.0	-14.4	18.8	33.2	

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx BT LE 2402 MHz

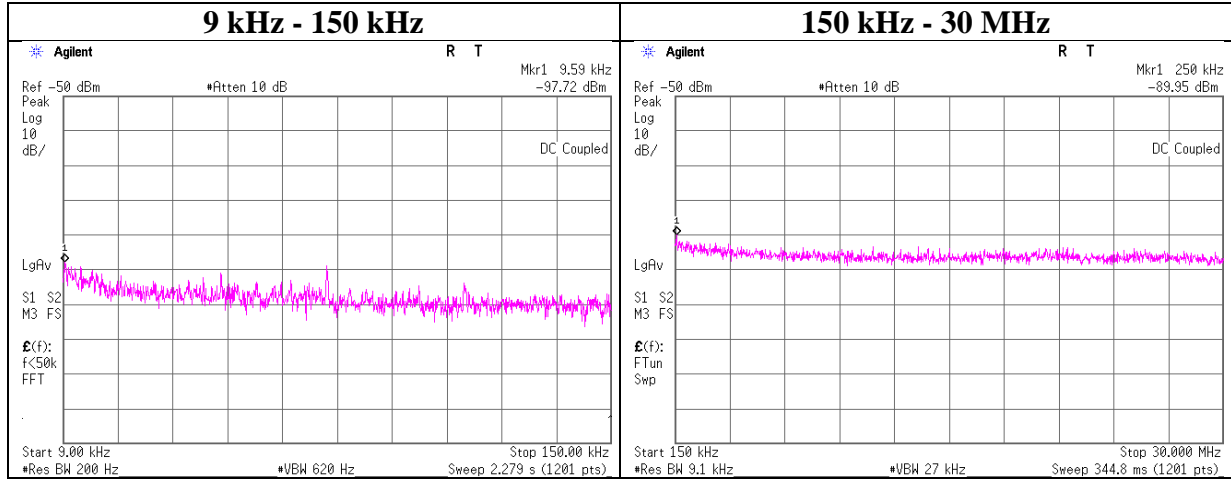

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
9.59	-97.7	0.03	9.9	2.0	1	-85.8	300	6.0	-24.5	47.9	72.4	
250.00	-90.0	0.21	10.0	2.0	1	-77.8	300	6.0	-16.5	19.6	36.1	

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx BT LE 2440 MHz

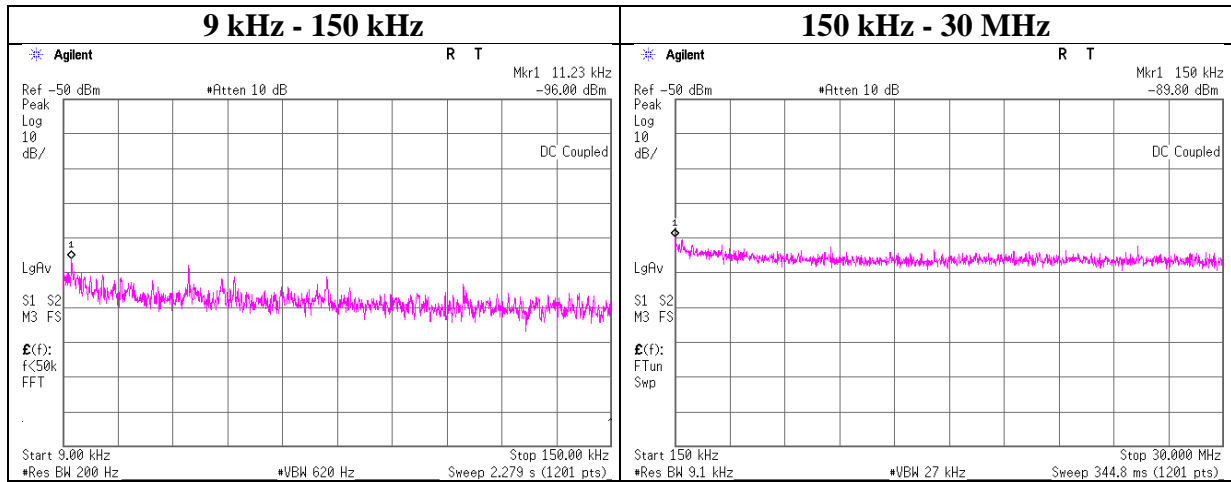


Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
11.23	-96.0	0.03	9.9	2.0	1	-84.0	300	6.0	-22.8	46.5	69.3	
150.00	-89.8	0.14	10.0	2.0	1	-77.7	300	6.0	-16.4	24.0	40.4	

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

Conducted Spurious Emission

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx BT LE 2480 MHz

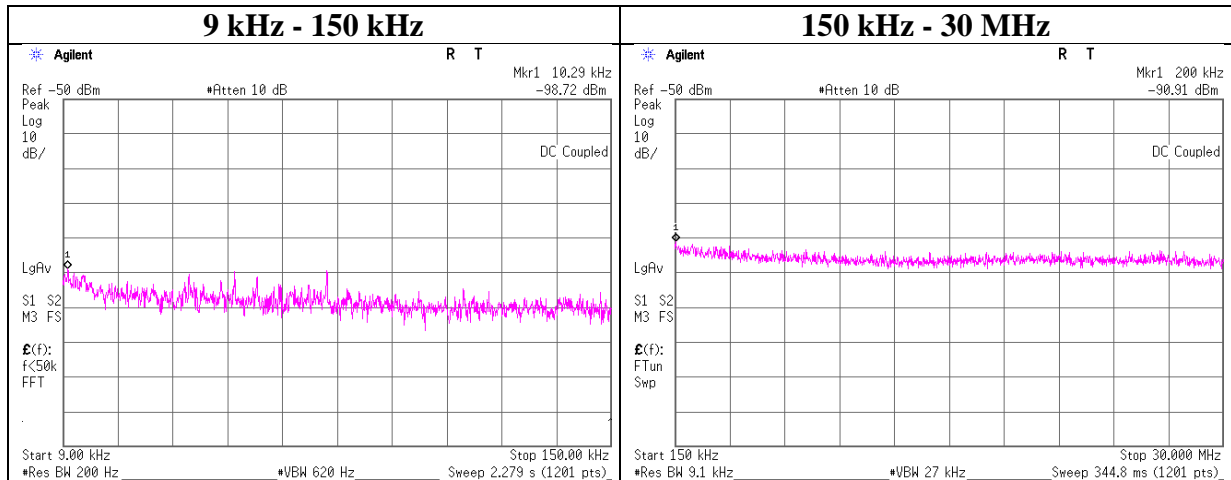

Frequency [kHz]	Reading [dBm]	Cable Loss [dB]	Attenuator Loss [dB]	Antenna Gain [dBi]	N (Number of Output)	EIRP [dBm]	Distance [m]	Ground bounce [dB]	E (field strength) [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
10.29	-98.7	0.03	9.9	2.0	1	-86.8	300	6.0	-25.5	47.3	72.8	
200.00	-90.9	0.17	10.0	2.0	1	-78.8	300	6.0	-17.5	21.5	39.0	

$E = \text{EIRP} - 20 \log(D) + \text{Ground bounce} + 104.8 \text{ [dBuV/m]}$

$\text{EIRP} = \text{Reading} + \text{Cable Loss} + \text{Attenuator Loss} + \text{Antenna Gain} + 10 * \log(N)$

Power Density

Test place Ise EMC Lab. No.6 Measurement Room
Report No. 11343921H
Date August 29, 2016
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Koji Yamamoto
Mode Tx

11b

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-22.72	0.85	10.03	-11.84	8.00	19.84
2437.00	-24.08	0.85	10.03	-13.20	8.00	21.20
2462.00	-24.04	0.85	10.03	-13.16	8.00	21.16


11g

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-25.21	0.85	10.03	-14.33	8.00	22.33
2437.00	-24.88	0.85	10.03	-14.00	8.00	22.00
2462.00	-24.68	0.85	10.03	-13.80	8.00	21.80

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Power Density

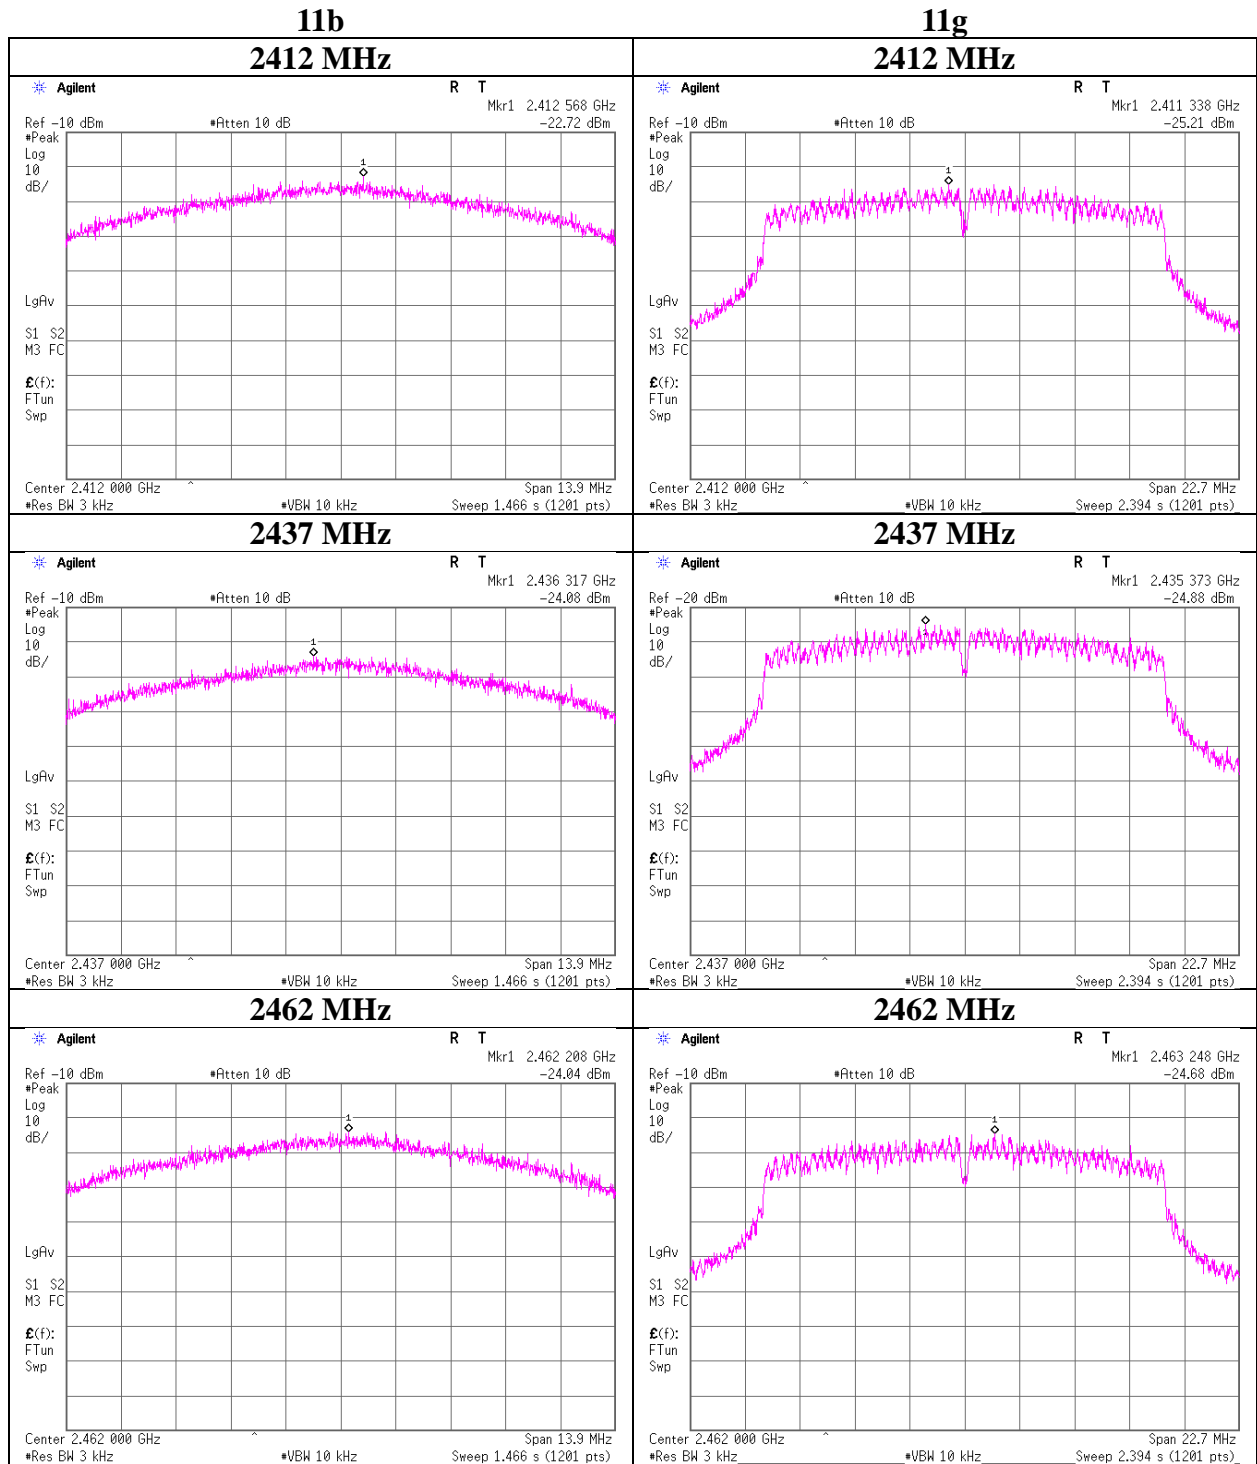

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Power Density

Test place Ise EMC Lab. No.6 Measurement Room
Report No. 11343921H
Date August 29, 2016
Temperature / Humidity 23 deg. C / 57 % RH
Engineer Koji Yamamoto
Mode Tx

11n20

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2412.00	-24.49	0.85	10.03	-13.61	8.00	21.61
2437.00	-26.02	0.85	10.03	-15.14	8.00	23.14
2462.00	-25.74	0.85	10.03	-14.86	8.00	22.86


BT LE

Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
2402.00	-17.95	0.85	10.03	-7.07	8.00	15.07
2440.00	-17.65	0.85	10.03	-6.77	8.00	14.77
2480.00	-17.63	0.85	10.03	-6.75	8.00	14.75

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

Power Density

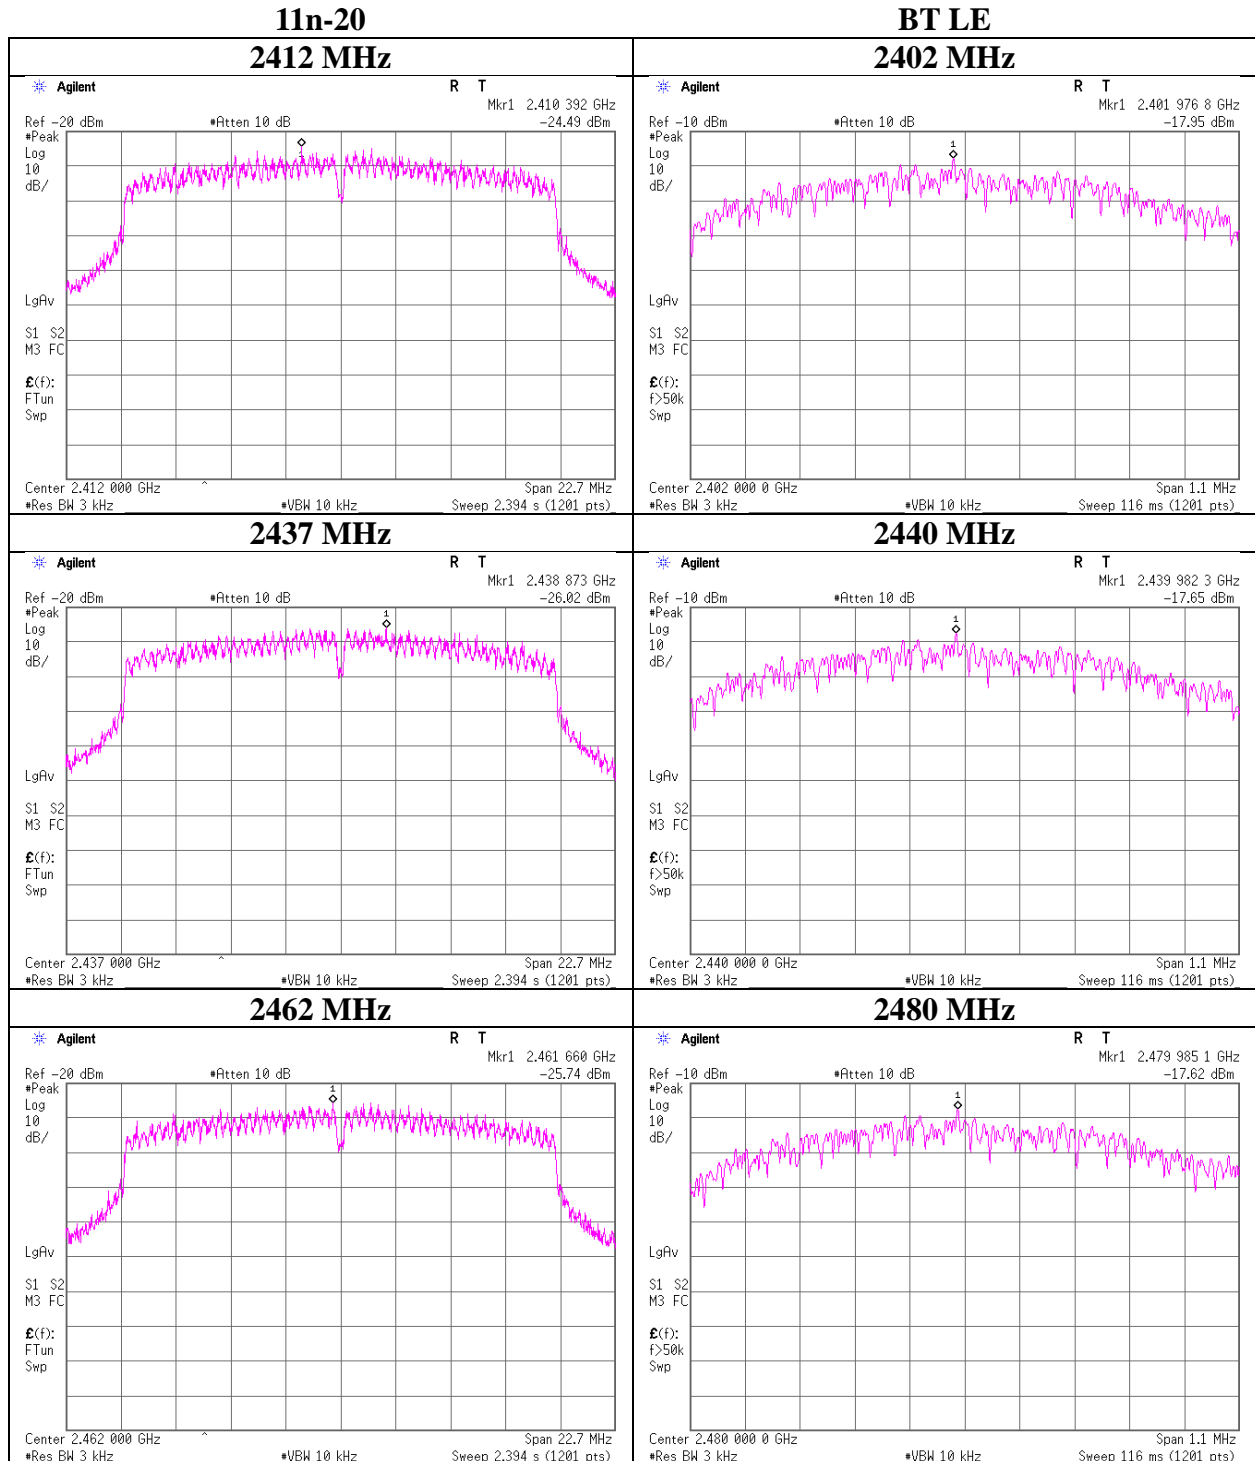

UL Japan, Inc.

Ise EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


99% Occupied Bandwidth

Test place	Ise EMC Lab. No.6 Measurement Room
Report No.	11343921H
Date	August 29, 2016
Temperature / Humidity	23 deg. C / 57 % RH
Engineer	Koji Yamamoto
Mode	Tx

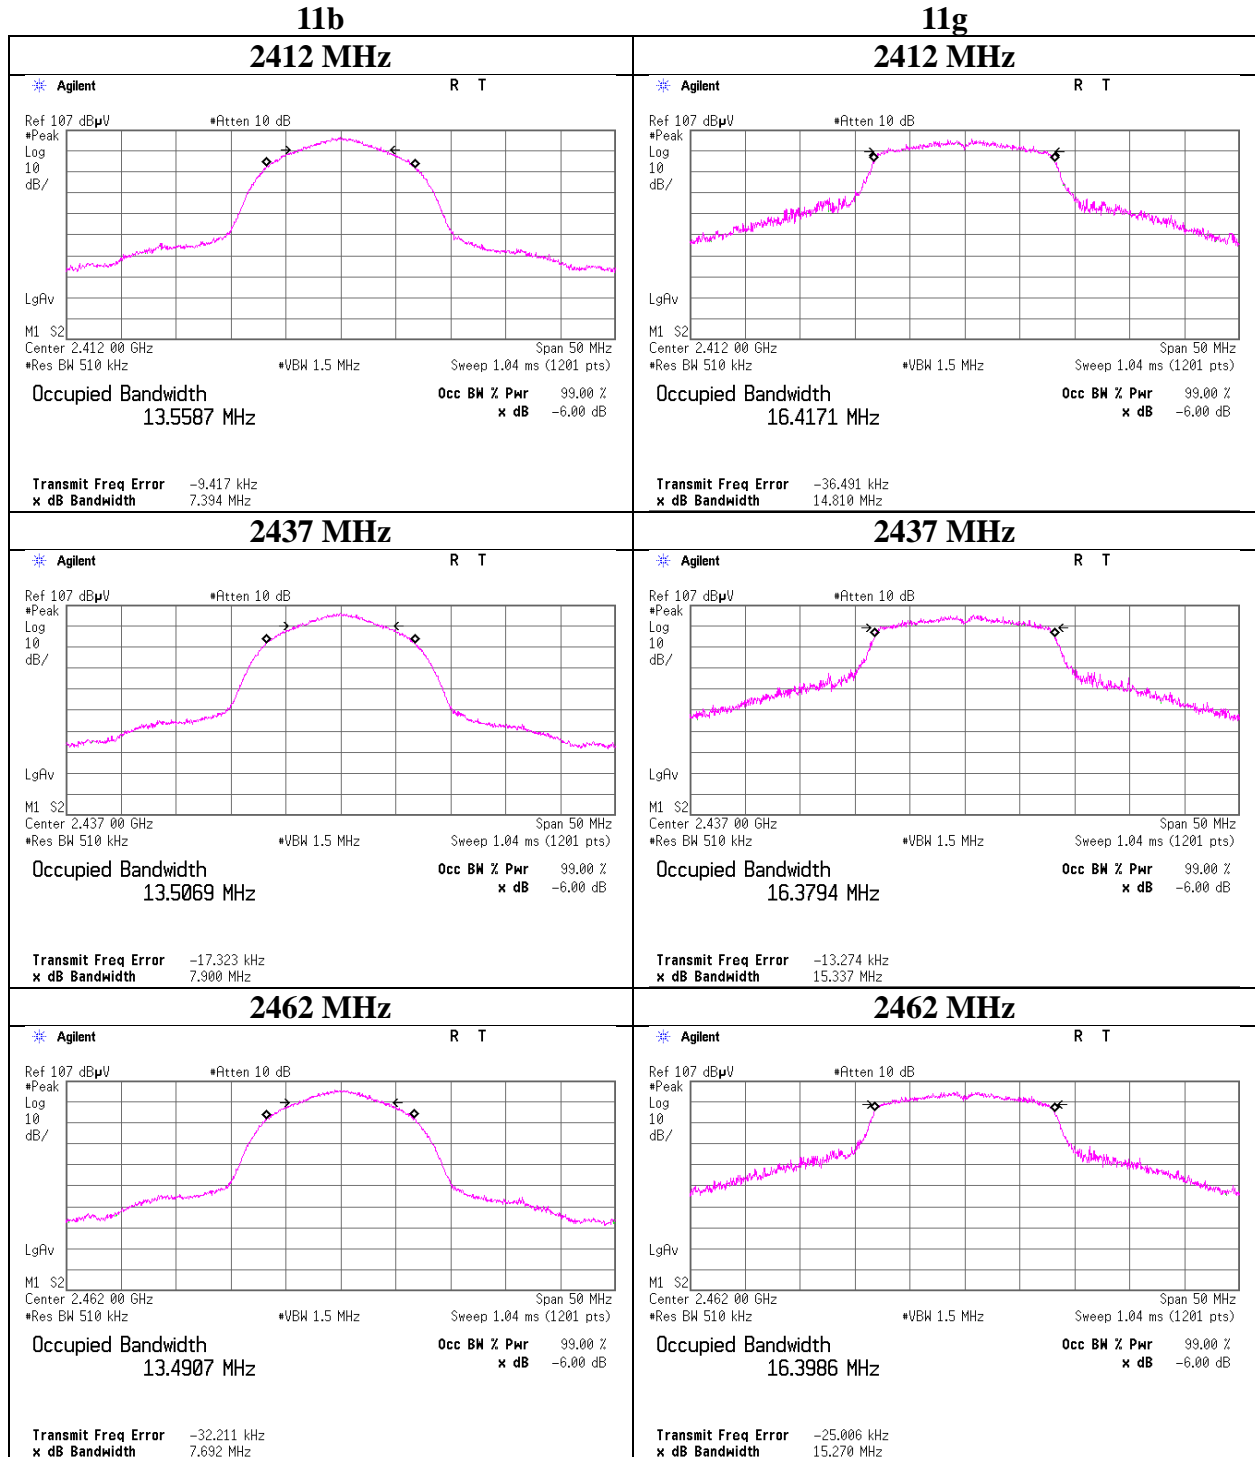

99% Occupied Bandwidth

Test place Report No. Date Temperature / Humidity Engineer Mode	Ise EMC Lab. No.6 Measurement Room 11343921H August 29, 2016 23 deg. C / 57 % RH Koji Yamamoto Tx
--	--

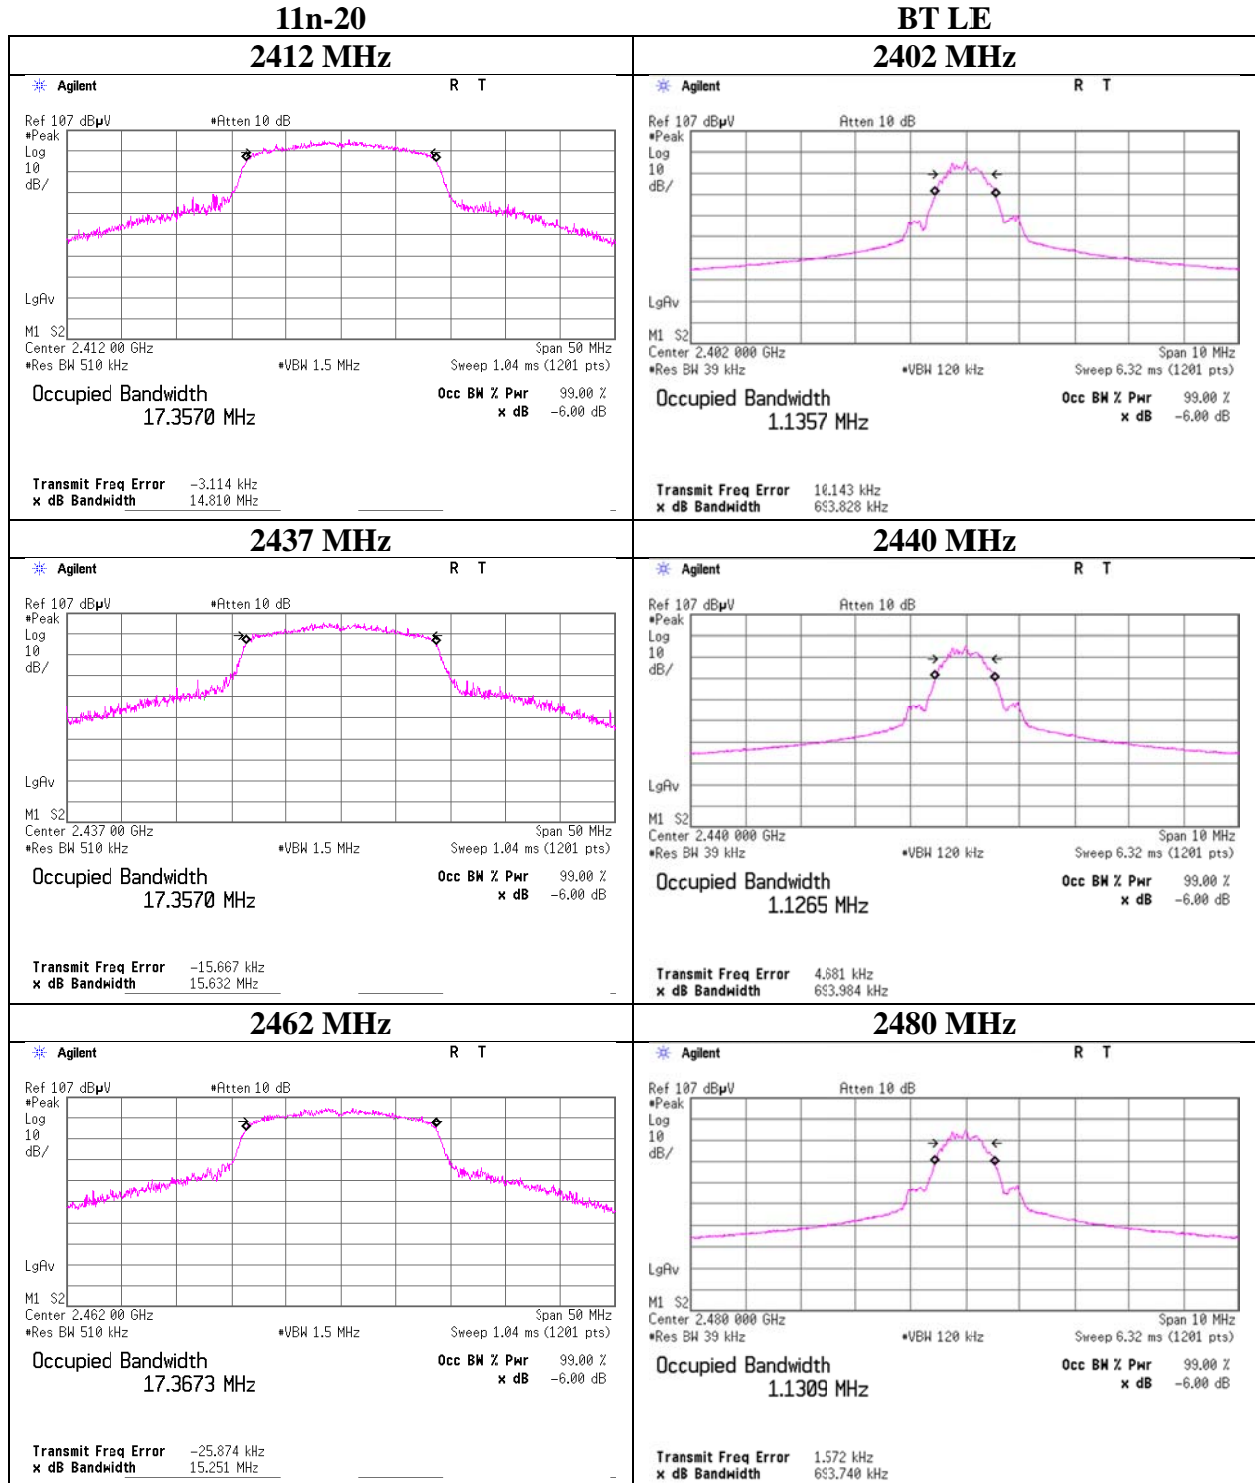

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MOS-14	Thermo-Hygrometer	Custom	CTH-201	1401	AT	2016/01/21 * 12
MRENT-126	Spectrum Analyzer	KEYSIGHT	E4440A	MY46185516	AT	2016/07/01 * 12
MPM-12	Power Meter	Anritsu	ML2495A	0825002	AT	2016/06/06 * 12
MPSE-17	Power sensor	Anritsu	MA2411B	0738285	AT	2016/06/06 * 12
MAT-22	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2016/03/18 * 12
MCC-38	Coaxial Cable	UL Japan	-	-	AT	2015/12/07 * 12
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2015/11/10 * 12
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE/CE	2015/10/02 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	1501	RE/CE	2016/01/21 * 12
MJM-26	Measure	KOMELON	KMC-36	-	RE/CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MTR-10	EMI Test Receiver	Rohde & Schwarz	ESR26	101408	RE/CE	2016/01/29 * 12
MBA-05	Biconical Antenna	Schwarzbeck	BBA9106	1302	RE	2015/11/02 * 12
MLA-23	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-192	RE	2016/01/30 * 12
MCC-50	Coaxial Cable	UL Japan	-	-	RE	2016/06/20 * 12
MAT-68	Attenuator	Anritsu	MP721B	6200961025	RE	2015/11/12 * 12
MPA-14	Pre Amplifier	SONOMA INSTRUMENT	310	260833	RE	2016/03/18 * 12
MMM-10	DIGITAL HiTESTER	Hioki	3805	051201148	RE	2016/01/18 * 12
MLS-23	LISN(AMN)	Schwarzbeck	NSLK8127	8127-729	CE(EUT)	2016/07/07 * 12
MLS-24	LISN(AMN)	Schwarzbeck	NSLK8127	8127-730	CE(AE)	2016/07/11 * 12
MTA-51	Terminator	TME	CT-01BP	-	CE	2015/12/01 * 12
MAT-67	Attenuator	JFW Industries, Inc.	50FP-013H2 N	-	CE	2016/01/14 * 12
MCC-113	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W(10m)/SFM1 41(5m)/421-010(1m)/sucoform141-PE(1 m)/RFM-E121(Swit cher)	-/04178	CE	2016/07/20 * 12

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2016/08/02 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2016/01/21 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
MSA-13	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2016/06/17 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2016/02/29 * 12
MCC-165	Microwave Cable	Junkosha	MWX221	1203S213(1m) / 1311S166(5m)	RE	2015/11/10 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2016/01/19 * 12
MHF-25	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	RE	2015/09/16 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2015/08/19 * 12
MHA-02	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	RE	2016/02/29 * 12
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/01 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	1301	RE	2016/01/21 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	RE	2015/10/07 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2015/09/02 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2015/10/11 * 12
MLA-22	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-191	RE	2016/01/30 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2016/07/26 * 12
MAT-70	Attenuator(6dB)	Agilent	8491A-006	MY52460153	RE	2016/04/05 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2016/03/24 * 12
MMM-08	DIGITAL HiTESTER	Hioki	3805	051201197	RE	2016/01/13 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2015/08/10 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2016/05/20 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	RE	2015/10/01 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2016/06/24 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:
CE: Conducted Emission test
RE: Radiated Emission test
AT: Antenna Terminal Conducted test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124