



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION
Registration number: 282399


Report No.: GZEM100700123401
Page: 1 of 58
FCC ID: WYNWINCHANCE-802

TEST REPORT

Application No.:	GZEM1007001234RF
Applicant:	Winchance Solar(Fujian) Technology Co., Ltd.
FCC ID:	WYNWINCHANCE-802
Equipment Under Test (EUT):	
EUT Name:	m5 Bluetooth Mobile Speaker
Item No.:	MU-802
Radio Function:	Bluetooth
Standards:	FCC PART 15 Subpart C: 2009
Date of Receipt:	2010-07-23
Date of Test:	2010-07-26 to 2010-08-02
Date of Issue:	2010-08-23
Test Result :	Pass*

* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 3 of this report for further detail.

Authorized Signature:



2010. August.

Stephen Guo
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2010-08-23		Original

Authorized for issue by:				
Tested By		 (Angel Liu) /Signature		2010-07-26 to 2010-08-02 Date
Prepared By		 (Angel Liu) /Signature		2010-08-03 Date
Checked By		 (Jeffrey Chen) /Signature		2010-08-23 Date



3 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Antenna Requirement	FCC PART 15 :2009	Section 15.247 (c)	PASS
Occupied Bandwidth	FCC PART 15 :2009	Section 15.247 (a1)	PASS
Carrier Frequencies Separated	FCC PART 15 :2009	Section 15.247(a)(1)	PASS
Hopping Channel Number	FCC PART 15 :2009	Section 15.247(a)(1)(iii)	PASS
Dwell Time	FCC PART 15 :2009	Section 15.247(a)(1)(iii)	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 :2009	Section 15.247(a)(1)	PASS
Maximum Peak Output Power	FCC PART 15 :2009	Section 15.247(b)(1)	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2009	Section 15.209 &15.247(d)	PASS
Radiated Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2009	Section 15.209 &15.247(d)	PASS
Band Edges Measurement	FCC PART 15 :2009	Section 15.247 (d) &15.205	PASS



4 Contents

1	COVER PAGE.....	1
2	VERSION	2
3	TEST SUMMARY.....	3
4	CONTENTS.....	4
5	GENERAL INFORMATION.....	5
5.1	Client Information	5
5.2	General Description of E.U.T.	5
5.3	Modulation configure	5
5.4	Description of Support Units	6
5.5	Standards Applicable for Testing	6
5.6	Test Facility	6
5.7	Test Location	6
5.8	Deviation from Standards	7
5.9	Abnormalities from Standard Conditions	7
5.10	Monitoring of EUT for All Immunity Test	7
6	EQUIPMENT USED DURING TEST.....	8
7	TEST RESULTS.....	9
7.1	E.U.T. test conditions	9
7.2	Antenna Requirement	11
7.3	Conducted Emissions Mains Terminals, 150 KHz to 30MHz.....	12
7.4	Occupied Bandwidth	18
7.5	Carrier Frequencies Separated.....	22
7.6	Hopping Channel Number.....	25
7.7	Dwell Time	26
7.8	Pseudorandom Frequency Hopping Sequence	34
7.9	Maximum Peak Output Power	36
7.10	Conducted Spurious Emissions	41
7.11	Radiated Spurious Emissions	47
7.12	Band Edges Requirement	57



5 General Information

5.1 Client Information

Applicant: Winchance Solar(Fujian) Technology Co., Ltd.
Address of Applicant: Jiangnan New Hi-Tech Electronic Industrial Park, Quanzhou, Fujian, China

5.2 General Description of E.U.T.

Product Name: m5 Bluetooth Mobile Speaker
Model: MU-802
Number of Channels: 79 Channels
Channel Separation: 1 MHz
Type of Modulation: GFSK, ($\pi/4$)QPSK, 8DPSK
Dwell time: Per channel is less than 0.4s.
Antenna Type: Integral
Antenna gain: Max 3dBi
Speciality: Bluetooth V2.1+EDR
Power Supply: AC 100-240V 50/60Hz or DC 5V thought USB port of PC
Adapter: Model: BI05-050100-Bdv
Input: AC 100-240V 50/60Hz 0.3A
Output: DC 5V 1A

5.3 Modulation configure


Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	24
	DH3	11	183
	DH5	15	339
($\pi/4$)QPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021



5.4 Description of Support Units

The EUT has been test with below devices and configuration:

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
	Notebook	IBM	T40	CNF345Q1R
	Test software	CSR	/	N/A

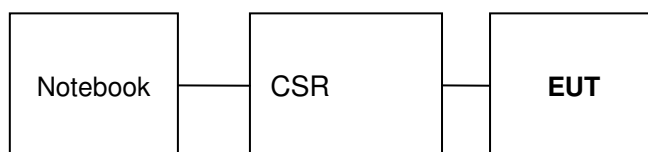

5.5 Standards Applicable for Testing

The customer requested FCC tests for the EUT.

The standard used was FCC PART 15 Subpart C: 2009.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **FCC – Registration No.: 282399**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

5.7 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



5.8 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.9 Abnormalities from Standard Conditions

None.

5.10 Monitoring of EUT for All Immunity Test

None.



6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	N/A	N/A
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2010-01-25	2011-01-25
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	10036	2010-06-02	2011-06-02
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	2009-12-09	2010-12-09
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2009-12-20	2010-12-20
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2009-12-20	2010-12-20
EMC0517	Horn Antenna	Rohde & Schwarz	HF906	100095	2009-09-15	2010-09-15
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	2009-12-05	2010-12-05
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2010-01-25	2011-01-25
EMC0049	Amplifier	Agilent	8447D	2944A10862	2010-04-21	2011-04-21
EMC0075	310N Amplifier	Sonama	310N	272683	2009-10-26	2010-10-26
EMC0523	Active Loop Antenna	EMCO	6502	42963	2009-11-17	2010-11-17
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2010-05-17	2011-05-17

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
					(YYYY-MM-DD)	(YYYY-MM-DD)
EMC0006	DMM	Fluke	73	70681569	2009-12-16	2010-12-16
EMC0007	DMM	Fluke	73	70671122	2009-12-16	2010-12-16



7 Test Results

7.1 E.U.T. test conditions

Power supply:	AC 120V 60Hz
Type of antenna:	Integral
Operating Environment:	
Temperature:	20.0 -25.0 °C
Humidity:	38-50 % RH
Atmospheric Pressure:	1000 -1010 mbar
Test frequencies:	According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. if required. reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom

EUT channels and frequencies list:



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 10 of 58

FCC ID: WYNWINCHANCE-802

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2413	22	2424
1	2403	12	2414	23	2425
2	2404	13	2415	24	2426
3	2405	14	2416	25	2427
4	2406	15	2417	26	2428
5	2407	16	2418	27	2429
6	2408	17	2419	28	2430
7	2409	18	2420	29	2431
8	2410	19	2421	30	2432
9	2411	20	2422	31	2433
10	2412	21	2423	32	2434
33	2435	49	2451	65	2467
34	2436	50	2452	66	2468
35	2437	51	2453	67	2469
36	2438	52	2454	68	2470
37	2439	53	2455	69	2471
38	2440	54	2456	70	2472
39	2441	55	2457	71	2473
40	2442	56	2458	72	2474
41	2443	57	2459	73	2475
42	2444	58	2460	74	2476
43	2445	59	2461	75	2477
44	2446	60	2462	76	2478
45	2447	61	2463	77	2479
46	2448	62	2464	78	2480
47	2449	63	2465		
48	2450	64	2466		

Test frequency is the lowest channel: 0 channel(2402MHz), middle channel: 39 channel(2441MHz) and highest channel: 78 channel(2480MHz)

7.2 Antenna Requirement

7.2.1 Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

7.2.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.



Test result: The unit does meet the FCC requirements.



7.3 Conducted Emissions Mains Terminals, 150 KHz to 30MHz

Test Requirement: FCC Part15 C
Test Method: ANSI C63.4
Test Voltage: 120V AC, 60Hz
Frequency Range: 150KHz to 30MHz
Detector: Peak for pre-scan
Quasi-Peak and Average at frequency with maximum peak
(9 kHz resolution bandwidth)
Class / Limit: Class B

Frequency range MHz	Class B Limits dB (μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 :The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		
NOTE 2: The lower limit is applicable at the transition frequency.		

7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 25.0 °C

Humidity: 45 %RH

Atmospheric Pressure: 1008 mbar

EUT Operation: Test the EUT in Bluetooth mode.

7.3.2 Test Setup and Procedure

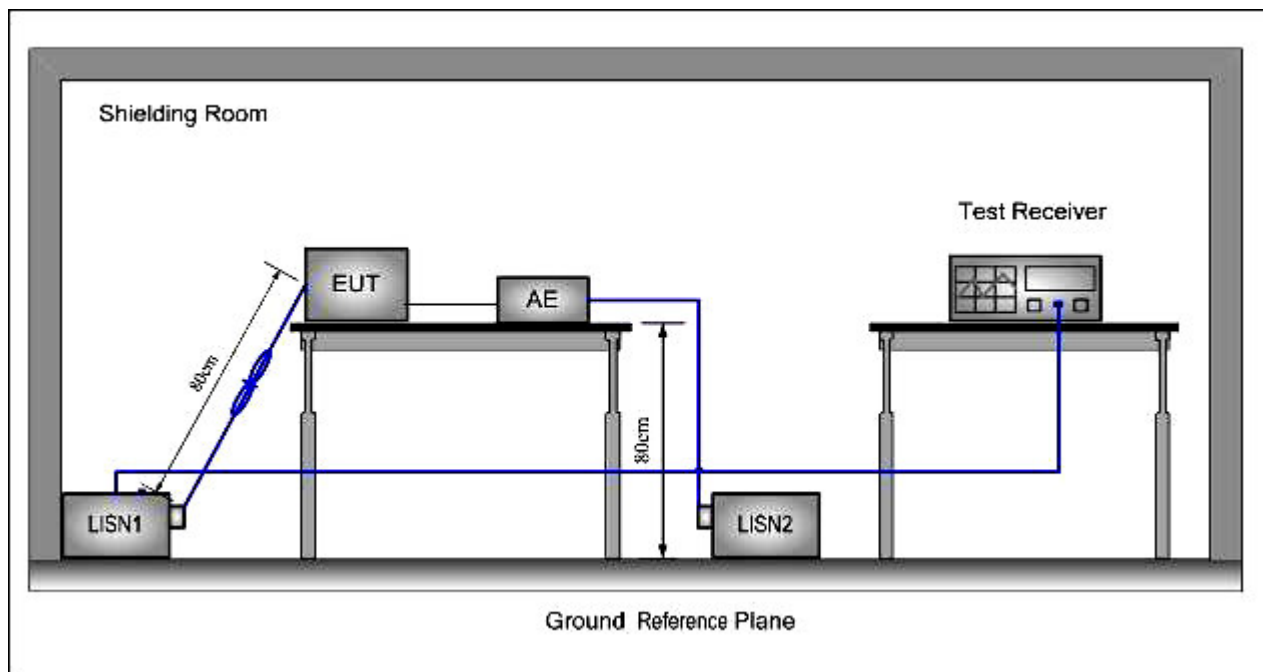

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to nominal power supply through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.



7.3.3 Measurement Data


Pre-scan was performed with peak detected on both live and neutral cable. Quasi-peak & average measurements were performed at the frequencies which maximum peak emission level was detected.

Please see the attached Quasi-peak and Average test results.

Test in Adapter port:

Live Line:

Peak Scan:

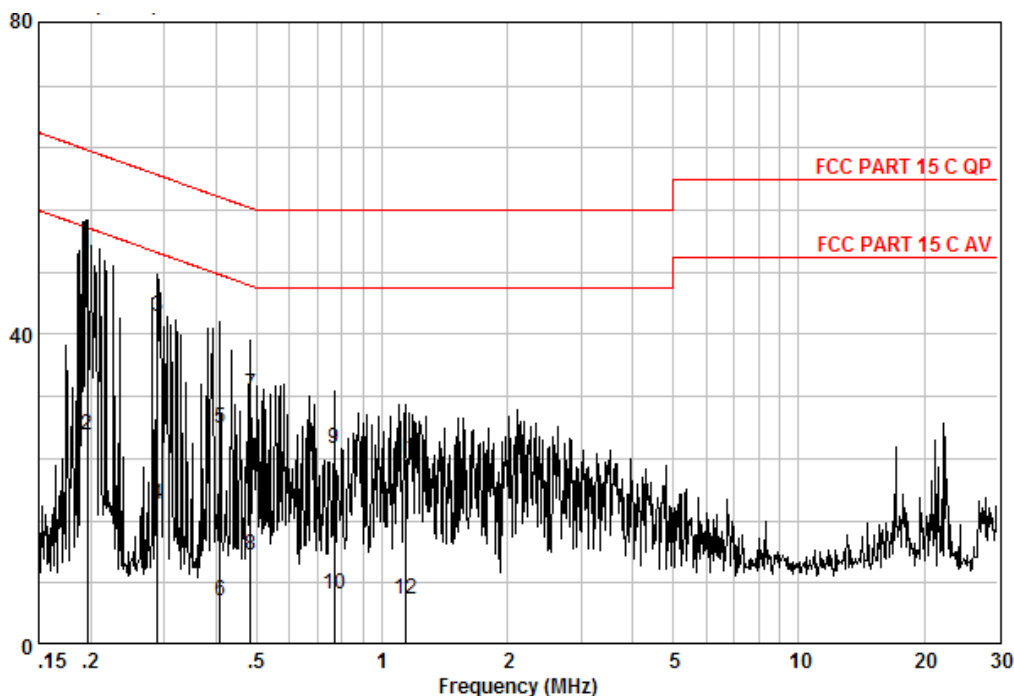

Quasi-peak and Average measurement

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.197	50.06	0.13	0.13	50.31	63.76	-13.44	QP
0.197	26.69	0.13	0.13	26.94	53.76	-26.81	AVERAGE
0.289	42.14	0.08	0.11	42.33	60.54	-18.21	QP
0.289	17.88	0.08	0.11	18.07	50.54	-32.47	AVERAGE
0.408	27.72	0.04	0.10	27.86	57.68	-29.83	QP
0.408	5.60	0.04	0.10	5.74	47.68	-41.95	AVERAGE
0.484	32.18	0.05	0.09	32.32	56.27	-23.95	QP
0.484	11.49	0.05	0.09	11.63	46.27	-34.64	AVERAGE
0.767	25.22	0.05	0.09	25.36	56.00	-30.64	QP
0.767	6.46	0.05	0.09	6.60	46.00	-39.40	AVERAGE
1.135	23.76	0.02	0.10	23.88	56.00	-32.12	QP
1.135	5.76	0.02	0.10	5.88	46.00	-40.12	AVERAGE

Level = Read Level + LISN Factor + Cable Loss.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center


Report No.: GZEM100700123401

Page: 15 of 58

FCC ID: WYNWINCHANCE-802

Neutral Line:

Peak Scan:

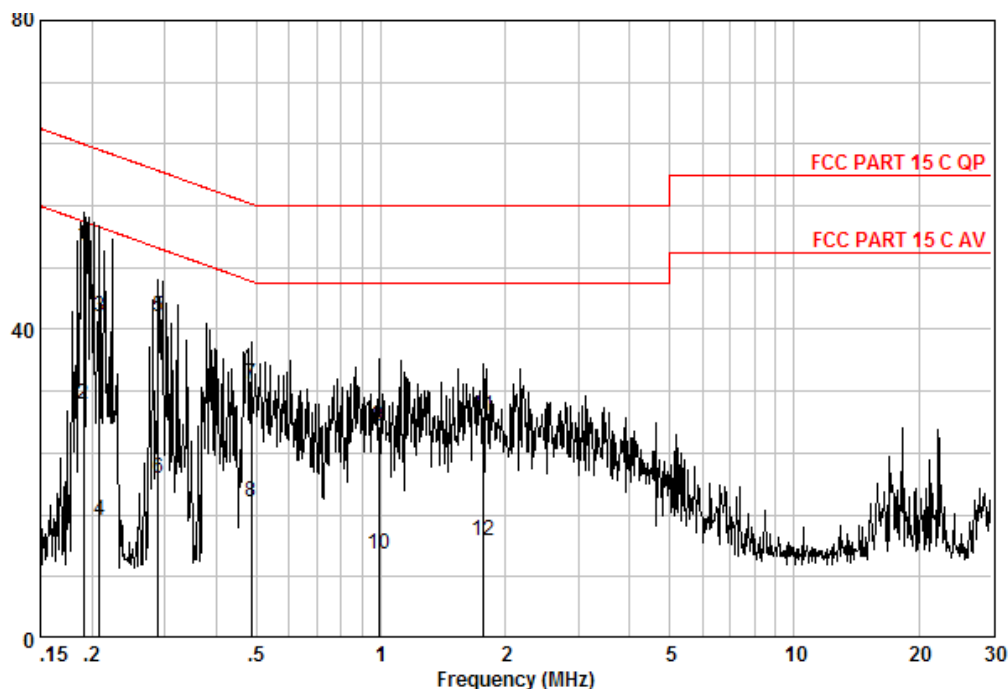

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.190	50.46	0.12	0.13	50.71	64.02	-13.31	QP
0.190	30.06	0.12	0.13	30.31	54.02	-23.71	AVERAGE
0.208	41.40	0.12	0.11	41.63	63.27	-21.64	QP
0.208	15.06	0.12	0.11	15.29	53.27	-37.98	AVERAGE
0.289	41.56	0.08	0.10	41.74	60.54	-18.80	QP
0.289	20.46	0.08	0.10	20.64	50.54	-29.90	AVERAGE
0.486	32.88	0.05	0.08	33.01	56.23	-23.22	QP
0.486	17.51	0.05	0.08	17.64	46.23	-28.59	AVERAGE
0.989	27.42	0.02	0.09	27.53	56.00	-28.47	QP
0.989	10.79	0.02	0.09	10.90	46.00	-35.10	AVERAGE
1.772	28.60	0.02	0.11	28.73	56.00	-27.27	QP
1.772	12.41	0.02	0.11	12.54	46.00	-33.46	AVERAGE

Level = Read Level + LISN Factor + Cable Loss.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 16 of 58

FCC ID: WYNWINCHANCE-802

Test in USB port:

Live Line:

Peak Scan:

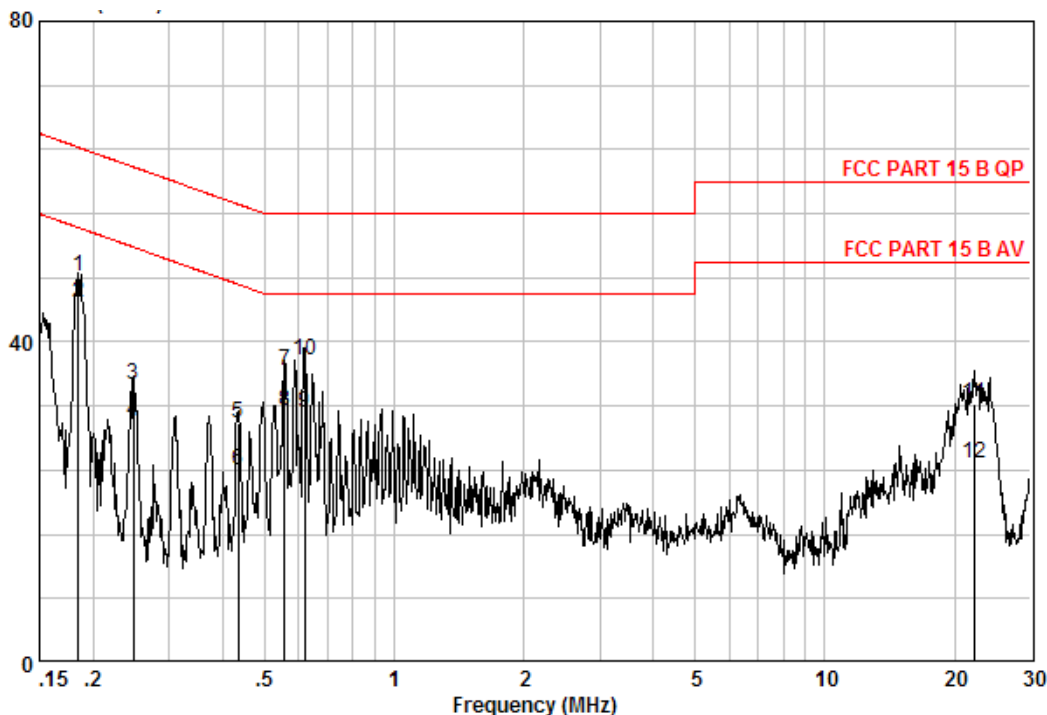

Quasi-peak and Average measurement

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.184	47.86	0.11	0.16	48.13	64.28	-16.15	QP
0.184	44.70	0.11	0.16	44.97	54.28	-9.31	AVERAGE
0.248	34.38	0.10	0.11	34.60	61.82	-27.22	QP
0.248	29.84	0.10	0.11	30.06	51.82	-21.76	AVERAGE
0.435	29.64	0.04	0.09	29.78	57.15	-27.38	QP
0.435	23.75	0.04	0.09	23.89	47.15	-23.27	AVERAGE
0.555	36.20	0.05	0.09	36.34	56.00	-19.66	QP
0.555	31.24	0.05	0.09	31.38	46.00	-14.62	AVERAGE
0.621	31.12	0.05	0.09	31.26	46.00	-14.74	AVERAGE
0.621	37.68	0.05	0.09	37.82	56.00	-18.18	QP
22.298	31.28	0.27	0.80	32.35	60.00	-27.65	QP
22.298	23.68	0.27	0.80	24.75	50.00	-25.25	AVERAGE

Level = Read Level + LISN Factor + Cable Loss.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center


Report No.: GZEM100700123401

Page: 17 of 58

FCC ID: WYNWINCHANCE-802

Neutral Line:

Peak Scan:

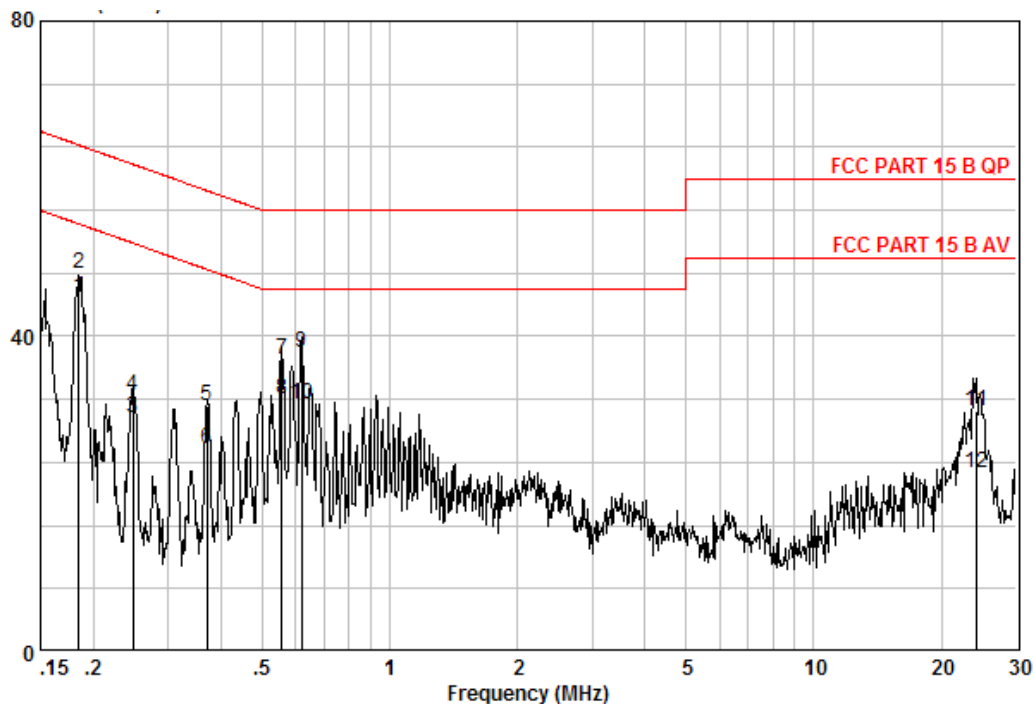

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.184	44.60	0.11	0.15	44.86	54.28	-9.42	AVERAGE
0.184	47.66	0.11	0.15	47.92	64.28	-16.36	QP
0.248	29.47	0.10	0.10	29.68	51.82	-22.14	AVERAGE
0.248	32.38	0.10	0.10	32.59	61.82	-29.23	QP
0.371	30.94	0.05	0.09	31.08	58.47	-27.39	QP
0.371	25.51	0.05	0.09	25.65	48.47	-22.82	AVERAGE
0.555	36.82	0.05	0.08	36.95	56.00	-19.05	QP
0.555	32.01	0.05	0.08	32.14	46.00	-13.86	AVERAGE
0.621	37.78	0.05	0.08	37.91	56.00	-18.09	QP
0.621	31.24	0.05	0.08	31.37	46.00	-14.63	AVERAGE
24.142	29.50	0.29	0.78	30.56	60.00	-29.44	QP
24.142	21.70	0.29	0.78	22.76	50.00	-27.24	AVERAGE

Level = Read Level + LISN Factor + Cable Loss.



7.4 Occupied Bandwidth

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247 & DA 00-705

Test Status: Test in continuous transmitting mode at lowest, middle and highest channel.

Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, ($\pi/4$)QPSK and 8DPSK mode, found the worst case mode is 8DPSK. Reported the GFSK and 8DPSK mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW \geq 1% of the 20dB bandwidth VBW \geq RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20dB point's bandwidth.

Test result:

GFSK:

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.142	0.761
Middle	1.162	0.775
Highest	1.162	0.775

8DPSK:

Test Channel	bandwidth	2/3 bandwidth
Lowest	1.363	0.909
Middle	1.363	0.909
Highest	1.363	0.909

Result plot as follows:



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center


Report No.: GZEM100700123401

Page: 19 of 58


FCC ID: WYNWINCHANCE-802

GFSK:

Lowest Channel:

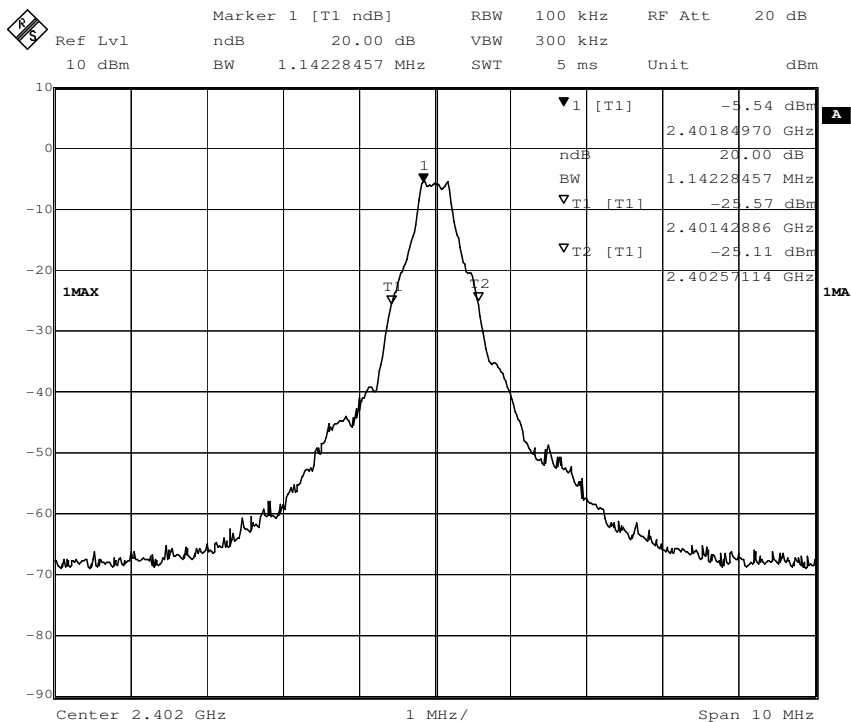

Middle Channel:

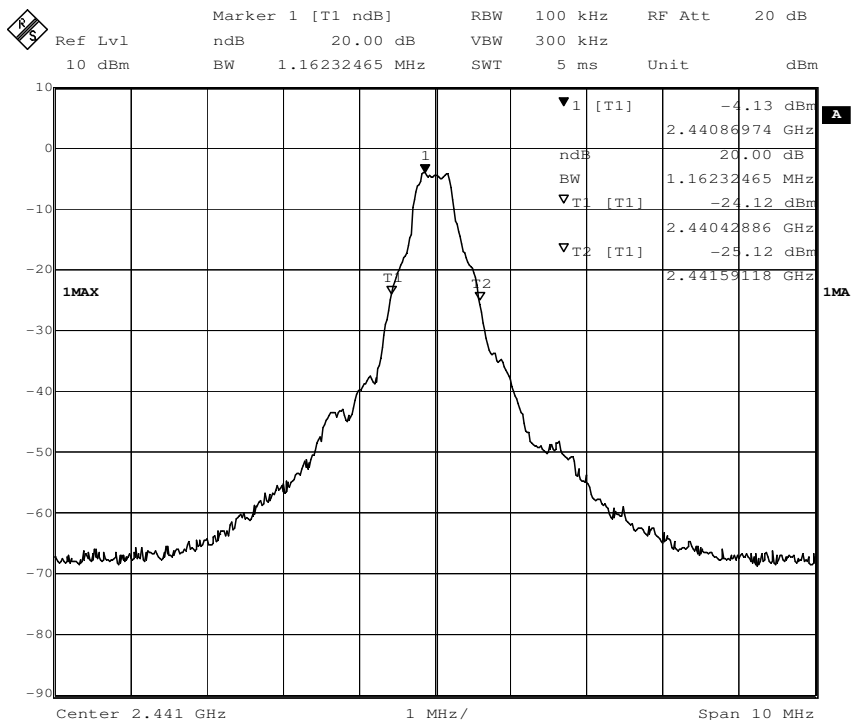




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 20 of 58


FCC ID: WYNWINCHANCE-802

Highest Channel:

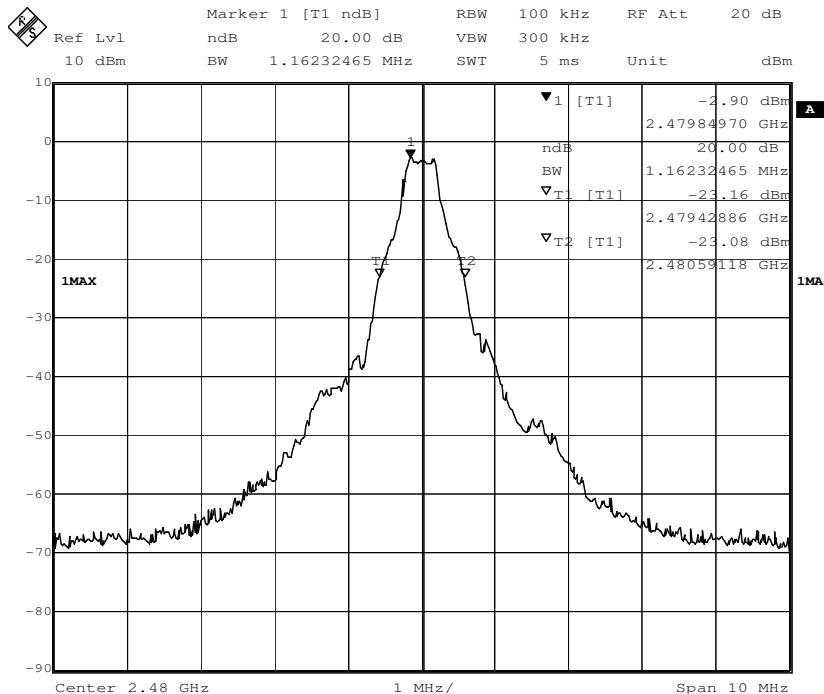

8DPSK:

Lowest channel:

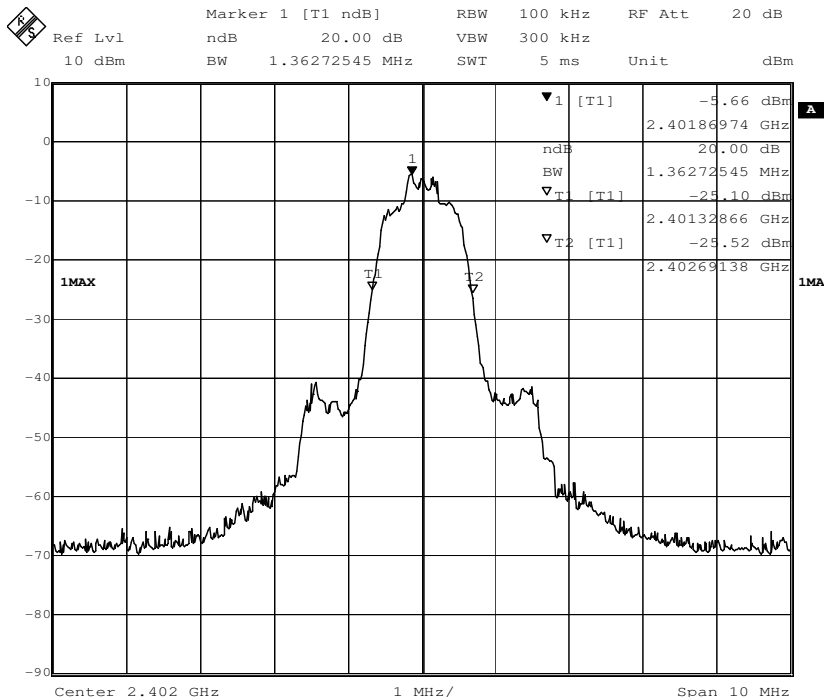




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 21 of 58

FCC ID: WYNWINCHANCE-802

Middle channel:

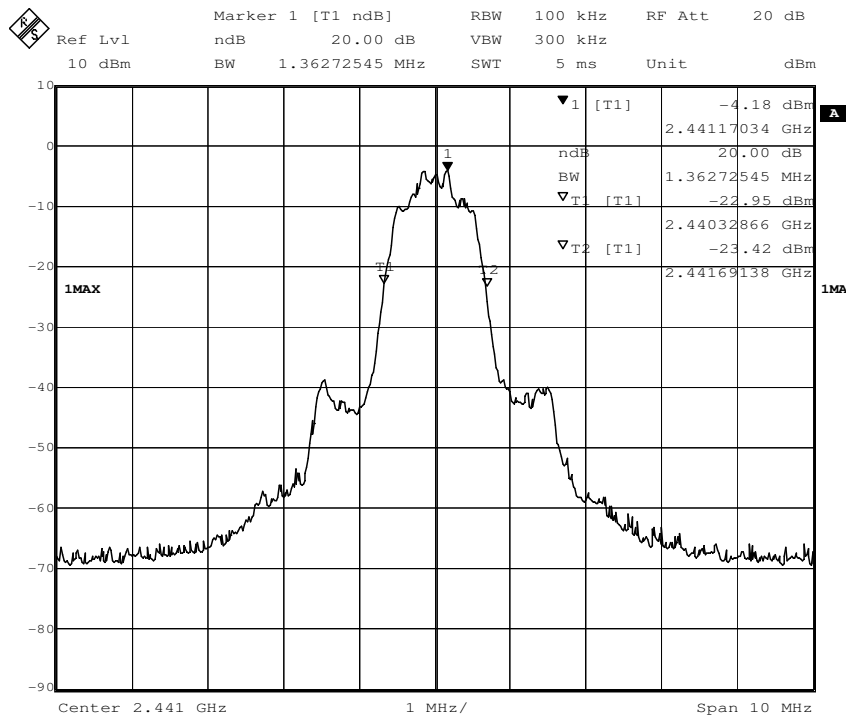

Highest channel:

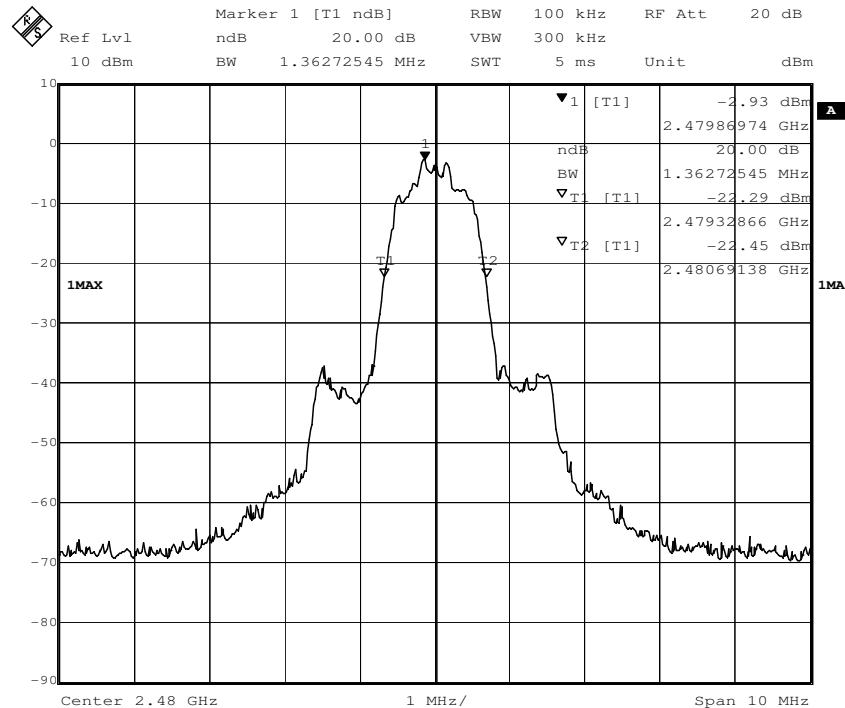



7.5 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247 & DA 00-705

Test requirements: Regulation 15.247(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Status: Test in hopping transmitting operating mode.

Test Procedure:


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW \geq 1% of the span, VBW \geq RBW,. Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test result:


Test Channel	Carrier Frequencies Separated	PASS/FAIL
Lower Channels (channel 0 and channel 1)	1.002MHz	Pass
Middle Channels (channel 39 and channel 40)	1.002MHz	Pass
Upper Channels (channel 77 and channel 78)	1.002MHz	Pass
Remark: The limit is maximum two-thirds of the 20 dB bandwidth: 940KHz.		



1. Lowest Channels: Carrier Frequencies Separated

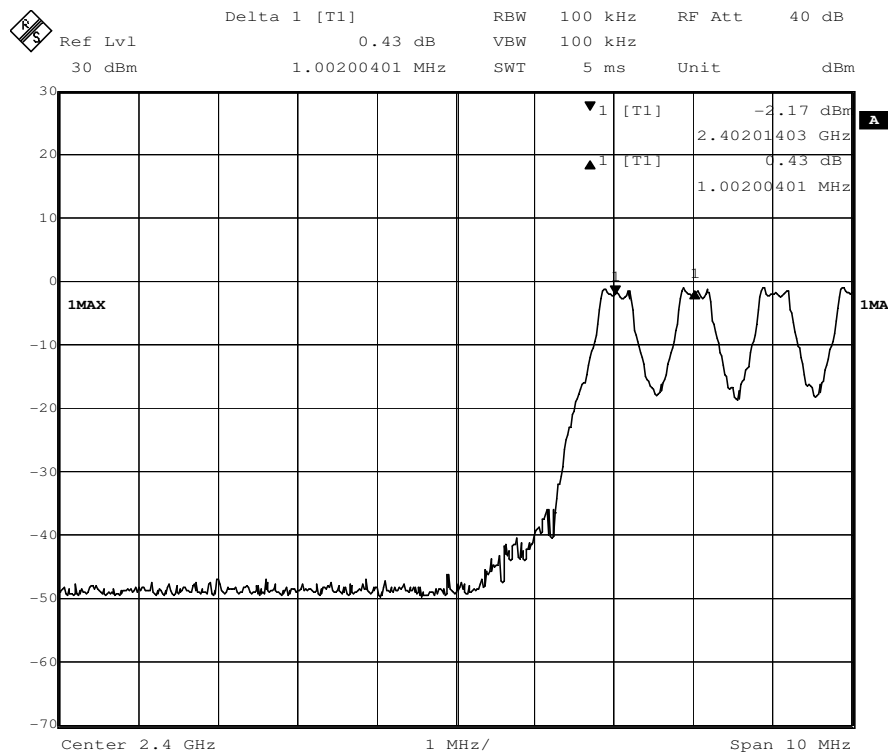


2. Middle Channels: Carrier Frequencies Separated

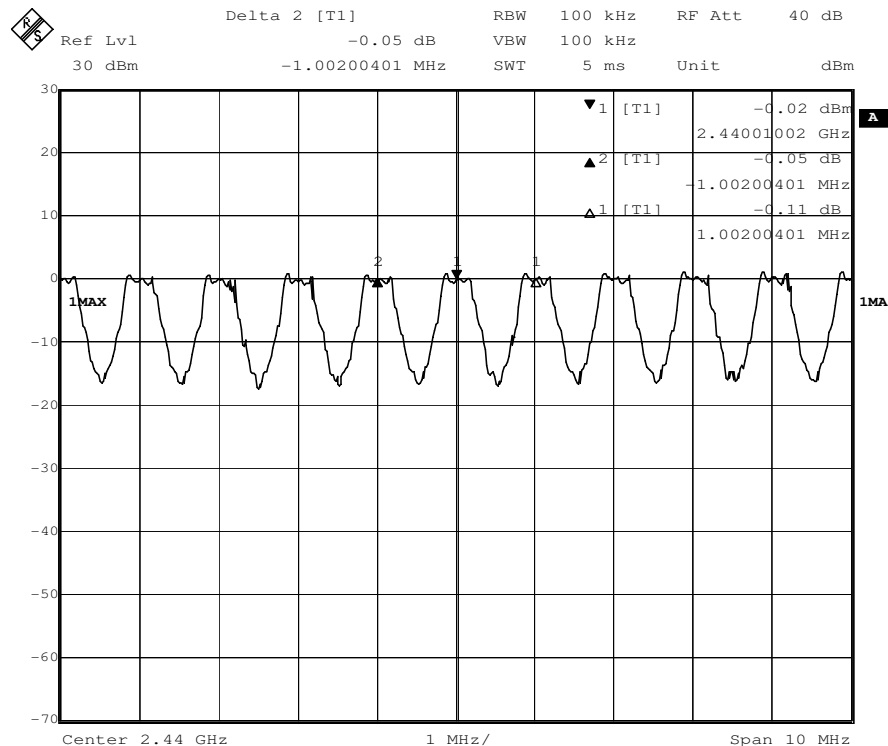



3. Highest Channels: **Carrier Frequencies Separated**

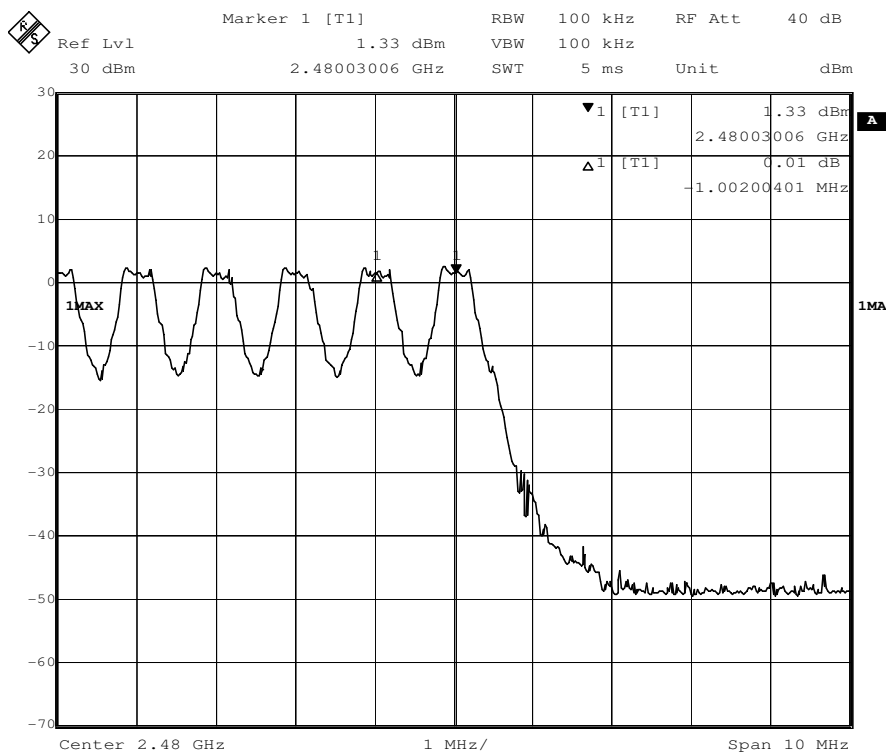

Test result: The unit does meet the FCC requirements.



7.6 Hopping Channel Number

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 C Section 15.247 & DA 00-705


Requirements: Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Status: Test the EUT in hopping on mode.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Test result: Total channels are 79 channels.

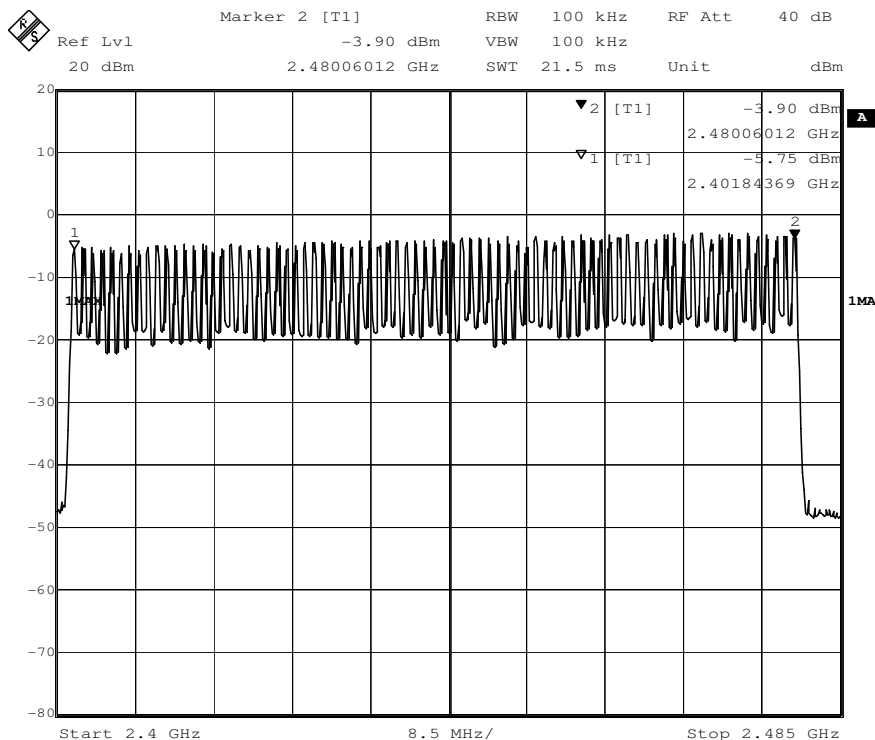

Test result: The unit does meet the FCC requirements.



7.7 Dwell Time

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247 & DA 00-705

Test requirements: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, $(\pi/4)$ QPSK and 8DPSK mode, found the worst case mode is 8DPSK. And reported it.

Test Procedure:

1.Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.

2.Set spectrum analyzer span = 0. centered on a hopping channel;

3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;

4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation.

The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

1. **Channel 0:** 2.402GHz

2. **Channel 0:** 2.402GHz

3DH1 time slot = $0.441 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 141.120\text{ms}$

3DH3 time slot = $1.703 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 272.480\text{ms}$

3DH5 time slot = $2.966 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 316.373\text{ms}$

3. **Channel 39:** 2.441GHz

3DH1 time slot = $0.431 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 137.920\text{ms}$

3DH3 time slot = $1.683 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 269.280\text{ms}$

3DH5 time slot = $2.936 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 313.173\text{ms}$

4. **Channel 78:** 2.480GHz

3DH1 time slot = $0.431 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 137.920\text{ms}$

3DH3 time slot = $1.683 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 269.280\text{ms}$

3DH5 time slot = $2.936 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 313.173\text{ms}$.

The unit does meet the FCC requirements.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 27 of 58

FCC ID: WYNWINCHANCE-802


Please refer the graph as below:

1. Lowest channel (2.402 GHz):

(1). 3DH1

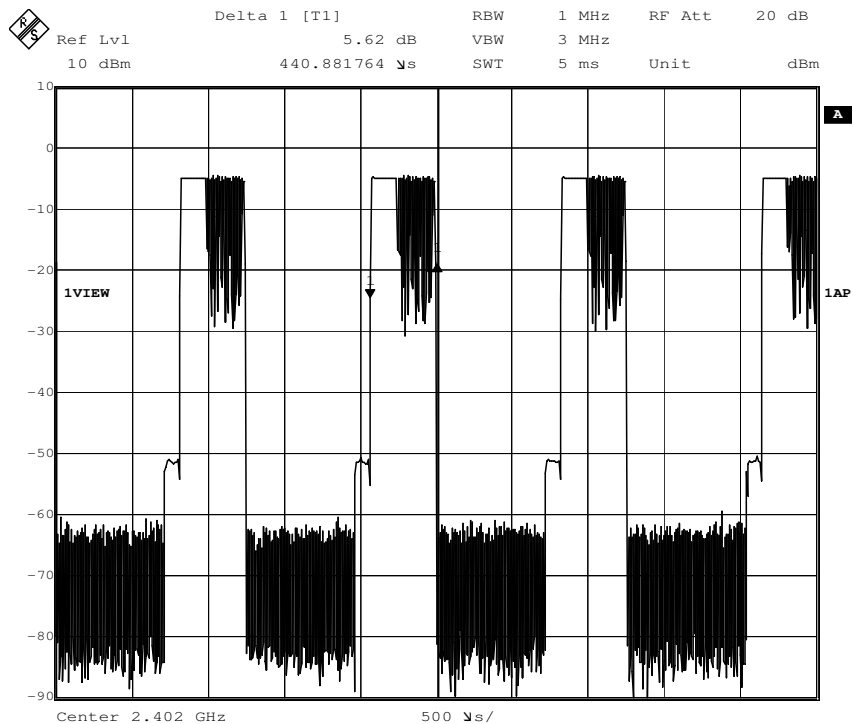

(2) 3DH3

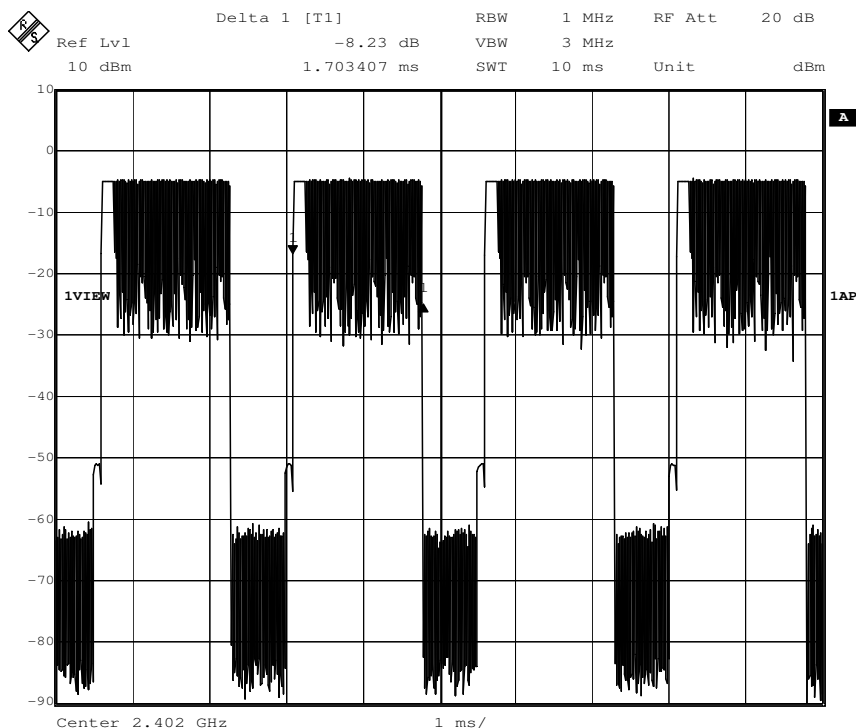




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center


Report No.: GZEM100700123401
Page: 28 of 58
FCC ID: WYNWINCHANCE-802

(3) 3DH5

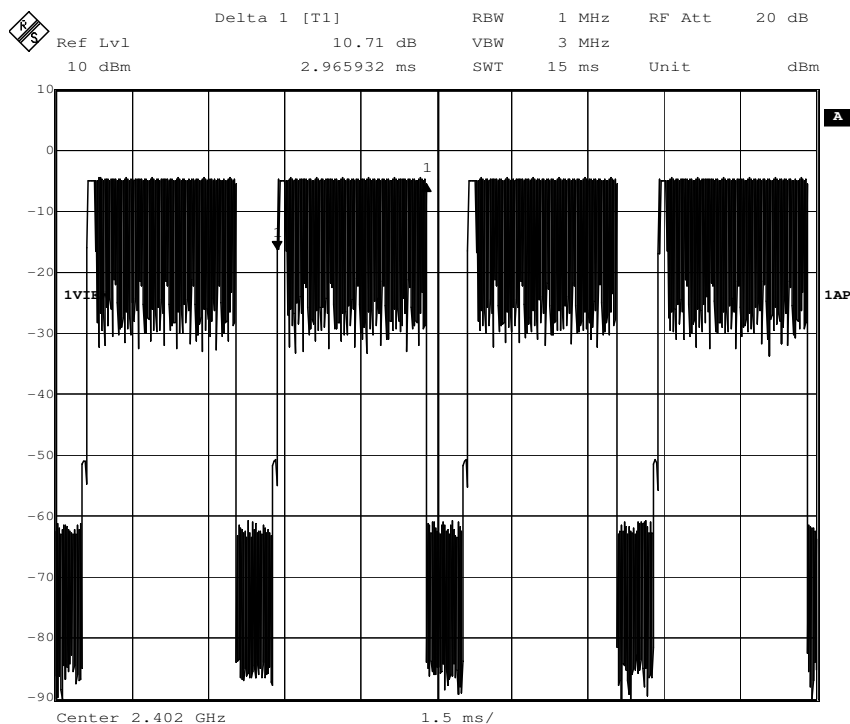

2. Middle Channel (2.441GHz)

(1). 3DH1

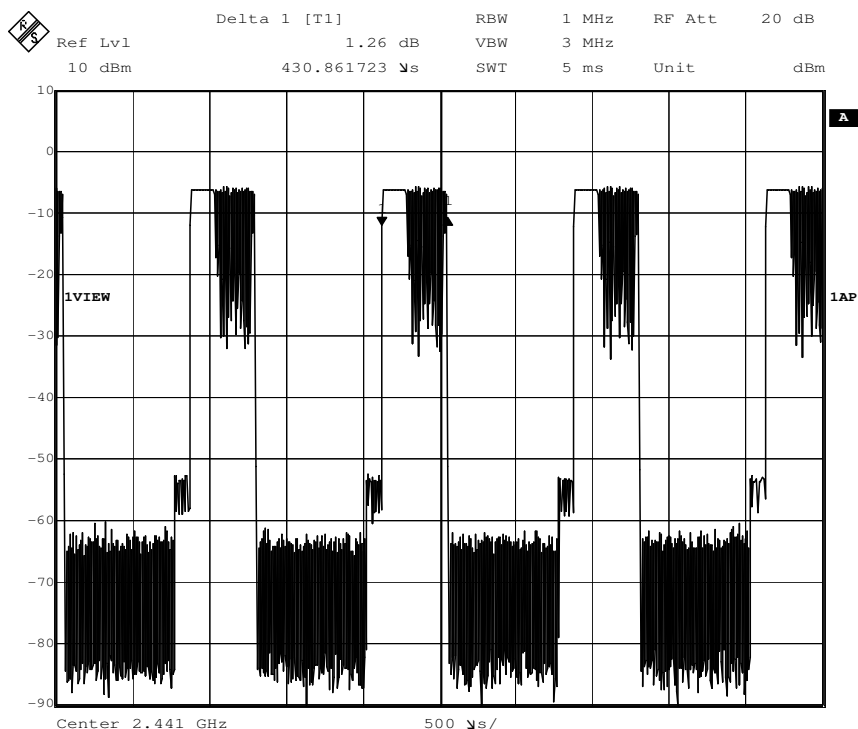




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 29 of 58

FCC ID: WYNWINCHANCE-802

(2) 3DH3

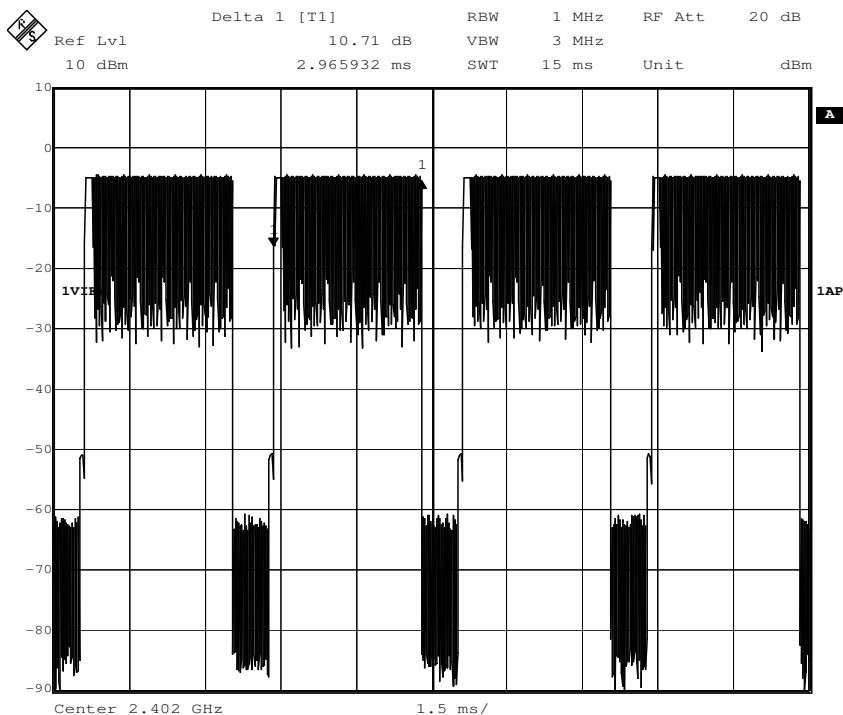


(3) 3DH5

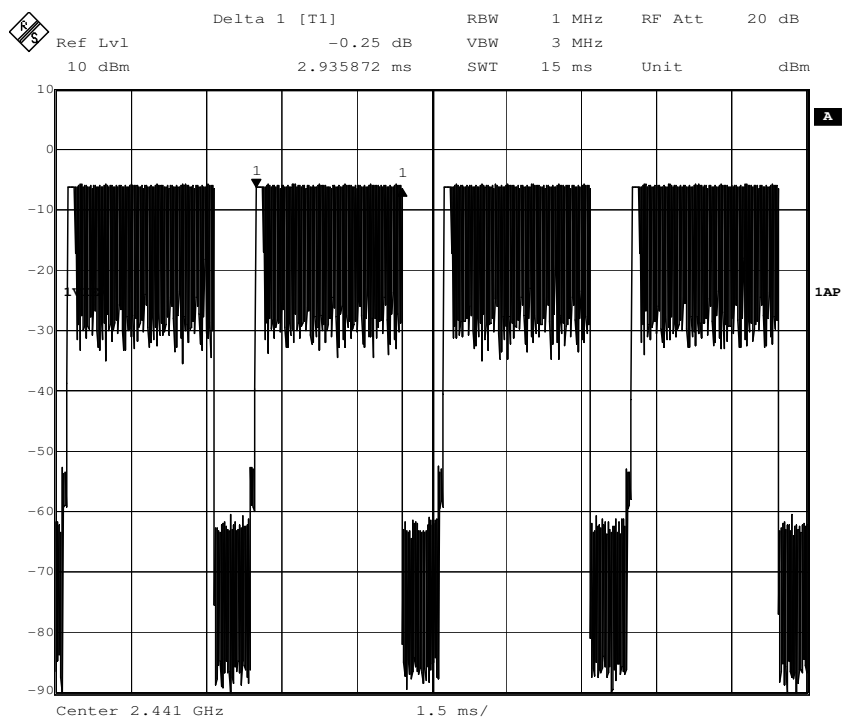




3. Highest Channel (2.480GHz)

(1). 3DH1

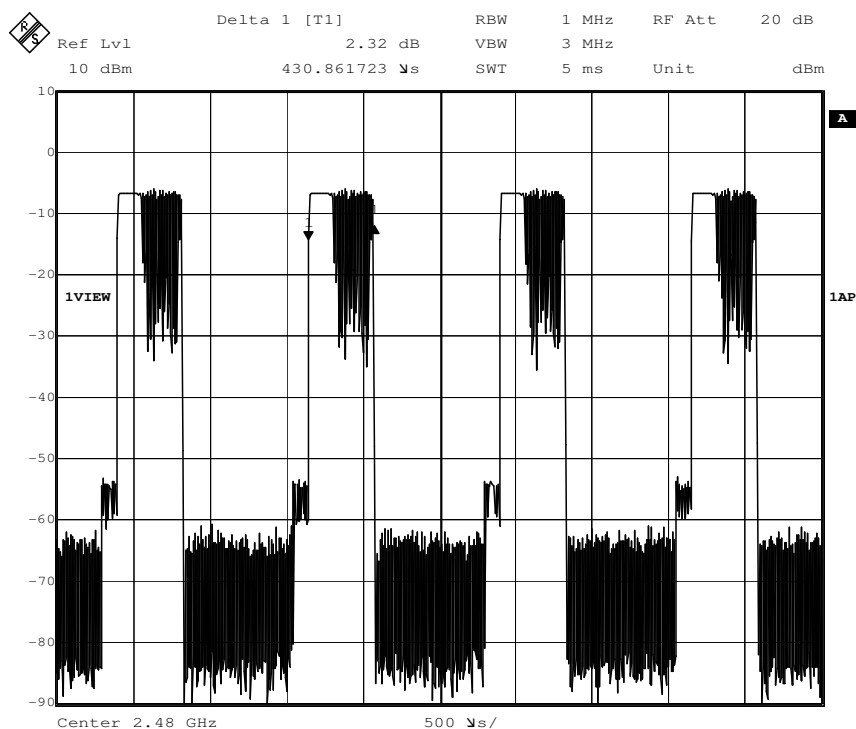


(2) 3DH3

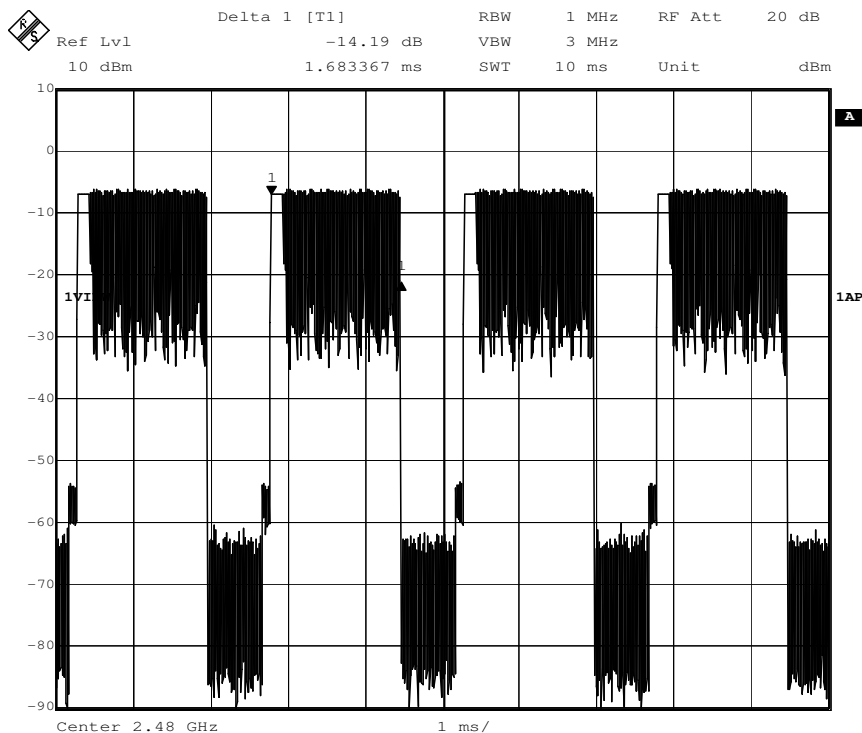



(3) 3DH5

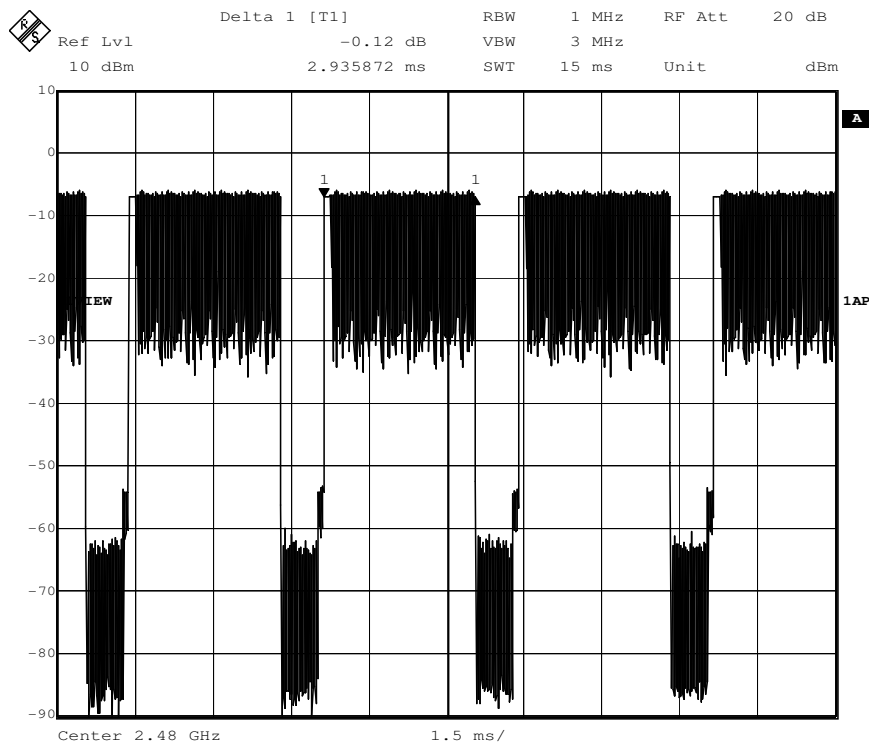

Remark:

In communication data link mode (expect inquiry or page mode) the hopping rate is 1600 per second, the 79 channels will be randomly selected for RF channel, and each channel have equal probability to be selected. The hop selection scheme is defined in Clause 2.6 of Part B of Volume 2 of core specification of Bluetooth.

The Dwell time must be calculated via following formula:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

Period = 0.4 (seconds/ channel) x 79 (channel) = 31.6 seconds

So

Dwell time DH1= slot time * (1600/2/79) * 31.6

Dwell time DH3= slot time * (1600/4/79) * 31.6

Dwell time DH5= slot time * (1600/6/79) * 31.6

The RF channel will remain fixed for duration of a packet, that means for DH3 packet the RF frequency will remain unchanged during 3 slots (1slot=1/1600=625us), and for DH5 packet the RF frequency will remain unchanged during 5 slots, illustrated the principle as below:

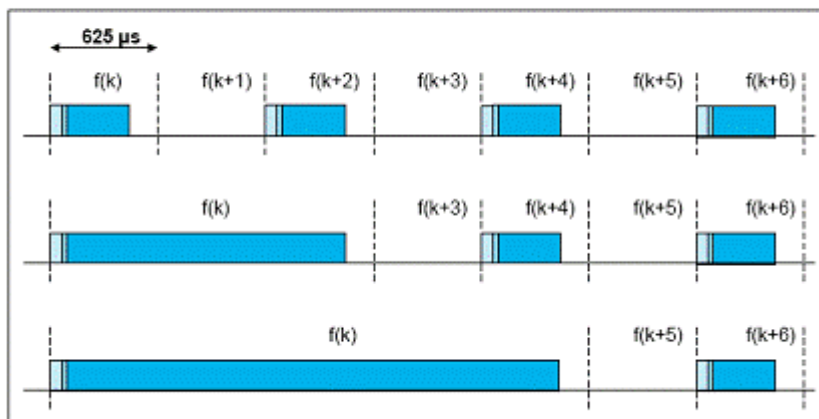


Figure 2.14: Single- and multi-slot packets.

Therefore, in a certain period for different packet types, the quantities of hops (not hopping rate 1600) are different, accurately, the quantity of hops for DH1 is double of DH3's and triple of DH5's.

“for DH1 packet, 1 hop in 1 slot; for DH3 packet, 1/2 hop in 1 slot; for DH5 packet, 1/3 hop in 1 slot.”, explained as below:

From the illustrated hopping scheme:

For DH1, in two slots, there are two hops, i.e. $f(k)$ in Slot(k), $f(k+1)$ in Slot(k+1), means DH1 1 hop in 1 slot;

For DH3, in four slots, there are two hops, i.e. $f(k)$ in Slot(k) & Slot(k+1) & Slot(k+2), $f(k+3)$ in Slot(k+3), means DH3 2 hops in four slots -> 1/2 hop in 1 slot;

For DH5, in six slots, there are two hops, i.e. $f(k)$ in Slot(k) & Slot(k+1) & Slot(k+2) & Slot(k+3) & Slot(k+4), $f(k+5)$ in Slot(k+5), means DH3 2 hops in six slots -> 1/3 hop in 1 slot.

The Hopping rate in the formula should not be fixed value, for DH1, it is 1600/2; for DH3, it is 1600/4; for DH5, it is 1600/6.



To calculate Dwell time of data transmission of Bluetooth system, the worst case is for Bluetooth PICONET that contains two devices only (although Bluetooth PICONET can support up to eight devices), and for Bluetooth data transmission, after device A sending a packet to device B, device A must get response packet from device B to continue data transmission;

For DH1 packet: assume device A is EUT, the worst case is after device A sending a DH1 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 1 time slot for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is half of 1600, i.e. 800 hops per second for EUT;

For DH3 packet: assume device A is EUT, the worst case is after device A sending a DH3 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 3 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is quarter of 1600, i.e. 400 hops per second for EUT;

For DH5 packet: assume device A is EUT, the worst case is after device A sending a DH5 packet to device B, device A gets a DH1 response packet from device B, that means device A needs 5 time slots for transmitting and 1 time slot for receiving, therefore, the actual hopping rate of device A is sixth of 1600, i.e. $1600/6=266.7$ hops per second for EUT;



7.8 Pseudorandom Frequency Hopping Sequence

7.8.1 Standard requirement

15.247(a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

7.8.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

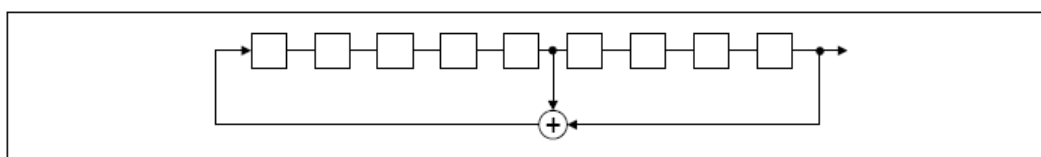

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

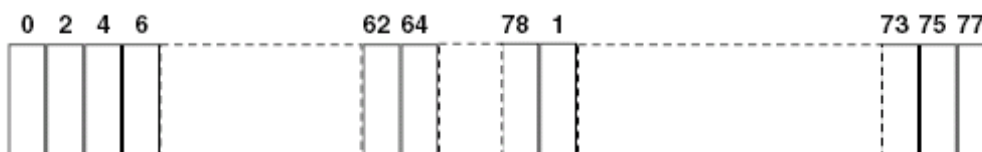


Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



7.9 Maximum Peak Output Power

Test Requirement:	FCC Part 15.247 & DA 00-705
Test Method:	Base on ANSI 63.4.
Test Limit:	Regulation 15.247 (b)(1)For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Hopping channel number" of this document. The 1 watt (30.0dBm) limit applies.
Test mode:	Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, ($\pi/4$)QPSK and 8DPSK mode, found the worst case mode is GFSK. Reported the GFSK and 8DPSK mode.
Test Configuration:	

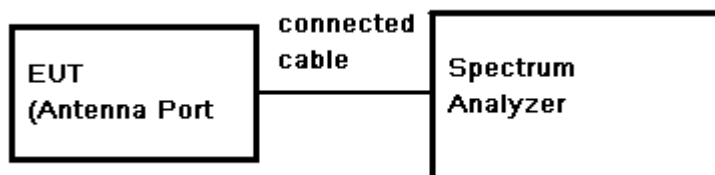

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2 MHz. VBW = 2 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 37 of 58


FCC ID: WYNWINCHANCE-802

Test Result:				
GFSK:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2.402	-0.02	30.0	Pass
Middle	2.441	0.46	30.0	Pass
Highest	2.480	0.22	30.0	Pass
8DPSK:				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2.402	1.07	30.0	Pass
Middle	2.441	1.51	30.0	Pass
Highest	2.480	1.22	30.0	Pass
Test result: The unit does meet the FCC requirements.				
Test result plot as follows:				




GFSK:

Lowest Channel:

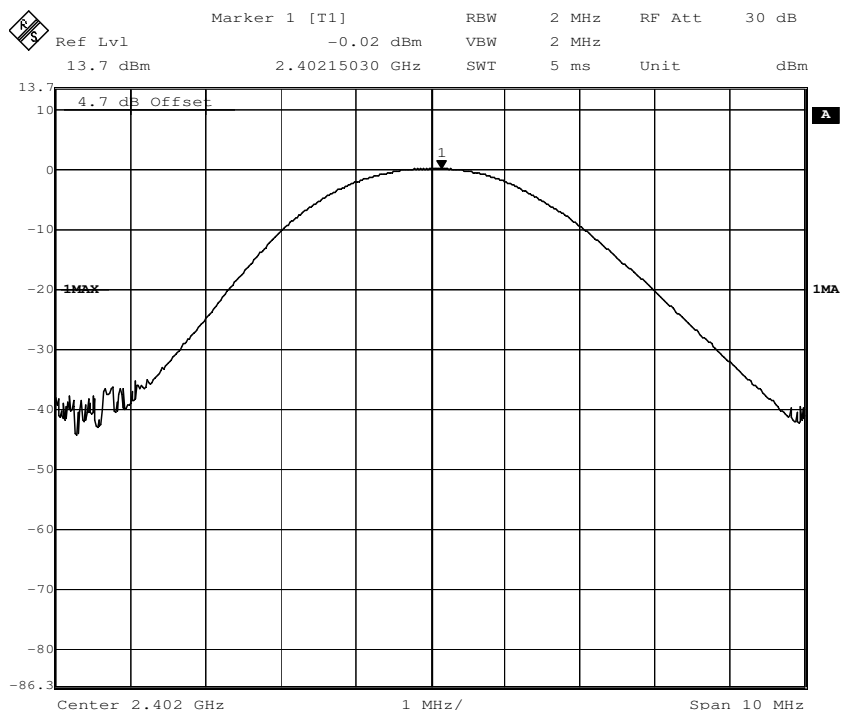

Middle Channel:

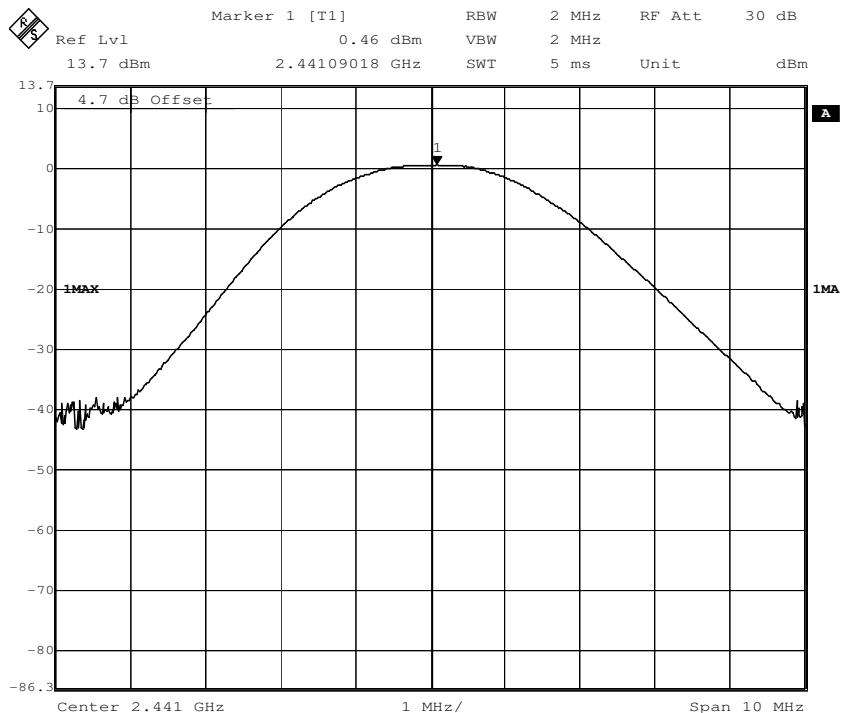





SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401
Page: 39 of 58
FCC ID: WYNWINCHANCE-802

Highest Channel:

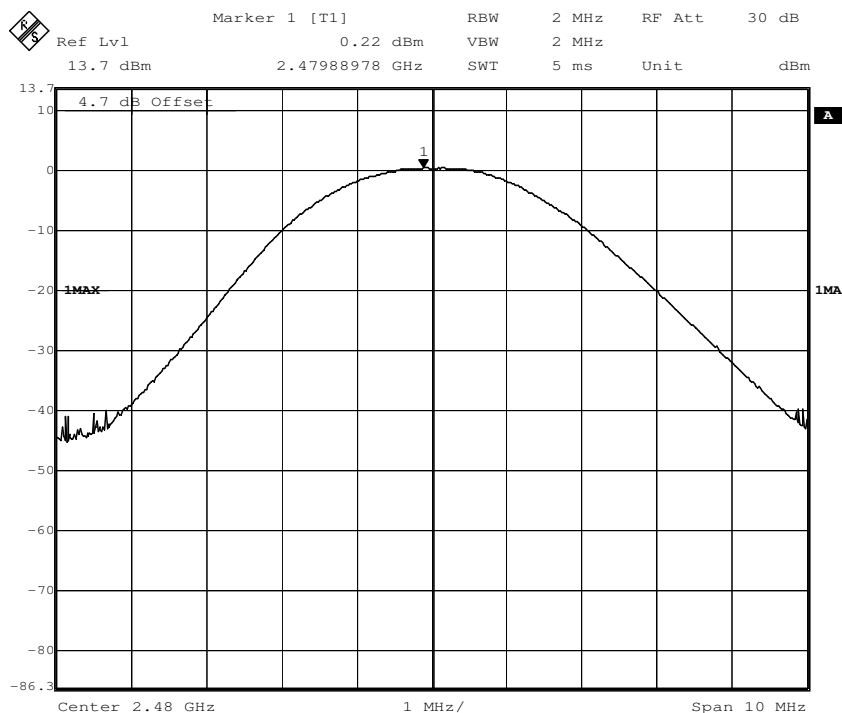

8DPSK:
Lowest Channel:

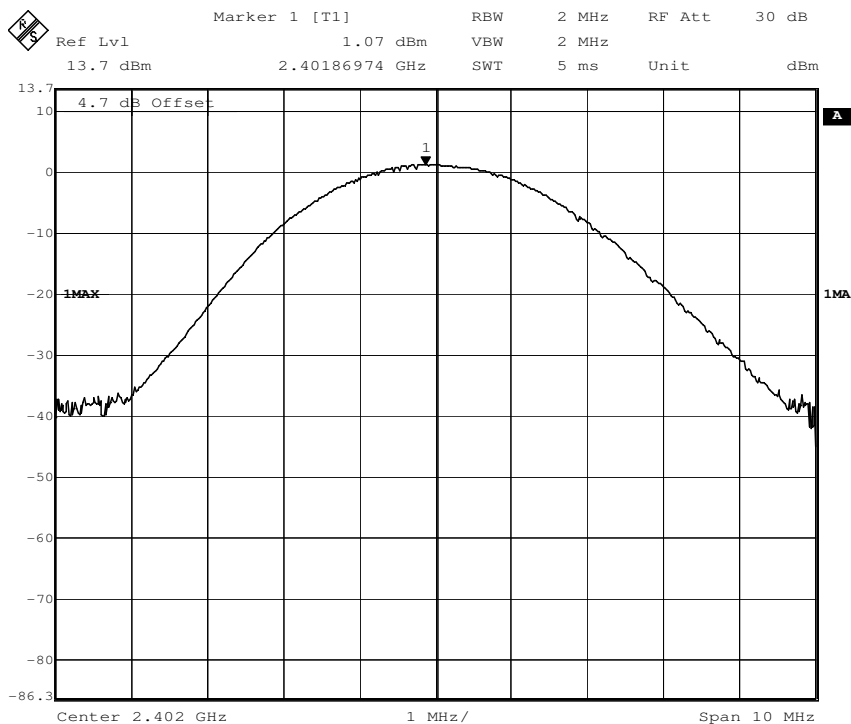





SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401
Page: 40 of 58
FCC ID: WYNWINCHANCE-802

Middle channel:

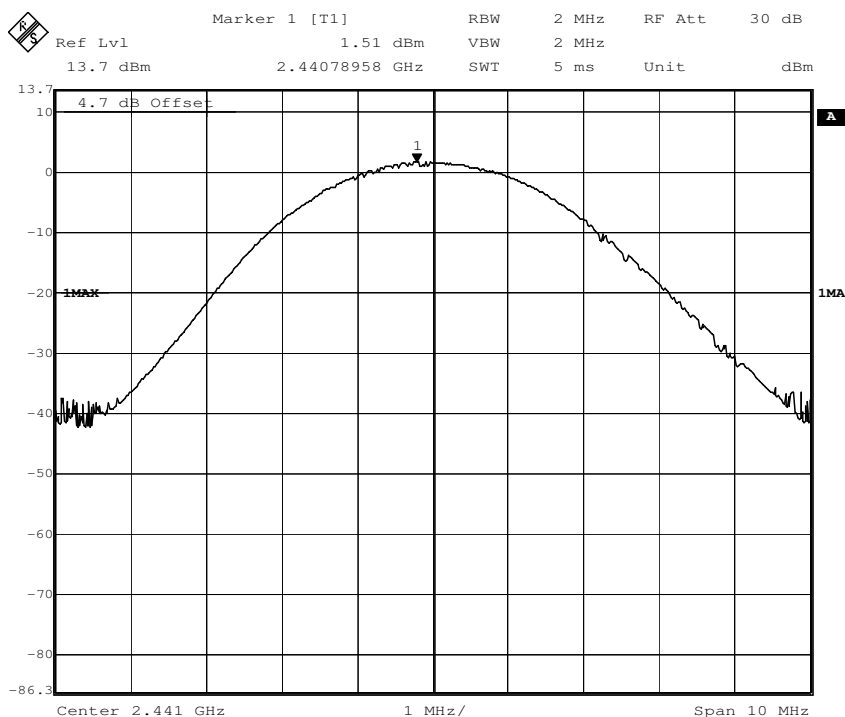

Highest channel:

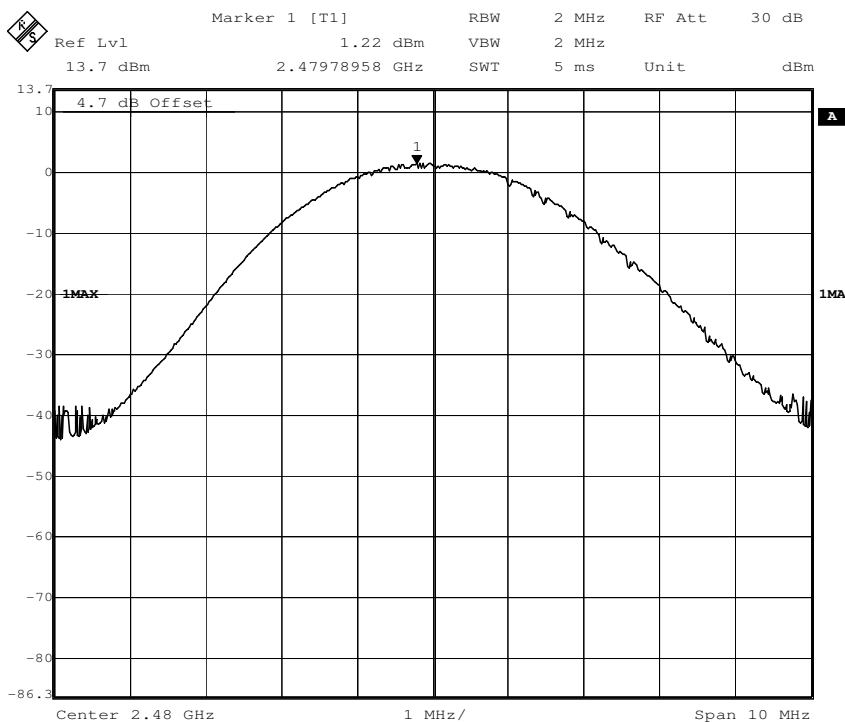



7.10 Conducted Spurious Emissions


Test Requirement: FCC Part 15.247 & DA 00-705

Test Method: Based on FCC Part15 C Section 15.247&15.209:

Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Status: Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, ($\pi/4$)QPSK and 8DPSK mode, found the worst case mode is GFSK and reported it.

Test Configuration:

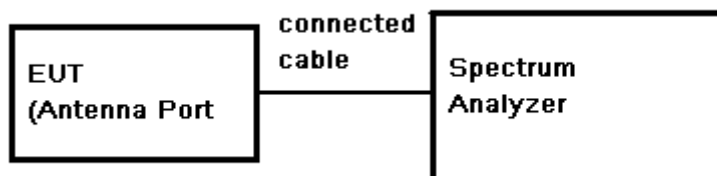

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW \geq RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Test result plot as follows:




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 42 of 58

FCC ID: WYNWINCHANCE-802

Lowest Channel: 30M to 1GHz

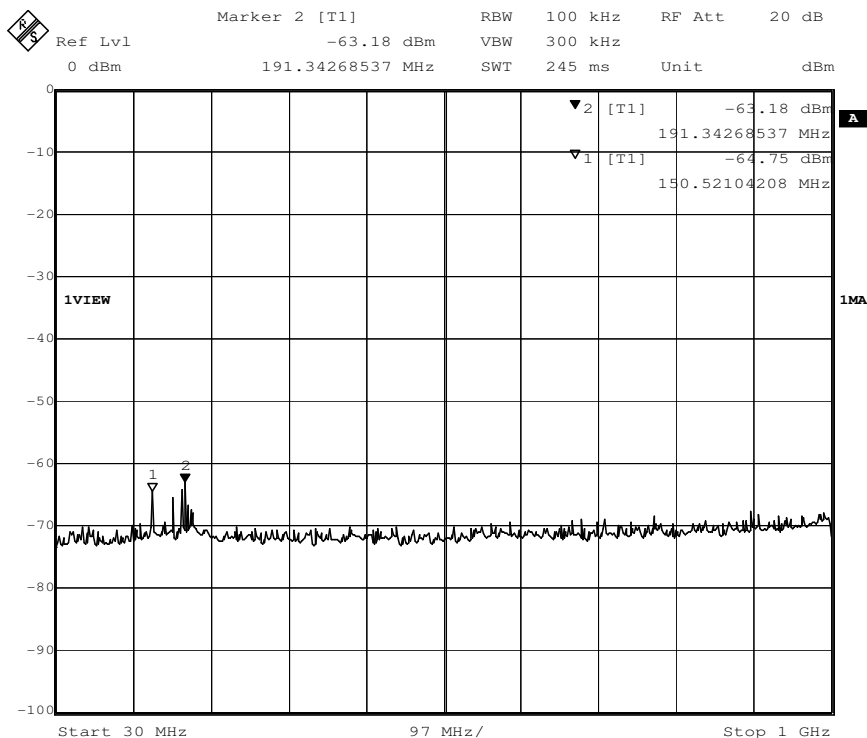

1G to 5GHz

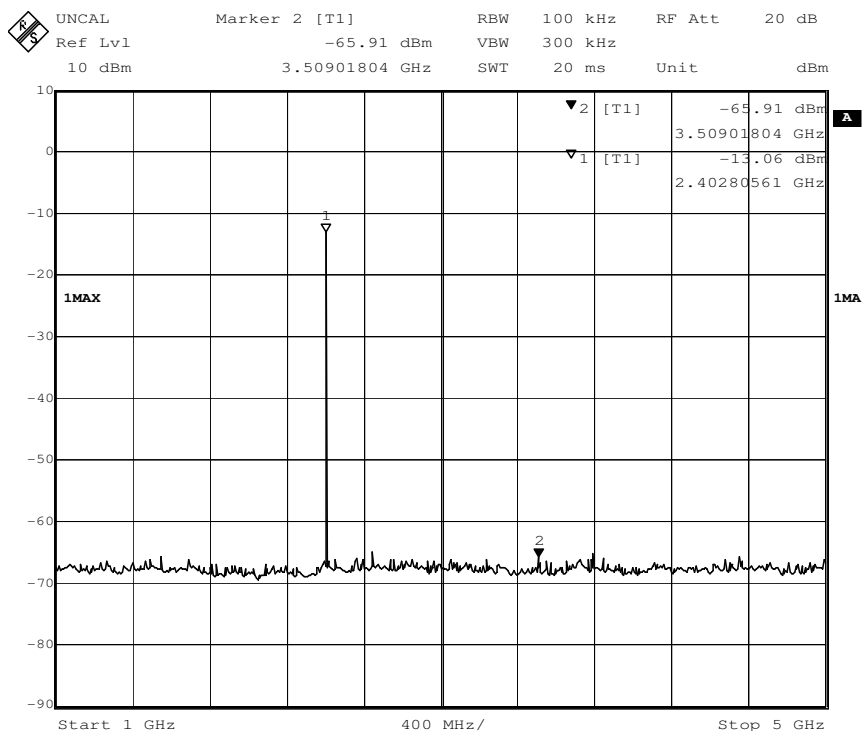




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 43 of 58

FCC ID: WYNWINCHANCE-802

5G to 25GHz

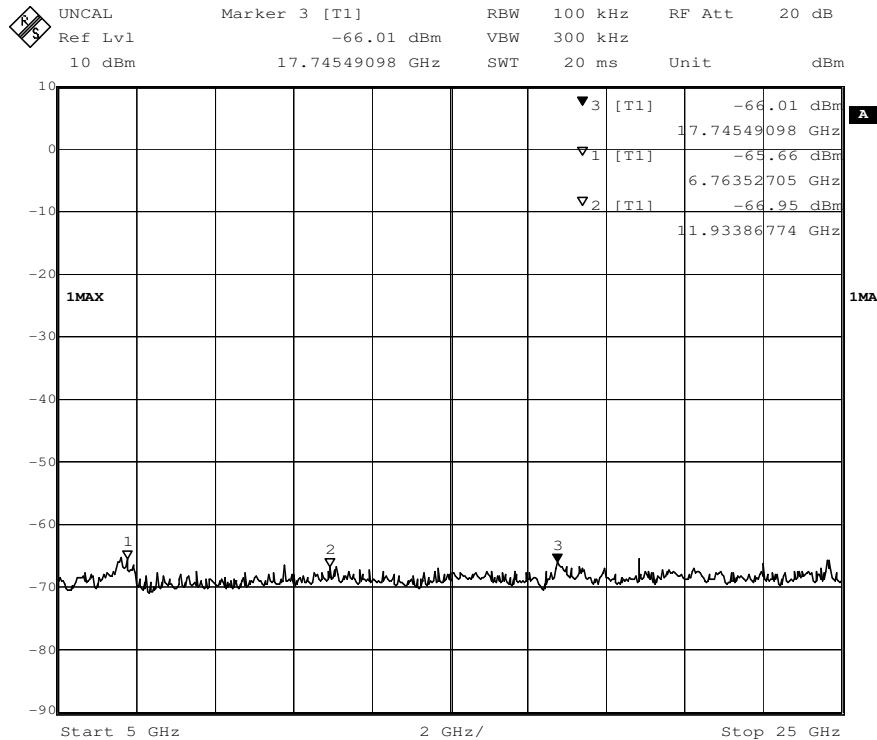

Middle Channel: 30M to 1GHz

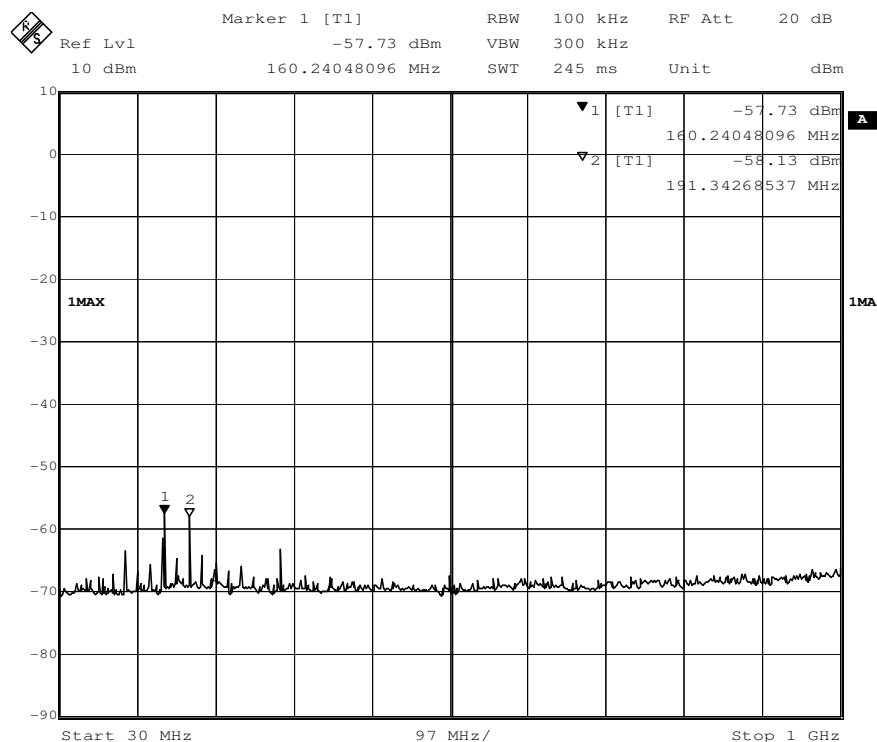




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 44 of 58

FCC ID: WYNWINCHANCE-802

1G to 5GHz

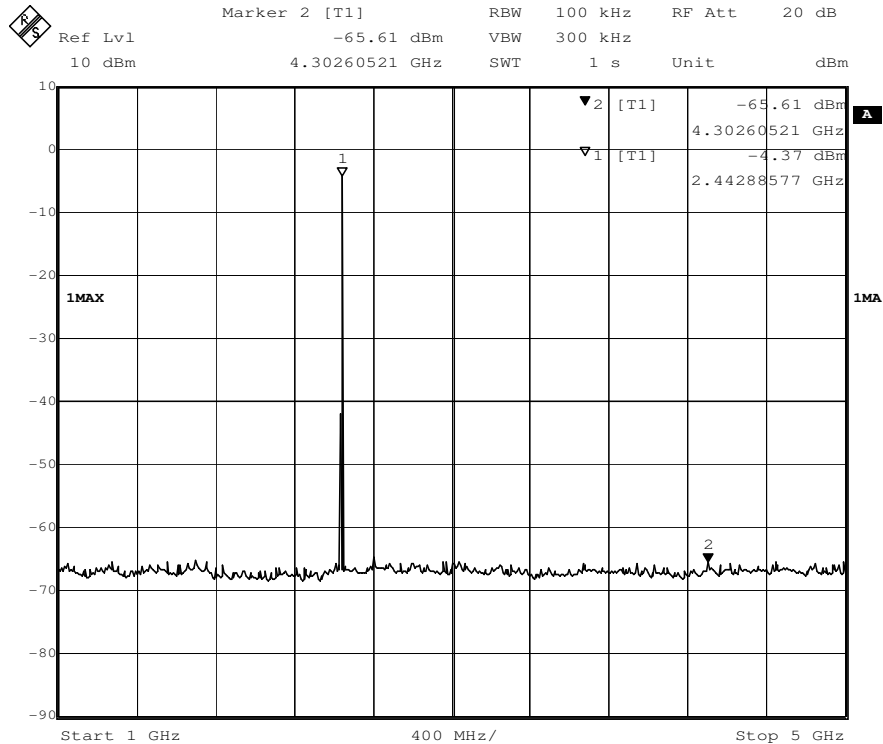

5G to 25GHz

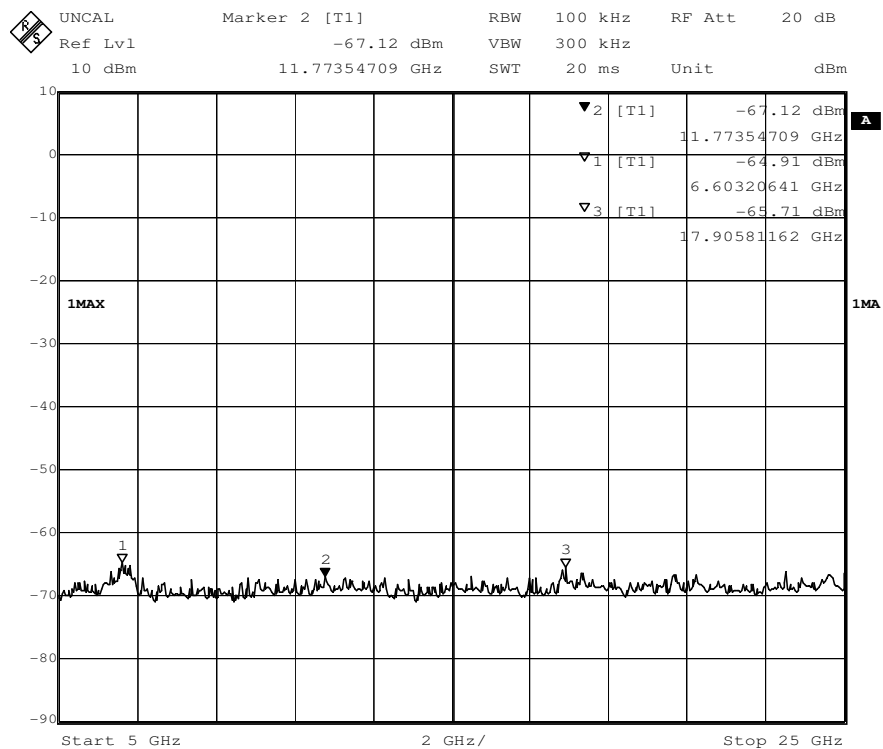




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 45 of 58

FCC ID: WYNWINCHANCE-802

Highest Channel: 30M to 1GHz

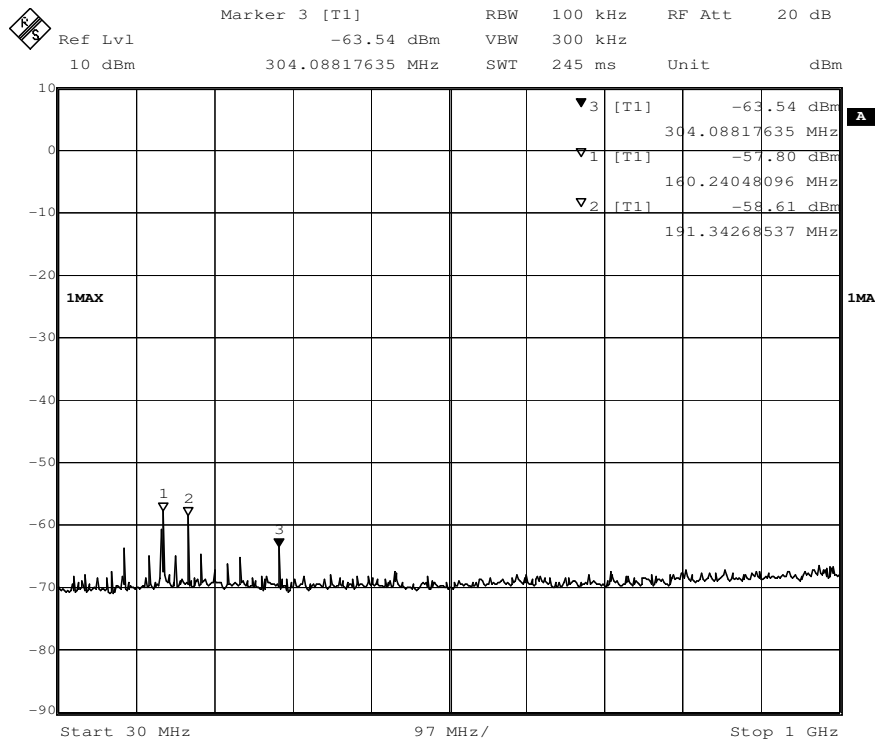

1G to 5GHz

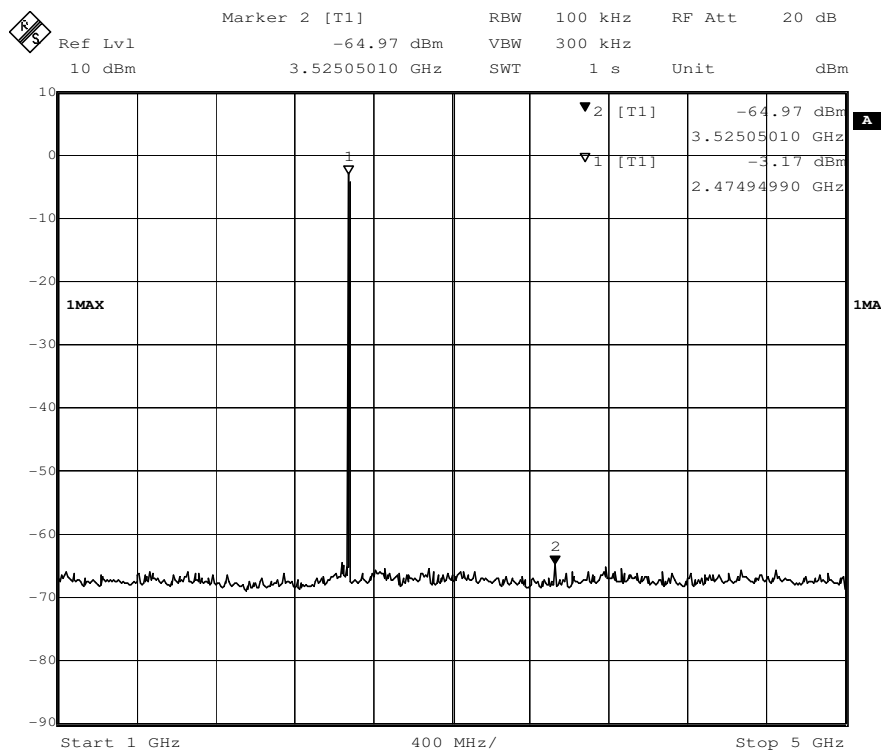




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 46 of 58

FCC ID: WYNWINCHANCE-802

5G to 25GHz

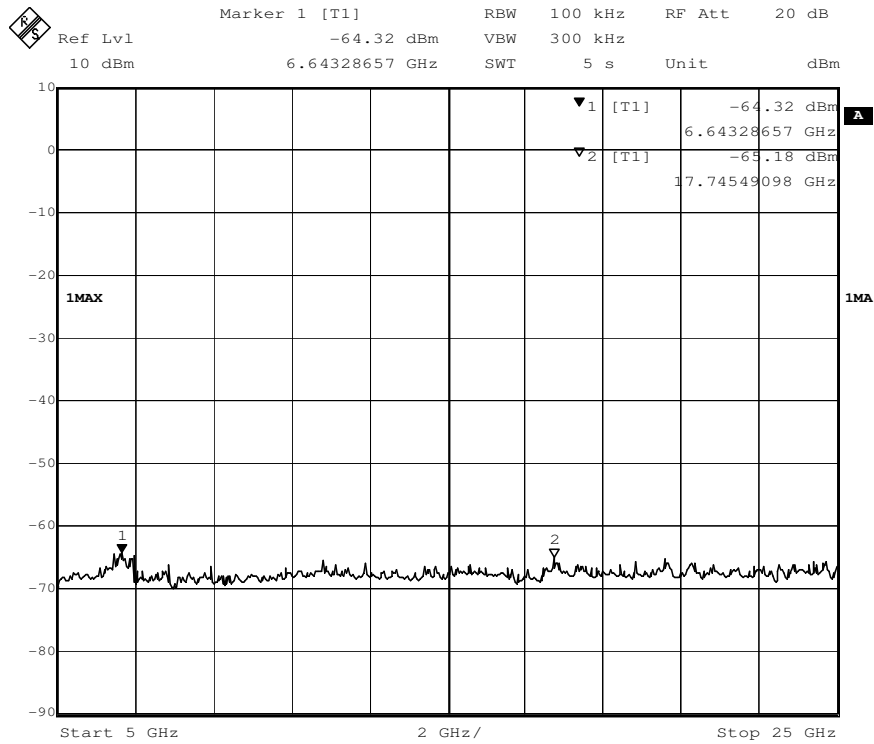




7.11 Radiated Spurious Emissions


Test Requirement:	FCC 15.247(d) & 15.209
Test Method:	ANSI C63.4 section 8 & 13
Test Status:	Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, ($\pi/4$)QPSK and 8DPSK mode, found the worst case mode is GFSK. and reported it.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
15.247(d) limit:	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration:

- 1) 30MHz to 1GHz emissions:

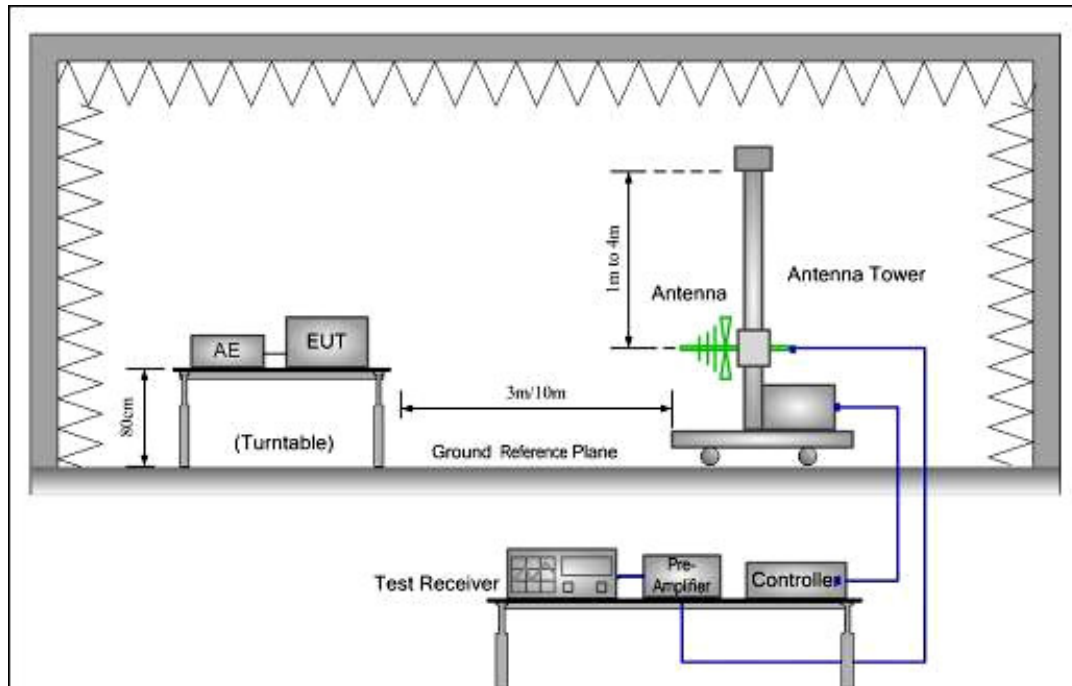

- 2) 1GHz to 40GHz emissions:

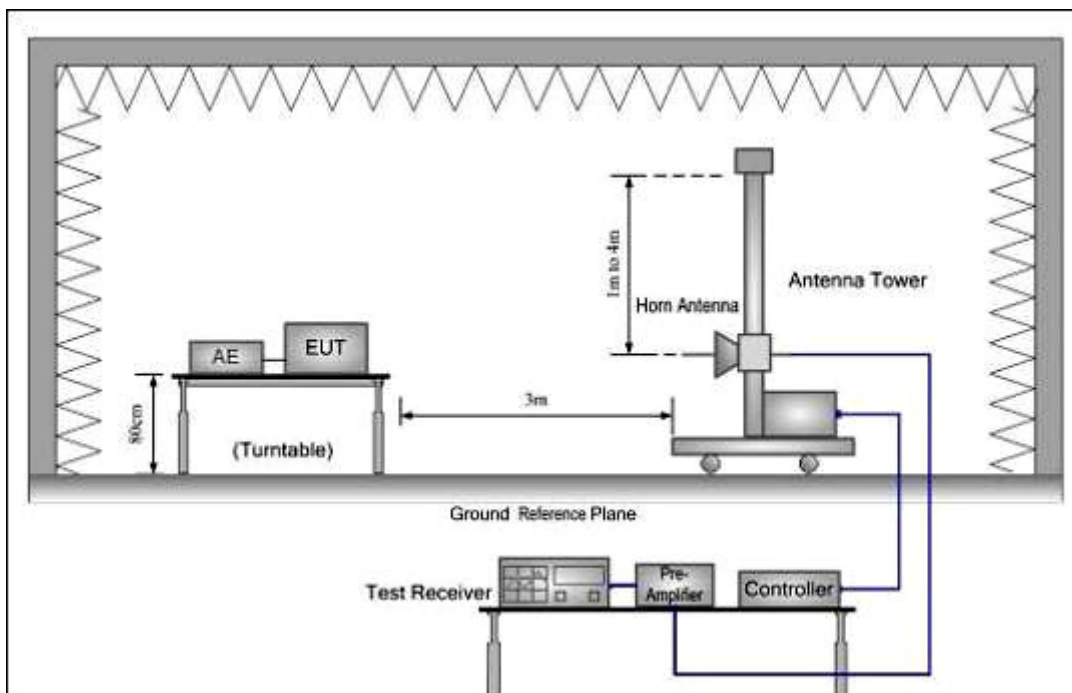



Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.



7.11.1 Harmonic and other spurious emissions

7.11.1.1 Test at low Channel in transmitting status

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Reading Level (dBμV)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
94.978	40.77	9.00	0.90	24.50	26.17	43.50	Vertical
131.850	34.47	12.04	1.00	24.40	23.11	43.50	V
199.990	43.2	10.60	1.20	24.20	30.89	43.50	V
133.790	40.04	11.88	1.00	24.40	28.55	43.50	Horizontal
161.920	41.07	10.12	1.10	24.40	27.89	43.50	H
199.990	47.95	10.60	1.20	24.20	35.55	43.50	H

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4804.000	33.19	6.20	36.30	42.52	45.62	74.00	V
7206.000	36.00	8.36	32.20	40.01	48.92	74.00	V
9608.000	36.42	8.80	32.50	40.53	52.72	74.00	V
4804.000	33.19	6.90	33.01	43.51	50.59	74.00	H
7206.000	36.08	8.36	32.20	40.24	48.70	74.00	H
9608.000	36.40	8.80	32.50	35.27	48.00	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4804.000	33.19	6.20	36.30	38.56	41.66	54.00	V
7206.000	36.05	8.36	32.20	23.23	35.44	54.00	V
9608.000	36.40	8.80	32.50	21.47	34.17	54.00	V
4804.000	33.19	6.90	33.01	36.58	43.66	54.00	H
7206.000	36.11	8.36	32.20	22.77	35.04	54.00	H
9608.000	36.42	8.80	32.50	22.81	35.53	54.00	H



7.11.1.2 Test at middle Channel in transmitting status

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
95.960	9.24	0.90	24.50	41.55	27.19	43.50	Vertical
128.940	12.26	1.00	24.40	38.81	27.67	43.50	V
198.780	10.58	1.20	24.22	43.33	30.89	43.50	V
94.990	9.00	0.90	24.50	38.36	23.76	43.50	Horizontal
167.740	10.00	1.20	24.34	43.41	30.27	43.50	H
198.780	10.58	1.20	24.22	45.68	33.24	43.50	H

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4882.000	33.27	7.20	32.97	50.55	58.04	74.00	V
7323.000	36.16	6.95	32.29	36.68	47.50	74.00	V
9764.000	36.40	7.20	32.44	38.44	49.60	74.00	V
4882.000	33.27	7.20	32.97	50.31	57.81	74.00	H
7323.000	36.16	6.95	32.29	36.95	47.77	74.00	H
9764.000	36.40	7.20	32.44	38.19	49.35	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4882.000	33.27	7.20	32.97	42.65	50.14	54.00	V
7323.000	36.16	6.95	32.29	21.99	32.81	54.00	V
9764.000	36.40	7.20	32.44	23.46	34.62	54.00	V
4882.000	33.27	7.20	32.97	45.28	52.78	54.00	H
7323.000	36.16	6.95	32.29	22.45	33.27	54.00	H
9764.000	36.40	7.20	32.44	21.82	32.98	54.00	H



7.11.1.3 Test at high Channel in transmitting status

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
137.670	11.74	1.00	24.40	40.19	28.53	43.50	Vertical
490.750	16.99	2.00	25.40	36.65	30.24	46.00	V
718.700	19.28	2.40	25.399	35.48	31.77	46.00	V
95.925	9.24	0.90	24.50	40.93	26.57	43.50	Horizontal
549.920	18.30	2.10	25.40	33.27	28.27	46.00	H
934.040	20.60	2.70	24.86	35.98	24.42	46.00	H

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4960.000	33.36	7.33	32.92	50.12	57.90	74.00	V
7440.000	36.23	6.05	32.37	39.49	49.40	74.00	V
9920.000	36.50	7.04	32.50	40.16	51.20	74.00	V
4960.000	33.36	7.33	32.92	50.43	58.20	74.00	H
7440.000	36.23	6.05	32.37	39.82	49.73	74.00	H
9920.000	36.50	7.04	32.50	41.53	52.57	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4960.000	33.36	7.33	32.92	42.56	50.34	54.00	V
7440.000	36.23	6.05	32.37	24.19	34.10	54.00	V
9920.000	36.50	7.04	32.50	23.52	34.56	54.00	V
4960.000	33.36	7.33	32.92	42.57	50.34	54.00	H
7440.000	36.23	6.05	32.37	34.35	44.26	54.00	H
9920.000	36.50	7.04	32.50	31.84	42.88	54.00	H



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 53 of 58

FCC ID: WYNWINCHANCE-802

Remark:

1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.



7.11.2 Radiated Emissions which fall in the restricted bands

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	Base on ANSI 63.4
Test Status:	Pre-test the EUT in continuous transmitting mode at the lowest (2402MHz), middle (2441MHz) and highest (2480MHz) channel with GFSK, ($\pi/4$)QPSK and 8DPSK mode, found the worst case mode is 8DPSK and reported it.
Measurement Distance:	3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10Hz Sweep = auto Detector function = peak Trace = max hold



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 55 of 58

FCC ID: WYNWINCHANCE-802

Test Result:

1. Low Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.000	28.32	4.23	37.03	51.00	32.45	46.52	27.97
2350.000	28.42	4.30	37.10	50.40	31.50	46.02	27.12
2390.000	27.88	4.65	34.30	50.50	31.20	48.73	29.43
2490.000	28.83	4.40	37.00	50.90	32.10	47.13	28.33
2500.000	28.83	4.40	37.00	51.77	32.25	48.00	28.48
2483.500	28.74	4.80	34.73	52.40	34.00	51.21	32.81

2. Middle Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.000	28.32	4.23	37.03	52.10	33.13	47.62	28.6
2350.000	28.42	4.30	37.10	52.39	33.84	48.01	29.46
2390.000	27.88	4.65	34.30	51.81	32.63	50.04	30.86
2490.000	28.83	4.40	37.00	52.53	33.90	48.76	30.13
2500.000	28.83	4.40	37.00	53.09	34.84	49.32	31.07
2483.500	28.74	4.80	34.73	53.20	34.64	52.01	33.45

3. High Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.000	28.32	4.23	37.03	52.24	33.34	47.76	28.86
2350.000	28.42	4.30	37.10	53.06	33.59	48.68	29.21
2390.000	27.88	4.65	34.30	51.98	32.84	50.21	31.07
2490.000	28.83	4.40	37.00	53.98	34.51	50.21	30.74
2500.000	28.83	4.40	37.00	54.69	35.30	50.92	31.53
2483.500	28.74	4.80	34.73	53.29	35.33	52.10	34.14

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.



SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401

Page: 56 of 58

FCC ID: WYNWINCHANCE-802

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		



7.12 Band Edges Requirement

Test Requirement: FCC Part 15 C

Test Method: Based on ANSI 63.4

Operation within the band 2400 – 2483.5 MHz

Test Status: Pretest the EUT in hopping on and hopping off, found the worse case was the hopping off. The band edge was measured and recorded the worse case.

Requirements: Section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Method of Measurement: Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.

The Upper Edges attenuated more than 20dB.

The graph as below. Represents the emissions take for this device.




SGS-CSTC Standards Technical Services Co., Ltd.
GuangZhou Branch Testing Center

Report No.: GZEM100700123401


Page: 58 of 58

FCC ID: WYNWINCHANCE-802

Low channel:

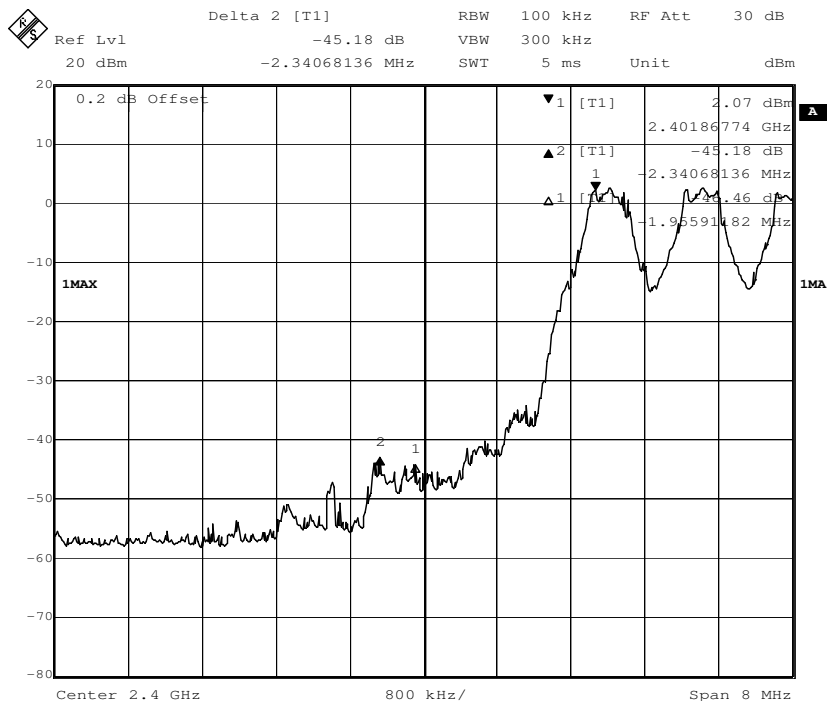

Highest Channel:

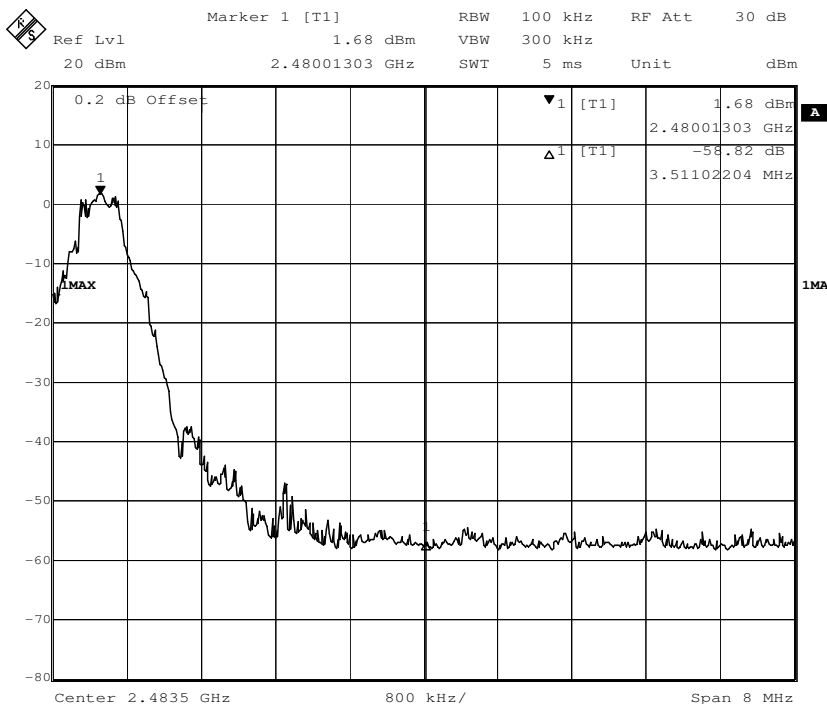

Test result: The unit does meet the FCC requirements.

--End of Report--