



FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Smart phone
BRAND NAME : Sonim
MODEL NAME : XP9900 (P14001)
FCC ID : WYPP14010
STANDARD : 47 CFR Part 2, 27 Subpart O (3700-3980MHz)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : Aug. 21, 2023 ~ Aug. 30, 2023

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 5
1.5 Modification of EUT ... 6
1.6 Maximum EIRP and Emission Designator ... 6
1.7 Testing Location ... 6
1.8 Test Software ... 7
1.9 Applicable Standards ... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 8
2.1 Test Mode ... 8
2.2 Connection Diagram of Test System ... 9
2.3 Support Unit used in test configuration and system ... 9
2.4 Measurement Results Explanation Example ... 9
2.5 Frequency List of Low/Middle/High Channels ... 10
3 CONDUCTED TEST ITEMS ... 11
3.1 Measuring Instruments ... 11
3.2 Test Setup ... 11
3.3 Test Result of Conducted Test ... 11
3.4 Conducted Output Power and EIRP ... 12
3.5 Peak-to-Average Ratio ... 13
3.6 Occupied Bandwidth ... 14
3.7 Conducted Band Edge ... 15
3.8 Conducted Spurious Emission ... 16
3.9 Frequency Stability ... 17
4 RADIATED TEST ITEMS ... 18
4.1 Measuring Instruments ... 18
4.2 Test Setup ... 18
4.3 Test Result of Radiated Test ... 19
4.4 Radiated Spurious Emission ... 20
5 LIST OF MEASURING EQUIPMENT ... 21
6 MEASUREMENT UNCERTAINTY ... 22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG371405F	Rev. 01	Initial issue of report	Nov. 02, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77)	< 43+10log10(P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 30.61 dB at 15180.00 MHz

Note: This is a variant report, the change note could be referred to the XP9900_ Class II Permissive Change letter which is exhibit separately. According to the change, only the related cases were tested, all the other test results are referred to the original report I22Z60589-WMD03.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Sonim Technologies, Inc.
4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

1.2 Manufacturer

Sonim Technologies, Inc.
4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart phone
Brand Name	Sonim
Model Name	XP9900 (P14001)
FCC ID	WYPP14010
IMEI Code	Conducted : 016188000785233 Radiation : 016188000788997
HW Version	V1.0
SW Version	10.0.0-01-12.0.0-10.60.10
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz
SCS	30kHz
Bandwidth	n77: 20 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 5> 5G NR n77: -3.8 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. 5G NR n77 supports SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
2. The device supports HPUE mode for 5G NR n77.
3. The EN-DC combinations declared by the manufacturer are as follows: DC_5A_n77A, DC_12A_n77A, DC_13A_n77A and DC_14A_n77A.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP and Emission Designator

5G NR n77		PI/2 BPSK		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3710.01 ~ 3969.99	0.1618	-	0.1600	-	0.1306	-
30	3715.02 ~ 3964.98	0.1618	-	0.1596	-	0.1603	-
40	3720.00 ~ 3960.00	0.1596	-	0.1592	-	0.1374	-
50	3725.01 ~ 3954.99	0.1589	-	0.1361	-	0.1291	-
60	3730.02 ~ 3949.98	0.1574	-	0.1611	-	0.1294	-
70	3735.00 ~ 3945.00	0.1535	-	0.1426	-	0.1151	-
80	3740.01 ~ 3939.99	0.1510	-	0.1542	-	0.1236	-
90	3745.02 ~ 3934.98	0.1483	-	0.1400	-	0.1197	-
100	3750.00 ~ 3930.00	0.1629	-	0.1618	97M5G7D	0.1343	97M7W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-KS TH01-KS	CN1257	314309



1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-KS	AUDIX	E3	210616

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.




2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #			Test Channel		
		10	20	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Partial	Full	L	M	H
Max. Output Power	n77	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Peak-to-Average Ratio	n77	-									v	v	v				v		v		v	
26dB and 99% Bandwidth	n77	-									v		v	v	v				v		v	
Conducted Band Edge	n77	-									v	v	v				v		v	v		v
Conducted Spurious Emission	n77	-									v	v	v				v			v	v	v
Frequency Stability	n77	-	v										v						v		v	
E.I.R.P	n77	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v
Radiated Spurious Emission	n77	Worst Case																				v
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.9V; Low Voltage =3.6V; High Voltage =4.45V.																					

2.2 Connection Diagram of Test System

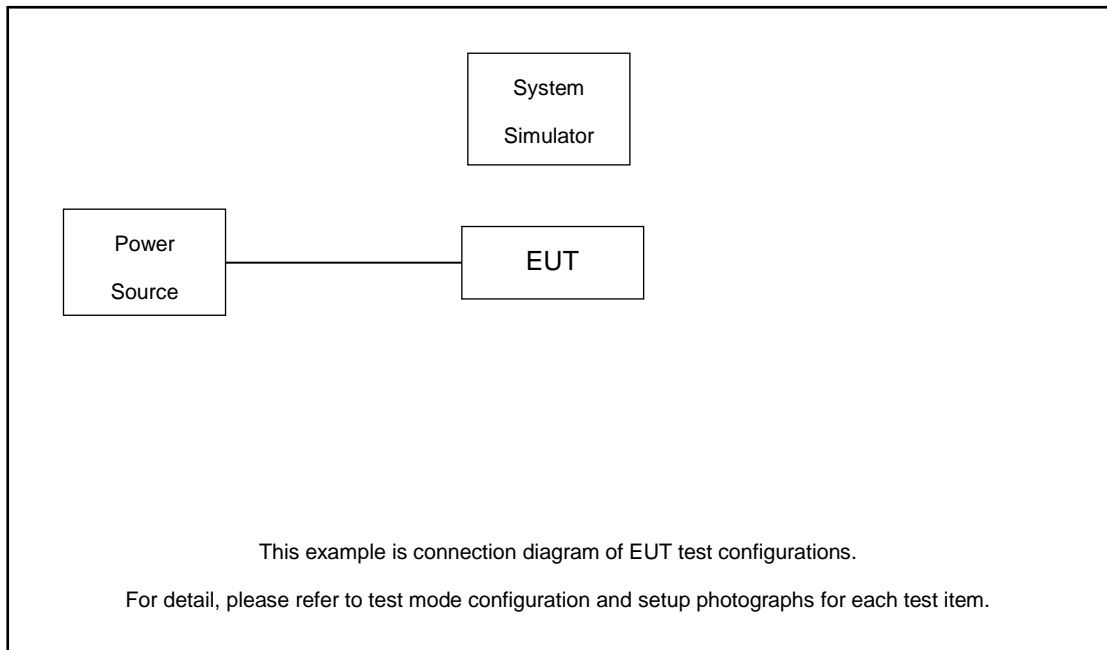

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.5 + 20 = 26.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G n77 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}. \end{aligned}$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)
= -13dBm.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

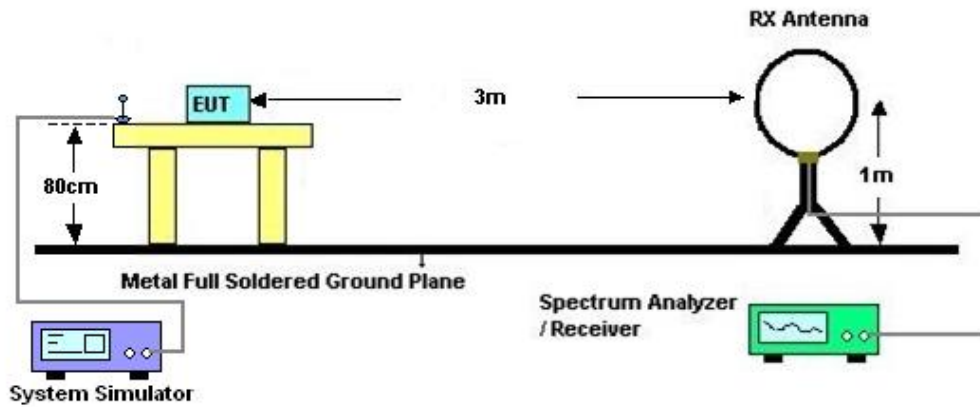

4.2.2 For radiated test from 30MHz to 1GHz

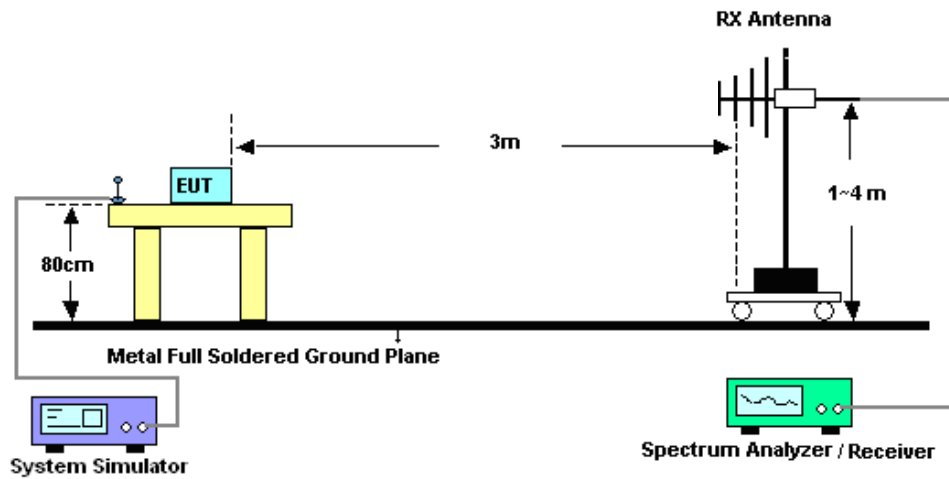

4.2.3 For radiated test above 1GHz

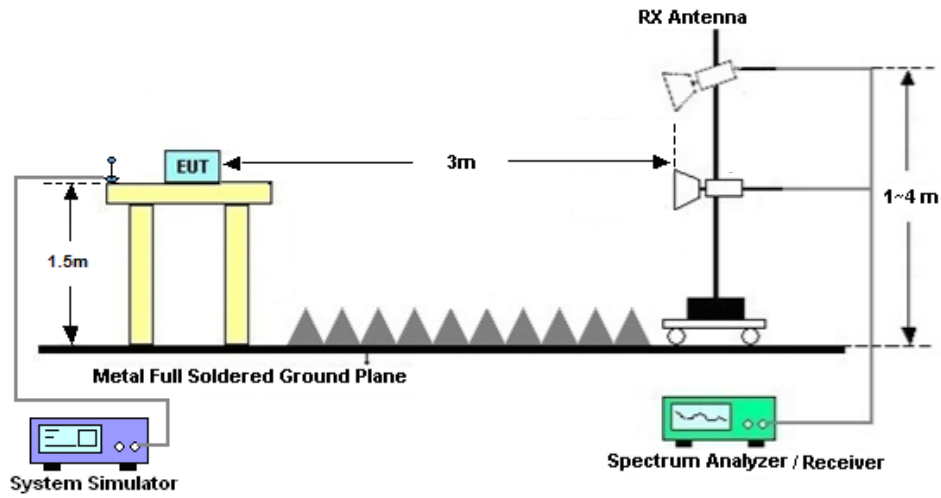

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Aug. 21, 2023~ Aug. 22, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Aug. 21, 2023~ Aug. 22, 2023	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Aug. 21, 2023~ Aug. 22, 2023	Jul. 05, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 13, 2022	Aug. 30, 2023	Oct. 12, 2023	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	May 15, 2023	Aug. 30, 2023	May 14, 2024	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Aug. 30, 2023	Oct. 15, 2023	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-1GHz	Dec. 23, 2022	Aug. 30, 2023	Dec. 22, 2023	Radiation (03CH03-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 15, 2022	Aug. 30, 2023	Nov. 14, 2023	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101116	18GHz~40GHz	Oct. 17, 2022	Aug. 30, 2023	Oct. 16, 2023	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	413740	30MHz ~1000MHz	Jan. 05, 2023	Aug. 30, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	EM	EM18G40G A	060851	18~40GHz	Jan. 05, 2023	Aug. 30, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2082394	1Ghz-18Ghz	Jan. 05, 2023	Aug. 30, 2023	Jan. 04, 2024	Radiation (03CH03-KS)
Amplifier	Keysight	83017A	MY53270319	1GHz~26.5GHz	Oct. 12, 2022	Aug. 30, 2023	Oct. 11, 2023	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 30, 2023	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Aug. 30, 2023	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Aug. 30, 2023	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±2.26 dB
Occupied Channel Bandwidth	±0.1 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.76dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.65dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.57dB
---	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-3.8dB

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power (dBm)	EIRP (dBm)	EIRP (W)
77	30	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@1	25.56	21.76	0.1500
77	30	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	25.59	21.79	0.1510
77	30	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	24.66	20.86	0.1219
77	30	20	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.89	22.09	0.1618
77	30	20	656000	3840	DFT-s-OFDM QPSK	1@1	25.84	22.04	0.1600
77	30	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.96	21.16	0.1306
77	30	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@1	25.41	21.61	0.1449
77	30	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	25.47	21.67	0.1469
77	30	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	24.46	20.66	0.1164
77	30	30	647668	3715.02	DFT-s-OFDM PI/2 BPSK	1@1	25.57	21.77	0.1503
77	30	30	647668	3715.02	DFT-s-OFDM QPSK	1@1	25.35	21.55	0.1429
77	30	30	647668	3715.02	DFT-s-OFDM 16 QAM	1@1	24.7	20.9	0.1230
77	30	30	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.89	22.09	0.1618
77	30	30	656000	3840	DFT-s-OFDM QPSK	1@1	25.83	22.03	0.1596
77	30	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.85	22.05	0.1603
77	30	30	664332	3964.98	DFT-s-OFDM PI/2 BPSK	1@1	25.4	21.6	0.1445
77	30	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	25.5	21.7	0.1479
77	30	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	24.55	20.75	0.1189
77	30	40	648000	3720	DFT-s-OFDM PI/2 BPSK	1@1	25.74	21.94	0.1563
77	30	40	648000	3720	DFT-s-OFDM QPSK	1@1	25.73	21.93	0.1560
77	30	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	24.83	21.03	0.1268
77	30	40	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.83	22.03	0.1596
77	30	40	656000	3840	DFT-s-OFDM QPSK	1@1	25.82	22.02	0.1592
77	30	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.18	21.38	0.1374
77	30	40	664000	3960	DFT-s-OFDM PI/2 BPSK	1@1	25.5	21.7	0.1479
77	30	40	664000	3960	DFT-s-OFDM QPSK	1@1	25.48	21.68	0.1472
77	30	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	24.59	20.79	0.1199
77	30	50	648334	3725.01	DFT-s-OFDM PI/2 BPSK	1@1	25.36	21.56	0.1432
77	30	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	24.52	20.72	0.1180
77	30	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	24.45	20.65	0.1161
77	30	50	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.81	22.01	0.1589
77	30	50	656000	3840	DFT-s-OFDM QPSK	1@1	25.09	21.29	0.1346
77	30	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.91	21.11	0.1291
77	30	50	663666	3954.99	DFT-s-OFDM PI/2 BPSK	1@1	25.78	21.98	0.1578
77	30	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	25.14	21.34	0.1361
77	30	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	24.19	20.39	0.1094
77	30	60	648668	3730.02	DFT-s-OFDM PI/2 BPSK	1@1	25.29	21.49	0.1409
77	30	60	648668	3730.02	DFT-s-OFDM QPSK	1@1	25.42	21.62	0.1452
77	30	60	648668	3730.02	DFT-s-OFDM 16 QAM	1@1	24.43	20.63	0.1156

77	30	60	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.77	21.97	0.1574
77	30	60	656000	3840	DFT-s-OFDM QPSK	1@1	25.87	22.07	0.1611
77	30	60	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.92	21.12	0.1294
77	30	60	663332	3949.98	DFT-s-OFDM PI/2 BPSK	1@1	25.35	21.55	0.1429
77	30	60	663332	3949.98	DFT-s-OFDM QPSK	1@1	25.38	21.58	0.1439
77	30	60	663332	3949.98	DFT-s-OFDM 16 QAM	1@1	24.44	20.64	0.1159
77	30	70	649000	3735	DFT-s-OFDM PI/2 BPSK	1@1	25.28	21.48	0.1406
77	30	70	649000	3735	DFT-s-OFDM QPSK	1@1	25.27	21.47	0.1403
77	30	70	649000	3735	DFT-s-OFDM 16 QAM	1@1	24.41	20.61	0.1151
77	30	70	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.66	21.86	0.1535
77	30	70	656000	3840	DFT-s-OFDM QPSK	1@1	15.5	11.7	0.0148
77	30	70	656000	3840	DFT-s-OFDM 16 QAM	1@1	15.32	11.52	0.0142
77	30	70	663000	3945	DFT-s-OFDM PI/2 BPSK	1@1	25.27	21.47	0.1403
77	30	70	663000	3945	DFT-s-OFDM QPSK	1@1	25.34	21.54	0.1426
77	30	70	663000	3945	DFT-s-OFDM 16 QAM	1@1	24.37	20.57	0.1140
77	30	80	649334	3740.01	DFT-s-OFDM PI/2 BPSK	1@1	25.2	21.4	0.1380
77	30	80	649334	3740.01	DFT-s-OFDM QPSK	1@1	25.29	21.49	0.1409
77	30	80	649334	3740.01	DFT-s-OFDM 16 QAM	1@1	24.3	20.5	0.1122
77	30	80	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.59	21.79	0.1510
77	30	80	656000	3840	DFT-s-OFDM QPSK	1@1	25.68	21.88	0.1542
77	30	80	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.72	20.92	0.1236
77	30	80	662666	3939.99	DFT-s-OFDM PI/2 BPSK	1@1	25.19	21.39	0.1377
77	30	80	662666	3939.99	DFT-s-OFDM QPSK	1@1	25.16	21.36	0.1368
77	30	80	662666	3939.99	DFT-s-OFDM 16 QAM	1@1	24.3	20.5	0.1122
77	30	90	649668	3745.02	DFT-s-OFDM PI/2 BPSK	1@1	25.24	21.44	0.1393
77	30	90	649668	3745.02	DFT-s-OFDM QPSK	1@1	25.26	21.46	0.1400
77	30	90	649668	3745.02	DFT-s-OFDM 16 QAM	1@1	24.25	20.45	0.1109
77	30	90	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.51	21.71	0.1483
77	30	90	656000	3840	DFT-s-OFDM QPSK	1@1	24.89	21.09	0.1285
77	30	90	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.58	20.78	0.1197
77	30	90	662332	3934.98	DFT-s-OFDM PI/2 BPSK	1@1	25.25	21.45	0.1396
77	30	90	662332	3934.98	DFT-s-OFDM QPSK	1@1	25.25	21.45	0.1396
77	30	90	662332	3934.98	DFT-s-OFDM 16 QAM	1@1	24.37	20.57	0.1140
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	135@67	25.84	22.04	0.1600
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@1	25.86	22.06	0.1607
77	30	100	650000	3750	DFT-s-OFDM PI/2 BPSK	1@271	25.82	22.02	0.1592
77	30	100	650000	3750	DFT-s-OFDM QPSK	135@67	25.82	22.02	0.1592
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@1	25.85	22.05	0.1603
77	30	100	650000	3750	DFT-s-OFDM QPSK	1@271	25.73	21.93	0.1560
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	135@67	24.92	21.12	0.1294
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@1	24.95	21.15	0.1303
77	30	100	650000	3750	DFT-s-OFDM 16 QAM	1@271	24.74	20.94	0.1242
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	135@67	23.43	19.63	0.0918
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@1	23.33	19.53	0.0897
77	30	100	650000	3750	DFT-s-OFDM 64 QAM	1@271	23.27	19.47	0.0885
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	135@67	21.39	17.59	0.0574
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@1	21.27	17.47	0.0558
77	30	100	650000	3750	DFT-s-OFDM 256 QAM	1@271	21.26	17.46	0.0557

77	30	100	650000	3750	CP-OFDM QPSK	137@68	24.39	20.59	0.1146
77	30	100	650000	3750	CP-OFDM QPSK	1@1	24.32	20.52	0.1127
77	30	100	650000	3750	CP-OFDM QPSK	1@271	24.38	20.58	0.1143
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	25.92	22.12	0.1629
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	25.82	22.02	0.1592
77	30	100	656000	3840	DFT-s-OFDM PI/2 BPSK	1@271	25.82	22.02	0.1592
77	30	100	656000	3840	DFT-s-OFDM QPSK	135@67	25.89	22.09	0.1618
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@1	25.85	22.05	0.1603
77	30	100	656000	3840	DFT-s-OFDM QPSK	1@271	25.87	22.07	0.1611
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	135@67	24.94	21.14	0.1300
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@1	24.93	21.13	0.1297
77	30	100	656000	3840	DFT-s-OFDM 16 QAM	1@271	24.73	20.93	0.1239
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	135@67	23.41	19.61	0.0914
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@1	23.38	19.58	0.0908
77	30	100	656000	3840	DFT-s-OFDM 64 QAM	1@271	23.26	19.46	0.0883
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	135@67	21.4	17.6	0.0575
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@1	21.21	17.41	0.0551
77	30	100	656000	3840	DFT-s-OFDM 256 QAM	1@271	21.32	17.52	0.0565
77	30	100	656000	3840	CP-OFDM QPSK	137@68	24.39	20.59	0.1146
77	30	100	656000	3840	CP-OFDM QPSK	1@1	24.32	20.52	0.1127
77	30	100	656000	3840	CP-OFDM QPSK	1@271	24.38	20.58	0.1143
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	135@67	25.76	21.96	0.1570
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@1	25.65	21.85	0.1531
77	30	100	662000	3930	DFT-s-OFDM PI/2 BPSK	1@271	25.79	21.99	0.1581
77	30	100	662000	3930	DFT-s-OFDM QPSK	135@67	25.79	21.99	0.1581
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@1	25.76	21.96	0.1570
77	30	100	662000	3930	DFT-s-OFDM QPSK	1@271	25.66	21.86	0.1535
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	135@67	24.78	20.98	0.1253
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@1	24.85	21.05	0.1274
77	30	100	662000	3930	DFT-s-OFDM 16 QAM	1@271	25.08	21.28	0.1343
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	135@67	23.28	19.48	0.0887
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@1	23.1	19.3	0.0851
77	30	100	662000	3930	DFT-s-OFDM 64 QAM	1@271	23.37	19.57	0.0906
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	135@67	21.22	17.42	0.0552
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@1	21.09	17.29	0.0536
77	30	100	662000	3930	DFT-s-OFDM 256 QAM	1@271	21.36	17.56	0.0570
77	30	100	662000	3930	CP-OFDM QPSK	137@68	24.26	20.46	0.1112
77	30	100	662000	3930	CP-OFDM QPSK	1@1	24.18	20.38	0.1091
77	30	100	662000	3930	CP-OFDM QPSK	1@271	24.49	20.69	0.1172

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0023	PASS	NV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0016	PASS	LV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0013	PASS	HV
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	-0.0009	PASS	-30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0018	PASS	-20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0015	PASS	-10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0011	PASS	0°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0013	PASS	10°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0024	PASS	20°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0021	PASS	30°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0009	PASS	40°C
77	30	20	656000	3840.0	DFT-s-OFDM QPSK	50@0	0.0025	PASS	50°C


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	270@0	10.12	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	6.98	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	270@0	10.4	13	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	7.85	13	PASS

N77(100M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH




N77(100M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

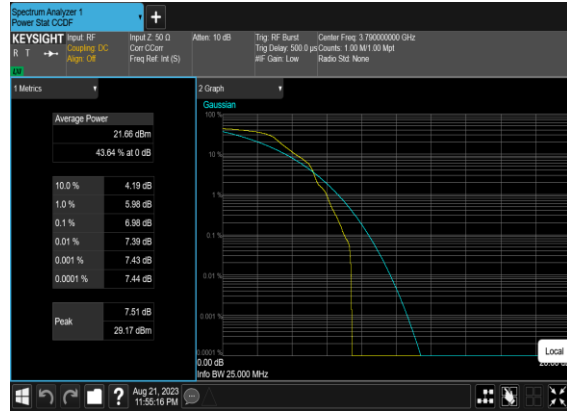

N77(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

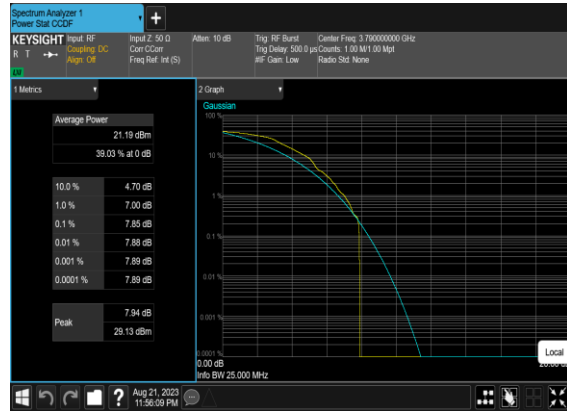


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	100	656000	3840.0	CP-OFDM QPSK	273@0	97.477	100.4
77	30	100	656000	3840.0	CP-OFDM 16 QAM	273@0	97.227	100.4
77	30	100	656000	3840.0	CP-OFDM 64 QAM	273@0	97.24	100.6
77	30	100	656000	3840.0	CP-OFDM 256 QAM	273@0	97.746	100.3


N77(100M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

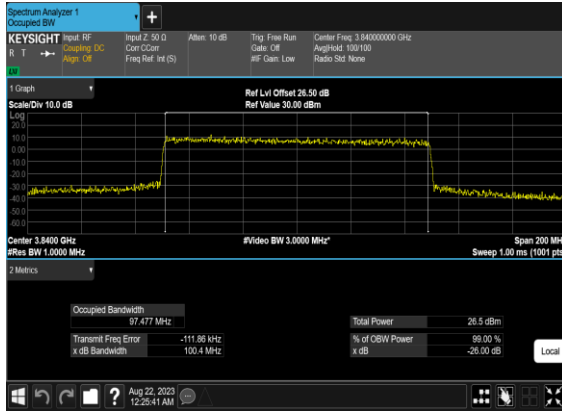


N77(100M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

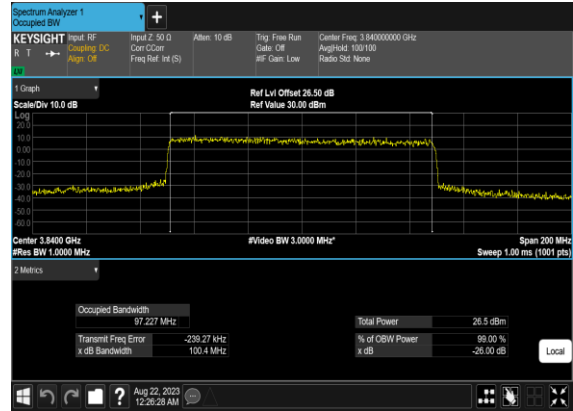

N77(100M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

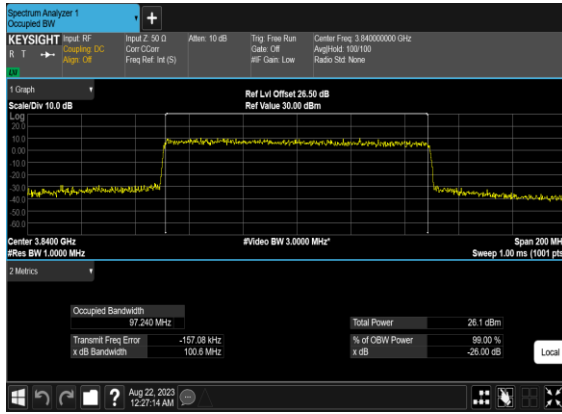

N77(100M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

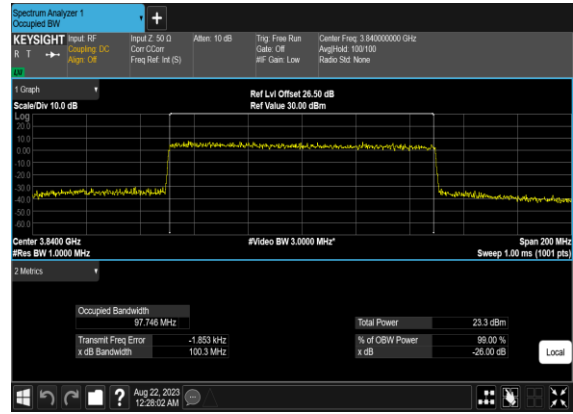


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@0	see graph	PASS


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

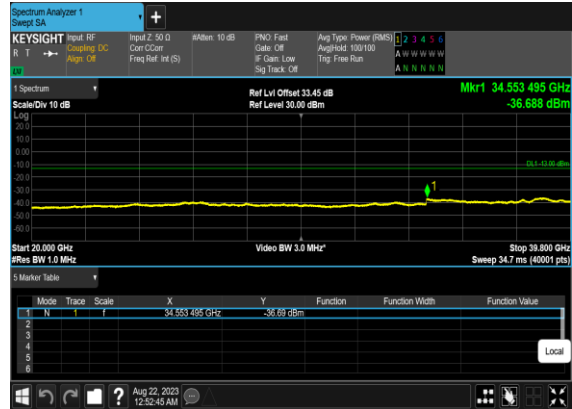


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

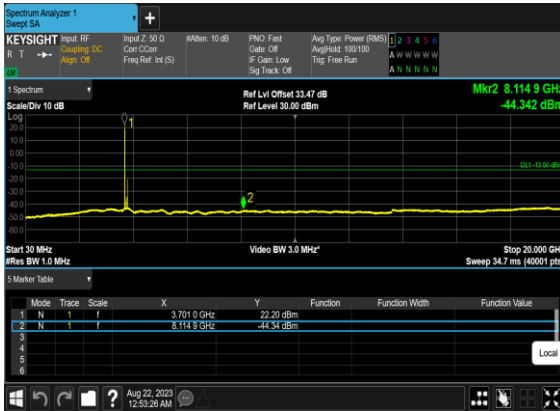


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

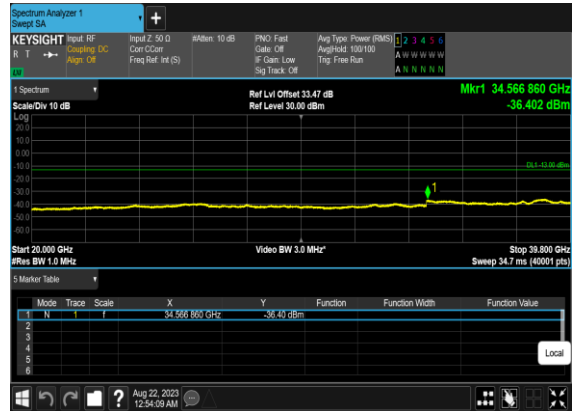

N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

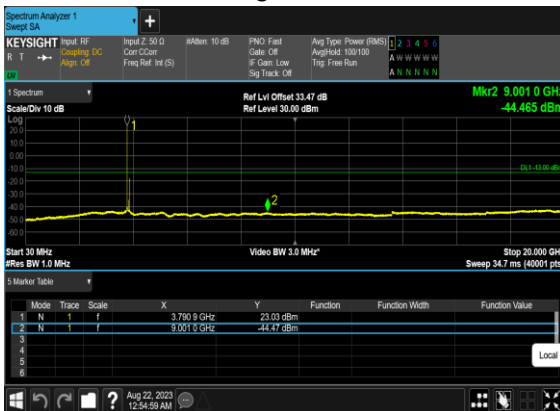


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

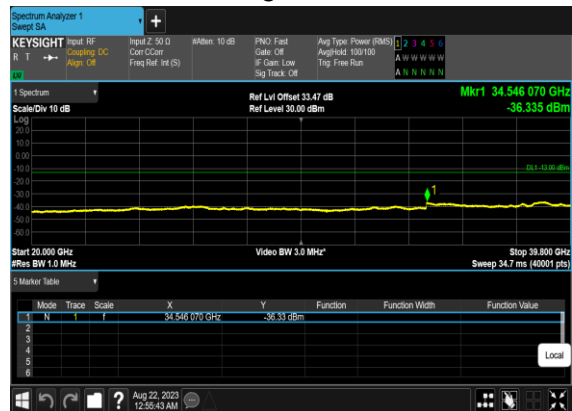

N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH




N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

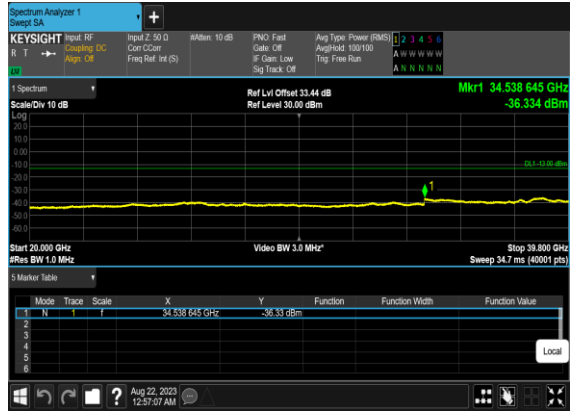


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH




N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

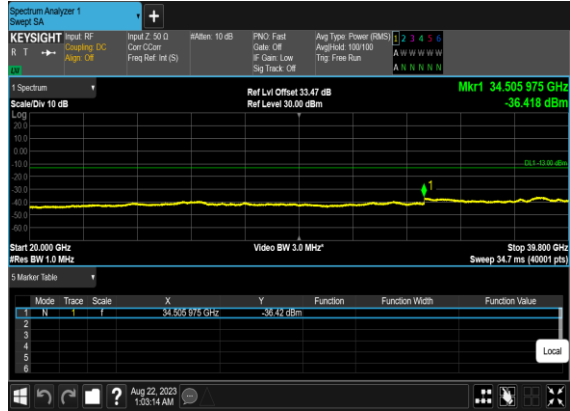

N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

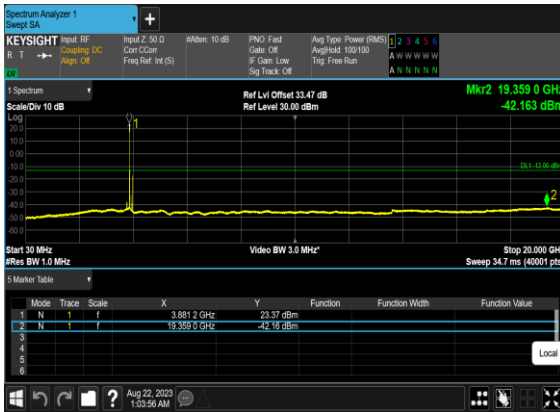


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

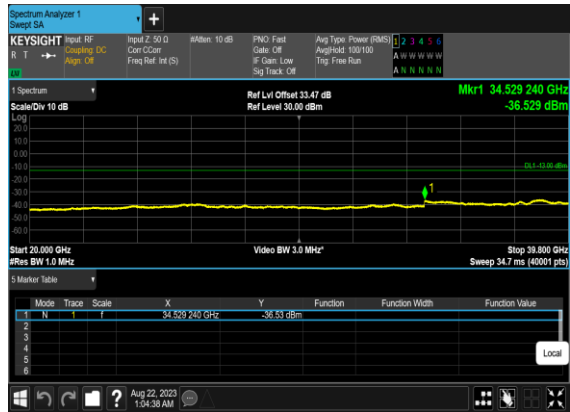


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	650000	3750.0	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	662000	3930.0	DFT-s-OFDM QPSK	270@0	see graph	PASS


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

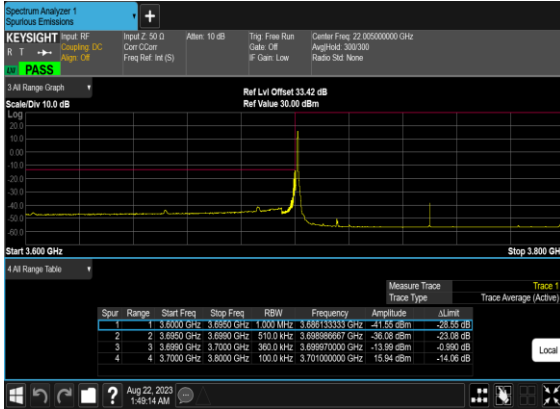


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH CHP_PASS

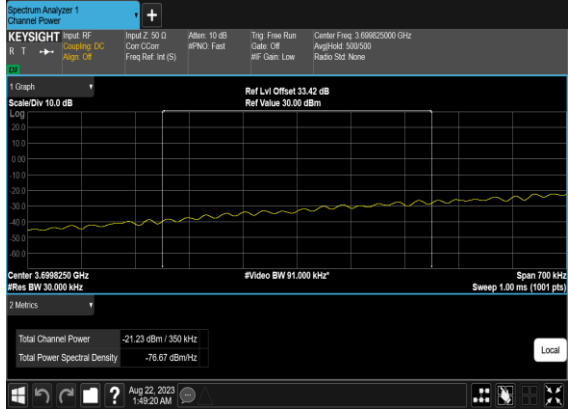


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

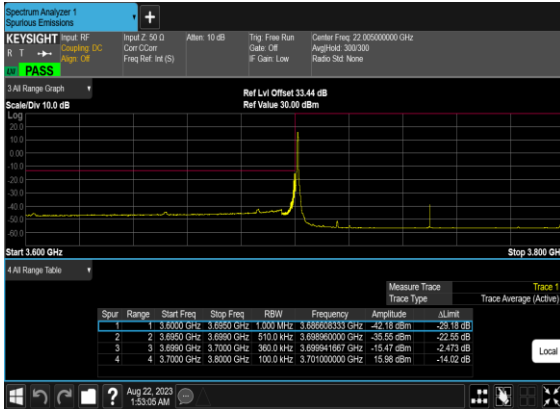


N77(100M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

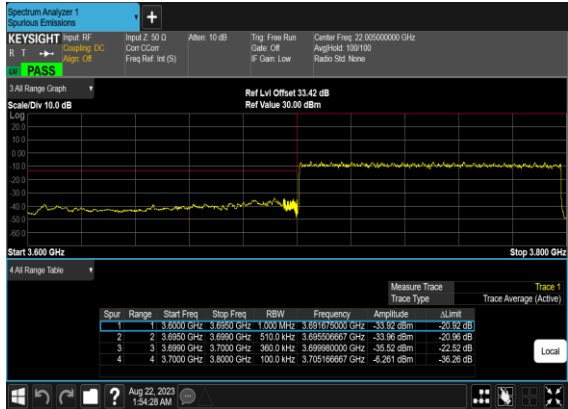


N77(100M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

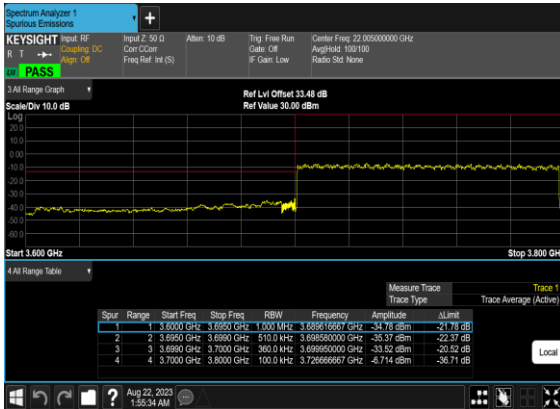


N77(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

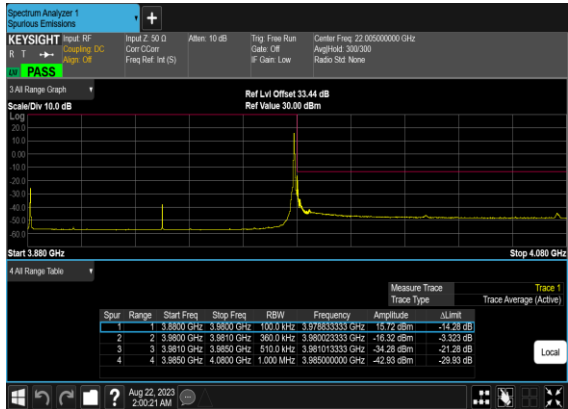


N77(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

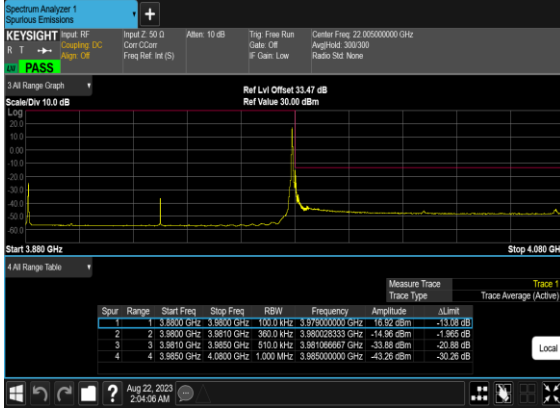

N77(100M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

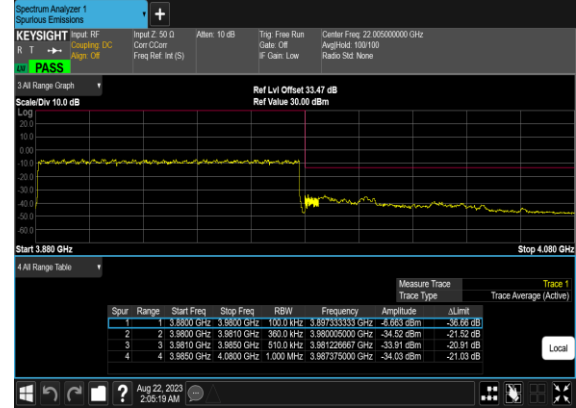

N77(100M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

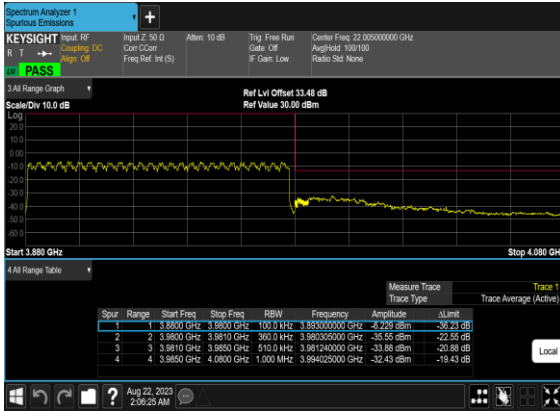



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Chris Chen	Temperature :	23~25°C
		Relative Humidity :	41~42%

RSE pre-scanned harmonic for different antennas, choose the worst antenna perform final test and record in the report.

n77 SA / NR 100MHz / QPSK(ANT5)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	7596	-57.84	-13	-44.84	-68.05	3.03	13.24	H
	11388	-53.10	-13	-40.10	-62.55	3.56	13.01	H
	15180	-43.94	-13	-30.94	-53.46	3.92	13.44	H
	7596	-57.85	-13	-44.85	-68.06	3.03	13.24	V
	11388	-52.67	-13	-39.67	-62.12	3.56	13.01	V
	15180	-43.61	-13	-30.61	-53.13	3.92	13.44	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.