

Test Report

Industry Canada RSS-210 / FCC Part15.225

Product Name : GSM/GPRS/EGPRS mobile phone
Model No. : Sonim XP1301-A-R1
Type No. : P25B005AN
FCC ID : WYPP25B005AN
IC ID : 8090A-P25B005AN

Applicant : Sonim Technologies Inc
Address : 1875 S. Grant Street Suite 620 San Mateo,
94402 USA

Date of Receipt : 29/06/2011
Test Date : 29/06/2011 ~ 08/07/2011
Issued Date : 09/07/2011
Report No. : 116S087R-RF-US-P09V01
Report Version : V2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 09/07/2011

Report No. : 116S087R-RF-US-P09V01



Product Name : GSM/GPRS/EGPRS mobile phone
Applicant : Sonim Technologies Inc
Address : 1875 S. Grant Street Suite 620 San Mateo, 94402 USA
Manufacturer : Sonim Technologies Inc
Address : 1875 S. Grant Street Suite 620 San Mateo, 94402 USA
Model No. : Sonim XP1301-A-R1
Type No. : P25B005AN
FCC ID : WYPP25B005AN
IC ID : 8090A-P25B005AN
EUT Voltage : DC 3.7V
Brand Name : Sonim
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008
ANSI C63.4: 2009; ANSI C63.10: 2009
Industry Canada RSS-210 Issue 8
Industry Canada RSS-GEN Issue 3
Test Result : Complied
Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng
Hi-Tech Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392; IC Lab Code: 4075B

Documented By : Alice Ni
(Engineering ADM: Alice Ni)

Reviewed By : Jame Yuan
(Senior Engineer: Jame Yuan)

Approved By : Marlin Chen
(Engineering Supervisor: Marlin Chen)

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

| | |
|----------------------|-------------------------|
| Taiwan R.O.C. | : BSMI, NCC, TAF |
| Germany | : TUV Rheinland |
| Norway | : Nemko, DNV |
| USA | : FCC, NVLAP |
| Japan | : VCCI |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>
 The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>
 If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
 TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com



LinKou Testing Laboratory :

No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen, Lin-Kou Shiang, Taipei, Taiwan, R.O.C.
 TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com



Suzhou (China) Testing Laboratory :

No. 99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou,China.
 TEL : +86-512-6251-5088 / FAX : +86-512-6251-5098 E-Mail : service@quietek.com



TABLE OF CONTENTS

| Description | Page |
|---|------|
| 1. General Information | 6 |
| 1.1. EUT Description | 6 |
| 1.2. Mode of Operation | 7 |
| 1.3. Tested System Details | 8 |
| 1.4. Configuration of Tested System | 9 |
| 1.5. EUT Exercise Software | 10 |
| 2. Technical Test | 11 |
| 2.1. Summary of Test Result | 11 |
| 2.2. Test Environment | 13 |
| 3. Conducted Emission | 14 |
| 3.1. Test Equipment | 14 |
| 3.2. Test Setup | 14 |
| 3.3. Limit..... | 15 |
| 3.4. Test Procedure | 15 |
| 3.5. Uncertainty | 15 |
| 3.6. Test Result | 16 |
| 4. In-band Emission | 18 |
| 4.1. Test Equipment | 18 |
| 4.2. Test Setup | 19 |
| 4.3. Limit..... | 20 |
| 4.4. Test Procedure | 20 |
| 4.5. Uncertainty | 20 |
| 4.6. Test Result | 21 |
| 5. Out-band Spurious | 22 |
| 5.1. Test Equipment | 22 |
| 5.2. Test Setup | 23 |
| 5.3. Limit..... | 24 |
| 5.4. Test Procedure | 24 |
| 5.5. Uncertainty | 24 |
| 5.6. Test Result | 25 |
| 6. 20dB Bandwidth..... | 26 |
| 6.1. Test Equipment | 26 |
| 6.2. Test Setup | 26 |
| 6.3. Limit..... | 26 |
| 6.4. Test Procedure | 26 |
| 6.5. Uncertainty | 26 |
| 6.6. Test Result | 27 |

| | | |
|------|---|----|
| 7. | Frequency Tolerance | 28 |
| 7.1. | Test Equipment | 28 |
| 7.2. | Test Setup | 28 |
| 7.3. | Limit..... | 28 |
| 7.4. | Test Procedure | 29 |
| 7.5. | Uncertainty | 29 |
| 7.6. | Test Result | 30 |
| 8. | Appendix 1 – Test Setup Photograph..... | 31 |
| 9. | Appendix 2 – EUT Photograph | 33 |

1. General Information

1.1. EUT Description

| | |
|-------------------------|--|
| Product Name | GSM/GPRS/EGPRS mobile phone |
| Brand Name | Sonim |
| Model No. | Sonim XP1301-A-R1 |
| Type No. | P24B005AN |
| EUT Voltage | DC 3.7V |
| Support Band | GSM850/GSM900/DCS1800/PCS1900 |
| Type of modulation | GMSK for GSM/GPRS, 8PSK for EDGE |
| Bluetooth Specification | Version 2.0 + EDR |
| Bluetooth Frequency | 2402~2480MHz |
| BT Type of modulation | GFSK |
| BT Channel Number | 79 |
| BT Channel Separation | 1MHz |
| BT Data Rate | 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK) |
| NFC Function | 13.56MHz |
| Antenna Type | Loop Antenna (PCB) |
| AC Adapter | Manufacturer: Sonim M/N: DSA-3RNA-05 FUS Input: 100-240V~50/60Hz 0.3A Output: 5Vdc, 0.65A |

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in Mode 1: Transmit, which was shown in this test report and defined as:

| |
|----------------------|
| Test Mode |
| Mode 1: NFC Transmit |

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| Product | | Manufacturer | Model No. | Serial No. | Power Cord |
|---------|-----|--------------|-----------|------------|------------|
| 1 | N/A | N/A | N/A | N/A | N/A |

1.4. Configuration of Tested System

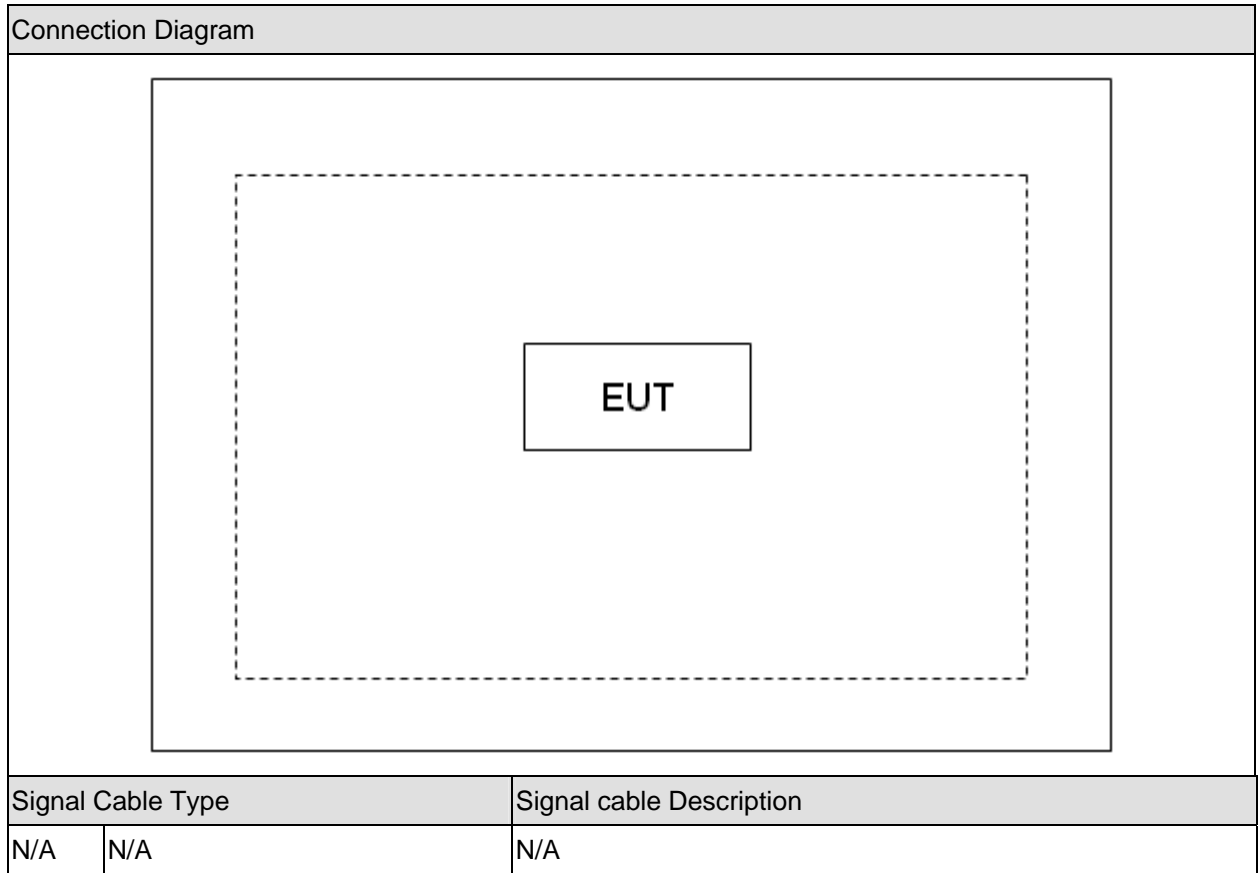

1.5. EUT Exercise Software

| | |
|---|---|
| 1 | Setup the EUT and simulators as shown on above. |
| 2 | Turn on the power of equipment. |
| 3 | Make the EUT work on "NFC" mode. |

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
- Deviations from the test standards as below description:

| Performed Test Item | Normative References | Test Performed | Deviation |
|-------------------------------|---|----------------|-----------|
| Conducted Emission | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.207 | Yes | No |
| In-Band Emission | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.225(a),(b),(c) | Yes | No |
| Out-Band Emission | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.225(d) | Yes | No |
| 20dB Bandwidth | FCC CFR Title 47 Part 2 Subpart J: 2008 2.1049 | Yes | No |
| Frequency Stability Tolerance | FCC CFR Title 47 Part 15 Subpart C: 2008 Section 15.225(e) | Yes | No |

| Performed Test Item | Normative References | Test Performed | Deviation |
|-------------------------------|--|----------------|-----------|
| Conducted Emission | RSS-GEN Issue 3 December 2010 Section 7.2.2 | Yes | No |
| In-Band Emission | RSS-210 Issue 8 December 2010 Section A2.6(a),(b),(c) | Yes | No |
| Out-Band Emission | RSS-210 Issue 8 December 2010 Section A2.6(d) | Yes | No |
| 20dB Bandwidth | RSS-210 Issue 8 December 2010 Section A8.5 | Yes | No |
| Frequency Stability Tolerance | RSS-210 Issue 8 December 2010 Section A2.6 | Yes | No |

2.2. Test Environment

| Items | Required (IEC 68-1) | Actual |
|----------------------------|---------------------|----------|
| Temperature (°C) | 15-35 | 21 |
| Humidity (%RH) | 25-75 | 50 |
| Barometric pressure (mbar) | 860-1060 | 950-1000 |

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| EMI Test Receiver | R&S | ESCI | 100726 | 2012.04.23 |
| Two-Line V-Network | R&S | ENV216 | 100043 | 2012.04.29 |
| Two-Line V-Network | R&S | ENV216 | 100044 | 2011.09.07 |
| 50ohm Coaxial Switch | Anritsu | MP59B | 6200464462 | 2012.05.05 |
| 50ohm Termination | SHX | TF2 | 07081401 | 2011.09.27 |
| Temperature/Humidity Meter | zhicheng | ZC1-2 | TR1-TH | 2012.01.14 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

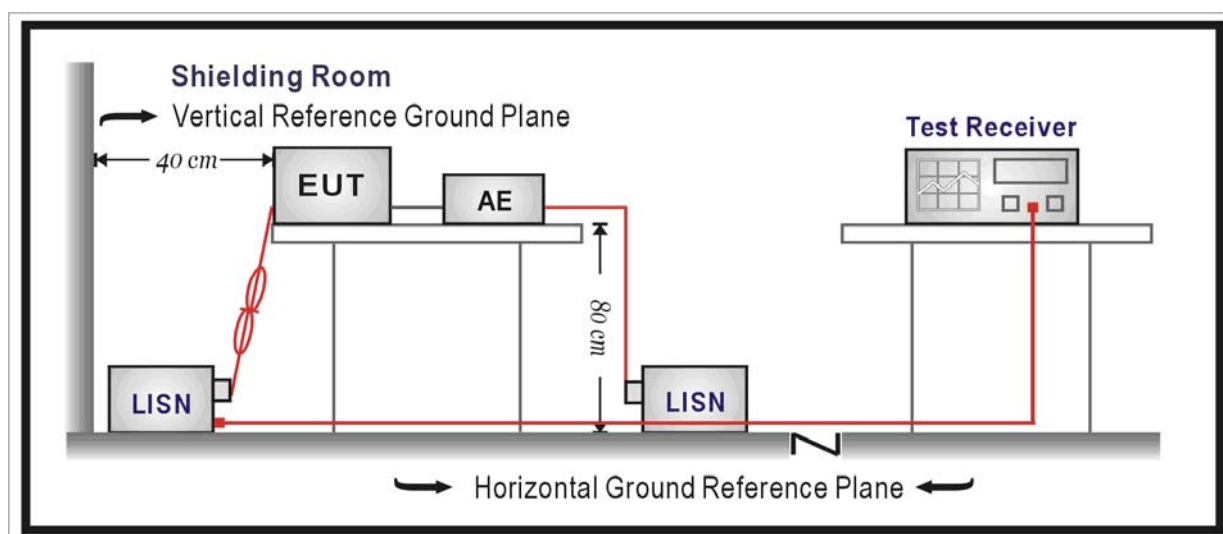

3.3. Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits | | |
|---|-----------|-----------|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.


The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB


3.6. Test Result

| | |
|--|--------------------------|
| Profile: 116S087R | Page No.: 2 |
| Engineer: Jame | |
| Site: TR1 | Time: 2011/07/02 - 19:32 |
| Limit: FCC_Part15.207_CE_AC Power_ClassB | Margin: 0 |
| Probe: ENV216_101043(0.009-30MHz) | Polarity: Line |
| EUT: GSM/GPRS/EGPRS mobile phone | Power: AC 120V/60Hz |
| Note: Mode 1: Transmit | |

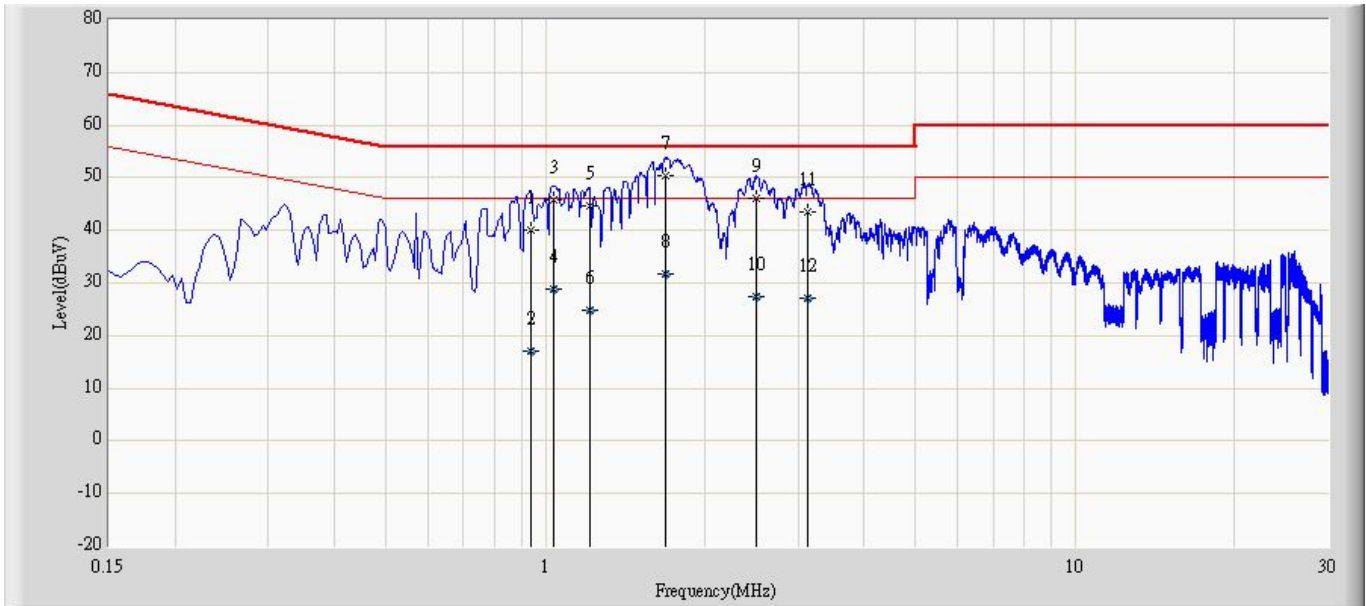

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1 | | 0.938 | 40.007 | 30.323 | -15.993 | 56.000 | 9.684 | QP |
| 2 | | 0.938 | 17.143 | 7.459 | -28.857 | 46.000 | 9.684 | AV |
| 3 | | 1.034 | 45.674 | 35.993 | -10.326 | 56.000 | 9.681 | QP |
| 4 | | 1.034 | 28.765 | 19.084 | -17.235 | 46.000 | 9.681 | AV |
| 5 | | 1.210 | 44.747 | 35.061 | -11.253 | 56.000 | 9.686 | QP |
| 6 | | 1.210 | 24.946 | 15.259 | -21.054 | 46.000 | 9.686 | AV |
| 7 | * | 1.686 | 50.280 | 40.570 | -5.720 | 56.000 | 9.711 | QP |
| 8 | | 1.686 | 31.659 | 21.949 | -14.341 | 46.000 | 9.711 | AV |
| 9 | | 2.506 | 46.023 | 36.278 | -9.977 | 56.000 | 9.745 | QP |
| 10 | | 2.506 | 27.406 | 17.660 | -18.594 | 46.000 | 9.745 | AV |
| 11 | | 3.134 | 43.400 | 33.639 | -12.600 | 56.000 | 9.761 | QP |
| 12 | | 3.134 | 27.098 | 17.337 | -18.902 | 46.000 | 9.761 | AV |

| | |
|--|--------------------------|
| Profile: 116S087R | Page No.: 1 |
| Engineer: Jame | |
| Site: TR1 | Time: 2011/07/02 - 19:26 |
| Limit: FCC_Part15.207_CE_AC Power_ClassB | Margin: 0 |
| Probe: ENV216_101043(0.009-30MHz) | Polarity: Neutral |
| EUT: GSM/GPRS/EGPRS mobile phone | Power: AC 120V/60Hz |
| Note: Mode 1: Transmit | |

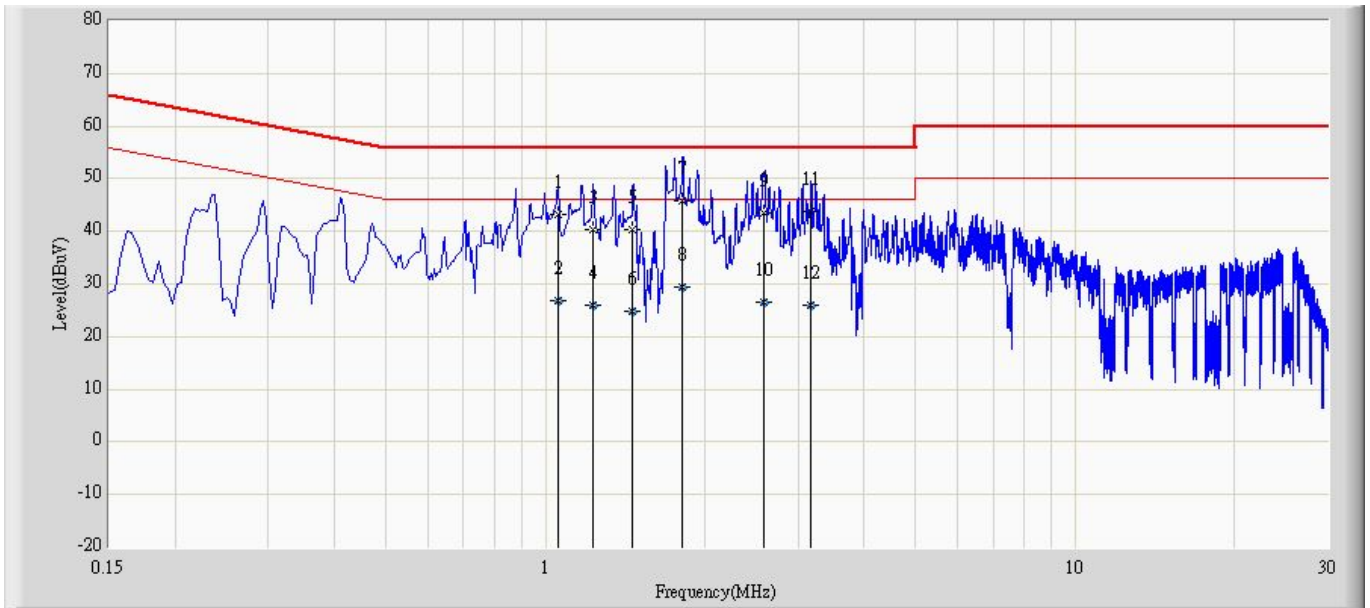

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|-------------|------|
| 1 | | 1.054 | 43.078 | 33.396 | -12.922 | 56.000 | 9.682 | QP |
| 2 | | 1.054 | 26.841 | 17.159 | -19.159 | 46.000 | 9.682 | AV |
| 3 | | 1.230 | 40.293 | 30.606 | -15.707 | 56.000 | 9.687 | QP |
| 4 | | 1.230 | 26.037 | 16.350 | -19.963 | 46.000 | 9.687 | AV |
| 5 | | 1.462 | 40.305 | 30.580 | -15.695 | 56.000 | 9.725 | QP |
| 6 | | 1.462 | 24.853 | 15.127 | -21.147 | 46.000 | 9.725 | AV |
| 7 | * | 1.814 | 45.742 | 36.027 | -10.258 | 56.000 | 9.714 | QP |
| 8 | | 1.814 | 29.487 | 19.772 | -16.513 | 46.000 | 9.714 | AV |
| 9 | | 2.582 | 43.615 | 33.869 | -12.385 | 56.000 | 9.746 | QP |
| 10 | | 2.582 | 26.619 | 16.873 | -19.381 | 46.000 | 9.746 | AV |
| 11 | | 3.178 | 43.874 | 34.112 | -12.126 | 56.000 | 9.762 | QP |
| 12 | | 3.178 | 26.054 | 16.292 | -19.946 | 46.000 | 9.762 | AV |

4. In-band Emission

4.1. Test Equipment


In-band Emission / AC-2

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|-------------------------------|--------------|--------------|------------|---------------|
| EMI Test Receiver | R&S | ESCI | 100573 | 2012.04.23 |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27611 | 2011.10.18 |
| Loop Antenna | R&S | HFH2-Z2 | 833799/003 | 2011.11.22 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9120D | 499 | 2012.06.11 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC2-C | 2012.03.08 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | AC2-TH | 2012.01.14 |


Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

4.2. Test Setup

Below 30MHz Test Setup:

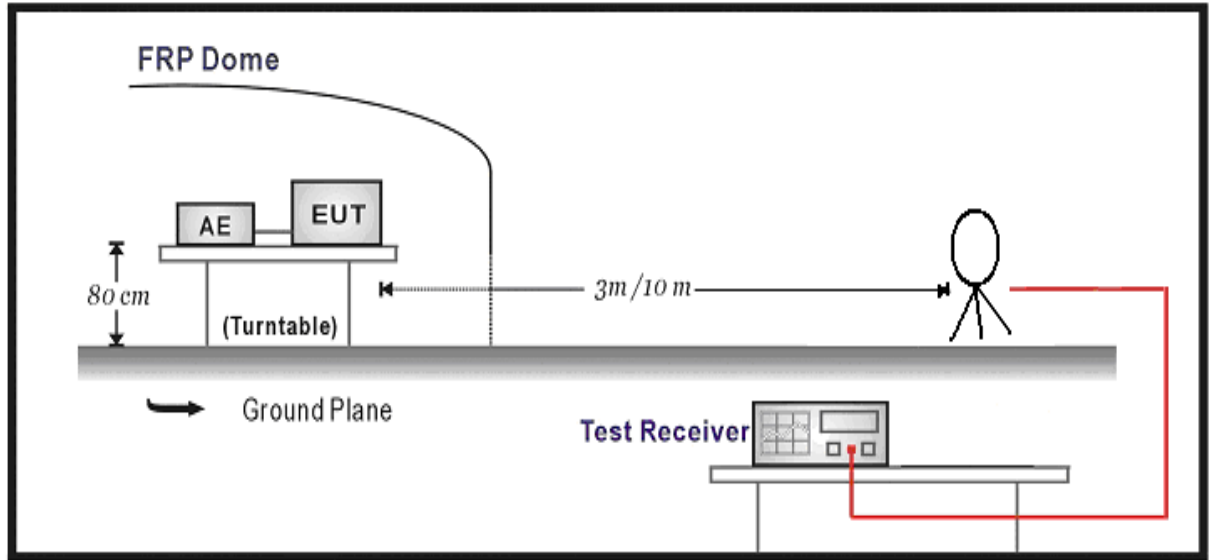

Below 1GHz Test Setup:

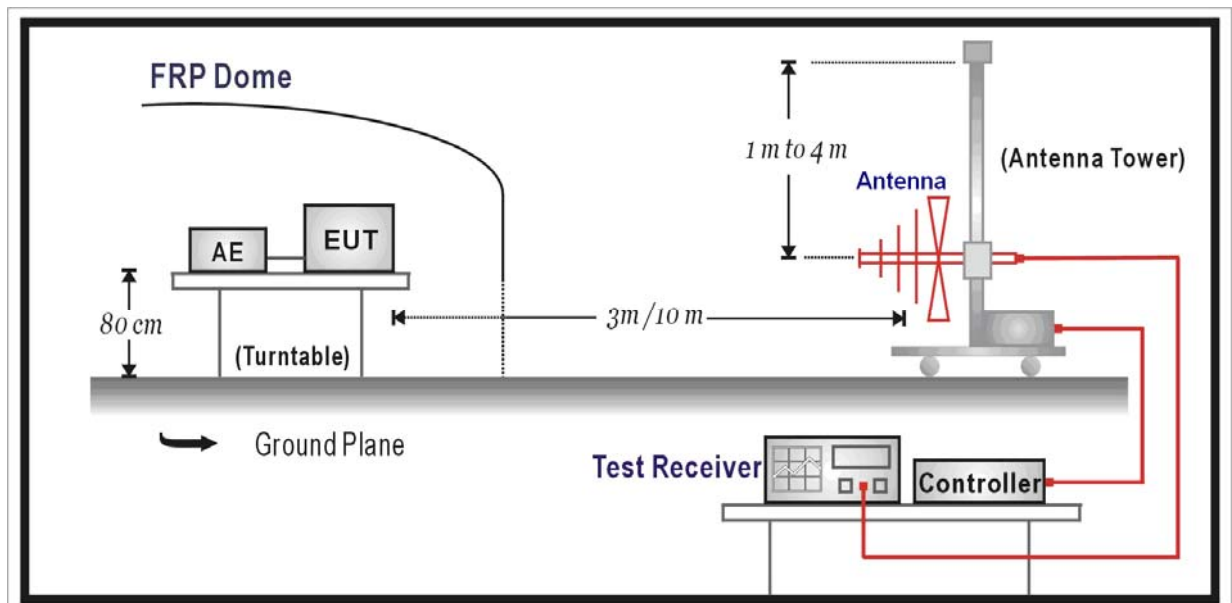

4.3. Limit

| FCC Part 15 Subpart C Paragraph 15.225 | | |
|--|--------------|--------------|
| Frequency (MHz) | Distance (m) | Level (uV/m) |
| 13.553 ~13.567 | 30 | 15,848 |
| 13.410 ~13.553 13.567 ~13.710 | 30 | 334.5 |
| 13.110 ~13.410 13.710 ~14.010 | 30 | 106 |

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2009 on radiated measurement.

The EUT should be operate in transmission mode.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

All of the test result shown indicates the worst case.

Frequency: 13.56MHz

Measurement Distance: 3 Meters

| Face On | | | | | |
|-----------|-----------------------|--------|-----------------------|--------------------|-------------|
| Frequency | Reading Level(dBuV/m) | Factor | Measure Level(dBuV/m) | Limit(3m) [dBuV/m] | Margin [dB] |
| 13.130 | 9.82 | 20.11 | 29.93 | 80.51 | -50.58 |
| 13.462 | 6.94 | 20.15 | 27.09 | 90.47 | -63.38 |
| 13.56012 | 29.34 | 20.16 | 49.50 | 123.99 | -74.49 |
| 13.605 | 21.86 | 20.16 | 42.02 | 90.47 | -48.45 |
| 13.930 | 7.80 | 20.12 | 27.92 | 80.51 | -52.59 |
| Face Off | | | | | |
| Frequency | Reading Level(dBuV/m) | Factor | Measure Level(dBuV/m) | Limit(3m) [dBuV/m] | Margin [dB] |
| 13.195 | 8.50 | 20.12 | 28.62 | 80.51 | -51.89 |
| 13.495 | 7.21 | 20.15 | 27.36 | 90.47 | -63.11 |
| 13.56011 | 28.71 | 20.16 | 48.87 | 123.99 | -75.12 |
| 13.615 | 25.42 | 20.17 | 45.59 | 90.47 | -44.88 |
| 13.792 | 7.88 | 20.19 | 28.07 | 80.51 | -52.44 |

Notes:

1. All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.
2. Measurements were performed at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).

$$\text{Extrapolation Factor} = 40 * \text{LOG}(30/3) = 40 \text{ dB}$$
3. All measurements were recorded using a EMI test receiver employing a peak detector.

5. Out-band Spurious

5.1. Test Equipment


Out-band Emission / AC-2

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|-------------------------------|--------------|--------------|------------|---------------|
| EMI Test Receiver | R&S | ESCI | 100573 | 2012.04.23 |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27611 | 2011.10.18 |
| Loop Antenna | R&S | HFH2-Z2 | 833799/003 | 2011.11.22 |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9120D | 499 | 2012.06.11 |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC2-C | 2012.03.08 |
| Temperature/Humidity Meter | Zhicheng | ZC1-2 | AC2-TH | 2012.01.14 |


Note 1: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2. Test Setup

Below 30MHz Test Setup:

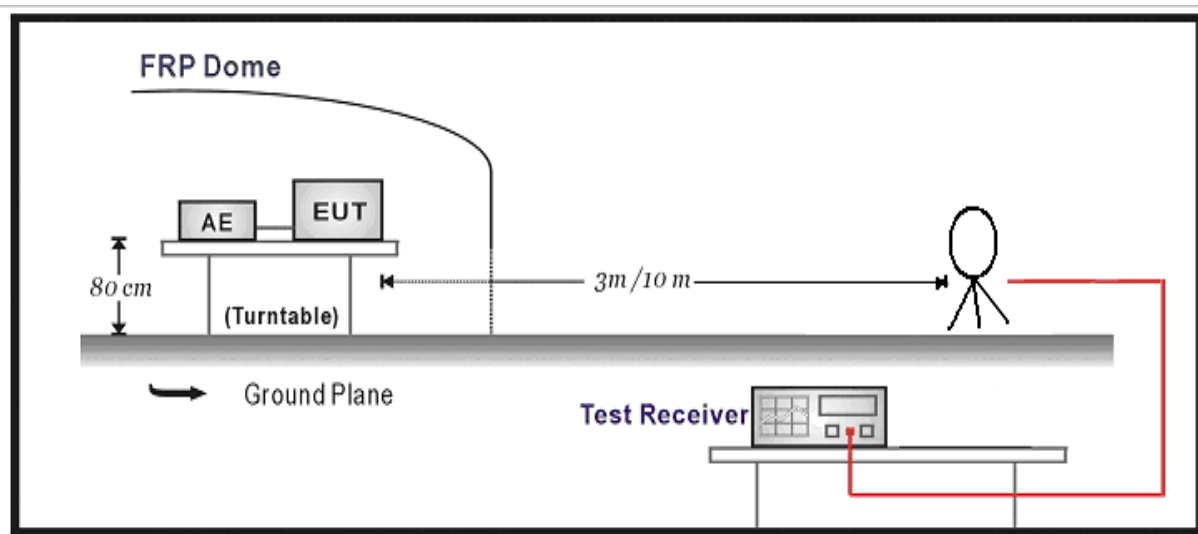

Below 1GHz Test Setup:

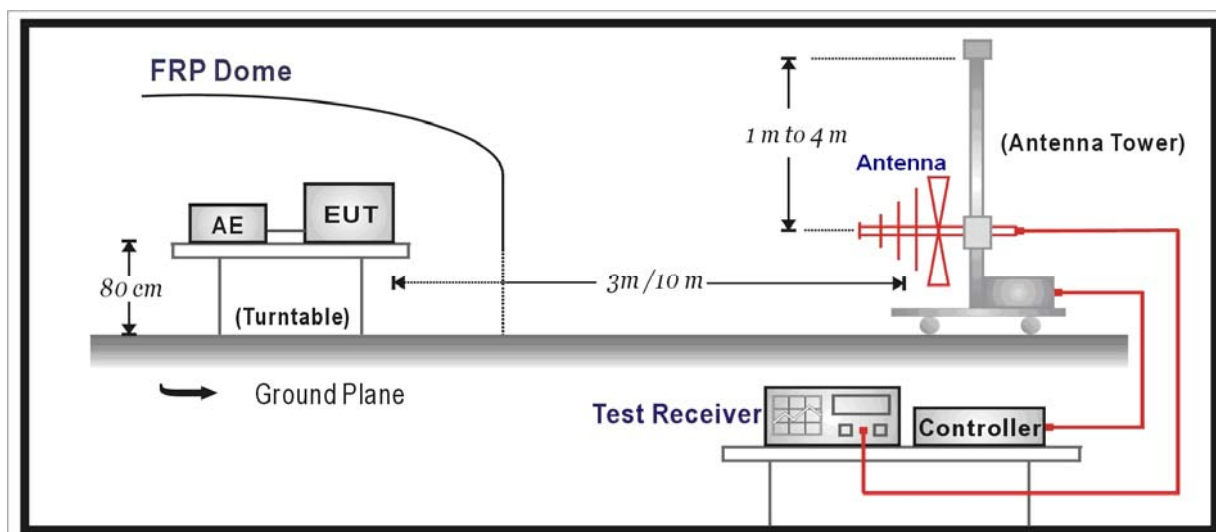

5.3. Limit

| FCC Part 15 Subpart C Paragraph 15.209 | | |
|--|--------------|--------------|
| Frequency (MHz) | Distance (m) | Level (uV/m) |
| 0.009 – 0.490 | 300 | 2400/F (kHz) |
| 0.490 – 1.705 | 30 | 2400/F (kHz) |
| 1.705 – 30 | 30 | 30 |
| 30 - 88 | 3 | 100 |
| 88 - 216 | 3 | 150 |
| 216 - 960 | 3 | 200 |
| Above 960 | 3 | 500 |

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

5.4. Test Procedure

The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010 MHz. All measurements were recorded with a spectrum analyzer employing an average detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits shown as stated per Section 15.209. A loop antenna was used for searching for emissions below 30MHz.

5.5. Uncertainty

The measurement uncertainty is defined as ± 1.27 dB

5.6. Test Result

All of the test result shown indicates the worst case.

Measure Level = Reading Level +Factor.

| Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| Face On | | | | | | |
| 27.12 | 4.93 | 20.09 | 25.02 | 69.54 | -44.52 | QP |
| Face Off | | | | | | |
| 27.12 | 5.77 | 20.09 | 25.86 | 69.54 | -43.68 | QP |

| Antenna | Frequency (MHz) | Reading Level (dBuV/m) | Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---------|-----------------|------------------------|-------------|------------------------|----------------|-------------|----------|
| H | 40.30 | 4.57 | 12.55 | 17.12 | 40 | -22.88 | QP |
| H | 54.25 | 4.50 | 7.16 | 11.66 | 40 | -28.34 | QP |
| H | 56.79 | 5.01 | 6.60 | 11.61 | 40 | -28.39 | QP |
| H | 68.70 | 4.75 | 5.85 | 10.60 | 40 | -29.40 | QP |
| H | 91.11 | 3.56 | 9.89 | 13.45 | 43.5 | -30.05 | QP |
| V | 40.30 | 12.28 | 12.55 | 24.83 | 40 | -15.17 | QP |
| V | 54.25 | 11.11 | 7.16 | 18.27 | 40 | -21.73 | QP |
| V | 56.79 | 10.05 | 6.60 | 16.65 | 40 | -23.35 | QP |
| V | 68.07 | 9.63 | 5.83 | 15.46 | 40 | -24.54 | QP |
| V | 91.11 | 9.65 | 9.89 | 19.54 | 43.5 | -23.96 | QP |
| V | 94.74 | 9.38 | 10.63 | 20.01 | 43.5 | -23.49 | QP |

6. 20dB Bandwidth


6.1. Test Equipment

20dB Bandwidth / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|----------------------------|--------------|----------|------------|---------------|
| Spectrum Analyzer | Agilent | E4446A | MY45300103 | 2012.04.30 |
| Temperature/Humidity Meter | zhicheng | ZC1-2 | TR8-TH | 2012.05.04 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

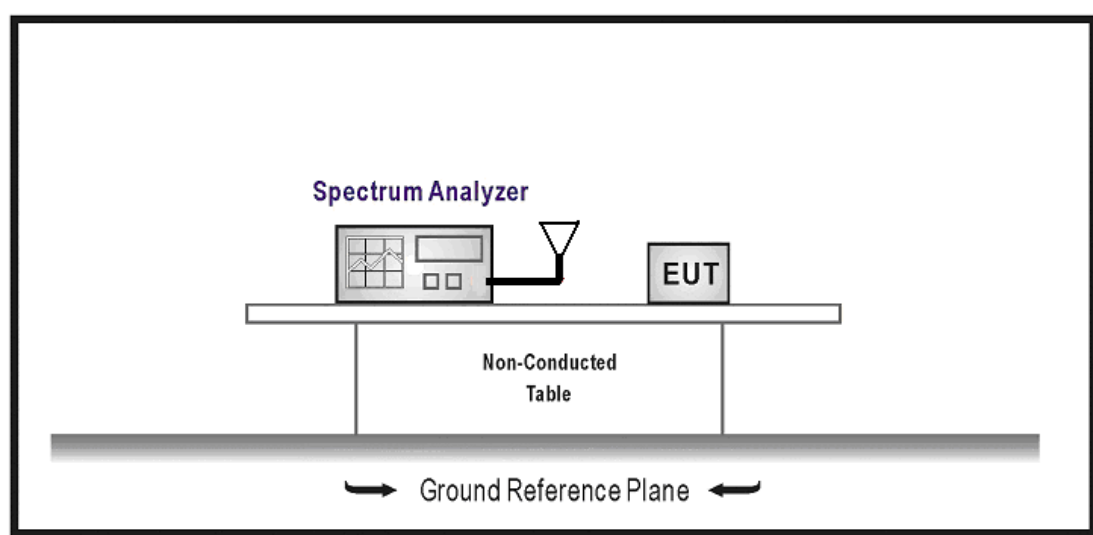

6.3. Limit

N/A

6.4. Test Procedure

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


6.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB

6.6. Test Result

| | |
|-----------|-------------------------------|
| Product | : GSM/GPRS/EGPRS mobile phone |
| Test Item | : 20dB Bandwidth |
| Test Site | : TR-8 |
| Test Mode | : Mode 1: Transmit |

| Frequency (MHz) | Occupied Bandwidth (kHz) |
|-----------------|--------------------------|
| 13.56 | 333 |

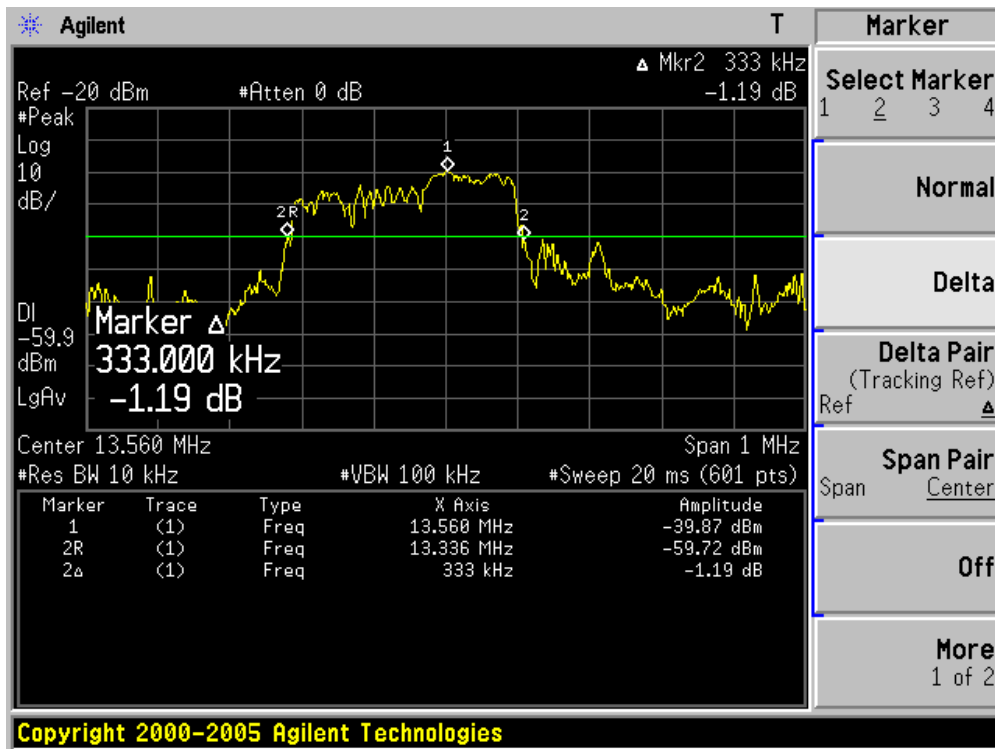

7. Frequency Tolerance


7.1. Test Equipment

Frequency Tolerance / TR-8

| Instrument | Manufacturer | Type No. | Serial No. | Cal. Due Date |
|---|--------------|--------------|--------------|---------------|
| Spectrum Analyzer | Agilent | E4446A | MY45300103 | 2012.04.30 |
| AC Power Supply | IDRC | CF-500TP | 979422 | 2011.09.27 |
| DC Power Supply | IDRC | CD-035-020PR | 977272 | 2011.09.27 |
| Programmable Temperature & Humidity Chamber | Gaoyu | TH-1P-B | WIT-05121302 | 2012.01.19 |
| Temperature/Humidity Meter | zhicheng | ZC1-2 | TR8-TH | 2012.05.04 |

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

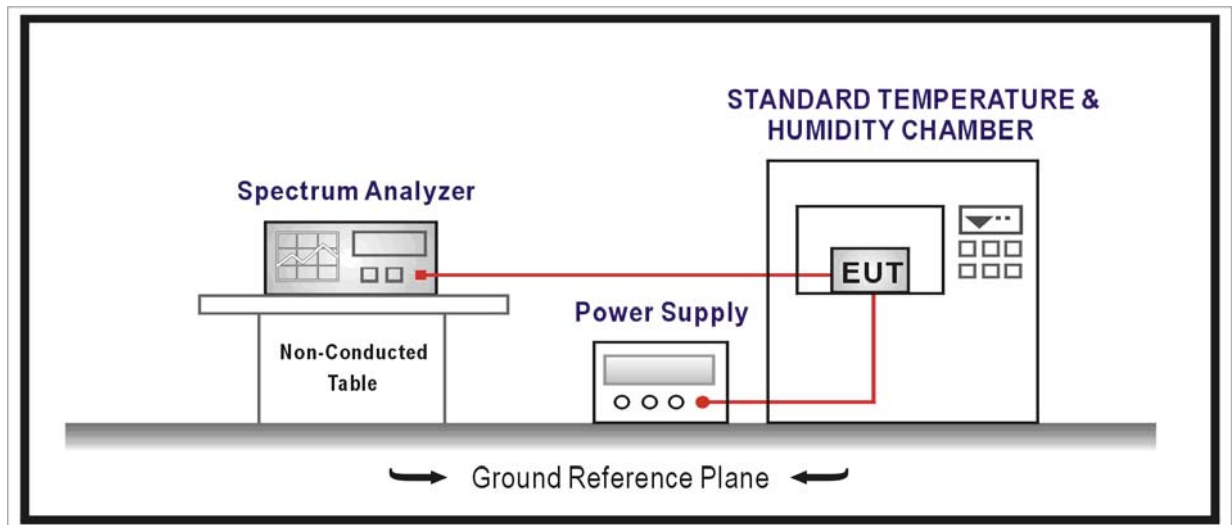

7.3. Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

7.4. Test Procedure

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

7.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

| | | |
|-----------|---|-----------------------------------|
| Product | : | GSM/GPRS/EGPRS mobile phone |
| Test Item | : | Transmitter carrier output levels |
| Test Site | : | AC-1 |
| Test Mode | : | Mode 1: Transmit |

| Operating Frequency: 13.56MHz | | | | | |
|-------------------------------------|---------------|-----------|------------|----------------|---------------|
| Reference Voltage: 3.7Vdc | | | | | |
| Deviation Limit: +/- 0.01% = 1356Hz | | | | | |
| Voltage (%) | Power Battery | TEMP (°C) | FREQ. (Hz) | FREQ.Dev. (Hz) | Deviation (%) |
| 100% | 3.70 | +20(Ref) | 13,560,106 | 106 | 0.000782 |
| 100% | | -20 | 13,560,113 | 113 | 0.000833 |
| 100% | | -10 | 13,560,122 | 122 | 0.000900 |
| 100% | | 0 | 13,559,940 | -60 | -0.000442 |
| 100% | | +10 | 13,560,096 | 96 | 0.000708 |
| 100% | | +20 | 13,559,926 | -74 | -0.000546 |
| 100% | | +30 | 13,560,085 | 85 | 0.000627 |
| 100% | | +40 | 13,560,119 | 119 | 0.000878 |
| 100% | | +50 | 13,559,913 | -87 | -0.000642 |