

TEST REPORT

for

AIS Class B Transponder

MODEL: WideLink B600W; WideLink B600

Test Report Number: T160222W01

Issued to:

Alltek Marine Electronics Corp.

14F-2, No.237, Sec. 1, Datong Rd., Xizhi District, New Taipei City, Taiwan, R.O.C.

Issued by:

Compliance Certification Services Inc. Xindian Lab. No.163-1, Jhongsheng Rd., Xindian Dist., New Taipei City, 23151 Taiwan. TEL: 886-2-22170894 FAX: 886-2-22171029 Issued Date: January 18, 2017



Revision History

Rev.	lssue Date	Revisions	Effect Page	Revised By
00	January 18, 2017	Initial Issue	ALL	Andrea Chen

TEST CERTIFICATION

AIS Class B Transponder	
WideLink B600W; WideLink B600	
AMEC	
Alltek Marine Electronics Corp. 14F-2, No.237, Sec. 1, Datong Rd., Xizhi District, New Taipei City, Taiwan, R.O.C.	
Alltek Marine Electronics Corp. 14F-2, No.237, Sec. 1, Datong Rd., Xizhi District, New Taipei City, Taiwan, R.O.C.	
October 11, 2016	
EN 60945: 2002 (Reference clause 12.2) IEC 60945: 2002 / COR1: 2008 (Reference clause 12.2) IEC 60945 corrigendum 1: 2008	

Deviation from Applicable Standard		
None		

The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sam Hu Assistant Manager

Reviewed by:

Eva Fan / Supervisor of report document dept.

1 EUT DESCRIPTION

Product	AIS Class B Transponder
Brand Name	AMEC
Model	WideLink B600W; WideLink B600
Applicant	Alltek Marine Electronics Corp.
Housing material	Plastic
Identify Number	T160222W01
Received Date	February 22, 2016
EUT Power Rating	12VDC/24VDC from DC power supply
Hardware	M-PCB-B601MBV2
Software	V1.1.5

Model Differences

Model Name	Difference	Tested (Check)
WideLink B600W	With Wi-Fi Function	\boxtimes
WideLink B600	Without Wi-Fi Function	

I/O PORT

	I/O PORT TYPES	Q'TY	TESTED WITH
1.	USB Port	1	1
2.	GPS Antenna Port	1	1
3.	VHF Antenna Port	1	1
4.	NMEA 0183 Port	2	2
5.	NMEA 2000 Port	1	1
6.	Micro SD Slot	1	1

Note: Client consigns only one model sample to test (Model Number: WideLink B600W).

Electromagnetic Radio Frequency Radiation TEST TEST SPECIFICATION (Reference to EN 60945 clause 12.2) TEST INSTRUMENT

844 RS Chamber						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Safety Test Solutions	NARDA	NBM-520	D-0924	11/19/2016		
E-Probe	NARDA	EF-1891	E-0005	11/19/2016		


Method of Test

Use Field Probe to Measure power density and appropriate the maximum distance from the EUT at which the power density level of 100 W/m² and 10 W/m²

Test Result

The power densily of EUT are very smaller than 100 W/m² and 10 W/ m² when Field Probe completely close to EUT.

TEST ITEM	TEST Result
ELECTROMAGNETIC RADIO FREQUENCY RADIATION	PASS

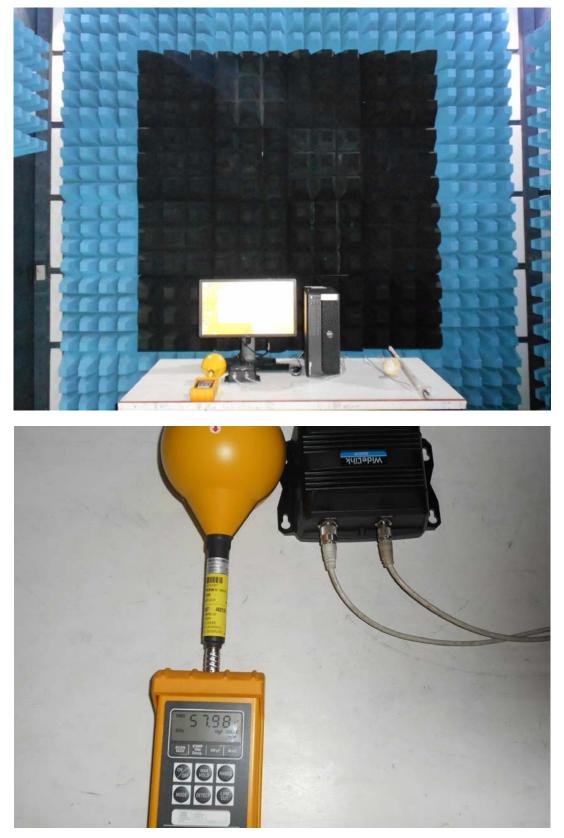

PHOTOGRAPHS OF THE TEST CONFIGURATION