

Prüfbericht - Nr.: 10041102 001

Test Report No.:

Seite 1 von 34
Page 1 of 34

Auftraggeber: Schneider Electric (Australia) Pty. Ltd.

Client:

33-37 Port Wakefield Road, Gepps Cross, 5094, Australia

Gegenstand der Prüfung: Ethernet ZigBee Interface

Test item:

Bezeichnung: 5200EZI

Identification:

Serien-Nr.:

N/A

Serial No.:

Wareneingangs-Nr.: 113154038

Receipt No.:

Eingangsdatum: 13 Mar. 2013

Date of receipt:

Zustand des Prüfgegenstandes bei Anlieferung:

Condition of test item at delivery:

The sample is ok for testing and not damaged

Prüfort: TÜV Rheinland Taiwan Ltd.

Testing location:

11F., No.758, Sec. 4, Bade Rd., Songshan Dist., Taipei City 105 Taiwan

FCC Registration No.: 365730

Prüfgrundlage: FCC CFR47 Part 15: Subpart C Section 15.247

Test specification:

Prüfergebnis: Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n).

Test Result: The test item passed the test specification(s).

Prüflaboratorium: TÜV Rheinland Taiwan Ltd.

Testing Laboratory:

11F., No.758, Sec. 4, Bade Rd., Songshan Dist., Taipei City 105, Taiwan,
R.O.C.

geprüft/ tested by:

kontrolliert/ reviewed by:

2013-04-15 Arvin Ho/Section Manager

Datum Date	Name/Stellung Name/Position	Unterschrift Signature
---------------	--------------------------------	---------------------------

2013-04-15 Rene Charton/Senior Project Manager

Datum Date	Name/Stellung Name/Position	Unterschrift Signature
---------------	--------------------------------	---------------------------

Sonstiges/ Other Aspects:

Abkürzungen: P(pass) = entspricht Prüfgrundlage
F(all) = entspricht nicht Prüfgrundlage
N/A = nicht anwendbar
N/T = nicht getestet

Abbreviations: P(pass) = passed
F(all) = failed
N/A = not applicable
N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

This test report relates to the a. m. test item. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Passed***5.1.2 PEAK OUTPUT POWER***RESULT: Passed***5.1.3 6dB BANDWIDTH***RESULT: Passed***5.1.4 POWER DENSITY***RESULT: Passed***5.1.5 CONDUCTED SPURIOUS EMISSIONS AND FREQUENCY BAND EDGE MEASURED IN 100kHz BANDWIDTH***RESULT: Passed***5.1.6 SPURIOUS EMISSION***RESULT: Passed***6.1.1 ELECTROMAGNETIC FIELDS***RESULT: Passed*

Contents

1. GENERAL REMARKS	4
1.1 COMPLEMENTARY MATERIALS	4
2. TEST SITES	5
2.1 TEST FACILITIES	5
2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3 TRACEABILITY	6
2.4 CALIBRATION	7
2.5 MEASUREMENT UNCERTAINTY.....	7
3. GENERAL PRODUCT INFORMATION	8
3.1 PRODUCT FUNCTION AND INTENDED USE.....	8
3.2 RATINGS AND SYSTEM DETAILS	8
3.3 INDEPENDENT OPERATION MODES	10
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5 SUBMITTED DOCUMENTS	10
4. TEST SET-UP AND OPERATION MODES	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2 TEST OPERATION AND TEST SOFTWARE	11
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5 TEST SETUP DIAGRAM.....	12
5. TEST RESULTS	14
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1 <i>Antenna Requirement</i>	14
5.1.2 <i>Peak Output Power</i>	15
5.1.3 <i>6dB Bandwidth</i>	18
5.1.4 <i>Power Density</i>	21
5.1.5 <i>Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth ..</i>	24
5.1.6 <i>Spurious Emission</i>	28
5.2 MAINS EMISSIONS.....	29
5.2.1 <i>Mains Conducted Emissions.....</i>	29
6. SAFETY HUMAN EXPOSURE	30
6.1 RADIO FREQUENCY EXPOSURE COMPLIANCE.....	30
6.1.1 <i>Electromagnetic Fields</i>	30
7. PHOTOGRAPHS OF THE TEST SET-UP	31
8. LIST OF TABLES	34
9. LIST OF PHOTOGRAPHS	34

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 4 von 34
Page 4 of 34

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

- Appendix P: Photo Documentation**
(File Name: 10041102APPENDIX P)
Appendix D: Test Result of Radiated Emissions
(File Name: 10041102APPENDIX D)

Test Specifications

The following standards were applied (in bold: product standards, otherwise: basic standards).

Table 1: Applied Standard and Test Levels

Radio
FCC CFR47 Part 15: Subpart C Section 15.247
ANSI C63.10:2009, KDB558074 D01 DTS Meas Guidance v02

2. Test Sites

2.1 Test Facilities

TUV Rheinland Taiwan Ltd.

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 365730
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2010-Jul-1st to 2013-Jun-30th



Testing Laboratory

0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	R&S	ESCI 7	1166.5950K07-100797-Pt	20-Dec-13
Bilog Antenna	TESEQ	CBL6111D	29802	29-Jun-13
Pre-Amplifier	HP	8447F	2805A03335	14-Sep-13
Spectrum Analyzer	R&S	FSV 40	100921	13-Dec-13
Horn Antenna (1GHz~18GHz)	COM-POWER	AHA118	701251	28-Sep-13
Horn Antenna (18GHz~40GHz)	COM-POWER	AH840	101031	2-Nov-13
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	14-Sep-13
Preamplifier (18 GHz -40 GHz)	COMPOWER	PAM-840	461257	17-Sep-13
Power meter	R&S	NRVD	100439	17-Apr-14
Power sensor	R&S	NRV-Z1	100013	17-Apr-14
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	13-May-13
Signal Generator	R&S	SMU200	104260	13-Aug-13
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	28-Sep-13

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basics using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1 \text{ dB}$
Adjacent channel power	$\pm 3 \text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6 \text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6 \text{ dB}$
Temperature	$\pm 2 \text{ }^{\circ}\text{C}$
Humidity	$\pm 10 \text{ \%}$

3. General Product Information

3.1 Product Function and Intended Use

The 5200EZI ZB interface unit provides a wireless connection between a PC and an existing ZigBee network

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	Ethernet ZigBee Interface
Brand Name	Schneider Electric (Australia) Pty. Ltd.
FCC ID	WZCS1B13237
Type Designation	5200EZI
Operating Frequencies	2405MHz~2480MHz
Channel Spacing	5 MHz
Channel number	16
Operation Voltage	24 V though Power Adapter
Modulation	DSSS (O-QPSK)
Antenna gain	4.77 dBi

Prüfbericht - Nr.: 10041102 001
*Test Report No.*Seite 9 von 34
Page 9 of 34**Table 5: Channel Table**

Channel No.	Frequency
11	2405
12	2410
13	2415
14	2420
15	2425
16	2430
17	2435
18	2440
19	2445
20	2450
21	2455
22	2460
23	2465
24	2470
25	2475
26	2480

Channel 26 uses a 6 dB power reduction to ensure bandedge compliance

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
- C. Standby
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Technical Description
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test mode controlled through data interface

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed in section 3.3 as appropriate.

Full test was applied on all test modes, but only worst case was shown.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Kind of Equipment	Manufacturer	Model Name	S/N
Laptop	MSI	MS-1453	MX-233TWK1008000096

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

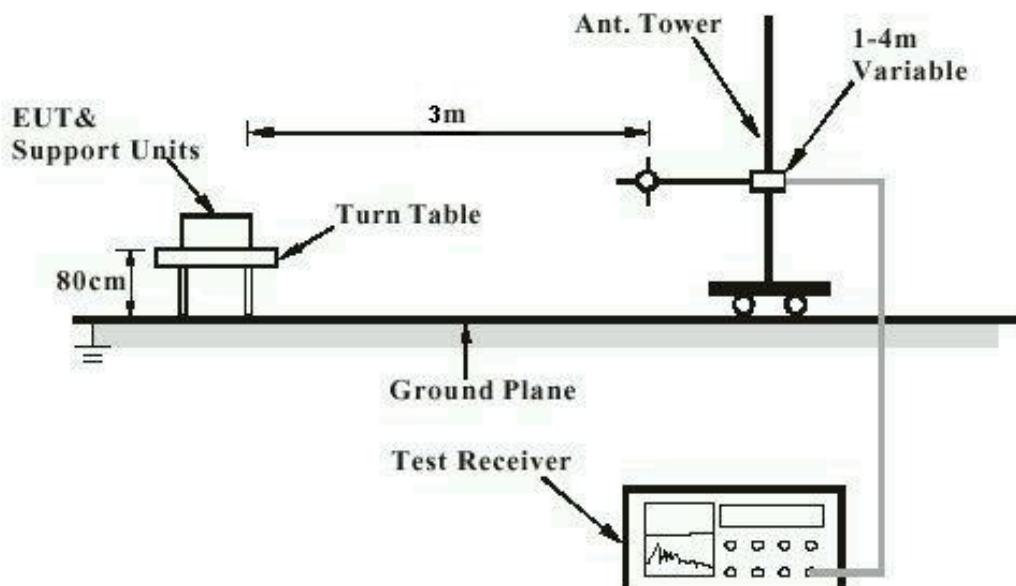
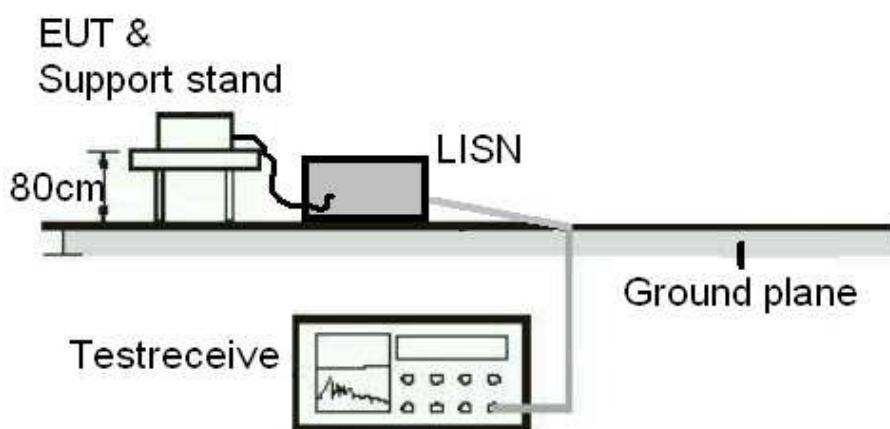
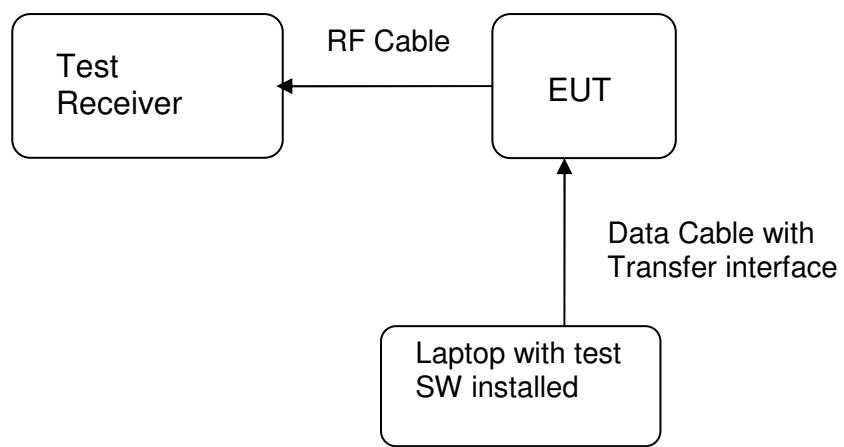


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)**Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement**

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test date	:	2012-12-12
Test standard	:	FCC Part 15.247(b)(4), Part 15.203
Limit	:	the use of antennas with directional gain that do not exceed 6 dBi

According to the manufacturer declaration, the EUT will be supplied with an PCB antenna with an directional gain of 4.77 dBi.

The antenna is not user accessible .

Therefore, the EUT is considered to comply with the provision.

Refer to EUT photo for details.

Prüfbericht - Nr.: 10041102 001
*Test Report No.*Seite 15 von 34
Page 15 of 34**5.1.2 Peak Output Power****RESULT:****Passed**

Test standard	:	FCC Part 15.247(b)(1)
Basic standard	:	ANSI C63.10:2009, KDB558074
Limit	:	1 Watt
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A
Ambient temperature	:	20-24 °C
Relative humidity	:	50-65 %
Atmospheric pressure	:	100-103 kPa

Table 6: Test result of Peak Output Power

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2405	5.82	0.0038	1
Mid Channel	2445	5.64	0.0037	1
High Channel	2475	4.10	0.0026	1
High Channel	2480	-2.34	0.0006	1


Pmax: 3.82 mW

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 16 von 34
Page 16 of 34


Test Plot of Peak Output Power

Low Channel

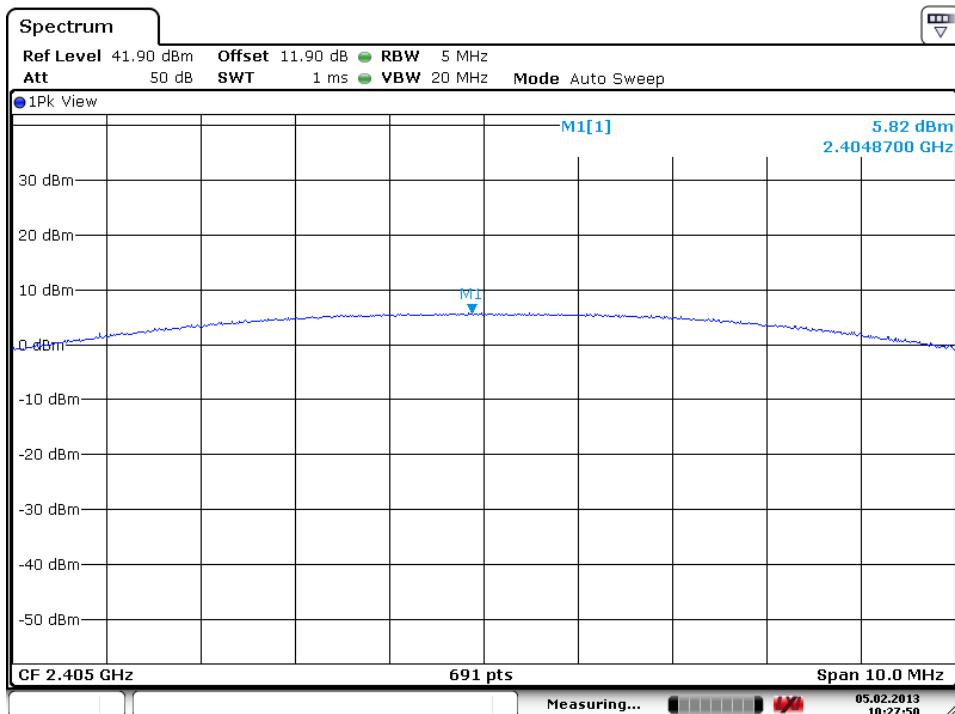

Date: 5.FEB.2013 10:27:50

Middle Channel

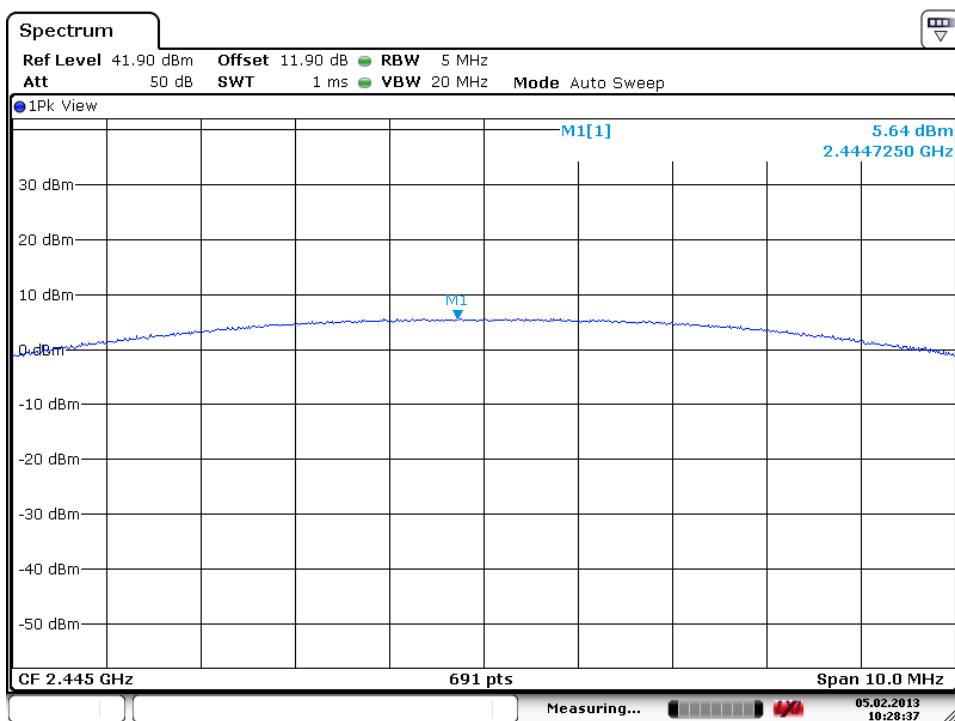


Date: 5.FEB.2013 10:28:36

Prüfbericht - Nr.: 10041102 001
Test Report No.


Seite 17 von 34
Page 17 of 34

High Channel 2475

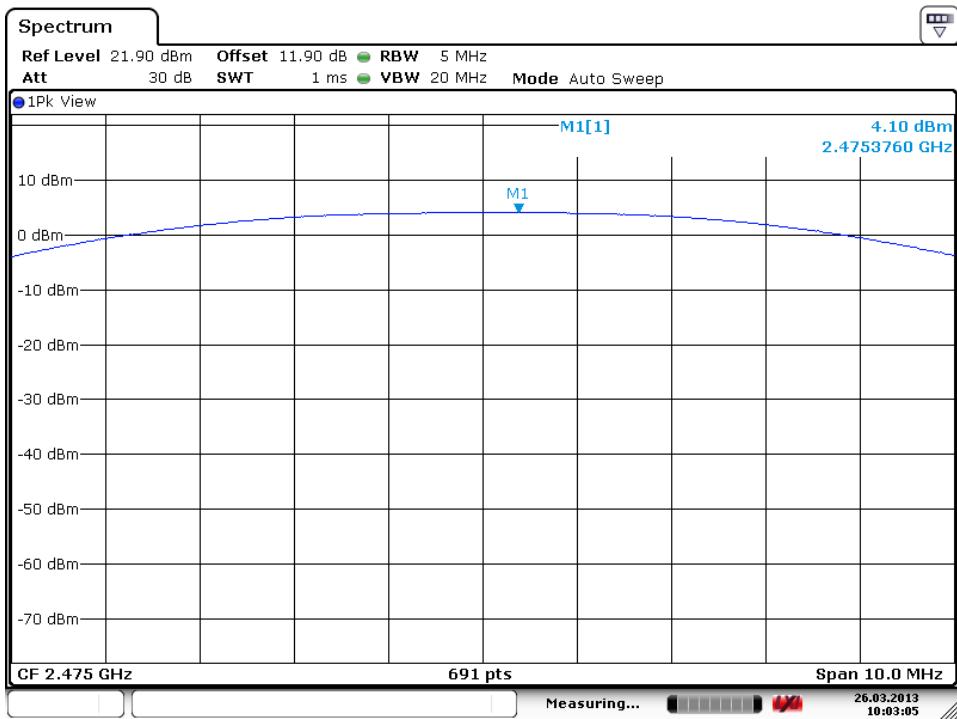

Date: 26.MAR.2013 10:03:06

High Channel 2480

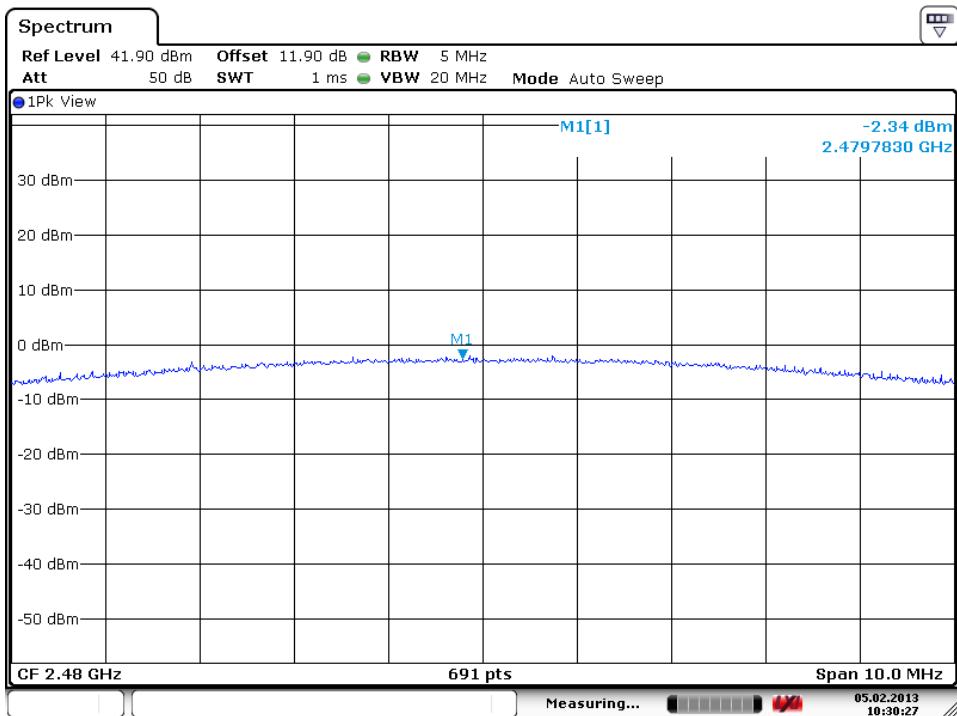

Date: 5.FEB.2013 10:30:26

5.1.3 6dB Bandwidth

RESULT:**Passed**

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10:2009, KDB558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A

Ambient temperature : 20-24 °C
Relative humidity : 50-65 %
Atmospheric pressure : 100-103 kPa

Table 7: Test result of 6 dB Bandwidth


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2405	1626	> 500	Pass
Mid Channel	2445	1646	> 500	Pass
High Channel	2480	1627	> 500	Pass

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 19 von 34
Page 19 of 34


Test Plot of 6dB Bandwidth

Low Channel

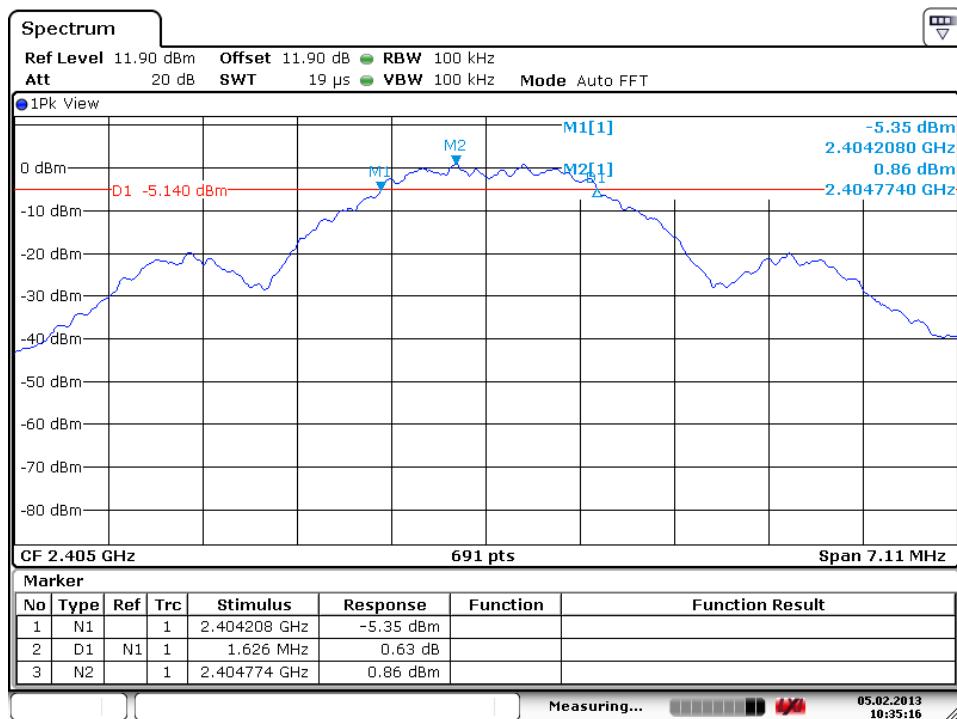

Date: 5.FEB.2013 10:35:16

Middle Channel

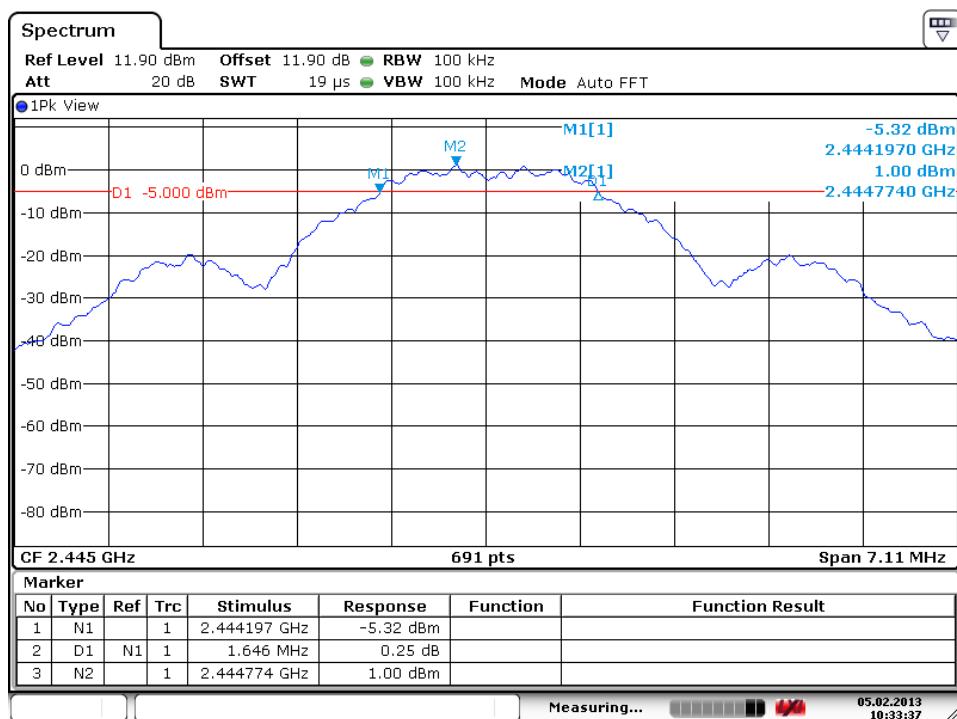


Date: 5.FEB.2013 10:33:37

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 20 von 34
Page 20 of 34

High Channel

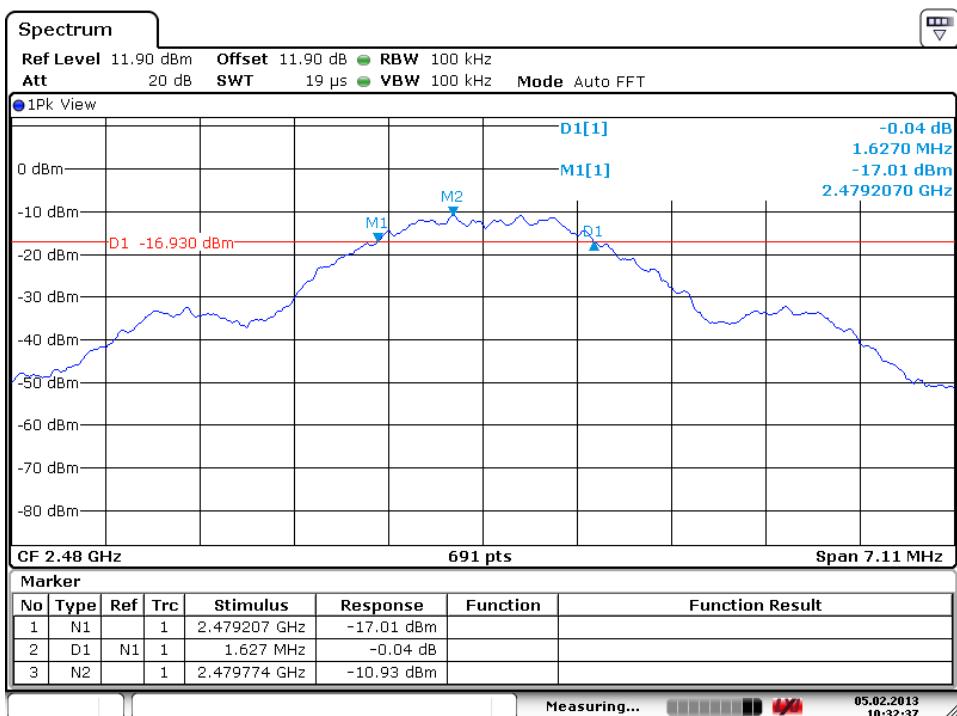

Date: 5.FEB.2013 10:32:37

Prüfbericht - Nr.: 10041102 001
*Test Report No.*Seite 21 von 34
*Page 21 of 34***5.1.4 Power Density****RESULT:****Passed**

Test standard : FCC Part 15.247(e)
Basic standard : ANSI C63.10:2009, KDB558074
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 18-22 °C
Relative humidity : 50-65 %
Atmospheric pressure : 100-103 kPa

Table 8: Test result of Power Density

Channel	Channel Frequency (MHz)	Peak Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2405	-11.37	8	Pass
Mid Channel	2445	-10.61	8	Pass
High Channel	2475	-10.86	8	Pass


Prüfbericht - Nr.: 10041102 001

Test Report No.

Seite 22 von 34
Page 22 of 34


Test Plot of Power Density

Low Channel

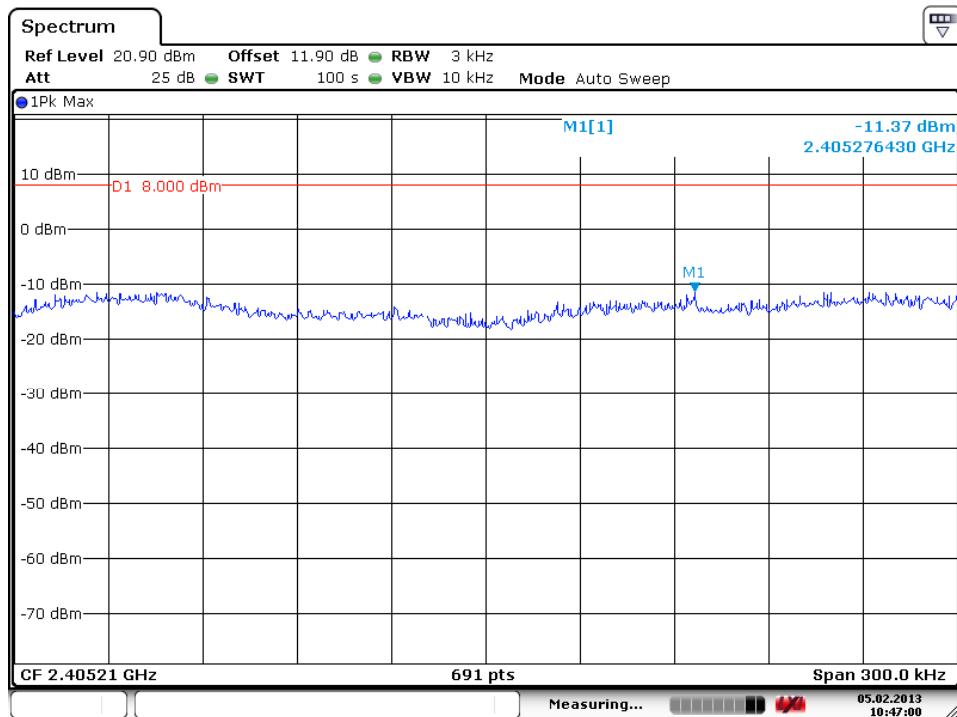

Date: 5.FEB.2013 10:47:00

Middle Channel

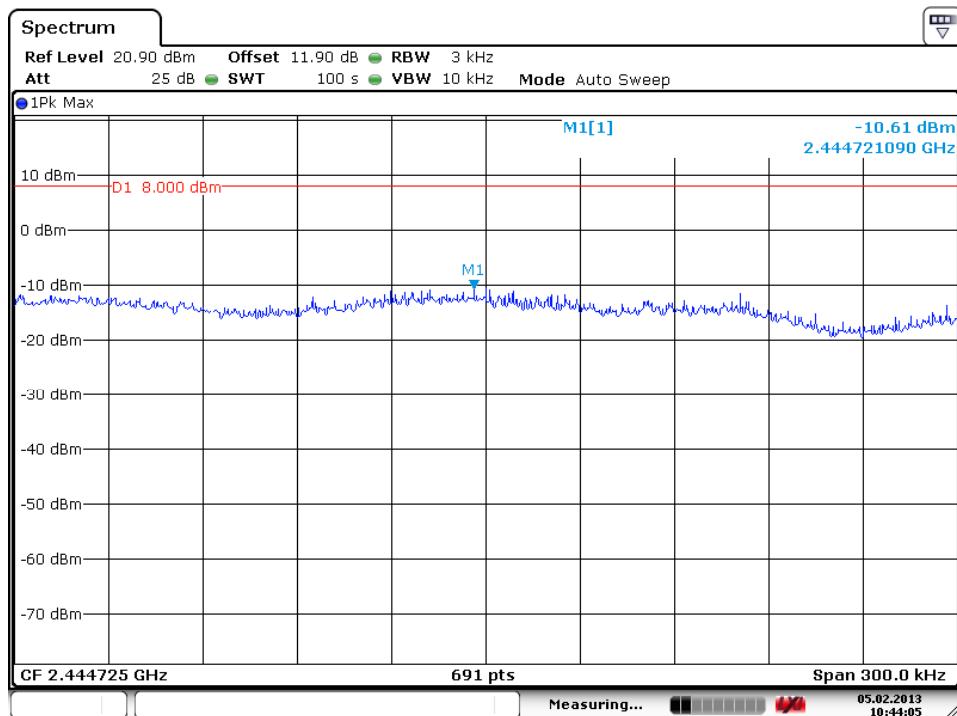


Date: 5.FEB.2013 10:44:05

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 23 von 34
Page 23 of 34

High Channel 2475

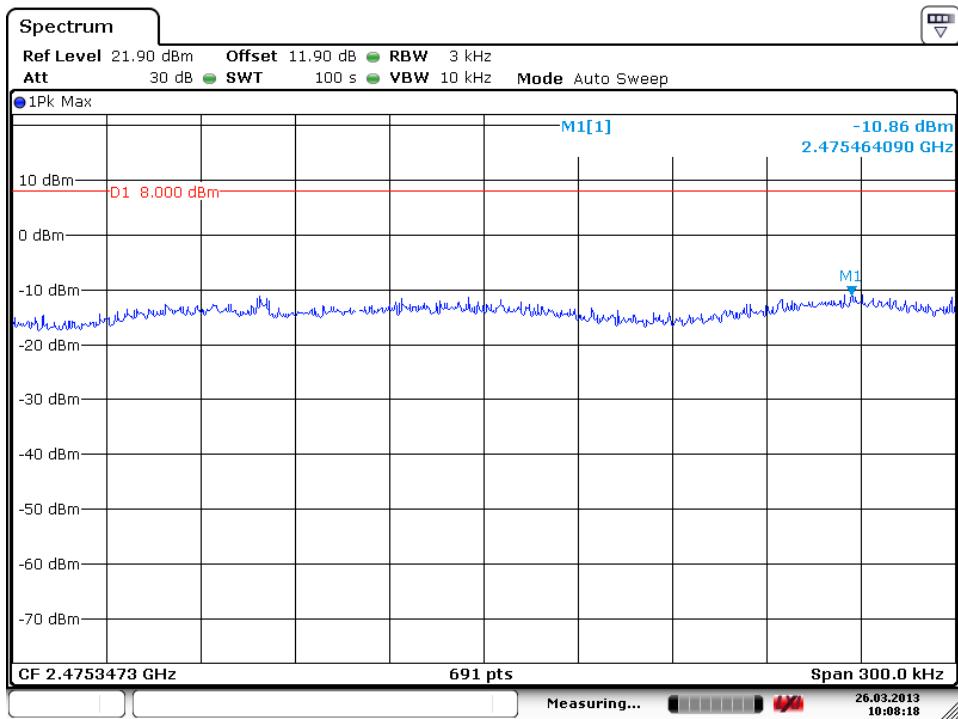

Date: 26.MAR.2013 10:08:18

5.1.5 Conducted spurious emissions and Frequency Band Edge measured in 100kHz Bandwidth

RESULT:**Passed**

Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.10:2009, KDB558074
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	:	Shielded room

Test setup

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	20-24 °C
Relative humidity	:	50-65 %
Atmospheric pressure	:	100-103 kPa

All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.


Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 25 von 34
Page 25 of 34


Test Plot of 100kHz Conducted Emissions

Low Channel

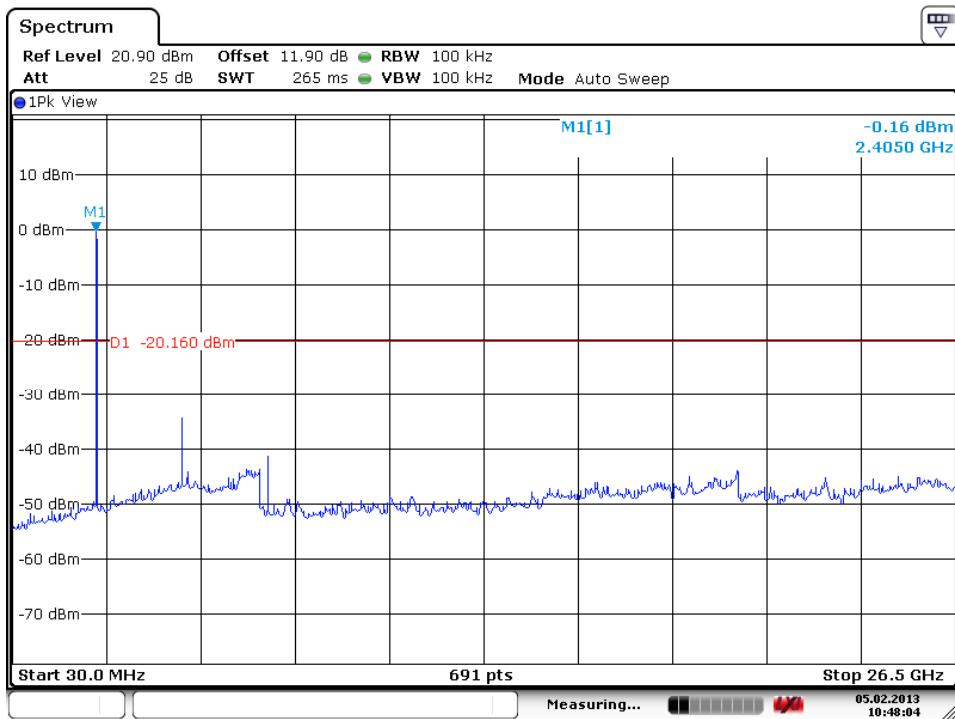

Date: 5.FEB.2013 10:48:04

Middle Channel

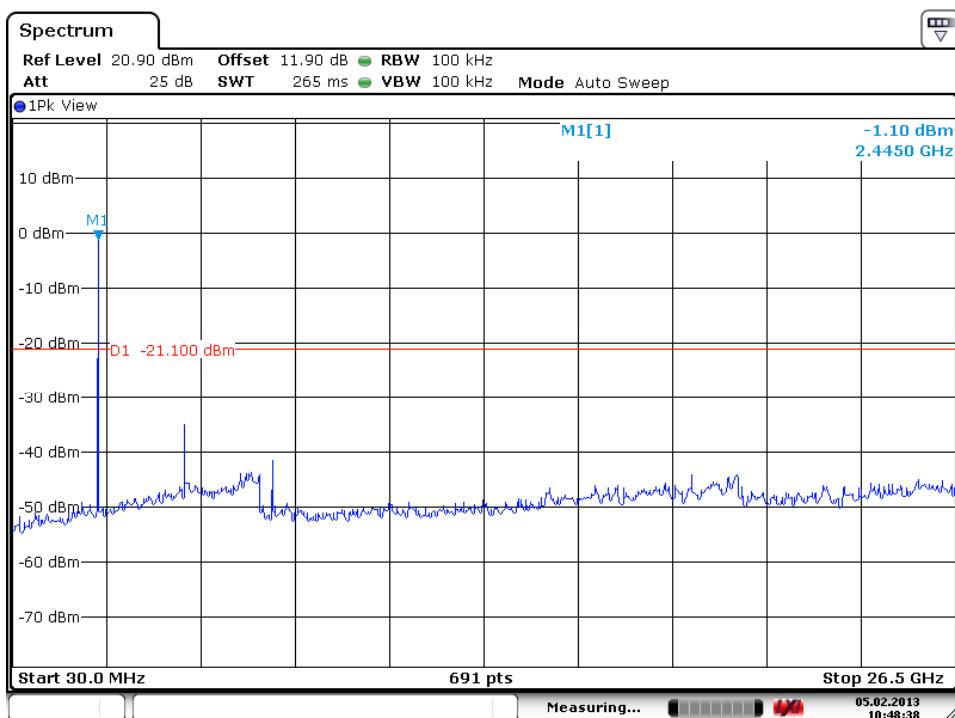


Date: 5.FEB.2013 10:48:37

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 26 von 34
Page 26 of 34

High Channel

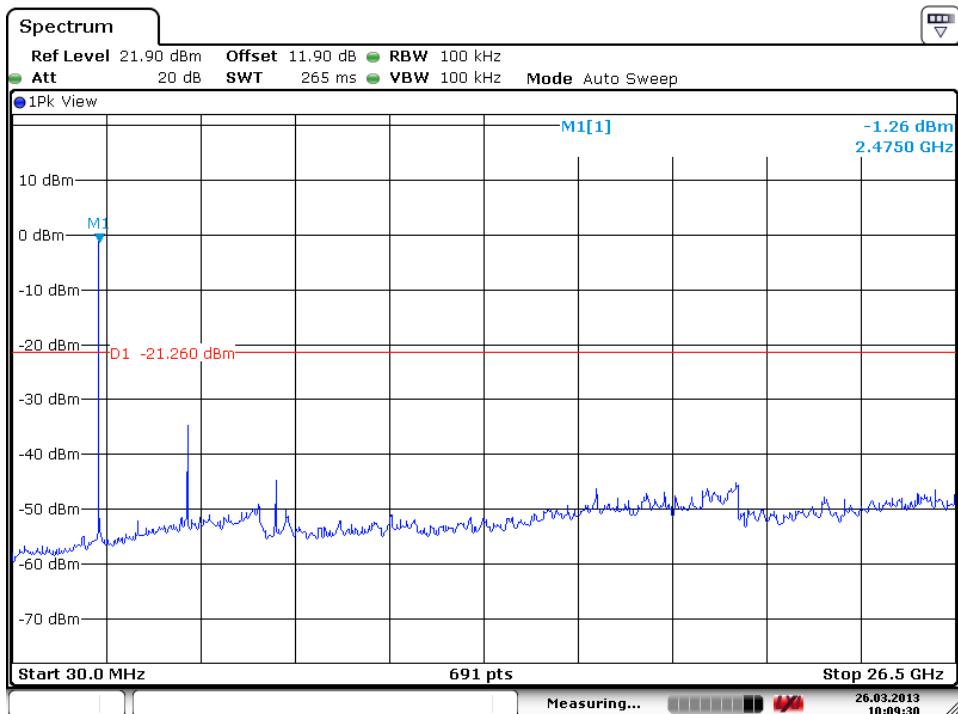


Date: 26.MAR.2013 10:09:30

Prüfbericht - Nr.: 10041102 001
Test Report No.

Seite 27 von 34
Page 27 of 34


Test Plot of 100kHz Bandwidth of Frequency Band Edge

Low Channel

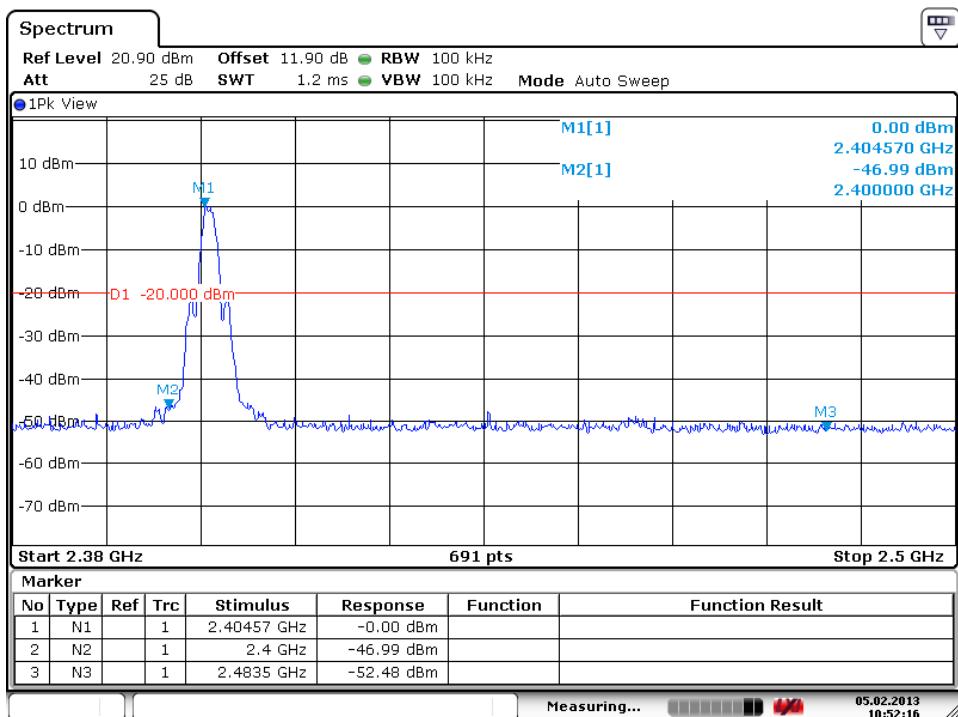

Date: 5.FEB.2013 10:52:16

High Channel

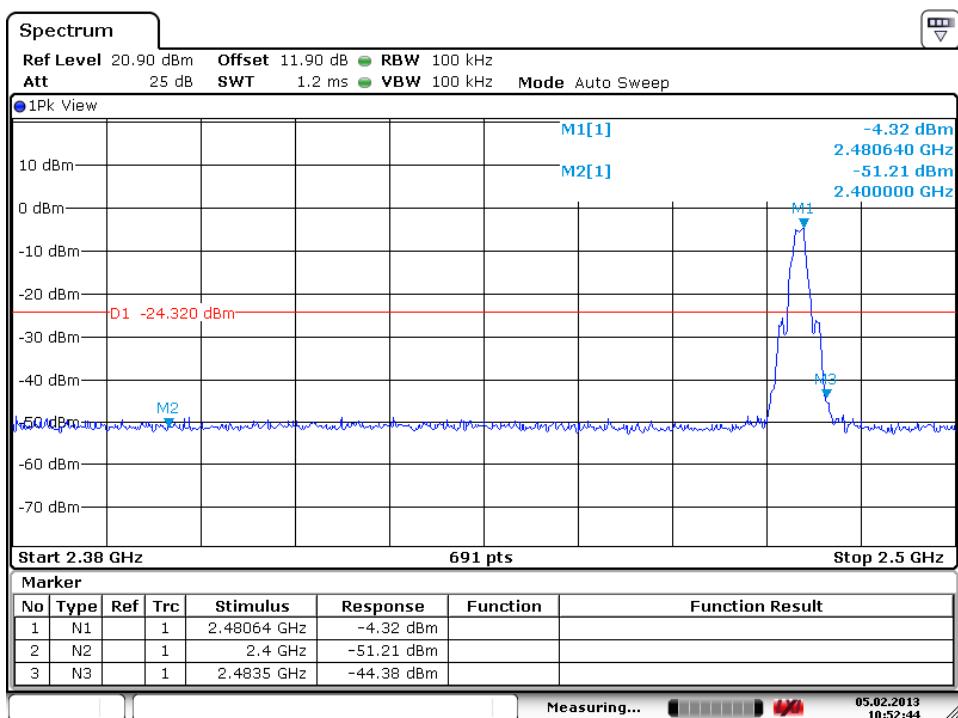

Date: 5.FEB.2013 10:52:44

5.1.6 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.247(d), FCC 15.205, FCC 15.209
Basic standard Limits	:	ANSI C63.10: 2009 Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A, C

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The X Axis orientation is the worst-case and recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.2 Mains Emissions

5.2.1 Mains Conducted Emissions

RESULT:**Passed**

Test standard	:	FCC Part 15.207 FCC Part 15.107 LP0002: 2.3
Limits	:	Mains Conducted emissions as defined in FCC Part 15.207/FCC Part 15.107 LP0002: 2.3 Must comply with the mains conducted emission limits specified in FCC Part 15.207/FCC Part 15.107 LP0002: 2.3
Kind of test site	:	Shielded Room

Test setup

Test Channel	:	Middle
Operation mode	:	A

Remark: For details refer to Appendix D.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**

Test standard : FCC KDB Publication 447498

The limit for Maximum Permissible Exposure (MPE) specified in FCC 1.1310 is followed. The gain of the antennas used in the product is extracted from the Antenna information provided and also the maximum total power input to the antenna is measured. Through the Friis transmission formula and the maximum gain of the antenna, we can calculate the exposure at a distance of 20 cm away from the product and compare it to the limit of MPE.

Frequency Band: 2400-2483.5 MHz

$$S = PG / 4\pi R^2$$

Max Power to Antenna (mW)	Antenna Gain (dBi)	Antenna Gain (numeric)	Power Density at 20cm (mW/cm^2)	Limit (mW/cm^2)	Result
3.82	4.77	2.999	0.002	1	Pass

8. List of Tables

Table 1: Applied Standard and Test Levels	4
Table 2: List of Test and Measurement Equipment	6
Table 3: Emission Measurement Uncertainty.....	7
Table 4: Technical Specification of EUT	8
Table 5: Channel Table	9
Table 6: Test result of Peak Output Power	15
Table 7: Test result of 6 dB Bandwidth	18
Table 8: Test result of Power Density	21

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	31
Photograph 2: Set-up for Spurious Emissions (Back View 1).....	31
Photograph 3: Set-up for Spurious Emissions (Back View 2)	32
Photograph 4: Set-up for Conducted testing	32
Photograph 5: Set-up for for Mains Conducted testing Back	33
Photograph 6: Set-up for for Mains Conducted testing Front.....	33