

# Test report

**318789-1TRFWL**

Date of issue: December 2, 2016

Applicant:

**Invention Planet, LLC**

Product:

**Pro Radar Module**

Model:

**RM1500**

FCC ID:

**WZK-PR-1001**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C 15.245**

Operation within the bands 902–928 MHz, 2435–2465 MHz, 5785–5815 MHz, 10500–10550 MHz, and 24075–24175 MHz.

#### Test location

---

Company name:	Nemko Canada Inc.
Address:	303 River Road
City:	Ottawa
Province:	Ontario
Postal code:	K1V 1H2
Country:	Canada
Telephone:	+1 613 737 9680
Facsimile:	+1 613 737 9691
Toll free:	+1 800 563 6336
Website:	www.nemko.com
Site number:	FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber)

Tested by:	Kevin Rose, Wireless/EMC Specialist
Reviewed by:	Andrey Adelberg, Senior Wireless/EMC Specialist
Date:	December 2, 2016
Signature:	

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of contents

<b>Table of contents</b> .....	<b>3</b>
<b>Section 1. Report summary</b> .....	<b>4</b>
1.1 Test specifications .....	4
1.2 Test methods.....	4
1.3 Statement of compliance .....	4
1.4 Exclusions.....	4
1.5 Test report revision history .....	4
<b>Section 2. Summary of test results</b> .....	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results .....	5
2.2 FCC Part 15 Subpart C, Intentional radiators test results .....	5
<b>Section 3. Equipment under test (EUT) details</b> .....	<b>6</b>
3.1 Applicant .....	6
3.2 Manufacturer .....	6
3.3 Sample information.....	6
<b>October 31, 2016</b> .....	<b>6</b>
3.4 EUT information .....	6
3.5 Technical information .....	6
3.6 Product description and theory of operation .....	7
3.7 EUT exercise details.....	7
3.8 EUT setup diagram .....	7
<b>Section 4. Engineering considerations</b> .....	<b>8</b>
4.1 Modifications incorporated in the EUT.....	8
4.2 Technical judgment.....	8
4.3 Deviations from laboratory tests procedures .....	8
<b>Section 5. Test conditions</b> .....	<b>9</b>
5.1 Atmospheric conditions .....	9
5.2 Power supply range.....	9
<b>Section 6. Measurement uncertainty</b> .....	<b>10</b>
6.1 Uncertainty of measurement .....	10
<b>Section 7. Test equipment</b> .....	<b>11</b>
7.1 Test equipment list.....	11
<b>Section 8. Testing data</b> .....	<b>12</b>
8.1 FCC 15.207(a) AC power line conducted emissions limits .....	12
8.2 FCC 15.215(c) Occupied (Emission) bandwidth .....	14
8.3 FCC 15.245((b)1 and (b) 3) Radiated emission.....	16
<b>Section 9. Block diagrams of test set-ups</b> .....	<b>21</b>
9.1 Radiated emissions set-up for frequencies below 1 GHz.....	21
9.2 Radiated emissions set-up for frequencies above 1 GHz.....	22
9.3 Conducted emissions set-up .....	22

## Section 1. Report summary

---

### 1.1 Test specifications

---

FCC 47 CFR Part 15.245, Subpart C

Operation within the bands 902–928 MHz, 2435–2465 MHz, 5785–5815 MHz, 10500–10550 MHz, and 24075–24175 MHz.

### 1.2 Test methods

---

ANSI C63.10 v2013

American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

### 1.3 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.4 Exclusions

---

None

### 1.5 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued

## Section 2. Summary of test results

---

### 2.1 FCC Part 15 Subpart C, general requirements test results

---

*Table 2.1-1: FCC 47 CFR Part 15, Subpart C general requirements results*

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>
§15.215(c)	20 dB bandwidth	Pass

Notes: <sup>1</sup> Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed.

<sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.

### 2.2 FCC Part 15 Subpart C, Intentional radiators test results

---

*Table 2.2-1: FCC 47 CFR Part 15, Subpart C §15.245 results*

Part	Test description	Verdict
§15.245(b)	Radiated emissions of fundamental and harmonics	Pass
§15.245(b)(1)	Radiated emissions of harmonics that fall within restricted frequency bands	Pass
§15.245(b)(3)	Radiated spurious emissions except for harmonics	Pass

Notes: None

## Section 3. Equipment under test (EUT) details

---

### 3.1 Applicant

---

Company name	Invention Planet, LLC
Address	3535 Industrial Drive, Suite A4
City	Santa Rosa
Province/State	CA
Postal/Zip code	95403
Country	USA

### 3.2 Manufacturer

---

Company name	Pocket Radar Inc.
Address	3535 Industrial Drive, Suite A4
City	Santa Rosa
Province/State	CA
Postal/Zip code	95403
Country	USA

### 3.3 Sample information

---

Receipt date	October 31, 2016
Nemko sample ID number	133-002238

### 3.4 EUT information

---

Product name	Pro Radar Module
Model	RM1500
Serial number	none

### 3.5 Technical information

---

Operating band	24.075–24.175 GHz
Operating frequency	24.120 GHz
Modulation type	CW
Occupied bandwidth (20 dB) kHz	22.56
Emission designator	NON
Power requirements	5 Vdc USB from 120 V <sub>AC</sub> , 60 Hz
Antenna information	Integrated antenna The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

### 3.6 Product description and theory of operation

---

The EUT is setup to measure a tuning fork to indicate 65 MPH

### 3.7 EUT exercise details

---

The EUT transmits and a tuning fork was used to show performance.

### 3.8 EUT setup diagram

---

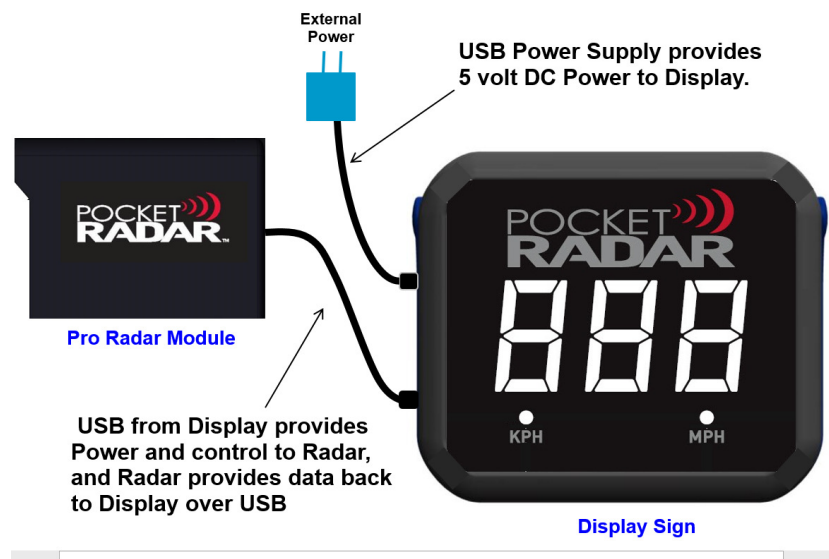


Figure 3.8-1: Setup diagram

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.



## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

---

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Dec. 01/16
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	Jan. 07/17
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Apr. 15/17
LISN	Rohde & Schwarz	ENV216	FA002023	1 year	Mar. 08/17
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	Apr. 28/17
Horn antenna (1–18 GHz)	EMCO	3115	FA000825	1 year	Apr. 26/17
Horn antenna 18–40 GHz	EMCO	3116	FA001847	1 year	Apr. 15/17
Pre-amplifier (1–18 GHz)	JCA	JCA118-503	FA002091	1 year	April 26/17
Pre-amplifier (18–26 GHz)	Narda	BBS-1826N612	FA001550	—	VOU
Pre-amplifier (26–40 GHz)	Narda	DBL-2640N610	FA001556	—	VOU
40–60 GHz Harmonic mixer	OML	WR19 M19HWD	FA002322	3 year	May. 16/19
40–60 GHz Standard gain horn	Millitech	U SGH-19	FA002322	—	VOU
60–90 GHz Harmonic mixer	OML	WR12 M12HWD	FA001524	3 year	May. 16/19
60–90 GHz Standard gain horn	Millitech	U SGH-12	FA001524	—	VOU
90–140 GHz Harmonic mixer	OML	WR08 M08HWD	FA001525	3 year	May. 16/19
90–140 GHz Standard gain horn	Millitech	U SGH-08	FA001525	—	VOU

Notes: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 FCC 15.207(a) AC power line conducted emissions limits

#### 8.1.1 Definitions and limits

**FCC:**

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

*Table 8.1-1: Conducted emissions limit*

Frequency of emission MHz	Conducted limit, dB $\mu$ V	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Note: \* - The level decreases linearly with the logarithm of the frequency.  
 \*\* - A linear average detector is required.

#### 8.1.2 Test summary

Test date	November 7, 2016	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	1009 mbar
Verdict	Pass	Relative humidity	33 %

#### 8.1.3 Observations, settings and special notes

The EUT was set up as tabletop configuration.


The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Test receiver settings:


Frequency span	150 kHz to 30 MHz
Detector mode	Peak and Average (preview mode); Quasi-Peak (final measurements)
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	1000 ms

8.1.4 Test data

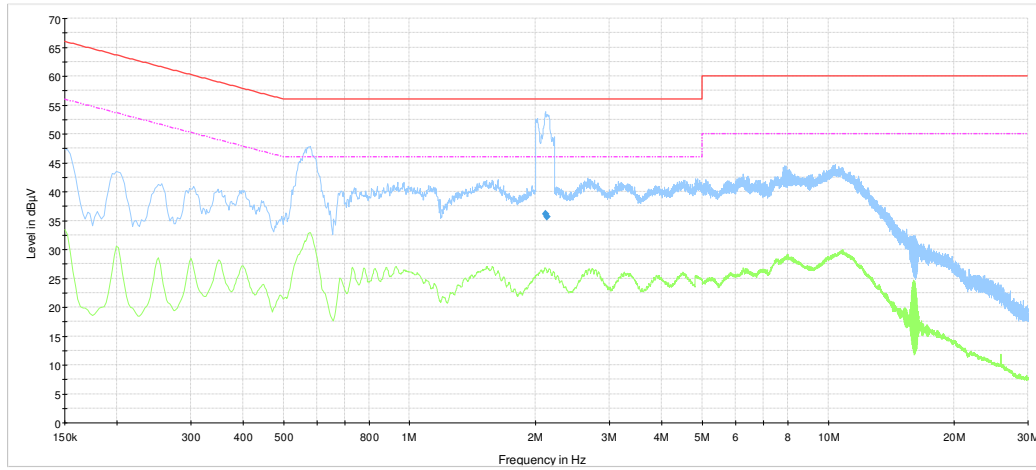

NEX-318789 CE 120 Vac 60 Hz Phase  
 Preview Result 2-AVG  
 Preview Result 1-PK+  
 CISPR 22 Mains Q-Peak Class B Limit  
 CISPR 22 Mains Average Class B Limit  
 Final\_Result QPK  
 Final\_Result CAV

**Plot 8.1-1:** Conducted emissions on phase line

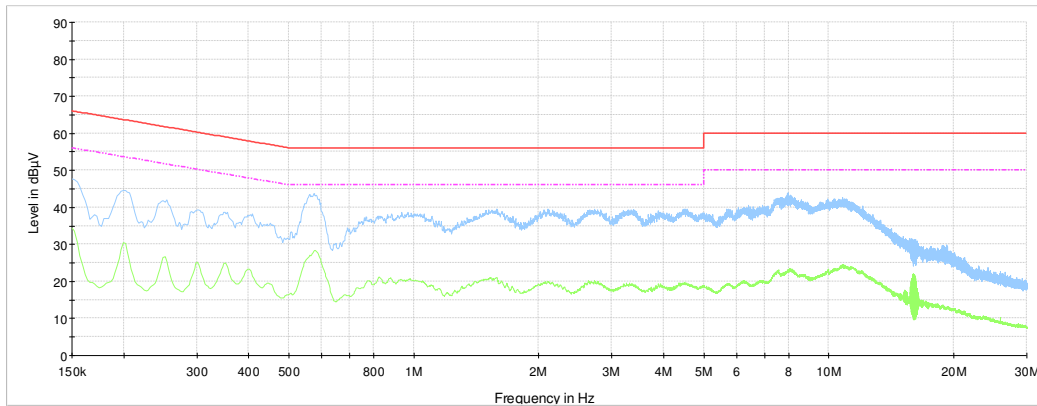

NEX-318789 CE 120 Vac 60 Hz Neutral  
 Preview Result 2-AVG  
 Preview Result 1-PK+  
 CISPR 22 Mains Q-Peak Class B Limit  
 CISPR 22 Mains Average Class B Limit  
 Final\_Result QPK  
 Final\_Result CAV

**Plot 8.1-2:** Conducted emissions on neutral line

## 8.2 FCC 15.215(c) Occupied (Emission) bandwidth

---

### 8.2.1 Definitions and limits

---

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

### 8.2.2 Test summary

---

Test date	November 7, 2016	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	1009 mbar
Verdict	Pass	Relative humidity	33 %

### 8.2.3 Observations, settings and special notes

---

Spectrum analyser settings:

Resolution bandwidth:	≥1 % of span
Video bandwidth:	≥3 × RBW
Detector mode:	Peak
Trace mode:	Max Hold

### 8.2.4 Test data


---

*Table 8.2-1: Lower 20 dBc frequency-cross result*

Fundamental frequency, GHz	Lower 20 dBc frequency cross, GHz	Limit, GHz	Margin, GHz
24.120	24.1195247	24.075	0.0445247

*Table 8.2-2: Upper 20 dBc frequency-cross result*

Fundamental frequency, GHz	Upper 20 dBc frequency cross, GHz	Limit, GHz	Margin, GHz
24.120	24.1197473	24.175	0.0552527

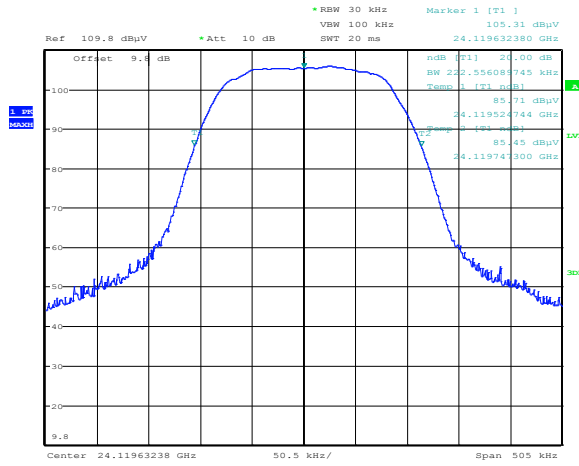

Date: 8.NOV.2016 21:17:17

Figure 8.2-1: 20 dB bandwidth

## 8.3 FCC 15.245((b)1 and (b) 3) Radiated emission

### 8.3.1 Definitions and limits

**FCC §15.245:**

(b) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with table below.

- (1) Regardless of the limits shown in the table below, harmonic emissions in the restricted bands below 17.7 GHz, as specified in §15.205, shall not exceed the field strength limits shown in §15.209. Harmonic emissions in the restricted bands at and above 17.7 GHz shall not exceed the following field strength limits:
  - (i) For the second and third harmonics of field disturbance sensors operating in the 24075–24175 MHz band and for other field disturbance sensors designed for use only within a building or to open building doors, 25.0 mV/m (87.96 dBµV/m).
  - (ii) For all other field disturbance sensors, 7.5 mV/m (77.50 dBµV/m).
  - (iii) Field disturbance sensors designed to be used in motor vehicles or aircraft must include features to prevent continuous operation unless their emissions in the restricted bands, other than the second and third harmonics from devices operating in the 24075–24175 MHz band, fully comply with the limits given in §15.209. Continuous operation of field disturbance sensors designed to be used in farm equipment, vehicles such as fork lifts that are intended primarily for use indoors or for very specialized operations, or railroad locomotives, railroad cars and other equipment which travels on fixed tracks is permitted. A field disturbance sensor will be considered not to be operating in a continuous mode if its operation is limited to specific activities of limited duration (e.g., putting a vehicle into reverse gear, activating a turn signal, etc.).
- (3) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

**Table 8.3-1: Radiated emission limits**

Fundamental frequency MHz	Field strength of fundamental @ 3 m		Field strength of harmonics @ 3 m	
	mV/m	dBµV/m	mV/m	dBµV/m
902–928	500	114	1.6	64
2435–2465	500	114	1.6	64
5785–5815	500	114	1.6	64
10500–10550	2500	127.95	25	87.95
24075–24175	2500	127.95	25	87.95

Notes: The emission limits shown above are based on measurement instrumentation employing an **average detector**. The provisions in §15.35 for limiting peak emissions apply.



**Table 8.3-2: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

**Table 8.3-3: 15.209 and RSS-Gen emissions field strength limits**

Frequency MHz	Field strength of emissions		Measurement distance m
	$\mu\text{V}/\text{m}$	$\text{dB}\mu\text{V}/\text{m}$	
0.009–0.490	$2400/F$	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	$24000/F$	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.  $F$  is in kHz. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test



8.3.2 Test summary

Test date	November 7, 2016	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	1009 mbar
Verdict	Pass	Relative humidity	33 %

8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 5<sup>th</sup> harmonic.  
 Radiated measurements were performed at a distance of 3 m

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:


Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

8.3.4 Test data

**Table 8.3-4: Radiated field strength measurement Fundamental results**


Frequency GHz	Average Field strength dBµV/m	Average Field strength Limit dBµV/m	Margin dB
24.120	121.3	127.95	6.65

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

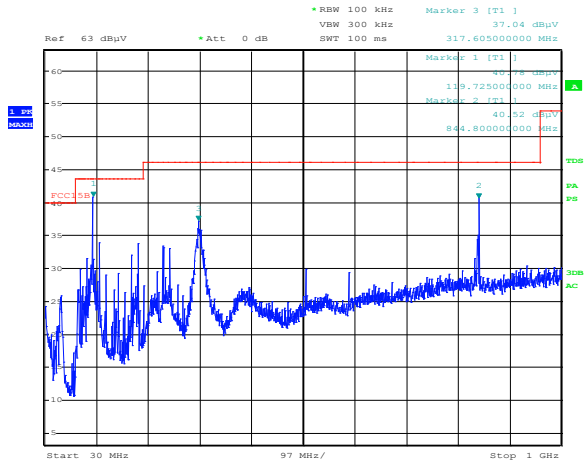


Date: 8.NOV.2016 18:55:05

**Figure 8.3-1: Radiated 30-1000 MHz**

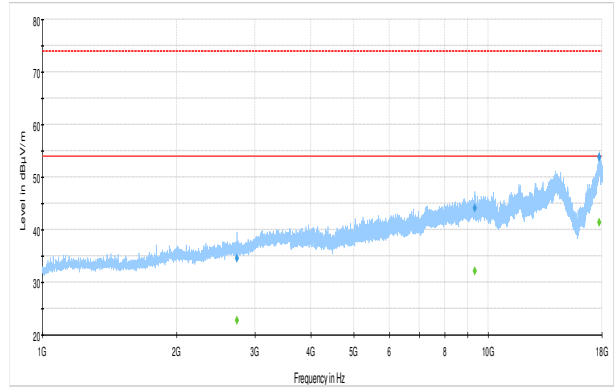


NEK318789 REscan 1-18 GHz  
 Preview Result 1-PK+  
 FCC Part 15 and ICES - Class B 3m Average Limit  
 FCC Part 15 and ICES - Class B 3m Peak Limit  
 Final\_Result PK+  
 Final\_Result CAV

**Figure 8.3-2: Radiated 1-18 GHz**

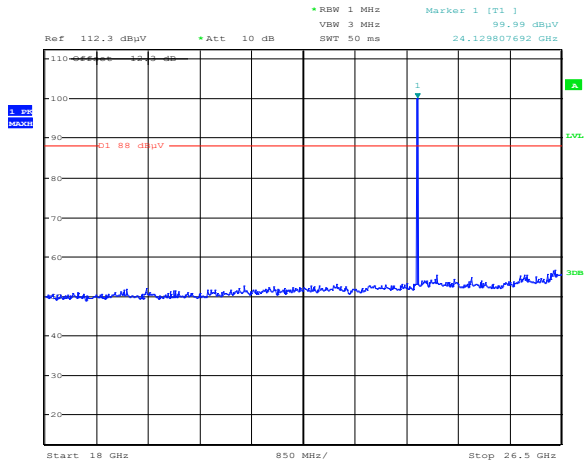


Date: 8.NOV.2016 21:09:29

**Figure 8.3-3: Radiated 18-26.5 GHz**

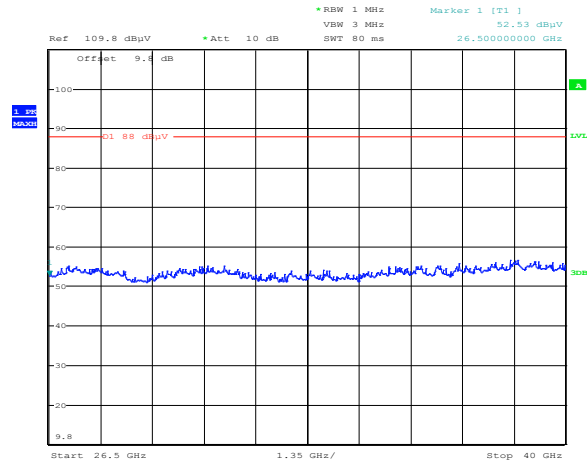


Date: 8.NOV.2016 21:13:08

**Figure 8.3-4: Radiated 26.5-40 GHz**

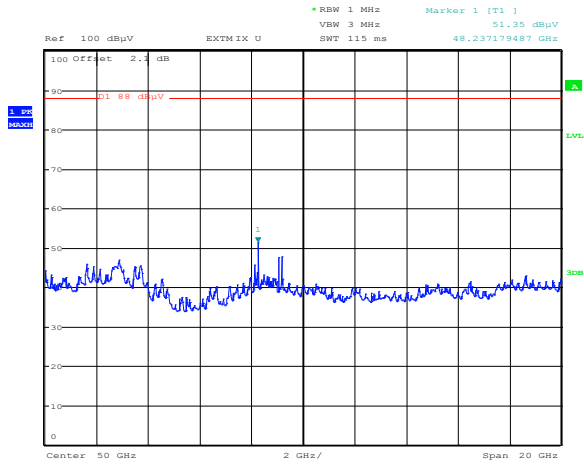


Date: 8.NOV.2016 20:33:16

**Figure 8.3-5: Radiated 40-60 GHz**

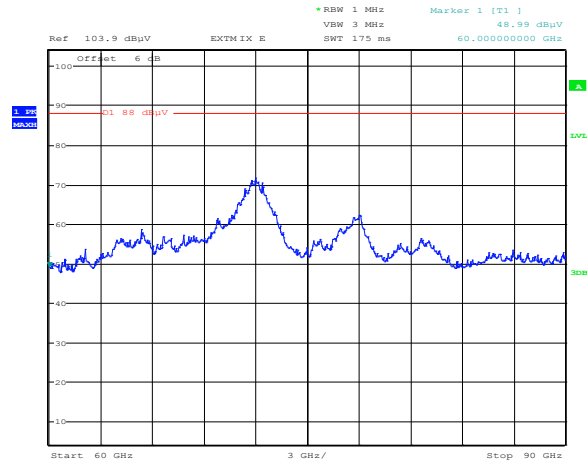

Date: 8.NOV.2016 20:36:23

**Figure 8.3-6: Radiated 60-90 GHz**

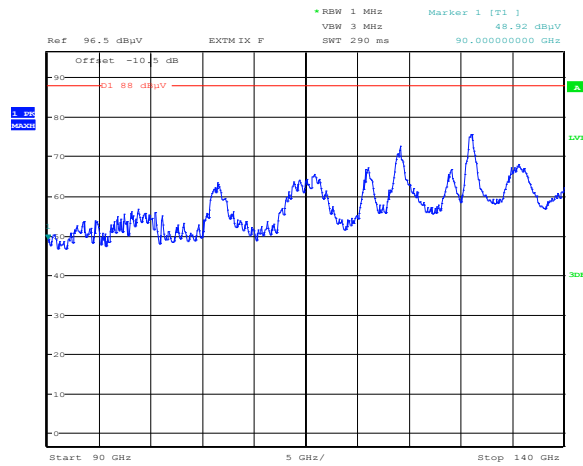


Date: 8.NOV.2016 20:39:01


**Figure 8.3-7: Radiated 90-140 GHz**

## Section 9. Block diagrams of test set-ups

### 9.1 Radiated emissions set-up for frequencies below 1 GHz

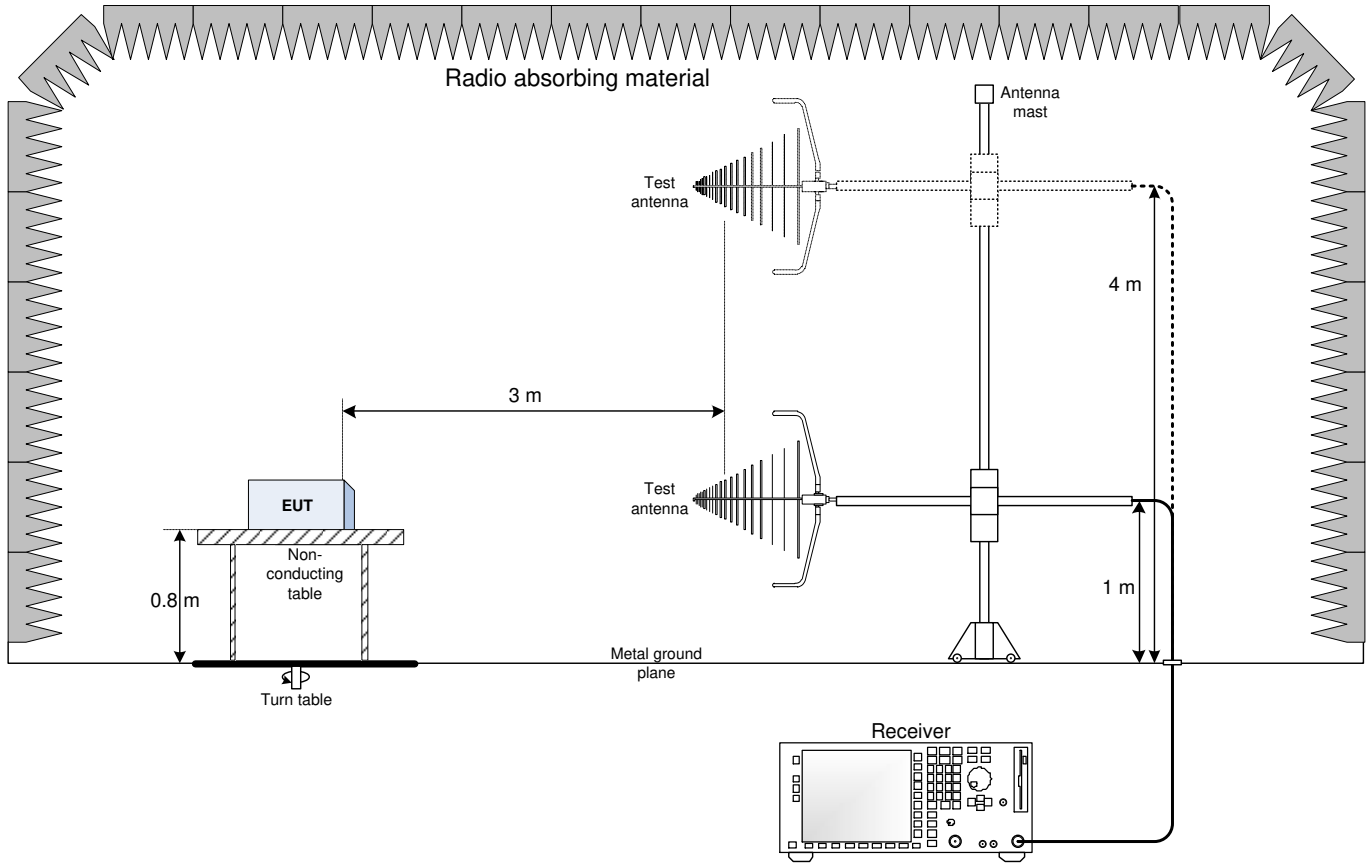

### 9.2 Radiated emissions set-up for frequencies above 1 GHz

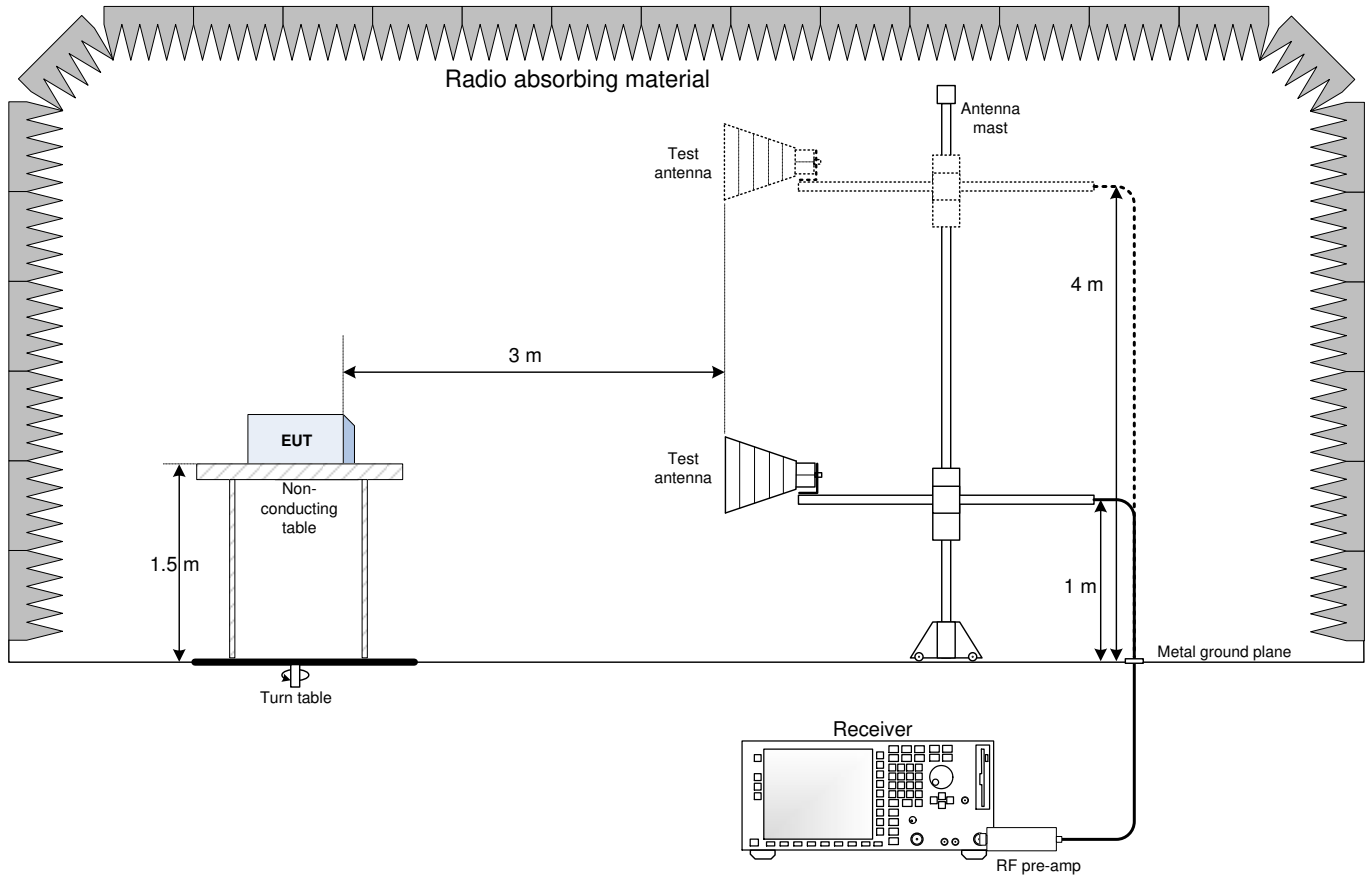

### 9.3 Conducted emissions set-up

