



# FCC PART 90



# TEST REPORT

For

## Ondas Networks Inc.

165 Gibraltar Court,  
Sunnyvale, CA 94089, USA

**FCC ID: X27-V900B**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Base Station
<b>Prepared By:</b> Arturo Reyes Test Engineer	
<b>Report Number:</b> R2306264-90	
<b>Report Date:</b> 2023-08-28	
<b>Reviewed By:</b> Christian McCaig RF Lead Engineer	
<p>Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164</p>	



**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*" (Rev.3)

# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2	MECHANICAL DESCRIPTION .....	5
1.3	OBJECTIVE.....	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY .....	5
1.6	MEASUREMENT UNCERTAINTY.....	6
1.7	TEST FACILITY REGISTRATIONS .....	6
1.8	TEST FACILITY ACCREDITATIONS.....	7
<b>2</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
2.1	JUSTIFICATION .....	9
2.2	EUT EXERCISE SOFTWARE.....	9
2.3	EQUIPMENT MODIFICATIONS .....	9
2.4	REMOTE SUPPORT EQUIPMENT LIST AND DETAILS.....	9
2.5	POWER SUPPLY.....	10
2.6	INTERFACE PORTS AND CABLING .....	10
<b>3</b>	<b>SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>4</b>	<b>FCC §1.1307(B) (1), §1.1307, §2.1091 &amp; §90.223 - RF EXPOSURE .....</b>	<b>12</b>
4.1	APPLICABLE STANDARDS .....	12
4.2	MPE PREDICTION .....	12
4.3	TEST RESULTS .....	13
<b>5</b>	<b>FCC §2.1046, §90.205(K) &amp; §90.635(B) - RF OUTPUT POWER .....</b>	<b>14</b>
5.1	APPLICABLE STANDARDS .....	14
5.2	TEST PROCEDURE .....	14
5.3	TEST SETUP DIAGRAM.....	14
5.4	TEST EQUIPMENT LIST AND DETAILS .....	15
5.5	TEST ENVIRONMENTAL CONDITIONS.....	16
5.6	TEST RESULTS .....	16
<b>6</b>	<b>FCC §2.1049 &amp; §90.209 - OCCUPIED BANDWIDTH .....</b>	<b>23</b>
6.1	APPLICABLE STANDARDS .....	23
6.2	TEST PROCEDURE .....	23
6.3	TEST SETUP DIAGRAM.....	23
6.4	TEST EQUIPMENT LIST AND DETAILS .....	24
6.5	TEST ENVIRONMENTAL CONDITIONS.....	25
6.6	TEST RESULTS .....	25
<b>7</b>	<b>FCC §2.1051 &amp; §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>32</b>
7.1	APPLICABLE STANDARDS .....	32
7.2	TEST PROCEDURE .....	32
7.3	TEST SETUP DIAGRAM.....	33
7.4	TEST EQUIPMENT LIST AND DETAILS .....	33
7.5	TEST ENVIRONMENTAL CONDITIONS.....	33
7.6	TEST RESULTS .....	34
<b>8</b>	<b>FCC §2.1051 &amp; §90.210 – RADIATED SPURIOUS EMISSIONS .....</b>	<b>41</b>
8.1	APPLICABLE STANDARDS .....	41
8.2	TEST PROCEDURE .....	41
8.3	TEST SETUP DIAGRAM.....	42
8.4	TEST EQUIPMENT LIST AND DETAILS .....	43
8.5	TEST ENVIRONMENTAL CONDITIONS.....	43
8.6	TEST RESULTS .....	44
<b>9</b>	<b>FCC §2.1055 &amp; §90.213 - FREQUENCY TOLERANCE.....</b>	<b>45</b>
9.1	APPLICABLE STANDARD .....	45
9.2	TEST PROCEDURE .....	45

---

9.3	TEST EQUIPMENT LIST AND DETAILS .....	47
9.4	TEST ENVIRONMENTAL CONDITIONS .....	47
9.5	TEST RESULTS .....	48
<b>10</b>	<b>ANNEX A (NORMATIVE) - EUT SETUP PHOTOGRAPHS.....</b>	<b>49</b>
<b>11</b>	<b>ANNEX B (NORMATIVE) - EUT EXTERNAL PHOTOGRAPHS.....</b>	<b>50</b>
<b>12</b>	<b>ANNEX C (NORMATIVE) - EUT INTERNAL PHOTOGRAPHS.....</b>	<b>51</b>
<b>13</b>	<b>ANNEX D (NORMATIVE) - A2LA ELECTRICAL TESTING CERTIFICATE.....</b>	<b>52</b>

### DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2306264-90	Original Report	2023-08-28

## **1 General Information**

---

### **1.1 Product Description for Equipment under Test (EUT)**

This test report was prepared on behalf of *Ondas Networks Inc.* and their product model: V900, FCC ID: X27-V900B, which will henceforth be referred to as the EUT (Equipment under Test). The EUT is a base station and operates in the frequency range of and 935.0125-935.125 MHz.

### **1.2 Mechanical Description**

The EUT measured approximately 252 mm (L) x 122 mm (W) x 84 mm (H) and weighs approximately 1.9 kg.

*The test data gathered are from typical production sample with BACL assigned serial number: 5368900392*

### **1.3 Objective**

This report was prepared on behalf of *Ondas Networks Inc.* in accordance with Part 90 Subparts I and S and Part 2 Subpart J of the Federal Communication Commission's rules.

The objective was to determine compliance with FCC rules for RF output power, occupied bandwidth, frequency tolerance, emission limitations at band edges, spurious emissions at antenna terminal and field strength of spurious radiation.

### **1.4 Related Submittal(s)/Grant(s)**

None

### **1.5 Test Methodology**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 90 Subparts I and S and Part 2 Subpart J.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

## 1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R.

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02)**, in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03)** to certify

- For the USA (Federal Communications Commission):
  - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
  - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
  - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
  - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
  - 2 All Scope 2-Licensed Personal Mobile Radio Services;
  - 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
  - 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
  - 5 All Scope 5-Licensed Fixed Microwave Radio Services
  - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
  - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
  2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
  - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
  - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
  - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
  - 1 MIC Telecommunication Business Law (Terminal Equipment):
    - All Scope A1 - Terminal Equipment for the Purpose of Calls;
    - All Scope A2 - Other Terminal Equipment
  - 2 Radio Law (Radio Equipment):
    - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
    - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
    - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes & Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products
  - For Decorative Light Strings (ver. 1.5)
  - For Luminaires (including sub-components) and Lamps (ver. 1.2)
  - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
  - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
  - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
  - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;



## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.26-2015.

### 2.2 EUT Exercise Software

The test firmware used was Putty, provided by *Ondas Networks Inc.*, the software is compliant with the standard requirements being tested against.

Modulation	Frequency (MHz)	Rated Power (dBm)	SW Attenuation Setting	SW Bandwidth Setting
QPSK	935.0125	Default	Default	Default
	935.125	Default	Default	Default
16QAM	935.0125	Default	Default	Default
	935.125	Default	Default	Default
64QAM	935.0125	Default	Default	Default
	935.125	Default	Default	Default
CW	935.0625	Default	Default	Default
	935.0125	Default	Default	Default

### 2.3 Equipment Modifications

No modifications were made to the EUT.

### 2.4 Remote Support Equipment List and Details

Manufacturer	Descriptions	Models	Serial Numbers
Lenovo	Laptop	Thinkpad	-

## 2.5 Power Supply

Manufacturer	Descriptions	Models	Serial Numbers
Meanwell	Power Supply	RS-150-24	-

## 2.6 Interface Ports and Cabling

Cable Description	Length (m)	From	To
RF cable	< 1	EUT Output	Attenuator Input
RF cable	< 1	EUT Input	GPS Receiver
RF cable	< 1	Attenuator Output	Spectrum Analyzer
USB A to RJ45 Cable	1	Support Equipment	EUT Input

### 3 Summary of Test Results

FCC Rules	Description of Tests	Results
§1.1307, §2.1091, §90.223	RF Exposure	Compliant
§2.1046, §90.205(k), §90.635(b)	RF Output Power	Compliant
§2.1049, §90.209	Occupied Bandwidth	Compliant
§2.1053, §90.210	Spurious Radiated Emissions	Compliant
§2.1051, §90.210	Spurious Emissions at Antenna Terminals	Compliant
§90.210	Emission Mask	Compliant
§2.1055, §90.213	Frequency Tolerance	Compliant

*BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.*

## 4 FCC §1.1307(b) (1), §1.1307, §2.1091 & §90.223 - RF Exposure

### 4.1 Applicable Standards

FCC §2.1091, (a) Requirements of this section are a consequence of Commission responsibilities under the National Environmental Policy Act to evaluate the environmental significance of its actions. See subpart I of part 1 of this chapter, in particular §1.1307(b).

According to §1.1310 and §2.1091 RF exposure is calculated.

#### Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-3.0	614	1.63	*(100)	<30
3.0-30	824/f	2.19/f	*(900/f <sup>2</sup> )	<30
30-300	27.5	0.073	1.0	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

Note: f = frequency in MHz

\* = Plane-wave equivalent power density

### 4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

### 4.3 Test Results

<u>Maximum average output power at antenna input terminal (dBm):</u>	<u>32.51</u>
<u>Maximum average output power at antenna input terminal (mW):</u>	<u>1782.379</u>
<u>Prediction frequency (MHz):</u>	<u>935.0125</u>
<u>Antenna Gain, maximum (dBi):</u>	<u>26.63</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>460.26</u>
<u>Prediction distance (cm):</u>	<u>200</u>
<u>Power density of prediction frequency at 200 cm (mW/cm<sup>2</sup>):</u>	<u>1.63</u>
<u>FCC MPE limit for controlled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>3.117</u>

The average output power was derived from the maximum tune up power (35.52 dBm) and duty cycle (50%).  
The average output power = peak output power – 10\*log(1/duty cycle)=35.52-3.01=32.51 dBm.

Note: Duty Cycle declared by customer

Note: Prediction distance declared by customer

### Results

The device passes the uncontrolled exposure limit of 3.117 mW/cm<sup>2</sup> with the Output Power being 35.52 dBm, 50% duty cycle, prediction distance of 200cm and a maximum antenna gain of 26.63 dBi.

## 5 FCC §2.1046, §90.205(k) & §90.635(b) - RF Output Power

### 5.1 Applicable Standards

According to FCC §90.635(b),

Expand Table

Table—Equivalent Power and Antenna Heights for Base Stations in the 851–869 MHz and 935–940 MHz Bands Which Have a Requirement for a 32 km (20 mi) Service Area Radius

Antenna height (ATT) meters (feet)	Effective radiated power (watts) <sup>1 2 4</sup>
Above 1,372 (4,500)	65
Above 1,220 (4,000) to 1,372 (4,500)	70
Above 1,067 (3,500) to 1,220 (4,000)	75
Above 915 (3,000) to 1,067 (3,500)	100
Above 763 (2,500) to 915 (3,000)	140
Above 610 (2,000) to 763 (2,500)	200
Above 458 (1,500) to 610 (2,000)	350
Above 305 (1,000) to 458 (1,500)	600
Up to 305 (1,000)	<sup>3</sup> 1,000

<sup>1</sup> Power is given in terms of effective radiated power (ERP).


<sup>2</sup> Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.

<sup>3</sup> Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).

### 5.2 Test Procedure

Span > 2 \* OBW  
 RBW > OBW  
 VBW ≥ 3 \* RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold

### 5.3 Test Setup Diagram



#### 5.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2023-06-06	12 months
912	Rohde & Schwarz	Signal Analyzer	FSV40	1321.3008k3 9-101203- UW	2023-06-02	12 months
-	-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	-	30dB Attenuator	-	-	Each time <sup>1</sup>	N/A

*Note<sup>1</sup>: Equipment was calibrated for each test.*

**Statement of Traceability: BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

## 5.5 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	32 %
<b>ATM Pressure:</b>	101.4-102 kPa

The testing was performed by Arturo Reyes on 2023-06-26 in the RF Site.

## 5.6 Test Results

Modulation	Frequency (MHz)	Output Power (dBm)	Output Power (Watts)	ERP (dBm)	ERP Limit (dBm)
QPSK	935.0125	35.51	3.56	59.99	60
	935.125	35.35	3.43	59.83	60
16QAM	935.0125	35.32	3.40	59.8	60
	935.125	35.34	3.42	59.82	60
64QAM	935.0125	35.52	3.56	60	60
	935.125	35.30	3.39	59.78	60

Note: ERP limit of 1000W is equivalent to 60dBm.

Note: ERP (dBm) = Output Power (dBm) + Max allowable antenna gain (dBi) – 2.15dB.


Note: In order to meet ERP limit, the maximum allowable antenna gain must be 26.63dBi.

Please refer to the following plots.




# QPSK

## 935.0125 MHz

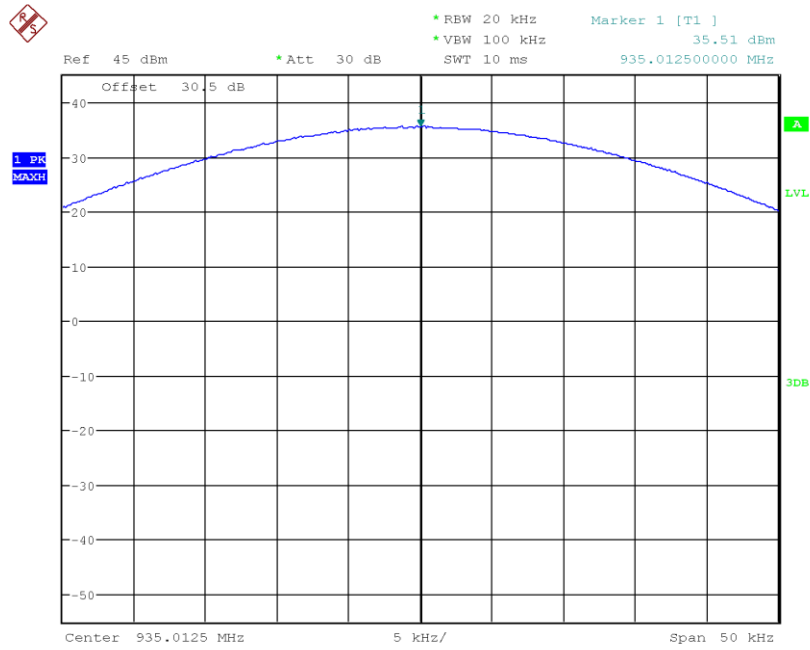


### 935.125 MHz

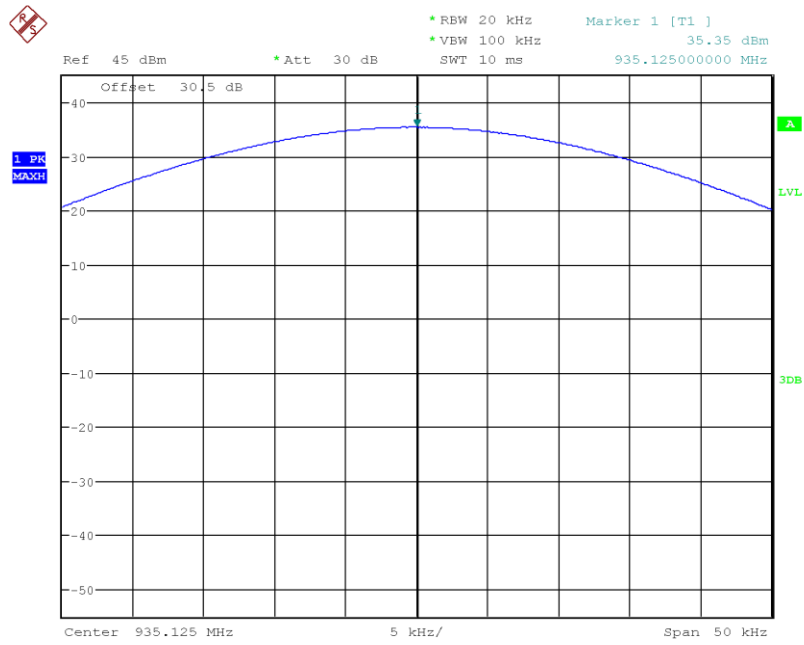


# 16QAM

935.0125 MHz

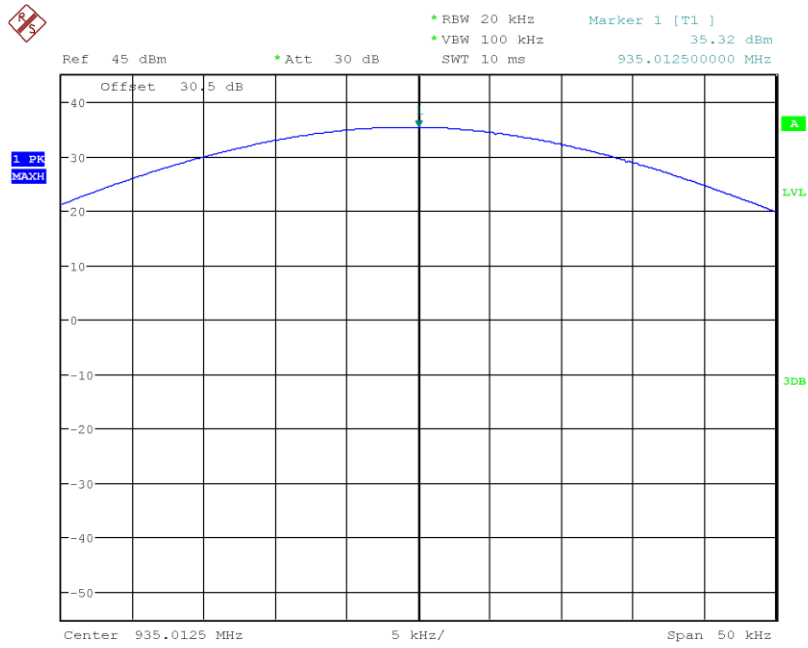


### 935.125 MHz

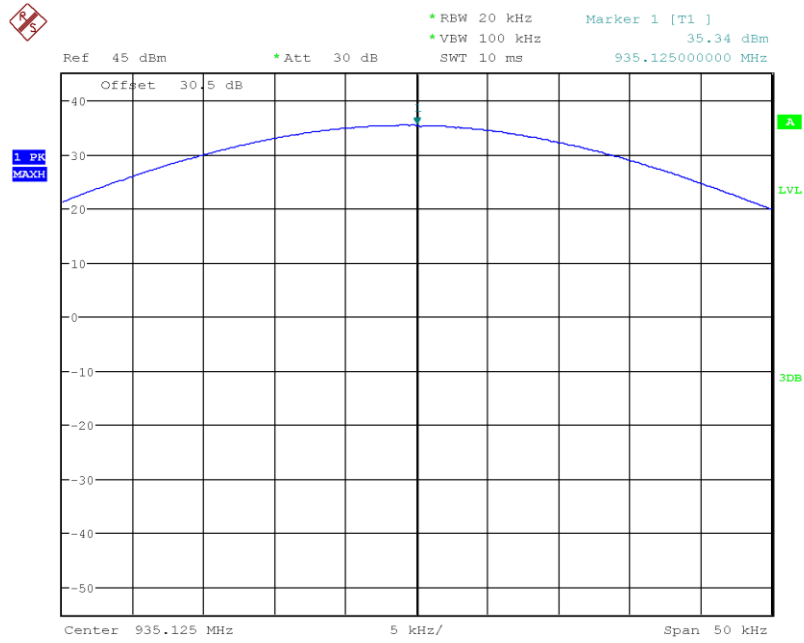


# 64QAM

935.0125 MHz

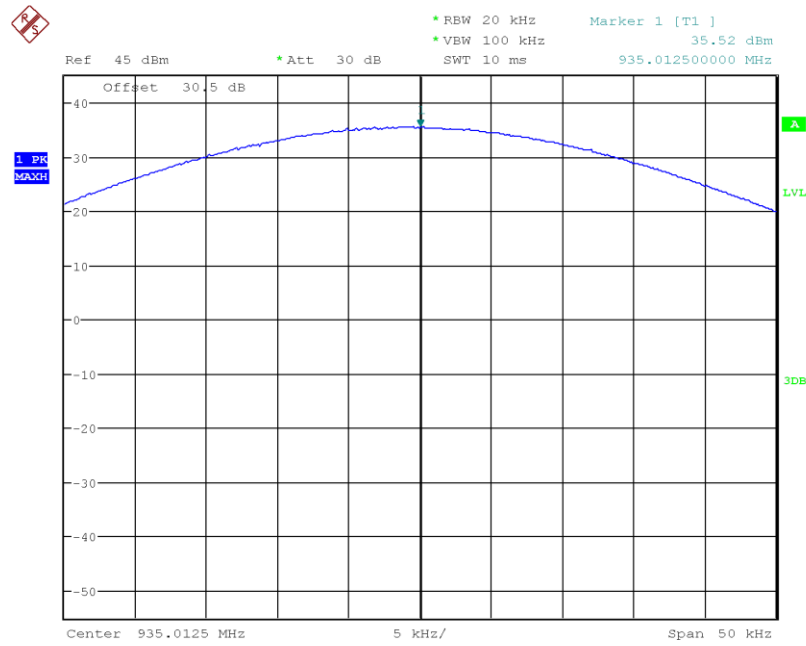

### 935.125 MHz

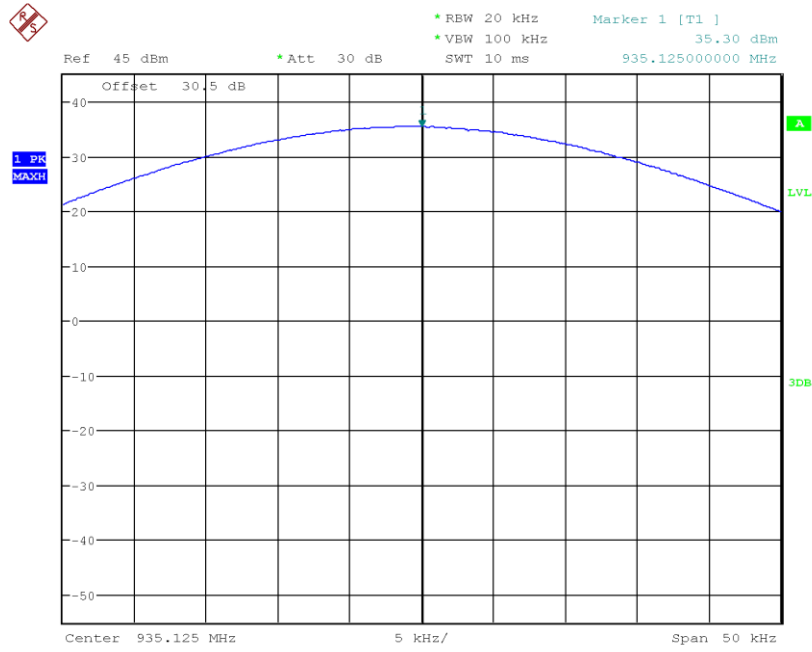

## 6 FCC §2.1049 & §90.209 - Occupied Bandwidth

### 6.1 Applicable Standards

According to FCC §90.209 Table 1, the authorized bandwidth within the frequency band of 896-901/935-940MHz is 13.6 kHz.

### 6.2 Test Procedure

Span = approximately 2 to 5 times the occupied bandwidth, centered on the transmitting channel

RBW = 1% to 5 % of the occupied bandwidth


VBW = 3 \* RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 6.3 Test Setup Diagram



## 6.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2023-06-06	12 months
912	Rohde & Schwarz	Signal Analyzer	FSV40	1321.3008k3 9-101203- UW	2023-06-02	12 months
-	-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	-	30dB Attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: Equipment was calibrated for each test.

**Statement of Traceability:** **BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".



## 6.5 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	32 %
<b>ATM Pressure:</b>	101.4-102 kPa

The testing was performed by Arturo Reyes on 2023-06-26 in the RF Site.


## 6.6 Test Results

<b>Modulation</b>	<b>Frequency (MHz)</b>	<b>99% OBW (kHz)</b>	<b>OBW Limit (kHz)</b>
QPSK	935.0125	9.65	< 13.6
	935.125	9.675	< 13.6
16QAM	935.0125	9.65	< 13.6
	935.125	9.675	< 13.6
64QAM	935.0125	9.65	< 13.6
	935.125	9.675	< 13.6


Please refer to the following plots.

# QPSK

## 935.0125 MHz

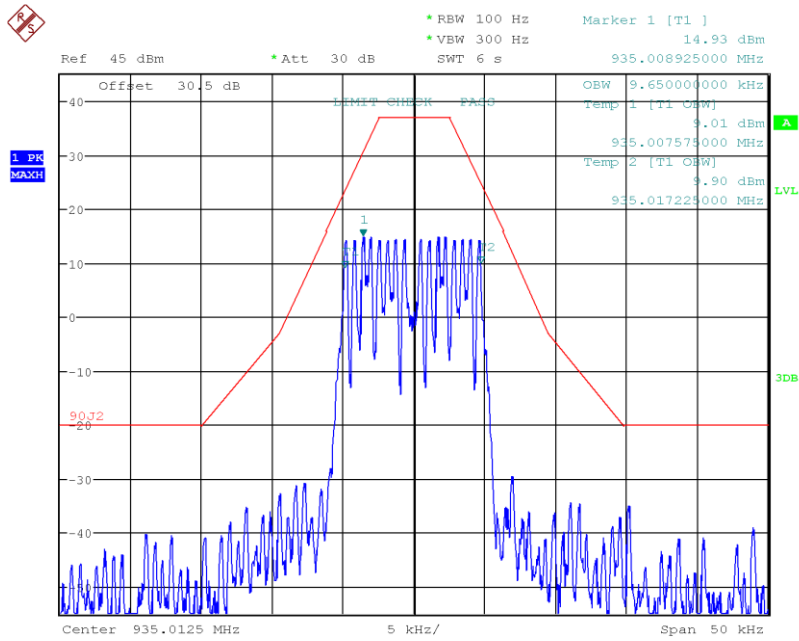


### 935.125 MHz

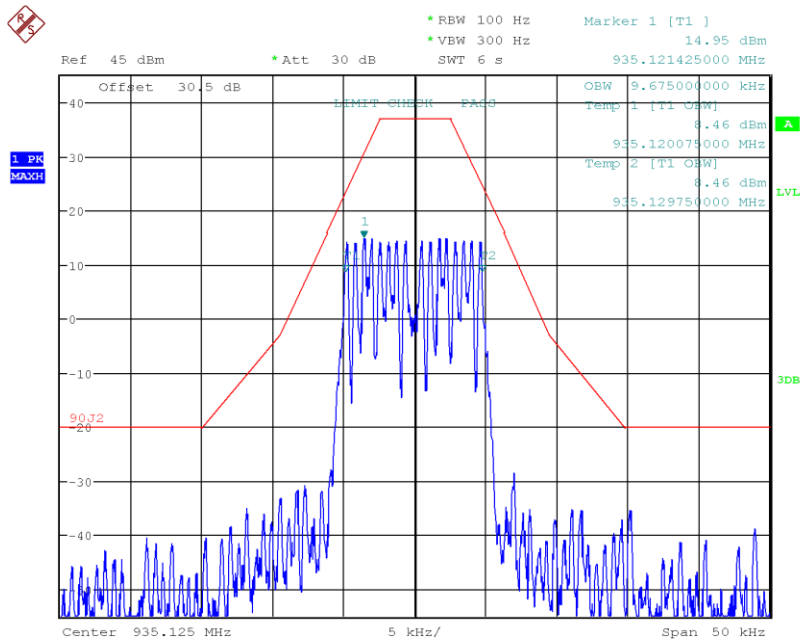


# 16QAM

## 935.0125 MHz

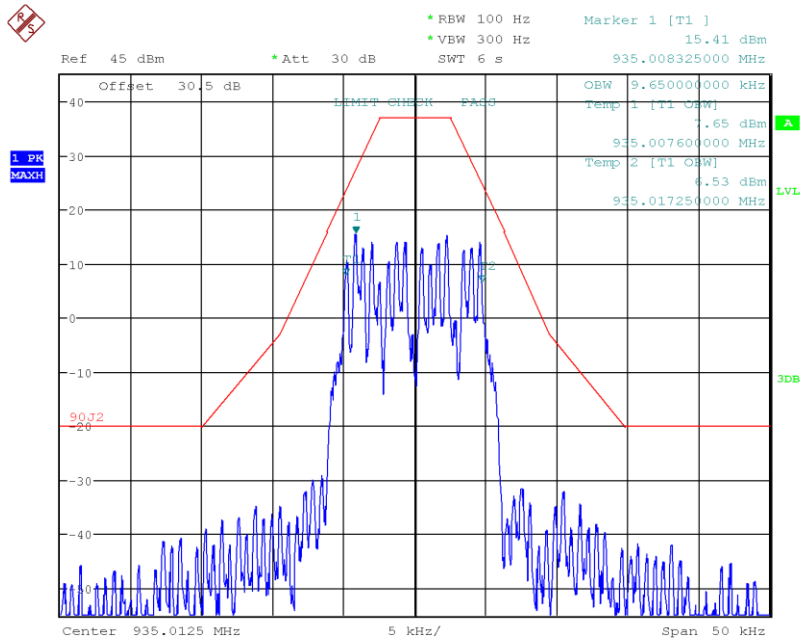


### 935.125 MHz

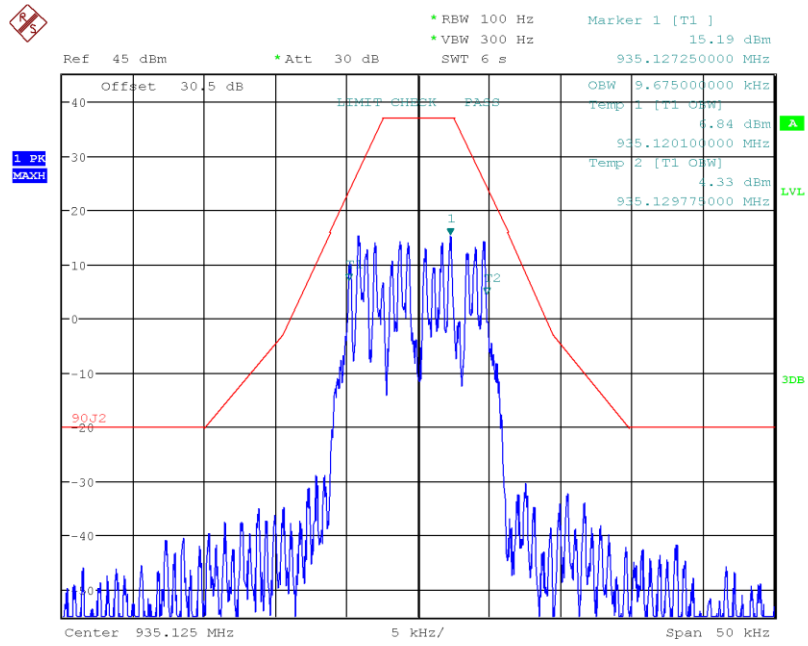


# 64QAM

## 935.0125 MHz

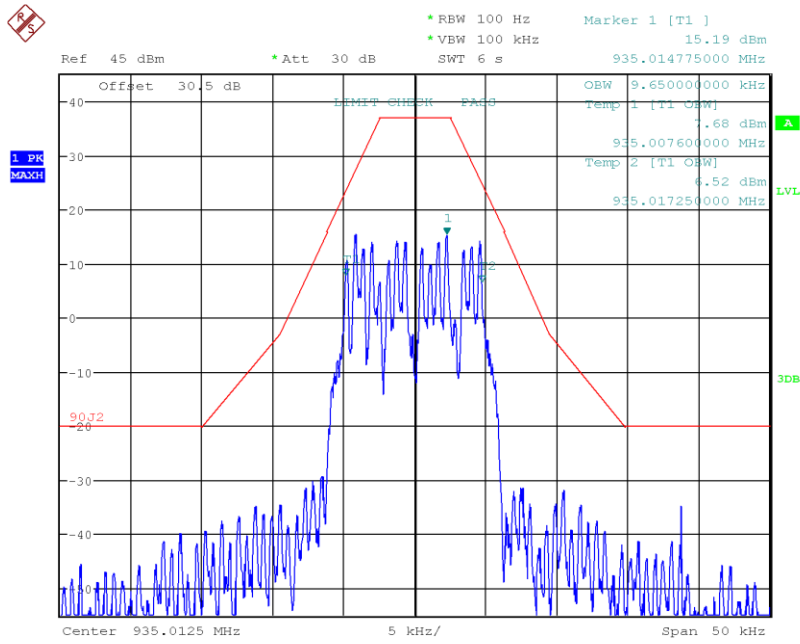

### 935.125 MHz

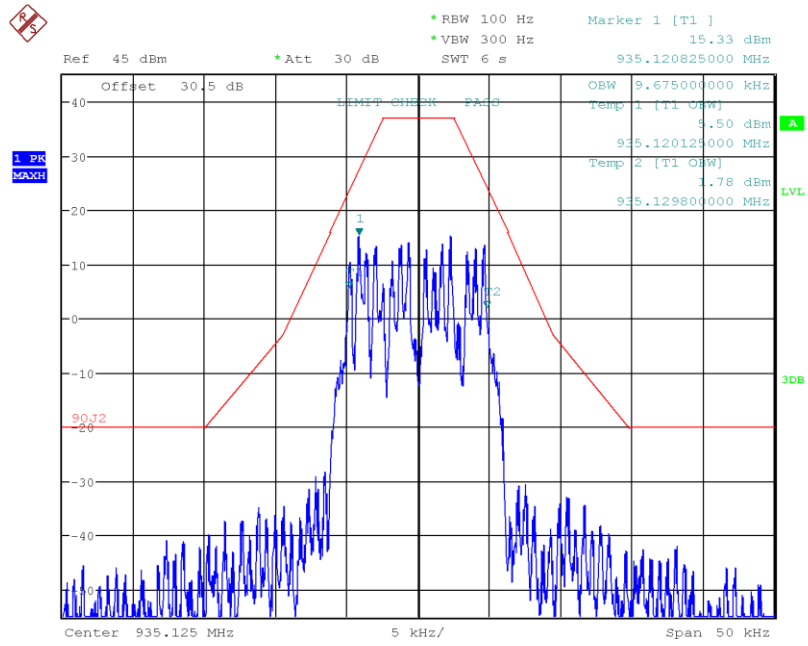

## 7 FCC §2.1051 & §90.210 - Spurious Emissions at Antenna Terminals

### 7.1 Applicable Standards

According to FCC §90.210

TABLE 1 TO §90.210—APPLICABLE EMISSION MASKS

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 <sup>1</sup>	A or B	A or C
25-50	B	C
72-76	B	C
150-174 <sup>2</sup>	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 <sup>2 5</sup>	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 <sup>6</sup>	B	H
809-824/854-869 <sup>3 5</sup>	B, D	D, G.
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 <sup>4</sup>		
All other bands	B	C

(j) *Emission Mask J.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 2.5 kHz, but no more than 6.25 kHz: At least  $53 \log(f_d/2.5)$  dB;

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 6.25 kHz, but no more than 9.5 kHz: At least  $103 \log(f_d/3.9)$  dB;

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 9.5 kHz: At least  $157 \log(f_d/5.3)$  dB, or  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.

### 7.2 Test Procedure

Conducted spurious emissions:

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for measurements up to 1 GHz and set to 1 MHz for measurements up to the 10<sup>th</sup> harmonic.


Band-edge emissions:

According to ANSI C63.26-2015 section 5.7 Unwanted (out-of-band and spurious) conducted emissions measurement procedures (conducted test at antenna port):

A RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW).



### 7.3 Test Setup Diagram



### 7.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
655	Rohde & Schwarz	Signal Analyzer	FSQ26	200749	2023-06-06	12 months
912	Rohde & Schwarz	Signal Analyzer	FSV40	1321.3008k3 9-101203- UW	2023-06-02	12 months
-	-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	-	30dB Attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: Equipment was calibrated for each test.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

### 7.5 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	32 %
<b>ATM Pressure:</b>	101.4-102 kPa

The testing was performed by Arturo Reyes on 2023-06-26 in the RF Site.


### 7.6 Test Results

Please refer to the following plots.


#### Emission Mask J:

**QPSK**

**935.0125 MHz**

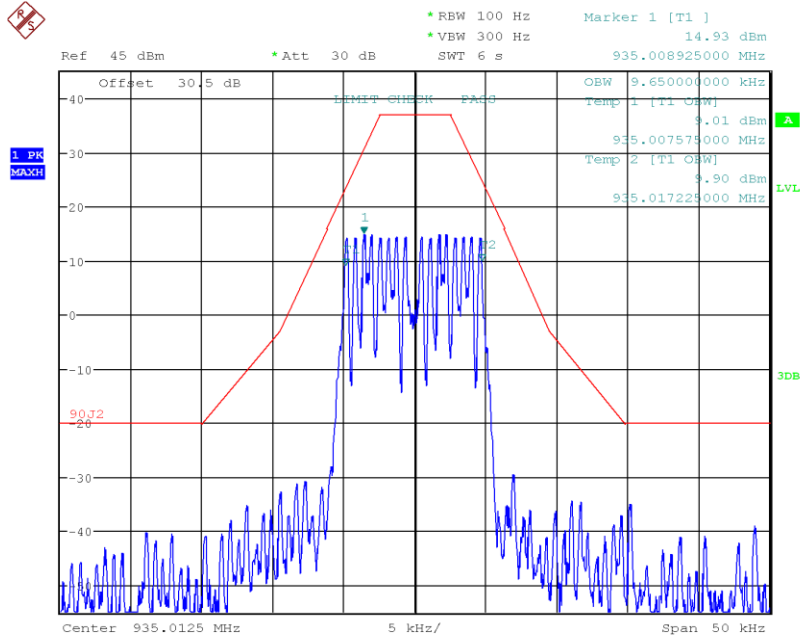


### 935.125 MHz

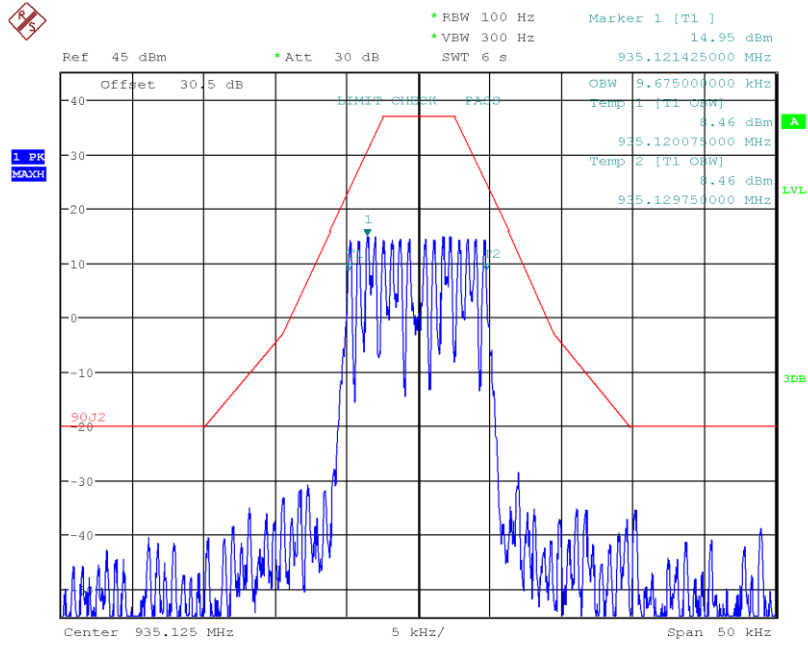




### 935.125 MHz

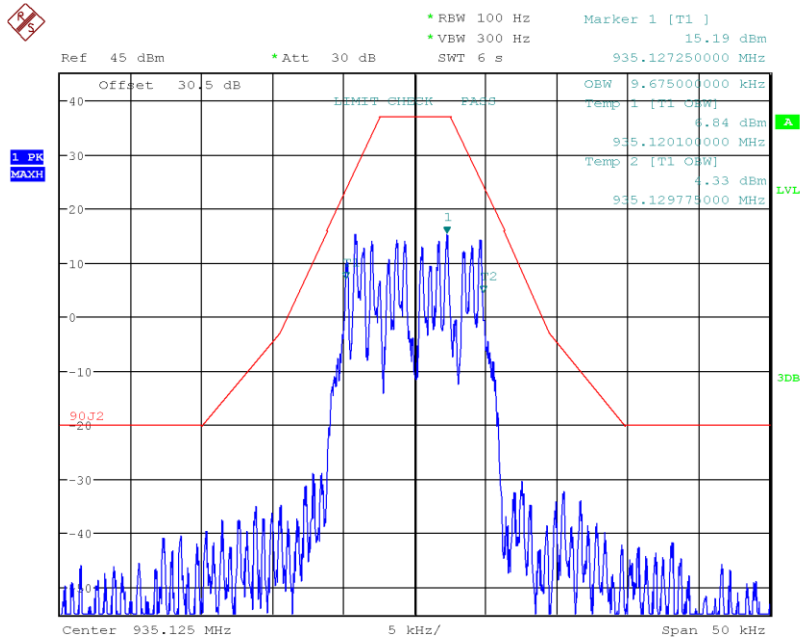


# 64QAM

## 935.0125 MHz

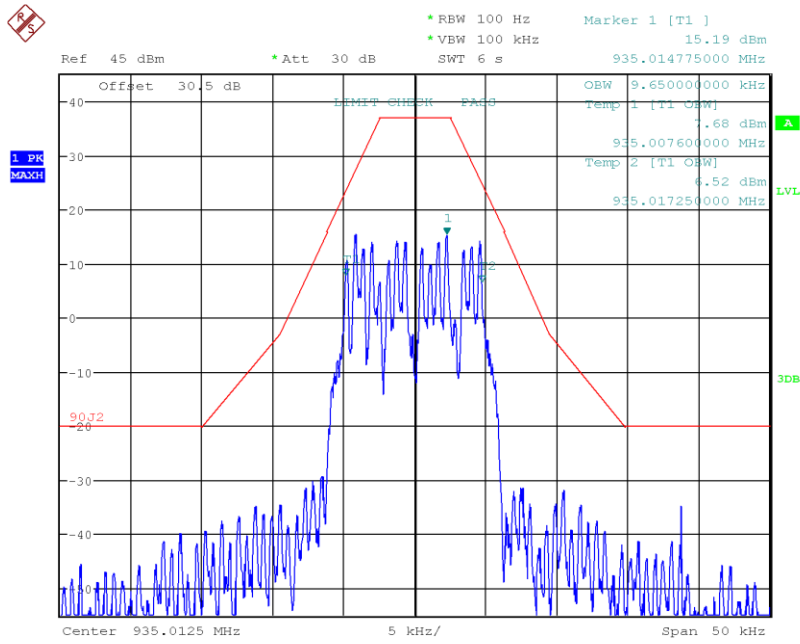


### 935.125 MHz

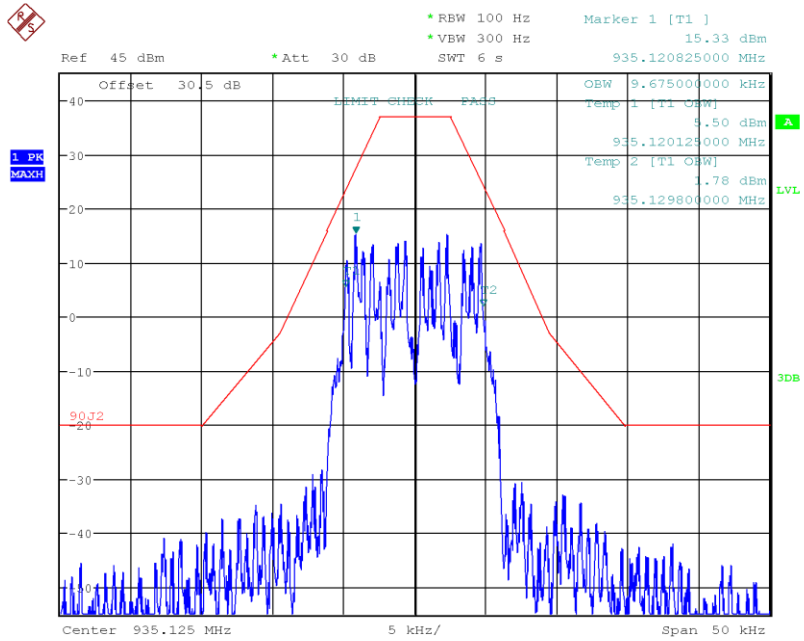


### Conducted Spurious Emissions: 935.0125 MHz Carrier Wave Transmitting

#### 30 MHz – 1 GHz

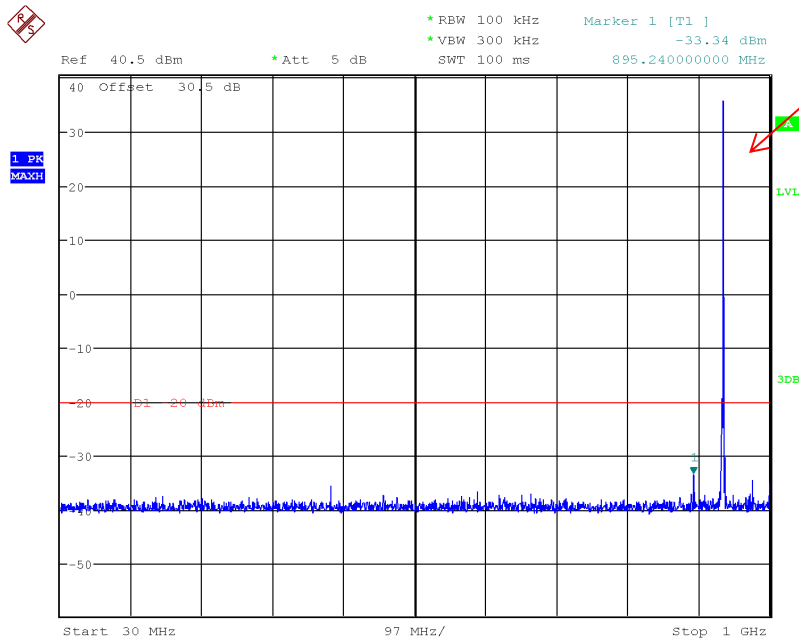

#### 1 – 10 GHz

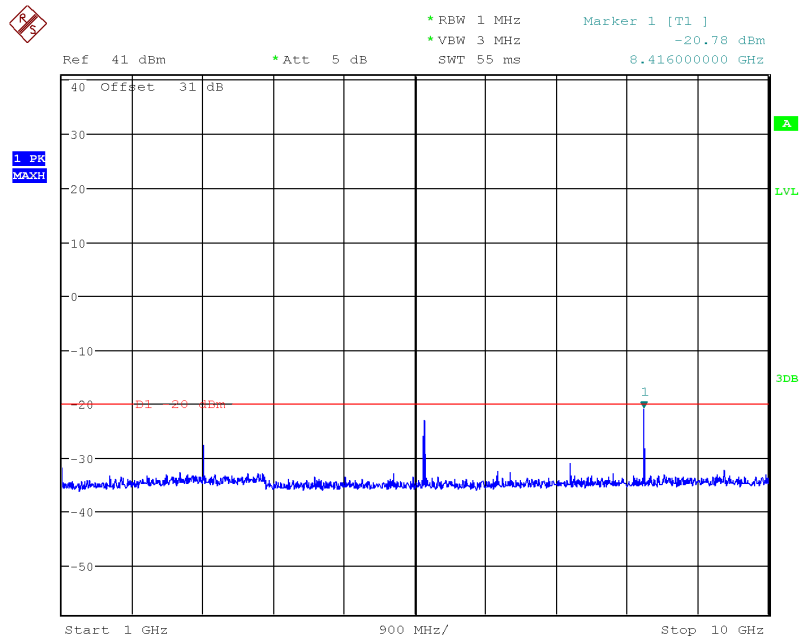

Note: Carrier Wave on all channels have been verified to be stronger than any individual modulated channel that would be evaluated for spurious emissions, thus reflecting worst-case compliance.



## 8 FCC §2.1051 & §90.210 – Radiated Spurious Emissions

### 8.1 Applicable Standards

According to FCC §90.210

TABLE 1 TO §90.210—APPLICABLE EMISSION MASKS

Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
Below 25 <sup>1</sup>	A or B	A or C
25-50	B	C
72-76	B	C
150-174 <sup>2</sup>	B, D, or E	C, D or E
150 paging only	B	C
220-222	F	F
421-512 <sup>2 5</sup>	B, D, or E	C, D, or E
450 paging only	B	G
806-809/851-854 <sup>6</sup>	B	H
809-824/854-869 <sup>3 5</sup>	B, D	D, G.
896-901/935-940	I	J
902-928	K	K
929-930	B	G
4940-4990 MHz	L or M	L or M
5850-5925 <sup>4</sup>		
All other bands	B	C

(j) *Emission Mask J.* For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 2.5 kHz, but no more than 6.25 kHz: At least  $53 \log(f_d/2.5)$  dB;

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 6.25 kHz, but no more than 9.5 kHz: At least  $103 \log(f_d/3.9)$  dB;


(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 9.5 kHz: At least  $157 \log(f_d/5.3)$  dB, or  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.

### 8.2 Test Procedure


Refer to ANSI C63.26-2015 Section 5.5

### 8.3 Test Setup Diagram

Below 1 GHz:

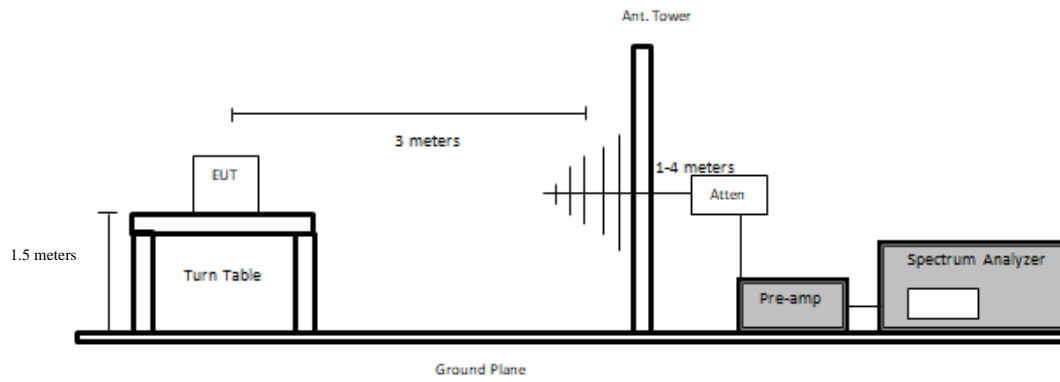

Above 1 GHz at 3m:

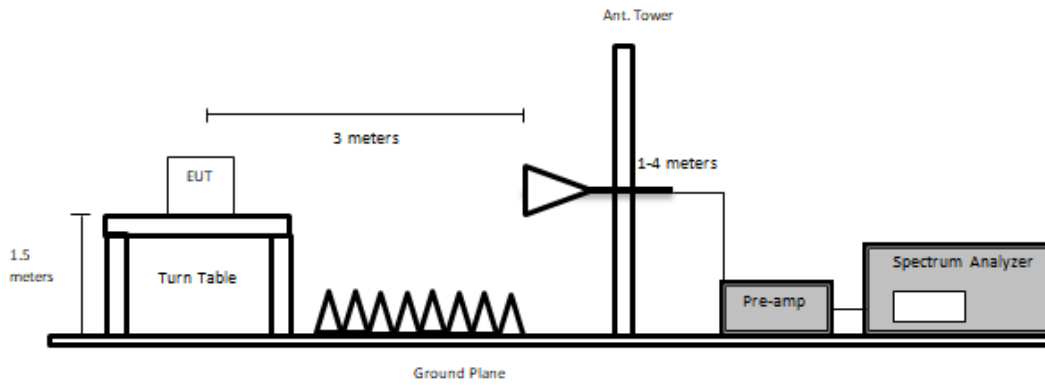

## 8.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Interval
424	Agilent	Spectrum Analyzer	E4440A	US45303156	2022-12-19	12 months
327	Sunol Sciences	System Controller	SC110V	122303-1	N/A	N/A
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2; 1504	2021-11-22	2 years
568	COM-POWER	Dipole Antenna	AD-100	721033DB1, 721033DB2, 721033DB3, 721032DB4	2023-07-11	2 years
1130	Aglient	MXG Signal Generator	N5183A	MY5014045 3	2022-09-20	1 year
188	Sunol Sciences	Horn Antenna	DRH-118	A052704	2021-10-07	2 years
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
316	Sonoma Instruments	Pre Amplifier	317	260406	2023-04-12	6 months
658	HP/ Agilant	Pre Amplifier	8449B OPT HO2	3008A01103	2023-06-13	1 year
1186	Pasternack	Coaxial Cable, RG214	PE3062- 1050CM	N/A	2023-04-14	6 months
1247	Uti flex	Micro - Coax	N/A	N/A	2023-12-13	1 year
1248	Pasternack	RG214 COAX Cable	PE3062	N/A	2023-04-14	6 months
1249	Time Microwave	LMR-400 Cable	AE13684	2k80612-5 6fts	2023-04-14	6 months
1295	Carlisle	10m Ultra Low Loss Coaxial Cable	UFB142A- 1-3937- 200200	6463989091 2-001	2023-05-04	6 months
1354	RFMW	2.92mm 10ft RF Cable	PICA- 29M29M- F150-120	N/A	2023-02-24	1 year
1245	-	6dB Attenuator	PE7390-6	01182018A	2021-11-22	2 years
1246	HP	RF Limiter	11867A	01734	2023-04-13	1 year

Note<sup>1</sup>: Equipment was calibrated for each test.

**Statement of Traceability:** *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

## 8.5 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	32 %
<b>ATM Pressure:</b>	101.4-102 kPa

The testing was performed by Arturo Reyes on 2023-07-11 in the RF Site.

## 8.6 Test Results

CW, tested (935.0125 MHz)

Indicated		Azimuth (degree)	Test Antenna		Substituted					Limit (dBm)	Margin (dB)
Frequency (MHz)	S.A. Amp. (dBuV)		Height (cm)	Polarity (H/V)	Frequency (MHz)	Level (dBm)	Ant. Gain Correction (dBd/dBi)	Cable Loss (dB)	Absolute Level (dBm)		
400	62.82	222	104	H	400	-50.62	1.6	0.94	-49.96	-20	-29.96
400	57.26	222	221	V	400	-54.44	1.6	0.94	-53.78	-20	-33.78
1792.1375	73.43	176	180	H	1792.1375	-34.07	8.279	1.4895	-27.2805	-20	-7.2805
1792.1375	74.82	360	165	V	1792.1375	-32.81	8.279	1.4895	-26.0205	-20	-6.0205

## 9 FCC §2.1055 & §90.213 - Frequency Tolerance

### 9.1 Applicable Standard

According to FCC Part 90.213,

**§90.213 Frequency stability.**

(a) Unless noted elsewhere, transmitters used in the services governed by this part must have a minimum frequency stability as specified in the following table.

TABLE 1 TO §90.213(a)—MINIMUM FREQUENCY STABILITY

[Parts per million (ppm)]

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	1 <sup>2</sup> 3 <sup>1</sup> 100	100	200
25-50	20	20	50
72-76	5		50
150-174	5 <sup>11</sup> 5	6 <sup>5</sup>	4 <sup>6</sup> 50
216-220	1.0		1.0
220-222 <sup>12</sup>	0.1	1.5	1.5
421-512	7 <sup>11</sup> 14 <sup>2</sup> 2.5	8 <sup>5</sup>	8 <sup>5</sup>
806-809	14 <sup>1</sup> 1.0	1.5	1.5
809-824	14 <sup>1</sup> 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	14 <sup>0</sup> 0.1	1.5	1.5
902-928	2.5	2.5	2.5
902-928 <sup>13</sup>	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	9 <sup>3</sup> 300	300	300
Above 2450 <sup>10</sup>			

### 9.2 Test Procedure

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From -30° to + 50° centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(2) From -20° to + 50° centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

(3) From 0° to + 50° centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the

components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(c) In addition to all other requirements of this section, the following information is required for equipment incorporating heater type crystal oscillators to be used in mobile stations, for which type acceptance is first requested after March 25, 1974, except for battery powered, hand carried, portable equipment having less than 3 watts mean output power.

(1) Measurement data showing variation in transmitter output frequency from a cold start and the elapsed time necessary for the frequency to stabilize within the applicable tolerance. Tests shall be made after temperature stabilization at each of the ambient temperature levels; the lower temperature limit, 0° centigrade and + 30° centigrade with no primary power applied.

(2) Beginning at each temperature level specified in paragraph (c)(1) of this section, the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level.

(3) The elapsed time necessary for the frequency to stabilize within the applicable tolerance from each beginning ambient temperature level as determined from the tests specified in this paragraph shall be specified in the instruction book for the transmitter furnished to the user.

(4) When it is impracticable to subject the complete transmitter to this test because of its physical dimensions or power rating, only its frequency determining and stabilizing portions need be tested.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c), and (d) of this section. (For example measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

### 9.3 Test Equipment List and Details

BACL No.	Manufacturers	Descriptions	Models	Serial Numbers	Calibration Dates	Calibration Interval
287	Agilent	Spectrum Analyzer	E4446A	US44300386	2021-04-27	1 year
-	-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	-	30dB Attenuator	-	-	Each time <sup>1</sup>	N/A
274	Espec	Chamber, Humidity	ESL-4CA	18010	2021-09-23	1 year

Note<sup>1</sup>: Equipment was calibrated for each test.

**Statement of Traceability: BACL Corp.** attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

### 9.4 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	32 %
<b>ATM Pressure:</b>	101.4-102 kPa

The testing was performed by Christian McCaig from 2021-11-03 to 2022-01-28 in the RF Site.

## 9.5 Test Results

Note: Testing done using CW mode

### 935.0625 MHz:

Temperature (°C)/Voltage Conditions	Reference Frequency (MHz)	Tested Frequency (MHz)	Frequency Deviation (ppm)	Limit (ppm)	Result
-30/normal voltage (24V)	935.0625	935.062027	-0.08	±0.1	pass
-20/normal voltage (24V)	935.0625	935.062052	-0.07	±0.1	pass
-10/normal voltage (24V)	935.0625	935.062198	-0.06	±0.1	pass
0/normal voltage (24V)	935.0625	935.062327	-0.06	±0.1	pass
10/normal voltage (24V)	935.0625	935.062365	-0.06	±0.1	pass
20/normal voltage (24V)	935.0625	935.062365	-0.06	±0.1	pass
30/normal voltage (24V)	935.0625	935.062272	-0.05	±0.1	pass
40/normal voltage (24V)	935.0625	935.062218	-0.05	±0.1	pass
50/normal voltage (24V)	935.0625	935.062260	-0.05	±0.1	pass
20/Low Voltage (20.4V)	935.0625	935.062240	-0.06	±0.1	pass
20/High Voltage (27.6V)	935.0625	935.062218	-0.06	±0.1	pass



---

## **10 Annex A (Normative) - EUT Setup Photographs**

---

Please refer to the attachment.

---

## **11 Annex B (Normative) - EUT External Photographs**

---

Please refer to the attachment.

---

## **12 Annex C (Normative) - EUT Internal Photographs**

---

Please refer to the attachment.

# 13 Annex D (Normative) - A2LA Electrical Testing Certificate



## Accredited Laboratory

A2LA has accredited

### BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets A2LA R222 - Specific Requirements EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 21<sup>st</sup> day of December 2022.



Mr. Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---