

APPLICATION CERTIFICATION FCC Part 15C

On Behalf of
Imagination Technologies Ltd / Pure

PURE Contour
Model No.: VL-61394

FCC ID: X280062

Prepared for : Imagination Technologies Ltd / Pure
Address : Home Park Estate, Kings Langley, Hertfordshire, WD4
8LZ, United Kingdom

Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20110148
Date of Test : February 14-22, 2011
Date of Report : February 28, 2011

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 6DB BANDWIDTH MEASUREMENT	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. MAXIMUM PEAK OUTPUT POWER	18
6.1. Block Diagram of Test Setup.....	18
6.2. The Requirement For Section 15.247(b)(3).....	18
6.3. EUT Configuration on Measurement	18
6.4. Operating Condition of EUT	18
6.5. Test Procedure	19
6.6. Test Result	19
7. POWER SPECTRAL DENSITY MEASUREMENT.....	26
7.1. Block Diagram of Test Setup.....	26
7.2. The Requirement for Section 15.247(e)	26
7.3. EUT Configuration on Measurement	26
7.4. Operating Condition of EUT	26
7.5. Test Procedure	27
7.6. Test Result	27
8. BAND EDGE COMPLIANCE TEST	34
8.1. Block Diagram of Test Setup.....	34
8.2. The Requirement for Section 15.247(d)	34
8.3. EUT Configuration on Measurement	34
8.4. Operating Condition of EUT	35
8.5. Test Procedure	35
8.6. Test Result	36
9. RADIATED SPURIOUS EMISSION TEST	53
9.1. Block Diagram of Test Setup.....	53
9.2. The Limit for Section 15.247(d).....	54
9.3. Restricted bands of operation	54
9.4. Configuration of EUT on Measurement	55
9.5. Operating Condition of EUT	55

9.6.	Test Procedure	55
9.7.	The Field Strength of Radiation Emission Measurement Results	56
10.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	98
10.1.	Block Diagram of Test Setup.....	98
10.2.	The Emission Limit	98
10.3.	Configuration of EUT on Measurement	99
10.4.	Operating Condition of EUT	99
10.5.	Test Procedure	99
10.6.	Power Line Conducted Emission Measurement Results	100
11.	ANTENNA REQUIREMENT.....	103
11.1.	The Requirement	103
11.2.	Antenna Construction	103

Test Report Certification

Applicant : Imagination Technologies Ltd / Pure
Manufacturer : Zhao Yang Elec. (Shenzhen) Co., Ltd.
EUT Description : PURE Contour
(A) MODEL NO.: VL-61394
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 20V (Adaptor input)

Measurement Procedure Used:


FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO., LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO., LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO., LTD.

Date of Test : February 14-22, 2011

Prepared by :



(Joe Cao, Engineer)

Approved & Authorized Signer :



(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	PURE Contour
Model Number	:	VL-61394
Frequency Band	:	2412-2462MHz
Number of Channels	:	11
Antenna Gain	:	0dBi
Rating	:	DC 20V (Adaptor input)
Adaptor	:	Model No.: KSAS0452000225HU Input: AC 100-240V, 50/60Hz, 1.2A Output: DC 20V, 2.25A Output line: Non-shielded, Non-detachable, with two ferrite cores
Data Rate	:	IEEE 802.11b: 11/5.5/2/1Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6Mbps
Applicant	:	Imagination Technologies Ltd / Pure
Address	:	Home Park Estate, Kings Langley, Hertfordshire, WD4 8LZ, United Kingdom
Manufacturer	:	Zhao Yang Elec. (Shenzhen) Co., Ltd.
Address	:	Building 2,3,5 of Tech. Park at the junction of 7 th Xin'an Rd. & Baoyuan Rd., Mabu Community, Xixiang Street Bao'an District, Shenzhen, P.R. China
Date of sample received	:	January 27, 2011
Date of Test	:	February 14-22, 2011

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 15, 2012
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 15, 2012
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 15, 2012
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 15, 2012
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2012
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2012
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2012
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2012
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 15, 2012
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 15, 2012

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: **802.11b Transmitting mode**

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

802.11g Transmitting mode

Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

3.2.Configuration and peripherals

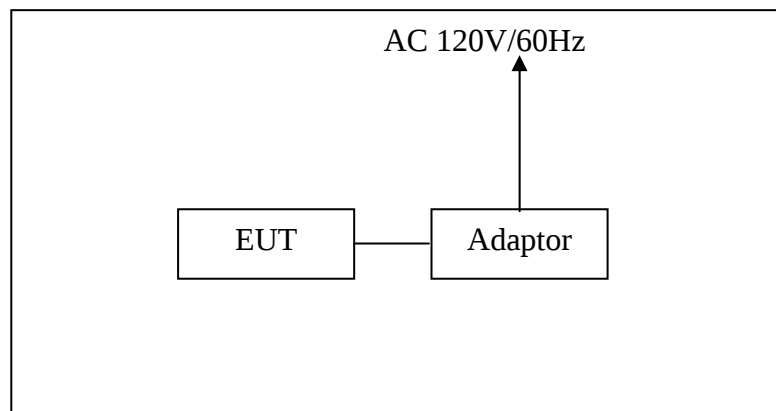


Figure 1 Setup: Transmitting mode

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 6DB BANDWIDTH MEASUREMENT

5.1. Block Diagram of Test Setup



(EUT: PURE Contour)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3. EUT Configuration on Measurement

The following equipments are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. PURE Contour (EUT)

Model Number	: VL-61394
Serial Number	: N/A
Manufacturer	: Zhao Yang Elec. (Shenzhen) Co., Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

5.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.6. Test Result

PASS.

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

The test was performed with 802.11b, the data was shown the worst case 802.11b 1Mbps


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	12.04	> 0.5
Middle	2437	12.00	> 0.5
High	2462	12.00	> 0.5

The test was performed with 802.11g, the data was shown the worst case 802.11g 6Mbps

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
Low	2412	16.72	> 0.5
Middle	2437	16.64	> 0.5
High	2462	16.72	> 0.5

The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

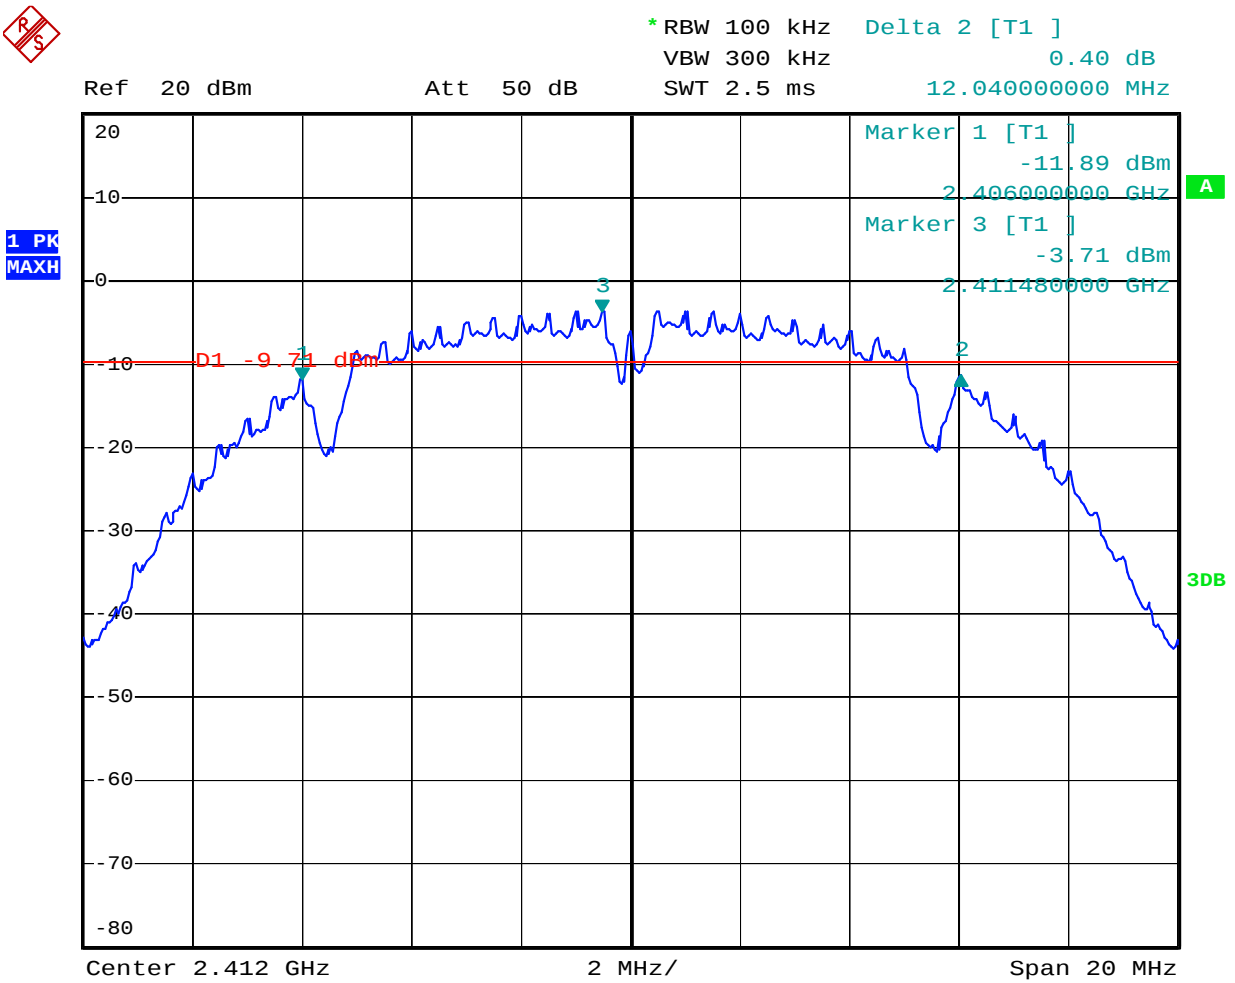

Date: 18.FEB.2011 19:25:40

802.11b Channel Middle 2437MHz




* RBW 100 kHz Delta 2 [T1]
 VBW 300 kHz 0.81 dB
 SWT 2.5 ms 12.000000000 MHz

Ref 20 dBm

Att 50 dB

1 PK
 MAXH

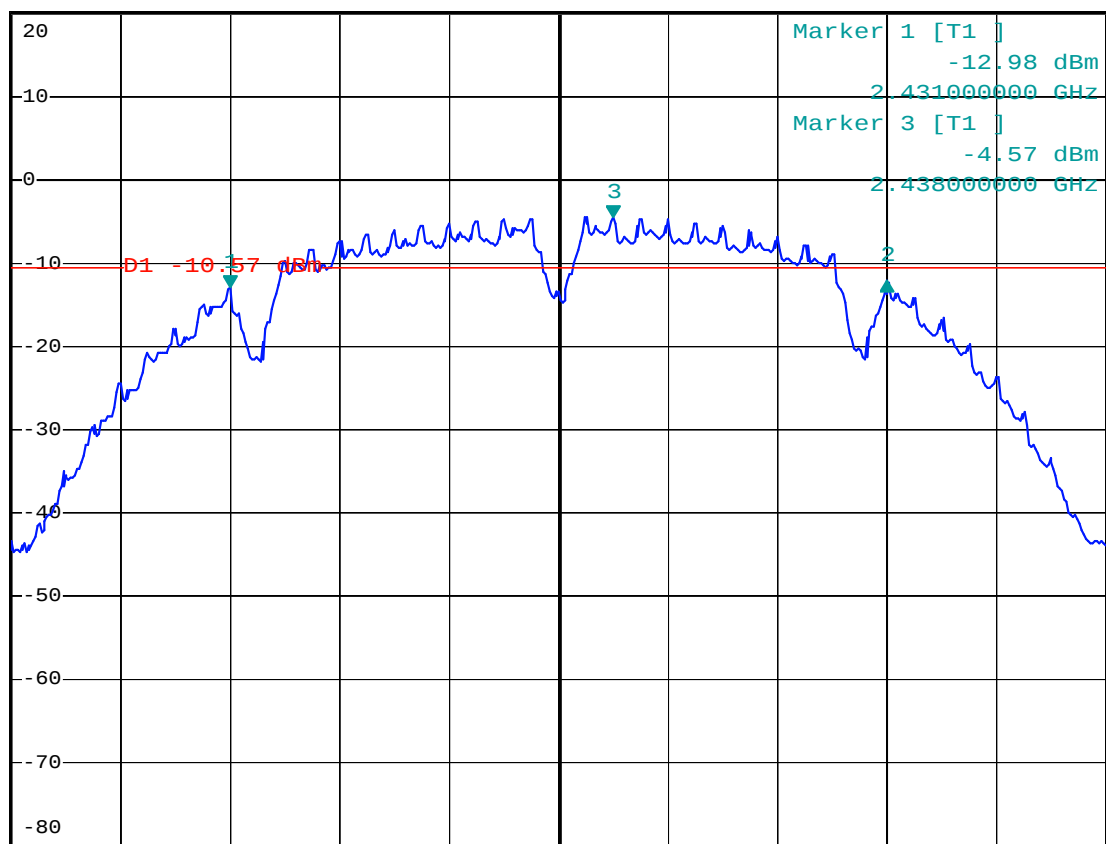


Center 2.437 GHz

2 MHz/

Span 20 MHz

Date: 18.FEB.2011 19:28:37

802.11b Channel High 2462MHz

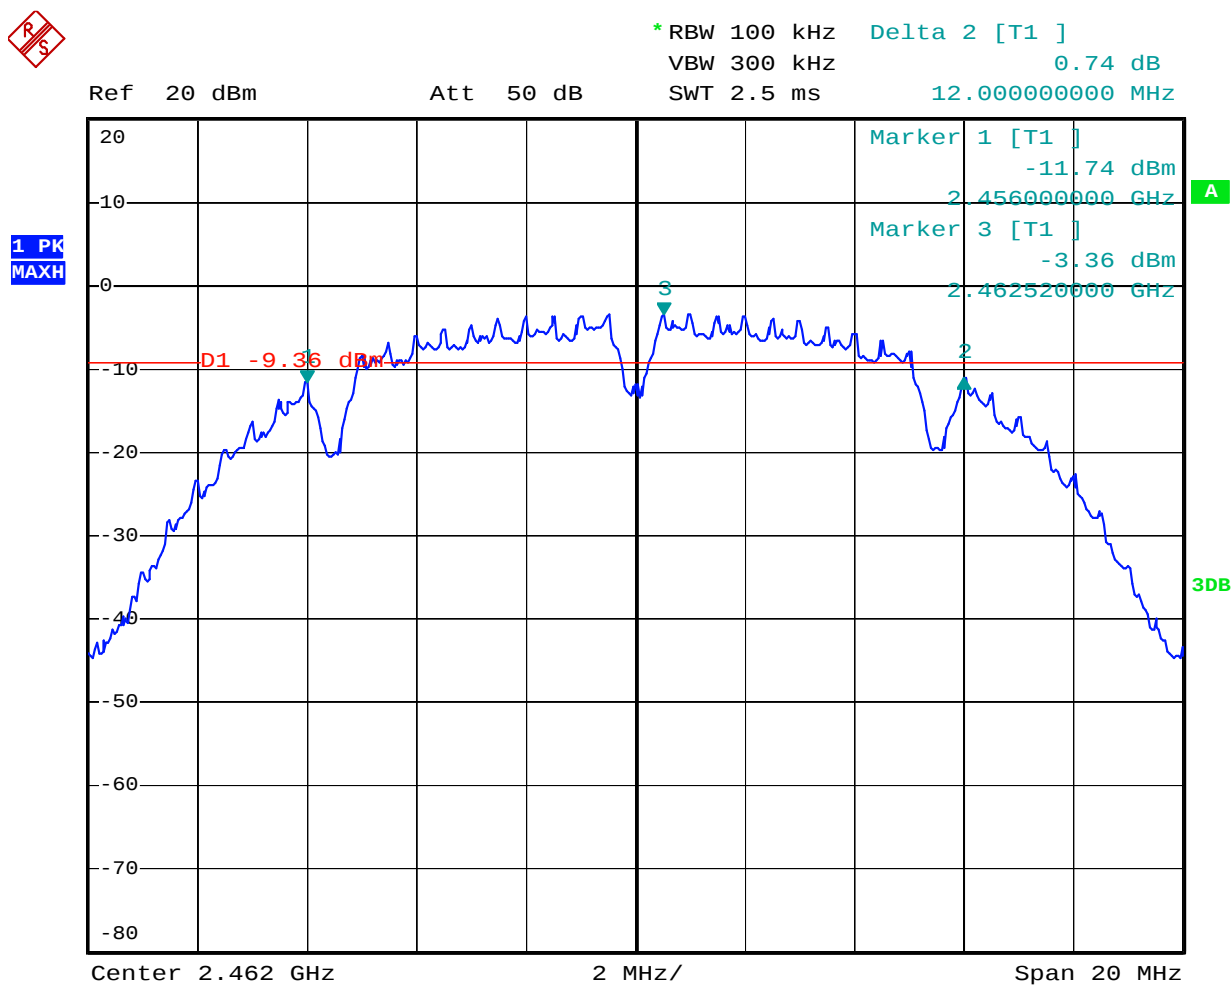

Date: 18.FEB.2011 19:30:15

802.11g Channel Low 2412MHz




* RBW 100 kHz Delta 2 [T1]
 VBW 300 kHz 1.43 dB
 SWT 2.5 ms 16.720000000 MHz

Ref 20 dBm


Att 50 dB

1 PK
 MAXH

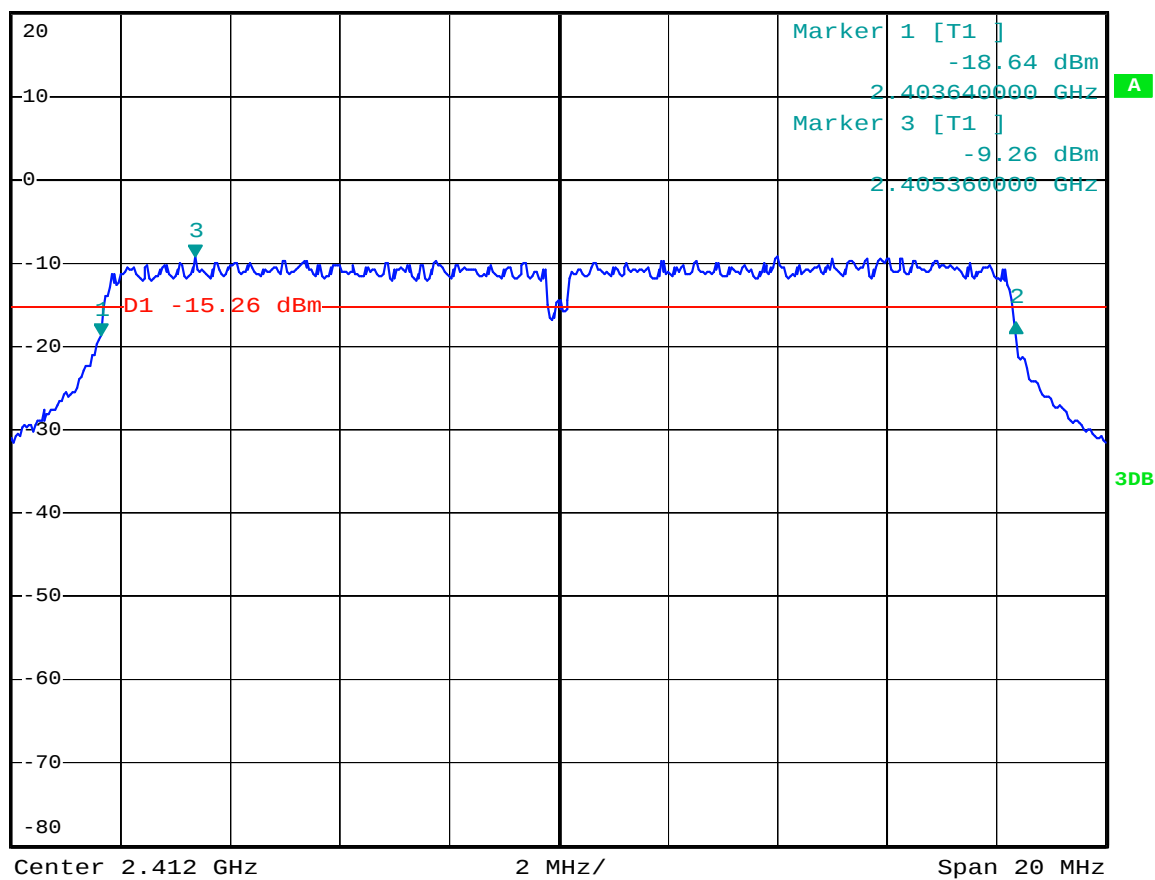


Date: 18.FEB.2011 19:33:35

802.11g Channel Middle 2437MHz

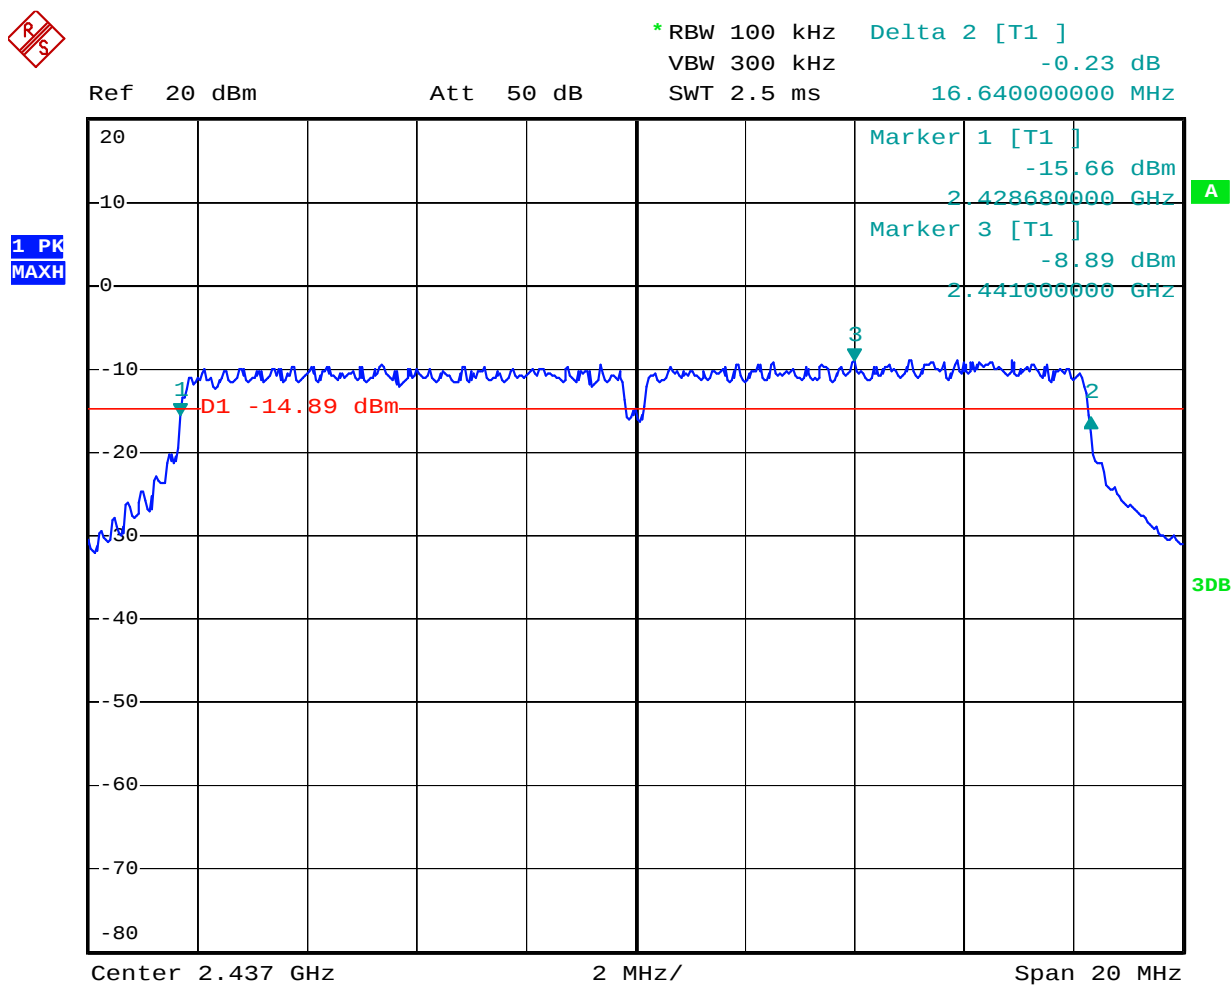

Date: 18.FEB.2011 19:35:28

802.11g Channel High 2462MHz

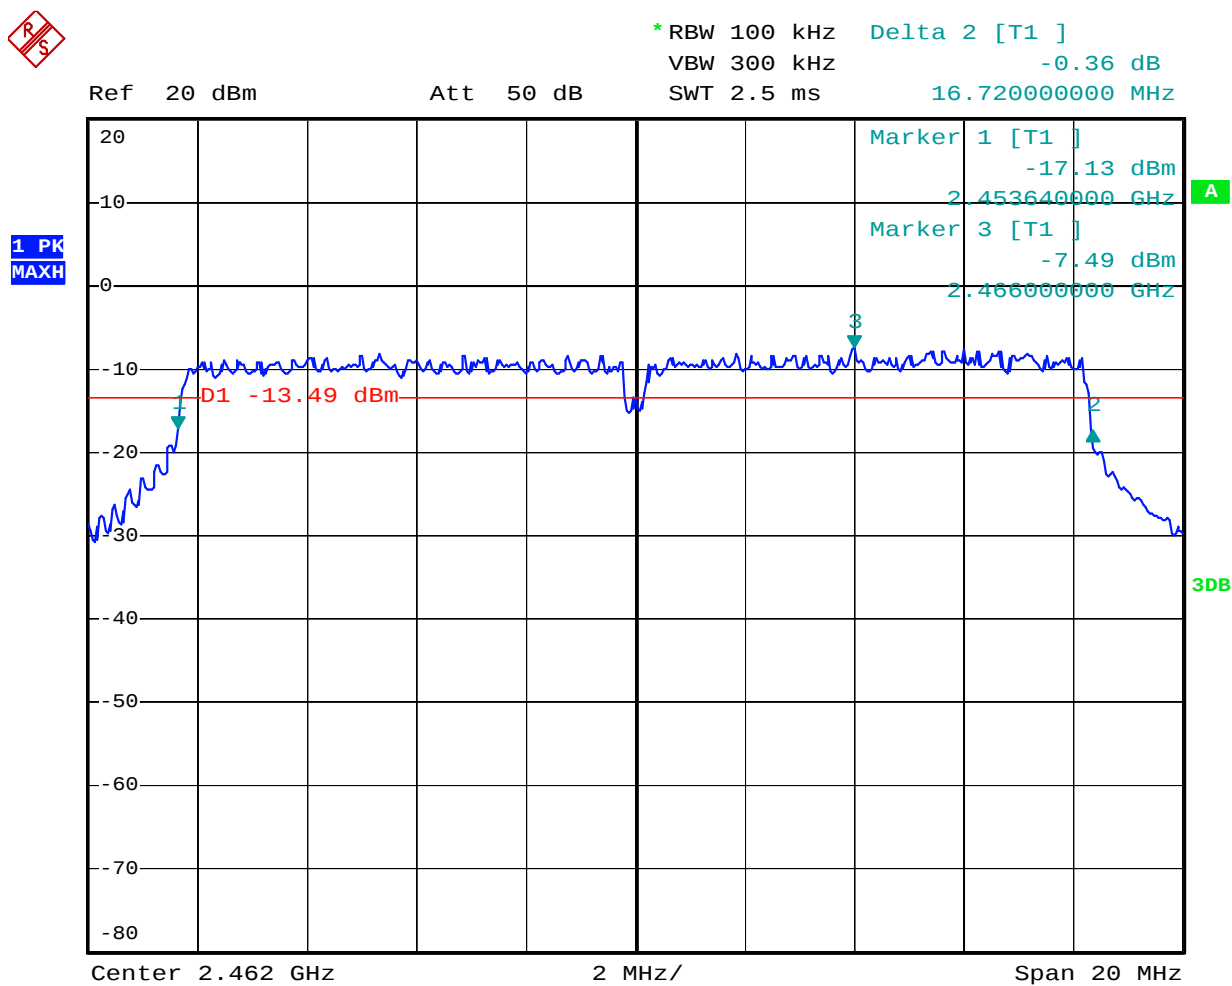

Date: 18.FEB.2011 19:37:12

6. MAXIMUM PEAK OUTPUT POWER

6.1. Block Diagram of Test Setup



(EUT: PURE Contour)

6.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

6.3. EUT Configuration on Measurement

The following equipments are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. PURE Contour (EUT)

Model Number : VL-61394
 Serial Number : N/A
 Manufacturer : Zhao Yang Elec. (Shenzhen) Co., Ltd.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

6.5.3. Measure the maximum peak output power.

6.6. Test Result

PASS.


Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

The test was performed with 802.11b, the data was shown the worst case 802.11b 1Mbps				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	10.40	10.96	30 dBm / 1 W
Middle	2437	8.97	7.89	30 dBm / 1 W
High	2462	9.22	8.36	30 dBm / 1 W

The test was performed with 802.11g, the data was shown the worst case 802.11g 6Mbps				
Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2412	13.54	22.59	30 dBm / 1 W
Middle	2437	14.15	26.00	30 dBm / 1 W
High	2462	14.20	26.30	30 dBm / 1 W


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

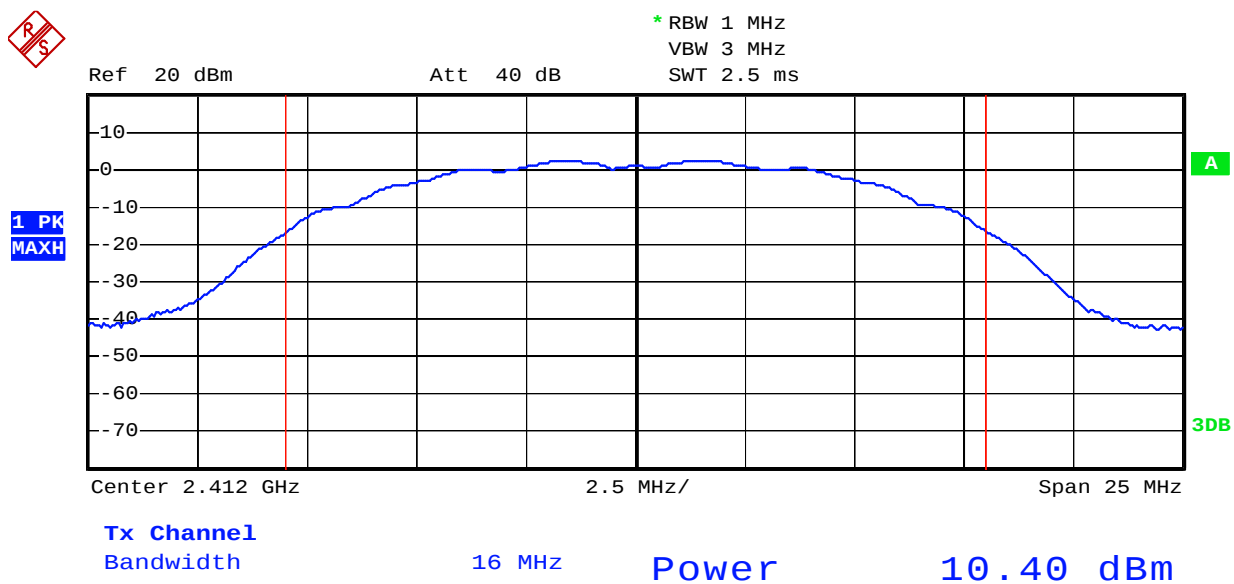


Date: 18.FEB.2011 20:50:57

802.11b Channel Middle 2437MHz

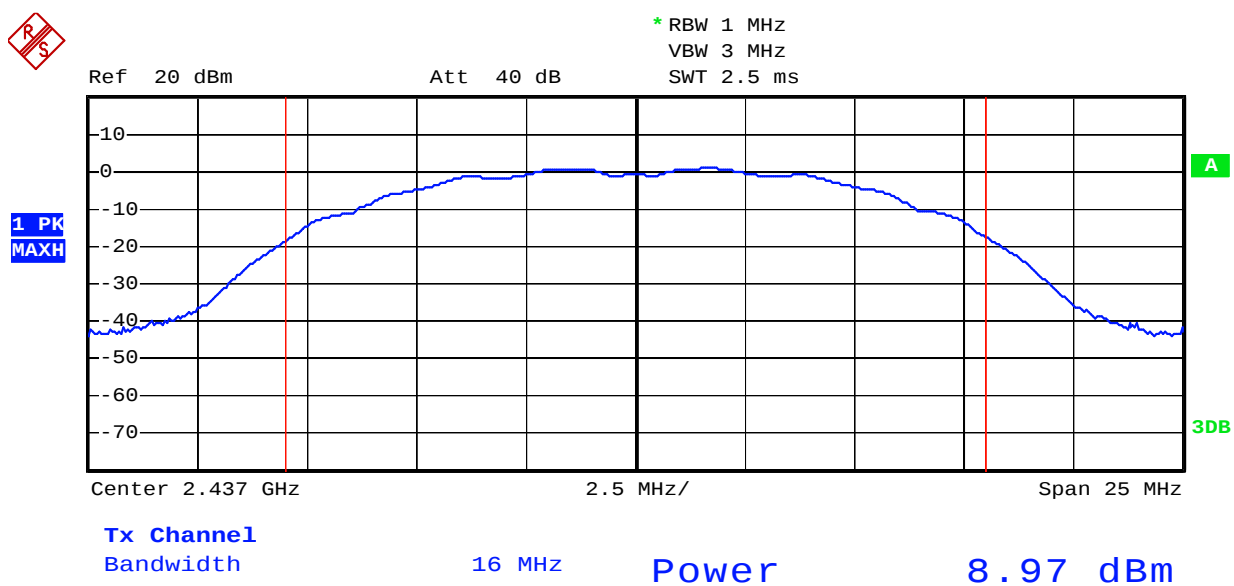


Date: 18.FEB.2011 20:52:04

802.11b Channel High 2462MHz

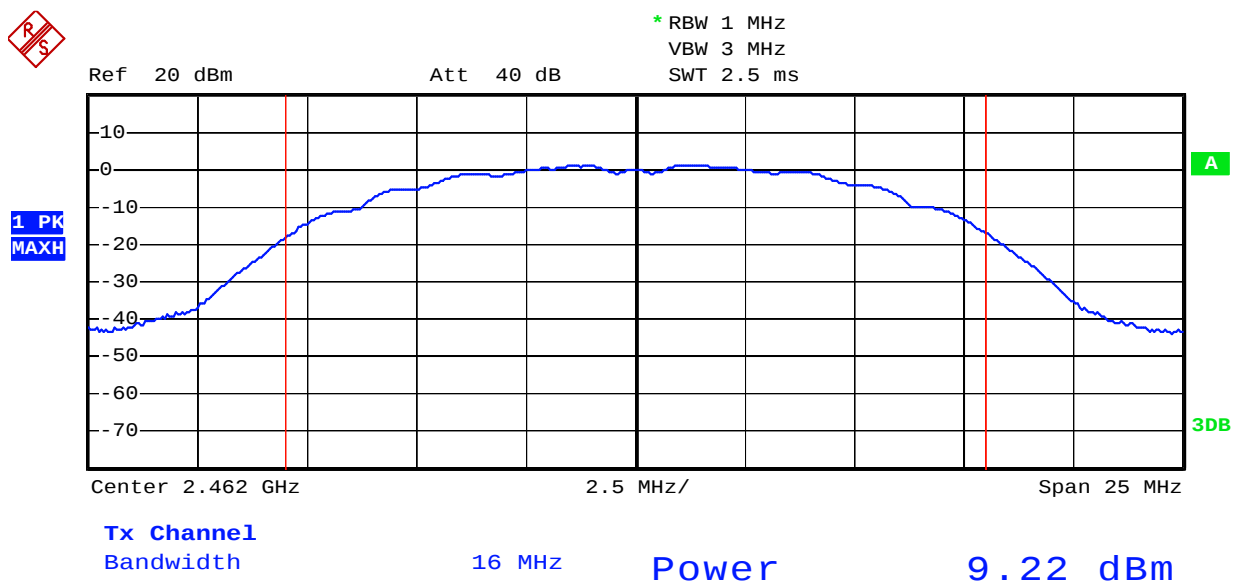


Date: 18.FEB.2011 20:52:56

802.11g Channel Low 2412MHz

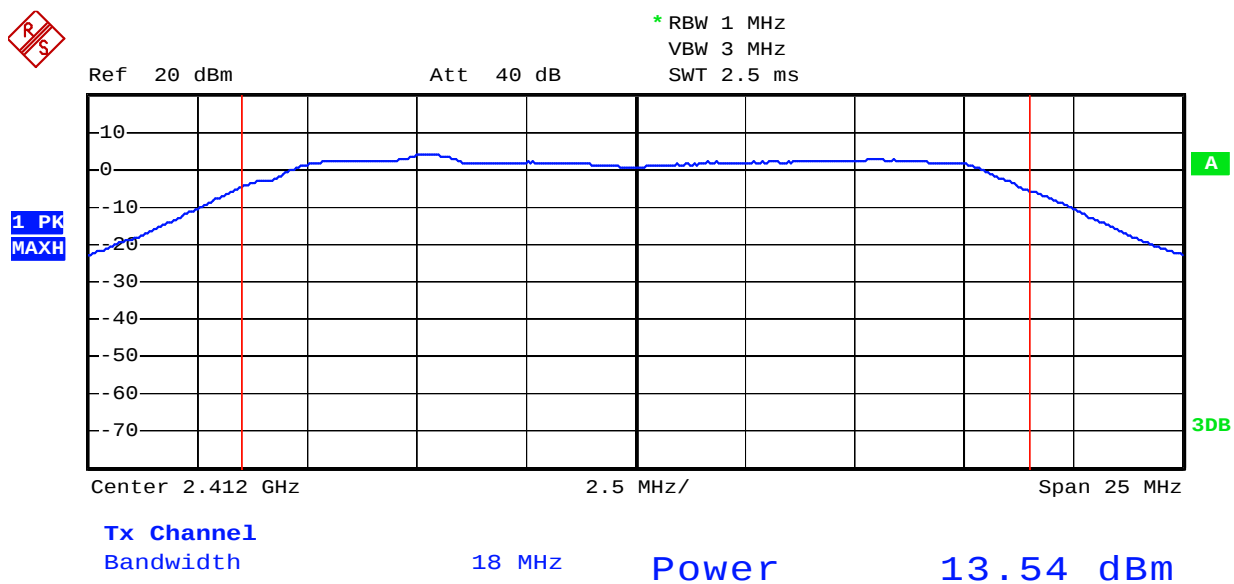


Date: 18.FEB.2011 20:55:17

802.11g Channel Middle 2437MHz

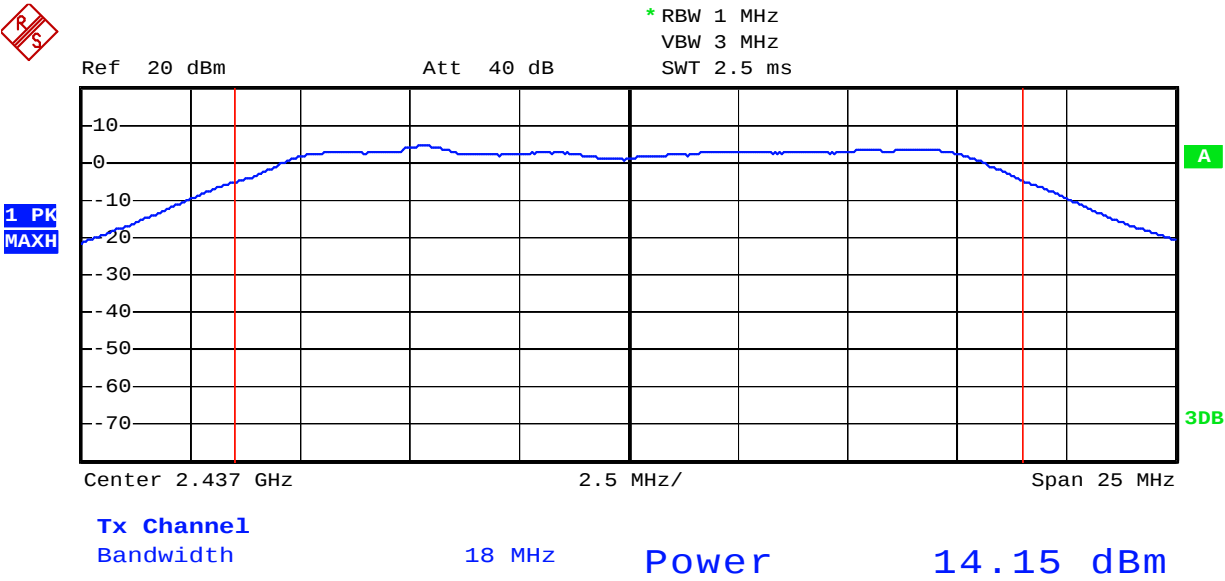

Date: 18.FEB.2011 20:55:58

802.11g Channel High 2462MHz

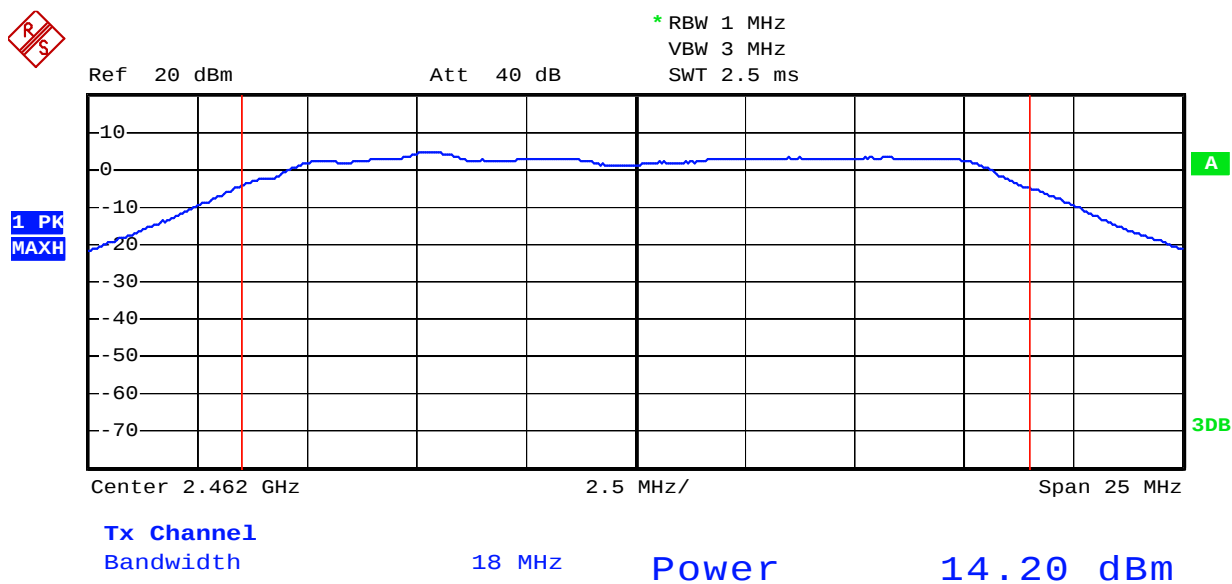

Date: 18.FEB.2011 20:56:44

7. POWER SPECTRAL DENSITY MEASUREMENT

7.1. Block Diagram of Test Setup



(EUT: PURE Contour)

7.2. The Requirement for Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3. EUT Configuration on Measurement

The following equipments are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. PURE Contour (EUT)

Model Number	:	VL-61394
Serial Number	:	N/A
Manufacturer	:	Zhao Yang Elec. (Shenzhen) Co., Ltd.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set RBW of spectrum analyzer to 3kHz and VBW to 10kHz, sweep time = Span/3kHz.

7.5.3. Measure the maximum power spectral density.

7.6. Test Result

PASS.


Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

The test was performed with 802.11b, the data was shown the worst case 802.11b 1Mbps			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-13.71	8 dBm
Middle	2437	-25.44	8 dBm
High	2462	-24.27	8 dBm

The test was performed with 802.11g, the data was shown the worst case 802.11g 6Mbps			
Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)
Low	2412	-23.44	8 dBm
Middle	2437	-20.72	8 dBm
High	2462	-21.02	8 dBm


The spectrum analyzer plots are attached as below.

802.11b Channel Low 2412MHz

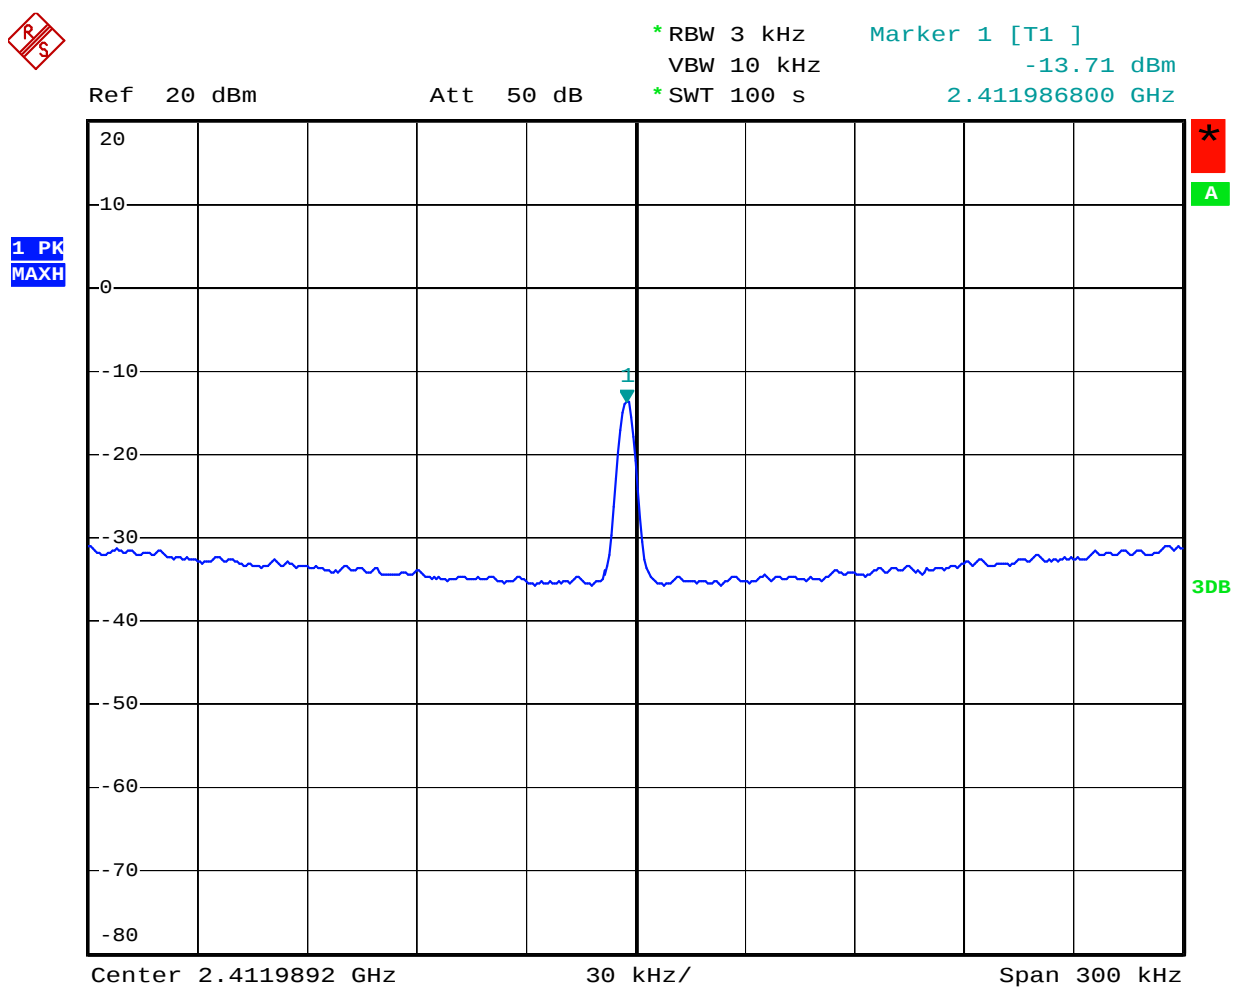


Date: 18.FEB.2011 20:28:05

802.11b Channel Middle 2437MHz

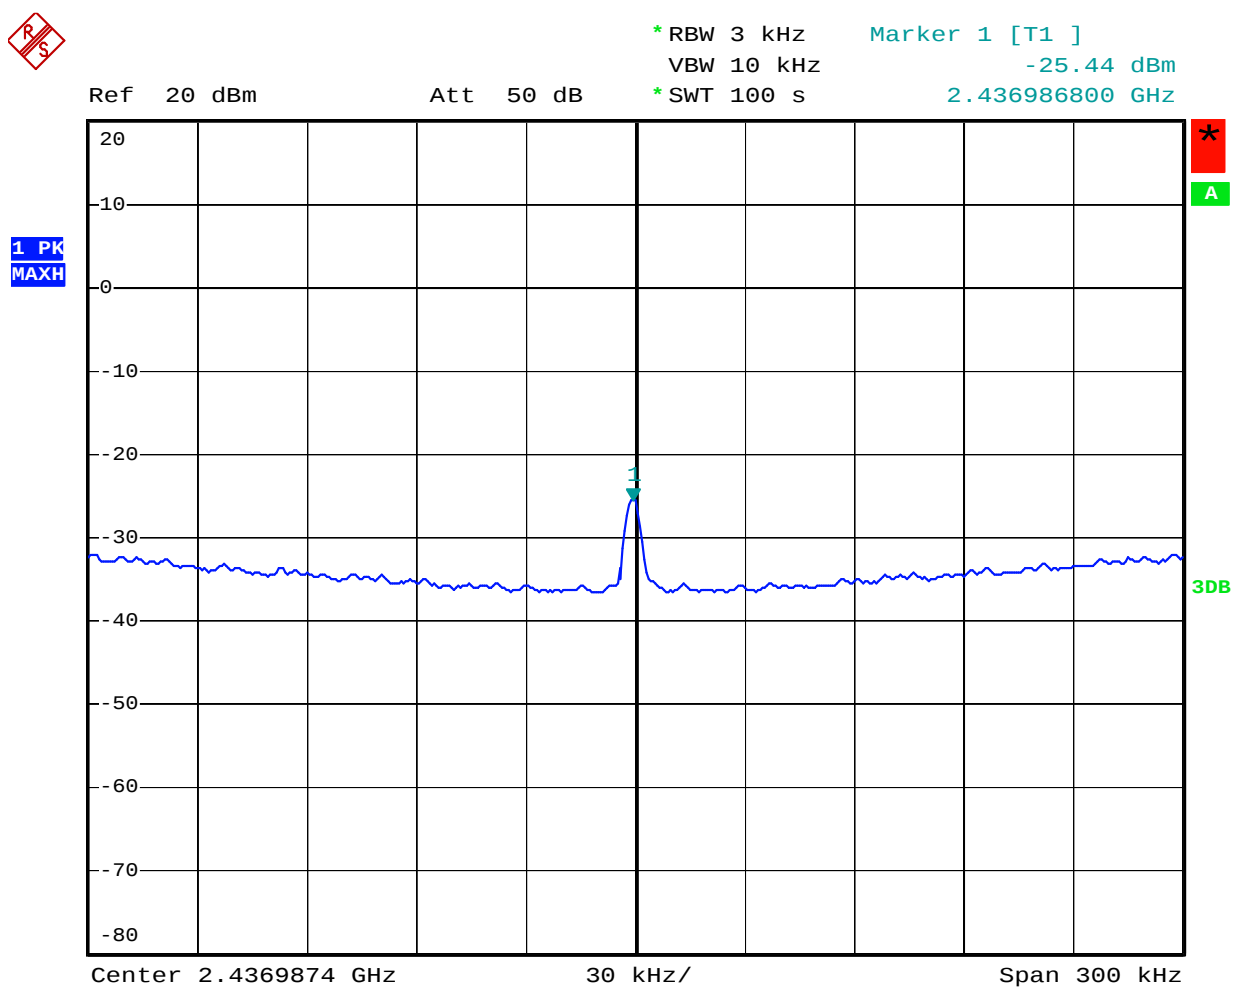


Date: 18.FEB.2011 20:31:36

802.11b Channel High 2462MHz

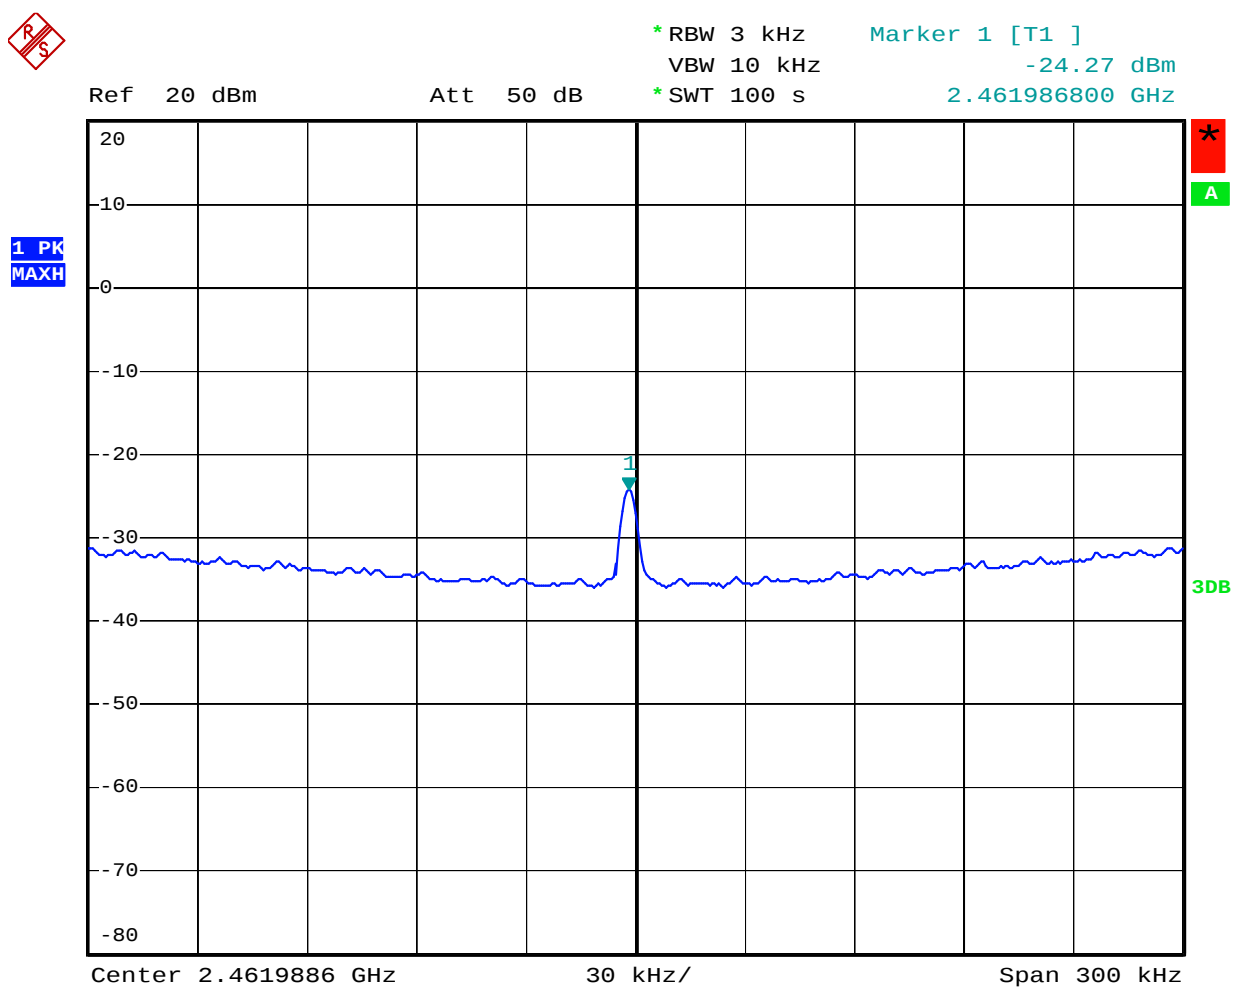


Date: 18.FEB.2011 20:33:52

802.11g Channel Low 2412MHz

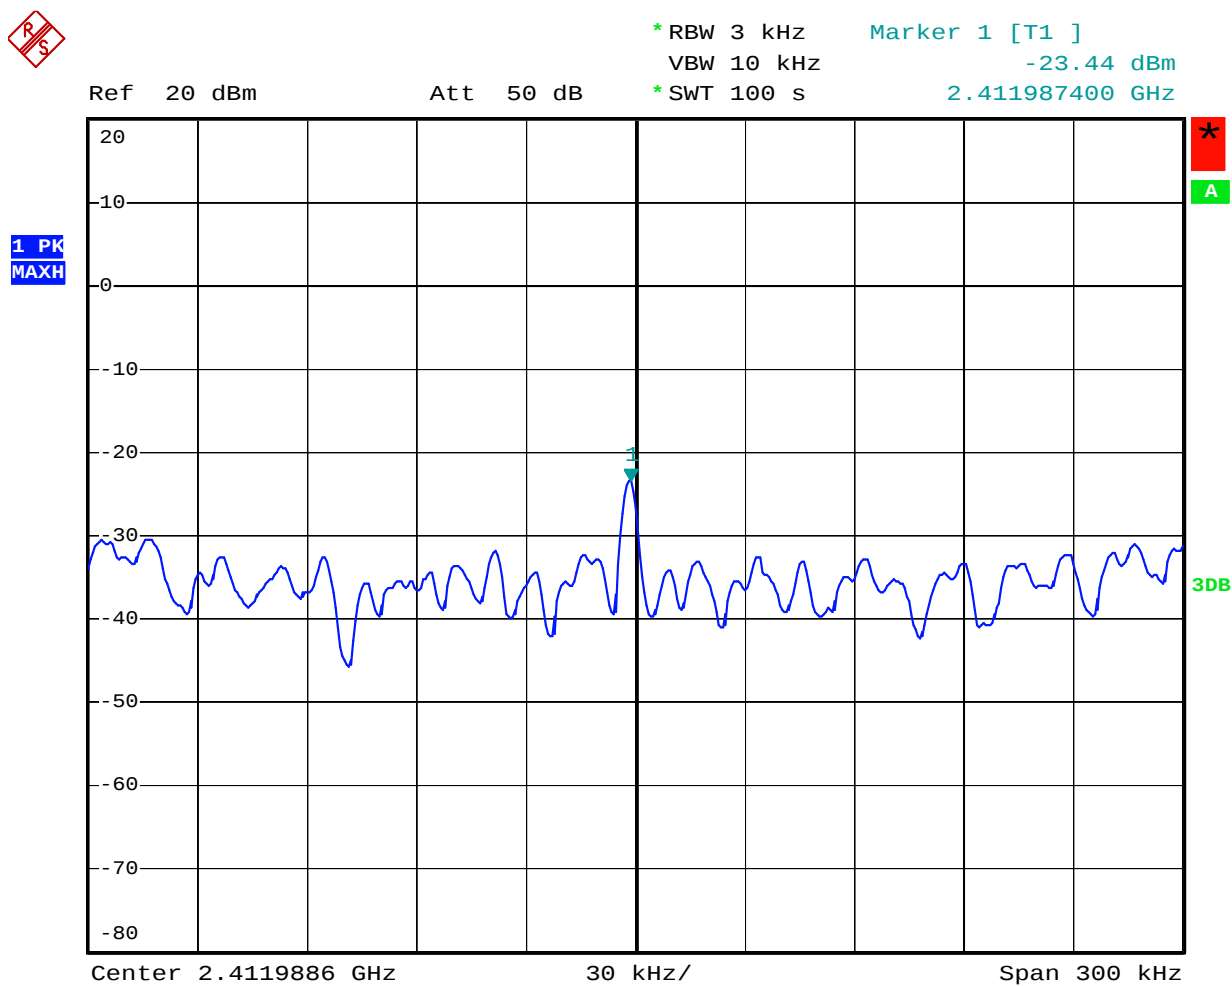


Date: 18.FEB.2011 20:18:17

802.11g Channel Middle 2437MHz

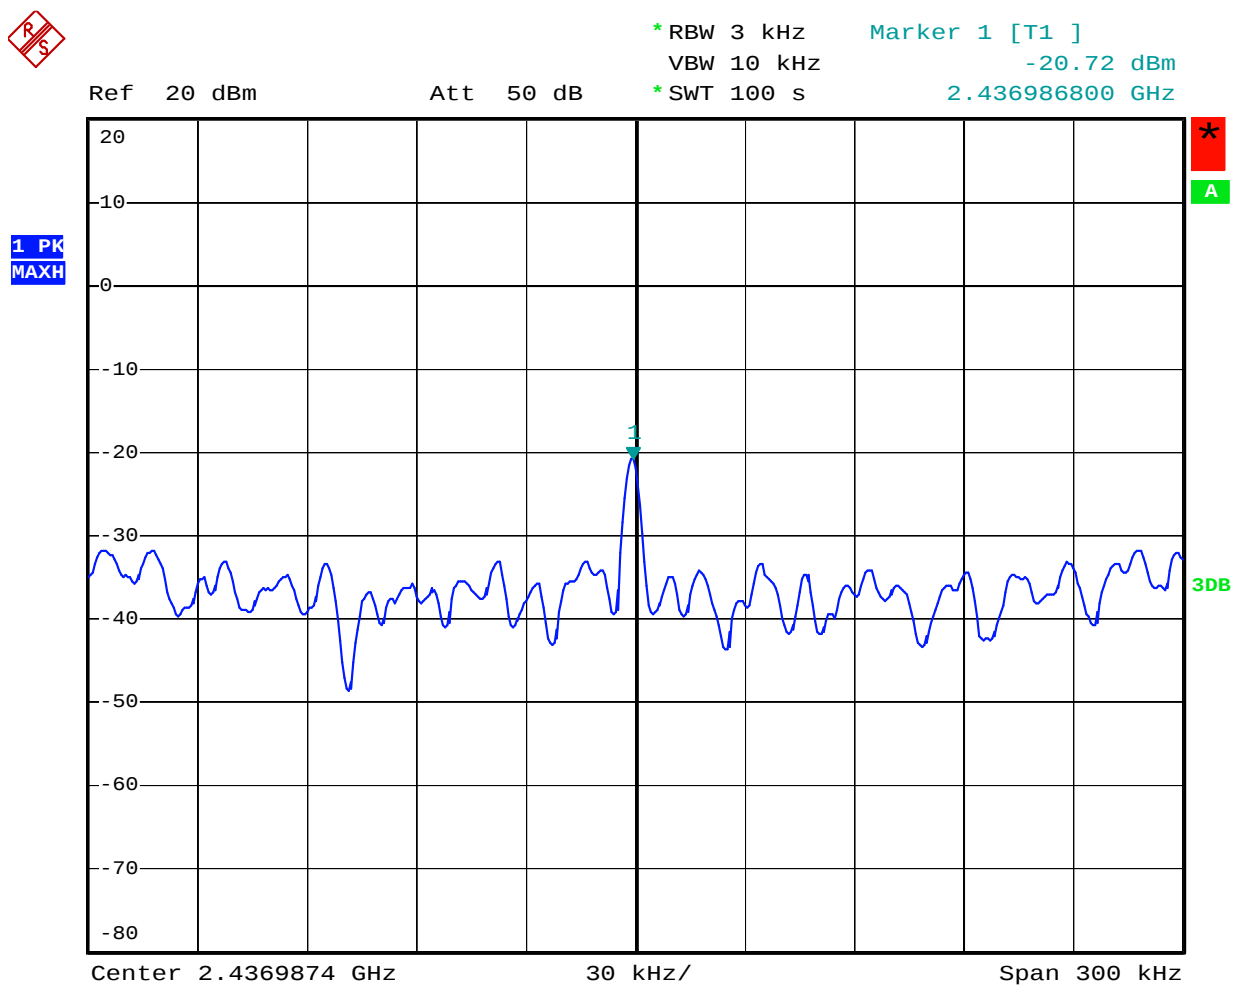

Date: 18.FEB.2011 20:21:04

802.11g Channel High 2462MHz

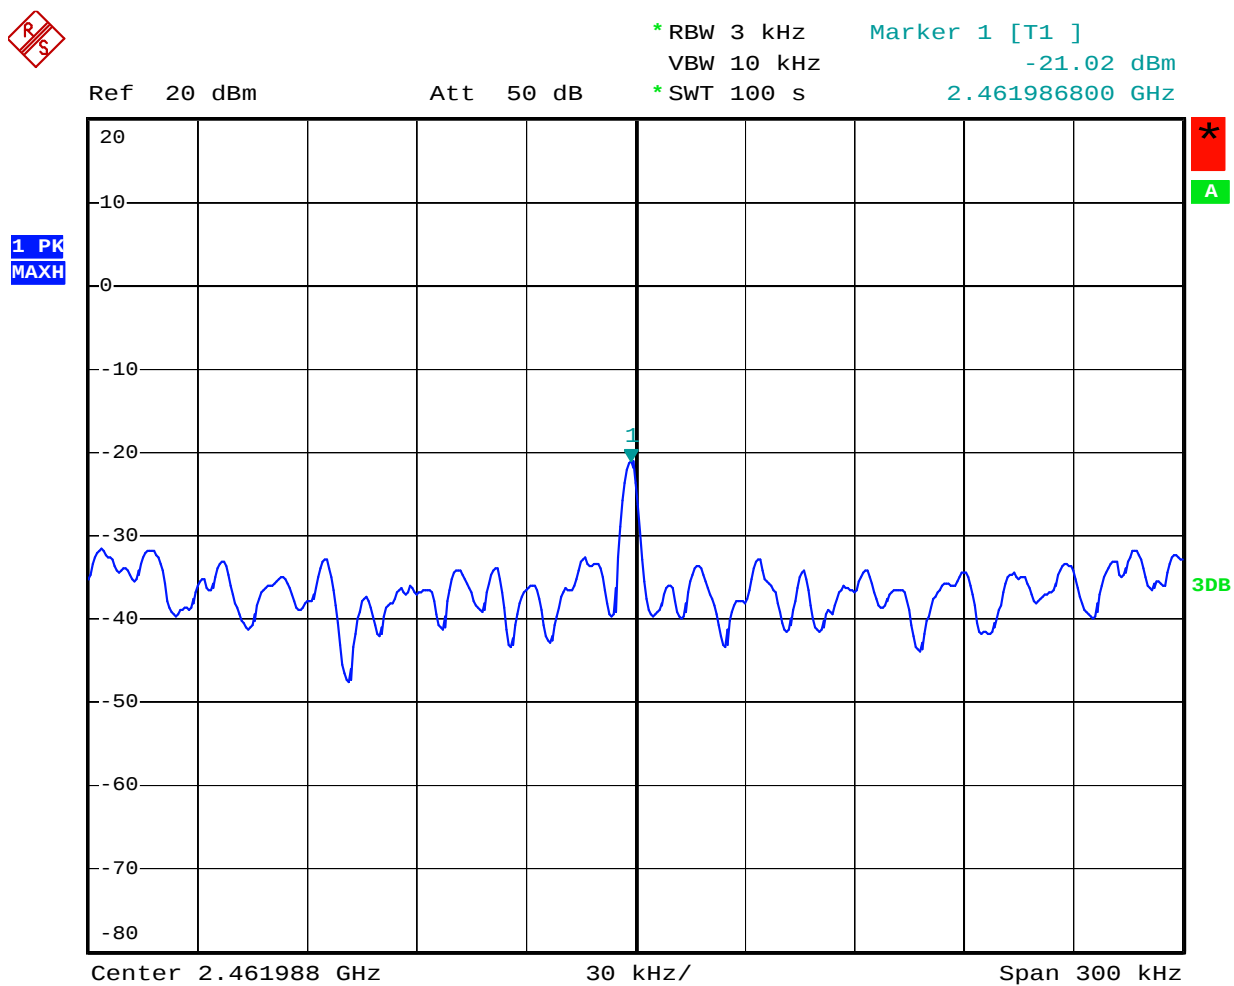

Date: 18.FEB.2011 20:23:19

8. BAND EDGE COMPLIANCE TEST

8.1. Block Diagram of Test Setup



(EUT: PURE Contour)

8.2. The Requirement for Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

8.3. EUT Configuration on Measurement

The following equipments are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. PURE Contour (EUT)

Model Number	:	VL-61394
Serial Number	:	N/A
Manufacturer	:	Zhao Yang Elec. (Shenzhen) Co., Ltd.

8.4.Operating Condition of EUT

8.4.1.Setup the EUT and simulator as shown as Section 8.1.

8.4.2.Turn on the power of all equipment.

8.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462MHz. We select 2412MHz, 2462MHz TX frequency to transmit.

8.5.Test Procedure

8.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

8.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz with convenient frequency span.

8.5.3.The band edges was measured and recorded.

8.6.Test Result

PASS**Conducted Band Edge Result**

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

The test was performed with 802.11b, the data was shown the worst case 802.11b 1Mbps		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	-37.60	> 20dBc
2462	-38.65	> 20dBc

The test was performed with 802.11g, the data was shown the worst case 802.11g 6Mbps		
Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2412	-27.57	> 20dBc
2462	-33.68	> 20dBc

802.11b Channel Low 2412MHz



* RBW 100 kHz Delta 2 [T1]
 VBW 300 kHz -37.60 dB
 SWT 10 ms -32.320000000 MHz


Ref 20 dBm

Att 50 dB

SWT 10 ms

-32.320000000 MHz

1 PK
 MAXH

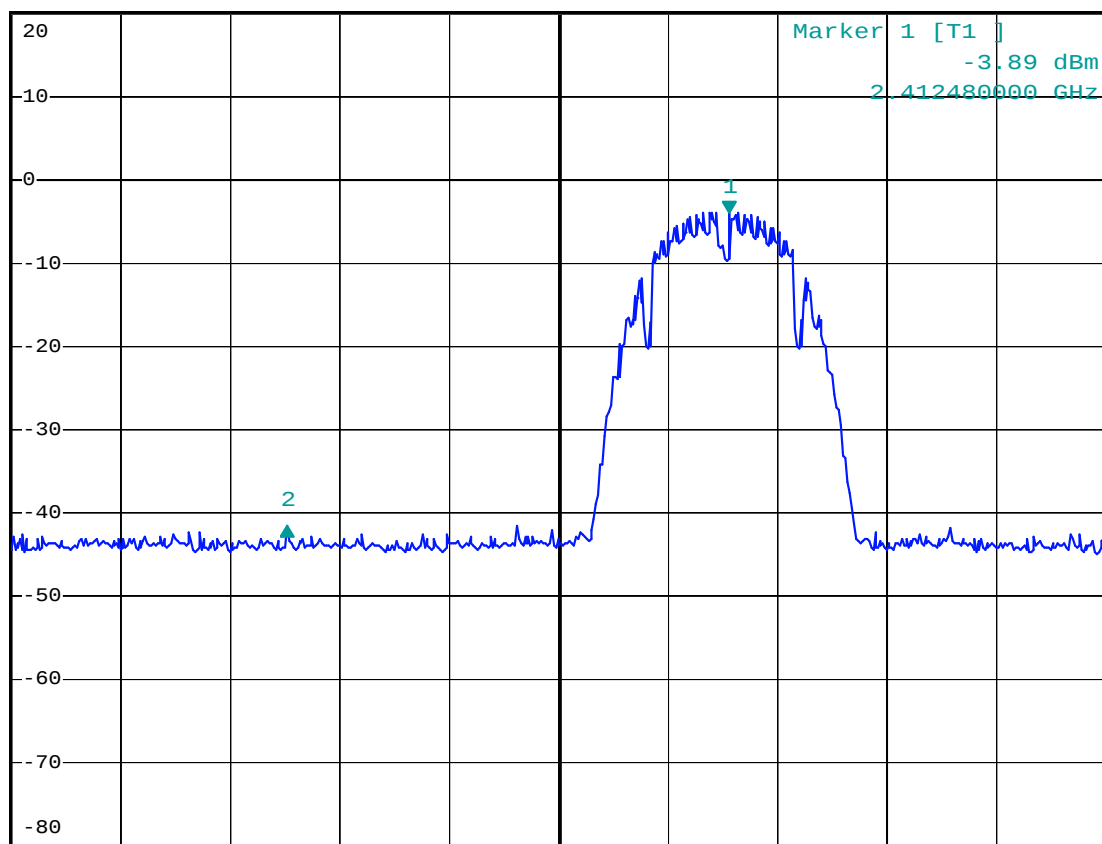

Center 2.4 GHz

8 MHz/

Span 80 MHz

Date: 18.FEB.2011 20:38:46

802.11b Channel High 2462MHz



* RBW 100 kHz Delta 2 [T1]
 VBW 300 kHz -38.65 dB
 SWT 10 ms 34.560000000 MHz


Ref 20 dBm

Att 50 dB

SWT 10 ms

34.560000000 MHz

1 PK
 MAXH

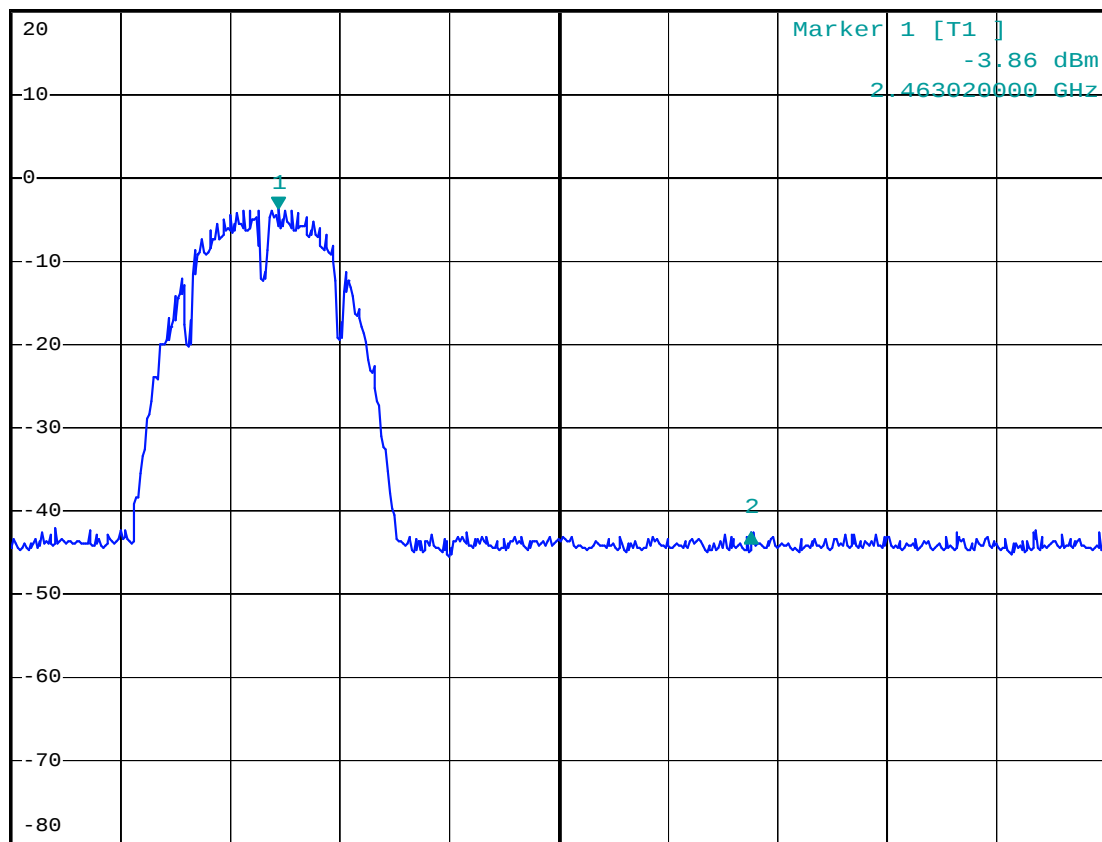

Center 2.4835 GHz

8 MHz/

Span 80 MHz

Date: 18.FEB.2011 20:40:08

802.11g Channel Low 2412MHz



* RBW 100 kHz Delta 2 [T1]
 VBW 300 kHz -27.57 dB
 SWT 10 ms -6.080000000 MHz


Ref 20 dBm

Att 50 dB

SWT 10 ms

-6.080000000 MHz

1 PK
 MAXH

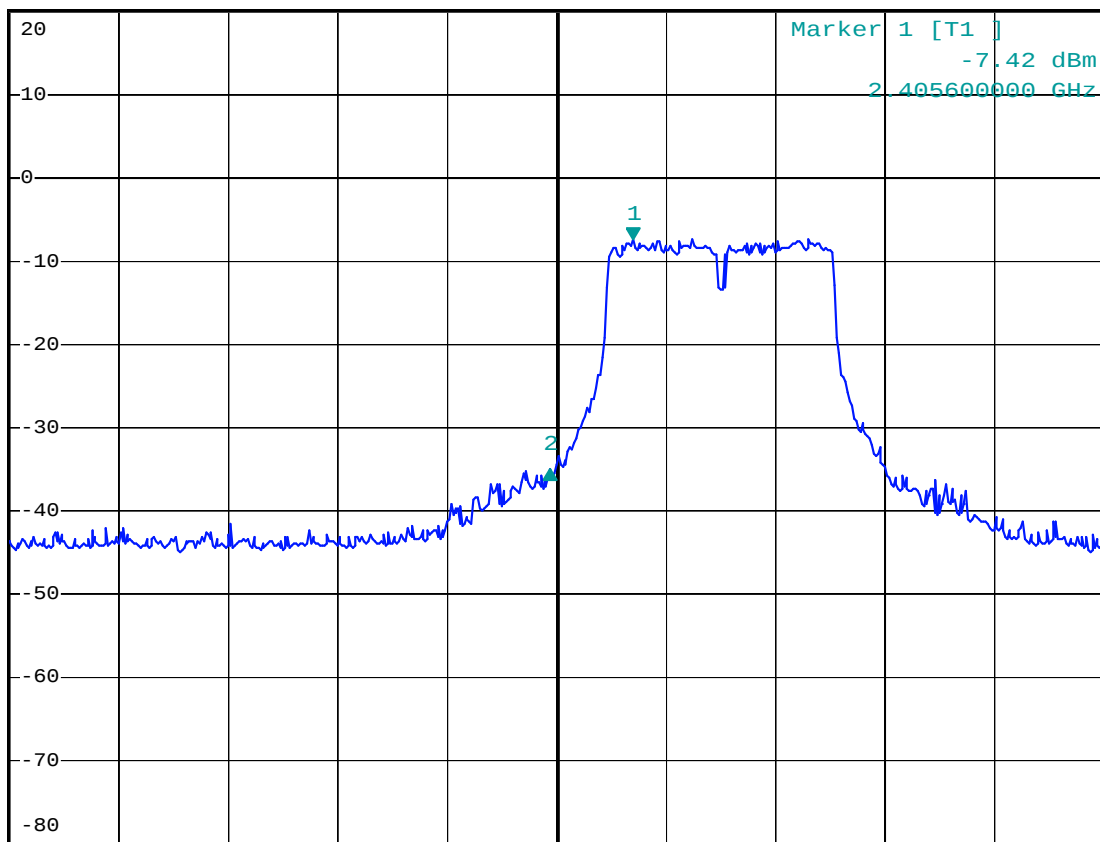


Center 2.4 GHz

8 MHz/

Span 80 MHz

Date: 18.FEB.2011 20:42:28

802.11g Channel High 2462MHz

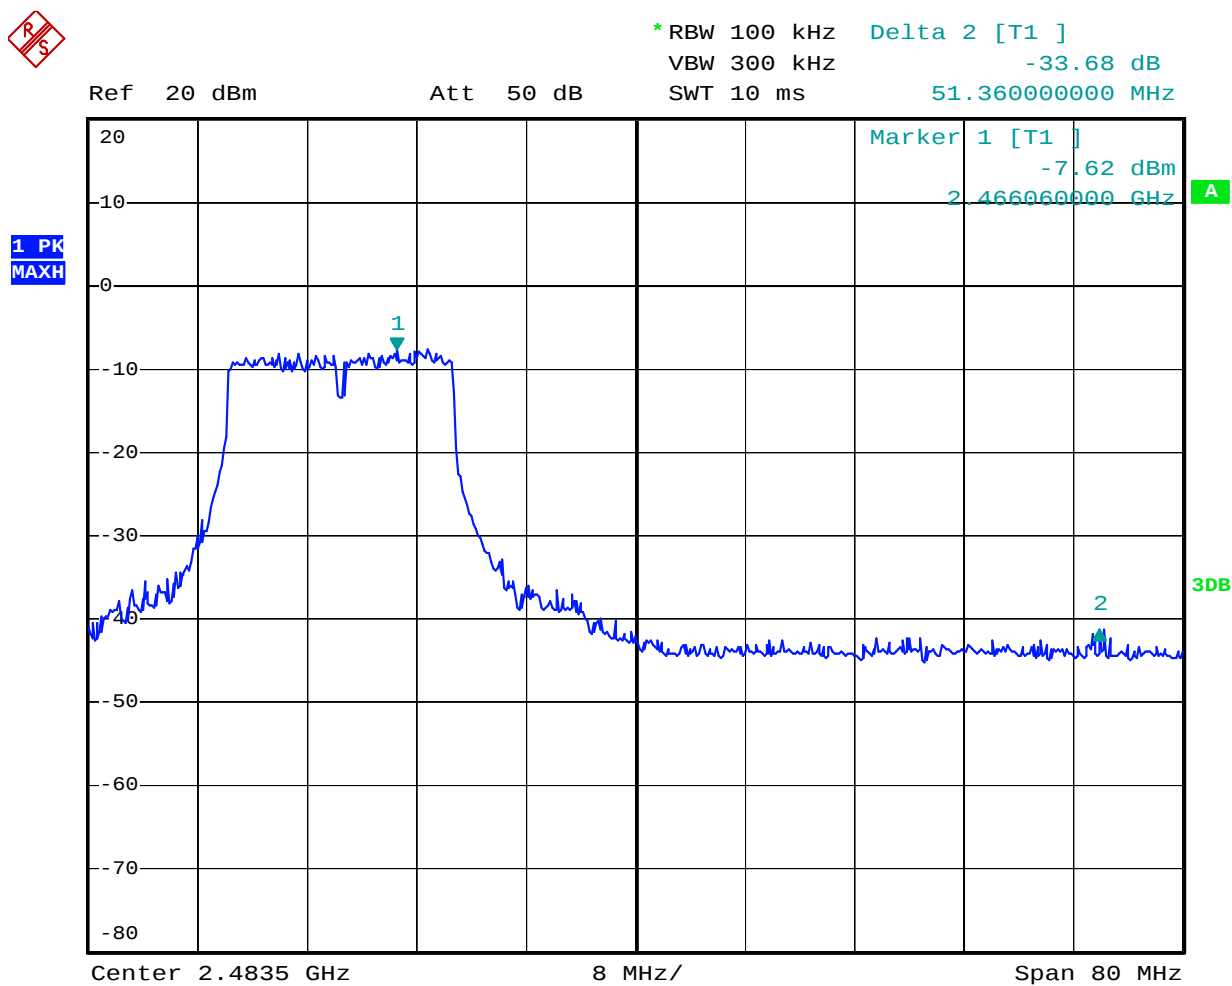

Date: 18.FEB.2011 20:43:49

Radiated Band Edge Result

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.

Date of Test:	February 18, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	TX	Test Engineer:	Joe

Frequency (MHz)	Reading(dBμV/m)		Factor(dB) Corr.	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe 5614#	Polarization: Horizontal
Standard: FCC Part 15 PEAK 2.4G	Power Source: AC 120V /60Hz
Test item: Radiation Test	Date: 2011/02/18
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:33:11
EUT: PURE Contour	Engineer Signature: Joe
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: VL-61394	
Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.	

Note: Report No.:ATE20110148

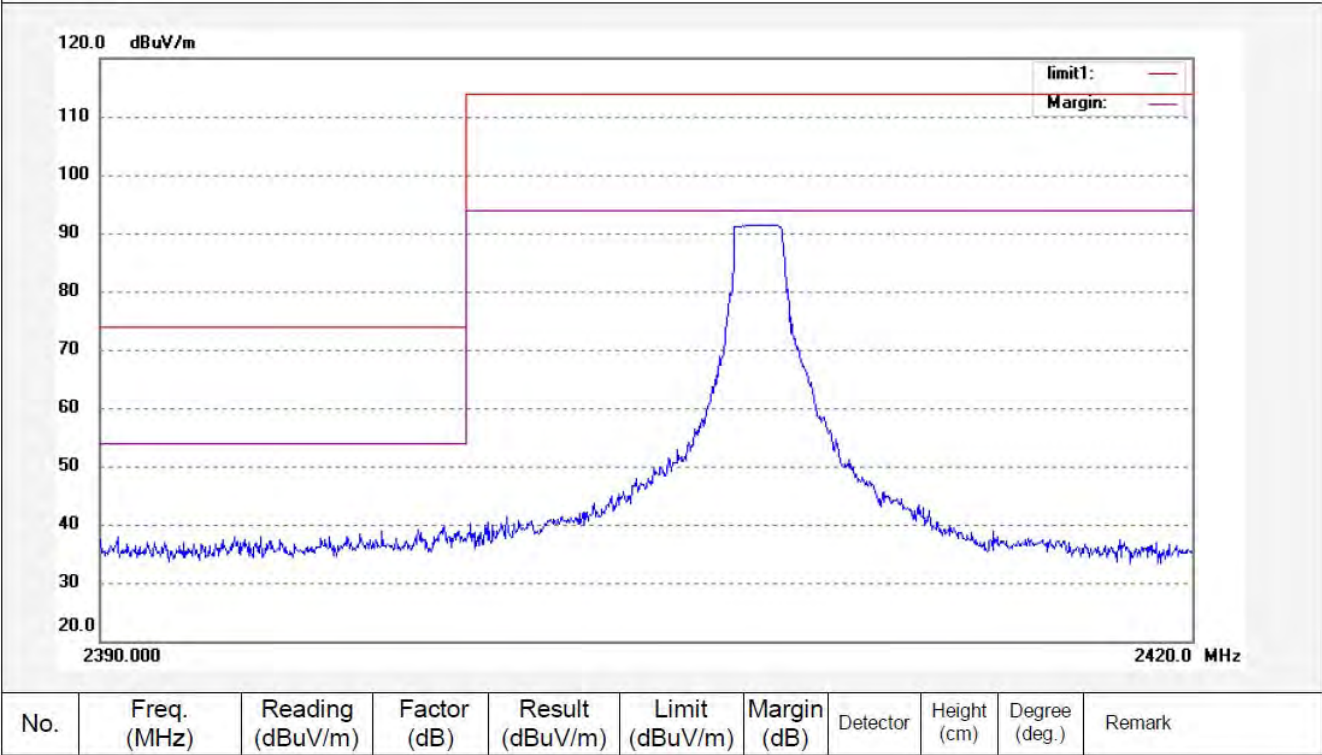


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe5613 #

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 10:37:19

Engineer Signature: Joe

Distance: 3m

Note: Report No.:ATE20110148

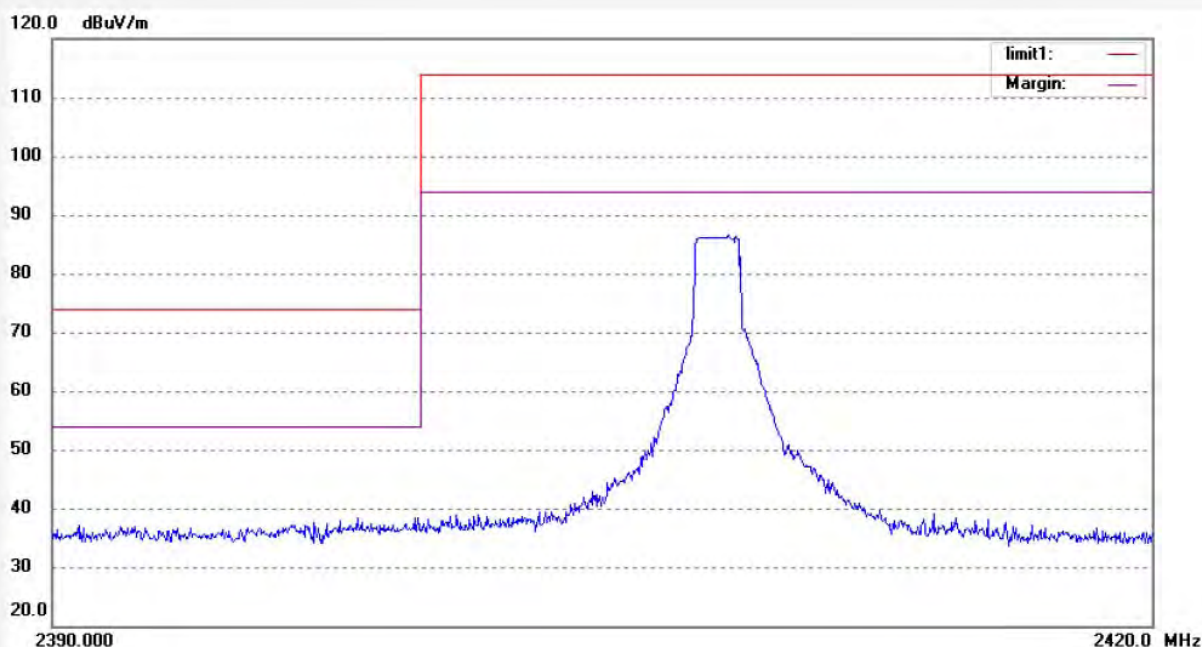

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe5612 #

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 10:43:24

Engineer Signature: Joe

Distance: 3m

Note: Report No.: ATE20110148

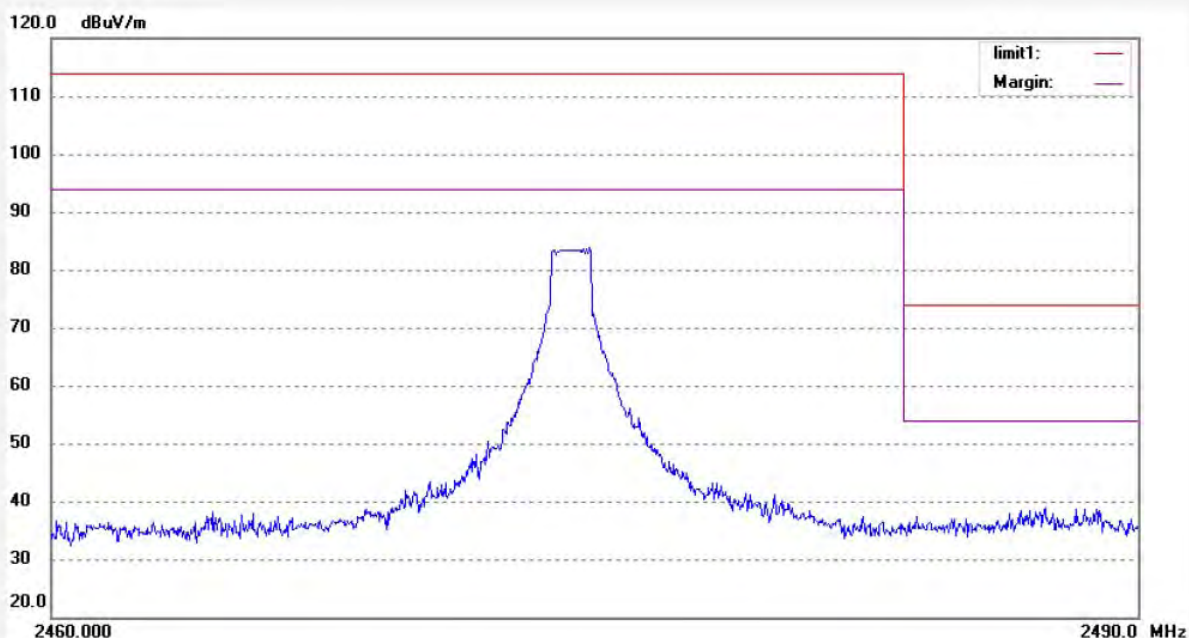

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe 5611#

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 10:47:33

Engineer Signature: Joe

Distance: 3m

Note: Report No.:ATE20110148

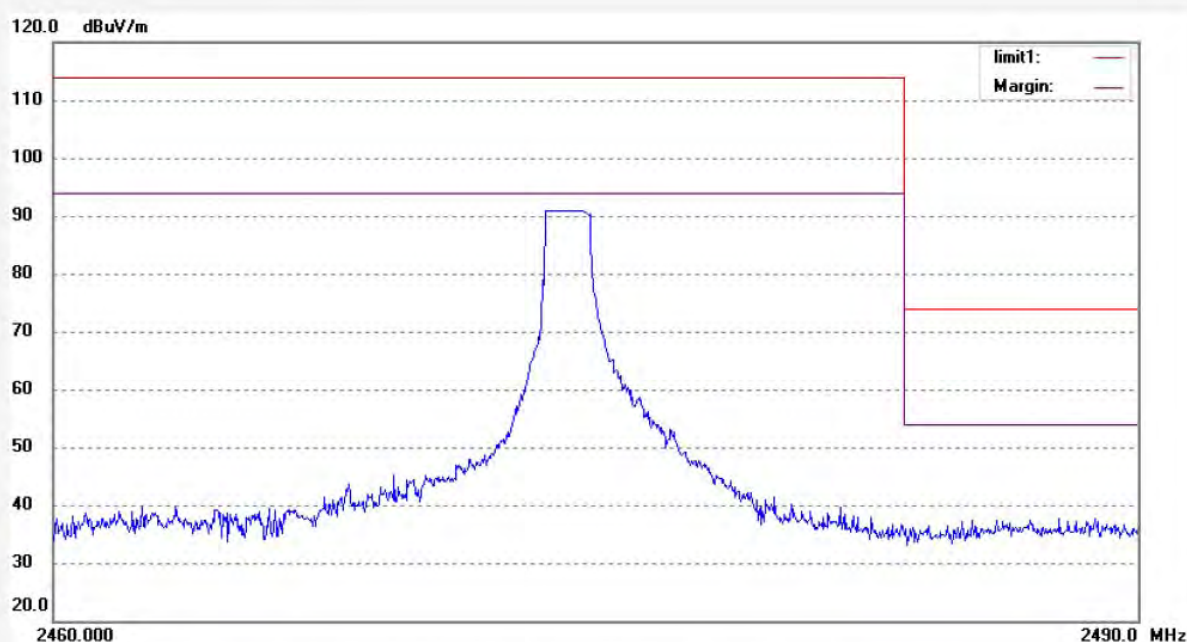

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe#5615

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 16:32:35

Engineer Signature: Joe

Distance: 3m

Note: Report No.:ATE20110148

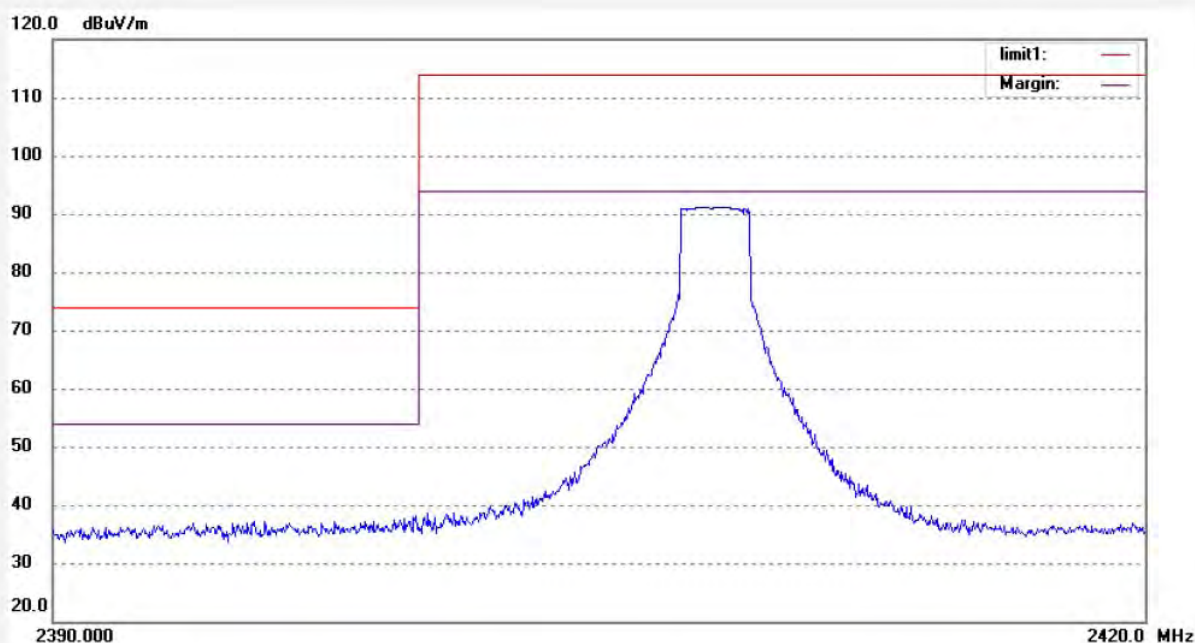

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe #5616

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 16:36:50

Engineer Signature: Joe

Distance: 3m

Note: Report No.:ATE20110148

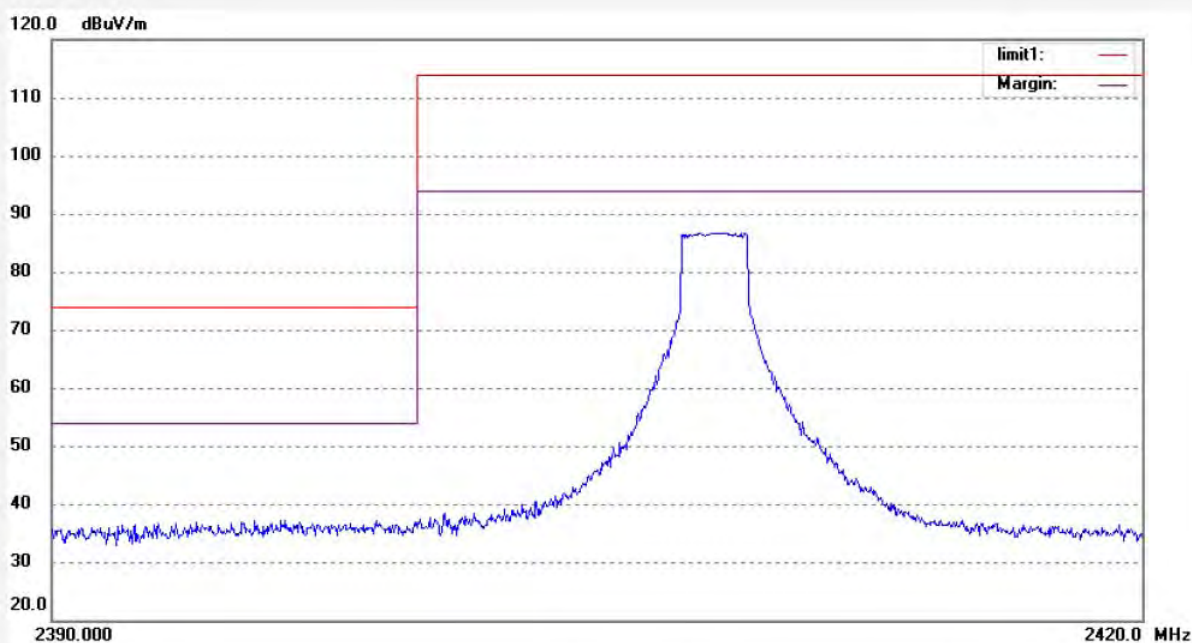

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe #5618

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 16:46:39

Engineer Signature: Joe

Distance: 3m

Note: Report No.:ATE20110148

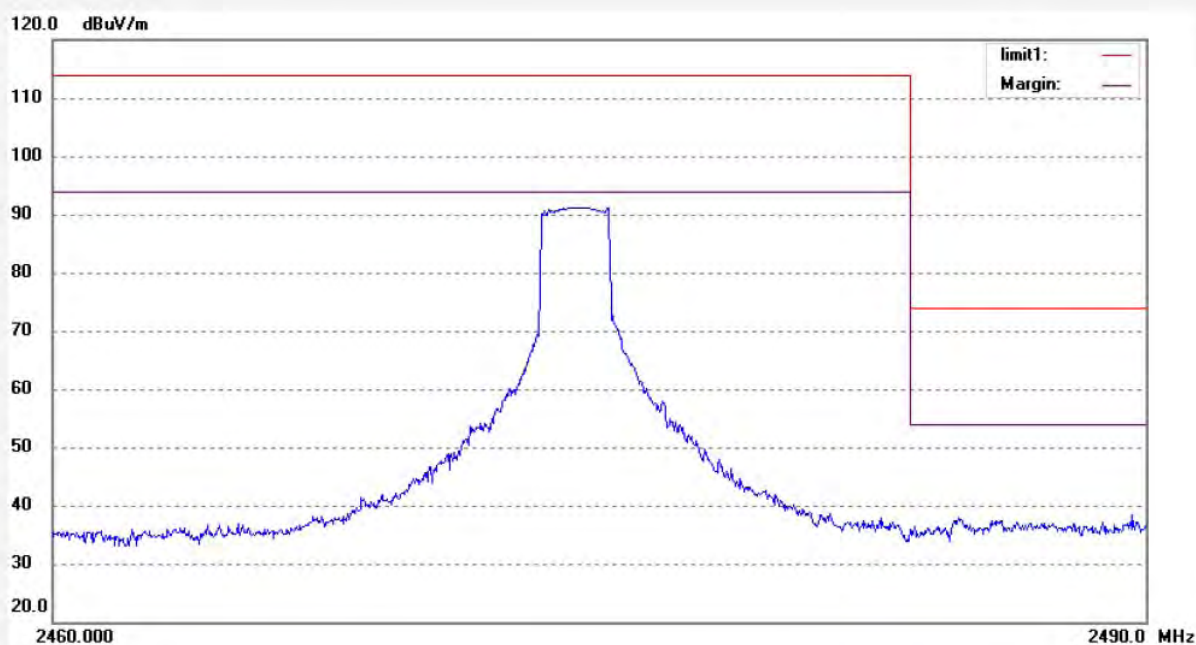

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: joe #5617

Standard: FCC Part 15 PEAK 2.4G

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V /60Hz


Date: 2011/02/18

Time: 16:42:28

Engineer Signature: Joe

Distance: 3m

Note: Report No.: ATE20110148

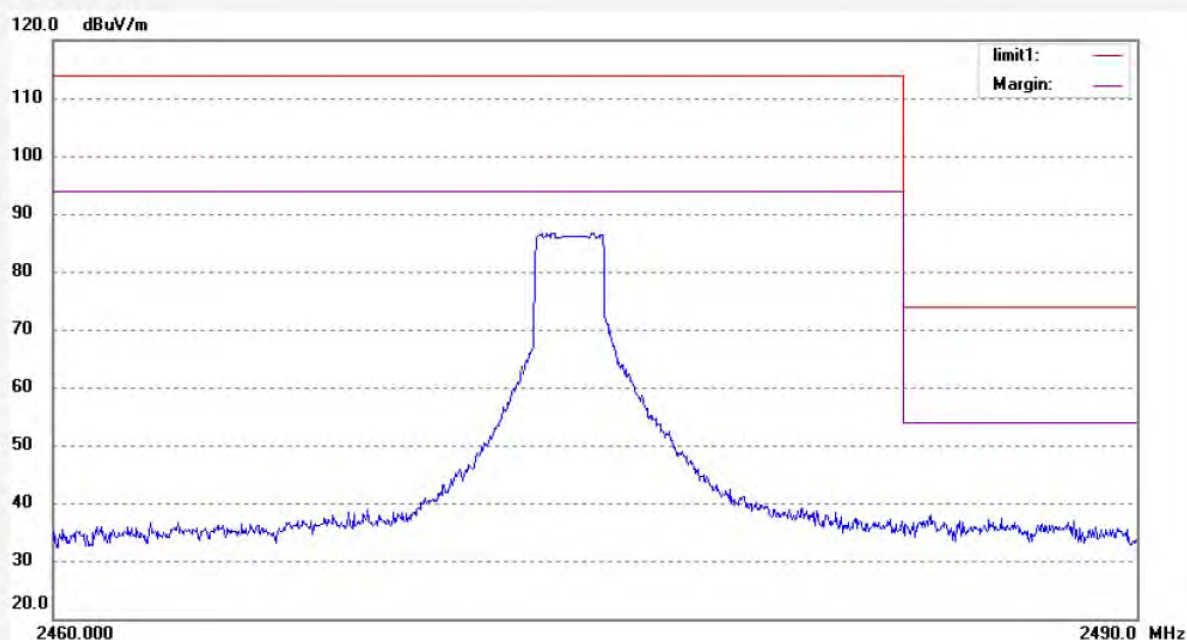


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

9. RADIATED SPURIOUS EMISSION TEST

9.1. Block Diagram of Test Setup


9.1.1. Block diagram of connection between the EUT and peripherals

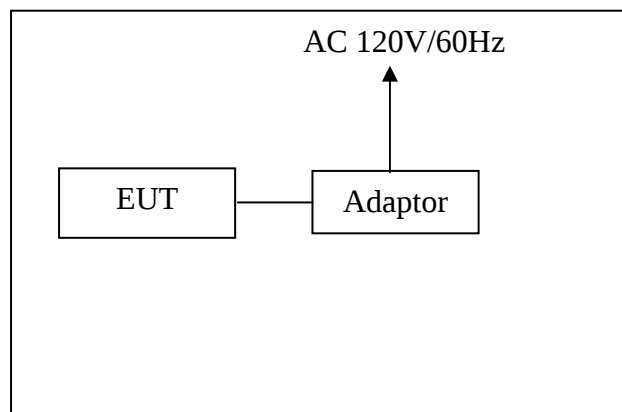

Setup: Transmitting mode

(EUT: PURE Contour)

9.1.2. Semi-Anechoic Chamber Test Setup Diagram

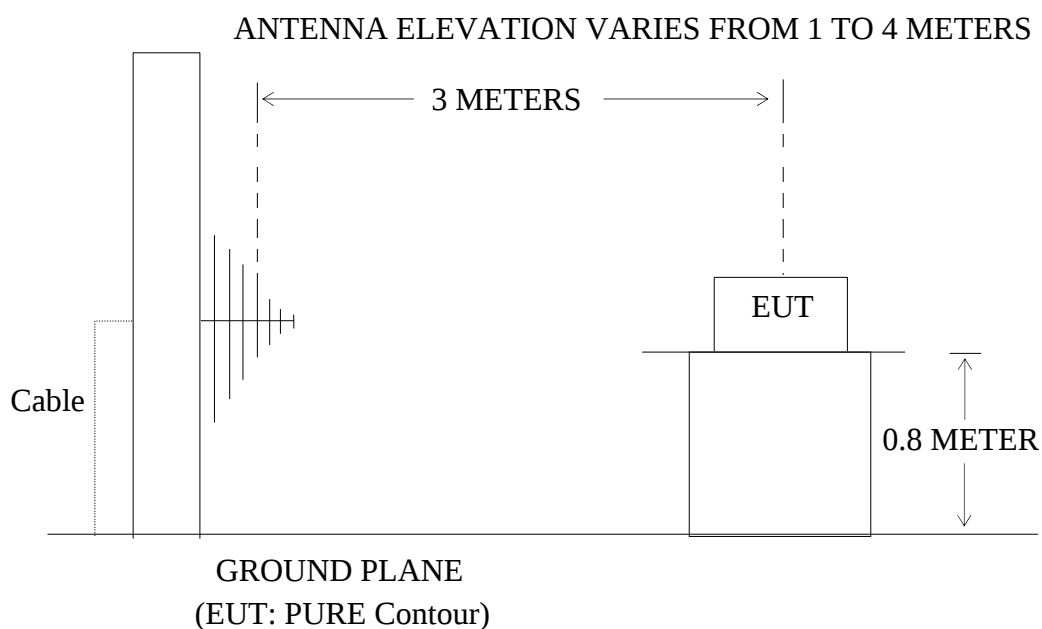

9.2.The Limit for Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3.Restricted bands of operation

9.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

9.4.Configuration of EUT on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.1.PURE Contour (EUT)

Model Number : VL-61394
 Serial Number : N/A
 Manufacturer : Zhao Yang Elec. (Shenzhen) Co., Ltd.

9.5.Operating Condition of EUT

9.5.1.Setup the EUT and simulator as shown as Section 8.1.

9.5.2.Turn on the power of all equipment.

9.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2412-2462MHz. We select 2412MHz, 2437MHz, 2462MHz TX frequency to transmit.

9.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes. The worst-case data rate for this channel to be 1Mbps for 802.11b mode and 6Mbps for 802.11g mode, based on previous with 802.11 WLAN product design architectures.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

9.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11b Channel Low 2412MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	22.04	14.60	36.64	43.50	-6.86	Vertical
184.3040	18.51	15.91	34.42	43.50	-9.08	Vertical
282.5960	16.10	18.37	34.47	46.00	-11.53	Vertical
959.9420	10.04	29.69	39.73	46.00	-6.27	Vertical
159.7340	19.50	14.60	34.10	43.50	-9.40	Horizontal
239.9850	15.47	16.76	32.23	46.00	-13.77	Horizontal
599.9560	10.06	25.53	35.59	46.00	-10.41	Horizontal
959.9420	10.09	29.69	39.78	46.00	-6.22	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2400.000	37.59	43.58	-7.46	30.13	36.12	54	74	-23.87	-37.88	Vertical
2412.020	106.42	112.43	-7.43	98.99	105.00	-	-	-	-	Vertical
*4824.036	49.21	55.22	-0.19	19.02	55.03	54	74	-4.98	-18.97	Vertical
2400.000	37.52	43.48	-7.46	30.06	36.02	54	74	-23.94	-37.98	Horizontal
2412.020	105.59	111.56	-7.43	98.16	104.13	-	-	-	-	Horizontal
*4824.036	48.22	54.22	-0.19	48.03	54.03	54	74	-5.97	-19.97	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11b Channel Middle 2437MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	22.36	14.60	36.96	43.50	-6.54	Vertical
184.3040	18.65	15.91	34.56	43.50	-8.94	Vertical
282.5960	16.04	18.37	34.41	46.00	-11.59	Vertical
959.9420	9.74	29.69	39.43	46.00	-6.57	Vertical
159.7340	20.01	14.60	34.61	43.50	-8.89	Horizontal
239.9850	14.44	16.76	31.20	46.00	-14.80	Horizontal
599.9560	9.36	25.53	34.89	46.00	-11.11	Horizontal
959.9420	9.33	29.69	39.02	46.00	-6.98	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2437.018	106.08	112.10	-7.36	98.72	104.74	-	-	-	-	Vertical
*4874.032	49.41	55.45	0.09	49.50	55.54	54	74	-4.50	-18.46	Vertical
2437.018	105.51	111.55	-7.36	98.15	104.19	-	-	-	-	Horizontal
*4874.032	48.16	54.20	0.09	48.25	54.29	54	74	-5.75	-19.71	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11b Channel High 2462MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	21.97	14.60	36.57	43.50	-6.93	Vertical
184.3040	18.48	15.91	34.39	43.50	-9.11	Vertical
282.5960	16.66	18.37	35.03	46.00	-10.97	Vertical
959.9420	8.92	29.69	38.61	46.00	-7.39	Vertical
159.7340	19.43	14.60	34.03	43.50	-9.47	Horizontal
239.9850	14.82	16.76	31.58	46.00	-14.42	Horizontal
599.9560	10.23	25.53	35.76	46.00	-10.24	Horizontal
959.9420	9.93	29.69	39.62	46.00	-6.38	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2462.020	105.77	111.79	-7.35	98.42	104.44	-	-	-	-	Vertical
2483.500	38.21	44.22	-7.37	30.84	36.85	54	74	-23.16	-37.15	Vertical
*4924.038	48.75	54.79	0.34	49.09	55.13	54	74	-4.91	-18.87	Vertical
2462.020	105.44	111.45	-7.35	98.04	104.10	-	-	-	-	Horizontal
2483.500	38.54	44.55	-7.37	31.17	37.18	54	74	-22.83	-36.82	Horizontal
*4924.038	47.93	53.96	0.34	48.27	54.30	54	74	-5.73	-19.70	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11g Channel Low 2412MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	22.23	14.60	36.83	43.50	-6.67	Vertical
184.3040	18.18	15.91	34.09	43.50	-9.41	Vertical
282.5960	16.86	18.37	35.23	46.00	-10.77	Vertical
959.9420	9.47	29.69	39.16	46.00	-6.84	Vertical
159.7340	18.34	14.60	32.94	43.50	-10.56	Horizontal
239.9850	15.63	16.76	32.39	46.00	13.61	Horizontal
599.9560	9.57	25.53	35.10	46.00	-10.90	Horizontal
959.9420	9.57	29.69	39.26	46.00	-6.74	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2400.000	38.92	44.95	-7.46	31.46	37.49	54	74	-22.54	-36.51	Vertical
2412.016	105.11	111.16	-7.43	97.68	103.73	-	-	-	-	Vertical
*4824.028	49.69	55.74	-0.19	49.50	55.55	54	74	-4.50	-18.45	Vertical
2400.000	37.72	43.71	-7.46	30.26	36.25	54	74	-23.74	-37.75	Horizontal
2412.016	104.82	110.86	-7.43	97.39	103.43	-	-	-	-	Horizontal
*4824.028	48.36	54.40	-0.19	48.17	54.21	54	74	-5.83	-19.79	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11g Channel Middle 2437MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	22.35	14.60	36.95	43.50	-6.55	Vertical
184.3040	18.14	15.91	34.05	43.50	-9.45	Vertical
282.5960	16.53	18.37	34.90	46.00	-11.10	Vertical
959.9420	8.74	29.69	38.43	46.00	-7.57	Vertical
159.7340	18.18	14.60	32.78	43.50	-10.72	Horizontal
239.9850	15.80	16.76	32.56	46.00	-13.44	Horizontal
599.9560	9.99	25.53	35.52	46.00	-10.48	Horizontal
959.9420	11.05	29.69	40.74	46.00	-5.26	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2437.018	105.04	111.07	-7.36	97.68	103.71	-	-	-	-	Vertical
*4874.030	48.88	54.91	0.09	48.97	55.00	54	74	-5.03	-19.00	Vertical
2437.018	104.90	110.95	-7.36	97.54	103.59	-	-	-	-	Horizontal
*4874.030	48.28	54.32	0.09	48.37	54.41	54	74	-5.63	-19.59	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	February 14, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	DC 20V (Adaptor input)
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
159.7340	21.99	14.60	36.59	43.50	-6.91	Vertical
184.3040	18.26	15.91	34.17	43.50	-9.33	Vertical
282.5960	16.36	18.37	34.73	46.00	-11.27	Vertical
959.9420	9.02	29.69	38.71	46.00	-7.29	Vertical
159.7340	17.66	14.60	32.26	43.50	-11.24	Horizontal
239.9850	15.65	16.76	32.41	46.00	-13.59	Horizontal
599.9560	9.22	25.53	34.75	46.00	-11.25	Horizontal
959.9420	8.06	29.69	37.75	46.00	-8.25	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2462.017	105.44	111.46	-7.35	98.09	104.11	-	-	-	-	Vertical
2483.500	39.19	45.18	-7.37	31.82	37.81	54	74	-22.18	-36.19	Vertical
*4924.031	48.90	54.92	0.34	49.24	55.26	54	74	-4.76	-18.74	Vertical
2462.017	104.57	110.60	-7.35	97.22	103.25	-	-	-	-	Horizontal
2483.500	39.56	45.61	-7.37	32.19	38.24	54	74	-21.81	-35.76	Horizontal
*4924.031	48.22	54.26	0.34	48.56	54.60	54	74	-5.44	-19.40	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1521

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:16:25

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

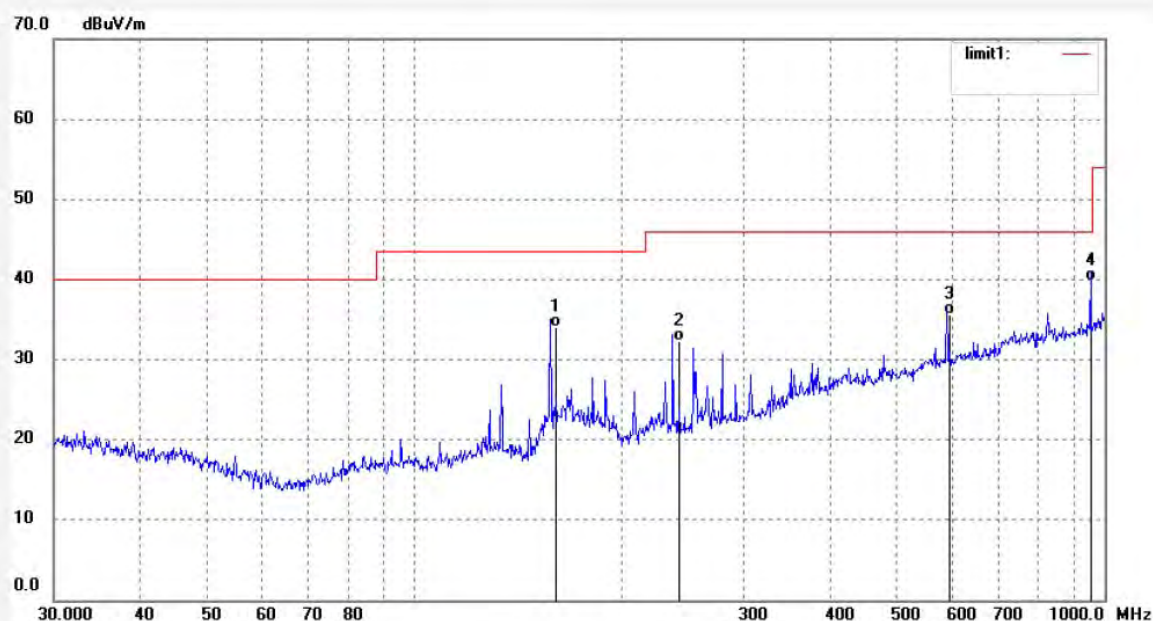

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	19.50	14.60	34.10	43.50	-9.40	QP			
2	239.9850	15.47	16.76	32.23	46.00	-13.77	QP			
3	599.9560	10.06	25.53	35.59	46.00	-10.41	QP			
4	959.9420	10.09	29.69	39.78	46.00	-6.22	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1522

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:20:01

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

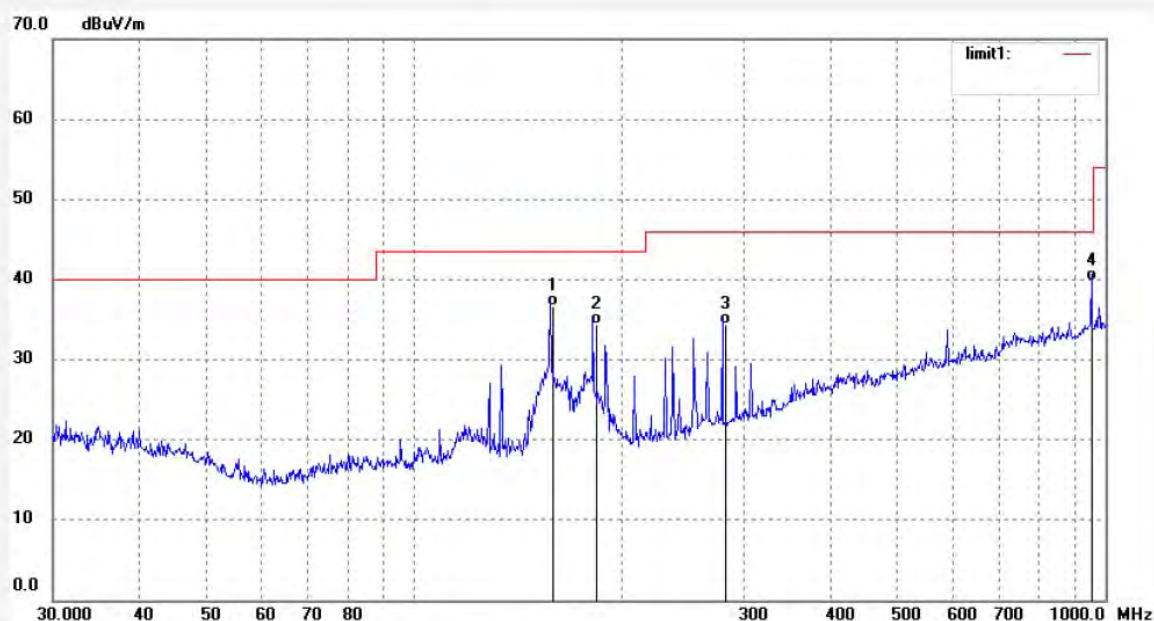

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	22.04	14.60	36.64	43.50	-6.86	QP			
2	184.3040	18.51	15.91	34.42	43.50	-9.08	QP			
3	282.5960	16.10	18.37	34.47	46.00	-11.53	QP			
4	959.9420	10.04	29.69	39.73	46.00	-6.27	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1533

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:02:59

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

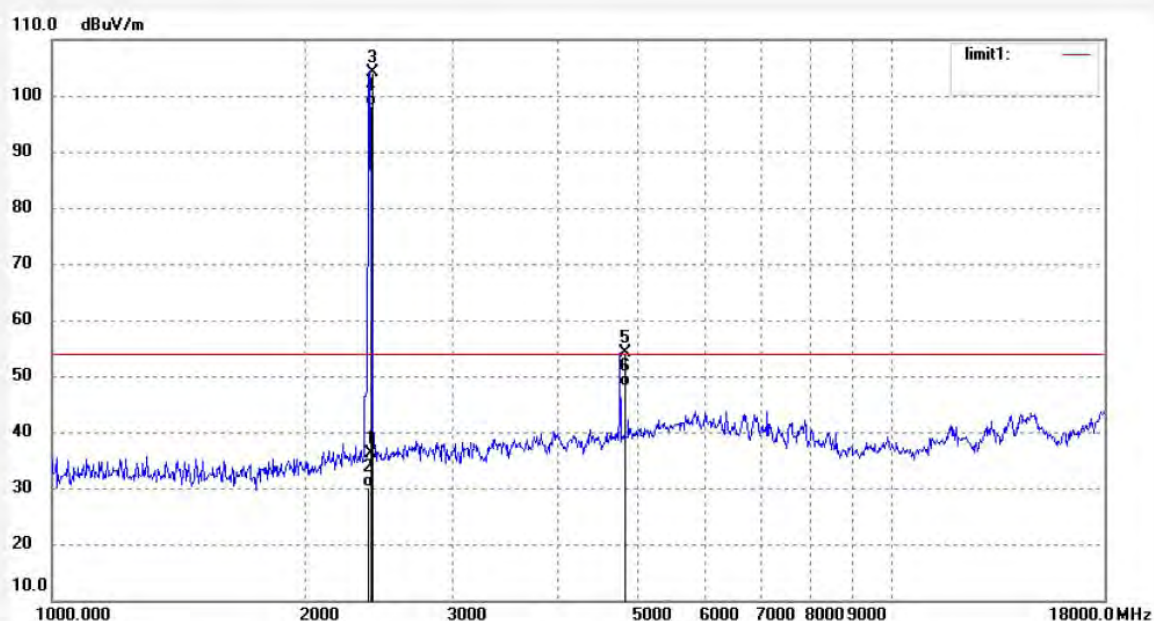

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	43.48	-7.46	36.02	74.00	-37.98	peak			
2	2400.000	37.52	-7.46	30.06	54.00	-23.94	AVG			
3	2412.020	111.56	-7.43	104.13	-	-	peak			
4	2412.020	105.59	-7.43	98.16	-	-	AVG			
5	4824.036	54.22	-0.19	54.03	74.00	-19.97	peak			
6	4824.036	48.22	-0.19	48.03	54.00	-5.97	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1534

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:07:10

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

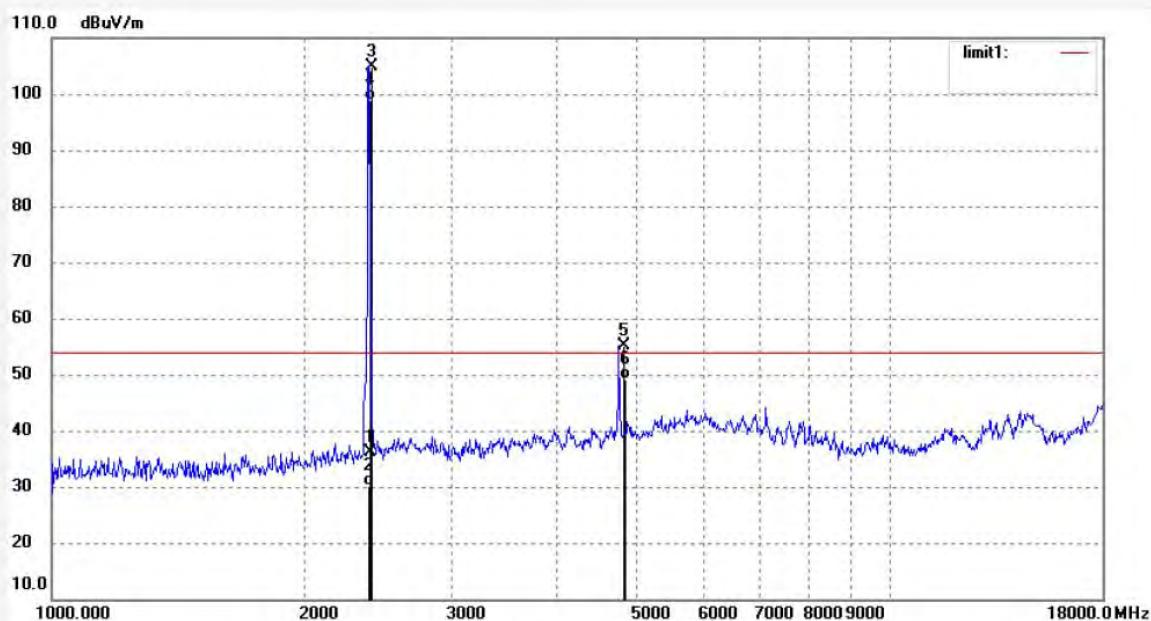

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	43.58	-7.46	36.12	74.00	-37.88	peak			
2	2400.000	37.59	-7.46	30.13	54.00	-23.87	AVG			
3	2412.020	112.43	-7.43	105.00	-	-	peak			
4	2412.020	106.42	-7.43	98.99	-	-	AVG			
5	4824.036	55.22	-0.19	55.03	74.00	-18.97	peak			
6	4824.036	49.21	-0.19	49.02	54.00	-4.98	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1545

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:57:50

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

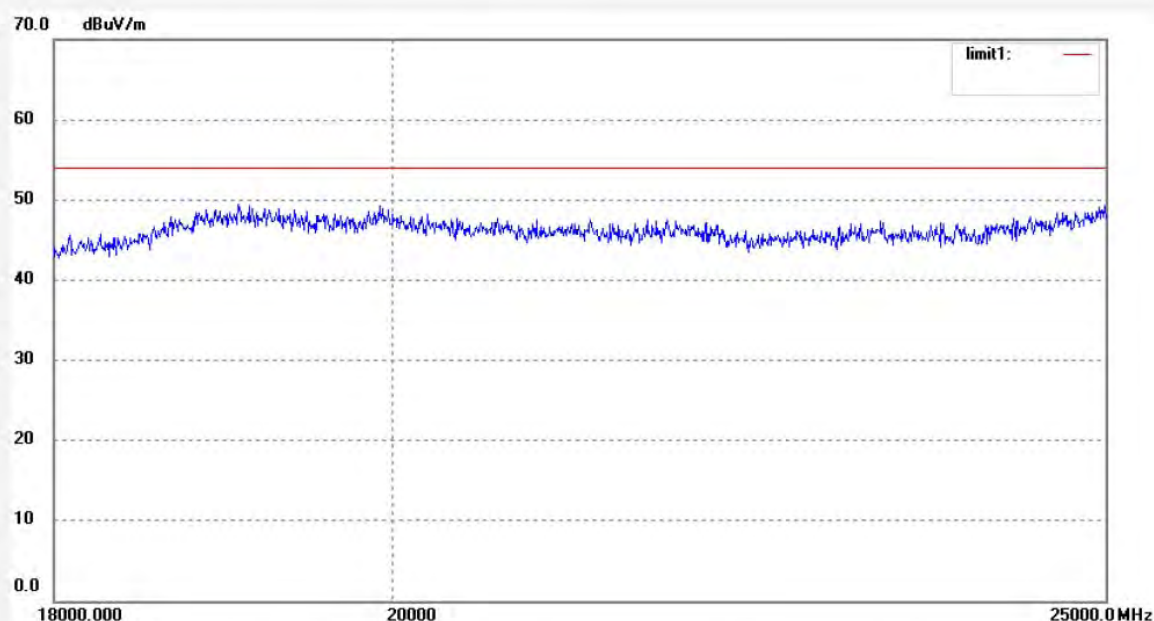

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1546

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:01:26

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

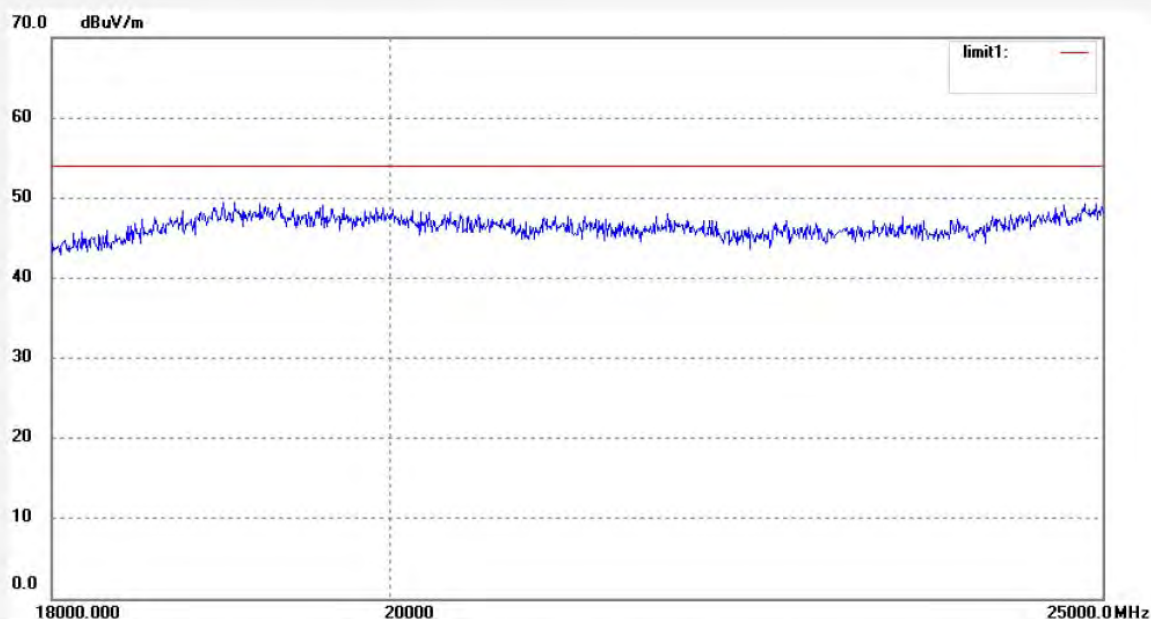

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1524

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:27:54

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

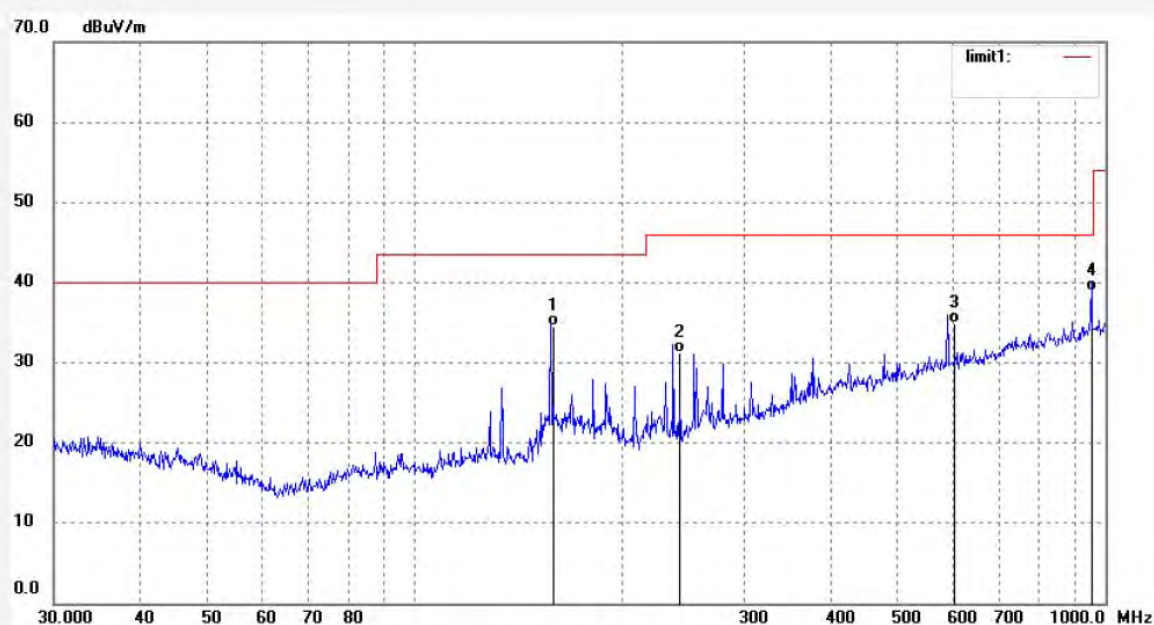

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	20.01	14.60	34.61	43.50	-8.89	QP			
2	239.9850	14.44	16.76	31.20	46.00	-14.80	QP			
3	599.9560	9.36	25.53	34.89	46.00	-11.11	QP			
4	959.9420	9.33	29.69	39.02	46.00	-6.98	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1523

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:24:22

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

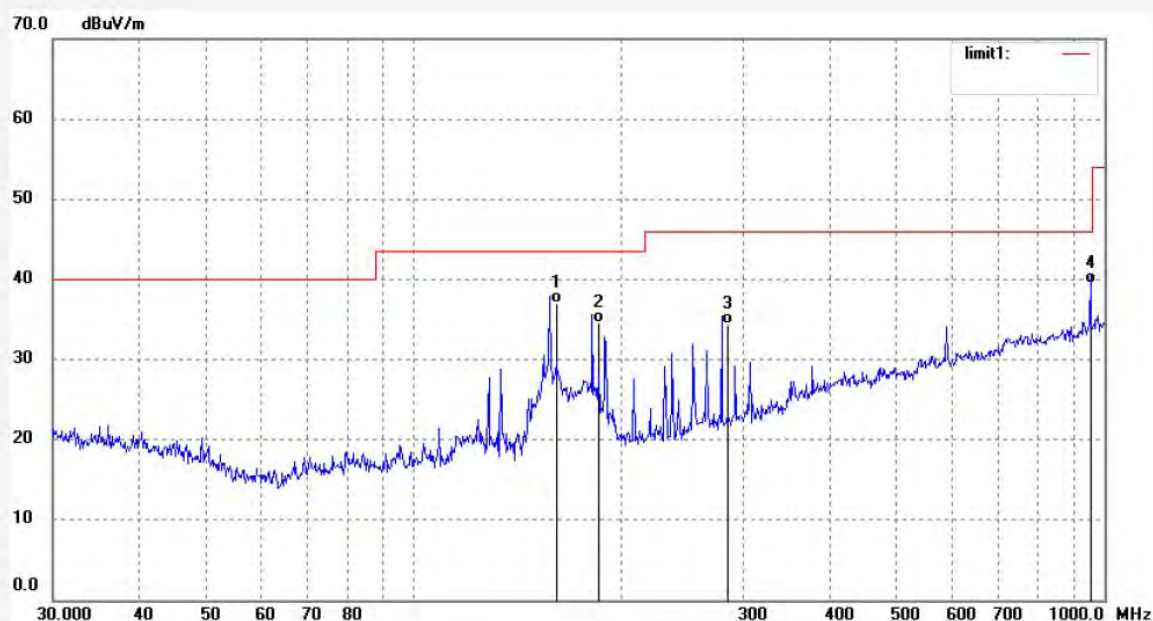

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	22.36	14.60	36.96	43.50	-6.54	QP			
2	184.3040	18.65	15.91	34.56	43.50	-8.94	QP			
3	282.5960	16.04	18.37	34.41	46.00	-11.59	QP			
4	959.9420	9.74	29.69	39.43	46.00	-6.57	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1536

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:15:49

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

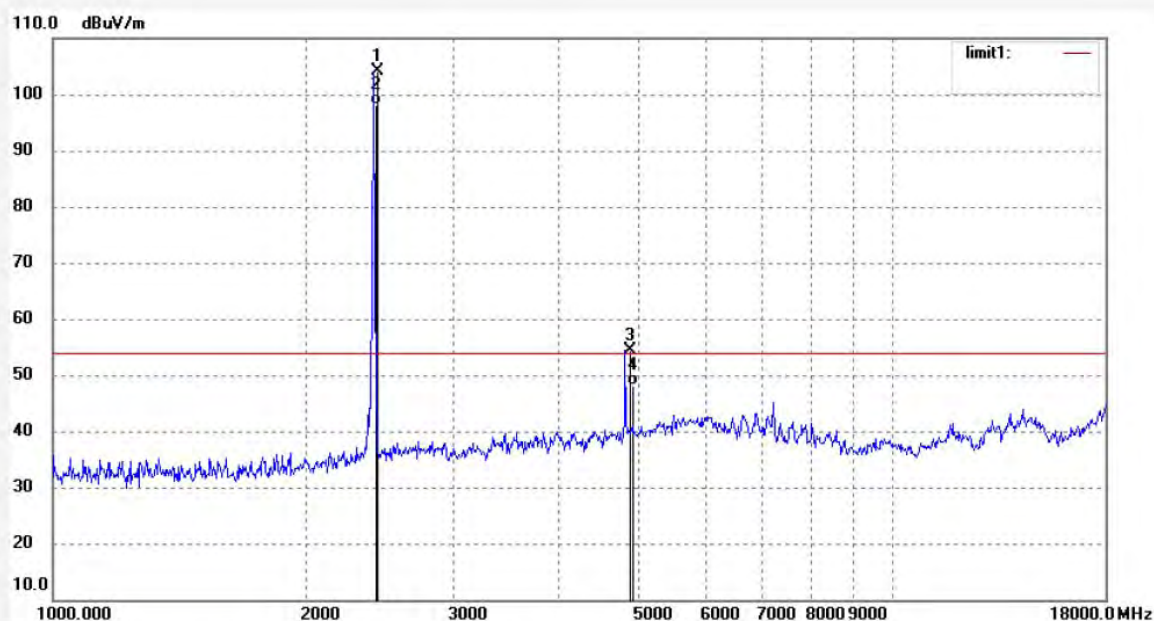

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.018	111.55	-7.36	104.19	-	-	peak			
2	2437.018	105.51	-7.36	98.15	-	-	AVG			
3	4874.032	54.20	0.09	54.29	74.00	-19.71	peak			
4	4874.032	48.16	0.09	48.25	54.00	-5.75	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1535

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:11:41

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

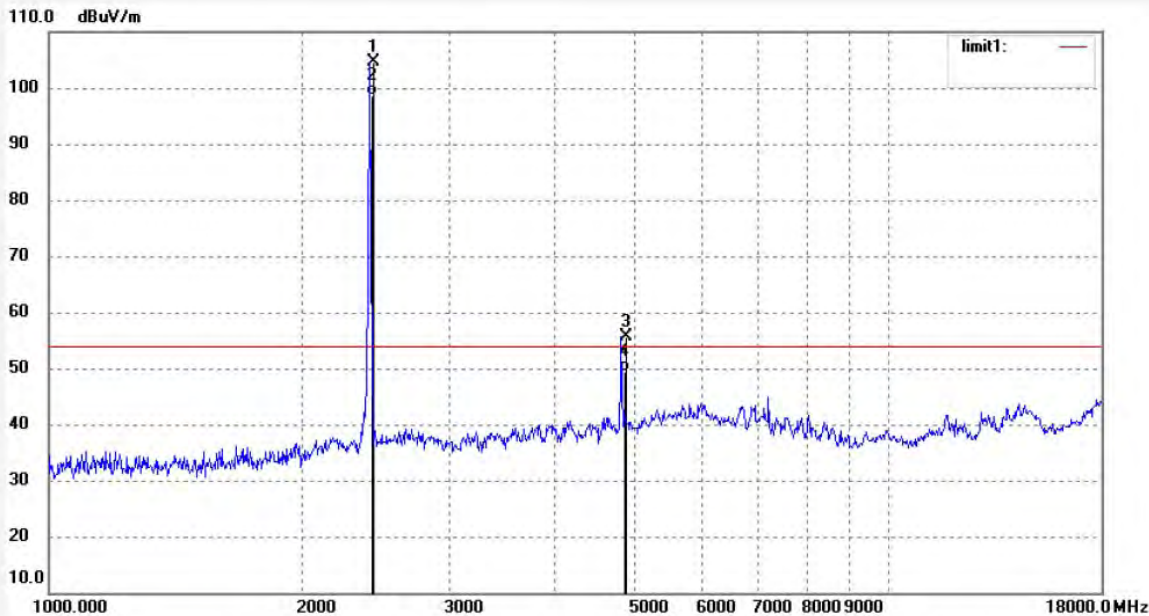

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.018	112.10	-7.36	104.74	-	-	peak			
2	2437.018	106.08	-7.36	98.72	-	-	AVG			
3	4874.032	55.45	0.09	55.54	74.00	-18.46	peak			
4	4874.032	49.41	0.09	49.50	54.00	-4.50	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1548

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:09:14

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

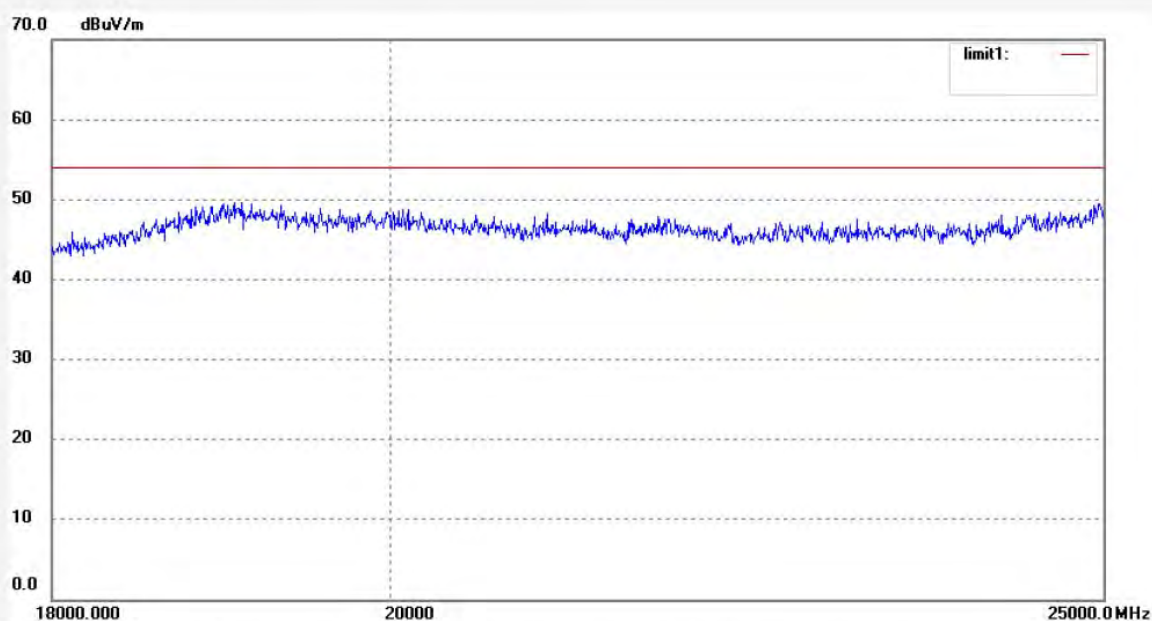

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1547

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:05:40

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

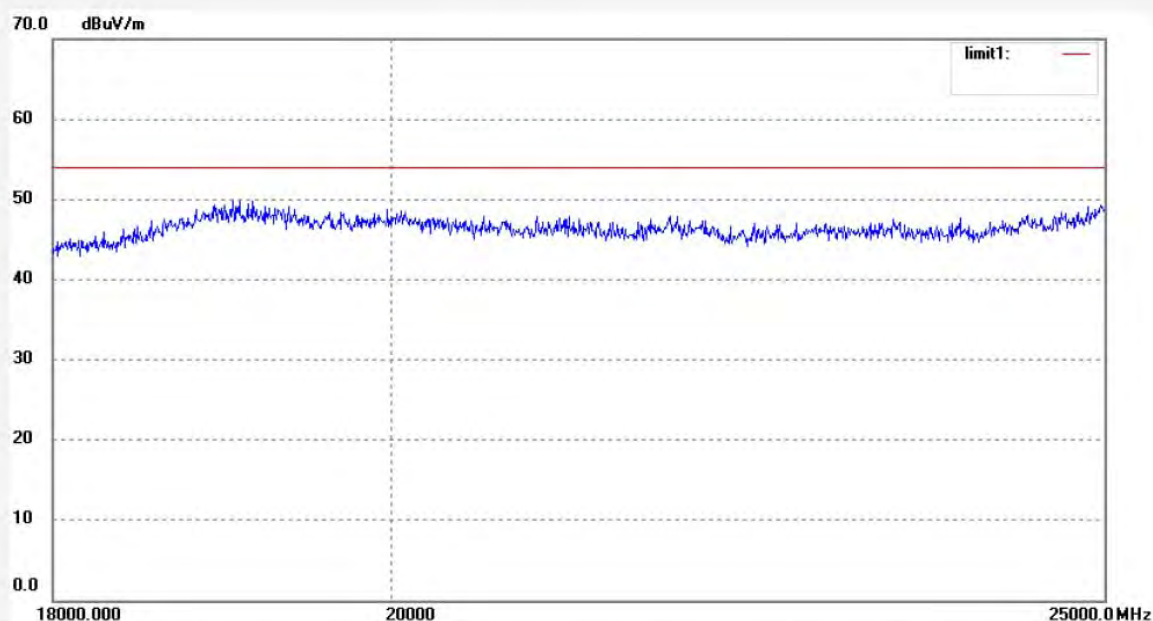

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1525

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:32:20

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

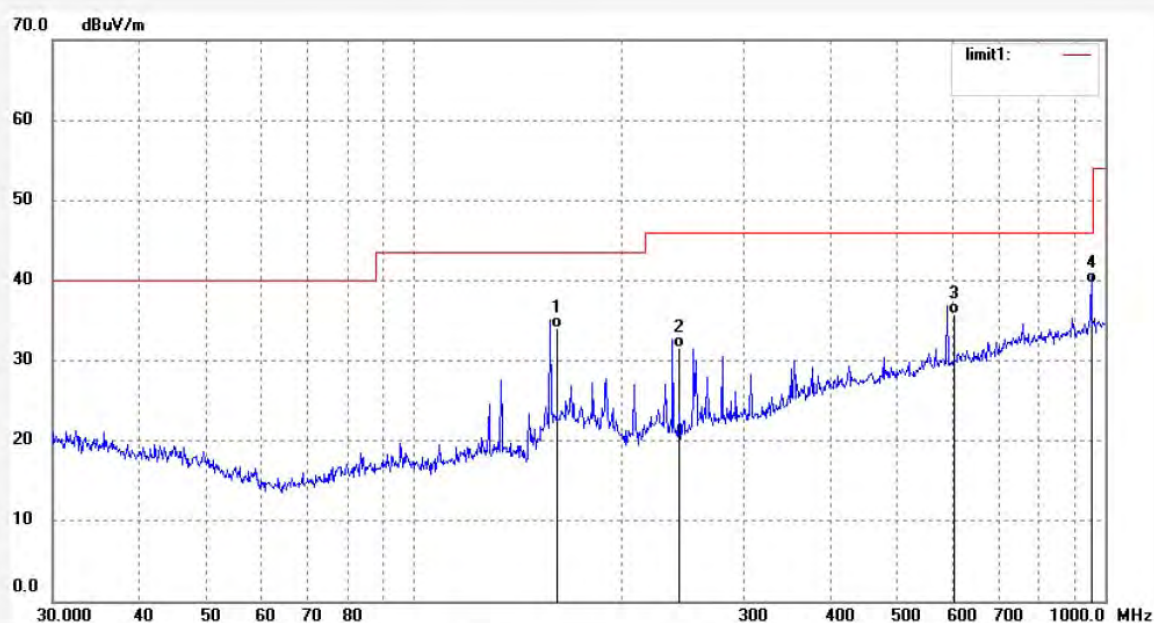

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	19.43	14.60	34.03	43.50	-9.47	QP			
2	239.9850	14.82	16.76	31.58	46.00	-14.42	QP			
3	599.9560	10.23	25.53	35.76	46.00	-10.24	QP			
4	959.9420	9.93	29.69	39.62	46.00	-6.38	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1526

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:35:53

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

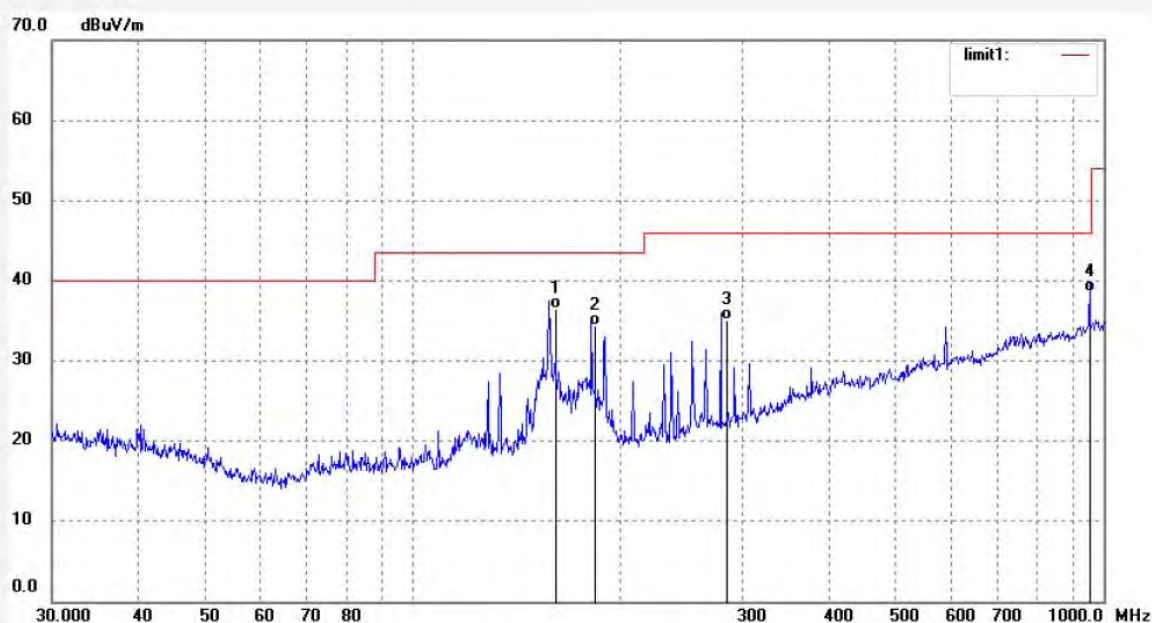

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	21.97	14.60	36.57	43.50	-6.93	QP			
2	184.3040	18.48	15.91	34.39	43.50	-9.11	QP			
3	282.5960	16.66	18.37	35.03	46.00	-10.97	QP			
4	959.9420	8.92	29.69	38.61	46.00	-7.39	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1537

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:20:24

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

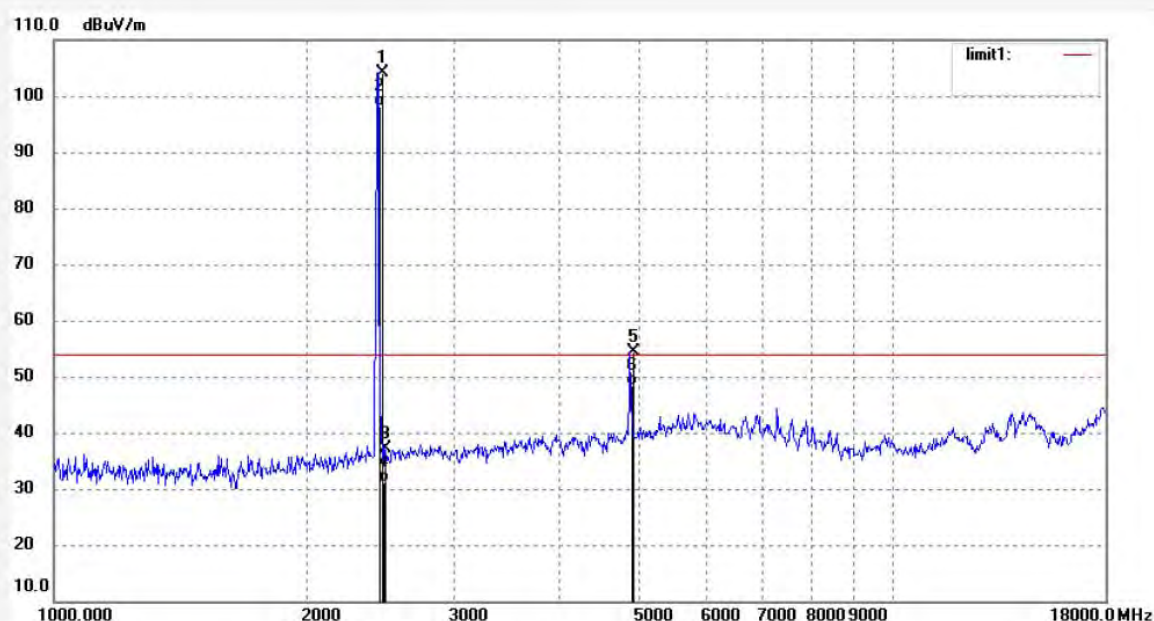

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.020	111.45	-7.35	104.10	-	-	peak			
2	2462.020	105.44	-7.35	98.09	-	-	AVG			
3	2483.500	44.55	-7.37	37.18	74.00	-36.82	peak			
4	2483.500	38.54	-7.37	31.17	54.00	-22.83	AVG			
5	4924.038	53.96	0.34	54.30	74.00	-19.70	peak			
6	4924.038	47.93	0.34	48.27	54.00	-5.73	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1538

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:24:30

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

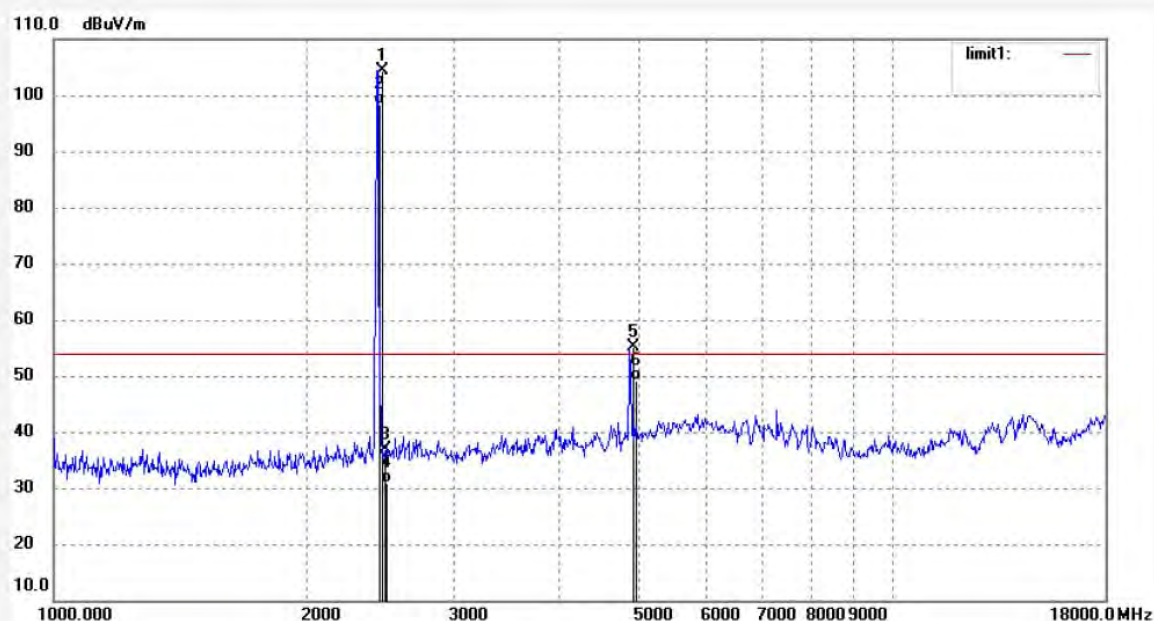

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.020	111.79	-7.35	104.44	-	-	peak			
2	2462.020	105.77	-7.35	98.42	-	-	AVG			
3	2483.500	44.22	-7.37	36.85	74.00	-37.15	peak			
4	2483.500	38.21	-7.37	30.84	54.00	-23.16	AVG			
5	4924.038	54.79	0.34	55.13	74.00	-18.87	peak			
6	4924.038	48.75	0.34	49.09	54.00	-4.91	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1549

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:13:25

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

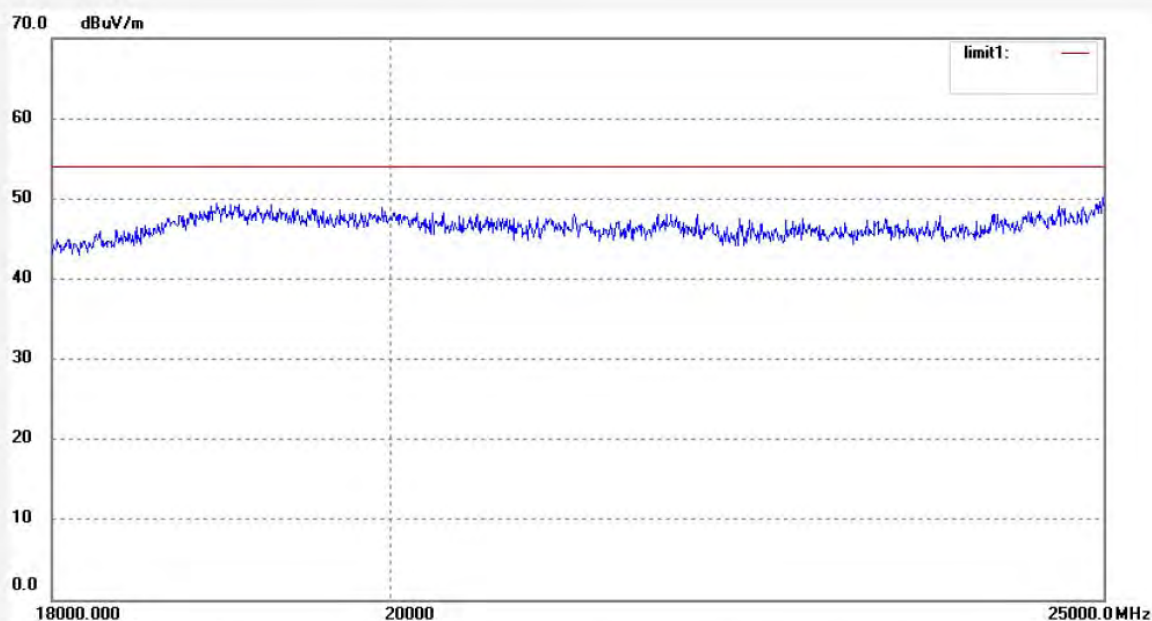

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1550

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11b)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:16:58

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

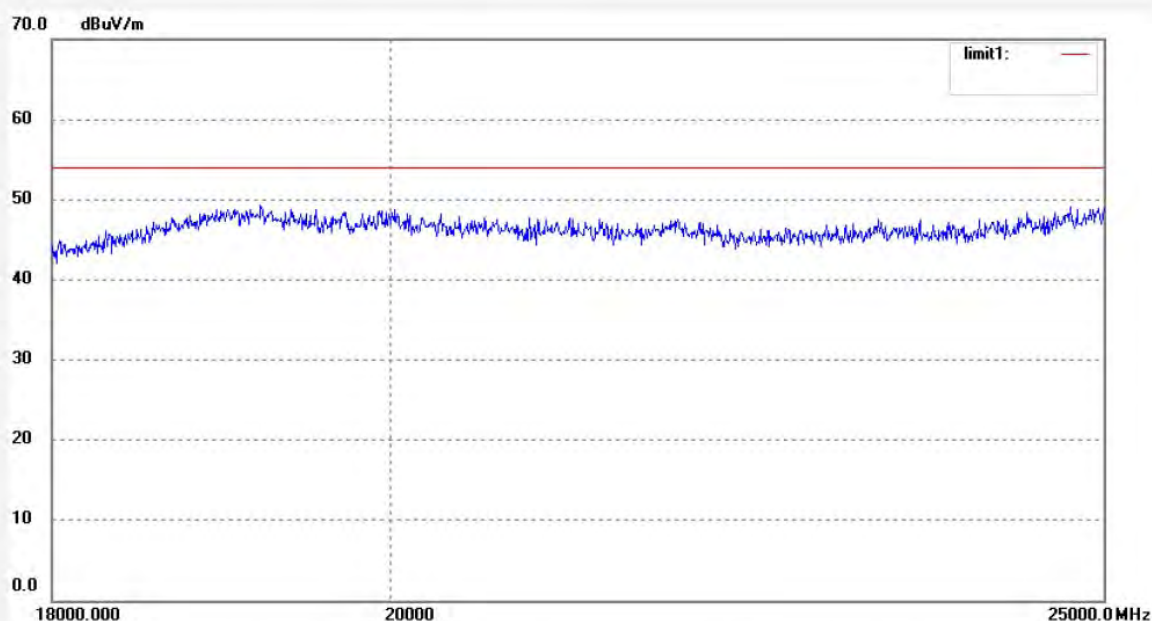

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1528

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:44:45

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

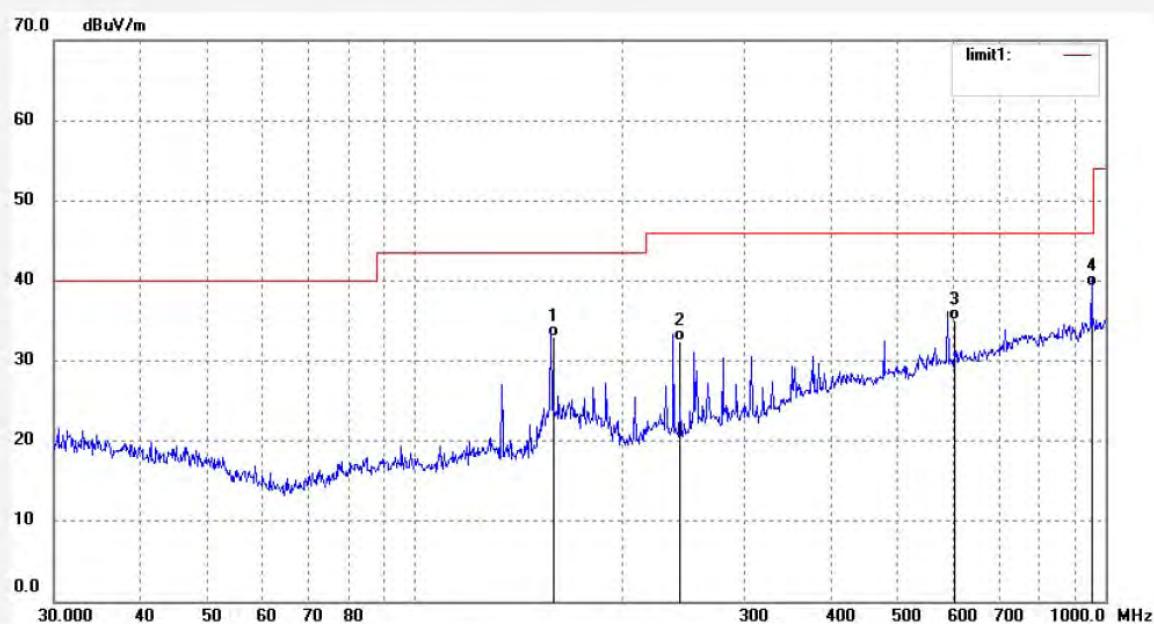

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	18.34	14.60	32.94	43.50	-10.56	QP			
2	239.9850	15.63	16.76	32.39	46.00	-13.61	QP			
3	599.9560	9.57	25.53	35.10	46.00	-10.90	QP			
4	959.9420	9.57	29.69	39.26	46.00	-6.74	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1527

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:41:11

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

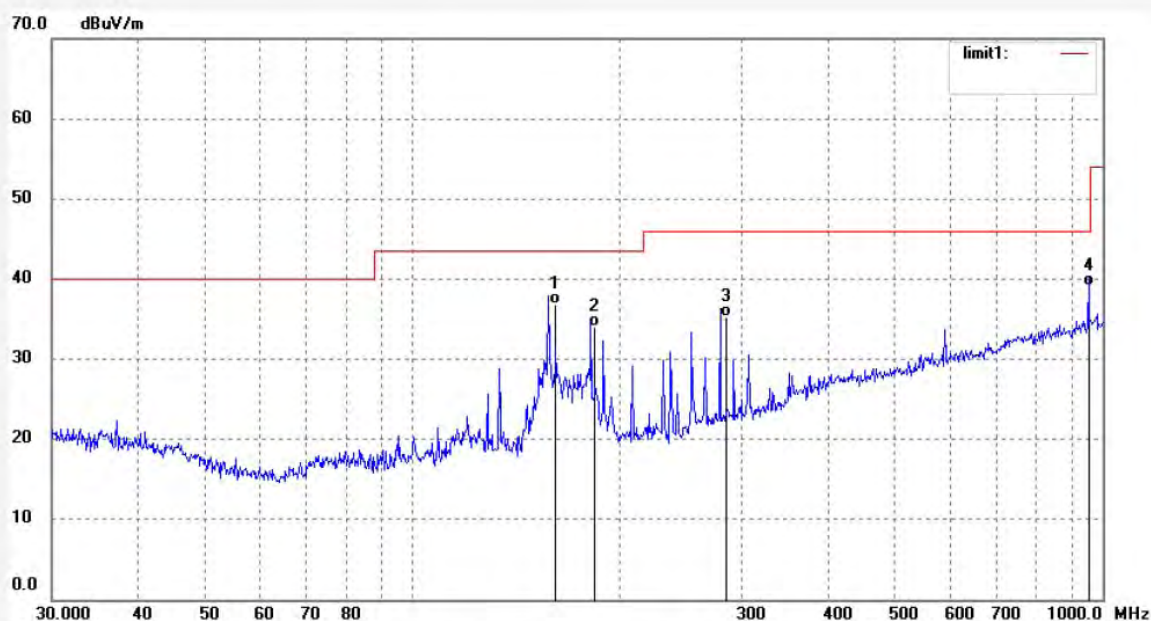

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	22.23	14.60	36.83	43.50	-6.67	QP			
2	184.3040	18.18	15.91	34.09	43.50	-9.41	QP			
3	282.5960	16.86	18.37	35.23	46.00	-10.77	QP			
4	959.9420	9.47	29.69	39.16	46.00	-6.84	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1540

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:34:36

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

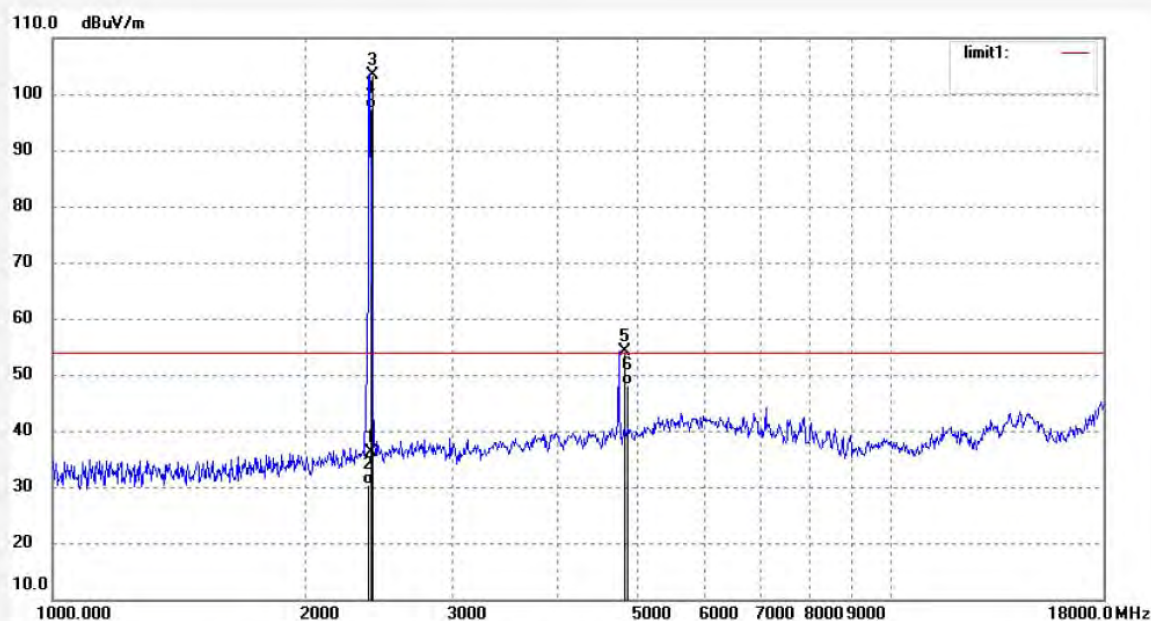

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	43.71	-7.46	36.25	74.00	-37.75	peak			
2	2400.000	37.72	-7.46	30.26	54.00	-23.74	AVG			
3	2412.016	110.86	-7.43	103.43	-	-	peak			
4	2412.016	104.82	-7.43	97.39	-	-	AVG			
5	4824.028	54.40	-0.19	54.21	74.00	-19.79	peak			
6	4824.028	48.36	-0.19	48.17	54.00	-5.83	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1539

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:30:27

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

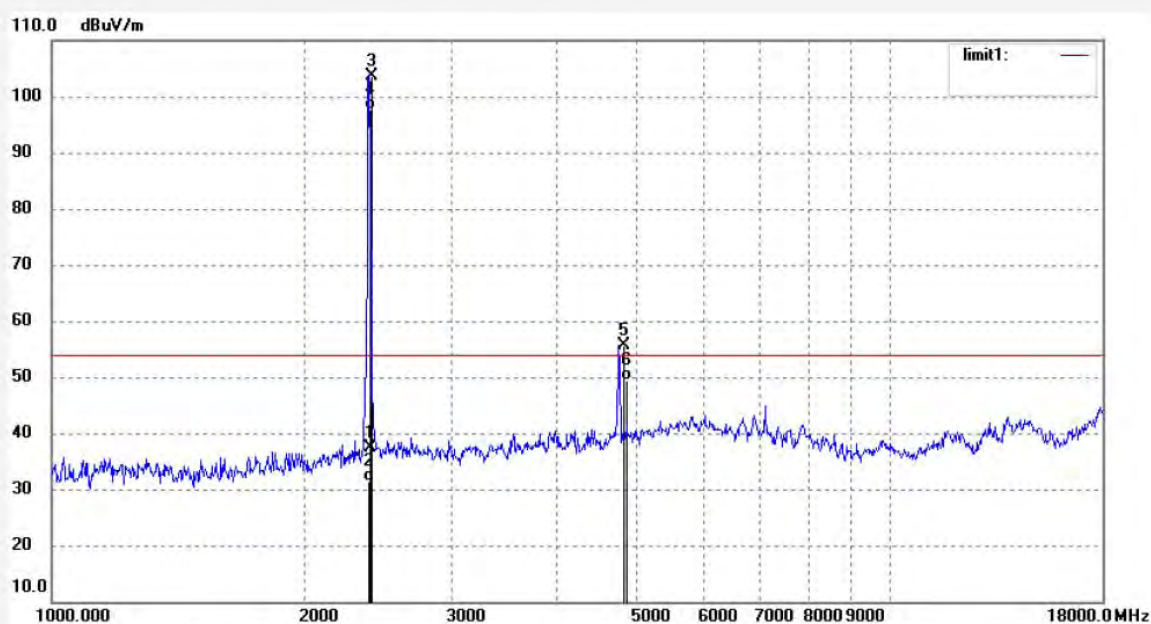

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	44.95	-7.46	37.49	74.00	-36.51	peak			
2	2400.000	38.92	-7.46	31.46	54.00	-22.54	AVG			
3	2412.016	111.16	-7.43	103.73	-	-	peak			
4	2412.016	105.11	-7.43	97.68	-	-	AVG			
5	4824.028	55.74	-0.19	55.55	74.00	-18.45	peak			
6	4824.028	49.69	-0.19	49.50	54.00	-4.50	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1552

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:26:21

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

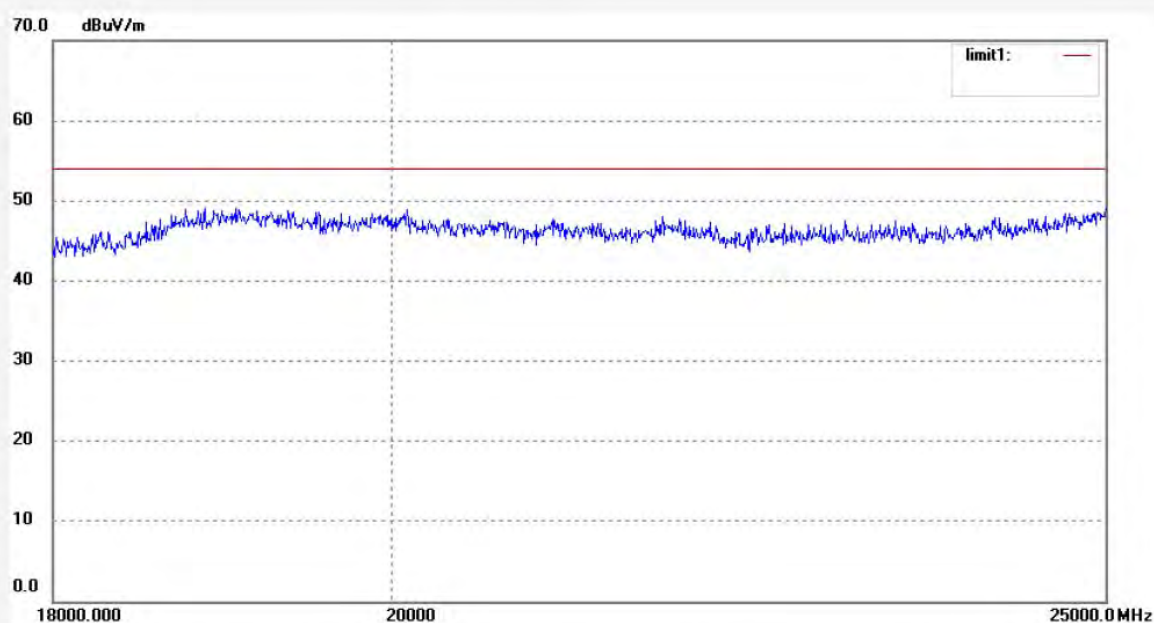

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1551

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 1 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:22:46

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

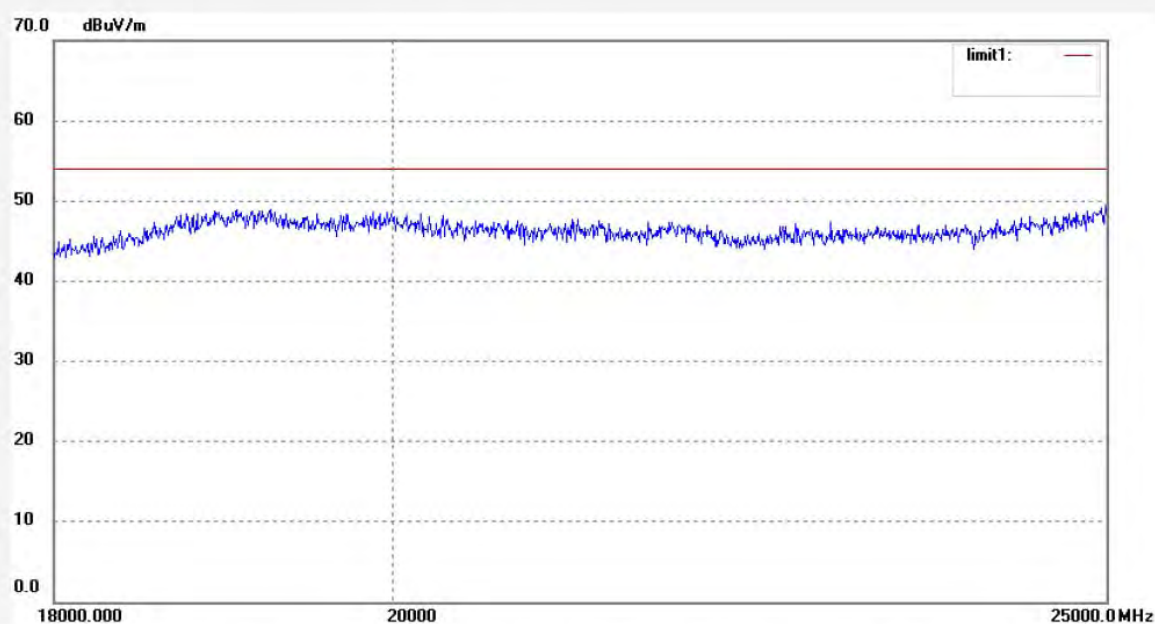

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1529

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:49:22

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

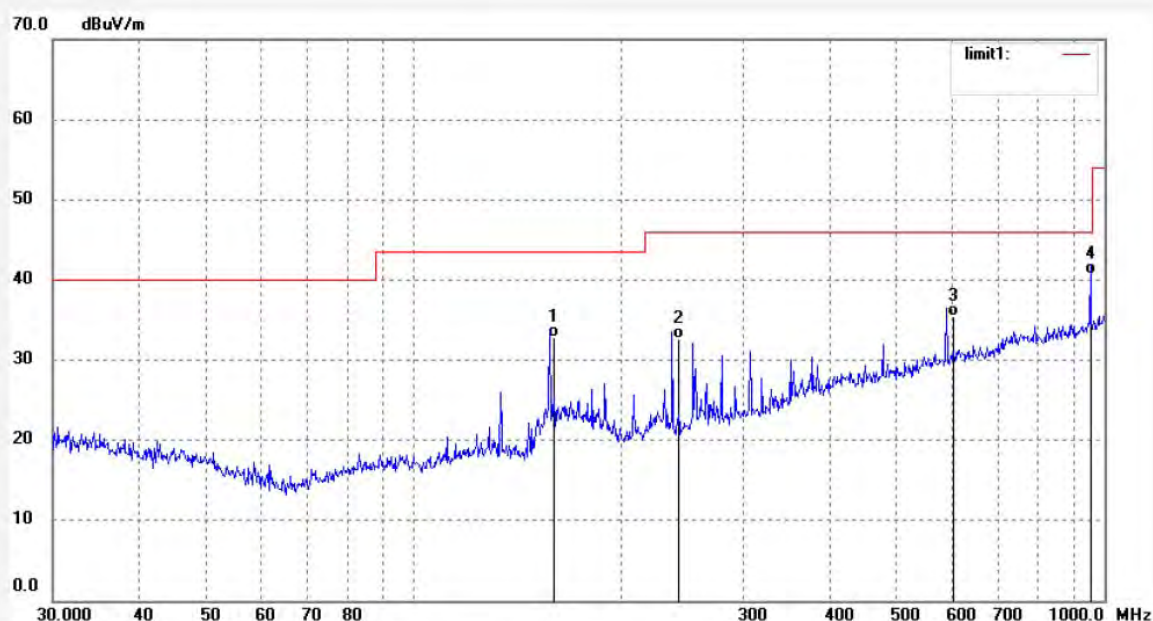

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	18.18	14.60	32.78	43.50	-10.72	QP			
2	239.9850	15.80	16.76	32.56	46.00	-13.44	QP			
3	599.9560	9.99	25.53	35.52	46.00	-10.48	QP			
4	959.9420	11.05	29.69	40.74	46.00	-5.26	QP			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1530

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:52:57

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

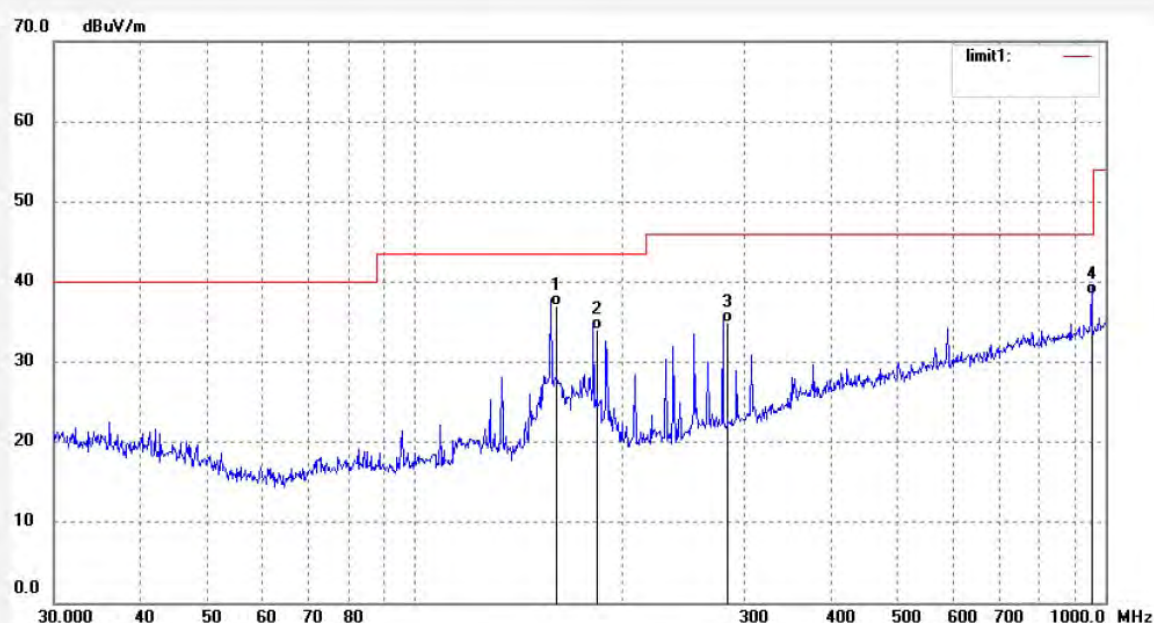

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	22.35	14.60	36.95	43.50	-6.55	QP			
2	184.3040	18.14	15.91	34.05	43.50	-9.45	QP			
3	282.5960	16.53	18.37	34.90	46.00	-11.10	QP			
4	959.9420	8.74	29.69	38.43	46.00	-7.57	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1541

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:38:58

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

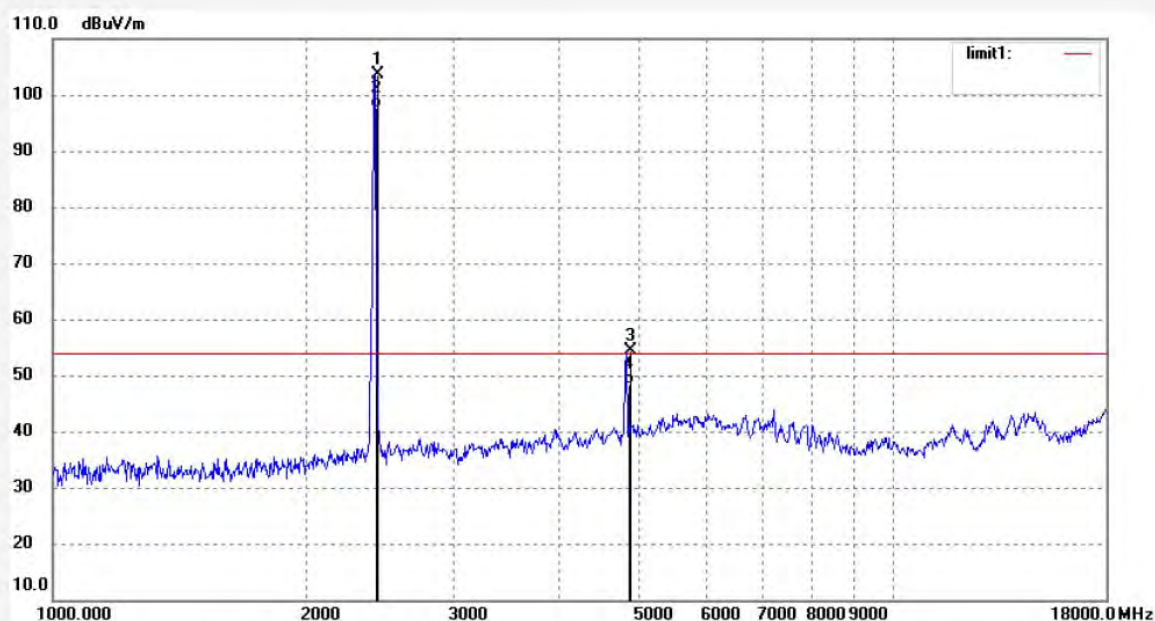

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.018	110.95	-7.36	103.59	-	-	peak			
2	2437.018	104.90	-7.36	97.54	-	-	AVG			
3	4874.030	54.32	0.09	54.41	74.00	-19.59	peak			
4	4874.030	48.28	0.09	48.37	54.00	-5.63	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1542

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:43:06

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

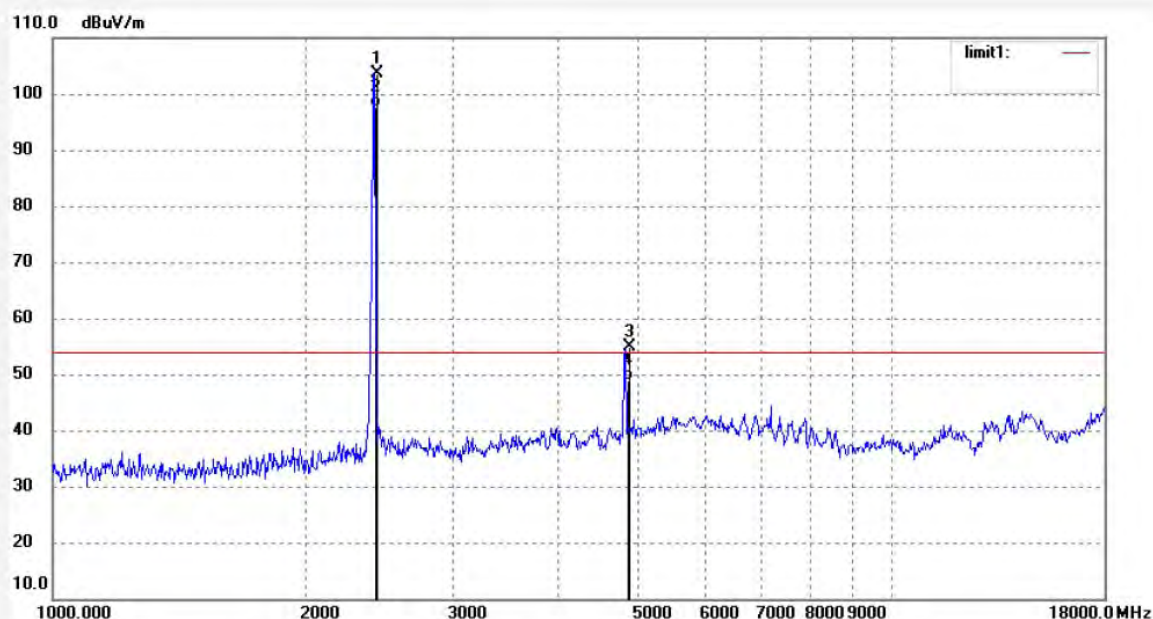

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.018	111.07	-7.36	103.71	-	-	peak			
2	2437.018	105.04	-7.36	97.68	-	-	AVG			
3	4874.030	54.91	0.09	55.00	74.00	-19.00	peak			
4	4874.030	48.88	0.09	48.97	54.00	-5.03	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1553

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:30:38

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

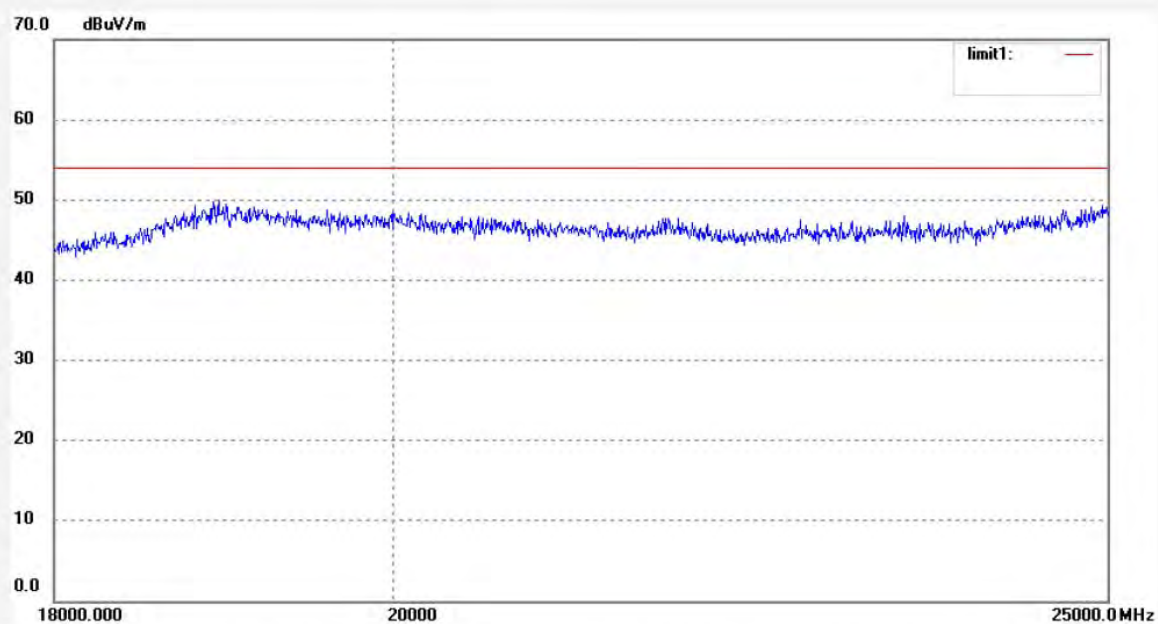

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1554

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 6 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:34:11

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

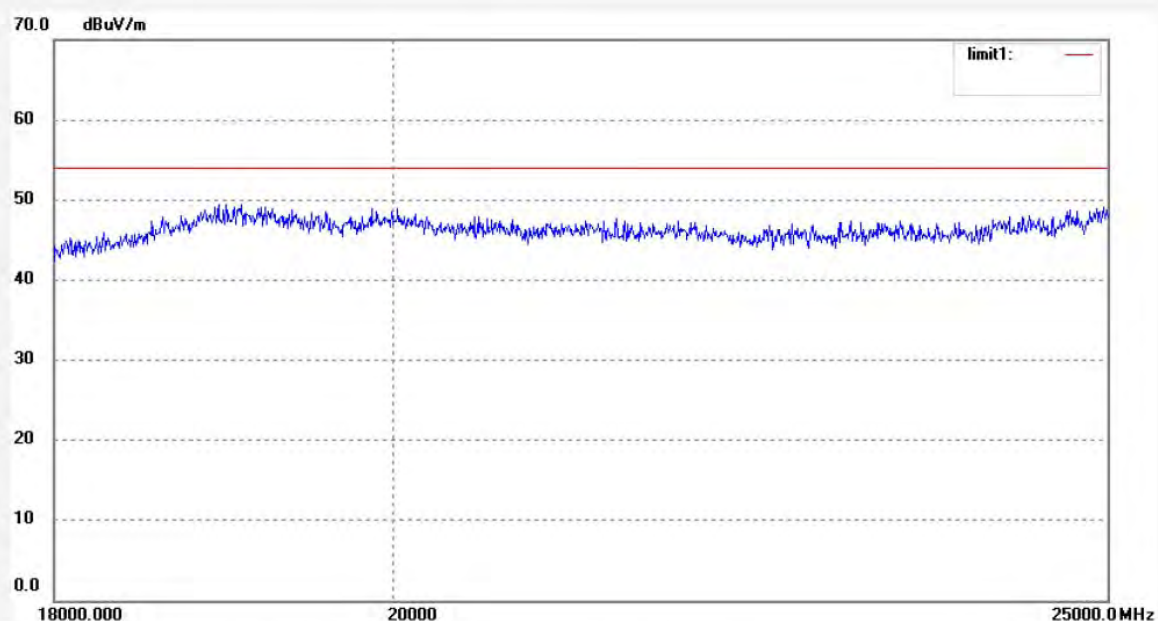

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1532

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 11:01:07

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

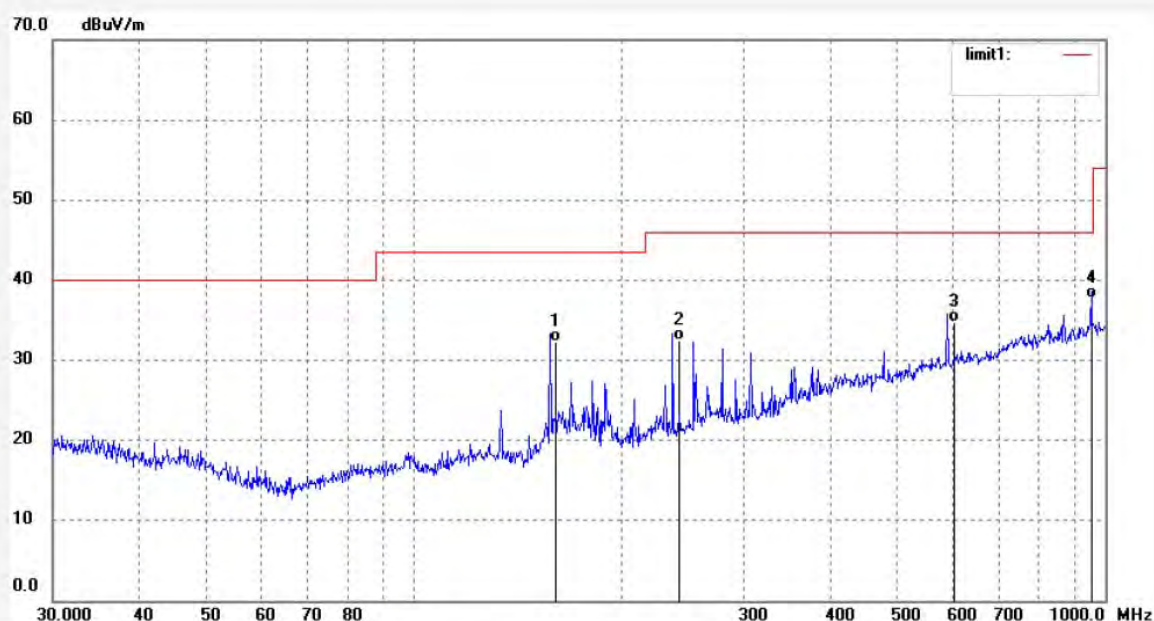

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	17.66	14.60	32.26	43.50	-11.24	QP			
2	239.9850	15.65	16.76	32.41	46.00	-13.59	QP			
3	599.9560	9.22	25.53	34.75	46.00	-11.25	QP			
4	959.9420	8.06	29.69	37.75	46.00	-8.25	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1531

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channel 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 10:57:36

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

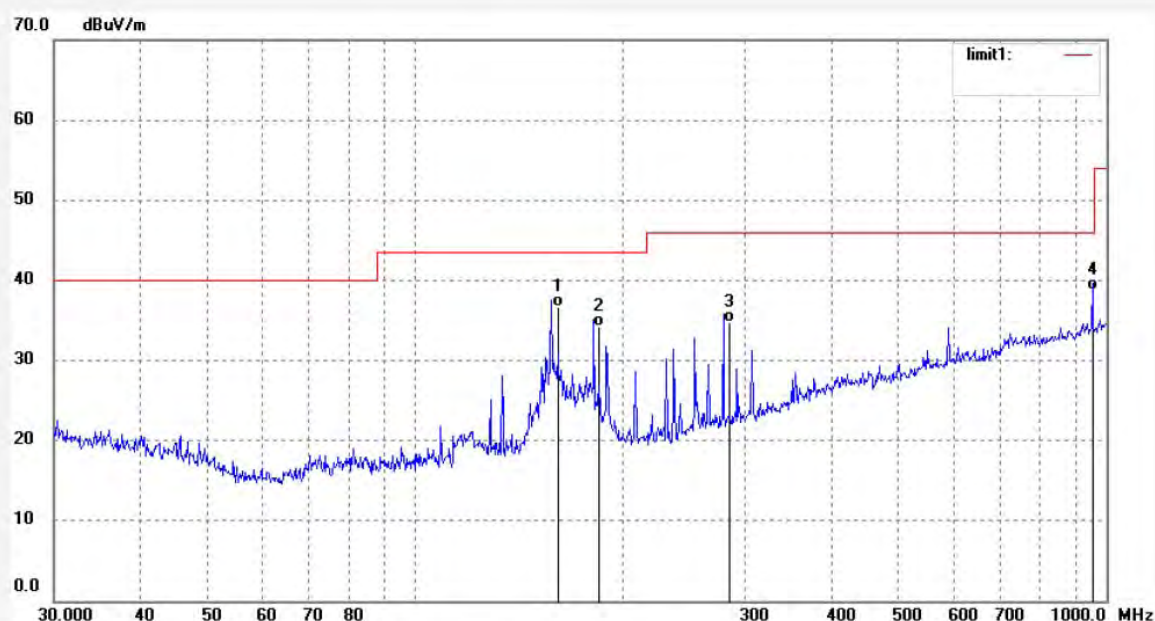

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	159.7340	21.99	14.60	36.59	43.50	-6.91	QP			
2	184.3040	18.26	15.91	34.17	43.50	-9.33	QP			
3	282.5960	16.36	18.37	34.73	46.00	-11.27	QP			
4	959.9420	9.02	29.69	38.71	46.00	-7.29	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #1544

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:51:23

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

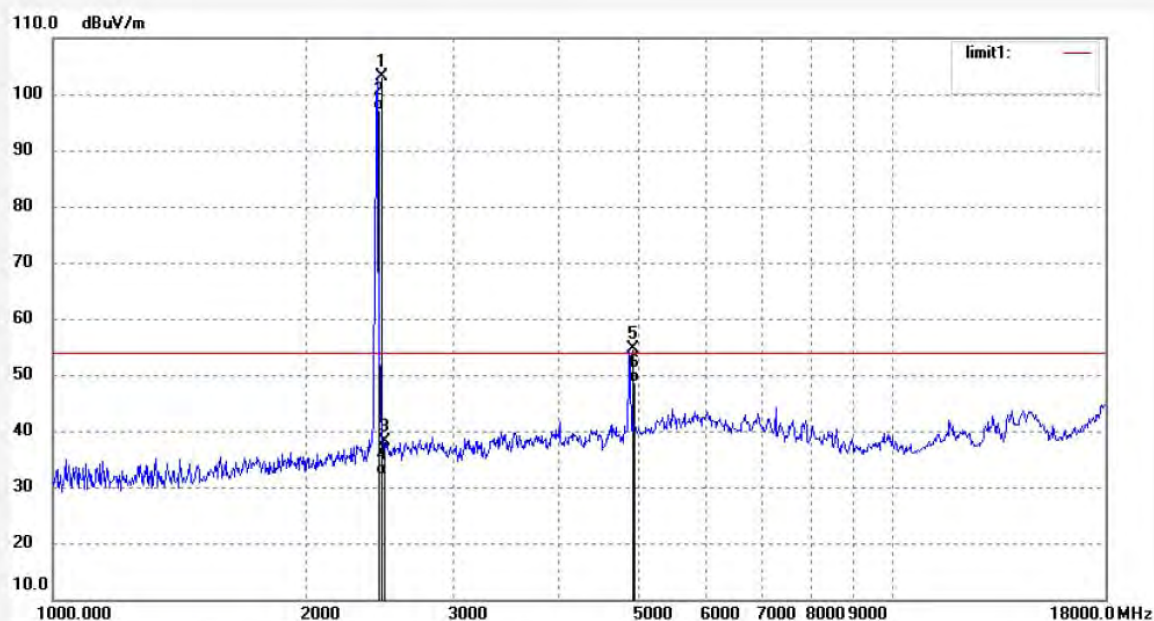

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.017	110.60	-7.35	103.25	-	-	peak			
2	2462.017	104.57	-7.35	97.22	-	-	AVG			
3	2483.500	45.61	-7.37	38.24	74.00	-35.76	peak			
4	2483.500	39.56	-7.37	32.19	54.00	-21.81	AVG			
5	4924.031	54.26	0.34	54.60	74.00	-19.40	peak			
6	4924.031	48.22	0.34	48.56	54.00	-5.44	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1543

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 14:47:17

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

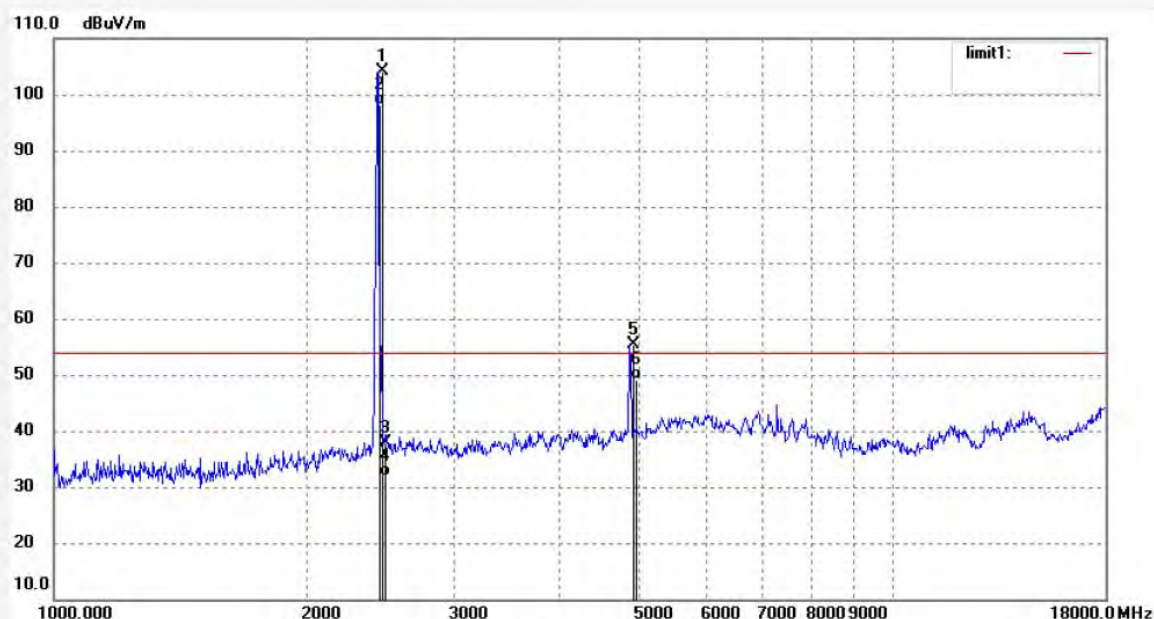

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2462.017	111.46	-7.35	104.11	-	-	peak			
2	2462.017	105.44	-7.35	98.09	-	-	AVG			
3	2483.500	45.18	-7.37	37.81	74.00	-36.19	peak			
4	2483.500	39.19	-7.37	31.82	54.00	-22.18	AVG			
5	4924.031	54.92	0.34	55.26	74.00	-18.74	peak			
6	4924.031	48.90	0.34	49.24	54.00	-4.76	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1556

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:41:59

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

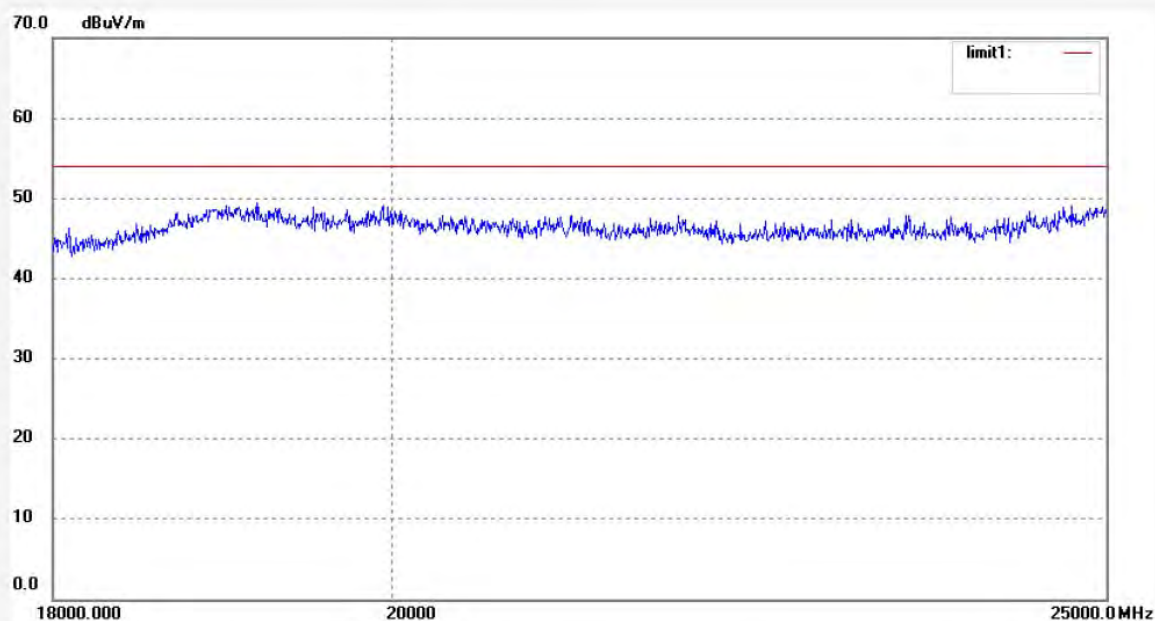

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #1555

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: PURE Contour

Mode: TX Channal 11 (802.11g)

Model: VL-61394

Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2011/02/14

Time: 15:38:24

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:110121 Report No.:ATE20110148

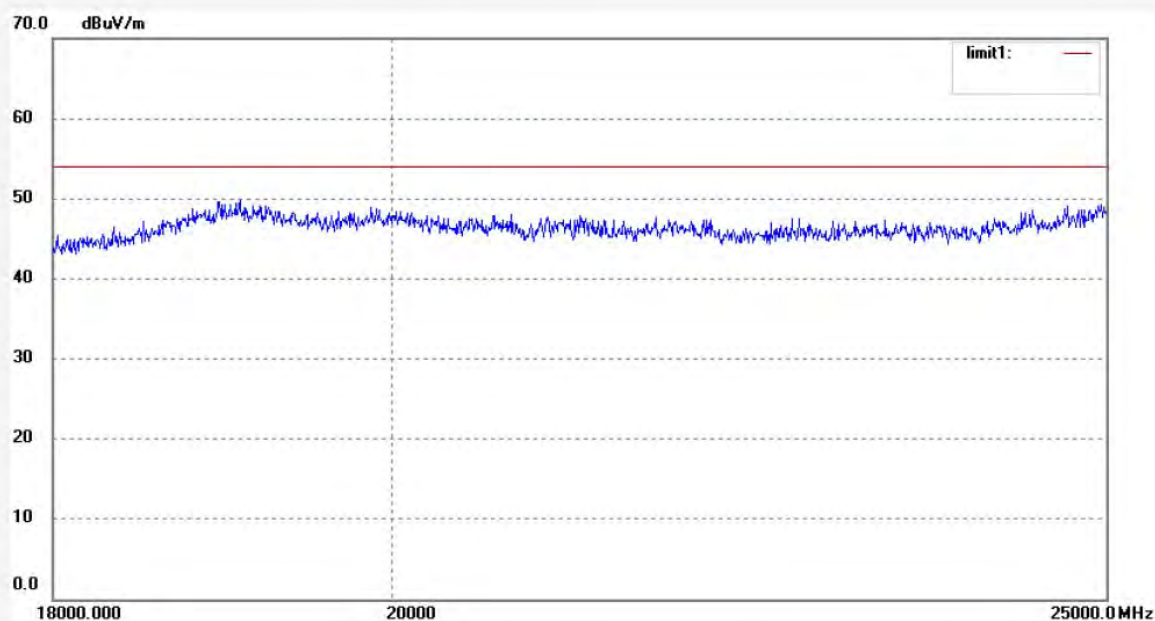


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

10.AC POWER LINE CONDUCTED EMISSION FOR FCC PART


15 SECTION 15.207(A)

10.1.Block Diagram of Test Setup

10.1.1.Block diagram of connection between the EUT and simulators

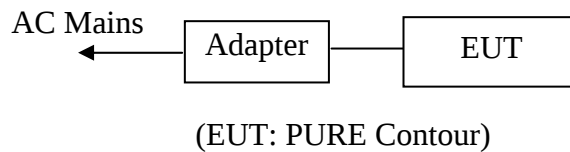

10.1.2.Shielding Room Test Setup Diagram

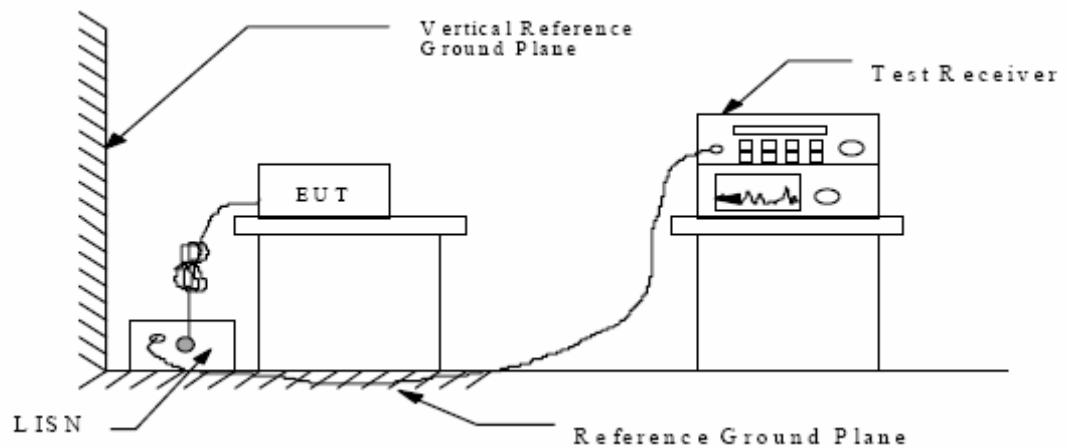

10.2.The Emission Limit

10.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

10.3.Configuration of EUT on Measurement

The following equipments are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.PURE Contour (EUT)

Model Number : VL-61394
Serial Number : N/A
Manufacturer : Zhao Yang Elec. (Shenzhen) Co., Ltd.

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 11.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX (Channel Middle) mode measure it.

10.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

10.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	February 15, 2011	Temperature:	25°C
EUT:	PURE Contour	Humidity:	50%
Model No.:	VL-61394	Power Supply:	AC 120V/60Hz
Test Mode:	TX Channel Middle	Test Engineer:	Joe

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.453242	37.10	56.8	-19.7	QP	Neutral
0.562277	29.80	56.0	-26.2	QP	
0.963832	28.50	56.0	-27.5	QP	
0.460537	29.60	46.7	-17.1	AV	
0.580524	22.90	46.0	-23.1	AV	
0.975445	19.70	46.0	-26.3	AV	
0.456875	40.00	56.7	-16.7	QP	Live
0.589868	32.00	56.0	-24.0	QP	
4.913107	28.60	56.0	-27.4	QP	
0.460537	32.10	46.7	-14.6	AV	
0.582846	24.80	46.0	-21.2	AV	
4.913107	21.60	46.0	-24.4	AV	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: PURE Contour M/N:VL-61394
 Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.
 Operating Condition: TX Channel 6
 Test Site: 1#Shielding Room
 Operator: Joe
 Test Specification: L 120V/60Hz
 Comment: Sample No.:110121 Report No.:ATE20110148
 Start of Test: 2/15/2011 / 4:14:24PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

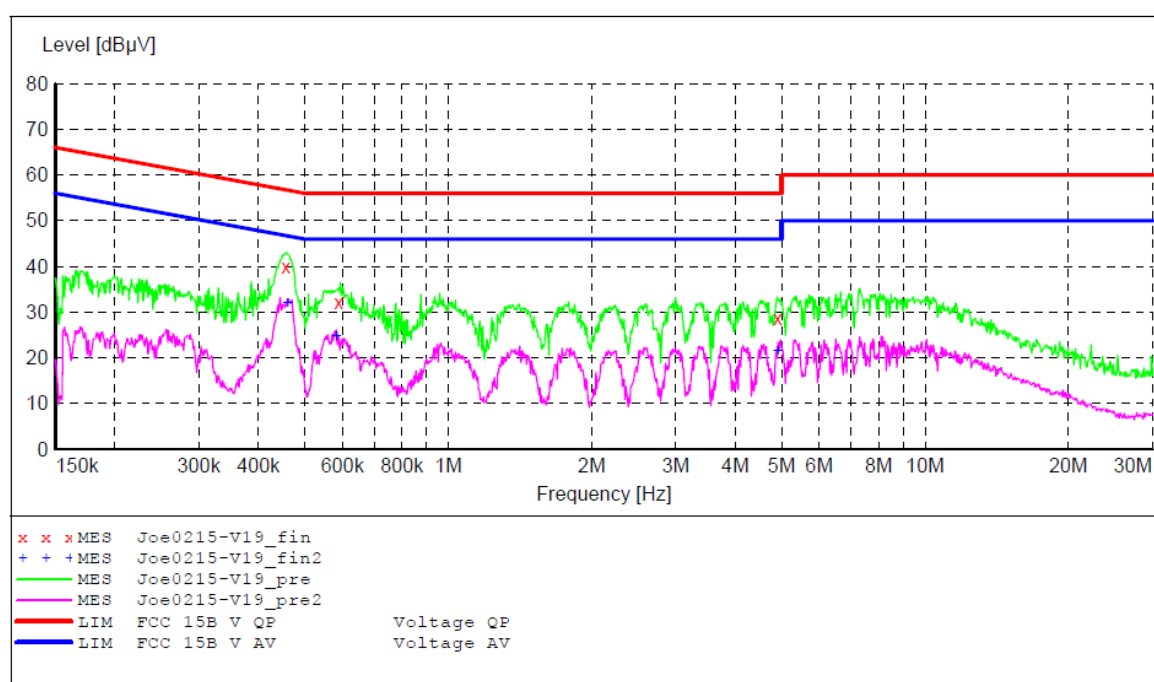**MEASUREMENT RESULT: "Joe0215-V19_fin"**

2/15/2011 4:17PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.456875	40.00	11.9	57	16.7	QP	L1	GND
0.589868	32.00	12.0	56	24.0	QP	L1	GND
4.913107	28.60	11.4	56	27.4	QP	L1	GND

MEASUREMENT RESULT: "Joe0215-V19_fin2"

2/15/2011 4:17PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.460537	32.10	11.9	47	14.6	AV	L1	GND
0.582846	24.80	12.0	46	21.2	AV	L1	GND
4.913107	21.60	11.4	46	24.4	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: PURE Contour M/N:VL-61394
 Manufacturer: Zhao Yang Elec. (Shenzhen) Co., Ltd.
 Operating Condition: TX Channel 6
 Test Site: 1#Shielding Room
 Operator: Joe
 Test Specification: N 120V/60Hz
 Comment: Sample No.:110121 Report No.:ATE20110148
 Start of Test: 2/15/2011 / 4:17:52PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

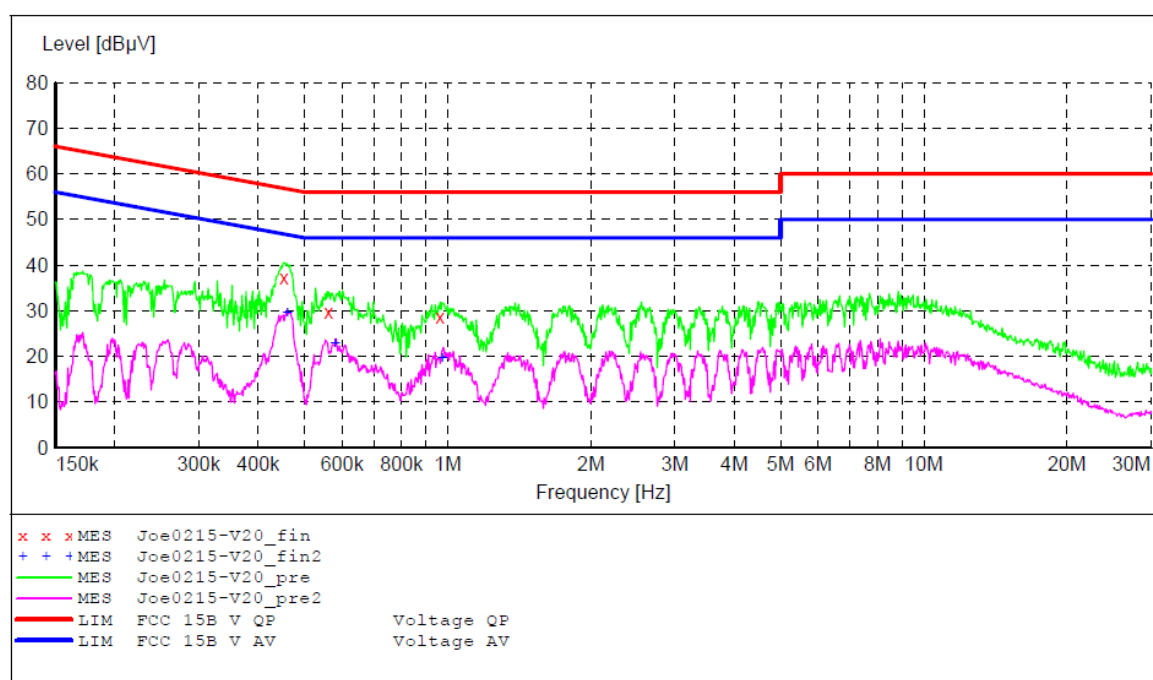**MEASUREMENT RESULT: "Joe0215-V20_fin"**

2/15/2011 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.453242	37.10	11.9	57	19.7	QP	N	GND
0.562277	29.80	12.0	56	26.2	QP	N	GND
0.963832	28.50	11.8	56	27.5	QP	N	GND

MEASUREMENT RESULT: "Joe0215-V20_fin2"

2/15/2011 4:20PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.460537	29.60	11.9	47	17.1	AV	N	GND
0.580524	22.90	12.0	46	23.1	AV	N	GND
0.975445	19.70	11.8	46	26.3	AV	N	GND


11.ANTENNA REQUIREMENT

11.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

11.2.Antenna Construction

The device is equipped with unique antenna, which is mounted on a metal plate by a copper. The antenna is omnidirectional with nominal 0dBi gain. Therefore, the equipment complies with the antenna requirement of Section 15.203.

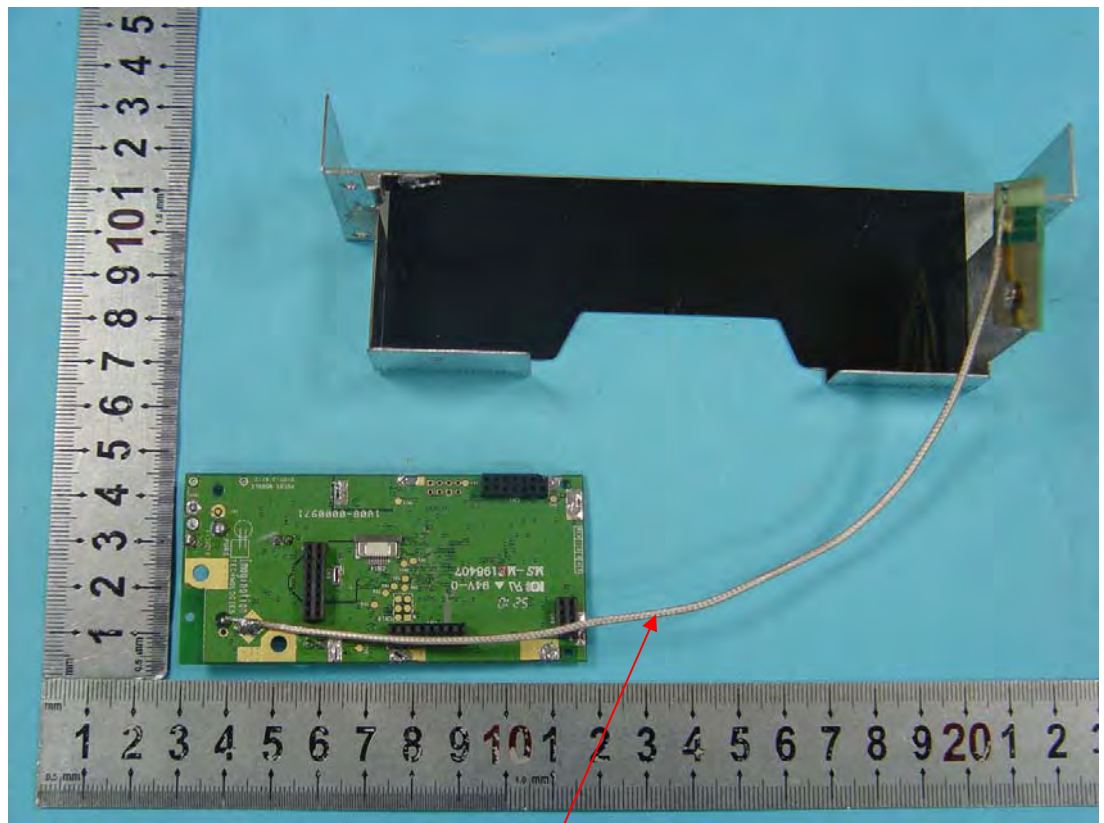

Antenna