



America

## Certification Test Report

**FCC ID: X32-FDHFG000**

**IC: 8797A-FDHFG000**

**FCC Rule Part: 15.231**

**ISED Canada Radio Standards Specification: RSS-210**

**TÜV SÜD Report Number: RD72141417.100**

**Manufacturer: iKeyless, LLC**

**Model: FDHFL-G000**

**Test Begin Date: August 08, 2018**

**Test End Date: August 09, 2018**

**Report Issue Date: August 17, 2018**



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code AT-1921

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, ANSI, or any agency of the Federal Government.

**Prepared by:**

**Jean Tezil**  
**EMC Engineer**  
**TÜV SÜD America, Inc.**

**Reviewed by:**

**Randle Sherian**  
**EMC Manager**  
**TÜV SÜD America, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of TÜV SÜD. The results contained in this report are representative of the sample(s) submitted for evaluation.

**Report: RD72141417.100**

**TÜV SÜD America Inc.**

**Page 1 of 18**

# TABLE OF CONTENTS

<b>1</b>	<b>GENERAL</b> .....	<b>3</b>
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION .....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS .....	3
<b>2</b>	<b>TEST FACILITIES</b> .....	<b>4</b>
2.1	LOCATION .....	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS .....	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION .....	5
2.3.1	<i>Semi-Anechoic Chamber Test Site</i> .....	5
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION .....	6
<b>3</b>	<b>APPLICABLE STANDARD REFERENCES</b> .....	<b>7</b>
<b>4</b>	<b>LIST OF TEST EQUIPMENT</b> .....	<b>7</b>
<b>5</b>	<b>SUPPORT EQUIPMENT</b> .....	<b>8</b>
<b>6</b>	<b>EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM</b> .....	<b>8</b>
<b>7</b>	<b>SUMMARY OF TESTS</b> .....	<b>9</b>
7.1	ANTENNA REQUIREMENT – FCC: CFR 47 PART 15.203.....	9
7.2	AC POWER LINE CONDUCTED EMISSIONS – FCC: CFR 47 PART 15.207/ISED CANADA: RSS-GEN 8.8.....	9
7.2.1	<i>Measurement Procedure</i> .....	9
7.3	PERIODIC OPERATION – FCC: CFR 47 15.231(A) / ISED CANADA: RSS-210 A1.1 (A)(B).....	9
7.3.1	<i>Test Methodology</i> .....	9
7.3.2	<i>Test Results</i> .....	9
7.4	OCCUPIED BANDWIDTH – FCC: CFR 47 15.231(C) / ISED CANADA: RSS-210 A1.3.....	11
7.4.1	<i>Test Methodology</i> .....	11
7.4.2	<i>Test Results</i> .....	11
7.5	RADIATED EMISSIONS – FCC: CFR 47 15.231(B) / ISED CANADA: RSS-210 A1.2 .....	13
7.5.1	<i>Test Methodology</i> .....	13
7.5.2	<i>Duty Cycle Correction</i> .....	13
7.5.3	<i>Test Results</i> .....	16
7.5.4	<i>Sample Calculation:</i> .....	17
<b>8</b>	<b>MEASUREMENT UNCERTAINTY</b> .....	<b>18</b>
<b>9</b>	<b>CONCLUSION</b> .....	<b>18</b>

## **1 GENERAL**

### **1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-210.

### **1.2 Product description**

Remote product FDHFL-G000 is an aftermarket replacement keyless entry remote for automobiles. It is a key fob board which consists of a printed circuit board (PCB), a certain number of small buttons or button contacts, a battery contact or holder, a microcontroller, and an ISM band transmitter circuit. The product comes in 3-button and 4-button versions, both using the same PCB. The device is powered by a single CR1620 coin cell battery. The current report covers both frequencies of operation.

#### **Technical Information:**

Operating Frequency: 314.94 MHz

Mode : ASK

Operating Voltage: 3 VDC (Battery)

Antenna Type / Gain: PCB Loop / -6.0 dBi

#### **Manufacturer Information:**

iKeyless, LLC

828 E Market St

Louisville, KY 40206

Test Sample Serial Number(s): TUV 1 (4-button) / TUV 2 (3-button)

Test Sample Condition: The test sample was provided in working order with no visible defects.

### **1.3 Test Methodology and Considerations**

The EUT is a stand-alone handheld device and was tested in (3) orientations which represent normal intended operation.

The EUT is a battery powered device. Therefore, AC power line conducted emissions was not performed.

Multiple samples were preconfigured by the client for specific tests with instructions to turn on/off the transmitter in the desired mode.

## **2 TEST FACILITIES**

### **2.1 Location**

The radiated and conducted emissions test sites are located at the following address:

TÜV SÜD America Inc.  
2320 Presidential Drive, Suite 101  
Durham, NC 27703  
Phone: (919) 381-4235

### **2.2 Laboratory Accreditations/Recognitions/Certifications**

TÜV SÜD America Inc. is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ANAB program and has been issued certificate number AT-1921 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

FCC Registered Test Site Number: 637011  
ISED Canada Test Site Registration Number: 20446

**2.3 Radiated Emissions Test Site Description**


**2.3.1 Semi-Anechoic Chamber Test Site**

The Semi-Anechoic Chamber Test Site consists of a 18' x 28' x 18' shielded enclosure. The chamber is lined with Samwha Electronics Co. LTD Ferrite Absorber, model number SFA300 (HSN-1). The ferrite tile is 10cm x 10 cm and weighs approximately 1.4lbs. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber. On top of the ferrite tiles is DMAS HT-45 (Dutch Microwave Absorber Solutions) hybrid absorber on all walls except the wall behind the antenna mast which has a shorter DMAS HT-25 absorber.

The turntable is 1.50m in diameter and is located 150cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using short #6 copper wire. The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the turntable. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane.

Behind the turntable is a 2' x 6' x 1.5' deep shielded pit used for support equipment if necessary. The pit is equipped with 2 - 4" PVC chase from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

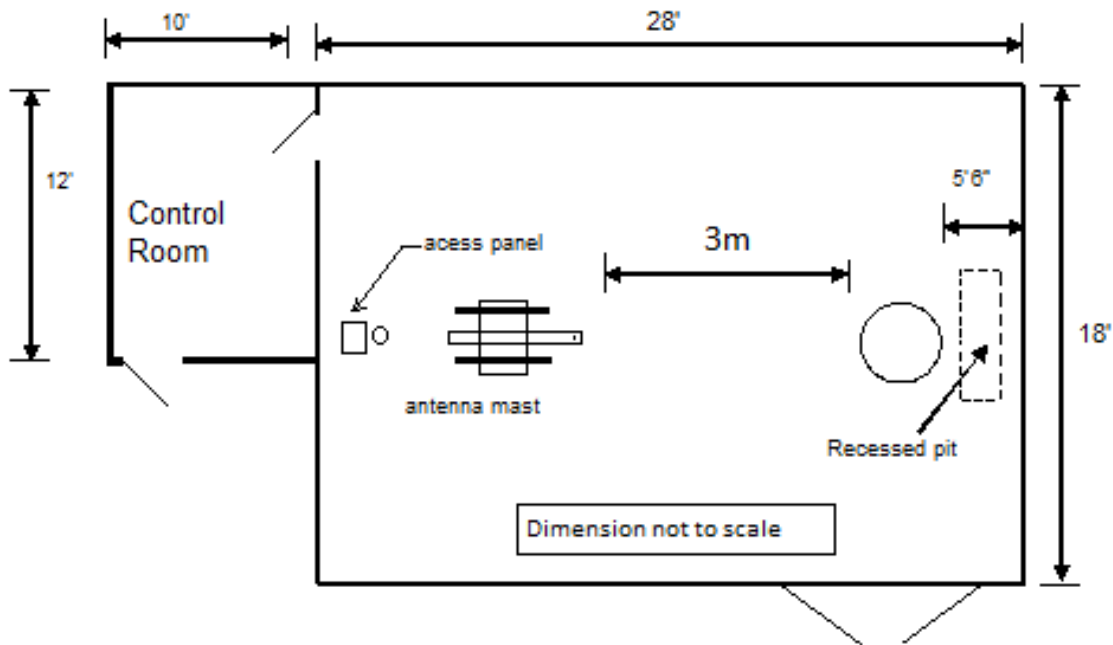


**Figure 2.3-1: Semi-Anechoic Chamber Test Site**

**2.4 Conducted Emissions Test Site Description**

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 10' sheet galvanized steel horizontal ground reference plane (GRP) bonded every 6" to an 8' X 8' aluminum vertical ground plane.

A diagram of the room is shown below in figure 2.4-1:

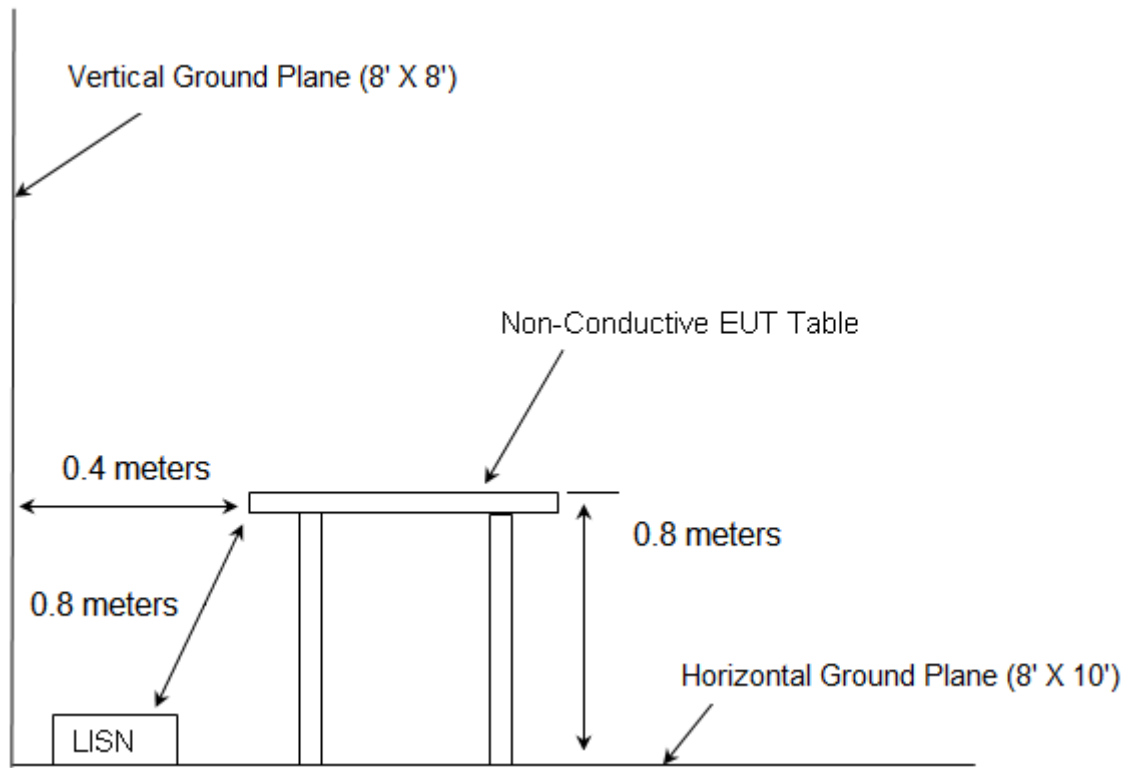

**Figure 2.4-1: AC Mains Conducted EMI Site**

### 3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2017
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2017
- ❖ ISED Canada Radio Standards Specification: RSS-210 – Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment, Issue 9, November 2017
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

### 4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

**Table 4-1: Test Equipment**

Asset ID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
DEMC0277	EMCO	93146	Antennas	9904-5199	9/12/2016	9/12/2018
DEMC0626	EMCO	3110B	Antennas	9411-1945	3/21/2017	3/21/2019
DEMC3002	Rohde & Schwarz	ESU40	Receiver	100346	7/24/2017	10/24/2018
DEMC3006	Rohde & Schwarz	TS-PR18	Amplifiers	122006	1/10/2018	1/10/2019
DEMC3012	Rohde & Schwarz	EMC32-EB	Software	100731	NCR	NCR
DEMC3016	Fei Teng Wireless Technology	HA-07M18G-NF	Antennas	2013120203	2/7/2018	2/7/2020
DEMC3038	Florida RF Labs	NMSE-290AW-60.0-NMSE	Cable Set	1448	1/5/2018	1/5/2019
DEMC3039	Florida RF Labs	NMSE-290AW-396.0-NMSE	Cable Set	1447	1/5/2018	1/5/2019
DEMC3055	Rohde & Schwarz	3005	Cables	3055	1/8/2018	1/8/2019

NCR = No Calibration Required

DMAS MT-25 RF absorber material was used on the floor for all final measurements above 1 GHz.

Asset DEMC3002: Firmware Version: ESU40 is 4.73 SP4


Asset DEMC3012: Software Version: EMC32-B is 9.15

## 5 SUPPORT EQUIPMENT

**Table 5-1: Support Equipment**

Item #	Manufacturer	Equipment Type	Model Number	Serial Number
The EUT operates standalone therefore no support equipment was utilized.				

## 6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM



**Figure 6-1: EUT Test Setup**



## 7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

### 7.1 Antenna Requirement – FCC: CFR 47 Part 15.203

The antenna is a loop antenna that is implemented as a trace on the PCB, thus satisfying Part 15.203 requirements.

### 7.2 AC Power Line Conducted Emissions – FCC: CFR 47 Part 15.207/ISED CANADA: RSS-GEN 8.8

#### 7.2.1 Measurement Procedure

The EUT is battery operated therefore power line conducted emissions is not applicable.

### 7.3 Periodic Operation – FCC: CFR 47 15.231(a) / ISED CANADA: RSS-210 A1.1 (a)(b)

#### 7.3.1 Test Methodology

A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

The transmitter was activated manually and was evaluated using a spectrum analyzer at zero span.

#### 7.3.2 Test Results

The transmitter ceased operation after the next whole packet was sent after being manually activated and deactivated. The results are shown in Figure 7.3.2-1.

Performed by: Jean Tezil

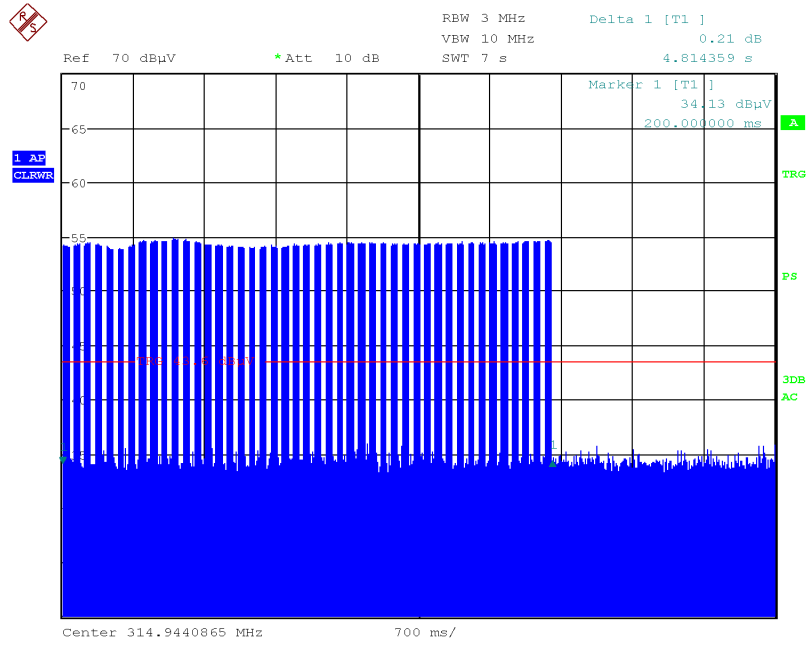

Date: 9.AUG.2018 11:20:54

Figure 7.3.2-1: TX Hold Time

**7.4 Occupied Bandwidth – FCC: CFR 47 15.231(c) / ISED CANADA: RSS-210 A1.3****7.4.1 Test Methodology**

The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to 1% to 5% of the occupied bandwidth. The video bandwidth was set to 3 times the resolution bandwidth. A peak detector was used.


**7.4.2 Test Results**

0.25% of the 314.94 MHz center frequency is equivalent to 787.3 kHz. Therefore the 20 dB and 99% bandwidths of the emissions are less than 0.25% of the center frequencies. The results are shown in Table 7.4.2-1 and the corresponding figures.

Performed by: Jean Tezil


**Table 7.4.2-1: 20dB / 99% Bandwidth**

<b>Modulation</b>	<b>Frequency [MHz]</b>	<b>20dB Bandwidth [kHz]</b>	<b>99% Bandwidth [kHz]</b>
ASK	314.94	13.47	13.34

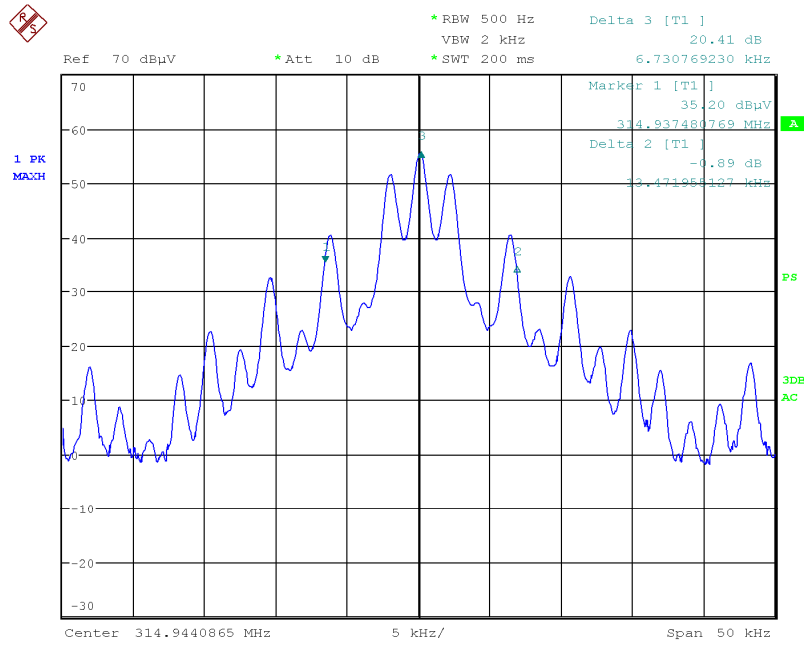

Date: 8.AUG.2018 16:51:36

Figure 7.4.2-3: 20 dB Bandwidth – 314.94 MHz

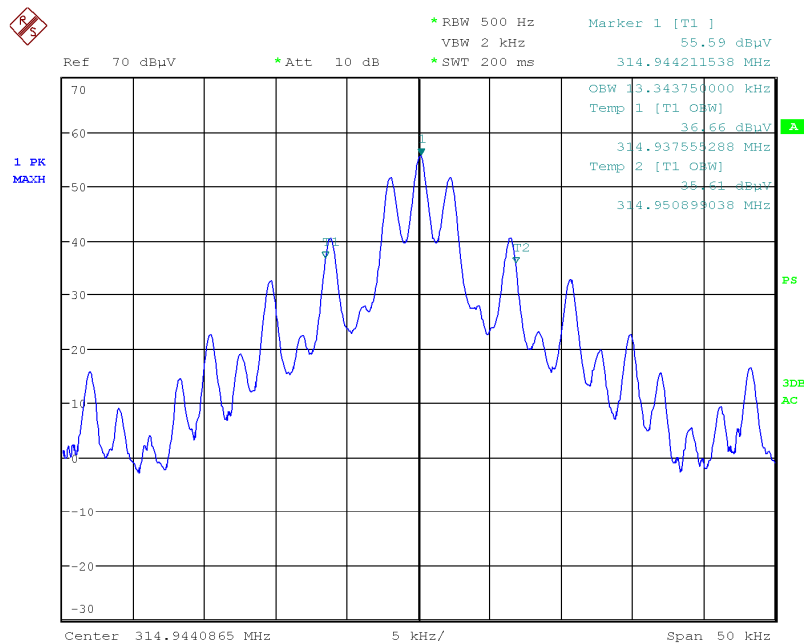

Date: 8.AUG.2018 16:47:40

Figure 7.4.2-4: 99% Occupied Bandwidth – 314.94 MHz

## 7.5 Radiated Emissions – FCC: CFR 47 15.231(b) / ISED CANADA: RSS-210 A1.2

### 7.5.1 Test Methodology

Radiated emissions measurements were made over the frequency range of 9 kHz or the lowest frequency generated to 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies between 9 kHz and 150 kHz, measurements were made using a resolution bandwidth (RBW) of 300 Hz and a video bandwidth of 1 kHz. For frequencies between 150 kHz and 30 MHz, measurements were made using a resolution bandwidth (RBW) of 150 kHz and a video bandwidth of 30 kHz. For frequencies between 30 MHz and 1000 MHz, measurements were made using a resolution bandwidth (RBW) of 120 kHz and a video bandwidth (VBW) of 300 kHz. For frequencies above 1000MHz, measurements were made with RBW of 1 MHz and a VBW of 3 MHz.

Further, compliance with the provisions of 15.205 was demonstrated using the measurement instrumentation specified in that section where applicable.

The EUT utilized pulsed modulation. Therefore, the peak measurements were corrected by the duty cycle for comparison to the average limits.

### 7.5.2 Duty Cycle Correction

Duty Cycle calculation:

The duty cycle calculation is based on results shown in Figures 7.5.2-1, 7.5.2-2, and 7.5.2-3. The number of pulses was calculated based on Figures 7.5.2-2, reporting the total burst width within 100ms, and the figure 7.5.2-3, reporting the number of pulses within a 10<sup>th</sup> of the burst width.

Burst width = 57.13 ms

Number of pulses within 5.713 ms = 12

Total number of Pulses (N1) = 120


Pulse Width (T1) = 0.292ms

Period = 100 ms

$(N1 * T1) / T = (120 * 0.292) / 100 = 35.0$


The worst case duty cycle was determined to be 35.0%. The duty cycle correction factor is determined using the formula:  $20 \log (35.0 / 100) = -9.12$  dB.

Performed by: Jean Tezil

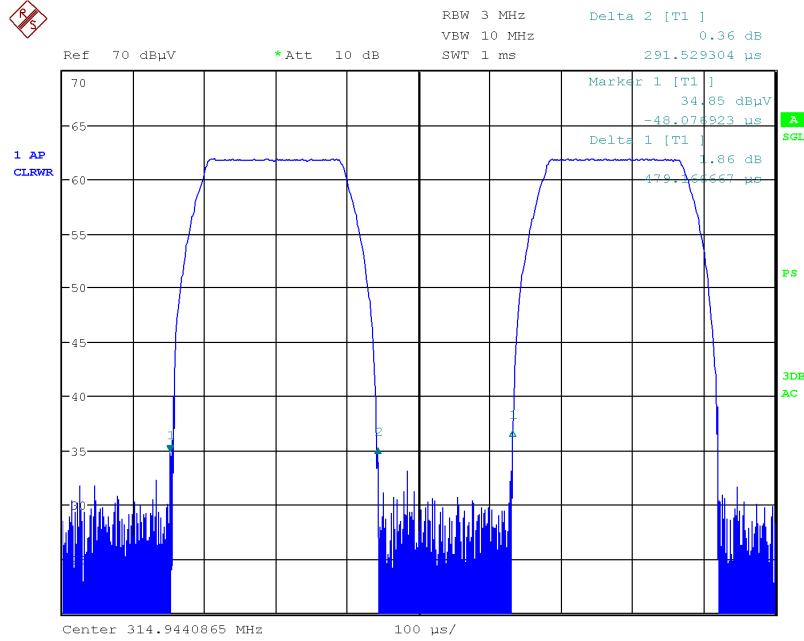


Date: 9.AUG.2018 09:09:02

Figure 7.5.2-1: Duty Cycle – Pulse Width

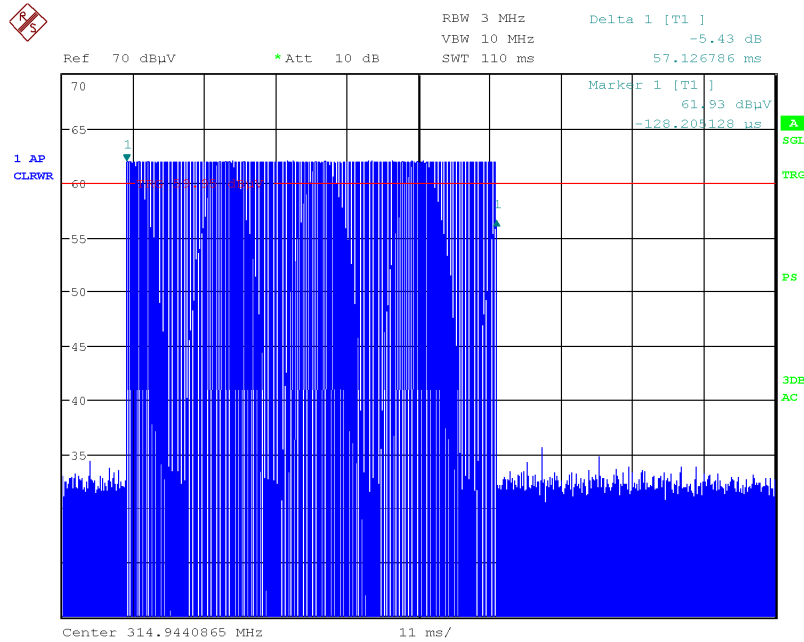

Date: 9.AUG.2018 09:05:22

Figure 7.5.2-2: Duty Cycle –Burst Width

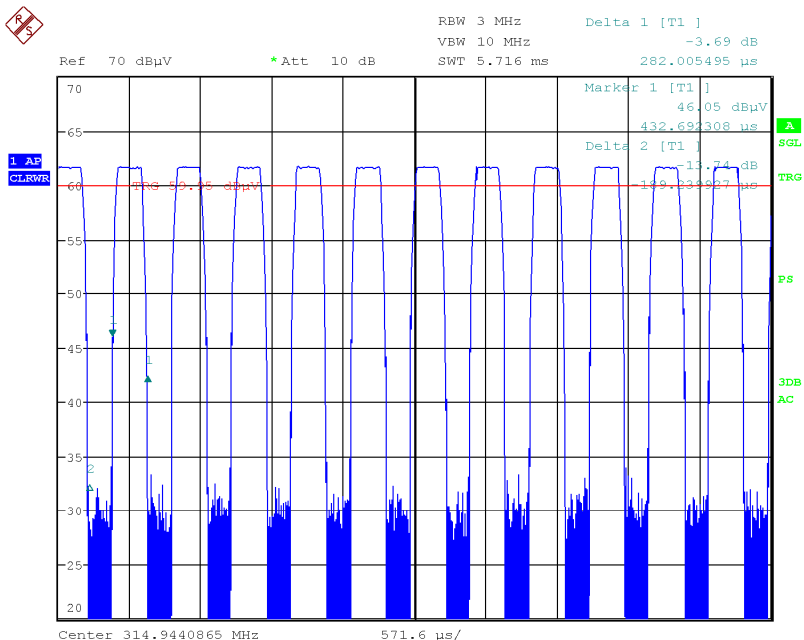

Date: 9.AUG.2018 10:56:55

Figure 7.5.2-3: Duty Cycle –Number of pulses within tenth of burst width

7.5.3 Test Results

X, Y and Z positions were pre-scanned and X position was determined to be the worst case. The final measurements are reported in Table 7.5.3-1.

Performed by: Jean Tezil

Table 7.5.3-1: Radiated Emissions

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	pk			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Fundamental Emission</b>										
314.94	66.00	66.00	H	16.31	82.31	73.2	95.6	75.6	13.3	2.4
314.94	48.30	48.3	V	16.31	64.61	55.5	95.6	75.6	31.0	20.1
<b>Spurious Emissions</b>										
629.88	10.90	10.90	H	21.00	31.90	22.78	75.6	55.6	43.7	32.8
629.88	10.80	10.80	V	21.00	31.80	22.68	75.6	55.6	43.8	32.9
944.82	10.07	10.07	H	24.95	35.02	25.90	75.6	55.6	40.6	29.7
1259.76	60.40	60.40	H	-7.27	53.13	44.01	75.6	55.6	22.5	11.6
1259.76	55.80	55.80	V	-7.27	48.53	39.41	75.6	55.6	27.1	16.2
1574.7	45.20	45.20	H	-6.83	38.37	29.25	74.0	54.0	35.6	24.8
1574.7	42.60	42.60	V	-6.83	35.77	26.65	74.0	54.0	38.2	27.4
1889.64	51.60	51.60	H	-5.31	46.29	37.17	75.6	55.6	29.3	18.5
1889.64	46.00	46.00	V	-5.31	40.69	31.57	75.6	55.6	34.9	24.1
2204.58	53.30	53.30	H	-4.30	49.00	39.88	74.0	54.0	25.0	14.1
2204.58	48.30	48.30	V	-4.30	44.00	34.88	74.0	54.0	30.0	19.1
2519.52	57.40	57.40	H	-3.56	53.84	44.72	75.6	55.6	21.8	10.9
2519.52	49.80	49.80	V	-3.56	46.24	37.12	75.6	55.6	29.4	18.5
2834.46	58.20	58.20	H	-2.62	55.58	46.47	74.0	54.0	18.4	7.5
2834.46	55.90	55.90	V	-2.62	53.28	44.17	74.0	54.0	20.7	9.8
3149.4	54.10	54.10	H	-1.54	52.56	43.44	75.6	55.6	23.0	12.2
3149.4	56.00	56.00	V	-1.54	54.46	45.34	75.6	55.6	21.1	10.3

**Note:**

Uncorrected average value = Uncorrected peak value



**7.5.4 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

$CF_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
$R_U$	=	Uncorrected Reading
$R_C$	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

**Example Calculation:**

PEAK:

$$\text{Corrected Level: } 66\text{dBuV/m} + 16.31\text{dB} = 82.31\text{dBuV/m}$$

$$\text{Margin: } 95.6\text{dBuV/m} - 82.31\text{dBuV/m} = 13.29\text{dB}$$

AVERAGE:

$$\text{Corrected Level: } 66\text{dBuV/m} + 16.31\text{dB} - 9.12\text{dB} = 73.19\text{dBuV}$$

$$\text{Margin: } 75.6\text{dBuV} - 73.19\text{dBuV} = 2.41\text{dB}$$

## 8 MEASUREMENT UNCERTAINTY

The expanded laboratory measurement uncertainty figures ( $U_{\text{Lab}}$ ) provided below correspond to an expansion factor (coverage factor)  $k = 1.96$  which provide confidence levels of 95%.

Parameter	$U_{\text{lab}}$
Occupied Channel Bandwidth	$\pm 0.004\%$
RF Conducted Output Power	$\pm 0.689 \text{ dB}$
Power Spectral Density	$\pm 0.5 \text{ dB}$
Antenna Port Conducted Emissions	$\pm 2.717 \text{ dB}$
Radiated Emissions	$\pm 5.877 \text{ dB}$
Temperature	$\pm 0.860 \text{ }^\circ\text{C}$
Radio Frequency	$\pm 2.832 \times 10^{-8}$
AC Power Line Conducted Emissions	$\pm 2.85$

## 9 CONCLUSION

In the opinion of TÜV SÜD America, Inc. the FDHFL-G000 manufactured by iKeyless, LLC meets the requirements of FCC Part 15 subpart C and Innovation, Science, and Economic Development Canada's Radio Standards Specification RSS-210.

**END REPORT**