



FCC Part 15.407

TEST REPORT

For

iKeyless, LLC dba Car Keys Express

12101 Sycamore Station Place Suite 140 Louisville, KY 40299

Report Type	Original Report
FCC Identity:	FCC ID: X32-ROKSBX1XX
Brand Name	ROKS Box
Product Name	ROKS Box v3
Model Name	ROKSBX-1XX
Report Number	RLK210305003-FRW02
Report Date	2021/06/22
Reviewed By	Zeus Chen <i>Zeus Chen</i>
Prepared By:	
Bay Area Compliance Laboratories Corp.(Linkou Laboratory)	
No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.)	
Tel: +886 (3)3961072; Fax: +886 (3) 3961027	
www.bacl.com.tw	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Revision History

Revision	Report Number	Issue Date	Description
1.0	RLK210305003-FRW02	2021/06/22	Original Report

TABLE OF CONTENTS

1 GENERAL INFORMATION 4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

1.2 OPERATION CONDITION OF EUT 5

1.3 OBJECTIVE AND TEST METHODOLOGY 5

1.4 MEASUREMENT UNCERTAINTY 5

1.5 ENVIRONMENTAL CONDITIONS AND TEST DATE 6

1.6 TEST FACILITY 6

2 SYSTEM TEST CONFIGURATION..... 7

2.1 TEST CHANNELS AND DESCRIPTION OF WORST TEST CONFIGURATION 7

2.2 SUPPORT EQUIPMENT LIST AND EXTERNAL CABLE LIST 8

2.3 BLOCK DIAGRAM OF TEST SETUP 9

2.4 DUTY CYCLE 9

3 SUMMARY OF TEST RESULTS 11

4 FCC§15.407(F), §1.1307, § 2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)..... 12

4.1 APPLICABLE STANDARD..... 12

4.2 RF EXPOSURE EVALUATION RESULT 13

5 FCC §15.203 - ANTENNA REQUIREMENTS 13

5.1 APPLICABLE STANDARD..... 14

5.2 ANTENNA LIST AND DETAILS 14

6 FCC §15.207 - AC LINE CONDUCTED EMISSIONS..... 15

6.1 APPLICABLE STANDARD..... 15

6.2 EUT SETUP AND TEST PROCEDURE 15

6.3 TEST EQUIPMENT LIST AND DETAILS 16

6.4 TEST RESULT..... 16

7 FCC §15.209, §15.205, §15.407(B) – SPURIOUS EMISSIONS..... 17

7.1 APPLICABLE STANDARD..... 17

7.2 EUT SETUP AND TEST PROCEDURE 19

7.3 TEST EQUIPMENT LIST AND DETAILS 20

7.4 TEST RESULT..... 21

8 FCC §15.407(A) AND §15.407(E) –EMISSION BANDWIDTH 29

8.1 APPLICABLE STANDARD..... 29

8.2 TEST PROCEDURE 29

8.3 TEST EQUIPMENT LIST AND DETAILS 29

8.4 TEST RESULTS 30

9 FCC §15.407(A)(1) – MAXIMUM OUTPUT POWER 39

9.1 APPLICABLE STANDARD..... 39

9.2 TEST PROCEDURE 39

9.3 TEST EQUIPMENT LIST AND DETAILS 39

9.4 TEST RESULTS 40

10 FCC §15.407(A) – POWER SPECTRAL DENSITY 41

10.1 APPLICABLE STANDARD..... 41

10.2 TEST PROCEDURE 41

10.3 TEST EQUIPMENT LIST AND DETAILS 42

10.4 TEST RESULTS 42

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Application	iKeyless, LLC dba Car Keys Express 12101 Sycamore Station Place Suite 140 Louisville, KY 40299
Manufacturer	AAEON TECHNOLOGY INC. 5F, No.135, Lane 235, Pao Chiao Rd Hsin-Tien Dist, New Taipei City, 231 Taiwan
Brand Name	ROKS Box
Product (Equipment)	ROKS Box v3
Model Name	ROKSBX-1XX
Frequency Range	UNII-1: 5150 MHz-5250 MHz UNII-3: 5725 MHz-5850 MHz
Number of Channels	UNII-1: IEEE 802.11an HT20/ac VHT20: 4 Channels IEEE 802.11n HT40/ac VHT40: 2 Channels IEEE 802.11ac VHT80: 1 Channels UNII-3: IEEE 802.11an HT20/ac VHT20: 5 Channels IEEE 802.11n HT40/ac VHT40: 2 Channels IEEE 802.11ac VHT80: 1 Channels
Output Power	For UNII-1: IEEE 802.11a: 16.26 dBm (0.0423 W) IEEE 802.11n HT20: 15.76 dBm (0.0377 W) IEEE 802.11n HT40: 14.11 dBm (0.0258 W) IEEE 802.11ac VHT20: 15.83 dBm (0.0383 W) IEEE 802.11ac VHT40: 14.17 dBm (0.0261 W) IEEE 802.11ac VHT80: 12.35 dBm (0.0172 W) For UNII-3: IEEE 802.11a: 20.55 dBm (0.1135 W) IEEE 802.11n HT20: 20.55 dBm (0.1135 W) IEEE 802.11n HT40: 20.22 dBm (0.1052 W) IEEE 802.11ac VHT20: 20.71 dBm (0.1178 W) IEEE 802.11ac VHT40: 20.42 dBm (0.1102 W) IEEE 802.11ac VHT80: 18.86 dBm (0.0769 W)
Modulation Type	OFDM
Related Submittal(s)/Grant(s)	FCC Part 15.247 DTS with FCC ID: X32-ROKSBX1XX FCC Part 15.209 DXX with FCC ID: X32-ROKSBX1XX
Received Date	Mar. 18, 2021
Date of Test	Apr. 09, 2021 - Apr. 22, 2021

Note: All measurement and test data in this report was gathered from production sample serial number: 210305003. Assigned by

Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

1.2 Operation Condition of EUT

Power Operation (Voltage Range)	<input checked="" type="checkbox"/> AC 120V/60Hz <input checked="" type="checkbox"/> Adapter Model: MSA-C1000IC12.0-12W-US I/P: 100-240Vac, 0.5A O/P: 12Vdc, 1A <input type="checkbox"/> By Power Cord
	<input type="checkbox"/> DC Type <input type="checkbox"/> DC Power Supply <input type="checkbox"/> Battery <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter (Not For Sale)
	<input type="checkbox"/> Host System

1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the iKeyless, LLC dba Car Keys Express Appliance (Model(s): ROKSBX-1XX,) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15 Subparts A and E of the Federal Communication Commission’s rules.
- KDB 662911 D01 Multiple Transmitter Output v02r01
- KDB 789033 D02 General U-NII Test Procedures New Rules v02r01
- ANSI C63.10-2013 of t American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power with Power Meter	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted test with Spectrum	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

The test results with statement of conformity, the decision rules are based on the specifications and standards. The test results will not take the measurement uncertainty into account.

1.5 Environmental Conditions and Test Date

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	Test Engineer
Conduction (Con-01)	Apr. 09, 2021	22.6	59	Brian Chang
Radiated (966A)	Apr. 19, 2021 – Apr. 22, 2021	17.5-18.7	60-62	Leo Cheng
Conducted (TH-02)	Apr. 15, 2021	22.8	55	Rui Jhan

1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

2 System Test Configuration

2.1 Test Channels and Description of Worst Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer. No special accessory, No modification was made to the EUT and No special equipment used during test. And this device is the AP/STA and working in non-DFS Band.

IEEE 802.11 a/n HT20/ac VHT20			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
-	-	165	5825

For UNII-1: Channel 36, 40 and 48 were tested. For UNII-3: Channel 149, 157 and 165 were tested.

IEEE 802.11 n HT40/ac VHT40			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795

For UNII-1: Channel 38 and 46 were tested. For UNII-3: Channel 151 and 159 were tested.

IEEE 802.11 ac VHT80			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775

For UNII-1: Channel 42 was tested. For UNII-3: Channel 155 was tested.

Modulation Used for Conformance Test			
Configuration	N _{TX}	Data Rate	Worst Data Rate
IEEE 802.11a	1	6-54 Mbps	6 Mbps
IEEE 802.11n HT20	1	MCS 0-7	MCS 0
IEEE 802.11n HT40	1	MCS 0-7	MCS 0
IEEE 802.11ac VHT20	1	MCS 0-7	MCS 0
IEEE 802.11ac VHT40	1	MCS 0-7	MCS 0
IEEE 802.11ac VHT80	1	MCS 0-7	MCS 0


Worst Case of Power Setting					
EUT Exercise Software			RFTestTool v5.8		
Configuration	N _{TX}	UNII Band	Low CH	Mid CH	High CH
IEEE 802.11a	1	UNII-1	58	68	66
		UNII-3	80	80	80
IEEE 802.11n HT20	1	UNII-1	58	68	66
		UNII-3	80	80	80
IEEE 802.11n HT40	1	UNII-1	57	-	63
		UNII-3	80	-	80
IEEE 802.11ac VHT20	1	UNII-1	58	68	66
		UNII-3	80	80	80
IEEE 802.11ac VHT40	1	UNII-1	57	-	63
		UNII-3	80	-	80
IEEE 802.11ac VHT80	1	UNII-1	-	57	-
		UNII-3	-	73	-

- The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations. Radiated below 1G were tested worst output power mode.
- Due to 802.11n HT20/T40 mode output power are less than 802.11ac VHT20/40. Therefore, 802.11ac VHT20/VHT40 cover 802.11n HT20/40 in the test, include conducted and radiated, except duty cycle and output power test.

2.2 Support Equipment List and External Cable List

No.	Description	Manufacturer	Model Number	Serial Number
A	Notebook	DELL	Latitude E6410	PP27LA001







2.3 Block Diagram of Test Setup

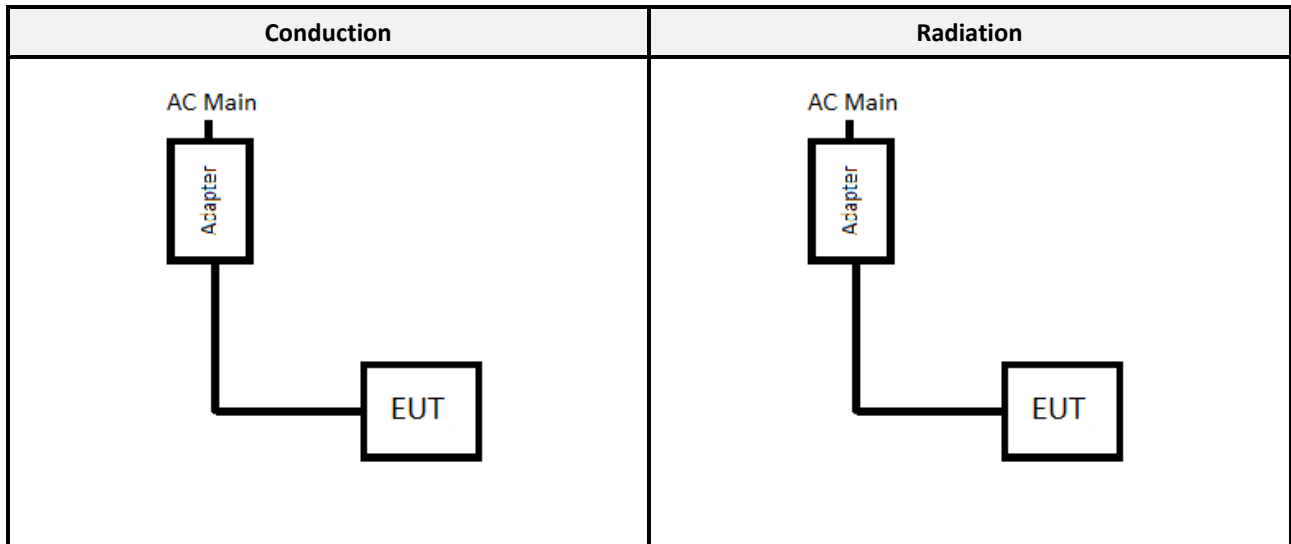

2.4 Duty Cycle

All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x , and maximum power transmission duration, T , are required for each tested mode of operation.

Configuration	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	94.47	1.36	1.44	0.25
IEEE 802.11n HT20	95.19	1.29	1.36	0.21
IEEE 802.11n HT40	91.13	0.63	0.69	0.40
IEEE 802.11ac VHT20	95.00	1.29	1.36	0.22
IEEE 802.11ac VHT40	91.28	0.64	0.70	0.40
IEEE 802.11ac VHT80	82.49	0.31	0.37	0.84

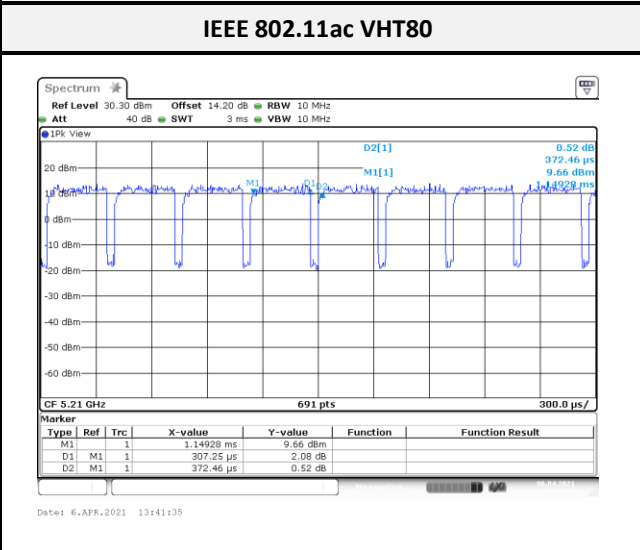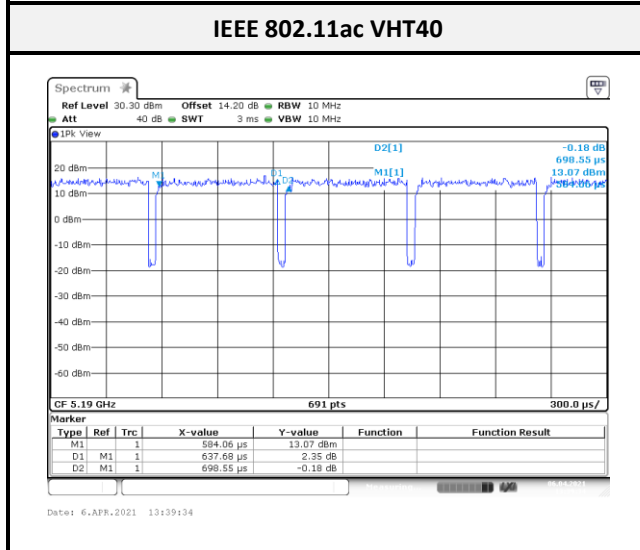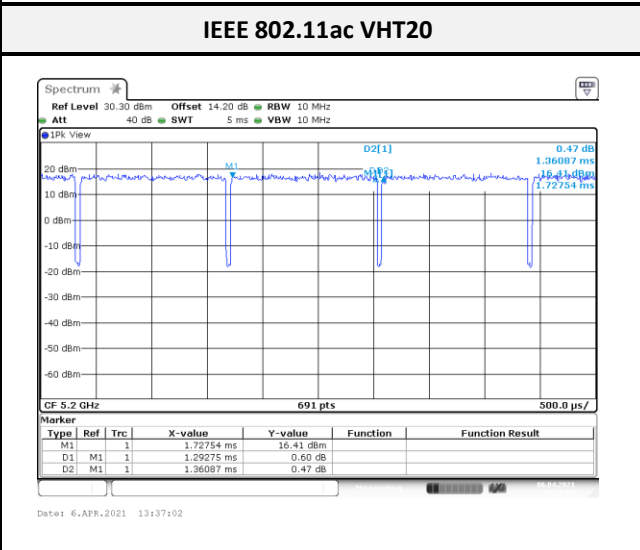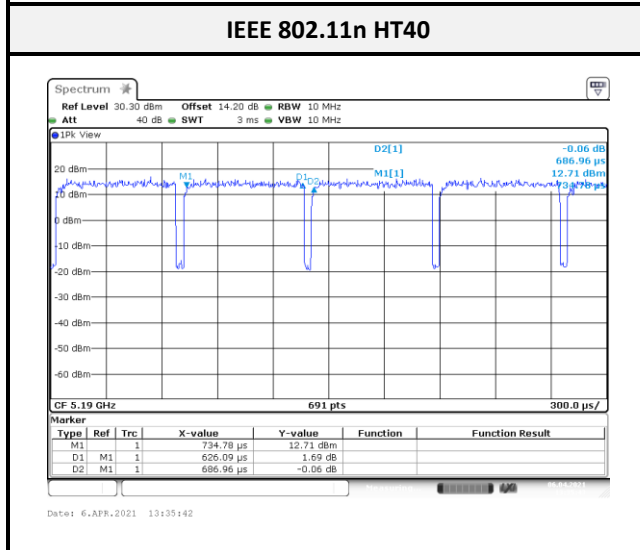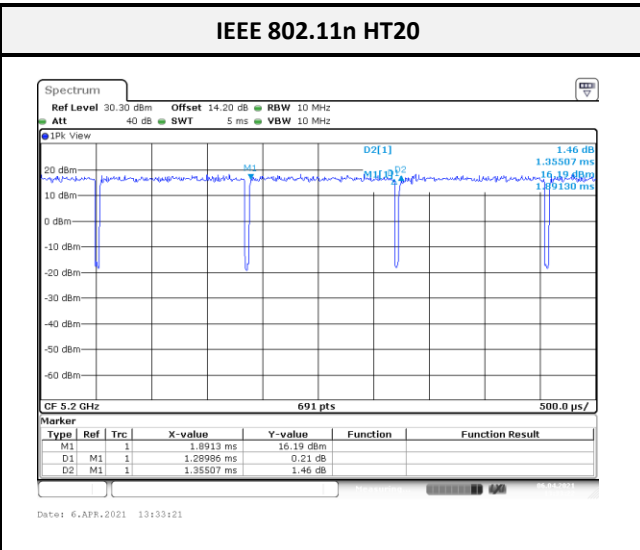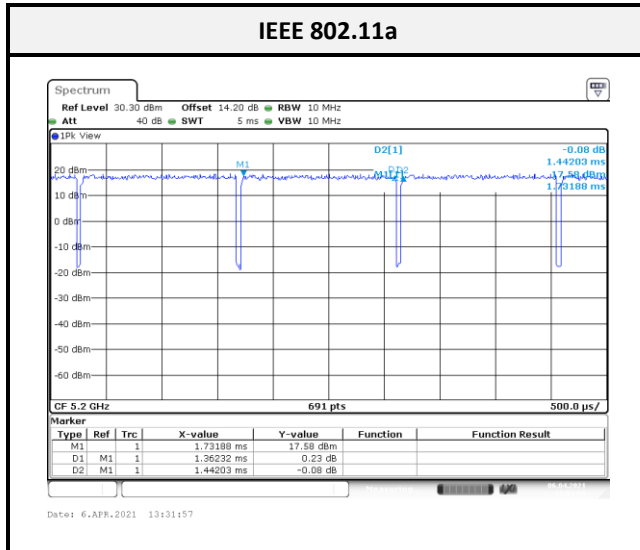

*Note: Duty Factor = 10*log (1/Duty cycle)

3 Summary of Test Results

FCC Rules	Description of Test	Result
§1.1310, §2.1091, §15.407 (f)	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a), §15.407(b)(6)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.407(b)	Spurious Emissions	Compliance
§15.407(a)(e)	Emission Bandwidth	Compliance
§15.407(a)(1)	Maximum Peak Output Power	Compliance
§15.407(a)(1)(5)	Power Spectral Density	Compliance

4 FCC§15.407(f), §1.1307, § 2.1091 – Maximum Permissible Exposure (MPE)

4.1 Applicable Standard

According to §15.407(f), U-NII devices are subject to the radio frequency radiation exposure requirements specified in § 1.1307(b), and 2.1091 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary: Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

4.2 RF Exposure Evaluation Result

MPE Evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi 2.4G	2412-2462	2.80	1.9054	24.00	251.1886	20	0.0953	1.00
Wi-Fi 5G UNII-1	5150-5250	3.10	2.0417	17.00	50.1187	20	0.0204	1.00
Wi-Fi 5G UNII-3	5745-5850	3.10	2.0417	21.00	125.8925	20	0.0512	1.00
WCDMA II	1852.4-1907.6	3.00	1.9953	25.00	316.2278	20	0.1256	1.00
WCDMA IV	1712.4-1752.6	3.00	1.9953	25.00	316.2278	20	0.1256	1.00
WCDMA V	826.4-846.6	2.00	1.5849	25.00	316.2278	20	0.0998	0.55
LTE Band 2	1850.7-1909.3	3.00	1.9953	25.00	316.2278	20	0.1256	1.00
LTE Band 4	1710.7-1754.3	3.00	1.9953	25.00	316.2278	20	0.1256	1.00
LTE Band 5	824.7-848.3	2.00	1.5849	25.00	316.2278	20	0.0998	0.55
LTE Band 12	699.7-715.3	2.00	1.5849	25.00	316.2278	20	0.0998	0.47
LTE Band 13	779.5-784.5	2.00	1.5849	25.00	316.2278	20	0.0998	0.52
LTE Band 14	790.5-795.5	2.00	1.5849	25.00	316.2278	20	0.0998	0.53
LTE Band 66	1710.7-1779.3	3.00	1.9953	25.00	316.2278	20	0.1256	1.00
LTE Band 71	665.5-695.5	2.00	1.5849	25.00	316.2278	20	0.0998	0.45

Note: Wi-Fi 2.4G and Wi-Fi 5G can't simultaneously.

Wi-Fi and WWAN can transmit simultaneously, MPE evaluation is as below formula:
 $PD1/Limit1+PD2/Limit2+..... < 1$, PD (Power Density)

The worst case is as below:

Max MPE of Wi-Fi + Max MPE of LTE
 $= 0.0953/1.0+0.0998/0.45 = 0.3171 < 1.0$

Result: MPE evaluation of single and simultaneous transmission meet the requirement of standard.

5 FCC §15.203 - Antenna Requirements

5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

5.2 Antenna List and Details

Brand	Model	Antenna Type	Antenna Gain	Result
ARistotle	RFA-25-JP189-16W-500	PIFA	3.10 dBi	Compliance

The EUT have internal antennas arrangement and fulfill the requirement of this section.

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

6.2 EUT Setup and Test Procedure

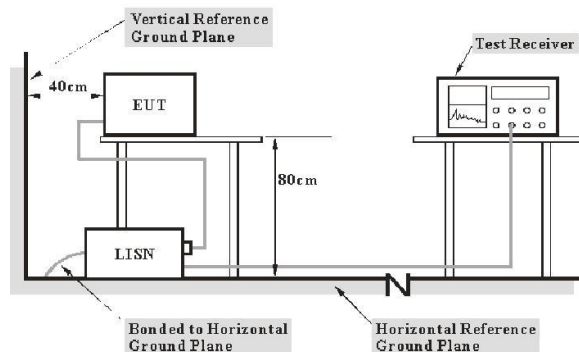

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits. The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz


During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
AC Line Conduction Room (Con-01)					
Two-Line V-Network	Rohde & Schwarz	ENV216	100010	2020/09/14	2021/09/13
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2020/09/11	2021/09/10
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2021/05/05	2022/05/04
RF Cable	EMCI	EMCCFD300-BM-BM-8000	180526	2020/08/18	2021/08/17
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment’s listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

6.4 Test Result

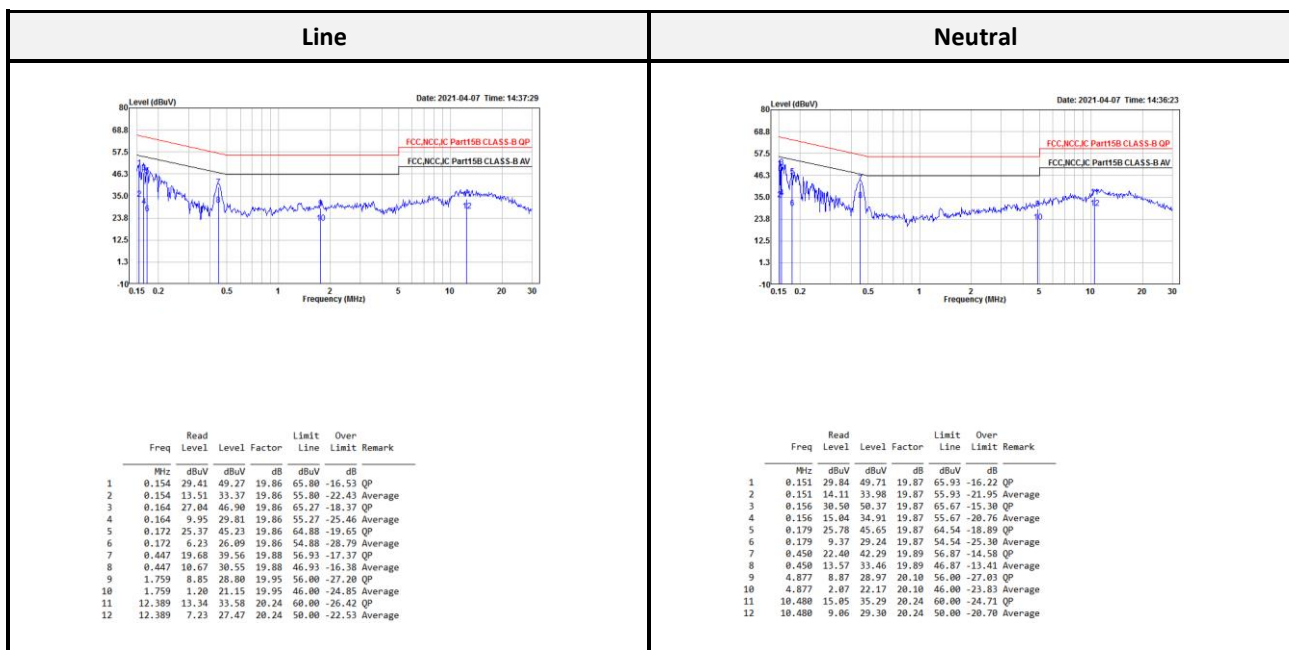

Note:

Level = Read Level + Factor.

Over Limit (Margin) = Level – Limit Line.

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205, §15.407(b) – Spurious Emissions

7.1 Applicable Standard

According to FCC §15.407(b),

Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

Further.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function.

Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

7.2 EUT Setup and Test Procedure

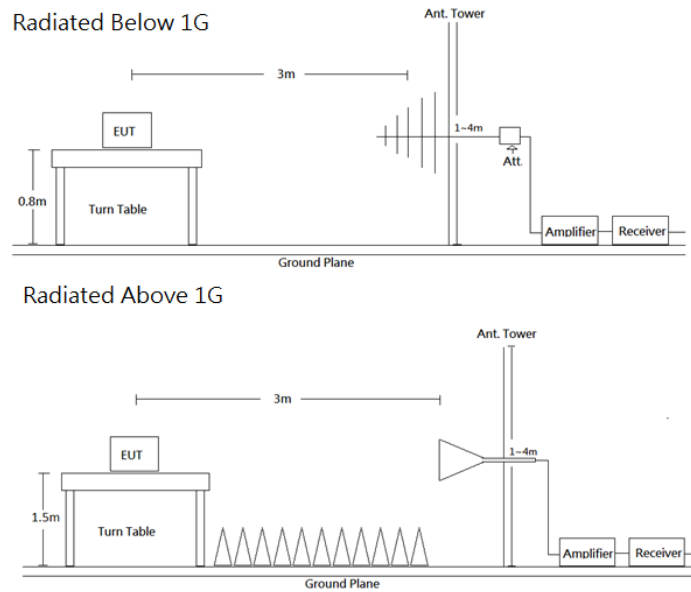

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement Detector
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	AV
	1 MHz	1/T	<98%	AV

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.


7.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Radiation 3M Room (966A)					
Active Loop	EMCO	6502	0001-3322	2021/03/16	2022/03/15
Bilog Antenna & 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A111513 & AT-N0668	2021/03/30	2022/03/29
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2021/05/12	2022/05/11
Horn Antenna	ETS-Lindgren	3115	00109141	2020/07/15	2021/07/14
Horn Antenna	ETS-Lindgren	3160-09	00123852	2020/07/07	2021/07/06
Preamplifier	A.H. Systems	PAM-1840VH	174	2021/03/22	2022/03/21
Preamplifier	A.H. Systems	PAM-0118P	478	2021/05/12	2022/05/11
Microflex Cable (1m)	EMCI	EMC102-KM-KM-1000	180524	2020/08/06	2021/08/05
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180516	2020/08/06	2021/08/05
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-002	2020/08/06	2021/08/05
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Test Result

Below 1G (30 MHz-1 GHz) test the worst power mode. (Pre-scan with three orthogonal axis, and worse case as Z axis)

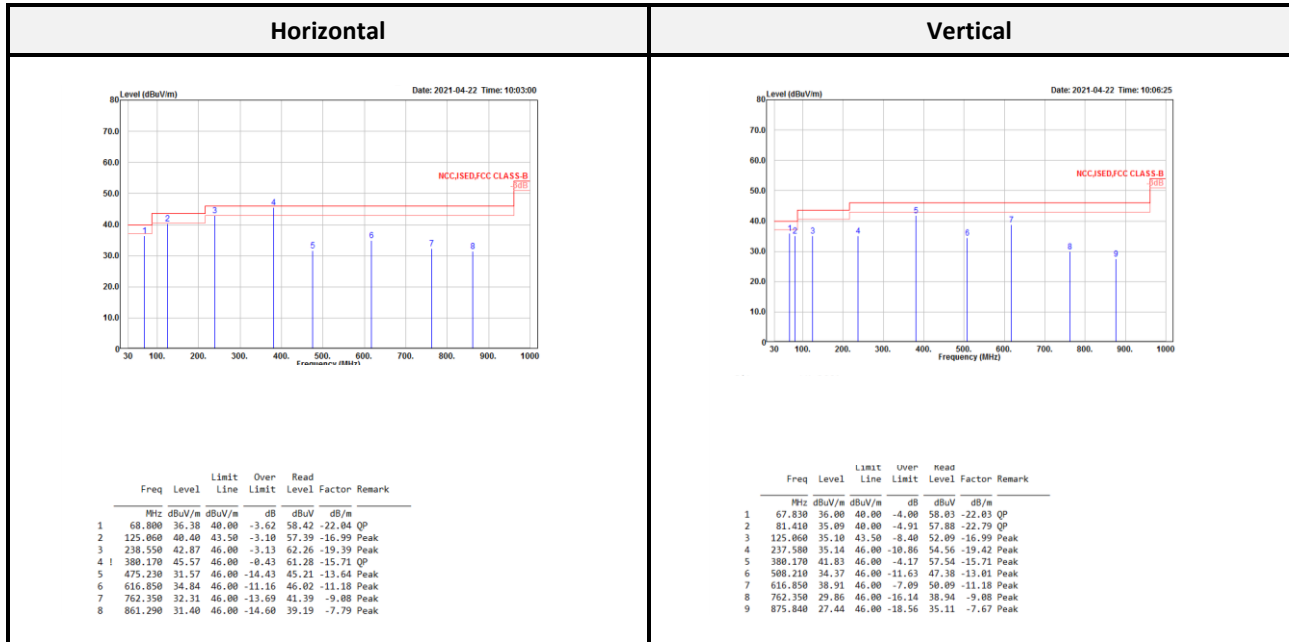

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

Above 1G (1 GHz-40 GHz)

UNII-1:

IEEE 802.11a Low CH Horizontal							IEEE 802.11a Low CH Vertical						
Freq	Level	Limit	Over	Read	Factor	Remark	Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5143.900	53.99	54.00	-0.01	54.61	-0.62	Average	5146.600	52.90	54.00	-1.10	53.52	-0.62	Average
5143.900	69.55	74.00	-4.45	70.17	-0.62	Peak	5146.600	67.96	74.00	-6.04	68.58	-0.62	Peak
5178.400	94.00			94.65	-0.65	Average	5180.650	93.65			94.30	-0.65	Average
5178.400	103.42			104.07	-0.65	Peak	5180.650	102.91			103.56	-0.65	Peak
10360.000	50.64	68.20	-17.56	42.71	7.93	Peak	10360.000	51.33	68.20	-16.87	43.40	7.93	Peak
15540.000	40.45	54.00	-13.55	29.75	10.70	Average	15540.000	41.03	54.00	-12.97	30.33	10.70	Average
15540.000	53.23	74.00	-20.77	42.53	10.70	Peak	15540.000	54.20	74.00	-19.80	43.50	10.70	Peak

IEEE 802.11a Middle CH Horizontal							IEEE 802.11a Middle CH Vertical						
Freq	Level	Limit	Over	Read	Factor	Remark	Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5150.000	50.96	54.00	-3.04	51.58	-0.62	Average	5146.000	49.84	54.00	-4.16	50.46	-0.62	Average
5150.000	66.62	74.00	-7.38	67.24	-0.62	Peak	5146.000	62.11	74.00	-11.89	62.73	-0.62	Peak
5199.200	94.64			95.30	-0.66	Average	5199.600	96.76			97.42	-0.66	Average
5199.200	103.85			104.51	-0.66	Peak	5199.600	106.00			106.66	-0.66	Peak
5387.200	47.50	54.00	-6.50	47.74	-0.24	Average	5438.400	47.31	54.00	-6.69	47.42	-0.11	Average
5387.200	60.76	74.00	-13.24	61.00	-0.24	Peak	5438.400	61.32	74.00	-12.68	61.43	-0.11	Peak
10400.000	50.49	68.20	-17.71	42.35	8.14	Peak	10400.000	50.84	68.20	-17.36	42.70	8.14	Peak
15600.000	43.07	54.00	-10.93	32.20	10.87	Average	15600.000	44.60	54.00	-9.40	33.73	10.87	Average
15600.000	56.17	74.00	-17.83	45.30	10.87	Peak	15600.000	58.00	74.00	-16.00	47.13	10.87	Peak

IEEE 802.11a High CH Horizontal							IEEE 802.11a High CH Vertical						
Freq	Level	Limit	Over	Read	Factor	Remark	Freq	Level	Limit	Over	Read	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5136.000	47.72	54.00	-6.28	48.36	-0.64	Average	5132.000	47.43	54.00	-6.57	48.07	-0.64	Average
5136.000	61.13	74.00	-12.87	61.77	-0.64	Peak	5132.000	60.71	74.00	-13.29	61.35	-0.64	Peak
5238.400	102.26			102.86	-0.60	Average	5238.400	100.40			101.00	-0.60	Average
5238.400	111.73			112.33	-0.60	Peak	5238.400	109.88			110.48	-0.60	Peak
5355.200	45.35	54.00	-8.65	45.69	-0.34	Average	5374.400	47.13	54.00	-6.87	47.40	-0.27	Average
5355.200	63.89	74.00	-10.11	64.23	-0.34	Peak	5374.400	60.69	74.00	-13.31	60.96	-0.27	Peak
10480.000	54.79	68.20	-13.41	46.54	8.25	Peak	10480.000	56.96	68.20	-11.24	48.71	8.25	Peak
15720.000	44.20	54.00	-9.80	33.40	10.80	Average	15720.000	45.46	54.00	-8.54	34.66	10.80	Average
15720.000	57.60	74.00	-16.40	46.80	10.80	Peak	15720.000	59.60	74.00	-14.40	48.80	10.80	Peak

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

IEEE 802.11ac VHT20 Low CH Horizontal							IEEE 802.11ac VHT20 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5148.700	53.13	54.00	-0.87	53.75	-0.62	Average	5149.600	52.28	54.00	-1.72	52.90	-0.62	Average
5148.700	71.85	74.00	-2.15	72.47	-0.62	Peak	5149.600	70.80	74.00	-3.20	71.42	-0.62	Peak
5182.150	94.82			95.47	-0.65	Average	5178.250	92.94			93.59	-0.65	Average
5182.150	105.42			106.07	-0.65	Peak	5178.250	102.77			103.42	-0.65	Peak
10360.000	50.92	68.20	-17.28	42.99	7.93	Peak	10360.000	50.87	68.20	-17.33	42.94	7.93	Peak
15540.000	40.33	54.00	-13.67	29.63	10.70	Average	15540.000	41.22	54.00	-12.78	30.52	10.70	Average
15540.000	53.52	74.00	-20.48	42.82	10.70	Peak	15540.000	54.45	74.00	-19.55	43.75	10.70	Peak

IEEE 802.11ac VHT20 Middle CH Horizontal							IEEE 802.11ac VHT20 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5150.000	53.75	54.00	-0.25	54.37	-0.62	Average	5149.200	52.54	54.00	-1.46	53.16	-0.62	Average
5150.000	67.63	74.00	-6.37	68.25	-0.62	Peak	5149.200	65.76	74.00	-8.24	66.38	-0.62	Peak
5198.800	97.70			98.36	-0.66	Average	5199.200	95.34			96.00	-0.66	Average
5198.800	107.24			107.90	-0.66	Peak	5199.200	104.78			105.44	-0.66	Peak
5437.600	47.54	54.00	-6.46	47.65	-0.11	Average	5431.600	47.33	54.00	-6.67	47.44	-0.11	Average
5437.600	60.77	74.00	-13.23	60.88	-0.11	Peak	5431.600	60.76	74.00	-13.24	60.87	-0.11	Peak
10400.000	51.28	68.20	-16.92	43.14	8.14	Peak	10400.000	51.28	68.20	-16.92	43.14	8.14	Peak
15600.000	42.67	54.00	-11.33	31.80	10.87	Average	15600.000	44.22	54.00	-9.78	33.35	10.87	Average
15600.000	55.77	74.00	-18.23	44.90	10.87	Peak	15600.000	58.27	74.00	-15.73	47.40	10.87	Peak

IEEE 802.11ac VHT20 High CH Horizontal							IEEE 802.11ac VHT20 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5144.000	48.51	54.00	-5.49	49.13	-0.62	Average	5140.000	47.19	54.00	-6.81	47.82	-0.63	Average
5144.000	61.49	74.00	-12.51	62.11	-0.62	Peak	5140.000	61.56	74.00	-12.44	62.19	-0.63	Peak
5239.200	102.34			102.94	-0.60	Average	5237.600	100.73			101.33	-0.60	Average
5239.200	112.18			112.78	-0.60	Peak	5237.600	110.69			111.29	-0.60	Peak
5350.400	48.67	54.00	-5.33	49.03	-0.36	Average	5432.800	47.44	54.00	-6.56	47.56	-0.12	Average
5350.400	66.06	74.00	-7.94	66.42	-0.36	Peak	5432.800	61.45	74.00	-12.55	61.57	-0.12	Peak
10480.000	54.80	68.20	-13.40	46.55	8.25	Peak	10480.000	57.06	68.20	-11.14	48.81	8.25	Peak
15720.000	43.45	54.00	-10.55	32.65	10.80	Average	15720.000	45.12	54.00	-8.88	34.32	10.80	Average
15720.000	56.12	74.00	-17.88	45.32	10.80	Peak	15720.000	58.12	74.00	-15.88	47.32	10.80	Peak

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

IEEE 802.11ac VHT40 Low CH Horizontal							IEEE 802.11ac VHT40 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5149.200	53.56	54.00	-0.44	54.18	-0.62	Average	5148.880	51.74	54.00	-2.26	52.36	-0.62	Average
5149.200	69.01	74.00	-4.99	69.63	-0.62	Peak	5148.880	67.52	74.00	-6.48	68.14	-0.62	Peak
5187.920	92.12			92.77	-0.65	Average	5186.000	89.68			90.34	-0.66	Average
5187.920	102.01			102.66	-0.65	Peak	5186.000	99.66			100.32	-0.66	Peak
10399.000	50.78	68.20	-17.42	42.64	8.14	Peak	10380.000	51.53	68.20	-16.67	43.49	8.04	Peak
15570.000	40.22	54.00	-13.78	29.45	10.77	Average	15570.000	40.57	54.00	-13.43	29.80	10.77	Average
15570.000	55.12	74.00	-18.88	44.35	10.77	Peak	15570.000	52.27	74.00	-21.73	41.50	10.77	Peak

IEEE 802.11ac VHT40 High CH Horizontal							IEEE 802.11ac VHT40 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5149.600	53.39	54.00	-0.61	54.01	-0.62	Average	5135.200	51.78	54.00	-2.22	52.42	-0.64	Average
5149.600	65.24	74.00	-8.76	65.86	-0.62	Peak	5135.200	64.12	74.00	-9.88	64.76	-0.64	Peak
5226.400	95.91			96.54	-0.63	Average	5231.600	92.41			93.03	-0.62	Average
5226.400	105.55			106.18	-0.63	Peak	5231.600	102.13			102.75	-0.62	Peak
5357.200	49.21	54.00	-4.79	49.54	-0.33	Average	5357.200	48.53	54.00	-5.47	48.86	-0.33	Average
5357.200	60.93	74.00	-13.07	61.26	-0.33	Peak	5357.200	62.11	74.00	-11.89	62.44	-0.33	Peak
10460.000	50.63	68.20	-17.57	42.30	8.33	Peak	10460.000	51.10	68.20	-17.10	42.77	8.33	Peak
15690.000	42.22	54.00	-11.78	31.60	10.62	Average	15690.000	43.52	54.00	-10.48	32.90	10.62	Average
15690.000	55.28	74.00	-18.72	44.66	10.62	Peak	15690.000	57.12	74.00	-16.88	46.50	10.62	Peak

IEEE 802.11ac VHT80 Horizontal							IEEE 802.11ac VHT80 Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5147.400	53.20	54.00	-0.80	53.82	-0.62	Average	5133.200	51.93	54.00	-2.07	52.57	-0.64	Average
5147.400	66.46	74.00	-7.54	67.08	-0.62	Peak	5133.200	65.66	74.00	-8.34	66.30	-0.64	Peak
5213.400	87.64			88.28	-0.64	Average	5221.400	84.70			85.33	-0.63	Average
5213.400	98.60			99.24	-0.64	Peak	5221.400	95.32			95.95	-0.63	Peak
10420.000	52.01	68.20	-16.19	43.78	8.23	Peak	10420.000	50.38	68.20	-17.82	42.15	8.23	Peak
15630.000	41.71	54.00	-12.29	30.85	10.86	Average	15630.000	41.81	54.00	-12.19	30.95	10.86	Average
15630.000	55.29	74.00	-18.71	44.43	10.86	Peak	15630.000	55.87	74.00	-18.13	45.01	10.86	Peak

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

UNII-3:

IEEE 802.11a Low CH Horizontal							IEEE 802.11a Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5620.440	61.21	68.20	-6.99	60.73	0.48	Peak	5649.960	62.28	68.20	-5.92	61.67	0.61	Peak
5699.280	71.90	104.67	-32.77	71.04	0.86	Peak	5699.280	69.90	104.67	-34.77	69.04	0.86	Peak
5718.720	85.23	110.44	-25.21	84.32	0.91	Peak	5719.800	83.20	110.74	-27.54	82.28	0.92	Peak
5743.920	113.03			112.06	0.97	Peak	5747.880	108.17			107.19	0.98	Peak
5863.080	64.18	108.54	-44.36	62.74	1.44	Peak	5855.520	64.26	110.65	-46.39	62.85	1.41	Peak
5916.000	65.38	74.84	-9.46	63.74	1.64	Peak	5892.960	64.46	91.87	-27.41	62.89	1.57	Peak
5950.200	64.58	68.20	-3.62	62.84	1.74	Peak	5962.000	64.53	68.20	-3.67	62.75	1.78	Peak
11490.000	38.54	54.00	-15.46	29.53	9.01	Average	11490.000	38.71	54.00	-15.29	29.70	9.01	Average
11490.000	51.32	74.00	-22.68	42.31	9.01	Peak	11490.000	50.89	74.00	-23.11	41.88	9.01	Peak
17235.000	58.58	68.20	-9.62	42.35	16.23	Peak	17235.000	60.23	68.20	-7.97	44.00	16.23	Peak

IEEE 802.11a Middle CH Horizontal							IEEE 802.11a Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5626.920	61.58	68.20	-6.62	61.07	0.51	Peak	5635.200	61.87	68.20	-6.33	61.32	0.55	Peak
5697.480	64.10	103.34	-39.24	63.25	0.85	Peak	5696.400	63.46	102.55	-39.09	62.62	0.84	Peak
5717.640	69.04	110.14	-41.10	68.13	0.91	Peak	5717.640	66.16	110.14	-43.98	65.25	0.91	Peak
5786.400	113.31			112.11	1.20	Peak	5786.400	111.99			110.79	1.20	Peak
5865.240	64.27	107.93	-43.66	62.82	1.45	Peak	5863.800	65.50	108.33	-42.83	64.06	1.44	Peak
5897.280	64.46	88.67	-24.21	62.88	1.58	Peak	5877.480	64.09	103.36	-39.27	62.59	1.50	Peak
5935.440	65.02	68.20	-3.18	63.33	1.69	Peak	5944.080	64.83	68.20	-3.37	63.12	1.71	Peak
11570.000	38.34	54.00	-15.66	29.11	9.23	Average	11570.000	39.63	54.00	-14.37	30.40	9.23	Average
11570.000	51.37	74.00	-22.63	42.14	9.23	Peak	11570.000	51.78	74.00	-22.22	42.55	9.23	Peak
17355.000	58.86	68.20	-9.34	42.76	16.10	Peak	17355.000	57.65	68.20	-10.55	41.55	16.10	Peak

IEEE 802.11a High CH Horizontal							IEEE 802.11a High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5647.080	60.85	68.20	-7.35	60.25	0.60	Peak	5640.600	62.11	68.20	-6.09	61.54	0.57	Peak
5697.840	61.83	103.61	-41.78	60.98	0.85	Peak	5695.320	62.48	101.75	-39.27	61.64	0.84	Peak
5713.680	62.28	109.03	-46.75	61.38	0.90	Peak	5714.760	63.43	109.33	-45.90	62.53	0.90	Peak
5823.480	113.94			112.61	1.33	Peak	5827.800	111.31			109.98	1.33	Peak
5856.960	84.35	110.25	-25.90	82.94	1.41	Peak	5856.960	82.68	110.25	-27.57	81.27	1.41	Peak
5875.680	74.48	104.69	-30.21	72.99	1.49	Peak	5875.680	72.67	104.69	-32.02	71.18	1.49	Peak
5959.560	65.38	68.20	-2.82	63.61	1.77	Peak	5928.240	64.68	68.20	-3.52	63.01	1.67	Peak
11650.000	38.79	54.00	-15.21	28.95	9.84	Average	11650.000	39.49	54.00	-14.51	29.65	9.84	Average
11650.000	51.01	74.00	-22.99	41.17	9.84	Peak	11650.000	51.47	74.00	-22.53	41.63	9.84	Peak
17458.000	59.08	68.20	-9.12	42.77	16.31	Peak	17475.000	59.71	68.20	-8.49	43.34	16.37	Peak

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

IEEE 802.11ac VHT20 Low CH Horizontal							IEEE 802.11ac VHT20 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5620.000	62.27	68.20	-5.93	61.79	0.48	Peak	5627.640	62.17	68.20	-6.03	61.66	0.51	Peak
5699.280	72.41	104.67	-32.26	71.55	0.86	Peak	5697.120	69.55	103.08	-33.53	68.70	0.85	Peak
5718.720	86.09	110.44	-24.35	85.18	0.91	Peak	5719.080	81.66	110.54	-28.88	80.75	0.91	Peak
5743.200	112.78			111.81	0.97	Peak	5748.240	108.37			107.38	0.99	Peak
5863.440	63.98	108.43	-44.45	62.54	1.44	Peak	5867.760	64.02	107.23	-43.21	62.56	1.46	Peak
5913.480	64.31	76.70	-12.39	62.68	1.63	Peak	5878.560	64.35	102.56	-38.21	62.85	1.50	Peak
5930.040	63.98	68.20	-4.22	62.29	1.69	Peak	5952.360	63.84	68.20	-4.36	62.09	1.75	Peak
11490.000	38.31	54.00	-15.69	29.30	9.01	Average	11490.000	38.48	54.00	-15.52	29.47	9.01	Average
11490.000	51.71	74.00	-22.29	42.70	9.01	Peak	11490.000	50.86	74.00	-23.14	41.85	9.01	Peak
17235.000	59.87	68.20	-8.33	43.64	16.23	Peak	17235.000	60.08	68.20	-8.12	43.85	16.23	Peak

IEEE 802.11ac VHT20 Middle CH Horizontal							IEEE 802.11ac VHT20 Middle CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5642.040	61.37	68.20	-6.83	60.79	0.58	Peak	5621.520	61.59	68.20	-6.61	61.11	0.48	Peak
5697.120	63.78	103.08	-39.30	62.93	0.85	Peak	5693.520	65.26	100.42	-35.16	64.43	0.83	Peak
5718.720	67.98	110.44	-42.46	67.07	0.91	Peak	5717.280	66.66	110.04	-43.38	65.75	0.91	Peak
5787.840	113.39			112.19	1.20	Peak	5786.760	112.16			110.96	1.20	Peak
5856.600	65.70	110.35	-44.65	64.29	1.41	Peak	5860.560	65.41	109.24	-43.83	63.99	1.42	Peak
5876.400	64.10	104.16	-40.06	62.61	1.49	Peak	5882.160	64.92	99.88	-34.96	63.41	1.51	Peak
5929.680	64.52	68.20	-3.68	62.85	1.67	Peak	5956.680	63.79	68.20	-4.41	62.03	1.76	Peak
11570.000	38.08	54.00	-15.92	28.85	9.23	Average	11570.000	39.38	54.00	-14.62	30.15	9.23	Average
11570.000	51.21	74.00	-22.79	41.98	9.23	Peak	11570.000	52.64	74.00	-21.36	43.41	9.23	Peak
17355.000	59.11	68.20	-9.09	43.01	16.10	Peak	17355.000	58.91	68.20	-9.29	42.81	16.10	Peak

IEEE 802.11ac VHT20 High CH Horizontal							IEEE 802.11ac VHT20 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5642.760	61.53	68.20	-6.67	60.95	0.58	Peak	5644.560	61.27	68.20	-6.93	60.69	0.58	Peak
5693.880	62.44	100.69	-38.25	61.61	0.83	Peak	5672.640	61.70	84.99	-23.29	60.97	0.73	Peak
5712.600	64.10	108.73	-44.63	63.20	0.90	Peak	5718.000	62.07	110.24	-48.17	61.16	0.91	Peak
5823.480	114.28			112.95	1.33	Peak	5824.560	111.08			109.75	1.33	Peak
5856.960	87.36	110.25	-22.89	85.95	1.41	Peak	5856.240	82.79	110.45	-27.66	81.38	1.41	Peak
5877.120	74.20	103.62	-29.42	72.70	1.50	Peak	5875.680	70.52	104.69	-34.17	69.03	1.49	Peak
5931.480	64.24	68.20	-3.96	62.56	1.68	Peak	5945.520	64.33	68.20	-3.87	62.61	1.72	Peak
11650.000	39.04	54.00	-14.96	29.20	9.84	Average	11650.000	39.36	54.00	-14.64	29.52	9.84	Average
11650.000	53.33	74.00	-20.67	43.49	9.84	Peak	11650.000	52.82	74.00	-21.18	42.98	9.84	Peak
17475.000	60.32	68.20	-7.88	43.95	16.37	Peak	17475.000	58.83	68.20	-9.37	42.46	16.37	Peak

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

IEEE 802.11ac VHT40 Low CH Horizontal							IEEE 802.11ac VHT40 Low CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5638.800	63.67	68.20	-4.53	63.11	0.56	Peak	5647.440	64.72	68.20	-3.48	64.12	0.60	Peak
5697.120	77.93	103.08	-25.15	77.08	0.85	Peak	5697.480	75.12	103.34	-28.22	74.27	0.85	Peak
5719.440	90.76	110.64	-19.88	89.85	0.91	Peak	5719.080	86.75	110.54	-23.79	85.84	0.91	Peak
5752.920	110.59			109.57	1.02	Peak	5757.240	106.06			105.03	1.03	Peak
5858.040	69.93	109.95	-40.02	68.51	1.42	Peak	5859.120	66.72	109.64	-42.92	65.30	1.42	Peak
5878.920	65.70	102.29	-36.59	64.20	1.50	Peak	5898.360	65.21	87.87	-22.66	63.63	1.58	Peak
5941.200	64.35	68.20	-3.85	62.64	1.71	Peak	5952.360	64.23	68.20	-3.97	62.48	1.75	Peak
11510.000	37.91	54.00	-16.09	28.86	9.05	Average	11510.000	37.96	54.00	-16.04	28.91	9.05	Average
11510.000	50.95	74.00	-23.05	41.90	9.05	Peak	11510.000	50.86	74.00	-23.14	41.81	9.05	Peak
17263.000	59.78	68.20	-8.42	43.27	16.51	Peak	17265.000	60.17	68.20	-8.03	43.64	16.53	Peak

IEEE 802.11ac VHT40 High CH Horizontal							IEEE 802.11ac VHT40 High CH Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5647.760	62.50	68.20	-5.70	61.90	0.60	Peak	5647.760	62.73	68.20	-5.47	62.13	0.60	Peak
5698.520	68.41	104.11	-35.70	67.55	0.86	Peak	5698.520	66.63	104.11	-37.48	65.77	0.86	Peak
5716.160	74.45	109.73	-35.28	73.54	0.91	Peak	5718.680	69.45	110.43	-40.98	68.54	0.91	Peak
5792.840	111.23			109.99	1.24	Peak	5791.040	109.26			108.04	1.22	Peak
5855.840	80.74	110.56	-29.82	79.33	1.41	Peak	5856.560	78.22	110.36	-32.14	76.81	1.41	Peak
5878.160	73.21	102.85	-29.64	71.71	1.50	Peak	5878.520	71.38	102.58	-31.20	69.88	1.50	Peak
5925.320	64.85	68.20	-3.35	63.19	1.66	Peak	5954.120	64.52	68.20	-3.68	62.77	1.75	Peak
11590.000	38.16	54.00	-15.84	28.87	9.29	Average	11590.000	38.44	54.00	-15.56	29.15	9.29	Average
11590.000	51.61	74.00	-22.39	42.32	9.29	Peak	11590.000	51.72	74.00	-22.28	42.43	9.29	Peak
17385.000	59.37	68.20	-8.83	43.23	16.14	Peak	17380.000	59.93	68.20	-8.27	43.80	16.13	Peak

IEEE 802.11ac VHT80 Horizontal							IEEE 802.11ac VHT80 Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
5625.840	65.16	68.20	-3.04	64.66	0.50	Peak	5642.400	66.51	68.20	-1.69	65.93	0.58	Peak
5698.560	79.76	104.14	-24.38	78.90	0.86	Peak	5694.600	80.32	101.22	-20.90	79.49	0.83	Peak
5717.640	86.33	110.14	-23.81	85.42	0.91	Peak	5713.320	82.93	108.93	-26.00	82.03	0.90	Peak
5777.040	106.13			104.98	1.15	Peak	5777.760	105.47			104.32	1.15	Peak
5855.520	82.79	110.65	-27.86	81.38	1.41	Peak	5857.320	81.70	110.15	-28.45	80.29	1.41	Peak
5879.280	76.76	102.02	-25.26	75.26	1.50	Peak	5875.320	73.53	104.96	-31.43	72.04	1.49	Peak
5932.560	67.06	68.20	-1.14	65.38	1.68	Peak	5946.600	65.15	68.20	-3.05	63.43	1.72	Peak
11550.000	37.81	54.00	-16.19	28.64	9.17	Average	11550.000	37.76	54.00	-16.24	28.59	9.17	Average
11550.000	50.49	74.00	-23.51	41.32	9.17	Peak	11550.000	51.33	74.00	-22.67	42.16	9.17	Peak
17325.000	58.99	68.20	-9.21	42.45	16.54	Peak	17325.000	59.95	68.20	-8.25	43.41	16.54	Peak

Note:

Result = Reading + Correct Factor.


Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

Above 1G (1 GHz-40 GHz): The worst mode is UNII-3 802.11ac VHT20 High CH.

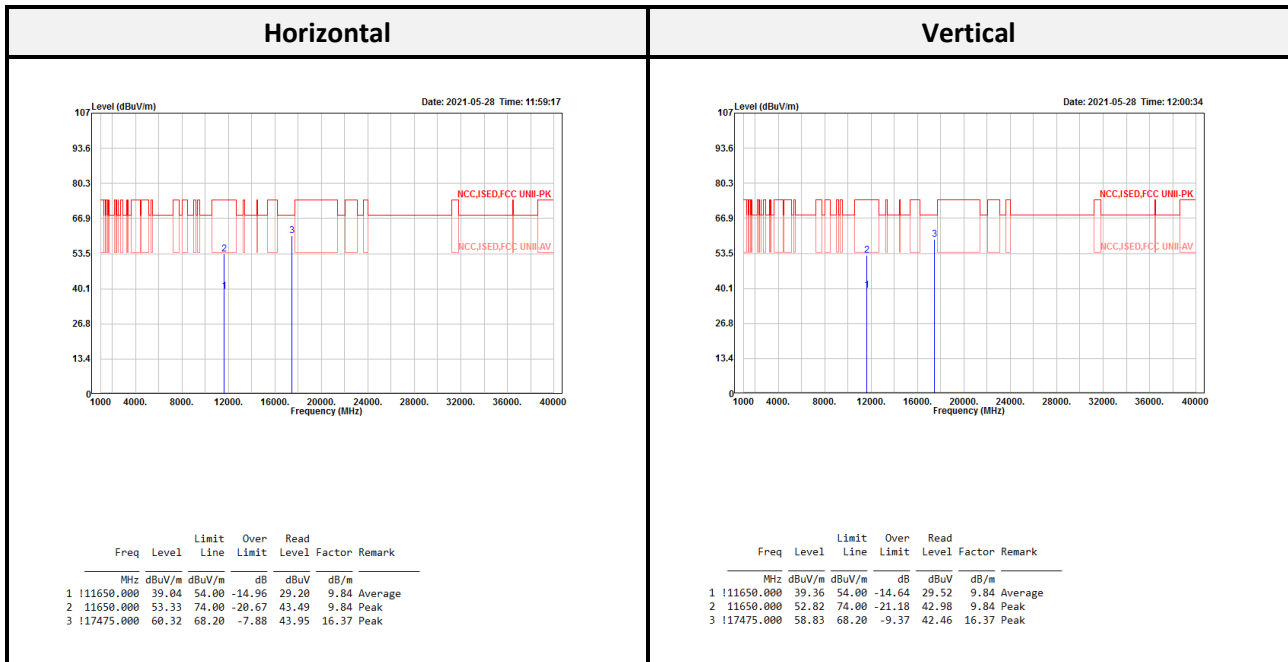

Note:

Result = Reading + Correct Factor.

Margin = Result – Limit.

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Non-Restricted bands signal was less than fundamental 20 dB or more, that don't need get average result.

8 FCC §15.407(a) and §15.407(e) –Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.407(a),

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

According to FCC §15.407(e),

For equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

8.2 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth; b) Set the VBW > RBW; c) Detector = Peak;
 d) Trace mode = max hold; e) Measure the maximum width of the emission that is n dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%;

8.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2021/05/12	2022/05/11
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


8.4 Test Results





Band	Configuration	Channel	Frequency (MHz)	26dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
UNII-1	802.11a	36	5180	36.35	16.85
		40	5200	39.13	19.22
		48	5240	35.48	17.95
	802.11ac VHT20	36	5180	34.64	17.95
		40	5200	39.80	19.74
		48	5240	35.48	18.81
	802.11ac VHT40	38	5190	65.51	36.93
		46	5230	58.44	37.97
	802.11ac VHT80	42	5210	118.03	76.18

Band	Configuration	Channel	Frequency (MHz)	6dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
UNII-3	802.11a	149	5745	16.35	29.12
		157	5785	16.35	29.52
		165	5825	16.35	29.75
	802.11ac VHT20	149	5745	17.57	29.58
		157	5785	17.57	29.52
		165	5825	17.57	30.10
	802.11ac VHT40	151	5755	36.41	60.78
		159	5795	36.41	60.43
	802.11ac VHT80	155	5775	75.13	113.92


Note: Limit is 500 kHz or more.





26 dB Bandwidth (UNII-1):

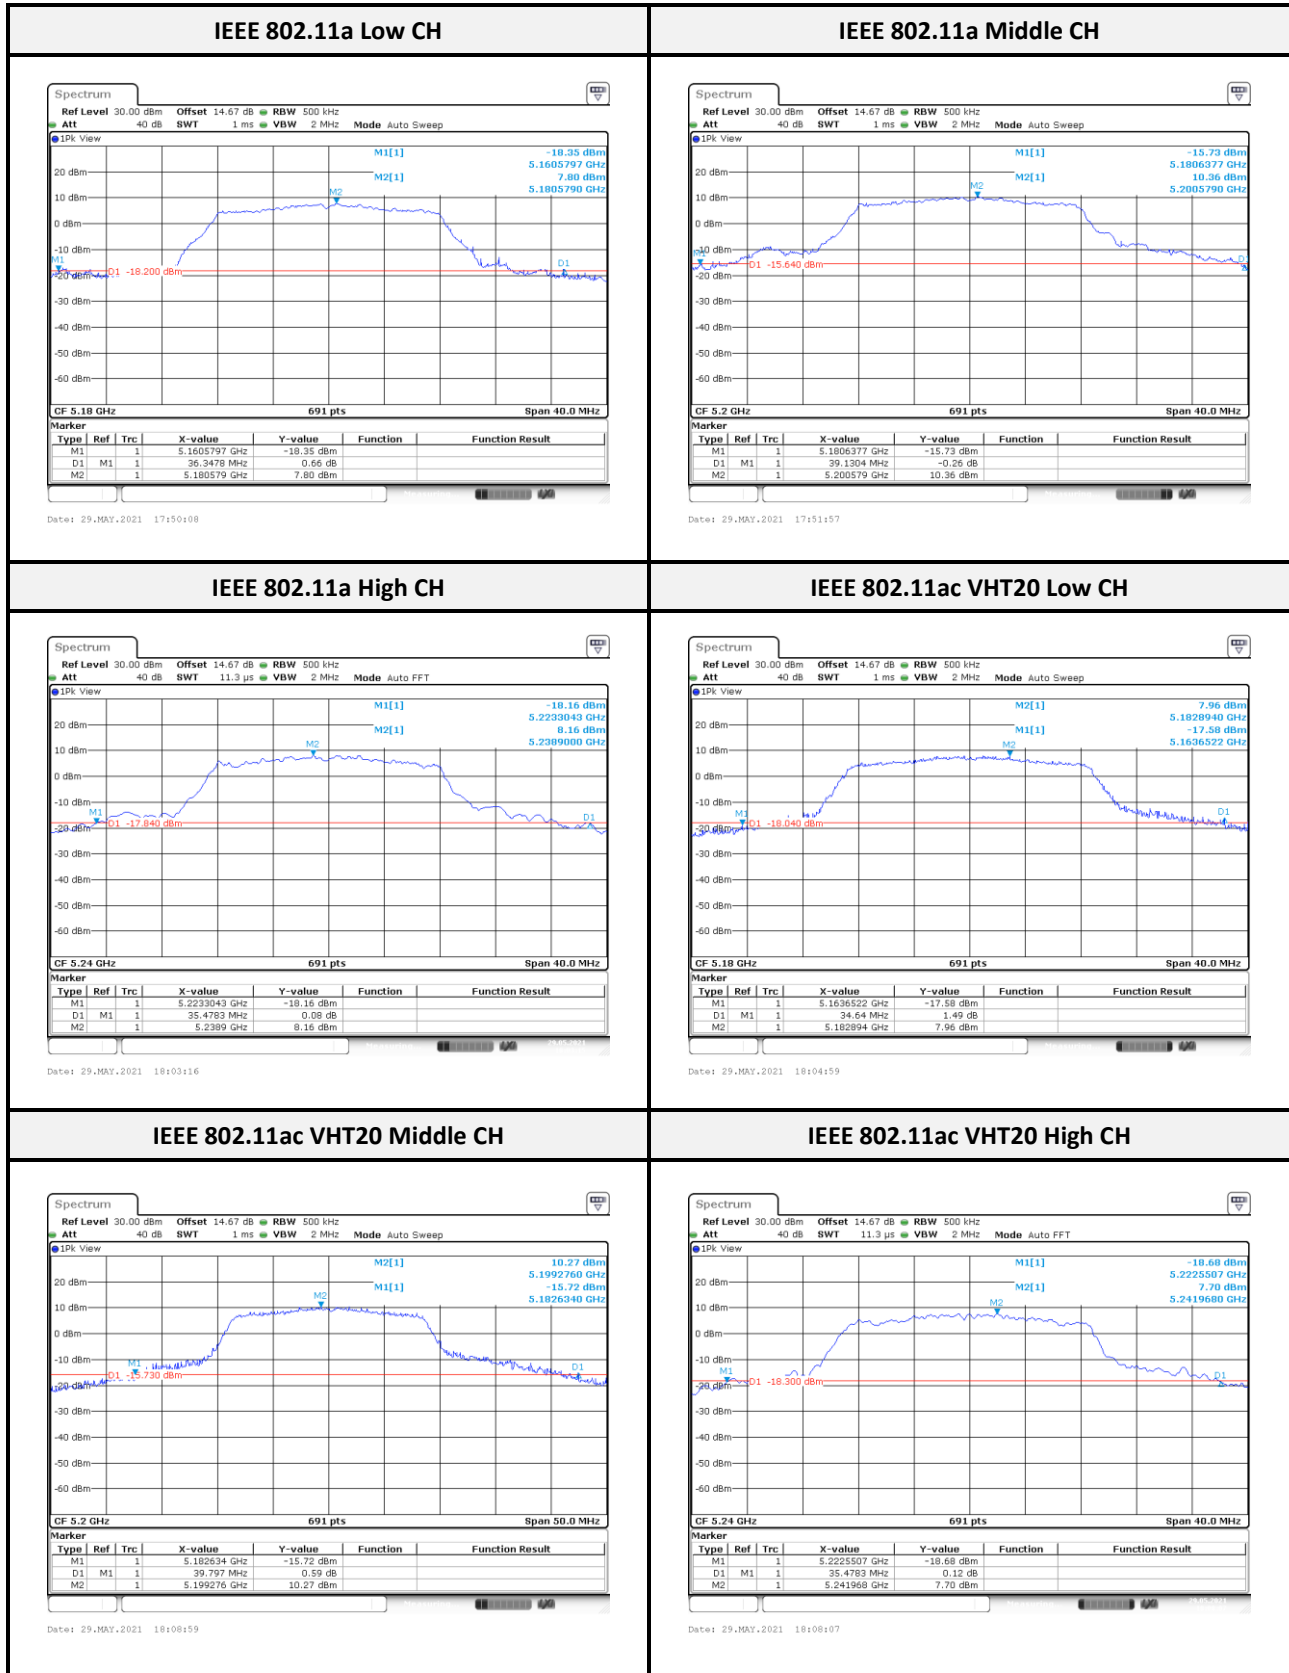

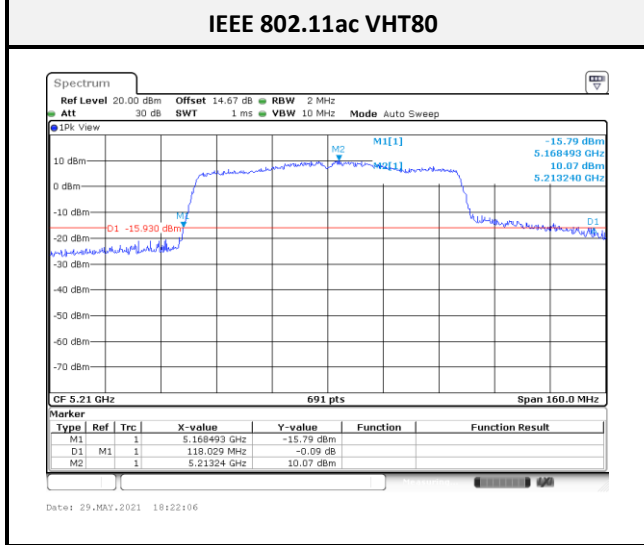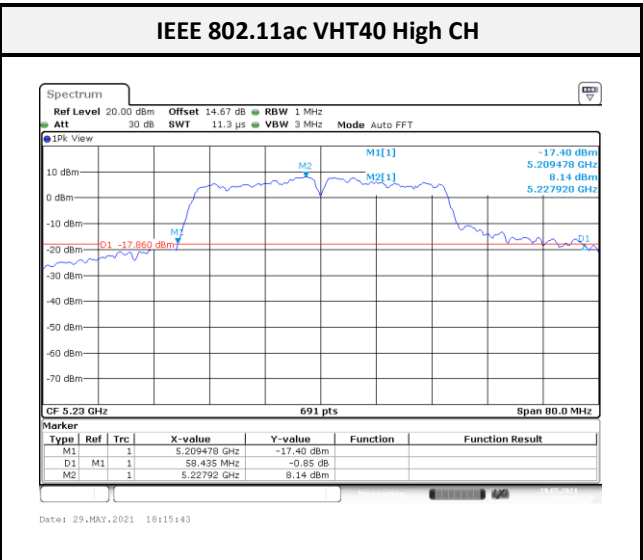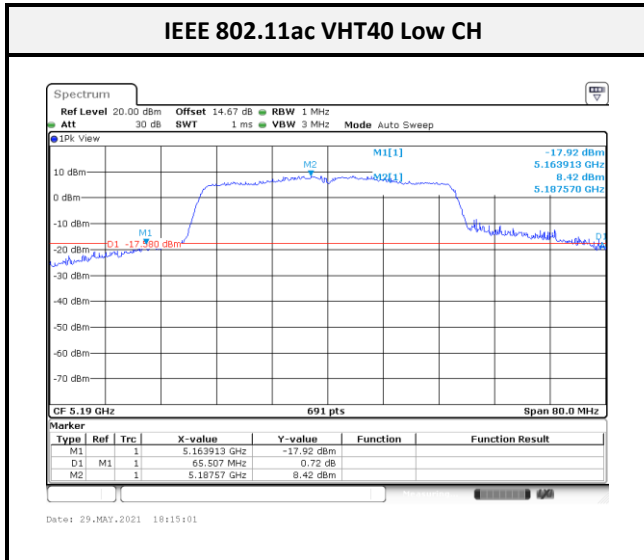






6 dB Bandwidth (UNII-3):

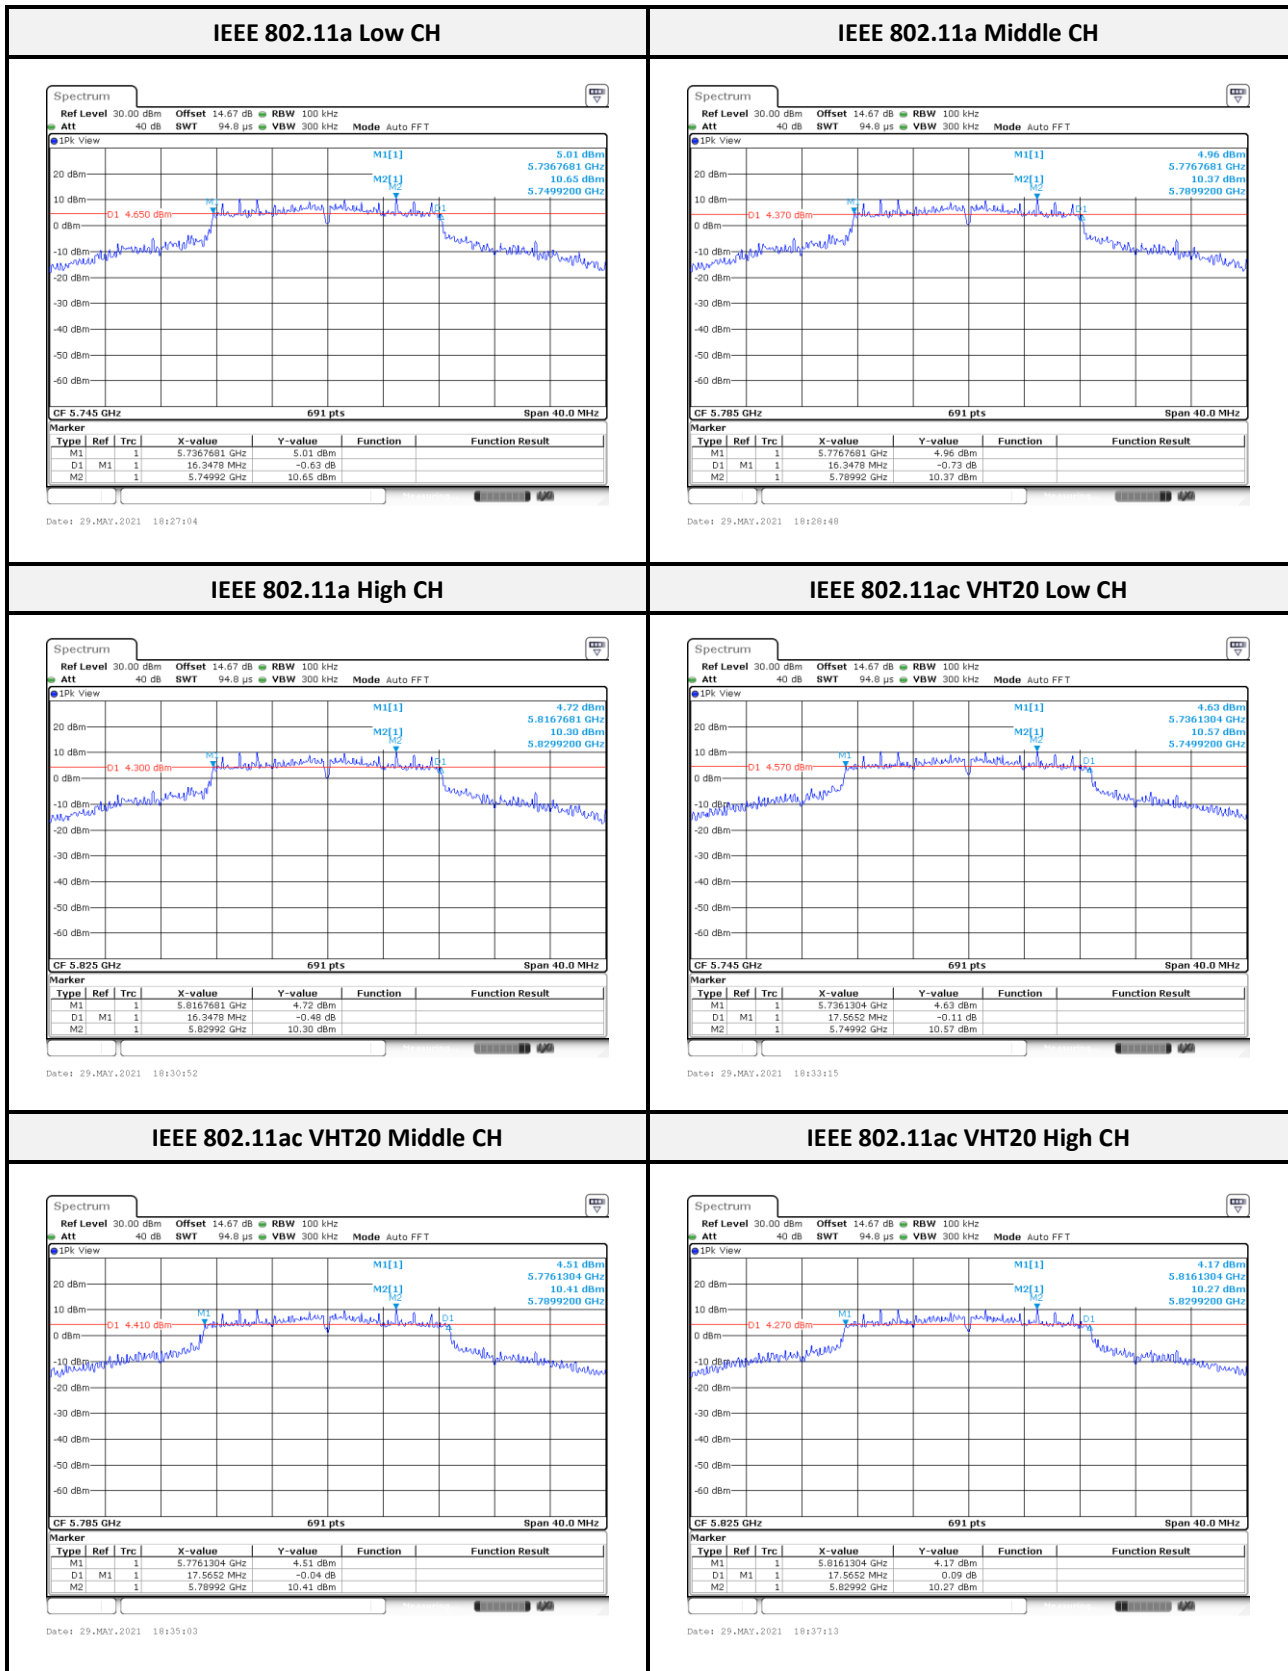

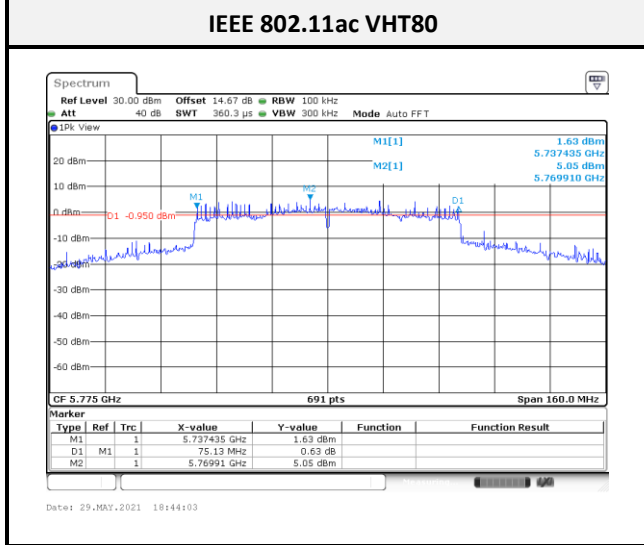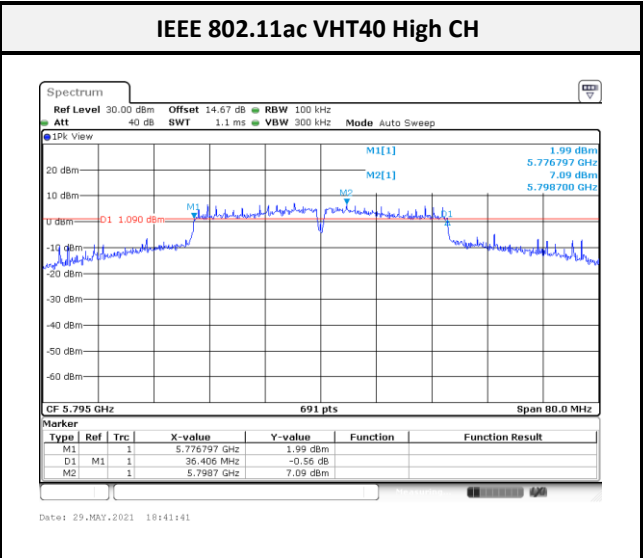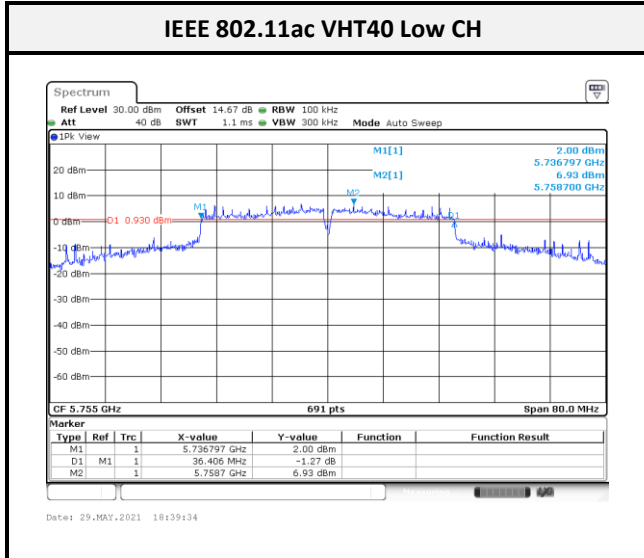






99% Occupied Bandwidth (UNII-1):

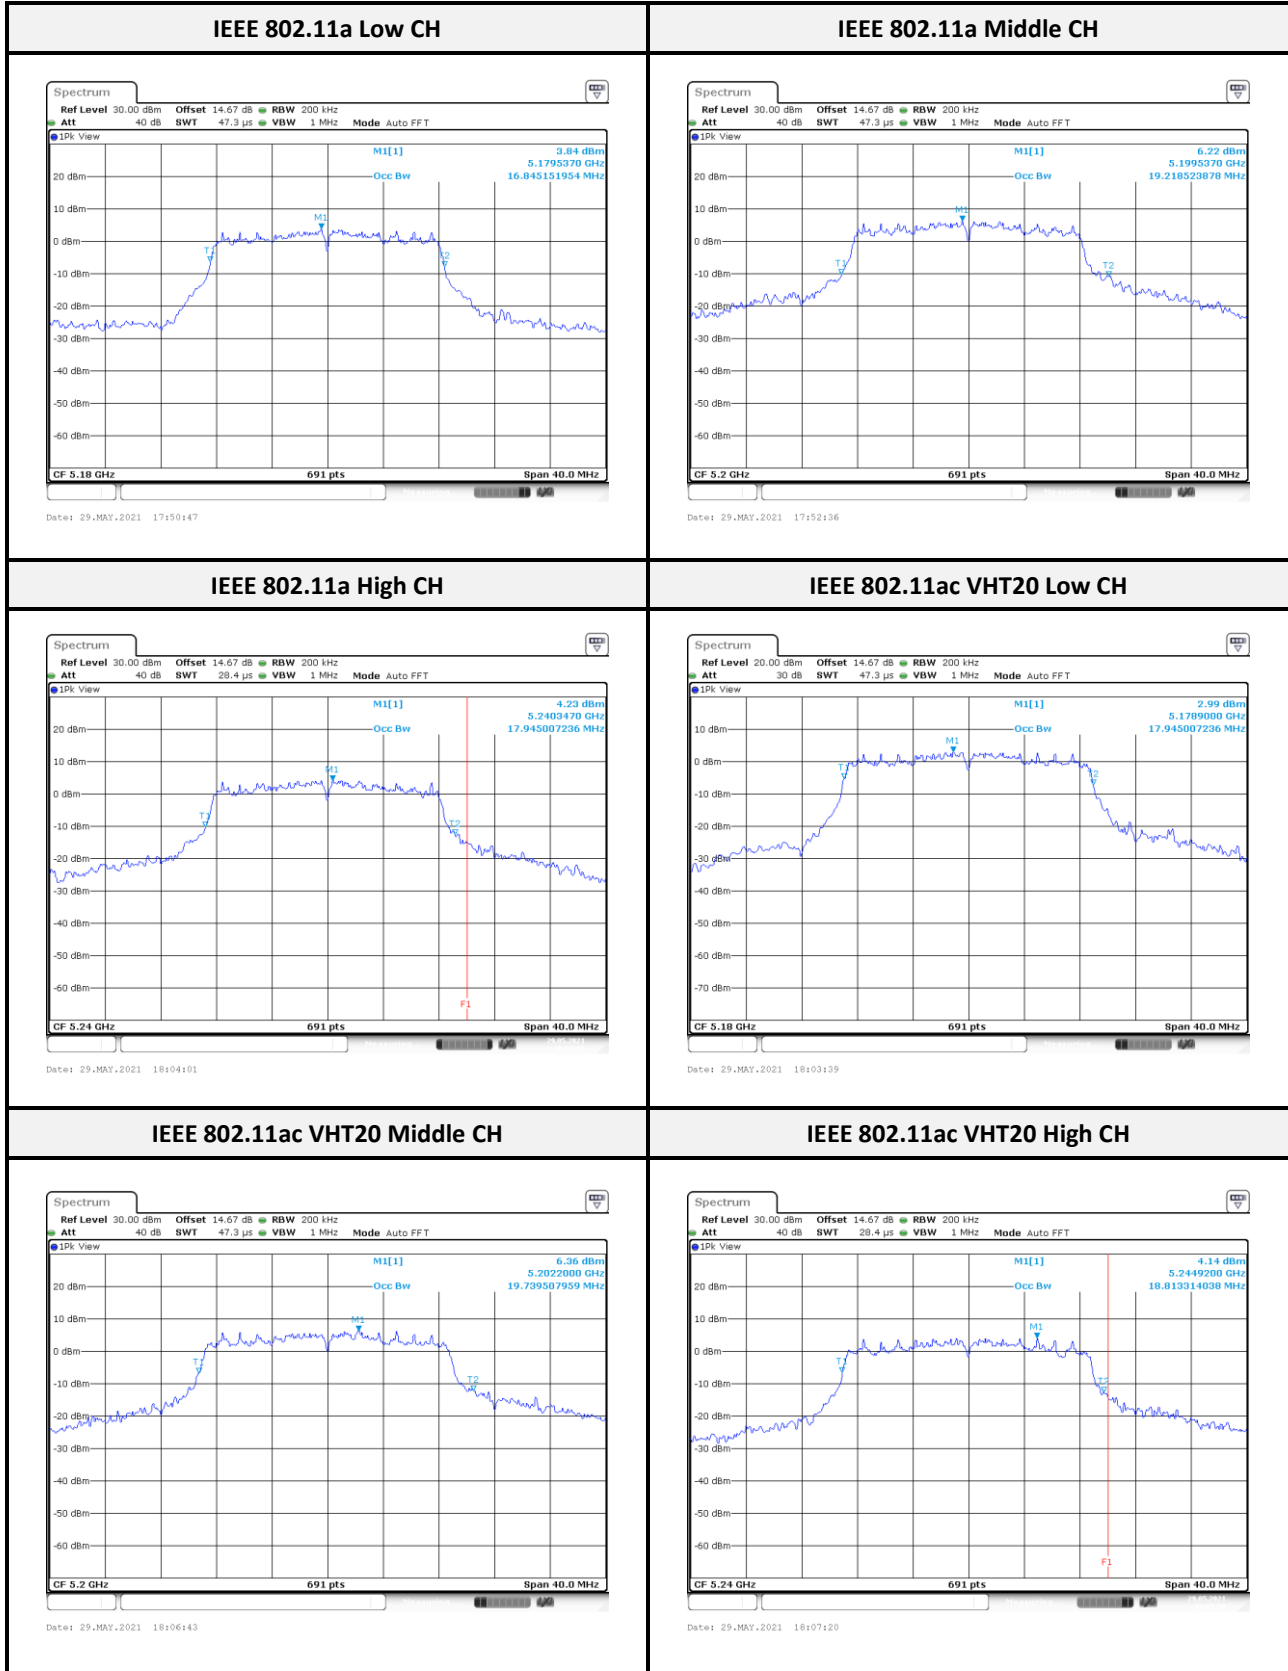

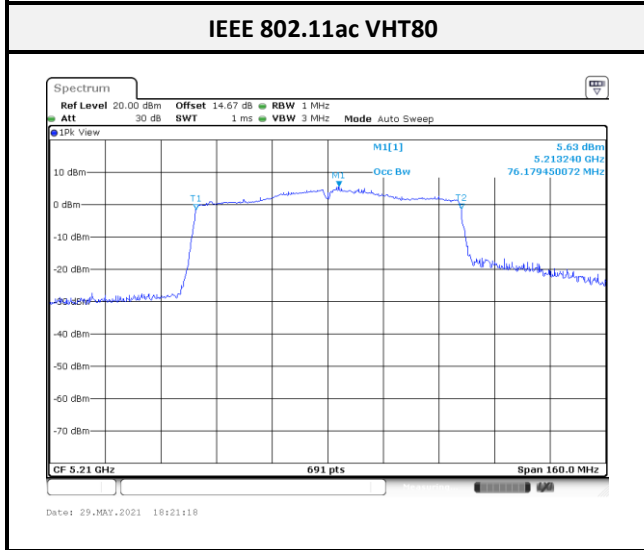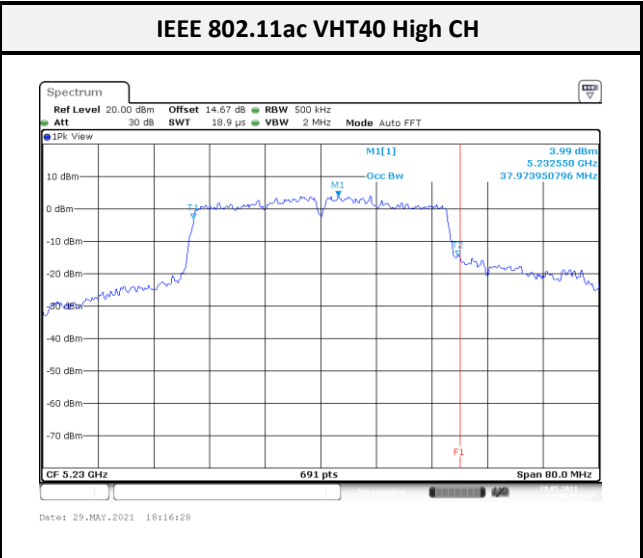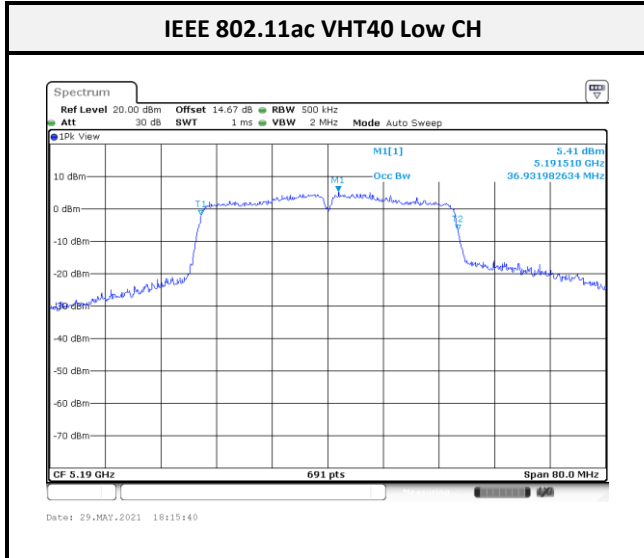

99% Occupied Bandwidth (UNII-3):

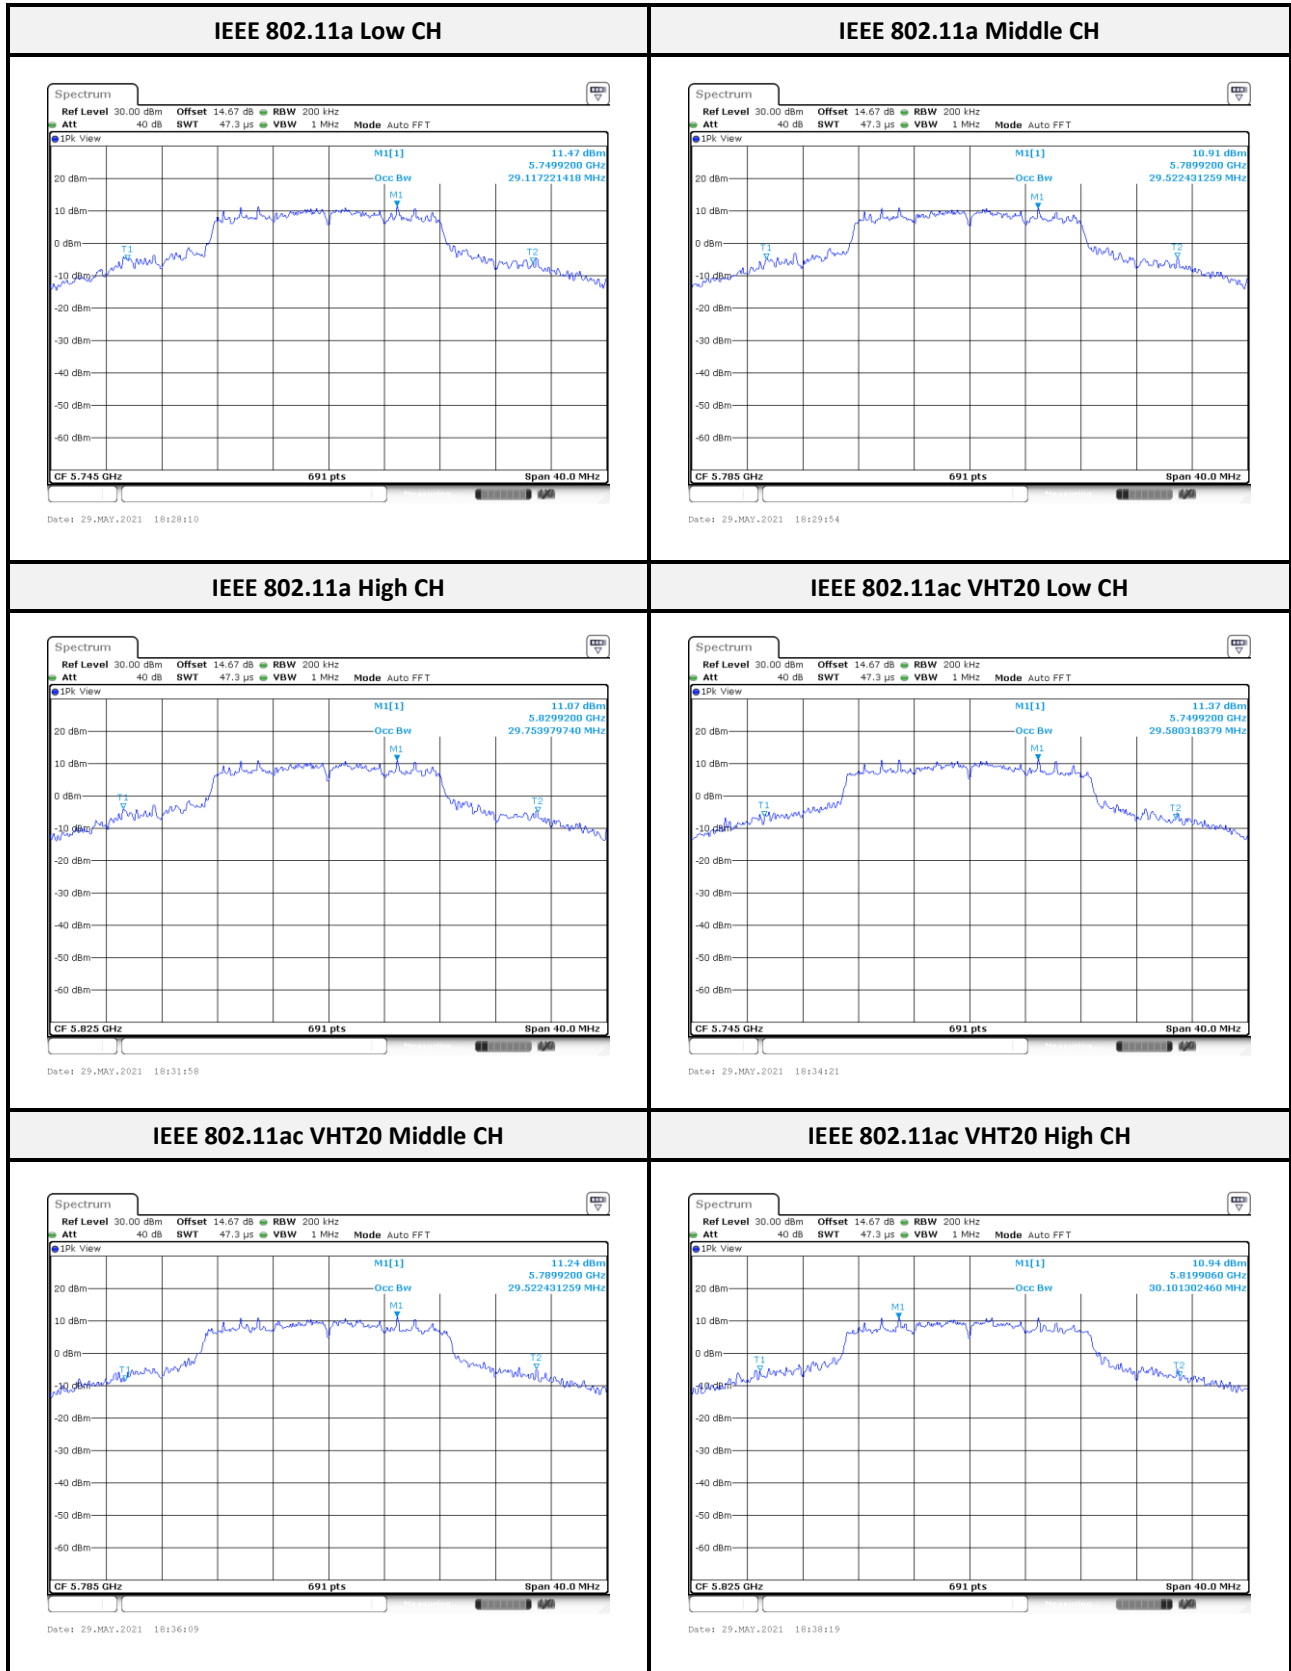

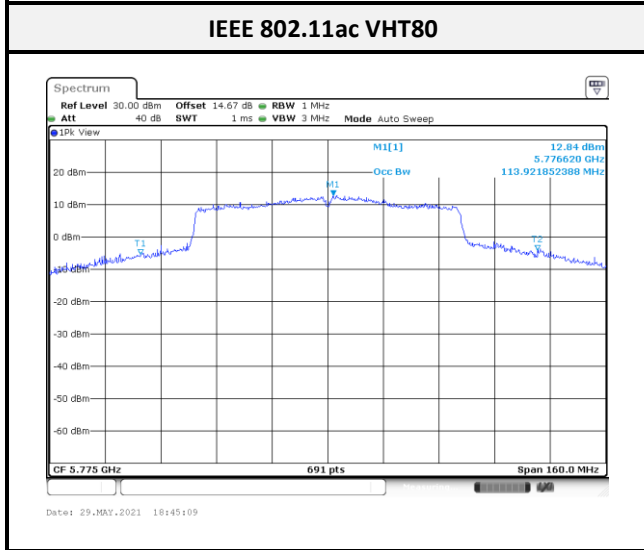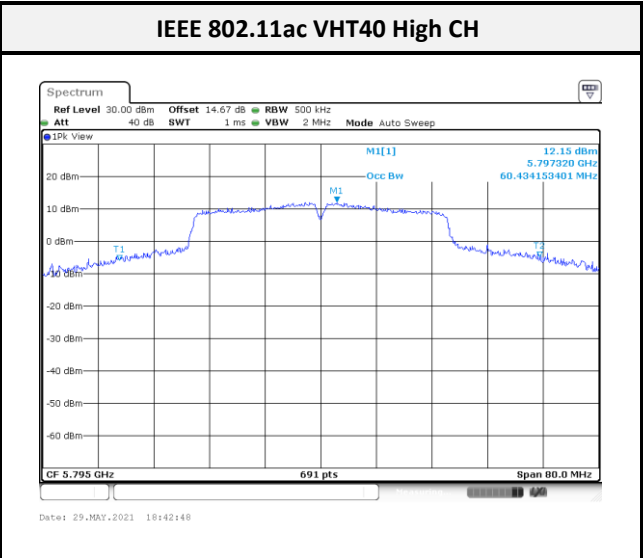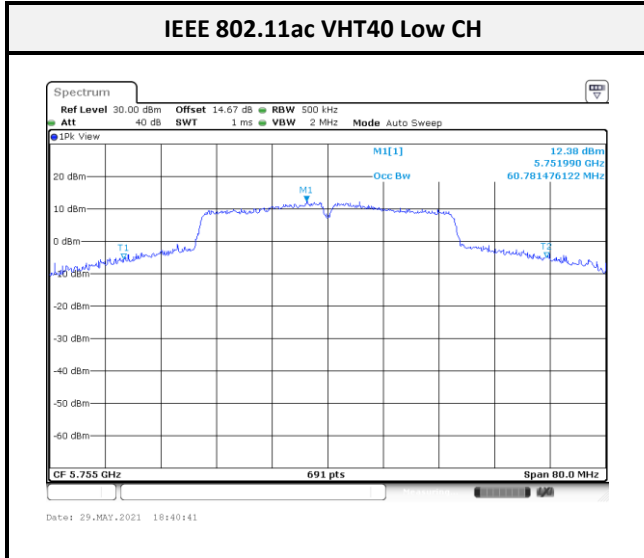

9 FCC §15.407(a)(1) – Maximum Output Power

9.1 Applicable Standard

According to FCC §15.407(a),

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

9.2 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01,

- 1) Place the EUT on a bench and set it in transmitting mode.
- 2) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Power sensor.

9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
USB Wideband Power Sensor	Agilent	U2021XA	MY56120026	2020/09/14	2021/09/13
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Results

Configuration	Channel	Frequency (MHz)	Maximum Average Output Power (dBm)	Maximum Average Output Power (W)	Limit (dBm)
IEEE 802.11a	36	5180	13.48	0.0223	30.00
	40	5200	16.26	0.0423	30.00
	48	5240	15.18	0.0330	30.00
	149	5745	20.55	0.1135	30.00
	157	5785	20.37	0.1089	30.00
	165	5825	20.31	0.1074	30.00
IEEE 802.11n HT20	36	5180	12.86	0.0193	30.00
	40	5200	15.76	0.0377	30.00
	48	5240	14.78	0.0301	30.00
	149	5745	20.55	0.1135	30.00
	157	5785	20.13	0.1030	30.00
	165	5825	20.26	0.1062	30.00
IEEE 802.11n HT40	38	5190	12.61	0.0182	30.00
	46	5230	14.11	0.0258	30.00
	151	5755	20.22	0.1052	30.00
	159	5795	20.05	0.1012	30.00
IEEE 802.11ac VHT20	36	5180	13.13	0.0206	30.00
	40	5200	15.83	0.0383	30.00
	48	5240	14.83	0.0304	30.00
	149	5745	20.71	0.1178	30.00
	157	5785	20.34	0.1081	30.00
	165	5825	20.58	0.1143	30.00
IEEE 802.11ac VHT40	38	5190	12.77	0.0189	30.00
	46	5230	14.17	0.0261	30.00
	151	5755	20.42	0.1102	30.00
	159	5795	20.28	0.1067	30.00
IEEE 802.11ac VHT80	42	5210	12.35	0.0172	30.00
	155	5775	18.86	0.0769	30.00

10 FCC §15.407(a) – Power Spectral Density

10.1 Applicable Standard

According to FCC §15.407(a),

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

10.2 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 and ANSI 63.10: 2013 Sec 10.3.7.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set the RBW to 1 MHz.
- b) Set the VBW to be at least 1 MHz (a VBW of 3 MHz is desirable).
- c) Set the frequency span to examine the spectrum across a convenient frequency segment (e.g., 600 MHz).
- d) Select the power averaging (rms) detector.
- e) Set the sweep time so that there is no more than a 1 ms integration period over each measurement bin.
- f) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2021/05/12	2022/05/11
Cable	MTJ	MT40S	620620-MT40S-100	Each Use	-


***Statement of Traceability:** The testing equipment’s listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


10.4 Test Results

Band	Configuration	Channel	Frequency (MHz)	PSD (dBm/MHz)	PSD with Duty Factor (dBm/MHz)	Limit (dBm/MHz)
UNII-1	802.11a	36	5180	4.45	4.70	17.00
		40	5200	6.74	6.99	17.00
		48	5240	4.93	5.18	17.00
	802.11ac VHT20	36	5180	3.52	3.74	17.00
		40	5200	6.26	6.48	17.00
		48	5240	4.40	4.62	17.00
	802.11ac VHT40	38	5190	0.59	0.99	17.00
		46	5230	0.96	1.36	17.00
	802.11ac VHT80	42	5210	-2.64	-1.80	17.00
Band	Configuration	Channel	Frequency (MHz)	PSD (dBm/500 kHz)	PSD with Duty Factor (dBm/500 kHz)	Limit (dBm/500 kHz)
UNII-3	802.11a	149	5745	8.74	8.99	30.00
		157	5785	8.64	8.89	30.00
		165	5825	8.54	8.79	30.00
	802.11ac VHT20	149	5745	8.93	9.15	30.00
		157	5785	8.77	8.99	30.00
		165	5825	8.65	8.87	30.00
	802.11ac VHT40	151	5755	5.25	5.65	30.00
		159	5795	5.45	5.85	30.00
	802.11ac VHT80	155	5775	2.97	3.81	30.00


Note1: The result with Duty Factor





UNII-1:

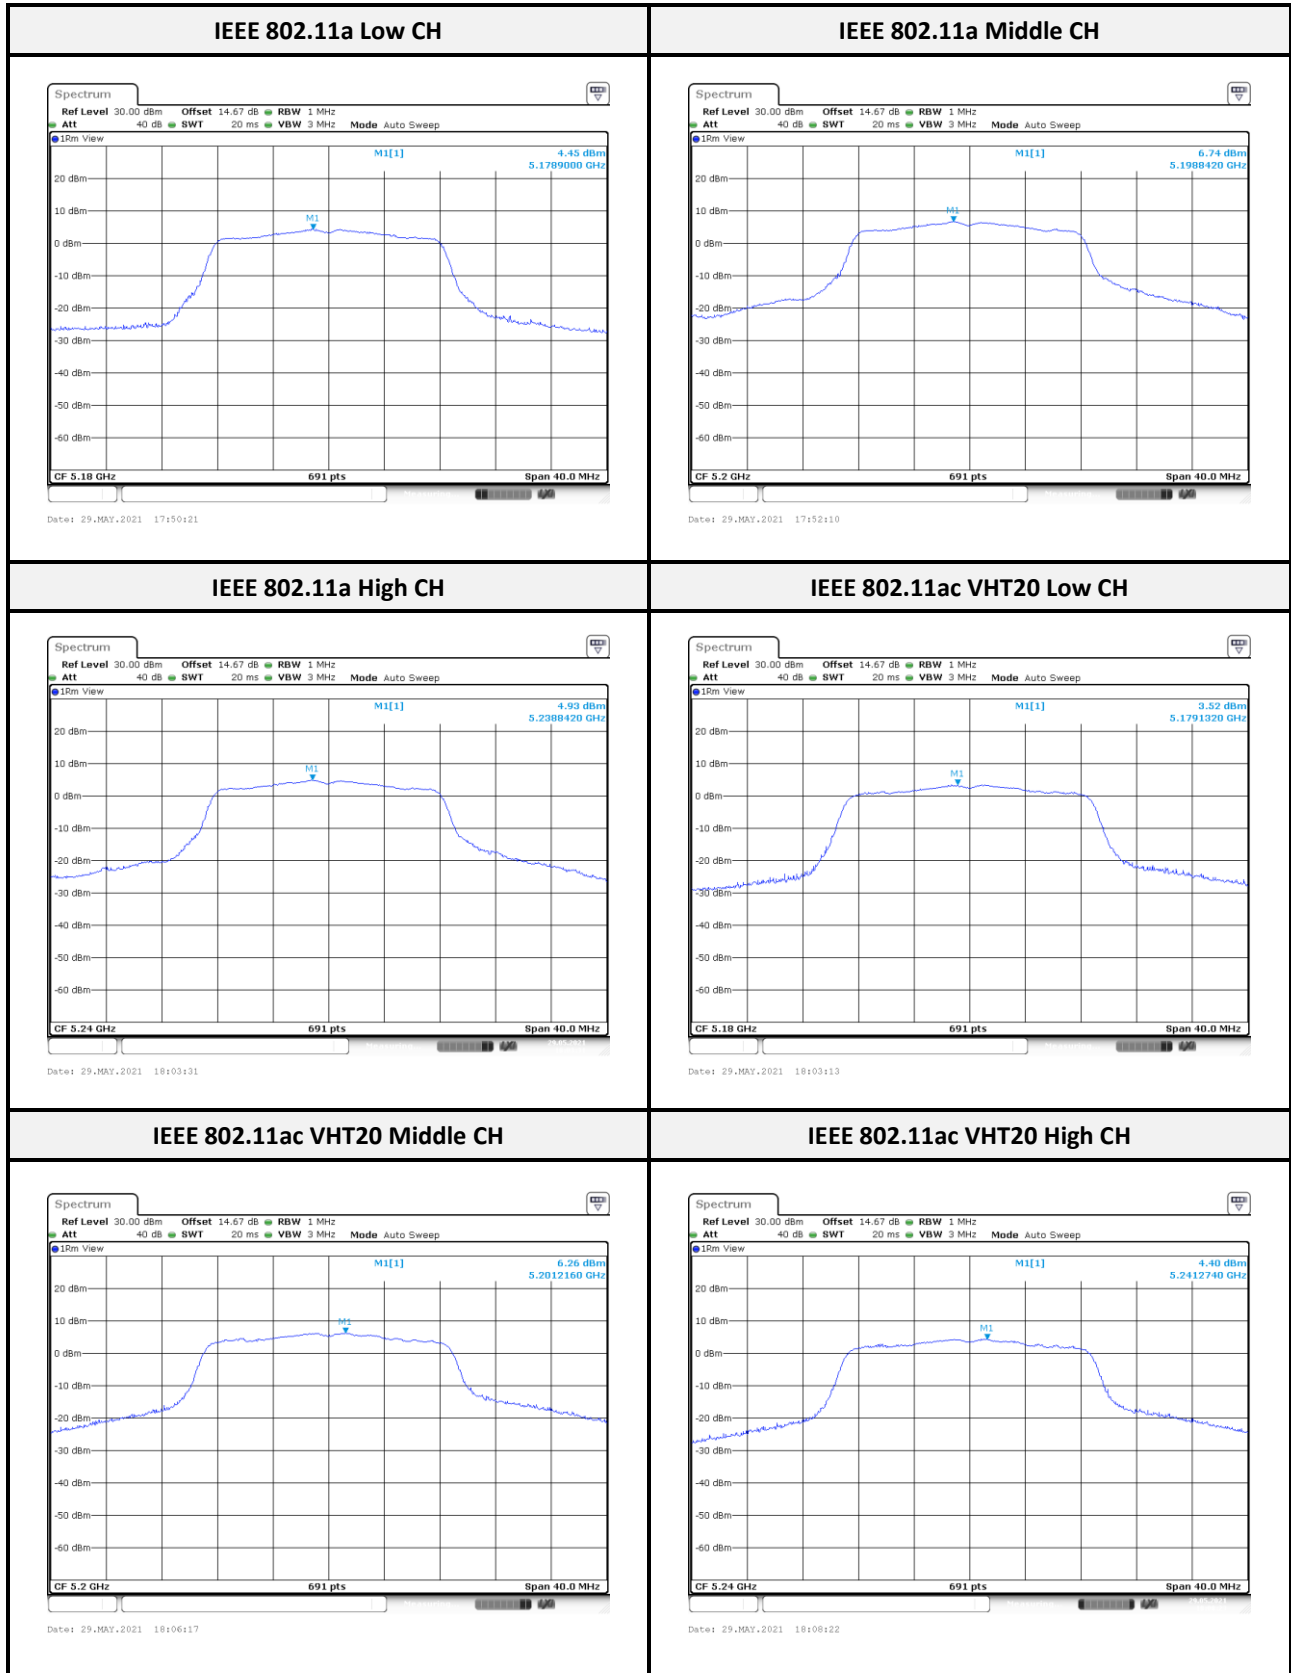

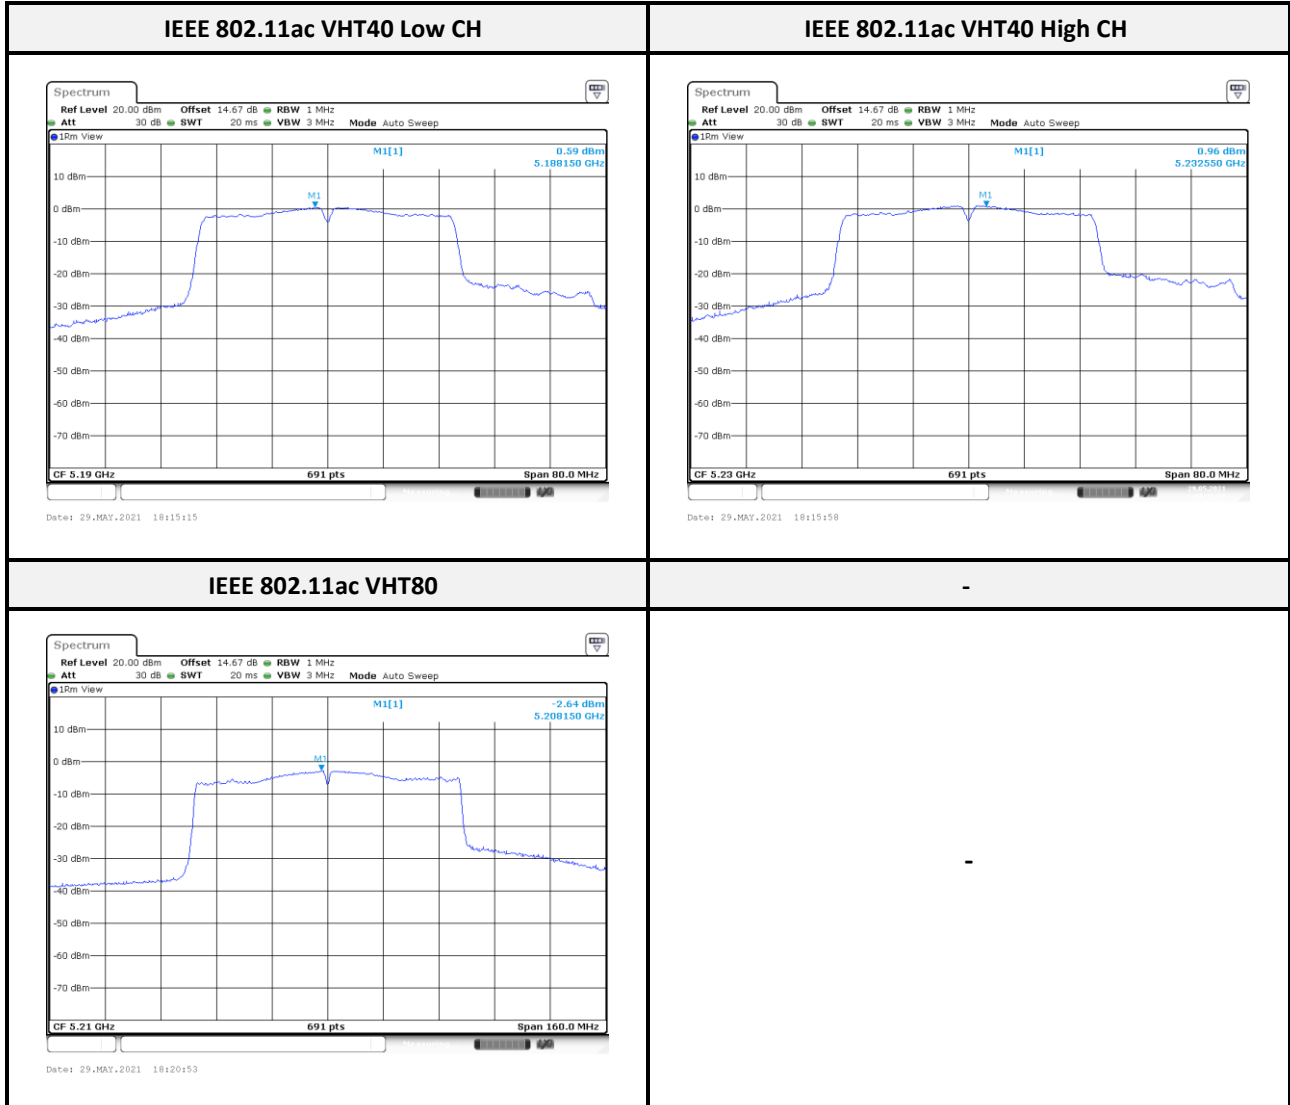

UNII-3:

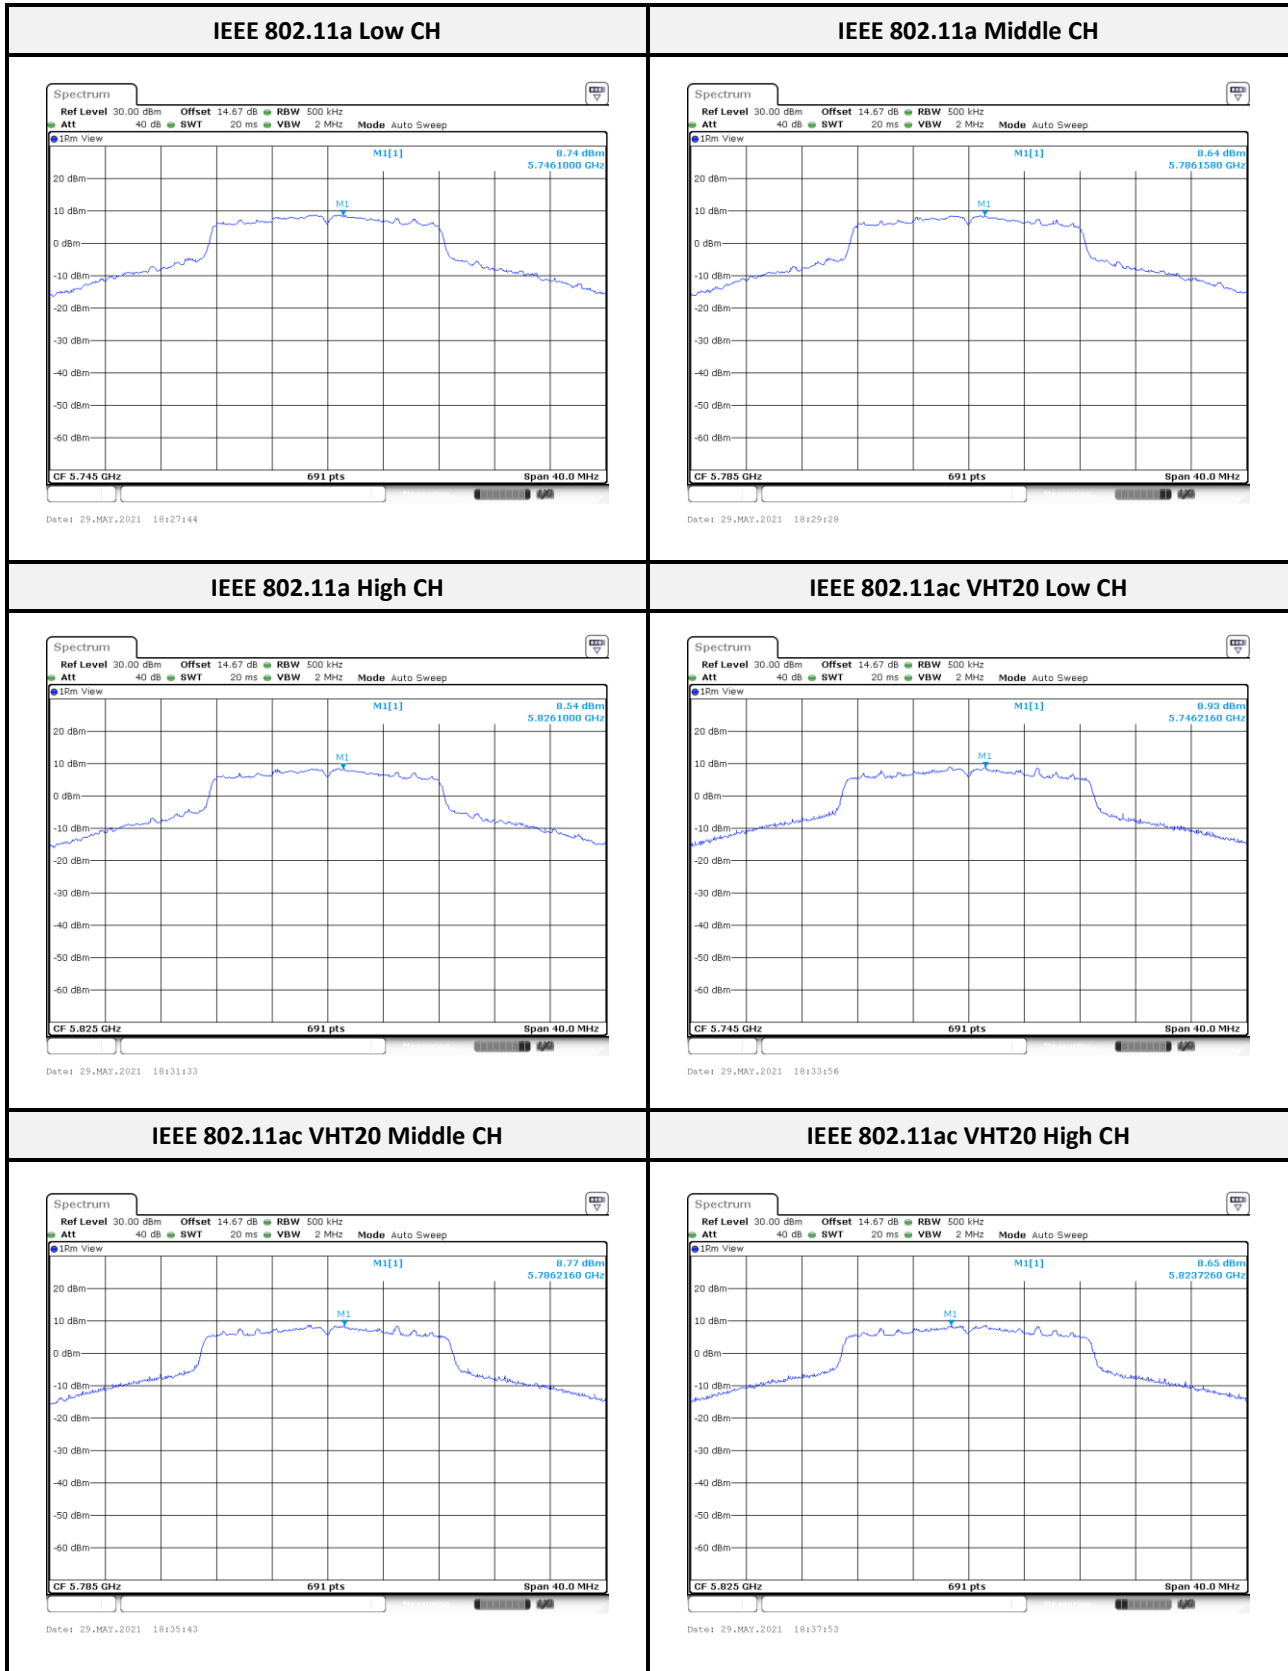

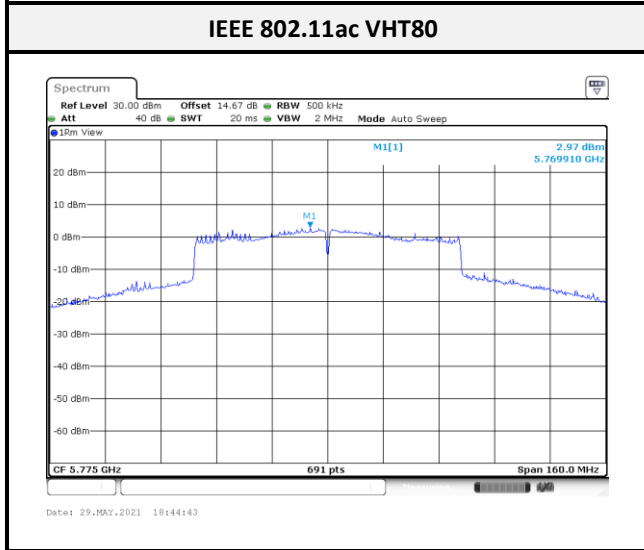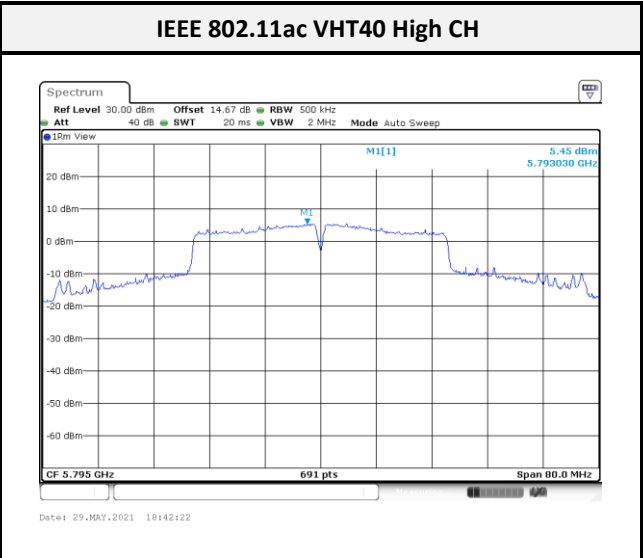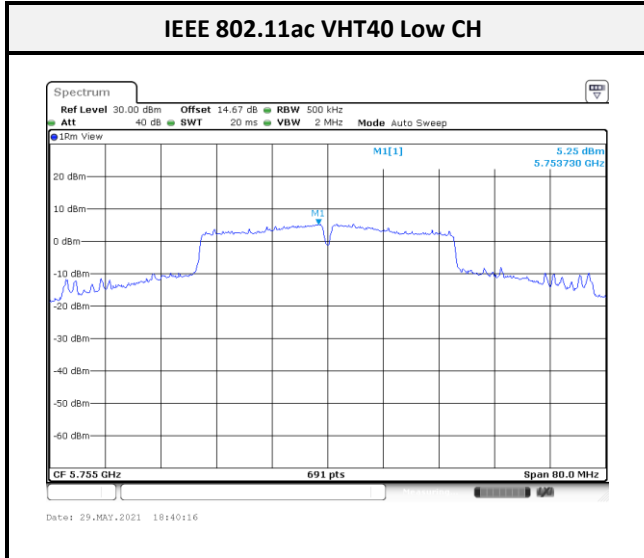

----- END OF REPORT -----