

# FCC TEST REPORT

Report No:1706264W01

Issued for

Shanghai Smarfid Security Equipment Co.,Ltd.

No. 88, Lane 600, XinLi Road, Minhang District, Shanghai,  
China

<b>Product Name:</b>	Slender Series 125 kHz Reader
<b>Brand Name:</b>	Vitto
<b>Model Name:</b>	HR3D2-8N
<b>Series Model:</b>	N/A
<b>FCC ID:</b>	X3A-HR3D28N
<b>Test Standard:</b>	FCC Part 15 Subpart C

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from BZT, All Test Data Presented in this report is only applicable to presented Test sample.

BZT Testing Technology Co., Ltd

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
Baoan District, Shenzhen, Guangdong, China

TEL: +86-755 3307 1680 FAX: +86-755 27341758 E-mail:bruce@bzt.Cn

**TEST RESULT CERTIFICATION**

**Applicant's name :** Shanghai Smarfid Security Equipment Co.,Ltd.  
**Address :** No. 88, Lane 600, XinLi Road, Minhang District, Shanghai, China

**Manufacture's Name :** Shanghai Smarfid Security Equipment Co.,Ltd.  
**Address :** No. 88, Lane 600, XinLi Road, Minhang District, Shanghai, China

**Product description**

**Product name :** Slender Series 125 kHz Reader  
**Brand name :** Vitto  
**Model and/or type reference :** HR3D2-8N  
**Standards :** FCC Part 15 Subpart C  
**Test Procedure :** ANSI C63.10-2013

This device described above has been tested by BZT, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document.

**Date of performance of tests:** 29 June. 2017 ~07 July. 2017

**Date of Issue :** 07 July. 2017

**Test Result :** **Pass**

**Testing Engineer :**



---

(Sean she)

**Technical Manager :**



---

(Hakim.hou)

**Authorized Signatory :**



---

(Vita Li)

<b>Table of Contents</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2. GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
<b>3.CONDUCTED EMISSION TEST RESULT(SECTION 15.207)</b>	<b>11</b>
3.1 POWER LINE CONDUCTED EMISSION LIMITS	11
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	12
3.4 EUT OPERATING CONDITIONS	12
3.5TEST RESULTS	13
<b>4. RADIATED&amp; FIELD EMISSION TEST RESULT(SECTIOU 15.209 )</b>	<b>14</b>
4.1 LIMIT	14
4.2 TEST PROCEDURE	14
4.3 TEST SETUP	15
4.4 TEST RESULTS	16
<b>5. 20 DB BANDWIDTH TEST</b>	<b>19</b>
5.1 LIMIT	19
5.2 TEST SETUP	19
5.3 TEST RESULTS	19
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>20</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	07 July. 2017	1706264W01	ALL	Initial Issue

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.209 (a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	PASS	

### 1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.  
 Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
 Baoan District, Shenzhen, Guangdong, China  
 FCC Registration No.: 701733

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  · where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** · providing a level of confidence of approximately **95 %** °

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88$ dB
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67$ dB
3	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83$ dB
4	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94$ dB
5	Temperature	$\pm 0.5^{\circ}$ C
6	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Slender Series 125 kHz Reader
Trade Name	Vitto
Model Name	HR3D2-8N
Series Model	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Equipemnt Category	Non-ISM frequency
Operating frequency	125KHz
Modulation Type	FSK/ASK
Power rating	DC 12V
Hardware version number	SC_OT_MF_LC v1.1
Software version number	SC_OT_HC_LC_V1_1.hex
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
00	125				

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	gain	Connector	NOTE
1	Vitto	HR3D2-8N	Winding Antenna	5dBi	NA	Antenna

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging+TX Mode


<b>For Conducted Emission</b>	
Final Test Mode	Description
Mode 1	Charging+TX Mode

<b>For Radiated Emission</b>	
Final Test Mode	Description
Mode 1	Charging+TX Mode

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated EmissionTest

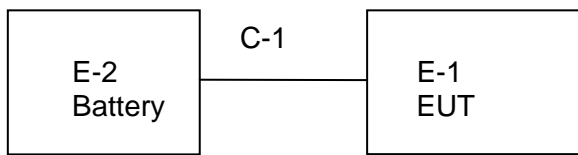



## 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Slender Series 125 kHz Reader	Vitto	HR3D2-8N	N/A	EUT
E-2	Battery	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Shielded Cable (FTP)	NO	50cm	N/A

Note:

- (1) FCC DOC approved.
- (2) FTP is Foiled Twisted Pair.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.10.23	2017.10.22
PreAmplifier	Agilent	8449B	60538	2016.10.23	2017.10.22
Loop Antenna	EMCO	6502	9003-2485	2016.03.06	2019.03.05
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2016.10.23	2017.10.22

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	102086	2016.10.23	2017.10.22
LISN	R&S	ENV216	101242	2016.10.23	2017.10.22
LISN	EMCO	3810/2NM	000-23625	2016.10.23	2017.10.22

### 3.CONDUCTED EMISSION TEST RESULT(SECTION 15.207)

#### 3.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.207 limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

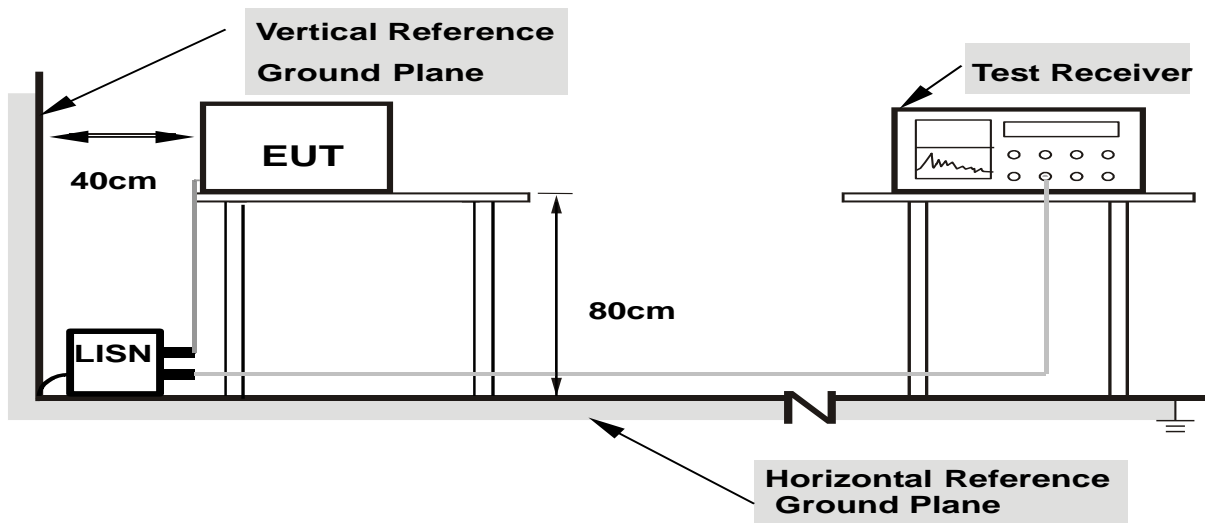

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 3.5 TEST RESULTS

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L/N
Test Voltage:	DC 12V	Test Mode:	N/A

Note: The EUT not applicable.

#### 4. RADIATED& FIELD EMISSION TEST RESULT(SECTIOU 15.209 )

##### 4.1 Limit

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§ 15.209(d)The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

##### 4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 4.3 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

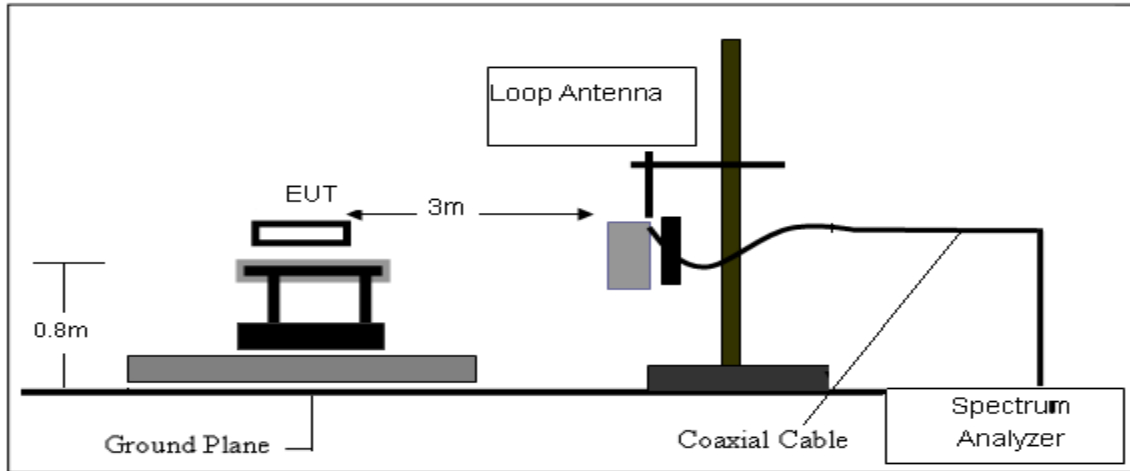

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

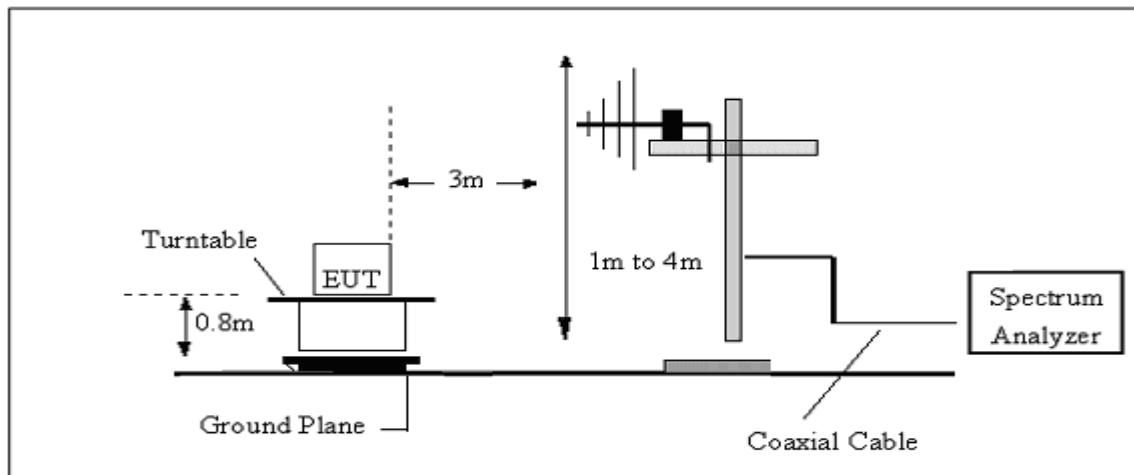

## 4.4 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	TX Mode		

## 4.4.1 Spurious Radiated Emission Below 30 MHz

Frequency	Reading	Detector	Ant. Factor	Cable	Emission	Limits	Margin
(KHz)	(dB $\mu$ V)	(PK/QP/AV)	(dB)	Loss	Level (dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
9	61.28	AV	28.16	0.1	89.54	128.52	-38.98
23	60.29	AV	28.21	0.1	88.60	120.37	-31.77
36	53.57	AV	22.03	0.1	75.70	116.48	-40.78
45	54.23	AV	21.25	0.1	75.58	114.54	-38.96
110	60.35	AV	10.04	0.1	70.49	106.78	-36.29
125	75.41	AV	9.57	0.1	85.08	105.67	-20.59
205	60.46	AV	9.43	0.1	69.99	101.37	-31.38
554	53.22	QP	-16.36	0.1	36.96	72.73	-35.77
23214	41.36	QP	-17.9	0.9	24.36	53.98	-29.62

1. "\*" Means Fundamental frequency

2. Emission Level [dB $\mu$ V/m] = Reading [dB $\mu$ V] + Ant. Factor [dB/m] + Cable Loss [dB]

3. Margin [dB] = Emission Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

4. Limit calculation: Limit at specified distance + 40log (300/3) = Limit + 80 dB for up to 0.49 MHz

Limit at specified distance + 40log (30/3) = Limit + 40 dB for above 0.49 MHz, Below 30 MHz



## 4.4.2 Spurious Radiated Emission below 1 GHz


Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	Mode 1		

The following table shows the highest levels of radiated emissions on polarizations of vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
66.2660	52.73	-24.19	28.54	40.00	-11.46	QP
88.3421	53.47	-20.62	32.85	40.00	-7.15	QP
99.5280	54.82	-19.23	35.59	40.00	-4.41	QP
110.5687	52.29	-18.31	33.98	40.00	-6.02	QP
399.0300	43.98	-11.28	32.70	47.00	-14.30	QP
731.9202	39.35	-3.97	35.38	47.00	-11.62	QP

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

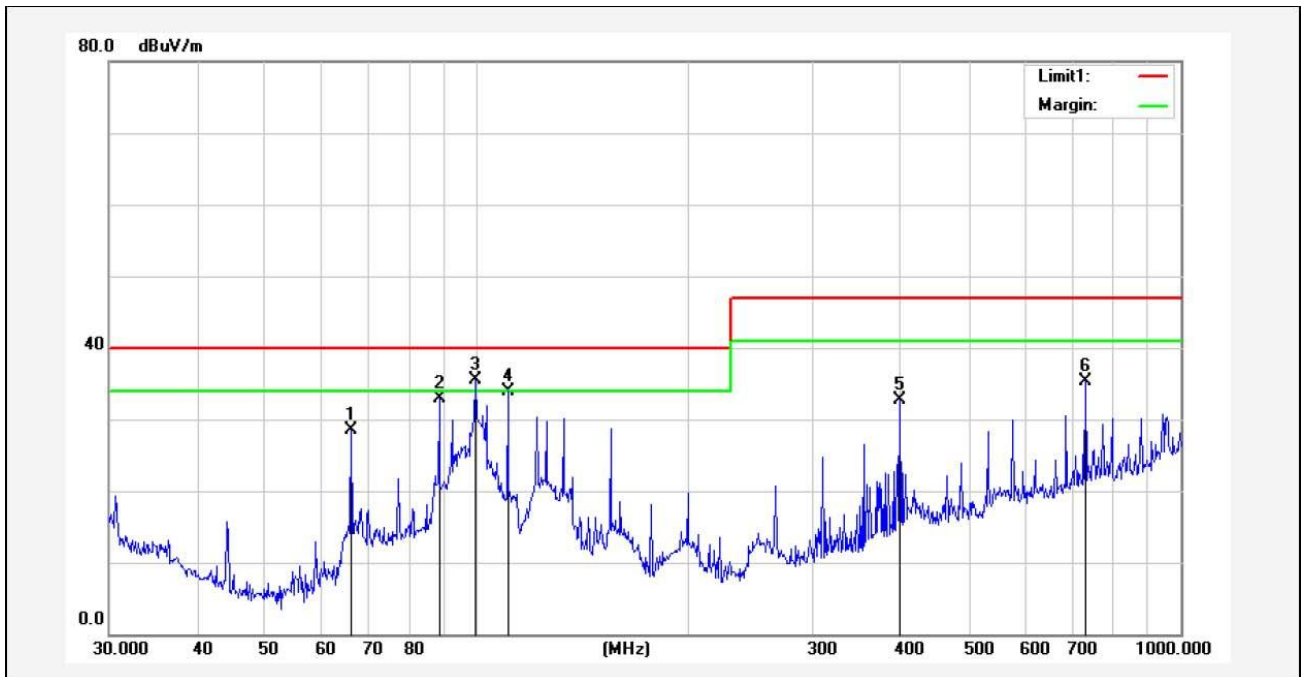


Temperature :	26 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 12V
Test Mode :	Mode 1		

The following table shows the highest levels of radiated emissions on polarizations of horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
66.2660	57.97	-24.19	33.78	40.00	-6.22	QP
88.3421	56.19	-20.62	35.57	40.00	-4.43	QP
110.5687	47.37	-18.31	29.06	40.00	-10.94	QP
132.6850	42.28	-17.54	24.74	40.00	-15.26	QP
309.9977	39.61	-14.50	25.11	47.00	-21.89	QP
942.1304	32.07	-0.65	31.42	47.00	-15.58	QP

Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

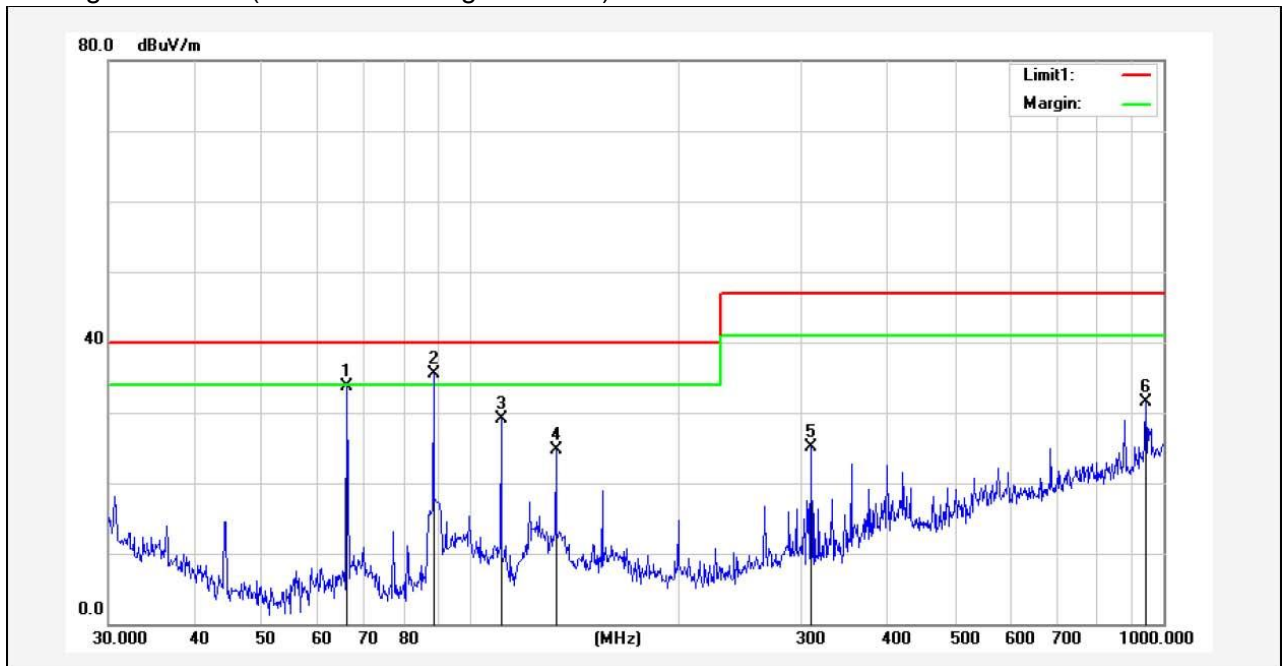

## 5. 20 DB BANDWIDTH TEST

### 5.1 Limit

FCC Part 15.215, the fundamental emission be kept within at least the central 80% of the permitted band .

### 5.2 TEST SETUP


Spectrum Parameter	Setting
Span Frequency	approximately 2 to 3 times the 20 dB bandwidth
RB	greater than 1 % of the 20 dB bandwidth,
VB	equal to the RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


The test program and configuration,Refer to 4.2 and 4.3

### 5.3 TEST RESULTS

OperatingFrequency (KHz)	20 dB Bandwidth(KHz)	Limit (KHz)
125	2.829	100

CH00

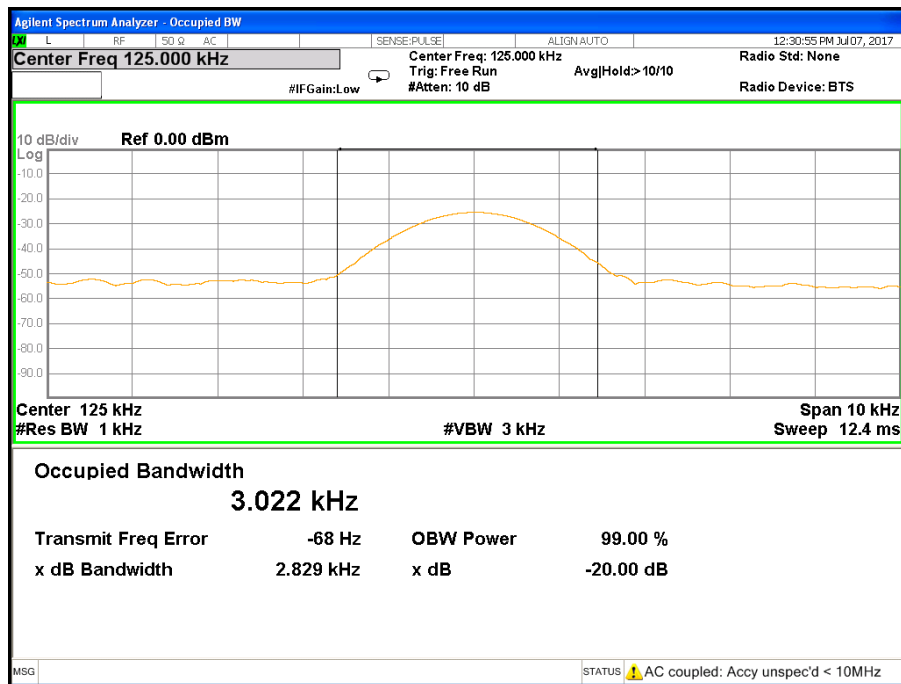

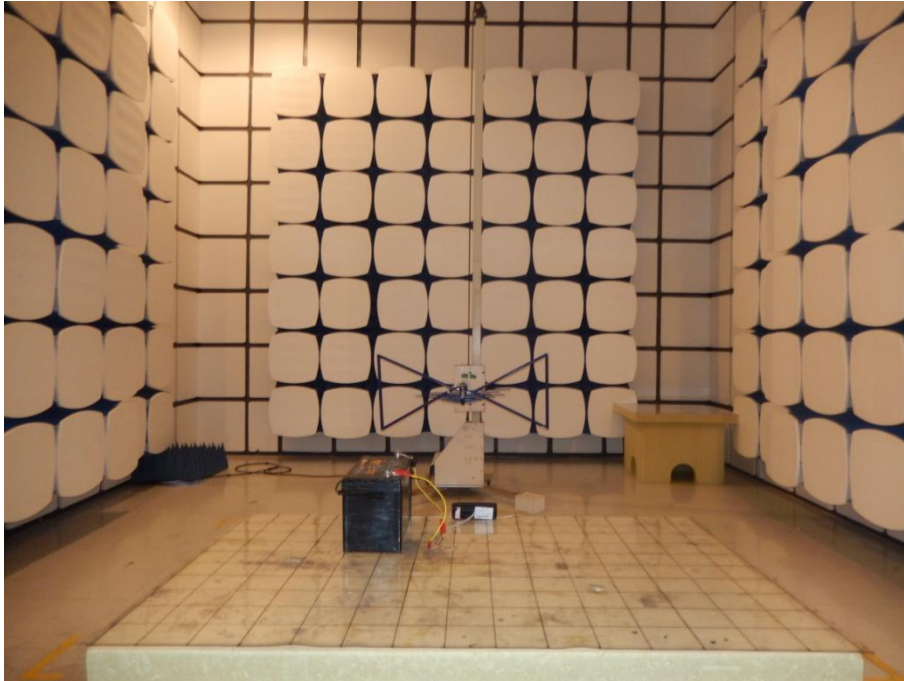**APPENDIX-PHOTOS OF TEST SETUP****Radiated emission Measurement Photos(30MHz-1000MHz)****loop antenna(9KHz-30MHz)**

※※※※※END OF THE REPORT※※※※※