

XT-iP610

Labels description

1- Packing:



Manufacturer name


Product name

Model= Model name

FCC ID= Product ID for FCC approval

IMEI= IMEI number of the GPRS modem

MAC= MAC address of the LAN interface

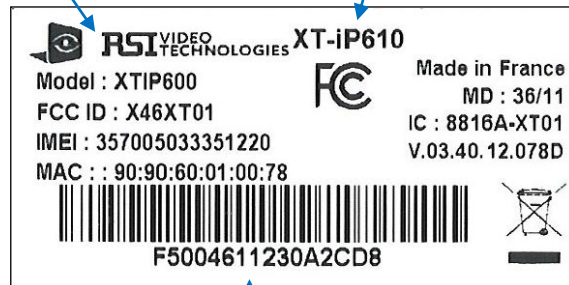



MD= Manufacturing date: WEEK/YEAR

IC= Product ID for Canadian approval

V= Firmware version

Product serial number

2- Outside product:

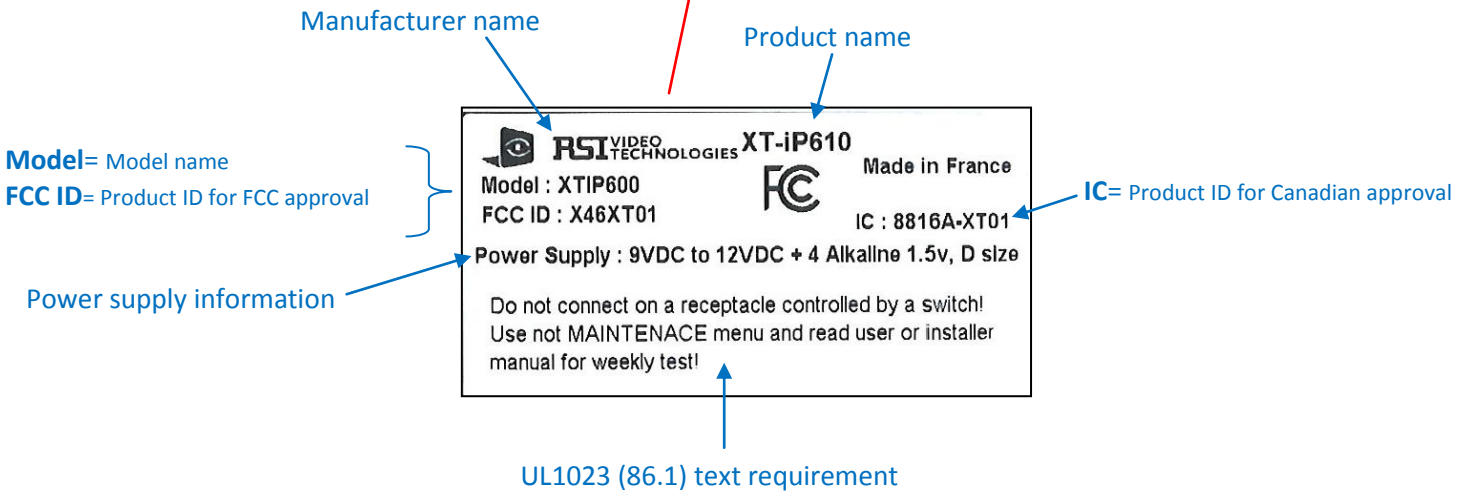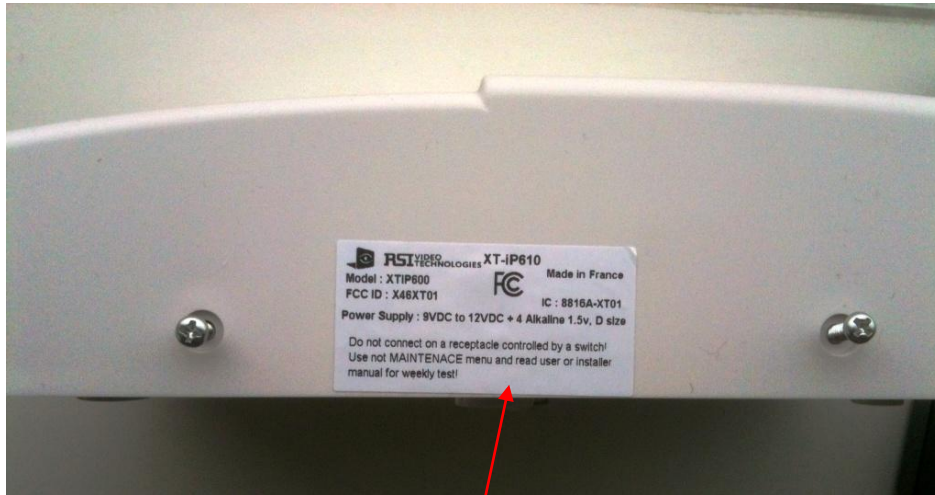


3- Inside product:

Power supply information with
UL1023 (86.1) requirements

POWER SUPPLY
*External power supply 9VDC to 12VDC / 2A
+ 4x Alkaline 1.5V, D size (estimated life = 1 year)*

*See user or installer manual for batteries
maintenance and periodic replacement instructions*

(FR) Retirer les piles avant toute intervention de maintenance! (EN) Remove batteries before any maintenance! (D) Batterien vor jeglichen Wartungsarbeiten entfernen!

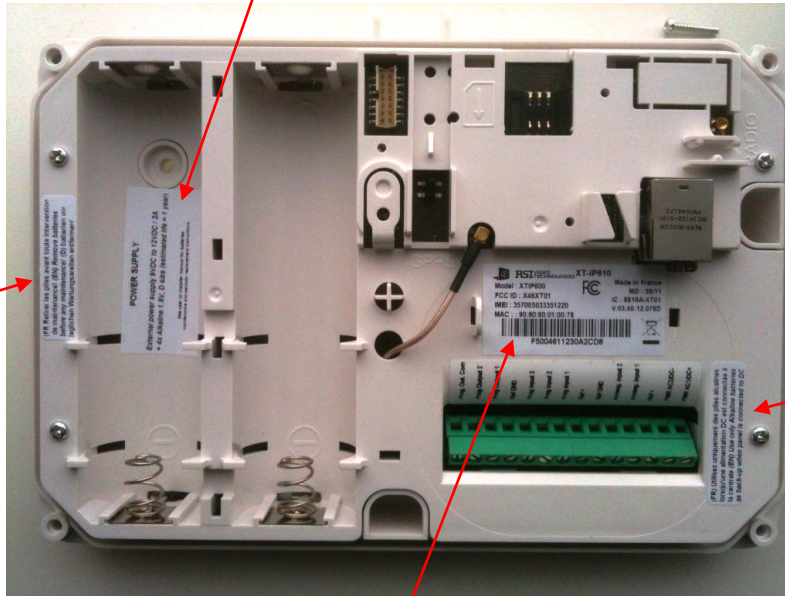

(FR) Utilisez uniquement des piles alcalines lorsqu'une alimentation DC est connectée à la centrale (EN) Use only Alkaline batteries as back-up when panel is connected to DC

Manufacturer name


Product name

Model= Model name

FCC ID= Product ID for FCC approval

IMEI= IMEI number of the GPRS modem

MAC= MAC address of the LAN interface

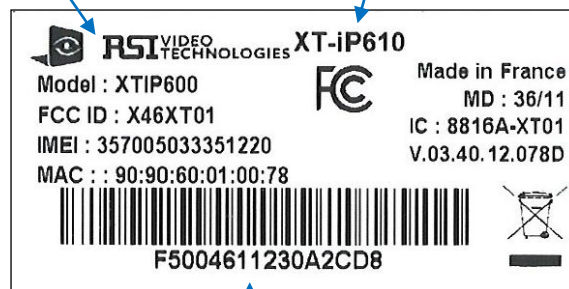

MD= Manufacturing date: WEEK/YEAR

IC= Product ID for Canadian approval

V= Firmware version

Product serial number