

XT-iP630 (Model XTIP631)

Labels description

1. Packing:



Manufacturer name


Product name

Model= Model name

FCC ID= Product ID for FCC approval

IMEI= IMEI number of the GPRS modem

MAC= MAC address of the LAN interface

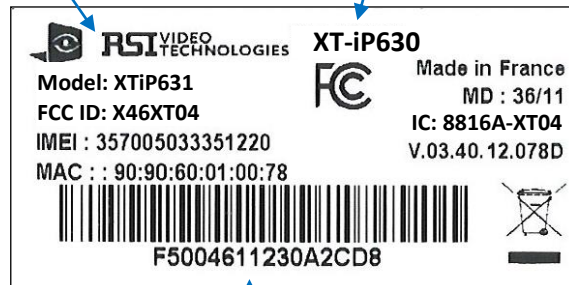


MD= Manufacturing date: WEEK/YEAR

IC= Product ID for Canadian approval

V= Firmware version

Product serial number

2. Outside product:

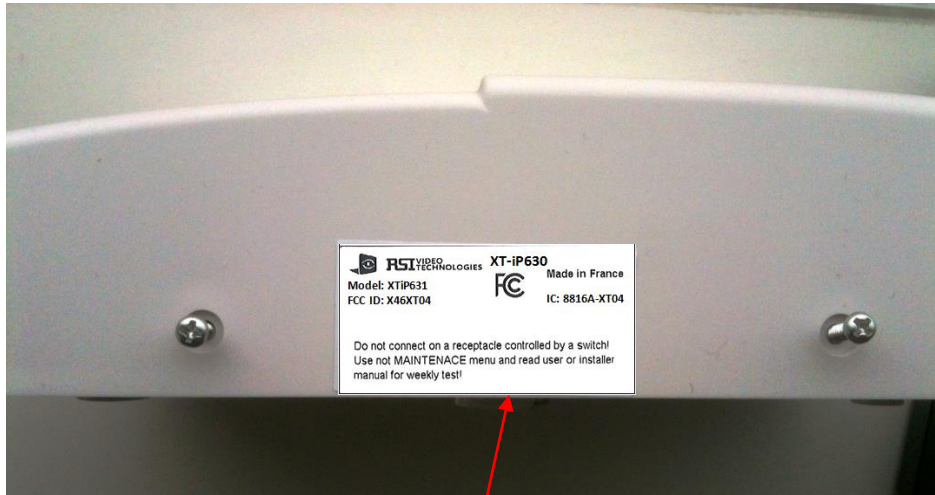


Manufacturer name

Product name

Model= Model name

FCC ID= Product ID for FCC approval

IC= Product ID for Canadian approval

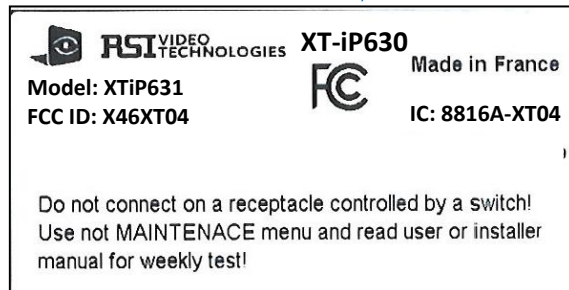

UL1023 (86.1) text requirement

3. **Inside product:**

Power supply information with
UL1023 (86.1) requirements


POWER SUPPLY / ALIMENTATION

Option 1 : \approx 14.4VDC (4 x Lithium 3.6V LSH20 SAFT)
(estimated life = 4 years) / (autonomie = 4 ans)

Option 2 : (Mandatory when LAN selected)
 \approx / \sim 9-12VAC/DC - 1.2A
+ 6VDC (4 x Alkaline 1.5V LR20 D)
(estimated life = 1 year) / (autonomie = 1 an)

See user or installer manual for batteries maintenance and periodic replacement instructions / Pour la maintenance ou le changement de pile, voir le manuel d'installateur ou d'utilisateur

(FR) Retirer les piles avant toute intervention de maintenance! (EN) Remove batteries before any maintenance! (D) Batterien vor jeglichen Wartungsarbeiten entfernen!

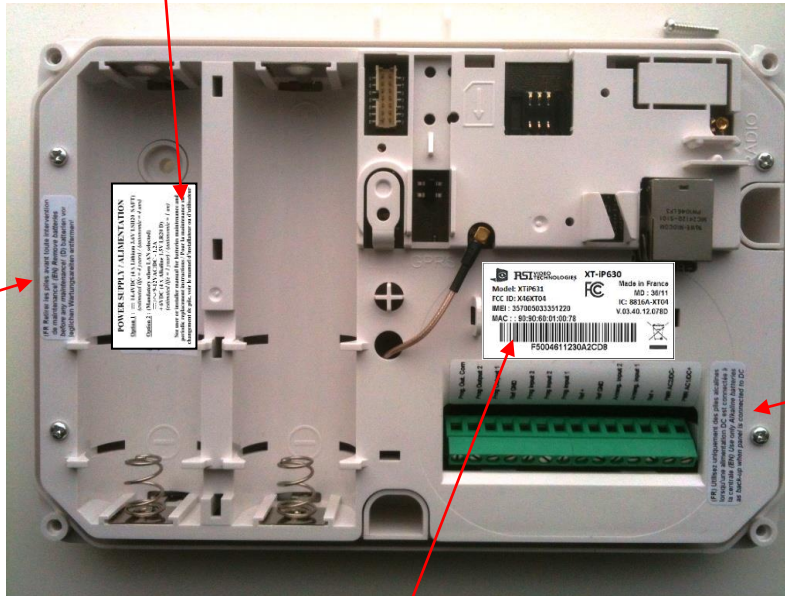

(FR) Utilisez uniquement des piles alcalines lorsqu'une alimentation DC est connectée à la centrale (EN) Use only Alkaline batteries as back-up when panel is connected to DC

Manufacturer name

Product name

Model= Model name

FCC ID= Product ID for FCC approval

IMEI= IMEI number of the GPRS modem

MAC= MAC address of the LAN interface

RSI VIDEO TECHNOLOGIES XT-iP630

Model: XTIP631 Made in France
 FCC ID: X46XT04 MD : 36/11
 IMEI : 357005033351220 IC: 8816A-XT04
 MAC : : 90:90:60:01:00:78 V.03.40.12.078D

Barcode: F5004611230A2CD8

MD= Manufacturing date: WEEK/YEAR

IC= Product ID for Canadian approval

V= Firmware version

Product serial number