


XTO-IP630

Labels description

1- Packing :

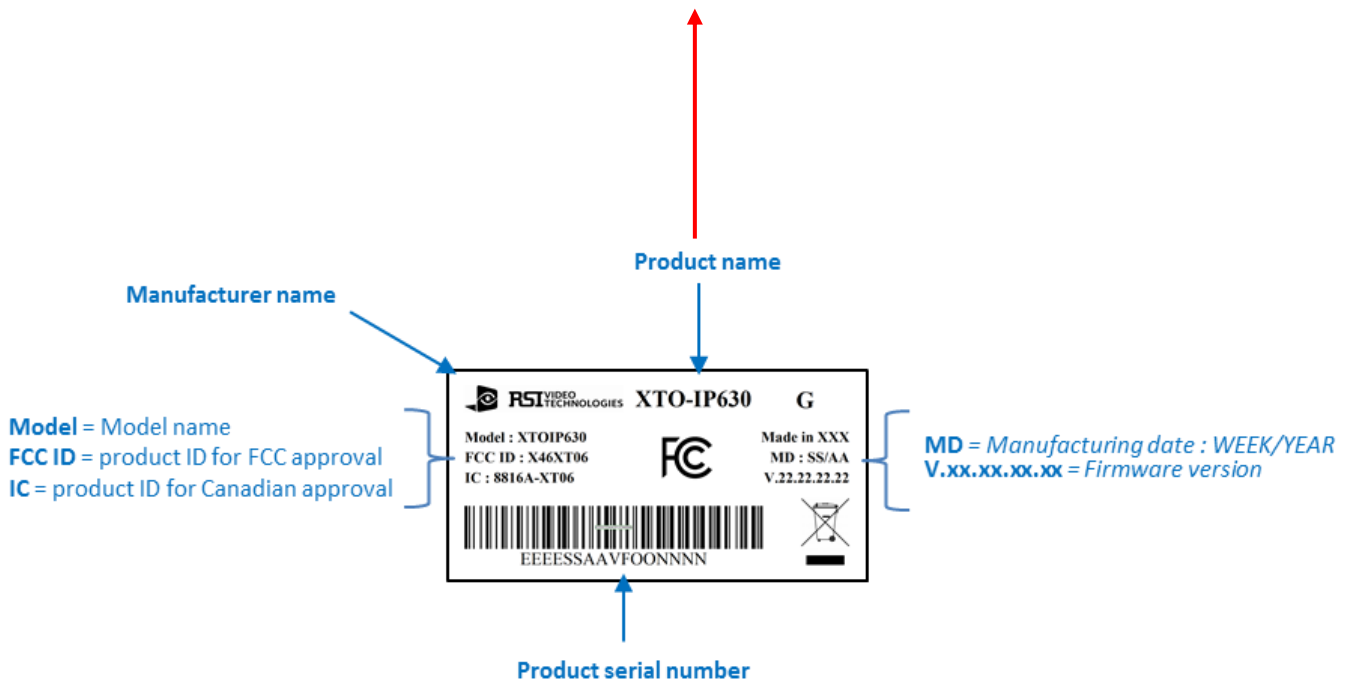

2- Outside product:



Manufacturer name



Model = Model name
FCC ID = product ID for FCC approval
IC = product ID for Canadian approval



Product name



3- **Inside product:**


ALIMENTATION / POWER SUPPLY

Option 1: --- 14.4VDC (4x Lithium 3.6V LSH20 SAFT) Autonomie/Estimated life = 4 ans/years
 Option 2: --- / --- 9-12VAC/DC-1.2A + 6VDC (4x Alkaline 1.5V LR20 D) Autonomie/Estimated life = 1 an/year
 (Obligatoire avec la connexion LAN / Mandatory when LAN selected)
 Pour la maintenance ou le changement de pile, voir le manuel d'installateur ou d'utilisateur.
 See user or installer manual for batteries maintenance and periodic replacement instructions.

SAFETY RULES - LITHIUM LSH20 - REGLES DE SECURITE

Toujours mettre en place 4 piles neuves issues du même lot.
Ne pas utiliser de pile déjà usagée ou vide, avec des piles neuves.
Ne pas utiliser une pile ayant subi de chocs. (Voir le N° de lot XX.XXX.XXX sur la pile).
 Always replace all the batteries with new ones, from the same batch.
 Never use a battery that is already used or flat together with new batteries.
 Do not use a battery that has undergone shock. (See batch number XX.XXX.XXX on battery)

(FR) Retirer les piles avant toute intervention de maintenance ! (EN) Remove batteries before any maintenance ! (D) Batterien vor jeglichen Wartungsarbeiten entfernen !

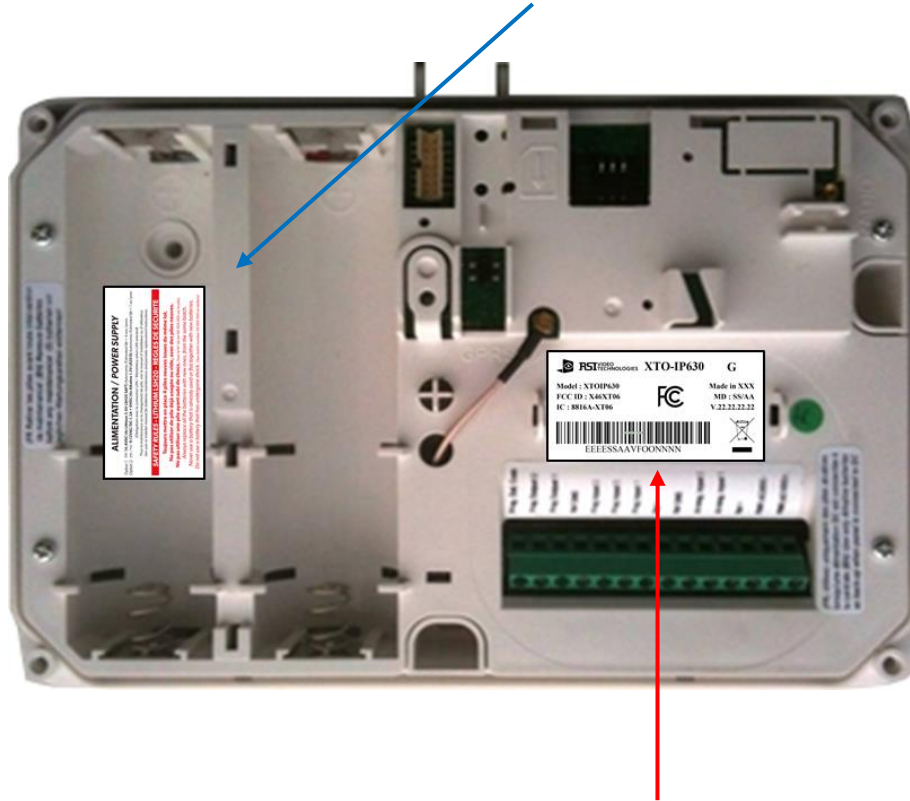

(FR) Utilisez uniquement des piles alcalines lorsqu'une alimentation DC est connectée à la centrale. (EN) Use only Alkaline batteries as back-up when panel is connected to DC.

Product name

Manufacturer name


Model = Model name
FCC ID = product ID for FCC approval
IC = product ID for Canadian approval

Product serial number

MD = Manufacturing date : WEEK/YEAR
V.xx.xx.xx.xx = Firmware version

RST VIDEO TECHNOLOGIES XTO-IP630 G

Model : XTOIP630 Made in XXX
 FCC ID : X46XT06 MD : SS/AA
 IC : 8816A-XT06 V.22.22.22.22


 EEESSAAVFOONNNN