



**EMC Technologies Pty Ltd**  
ABN 82 057 105 549  
176 Harrick Road, Keilor Park,  
Victoria 3042, Australia

Ph: + 61 (0)3 9365 1000  
Fax: + 61 (0)3 9331 7455  
Email: sales@emctech.com.au

**RADIO REPORT FOR CERTIFICATION  
to  
FCC Part 15 Subpart C (Section 15.231) and  
RSS-210 Issue 9, August 2016**

FCC ID: X4K-KPX7201  
IC: 8880A-KPX7201

Device under Test / PMN: Wireless Keypad  
Model Number / HVIN: KPX-7V2  
Tested For: Automatic Technology (Australia) Pty. Ltd.

Report Number: M170308-1R1  
(This report supersedes M170308-1)  
Issue Date: 21 August 2017

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

# RADIO REPORT FOR CERTIFICATION to FCC Part 15 Subpart C (Section 15.231) and RSS-210 Issue 9, August 2016

## CONTENTS

1.0	INTRODUCTION
2.0	GENERAL INFORMATION
3.0	TEST RESULTS
3.1	§15.203/RSS-Gen 8.3 Antenna Requirement
3.2	§15.207/RSS-Gen 8.8 Conducted Limits
3.3	§15.231(a)/RSS-210 Annex A.1.1 Periodic Operation
3.4	§15.231(b)(2)/RSS-210 Annex A.1.2 Fundamental Field Strength
3.5	§15.205/RSS-Gen 8.10 Restricted Bands of Operation
3.6	§15.209/RSS-Gen 8.9 Radiated emission limits; general requirements
3.7	§15.247(d)/RSS-247 5.5 Out of Band Emissions
3.8	§15.231(c)/RSS-210 Annex A.1.3 Emission Bandwidth
3.9	§2.1091 Radiofrequency radiation exposure evaluation: mobile devices
3.10	RSS-Gen 3.2/RSS-102 Maximum Permissible Exposure
4.0	COMPLIANCE STATEMENT
5.0	MEASUREMENT UNCERTAINTY



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**



## RADIO REPORT FOR CERTIFICATION

Issued by: **EMC TECHNOLOGIES PTY. LTD.**

176 Harrick Road, Keilor Park, Victoria 3042, AUSTRALIA.

**Phone:** +61 3 9365 1000, **E-mail:** sales@emctech.com.au, **Web:** www.emctech.com.au

FCC registration number: 494713 and ISED Canada Company number: IC 3569B

**Product / PMN:** Wireless Keypad  
**Model / HVIN:** KPX-7V2  
**Manufacturer:** Automatic Technology (Australia) Pty. Ltd.  
**FCC ID:** X4K-KPX7201  
**IC:** 8880A-KPX7201

**Tested for:** Automatic Technology (Australia) Pty. Ltd.  
**Address:** 6-8 Fiveways Boulevard, Keysborough  
Victoria 3173, AUSTRALIA  
**Phone:** +61 (0)3 9791 0200  
**Contact:** Nikolai Klepikov  
**Email:** nikolai.klepikov@ata-aust.com.au

**Standards:** **47 CFR Part 15** – Radio Frequency Devices  
**Subpart C** – Intentional Radiators  
**Section 15.231** – Section 15.231 – Periodic operation in the band 40.66 – 40.70 MHz and above 70 MHz.

**RSS-210 Issue 9, August 2016** – *License-Exempt Radio Apparatus: Category I Equipment*  
**RSS-Gen Issue 4, November 2014** - *General Requirements for Compliance of Radio Apparatus*  
**RSS-102 Issue 5, March 2015** - *Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)*

**Test Dates:** 24 May to 29 June 2017  
**Issue Date:** 21 August 2017

**Attestation:** I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.

**Test Engineer:**

Handwritten signature of Rob Weir in black ink.

Rob Weir  
Wireless Certification Manager

**Authorised Signatory:**

Handwritten signature of Chris Zombolas in black ink.

Chris Zombolas  
Technical Director



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

## RADIO REPORT FOR CERTIFICATION to FCC Part 15 Subpart C (Section 15.231) and RSS-210 Issue 9, August 2016

### 1.0 INTRODUCTION

Radio tests were performed on the KPX-7V2 wireless keypad in accordance with the applicable requirements of 47 CFR, Part 15 Subpart C – Section 15.231 and RSS-210 Issue 9 for a periodically operated 433 MHz transmitter.

### 1.1 Test Procedure

Radio measurements were performed in accordance with the appropriate procedures of ANSI C63.10: 2013.

The measurement instrumentation conformed to the requirements of ANSI C63.2: 2009.

### 1.2 Summary of 47 CFR Part 15 Subpart C Results

FCC Part 15 Subpart C	Test Performed	Results
15.203	Antenna Requirement	<b>Complied</b>
15.205	Restricted bands of operation	<b>Complied</b>
15.207	Conducted limits	<b>Not applicable</b> Battery powered, no AC mains
15.209	Radiated Emissions Limits; General Requirements	<b>Complied</b>
15.231(a)	Periodic Operation	<b>Complied</b>
15.231(b)(2)	Fundamental Field Strength	<b>Complied</b>
15.231(b)(3)	Spurious Emissions	<b>Complied</b>
15.231(c)	Emission Bandwidth	<b>Complied</b>
2.1093	Radiofrequency radiation exposure evaluation: portable devices.	<b>Complied</b>

### 1.3 Summary of Results

IC Part	Test Performed	Results
RSS-Gen (8.3)	Antenna requirement	<b>Complied</b>
RSS-Gen (8.8)	Conducted emissions limits	<b>Complied</b>
RSS-Gen (8.9)	Radiated Emission Limits (General requirements)	<b>Not applicable</b> Battery powered, no AC mains
RSS-Gen (8.10)	Operation in restricted Band	<b>Complied</b>
RSS-210 Annex A.1.1	Types of Momentarily Operated Devices	<b>Complied</b>
RSS-210 Annex A.1.2	Fundamental Field Strength	<b>Complied</b>
RSS-210 Annex A.1.2	Spurious Emissions	<b>Complied</b>
RSS-210 Annex A.1.3	Emission Bandwidth	<b>Complied</b>
RSS-Gen (3.2) RSS-102	Radio Frequency Hazard	<b>Complied</b>



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

## 2.0 GENERAL INFORMATION

### 2.1 EUT (Transmitter) Details

<b>Radio:</b>	Digital
<b>Number of Channels:</b>	3
<b>Frequency:</b>	433.47, 433.92 and 434.37 MHz
<b>Modulation:</b>	FM + AM
<b>Security Level:</b>	64 bit
<b>Emission Designator:</b>	D7D
<b>Antenna type:</b>	PCB track

### 2.2 EUT (Host) Details

<b>Product / PMN:</b>	Wireless Keypad
<b>Model / HVIN:</b>	KPX-7V2
<b>Manufacturer:</b>	Automatic Technology (Australia) Pty. Ltd.
<b>Supply Rating:</b>	3x AAA Batteries, 4.5V
<b>Highest operating Frequency:</b>	434.37 MHz

The KPX-7V2 is a weatherproof keypad operated remote control transmitter that can be used to operate up to 10 remote control functions, commonly used to operate garage doors, gates, etc.

### 2.3 Test Configuration

The sample was configured to transmit continuously when one of the buttons were pressed.

### 2.4 Modifications by EMC Technologies

No modifications were performed.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

## 2.5 Test Facility

### 2.5.1 General

EMC Technologies Pty Ltd has also been accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 and 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies indoor open area test site (iOATS) have been accepted by Industry Canada for the performance of radiated measurements in accordance with RSS-Gen, Issue 8 - **Industry Canada iOATS number - IC 3569B**

Measurements in this report were performed at EMC Technologies' laboratory in Keilor Park, Victoria Australia.

### 2.5.2 NATA Accreditation

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A<sup>2</sup>LA).

EMC Technologies is accredited in Australia by the National Association of Testing Authorities (NATA). All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation.

The current full scope of accreditation can be found on the NATA website: [www.nata.asn.au](http://www.nata.asn.au)



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

## 2.6 Test Equipment Calibration

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Agilent Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI) or in-house. All equipment calibration is traceable to Australian national standards at the National Measurements Institute.

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yyyy	Due Date dd/mm/yyyy	Cal. Interval
<b>Chamber</b>	Frankonia SAC-10-2 (R-139)	22/03/2017	22/03/2018	1 Year, *1
<b>EMI Receiver</b>	R&S ESW26 2 Hz – 26.5 GHz Sn: 101306 (R-143)	31/03/2017	31/03/2018	1 Year, *2
	R&S ESU40 20 Hz – 40 GHz Sn: 100392 (R-140)	23/02/2017	23/02/2018	1 Year, *2
<b>Antennas</b>	EMCO 6502 Active Loop 9 kHz – 30 MHz Sn. 9311-2801 (A-231)	20/07/2015	20/07/2018	3 Year, *2
	SUNOL JB6 Biconilog 30 – 6000 MHz Sn: A012312 (A-363)	26/05/2016	26/05/2018	2 Year, *2
	EMCO 3115 Double Ridge Horn 1 – 18 GHz Sn: 8908-3282 (A-004)	15/07/2016	15/07/2019	3 Year, *1
	ETS-Lindgren 3160-09 Std Gain Horn 18 – 26.5 GHz Sn: 66032 (A-307)	31/05/2016	31/05/2019	3 Year, *1
<b>Cables</b>	Room 12 inbuilt cable Panel 1 to 10 m (C-422)	31/05/2017	31/05/2018	1 Year, *1
	Room 12 inbuilt cable Panel 1 to 3 m (C-421)	31/05/2017	31/05/2018	1 Year, *1
	Room 12 Antenna cable (C-437)	31/05/2017	31/05/2018	1 Year, *1
	Sucoflex 104 Huber & Suhner 18 GHz, 5 m cable (C-337)	03/01/2017	03/01/2018	1 Year, *1
	Sucoflex 102 Huber & Suhner 40 GHz, 3 m cable (C-273)	04/01/2017	04/01/2018	1 Year, *1

Note \*1. Internal NATA calibration.

Note \*2. External NATA / A2LA calibration




Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.0 TEST RESULTS

#### 3.1 §15.203/RSS-Gen 8.3 Antenna Requirement

The antenna was integral to the device ensuring that it could not be replaced. A printed wiring track antenna was used and was part of the circuit board.

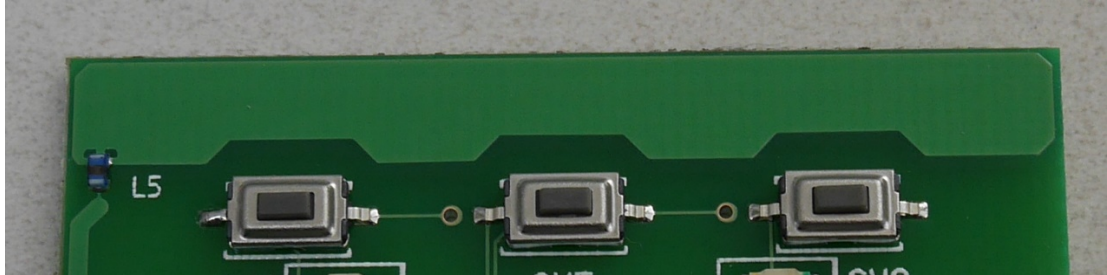

#### 3.2 §15.207/RSS-Gen 8.8 Conducted Limits

The device was not connected directly or indirectly to the AC mains network.

#### 3.3 §15.231(a)/RSS-210 Annex A.1.1 Periodic Operation

The device only transmitted when a button were pressed. The device transmitted packets repeatedly when the buttons were held. When the button was released all transmissions stop within a maximum of 300 ms.



### 3.4 §15.231(b)(2)/RSS-210 Annex A.1.2 Fundamental Field Strength

The field strength of the fundamental transmitted frequency was measured inside a compliant ANSI C63.4: 2014 semi-anechoic chamber. The EUT was positioned on a test turn-table and rotated through 360° to determine the highest emissions. The measurement antenna was also varied between 1 and 4 metres height. A calibrated Biconilog antenna was used for measurement.

All measurements were made at a distance of 10 metres. The fundamental emissions were measured using a peak detector, as compliance is demonstrated based on the average value a correction factor taking the maximum duty cycle into account was applied. The method of calculation was outlined in section 7.5 of ANSI C63.10:



$$E_{ave} = E - \delta (dB)$$

$$\delta = 20 \log(\Delta)$$

Where:  $E_{ave}$  = Average electric field (dBµV/m)  
 $E$  = Peak electric field (dBµV/m)  
 $\delta$  = duty cycle correction factor (dB)  
 $\Delta$  = Duty cycle

$$\delta = 20 \log \left( \frac{(4 \times 5.2 + 12.4)ms}{100ms} \right)$$


$$\delta = -9.6 \text{ dB}$$

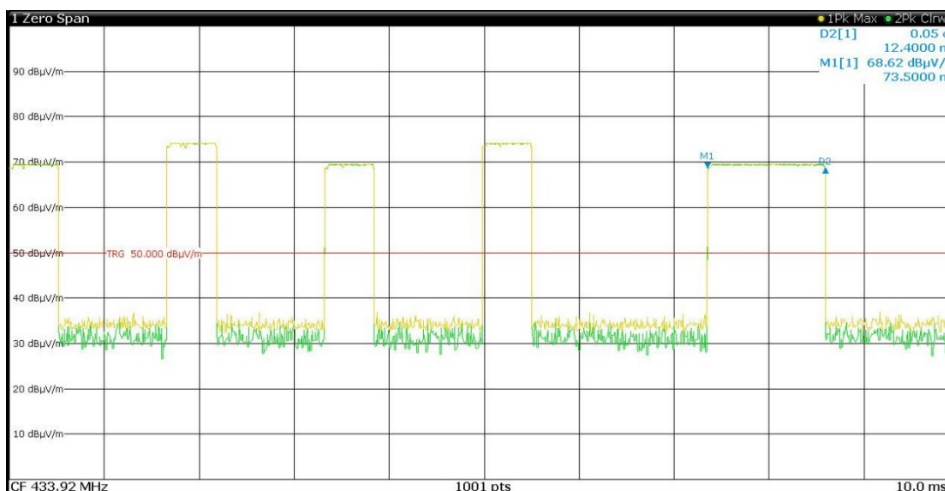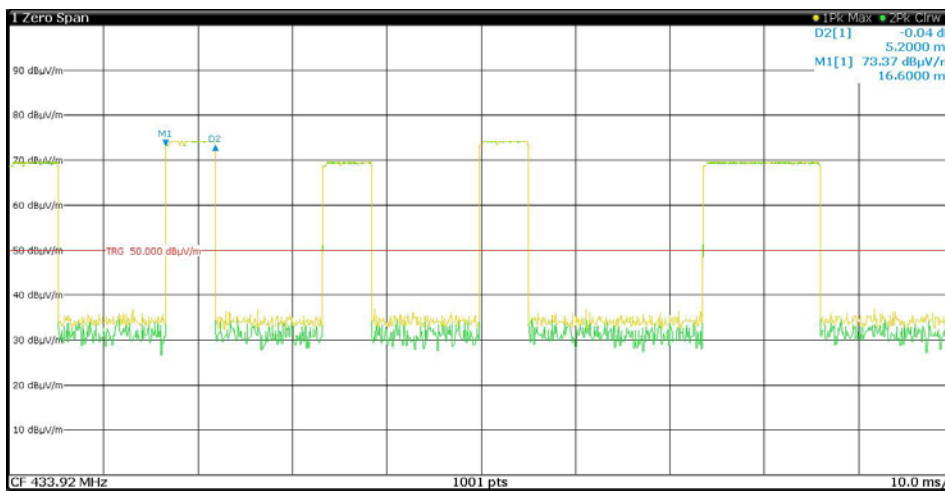

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

**3.4.1 Result**

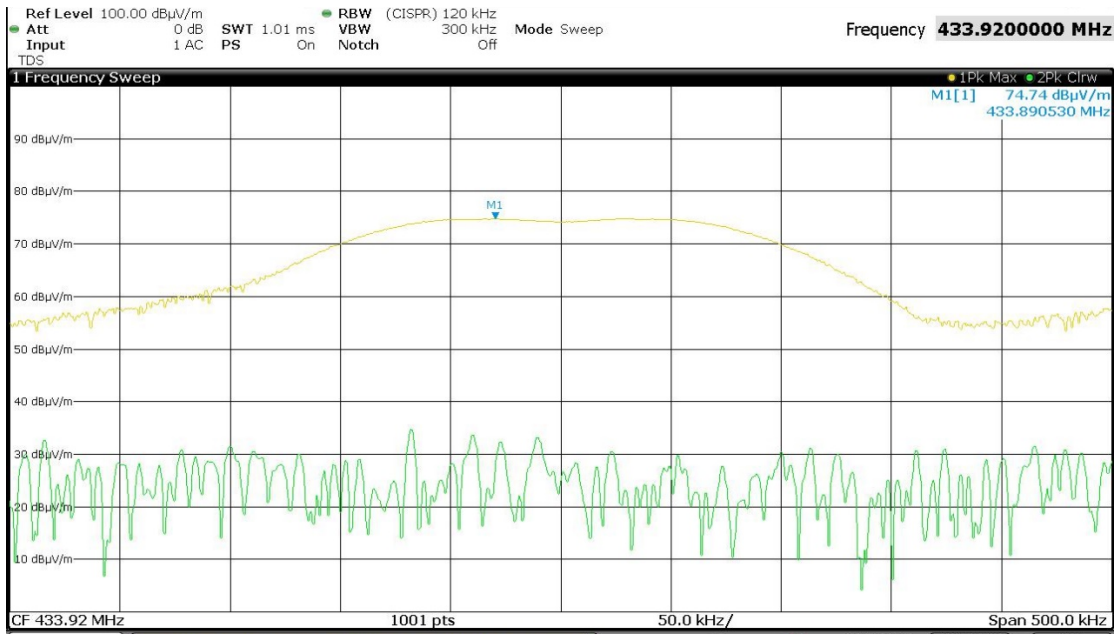

E(peak) dBµV/m	E(average)		10 m Limit		Result
	dBµV/m	µV/m	dBµV/m	µV/m	
74.7	65.1	1799	70.3	3273	Complied

Conversion to 3 metre levels:

Detector	Field at 10 m		Calculated 3 m field		Limit
	dBµV/m	µV/m	dBµV/m	µV/m	
<b>Average</b>	65.1	1799	75.6	6026	10911
<b>Peak</b>	74.7	5433	85.2	18108	-

Calculation:

$$E_{3m} = 20 \times \log \left( \frac{d_{10m} \times 10^{E_{10m}/20}}{d_{3m}} \right)$$

Where  $E_{3m}$  = Electric field at 3 metres (dBµV/m)  
 $E_{10m}$  = Electric field at 10 metres (dBµV/m)  
 $d_{3m}$  = 3 metres  
 $d_{10m}$  = 10 metres

**3.4.2 Conclusion**

The field strength of the fundamental transmitted signal complied with the limit of §15.231(b) and RSS-210 Annex A.1.2.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.5 §15.205/RSS-Gen 8.10 Restricted Bands of Operation

The restricted band limits were applied as applicable, refer to section 3.7.

### 3.6 §15.209/RSS-Gen 8.9 Radiated emission limits; general requirements

The limits given in §15.231 and RSS-210 applied.

### 3.7 §15.247(d)/RSS-247 5.5 Out of Band Emissions

#### 3.7.1 Radiated Spurious Measurements

Radiated spurious emission measurements were performed in a semi-anechoic chamber compliant with ANSI C63.4: 2014.

The test frequency range was sub-divided into smaller bands with sufficient frequency resolution to permit reliable display and identification of emissions.

Frequency range [MHz]	Measurement Bandwidth [kHz]	Measurement Distance [m]	Antenna
0.009 to 0.150	0.2	10	0.6 metre loop antenna
0.150 to 30	9	10	
30 to 1000	120	10	Biconilog hybrid
1000 to 18 000	1000	3	Standard gain or broad band horns
18 000 to 40 000	1000	1	

The sample was slowly rotated with the spectrum analyser set to Max-Hold. This was performed for at least two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. Devices design for a fixed position were tested in that position, portable devices were tested in three orthogonal orientations.

The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical antenna polarisations.

#### Calculation of field strength

The field strength was calculated automatically by the software using the pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where:

$E$  = Radiated Field Strength in dBµV/m.

$V$  = EMI Receiver Voltage in dBµV/m.

$AF$  = Antenna Factor in dB. (stored as a data array)

$G$  = Preamplifier Gain in dB. (stored as a data array)

$L$  = Cable loss in dB. (stored as a data array of Insertion Loss versus frequency)



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.



**This document shall not be reproduced except in full.**

### 3.7.2 Frequency Band: 9 kHz - 30 MHz

Measurements were made at a distance of 10 metres with the following receiver settings:

	Range 1	Range 2
Start	9 kHz	150 kHz
Stop	150 kHz	30 MHz
Step	50 Hz	2.25 kHz
RBW	200 Hz	9 kHz
Meas Time	100 ms	100 ms
RF Att	10 dB	10 dB
Preamp	OFF	OFF

#### 3.7.2.1 Results

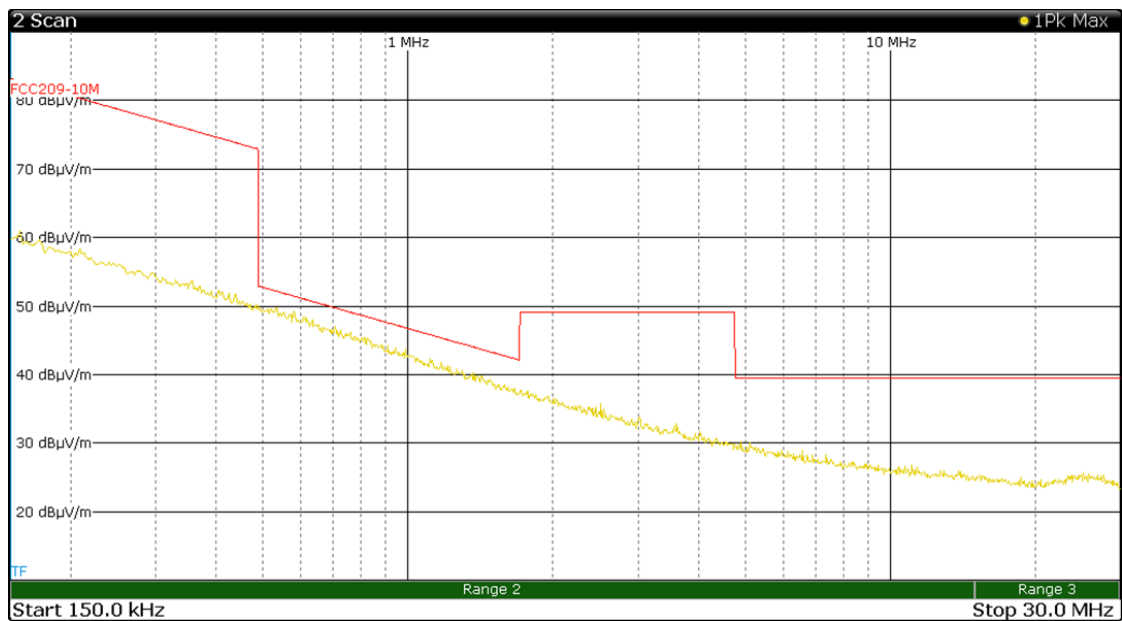
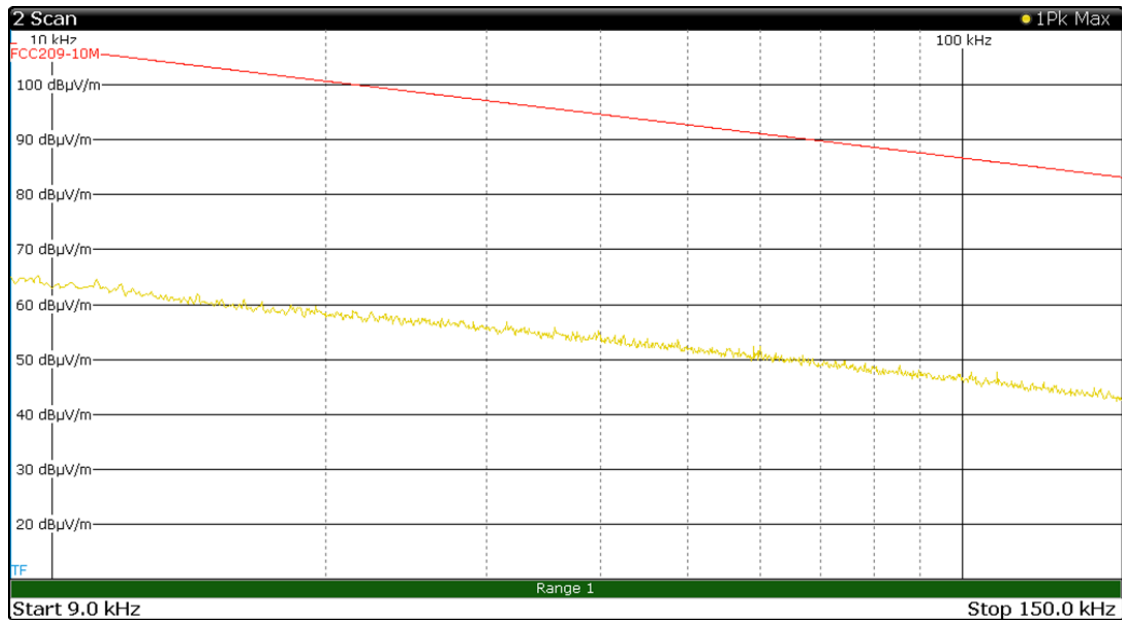


Antenna Perpendicular



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

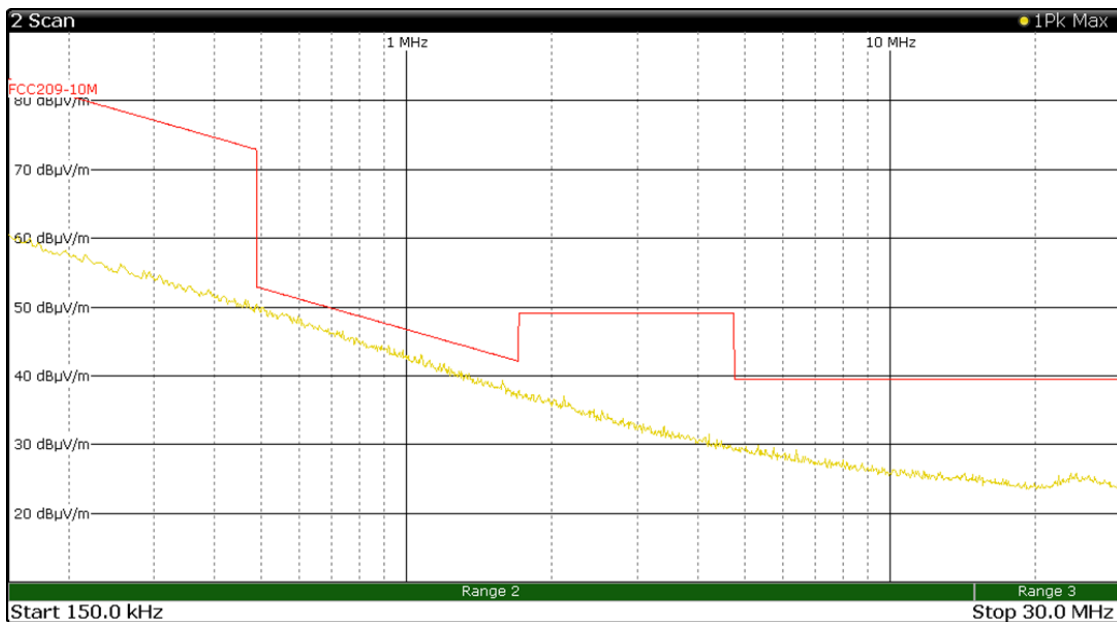
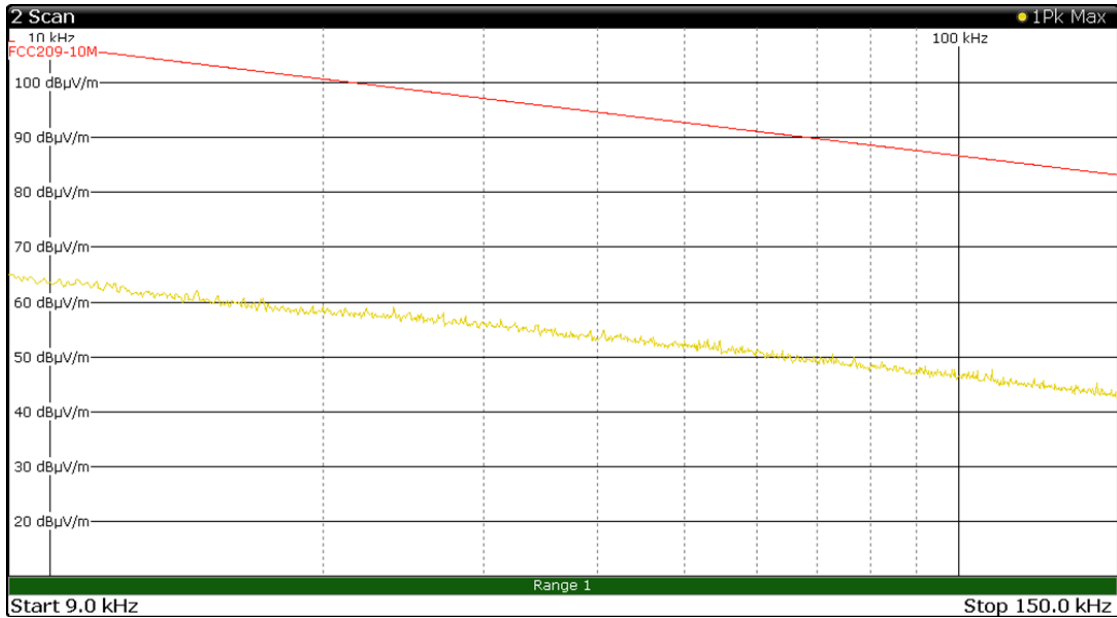


Antenna Parallel



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

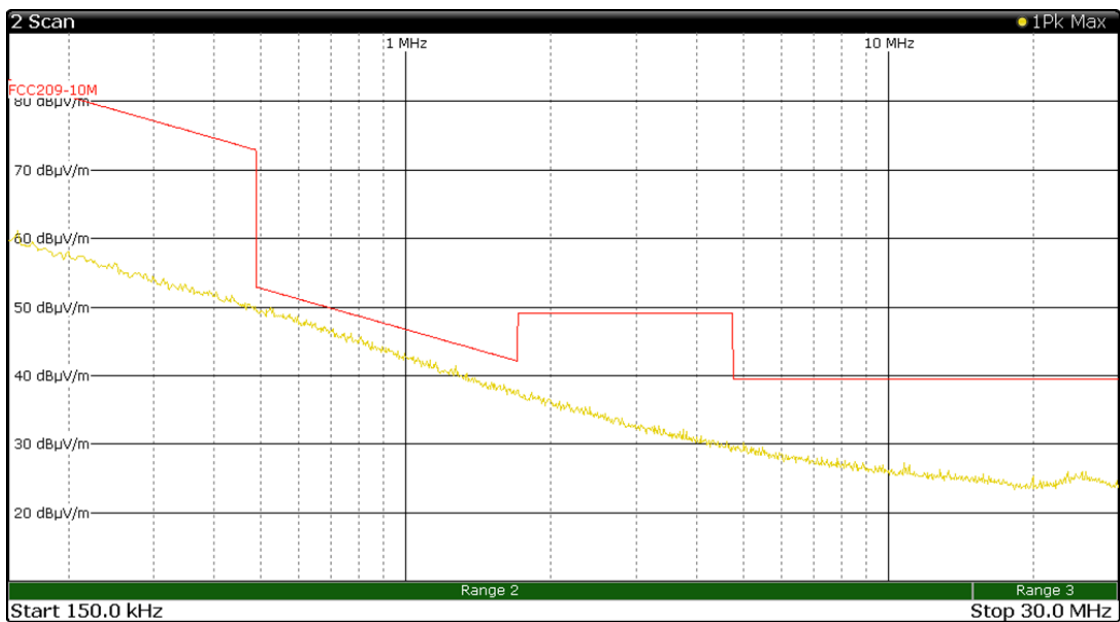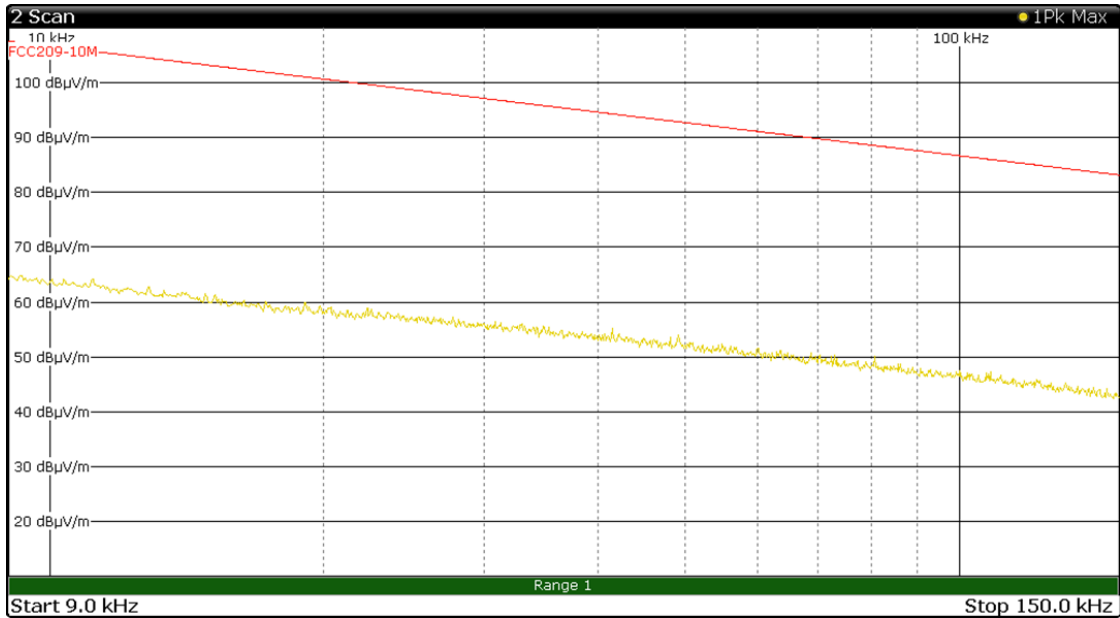

Antenna Ground Parallel

**Result:**

No emissions were detected above the measurement system noise floor.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.



**This document shall not be reproduced except in full.**

### 3.7.3 Frequency Band: 30 - 1000 MHz

Measurements were made at a distance of 10 metres with the following receiver settings:

Start	30 MHz
Stop	1 GHz
Step	30 kHz
RBW	120 kHz
Meas Time	100 ms
RF Att	0 dB
Preamp	ON

#### 3.7.3.1 Vertical Polarisation

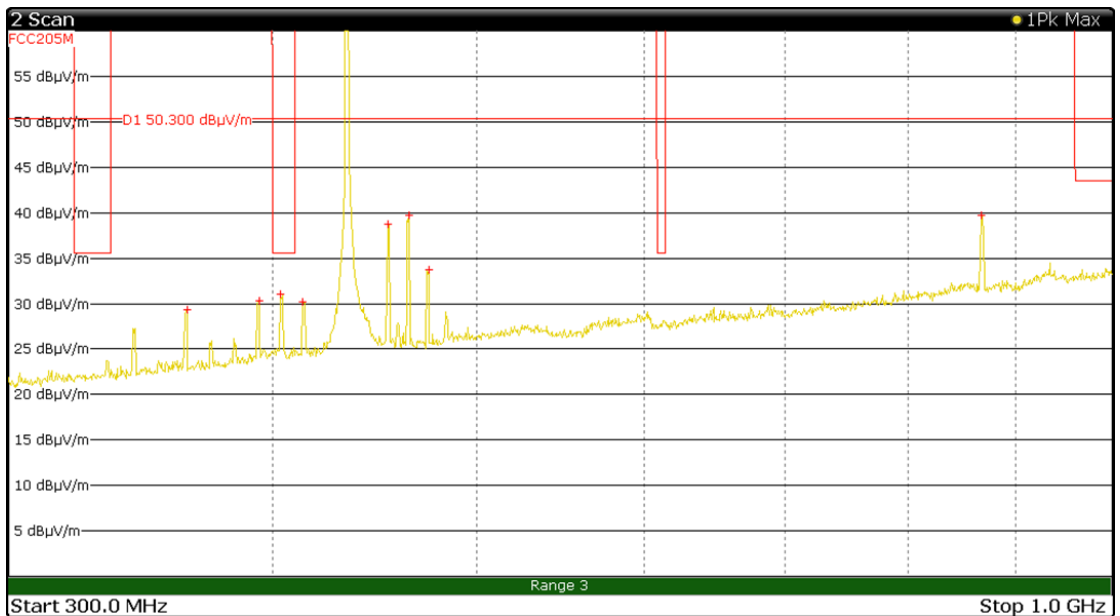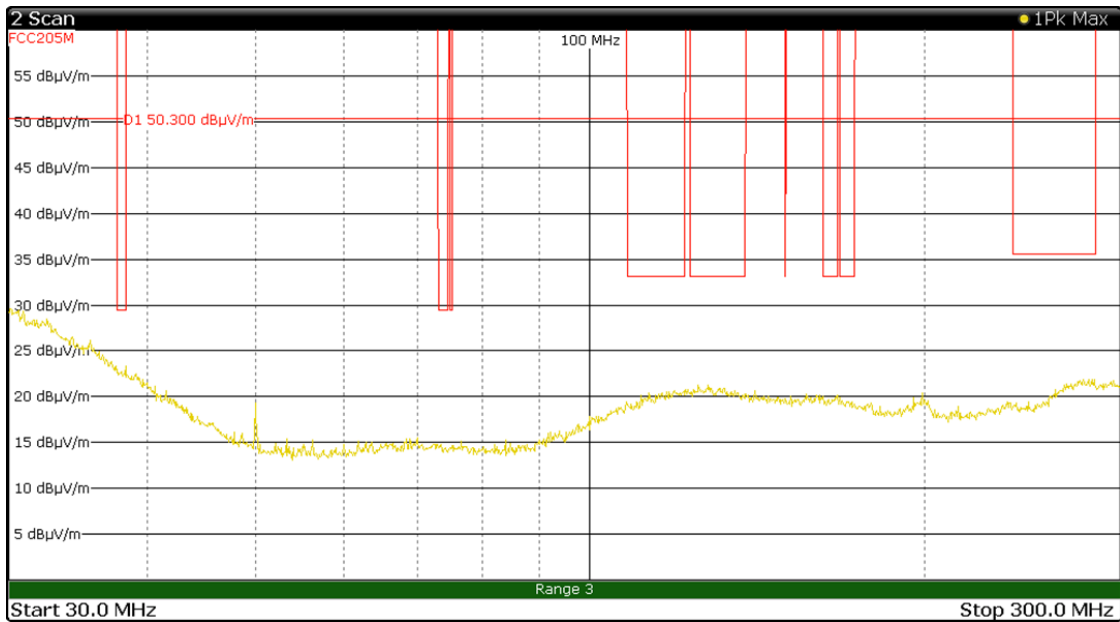


Transmission at the fundamental frequency (peak above limit) was not subjected to the spurious emission limit.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.7.3.2 Horizontal Polarisation

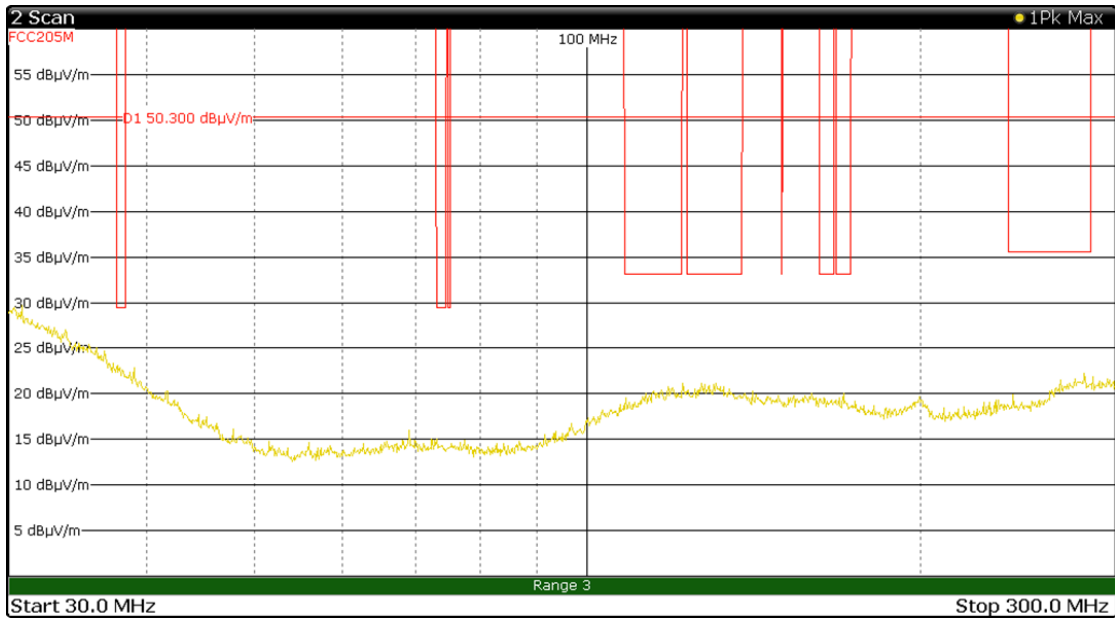

Transmission at the fundamental frequency (peak above limit) was not subjected to the spurious emission limit.

**Result:**

Frequency (MHz)	Polarity	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)
403.912	Vertical	24.8	35.5	-10.7

All other emissions recorded fell outside the restricted bands and were greater than 10 dB below the average limit of 50.3 dBµV/m.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**




### 3.7.4 Frequency Band: 1 – 4.5 GHz

For simplicity the 15.209 and RSS-Gen general limits applied across this band. Measurements were made at a distance of 3 metres with the following receiver settings:

Start 1 GHz  
 Stop 4.5 GHz  
 Step 250 kHz  
 RBW 1 MHz  
 Meas Time 50 ms  
 RF Att 10 dB  
 Preamp ON

#### 3.7.4.1 Vertical Polarisation

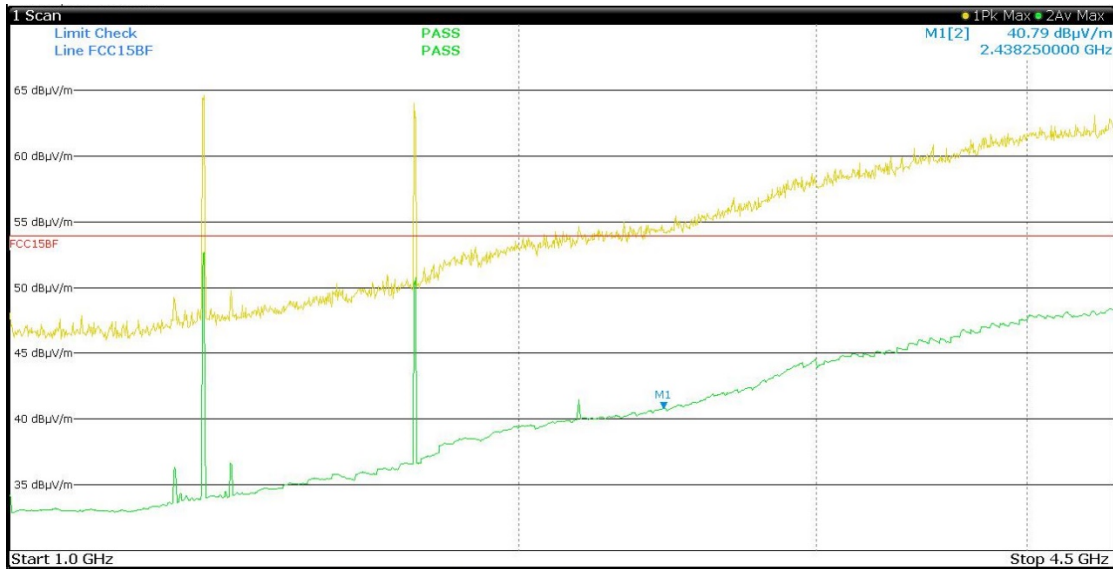


Frequency (MHz)	Average			Peak		
	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1301.75	46.4	54.0	-7.6	65.0	74.0	-9.0
1303.00	46.2	54.0	-7.8	65.5	74.0	-8.5
1300.50	45.8	54.0	-8.2	64.9	74.0	-9.1
1737.50	46.9	54.0	-7.1	64.8	74.0	-9.2
1735.75	46.6	54.0	-7.4	64.8	74.0	-9.2
1733.75	45.9	54.0	-8.1	64.7	74.0	-9.3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.7.4.2 Horizontal Polarisation

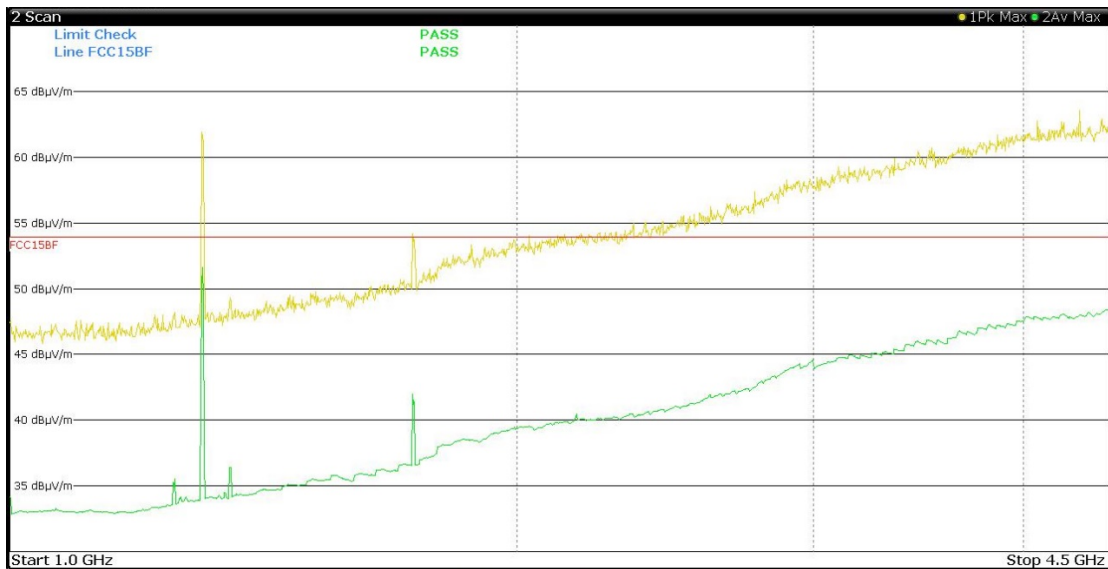

Frequency (MHz)	Average			Peak		
	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Emission (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1301.75	46.4	54.0	-7.6	66.4	74.0	-7.6
1303.00	47.3	54.0	-6.7	66.3	74.0	-7.7
1300.50	47.5	54.0	-6.5	66.6	74.0	-7.4
1733.75	40.3	54.0	-13.7	56.8	74.0	-17.2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.7.5 Conclusion

The spurious emissions complied with the general limits of §15.205, §15.231(b) and RSS-Gen 8.10, RSS-210 Annex A.1.2 by a margin of 7.6 dB.

Frequency (MHz)	Polarity	10 m Fields (dBµV/m)		3 m Fields (dBµV/m)		Margin (dB)
		Quasi-Peak		Quasi-Peak		
		Measured	Limit	Calculated	Limit	
403.912	Vertical	24.8	35.5	35.3	46.0	-10.7
<b>Average</b>						
				Measured	Limit	
1301.75	Vertical			46.4	54.0	-7.6
1303.00	Vertical			46.2	54.0	-7.8
1300.50	Vertical			45.8	54.0	-8.2
1737.50	Vertical			46.9	54.0	-7.1
1735.75	Vertical			46.6	54.0	-7.4
1733.75	Vertical			45.9	54.0	-8.1
1301.75	Horizontal			46.4	54.0	-7.6
1303.00	Horizontal			47.3	54.0	-6.7
1300.50	Horizontal			47.5	54.0	-6.5
1733.75	Horizontal			40.3	54.0	-13.7
<b>Peak</b>						
				Measured	Limit	
1301.75	Vertical			66.4	74.0	-7.6
1303.00	Vertical			66.3	74.0	-7.7
1300.50	Vertical			66.6	74.0	-7.4
1737.50	Vertical			56.8	74.0	-17.2
1735.75	Vertical			65.0	74.0	-9.0
1733.75	Vertical			65.5	74.0	-8.5
1301.75	Horizontal			64.9	74.0	-9.1
1303.00	Horizontal			64.8	74.0	-9.2
1300.50	Horizontal			64.8	74.0	-9.2
1733.75	Horizontal			64.7	74.0	-9.3

Calculation:

$$E_{3m} = 20 \times \log \left( \frac{d_{10m} \times 10^{E_{10m}/20}}{d_{3m}} \right)$$

Where  $E_{3m}$  = Electric field at 3 metres (dBµV/m)  
 $E_{10m}$  = Electric field at 10 metres (dBµV/m)  
 $d_{3m}$  = 3 metres  
 $d_{10m}$  = 10 metres




Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.8 §15.231(c)/RSS-210 Annex A.1.3 Emission Bandwidth


The emission bandwidth shall be less than 0.25% of the center frequency.

The 20 dB below from the carrier bandwidth:

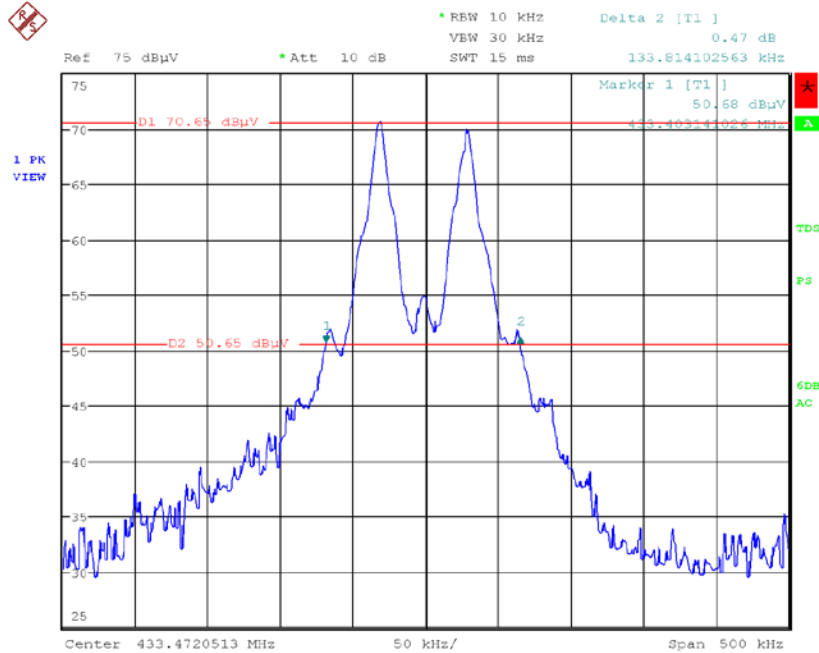

Frequency	20 dB BW	Limit	Results
433.5 MHz	134 kHz	1084 kHz	Complied

This 99% power bandwidth:

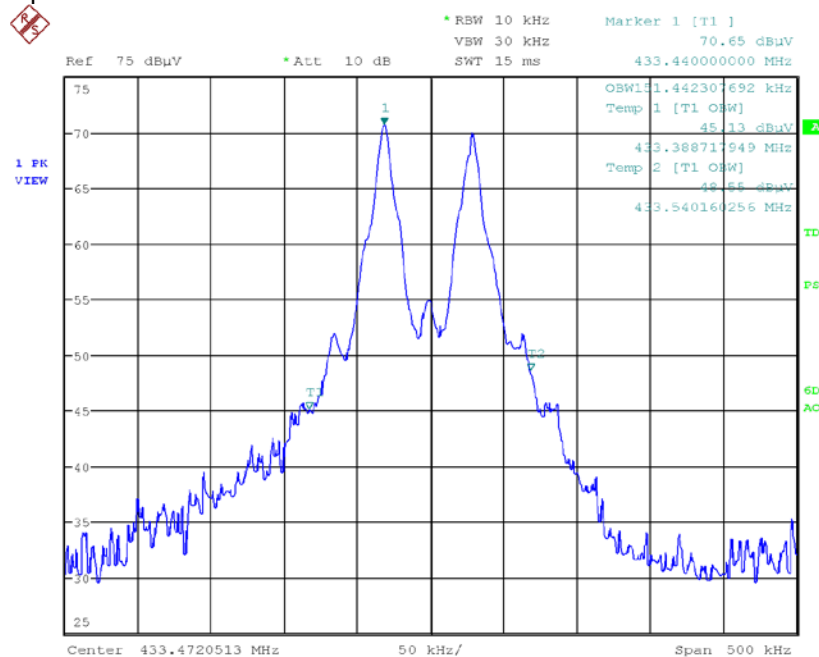

Frequency	99% Pwr BW	Limit	Results
433.5 MHz	151 kHz	1084 kHz	Complied



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**

### 3.9 §2.1091 Radiofrequency radiation exposure evaluation: mobile devices.

The Maximum Permissible Exposure (MPE) limit defined in §1.1310 for a transmitter operating at 433 MHz is:

$$\begin{aligned} \text{MPE limit} &= [\text{freq., MHz}] \div 1500 = 1 \text{ mW/cm}^2 \\ &= \mathbf{0.3 \text{ mW/cm}^2 = 33.6 \text{ V/m}} \quad (\text{V/m}) = \sqrt{(1200 \times \pi \times \text{mW/cm}^2)} \end{aligned}$$

$$\begin{aligned} \text{Field strength} &= [\sqrt{(30 \times \text{transmitter EIRP, W})}] \div [\text{minimum separation distance, metres}] \text{ V/m} \\ &= [\sqrt{(30 \times 0.00001)}] \div 0.2 \text{ V/m} \\ &= \mathbf{0.1 \text{ V/m} = 0.000002 \text{ mW/cm}^2} \quad (\text{mW/cm}^2) = (\text{V/m})^2 \div (1200 \times \pi) \end{aligned}$$

As the calculated field strength generated by the transmitter is less than the limit the KPX-7V2 wireless keypad is deemed to comply with the radio frequency exposure requirements.

### 3.10 RSS-Gen 3.2/RSS-102 Maximum Permissible Exposure

The KPX-7V2 wireless keypad was considered a mobile device and not intended to be operated within 20 cm of user or nearby person.

RF exposure evaluation is exempt if the following criteria is met:

$$\text{Time averaged e.i.r.p.} \leq 1.31 \times 10^{-2} \times [f_{(\text{MHz})}]^{0.6834} \text{ W}$$

$$1.31 \times 10^{-2} \times [f_{(\text{MHz})}]^{0.6834} = \mathbf{0.8 \text{ W}}$$

The measured e.i.r.p. was **0.00001 W**

As the radiated power generated by the transmitter was less than the limit the KPX-7V2 wireless keypad is deemed to comply with the radio frequency exposure requirements.

## 4.0 COMPLIANCE STATEMENT

The KPX-7V2 wireless keypad, tested on behalf of Automatic Technology (Australia) Pty. Ltd. complied with the requirements of 47 CFR, Part 15 Subpart C - Rules for Radio Frequency Devices (intentional radiators), Section 15.231 – Periodic operation in the band 40.66 – 40.70 MHz and above 70 MHz and RSS-210 Issue 9.

## 5.0 MEASUREMENT UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

<b>Radiated Emissions:</b>	9 kHz to 30 MHz	±4.1 dB
	30 MHz to 300 MHz	±5.1 dB
	300 MHz to 1000 MHz	±4.7 dB
	1 GHz to 18 GHz	±4.6 dB
<b>Peak Output Power:</b>		±1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

**This document shall not be reproduced except in full.**