


Model No.: AX1-U

Label location

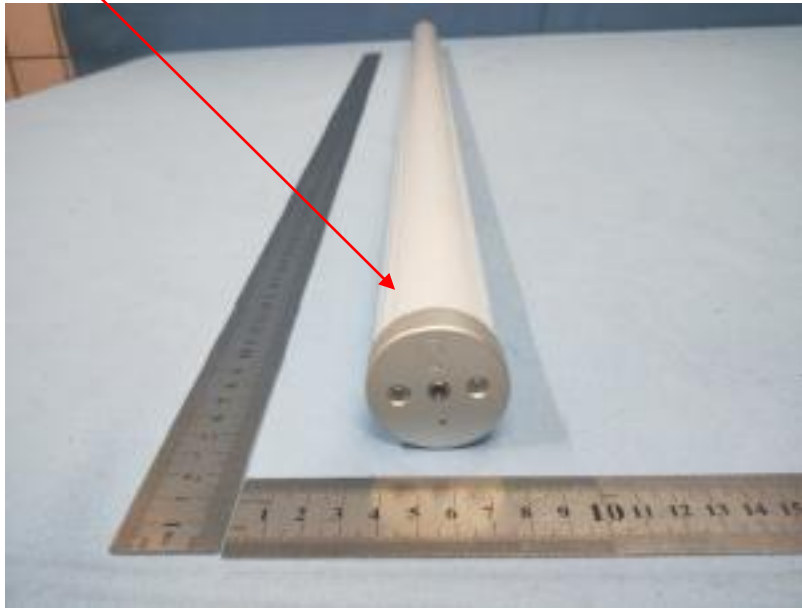

PixelTube AX1-U Input: 48V  0.5A ta 40°C IP65	 ASTERA	 SN:035-XXXXXX	 Intertek 5015410	Astera LED Technology GmbH CONFORMS TO UL STD 1573 & 153 CERTIFIED TO CSA STD C22.2 No.166 & 250.4 SUITABLE FOR DAMP LOCATIONS CONVIENT AUX EMPLACEMENTS HUMIDES CLASS 2 CIRCUIT CAUTION - RISK OF FIRE ATTENTION - RISQUE D'INCENDIE
     	FCC ID:X55AX1-U Minimum 0.3m distances from flammable Made In China materials to all exterior surfaces of the luminaire			
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.				