

Titan Tube FP1

Input: 24V $\overline{\text{---}}$ 2.0A
ta 40°C IP65



FCC ID: X55FP
Made In China

Minimum 0.3m distances from flammable
materials to all exterior surfaces of the luminaire



SN: 038-XXXXXX




Intertek
5015410

Astera LED Technology GmbH
CONFORMS TO UL STD 1573 & 153
CERTIFIED TO CSA STD C22.2 No.166 & 250.4

SUITABLE FOR DAMP LOCATIONS
CONVIENT AUX EMPLACEMENTS HUMIDES
CLASS 2 CIRCUIT
CAUTION - RISK OF FIRE
ATTENTION - RISQUE D'INCENDIE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

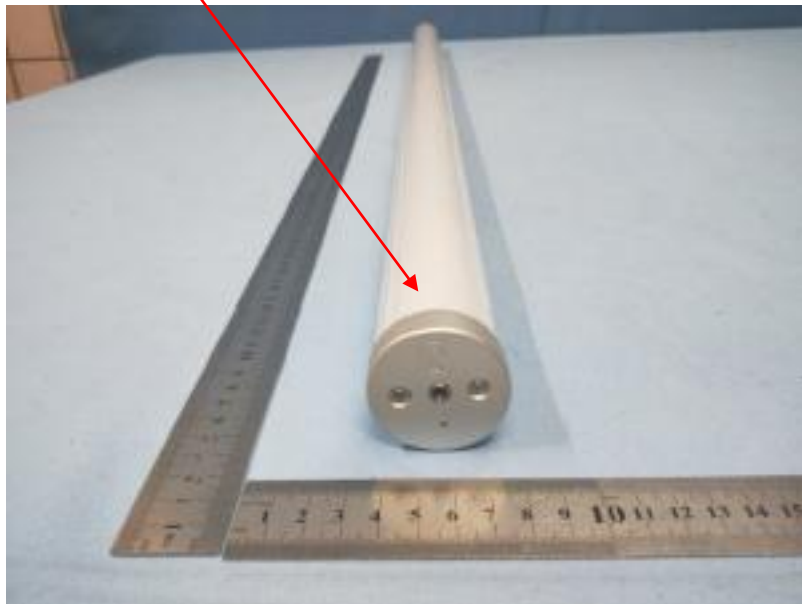

Product size:

FP1: $\phi 42 \times 1035\text{mm}$

FP2: $\phi 42 \times 550\text{mm}$