

FCC Test Report

Product Name	LVL50 Wireless Dongle for XBO
Model No	048-025T
FCC ID.	X5B-048025T

Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA

Date of Receipt	Oct. 02, 2018
Issue Date	Oct. 23, 2018
Report No.	18A0026R-RFUSP25V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issue Date: Oct. 23, 2018

Report No.: 18A0026R-RFUSP25V00



Product Name	LVL50 Wireless Dongle for XBO
Applicant	Performance Designed Products, LLC
Address	14144 Ventura Blvd., Suite 200 Sherman Oaks, CA91423 USA
Manufacturer	Performance Designed Products, LLC
Model No.	048-025T
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	PDP
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2017 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v05
Test Result	Complied

Documented By : Elephant Chen

(Adm. Assistant / Elephant Chen)

Tested By : Boris Hsu

(Assistant Engineer / Boris Hsu)

Approved By : [Signature]

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment	10
2. Conducted Emission.....	11
2.1. Test Setup	11
2.2. Limits.....	12
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. Peak Power Output	15
3.1. Test Setup	15
3.2. Limits.....	15
3.3. Test Procedure	15
3.4. Uncertainty	15
3.5. Test Result of Peak Power Output.....	16
4. Radiated Emission.....	17
4.1. Test Setup	17
4.2. Limits.....	18
4.3. Test Procedure	19
4.4. Uncertainty	20
4.5. Test Result of Radiated Emission.....	21
5. RF Antenna Conducted Test.....	25
5.1. Test Setup	25
5.2. Limits.....	25
5.3. Test Procedure	25
5.4. Uncertainty	25
5.5. Test Result of RF antenna conducted test.....	26
6. Band Edge	29
6.1. Test Setup	29
6.2. Limits.....	29
6.3. Test Procedure	30
6.4. Uncertainty	31
6.5. Test Result of Band Edge	32
7. Occupied Bandwidth.....	36
7.1. Test Setup	36
7.2. Limits.....	36

7.3.	Test Procedure	36
7.4.	Uncertainty	36
7.5.	Test Result of Occupied Bandwidth	37
8.	Power Density	40
8.1.	Test Setup	40
8.2.	Limits.....	40
8.3.	Test Procedure	40
8.4.	Uncertainty	40
8.5.	Test Result of Power Density	41
9.	EMI Reduction Method During Compliance Testing	46
Attachment 1:	EUT Test Photographs	
Attachment 2:	EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	LVL50 Wireless Dongle for XBO
Trade Name	PDP
Model No.	048-025T
FCC ID.	X5B-048025T
Frequency Range	2405.35 – 2477.35MHz
Channel Control	Auto
Channel Separation	2MHz
Antenna Gain	Refer to the table “Antenna List”
Channel Number	37
Type of Modulation	Pi/4 DQPSK
Antenna Type	Chip Antenna

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	Walsin	RFANT3216120A5T	2.12dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2405.35 MHz	Channel 11:	2425.35 MHz	Channel 21:	2445.35 MHz	Channel 31:	2465.35 MHz
Channel 2:	2407.35 MHz	Channel 12:	2427.35 MHz	Channel 22:	2447.35 MHz	Channel 32:	2467.35 MHz
Channel 3:	2409.35 MHz	Channel 13:	2429.35 MHz	Channel 23:	2449.35 MHz	Channel 33:	2469.35 MHz
Channel 4:	2411.35 MHz	Channel 14:	2431.35 MHz	Channel 24:	2451.35 MHz	Channel 34:	2471.35 MHz
Channel 5:	2413.35 MHz	Channel 15:	2433.35 MHz	Channel 25:	2453.35 MHz	Channel 35:	2473.35 MHz
Channel 6:	2415.35 MHz	Channel 16:	2435.35 MHz	Channel 26:	2455.35 MHz	Channel 36:	2475.35 MHz
Channel 7:	2417.35 MHz	Channel 17:	2437.35 MHz	Channel 27:	2457.35 MHz	Channel 37:	2477.35 MHz
Channel 8:	2419.35 MHz	Channel 18:	2439.35 MHz	Channel 28:	2459.35 MHz		
Channel 9:	2421.35 MHz	Channel 19:	2441.35 MHz	Channel 29:	2461.35 MHz		
Channel 10:	2423.35 MHz	Channel 20:	2443.35 MHz	Channel 30:	2463.35 MHz		

Note:

1. The EUT is an LVL50 Wireless Dongle for XBO with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 2.4GHz transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices

Test Mode:	Mode 1: Transmit
------------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	HG26TZ1	Non-shielded, 0.8m

	Signal Cable Type	Signal cable Description
A	USB Cable	Shielded, 1.7m

1.4. Configuration of Tested System

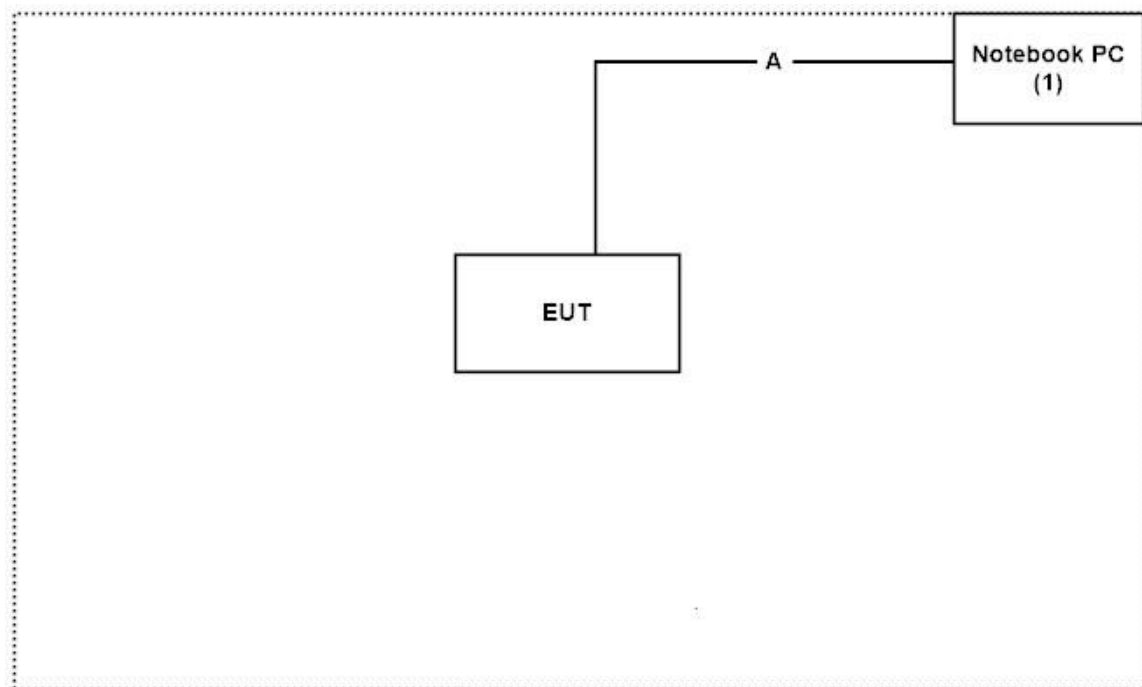

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “Avnrea Continue Power (v2018.5.18.1)” on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en.aspx

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd
Site Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2018/02/12	2019/02/11
X	Spectrum Analyzer	Agilent	N9010A	MY48030495	2018/10/13	2019/10/12
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2018/08/01	2019/07/31
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2018/07/25	2019/07/24
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2018/07/25	2019/07/24
X	EMI Test Receiver	R&S	ESCS 30	100369	2017/11/07	2018/11/06
X	LISN	R&S	ESH3-Z5	836679/017	2018/02/09	2019/02/08
X	LISN	R&S	ENV216	100097	2018/02/09	2019/02/08

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2018/03/12	2019/03/11
X	Loop Antenna	Teseq	HLA6121	37133	2018/10/13	2019/10/12
X	Bilog Antenna	Schaffner Chase	CBL6112B	2707	2018/06/24	2019/06/23
X	Coaxial Cable	DEKRA	RG 214	LC003-RG	2018/06/14	2019/06/13
X	Pre-Amplifier	Jet-Power	JPA-10M1G33	1701010003300 10	2018/06/14	2019/06/13
X	Horn Antenna	ETS-Lindgren	3117	00135205	2018/05/03	2019/05/02
X	Horn Antenna	SCHWARZBECK	9120D	576	2017/11/30	2018/11/29
X	Pre-Amplifier	EMCI	EMC012630SE	980210	2018/04/10	2019/04/09
X	Horn Antenna	Com-Power	AH-840	101043	2018/01/09	2019/01/08
X	Amplifier + Cable	EMCI	EMC184045SE	980370	2018/03/21	2019/03/20
X	Filter	MICRO-TRONICS	BRM50702	G270	2018/08/06	2019/08/05
X	Filter	MICRO-TRONICS	BRM50716	G196	2018/08/06	2019/08/05

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :QuieTek EMI 2.0 V2.1.113.

2. Conducted Emission

2.1. Test Setup

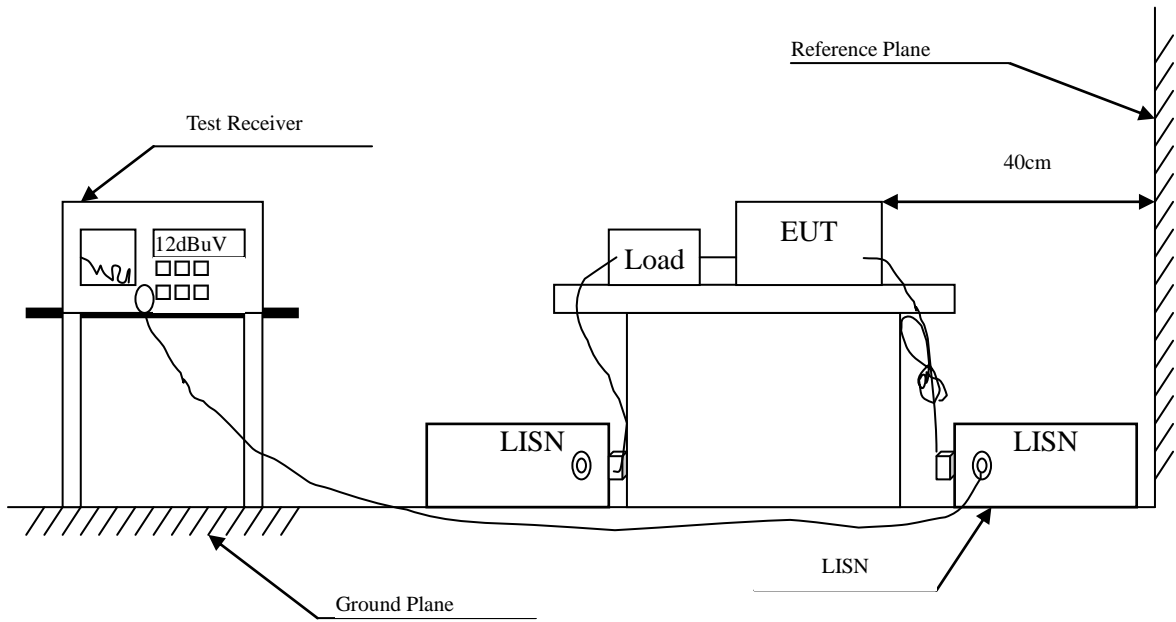

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : LVL50 Wireless Dongle for XBO
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Date : 2018/10/09
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.166	9.744	34.700	44.444	-21.099	65.543
0.197	9.738	29.400	39.138	-25.519	64.657
0.509	9.750	32.640	42.390	-13.610	56.000
1.568	9.804	13.300	23.104	-32.896	56.000
3.642	9.883	18.560	28.443	-27.557	56.000
9.216	10.047	15.740	25.787	-34.213	60.000
Average					
0.166	9.744	21.950	31.694	-23.849	55.543
0.197	9.738	19.470	29.208	-25.449	54.657
0.509	9.750	24.110	33.860	-12.140	46.000
1.568	9.804	6.810	16.614	-29.386	46.000
3.642	9.883	9.970	19.853	-26.147	46.000
9.216	10.047	11.420	21.467	-28.533	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : LVL50 Wireless Dongle for XBO
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Date : 2018/10/09
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 2					
Quasi-Peak					
0.177	9.737	32.320	42.057	-23.172	65.229
0.193	9.738	30.500	40.238	-24.533	64.771
0.533	9.741	23.840	33.581	-22.419	56.000
1.220	9.780	15.480	25.260	-30.740	56.000
3.580	9.871	16.600	26.471	-29.529	56.000
10.127	10.094	10.000	20.094	-39.906	60.000
Average					
0.177	9.737	25.110	34.847	-20.382	55.229
0.193	9.738	23.650	33.388	-21.383	54.771
0.533	9.741	17.630	27.371	-18.629	46.000
1.220	9.780	11.520	21.300	-24.700	46.000
3.580	9.871	9.740	19.611	-26.389	46.000
10.127	10.094	3.720	13.814	-36.186	50.000


Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

Conducted Measurement

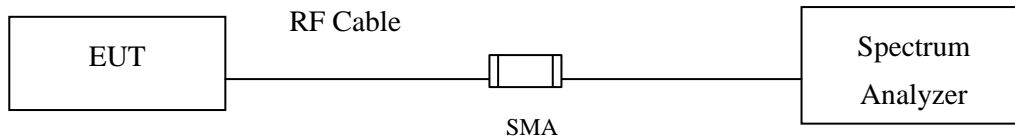

3.2. Limits

The maximum peak power shall be less 1 Watt.

3.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 section 8.3.1.3 PKPM1 Peak-reading power meter method for compliance to FCC 47CFR 15.247 requirements.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output

Product : LVL50 Wireless Dongle for XBO
Test Item : Peak Power Output Data
Test Site : No.3 OATS
Test Date : 2018/10/08
Test Mode : Mode 1: Transmit


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
01	2405.35	5.72	<30dBm	Pass
19	2441.35	5.25	<30dBm	Pass
37	2477.35	4.67	<30dBm	Pass

Note: Measurement Level =Reading value on power meter + cable loss


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

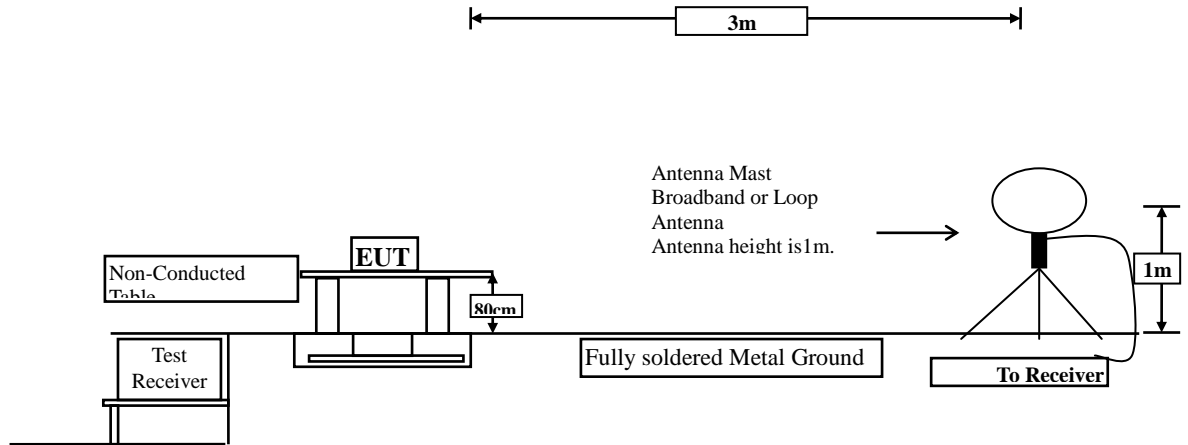

Radiated Emission Below 1GHz

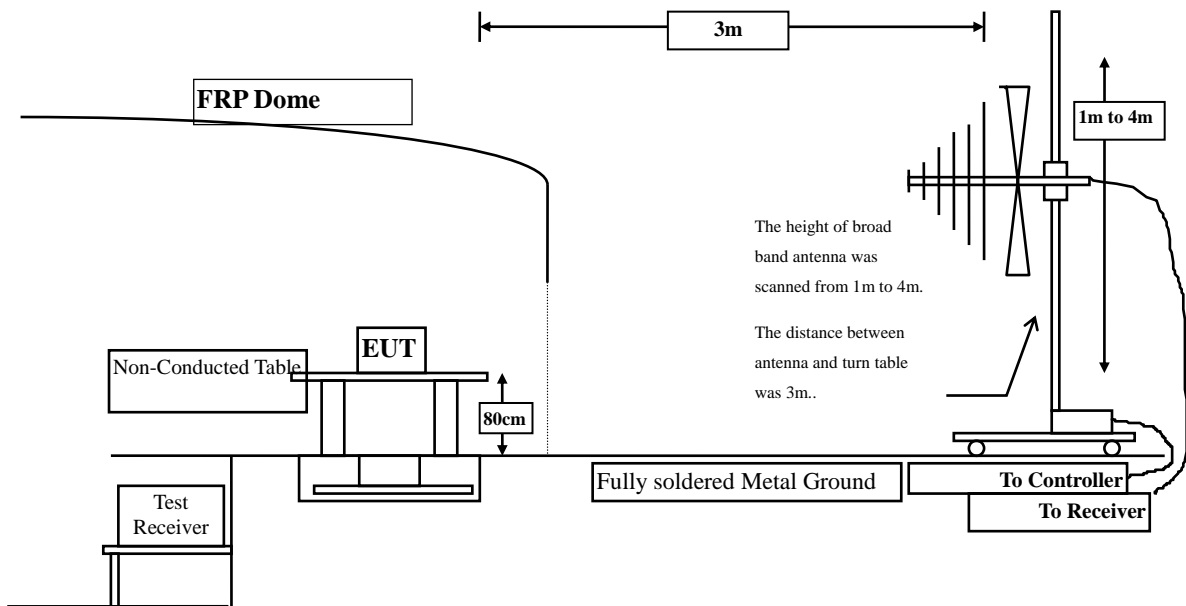

Radiated Emission Above 1GHz

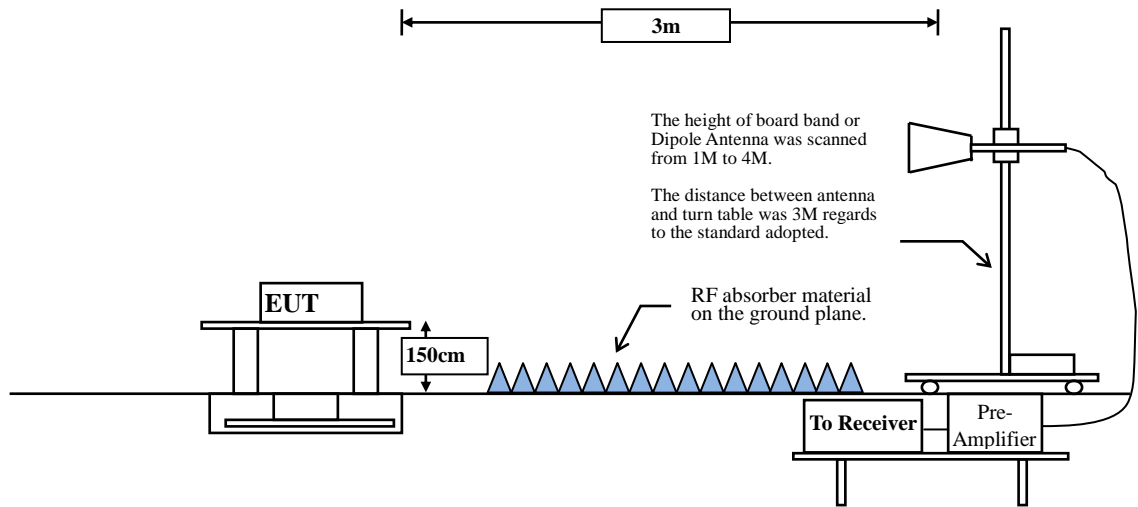

4.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 558074 section 8.3.2.1 Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 8.3.2.1 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
Pi/4 DQPSK	100	--	--	10

Note: Duty Cycle Refer to Section 9

4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : LVL50 Wireless Dongle for XBO
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/08
 Test Mode : Mode 1: Transmit (2405.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4810.700	2.526	40.047	42.574	-31.426	74.000
7216.050	9.399	38.155	47.554	-26.446	74.000
9621.400	10.269	37.866	48.135	-25.865	74.000
Vertical					
Peak Detector:					
4810.700	2.922	40.378	43.301	-30.699	74.000
7216.050	9.884	37.987	47.871	-26.129	74.000
9621.400	10.750	37.410	48.160	-25.840	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Dongle for XBO
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/08
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4882.700	2.021	40.125	42.146	-31.854	74.000
7324.050	9.783	39.638	49.421	-24.579	74.000
9765.400	9.687	38.227	47.914	-26.086	74.000
Vertical					
Peak Detector:					
4882.700	2.484	40.193	42.677	-31.323	74.000
7324.050	10.399	38.260	48.659	-25.341	74.000
9765.400	10.320	38.974	49.294	-24.706	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Dongle for XBO
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/08
 Test Mode : Mode 1: Transmit (2477.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4954.700	2.529	39.382	41.912	-32.088	74.000
7432.050	10.524	37.794	48.318	-25.682	74.000
9909.400	10.189	39.245	49.434	-24.566	74.000
Vertical					
Peak Detector:					
4954.700	3.316	39.424	42.740	-31.260	74.000
7432.050	11.221	36.975	48.196	-25.804	74.000
9909.400	11.240	38.339	49.579	-24.421	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : LVL50 Wireless Dongle for XBO
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Date : 2018/10/15
 Test Mode : Mode 1: Transmit (2441.35MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
175.500	-9.792	37.279	27.487	-16.013	46.000
253.100	-5.669	36.053	30.384	-15.616	46.000
351.070	-1.296	31.856	30.560	-15.440	46.000
419.940	-0.254	34.318	34.064	-11.936	46.000
559.620	2.147	34.556	36.703	-9.297	46.000
839.950	6.032	31.298	37.330	-8.670	46.000
Vertical					
179.380	-0.824	24.836	24.012	-19.488	43.500
374.350	0.224	24.940	25.164	-20.836	46.000
528.580	1.164	23.621	24.785	-21.215	46.000
610.060	2.087	24.801	26.888	-19.112	46.000
839.950	2.132	27.856	29.988	-16.012	46.000
897.180	0.937	30.250	31.187	-14.813	46.000


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

5. RF Antenna Conducted Test

5.1. Test Setup

RF antenna Conducted Measurement:

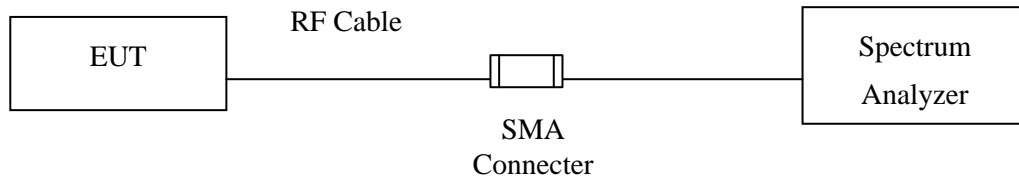

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

Tested according to DTS test procedure of KDB558074 section 8.5 DTS emissions in non-restricted frequency bands for compliance to FCC 47CFR 15.247 requirements

5.4. Uncertainty


The measurement uncertainty

Conducted is defined as $\pm 1.20\text{dB}$

5.5. Test Result of RF antenna conducted test

Product : LVL50 Wireless Dongle for XBO
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit


Channel 01 (2405.35MHz) 30M-25GHz

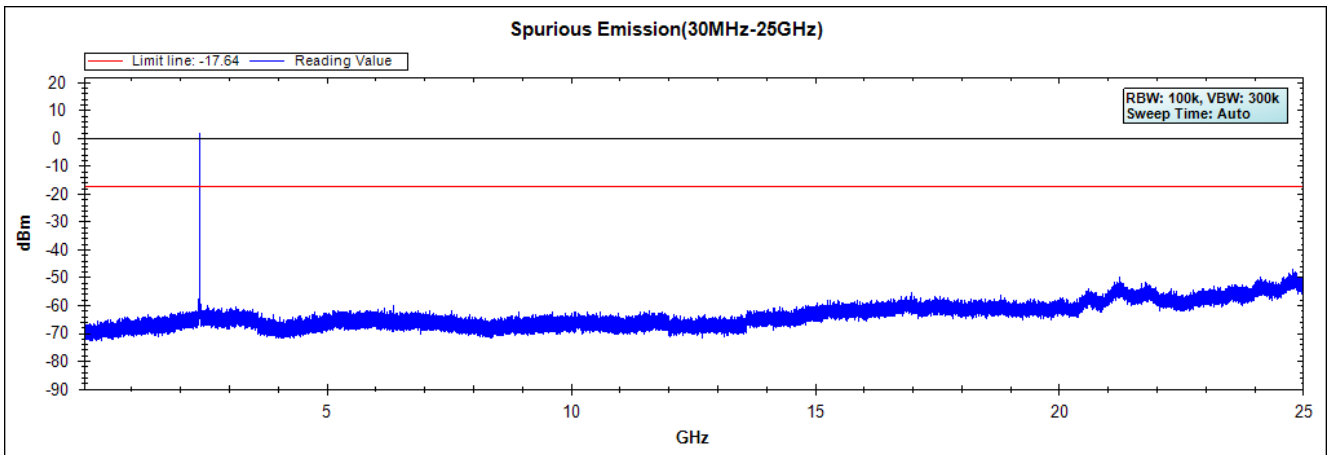

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : LVL50 Wireless Dongle for XBO
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit


Channel 19 (2441.35MHz) 30M-25GHz

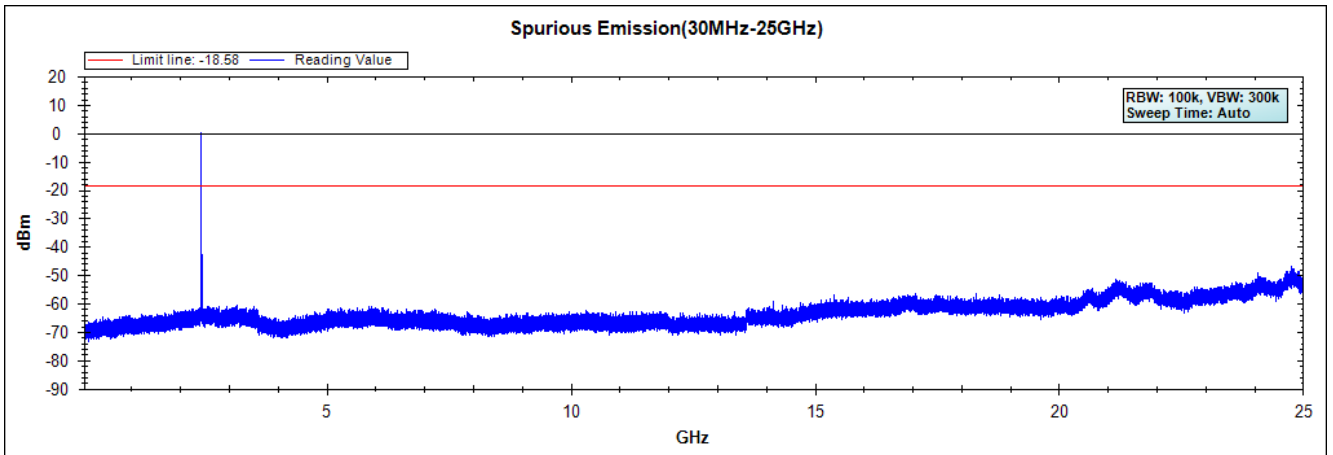

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : LVL50 Wireless Dongle for XBO
Test Item : RF antenna conducted test
Test Site : No.3 OATS
Test Mode : Mode 1: Transmit

Channel 37 (2477.35MHz) 30M-25GHz

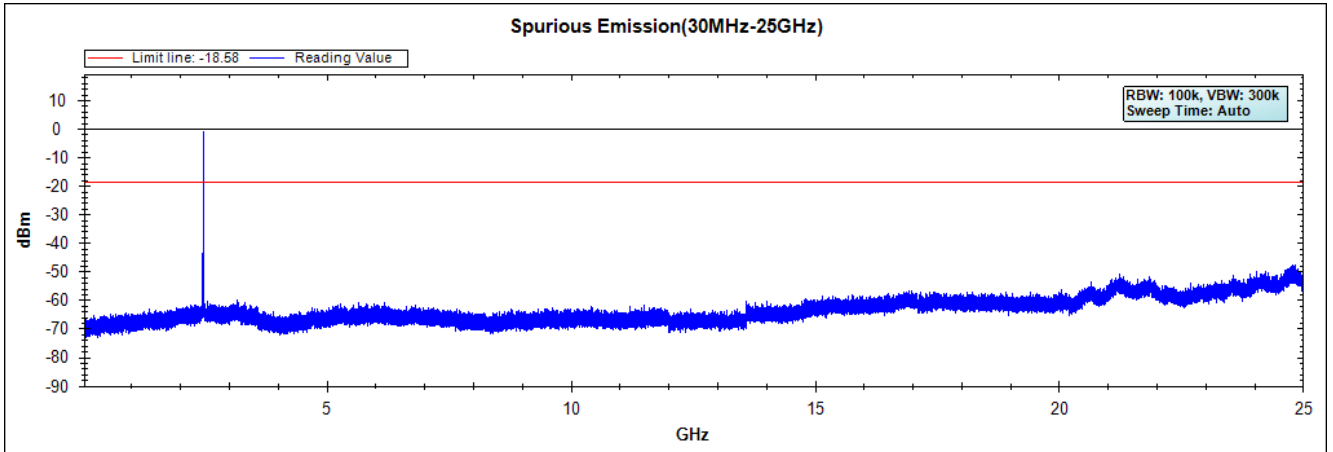


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

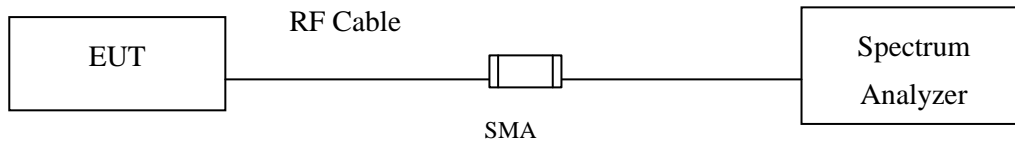

RF Radiated Measurement:

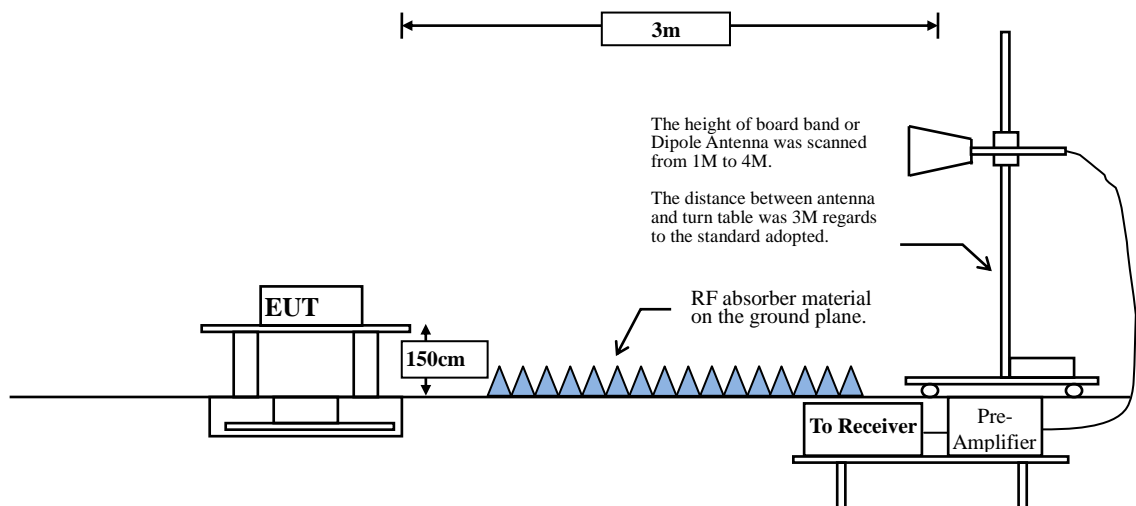

6.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to KDB 558074 section 8.3.2.1. Peak power measurement procedure

RBW = as specified in Table 1.

VBW \geq 3 x RBW.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 8.3.2.1 Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
Pi/4 DQPSK	100	--	--	10

Note: Duty Cycle Refer to Section 9

6.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : LVL50 Wireless Dongle for XBO
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405.35MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.841	6.470	41.420	47.890	74.00	54.00	Pass
01 (Peak)	2390.000	6.474	39.168	45.643	74.00	54.00	Pass
01 (Peak)	2400.000	6.528	54.361	60.889	--	--	--
01 (Peak)	2405.350	6.561	87.440	94.001	--	--	--
01 (Average)	2390.000	6.474	23.821	30.296	74.00	54.00	Pass
01 (Average)	2400.000	6.528	46.407	52.935	--	--	Pass
01 (Average)	2405.350	6.561	86.276	92.837	--	--	--

Figure Channel 01: Horizontal (Peak)


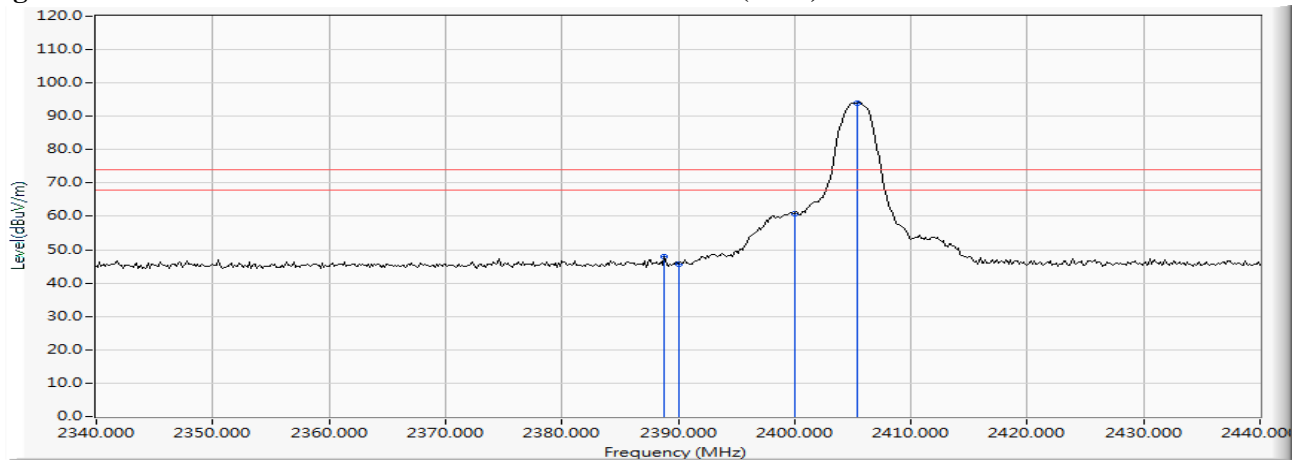


Figure Channel 01: Horizontal (Average)

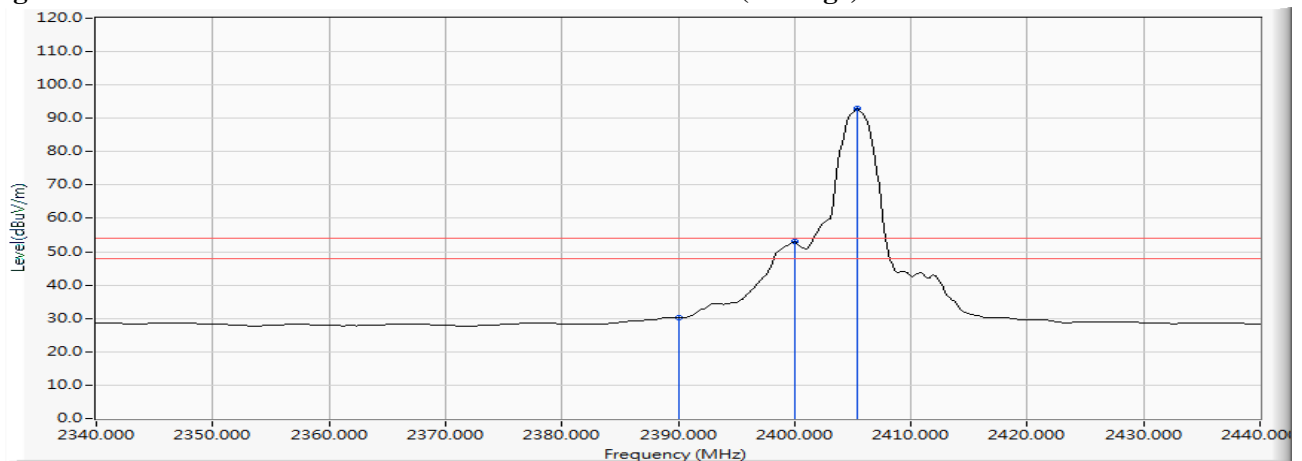

Note :

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Dongle for XBO
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405.35MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2385.942	5.898	40.937	46.835	74.00	54.00	Pass
01 (Peak)	2390.000	5.880	39.169	45.050	74.00	54.00	Pass
01 (Peak)	2400.000	5.879	51.940	57.819	--	--	--
01 (Peak)	2405.350	5.893	84.794	90.687	--	--	--
01 (Average)	2390.000	5.880	22.901	28.782	74.00	54.00	Pass
01 (Average)	2400.000	5.879	43.902	49.781	--	--	Pass
01 (Average)	2405.350	5.893	83.762	89.655	--	--	--

Figure Channel 01: Vertical (Peak)


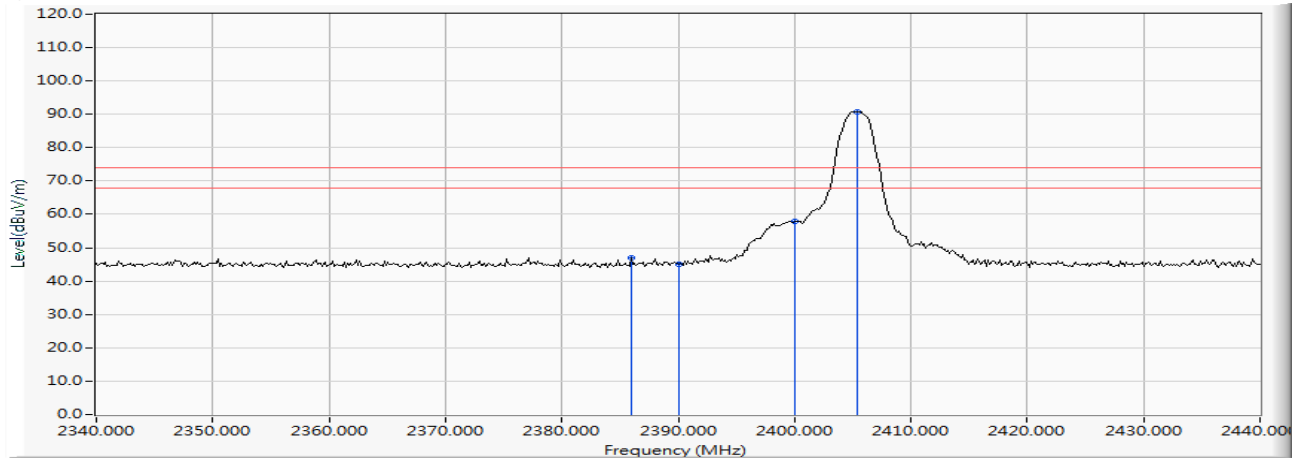


Figure Channel 01: Vertical (Average)

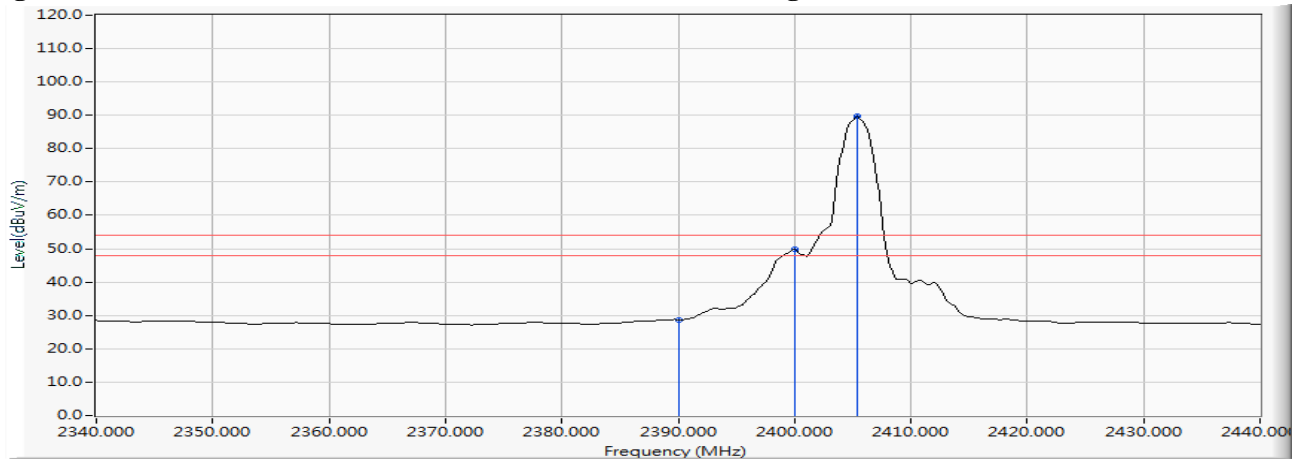

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Dongle for XBO
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2477.558	7.068	88.511	95.579	--	--	--
39 (Peak)	2483.500	7.110	48.528	55.638	74.00	54.00	Pass
39 (Average)	2477.268	7.066	87.322	94.388	--	--	--
39 (Average)	2483.500	7.110	36.961	44.071	74.00	54.00	Pass

Figure Channel 39: Horizontal (Peak)


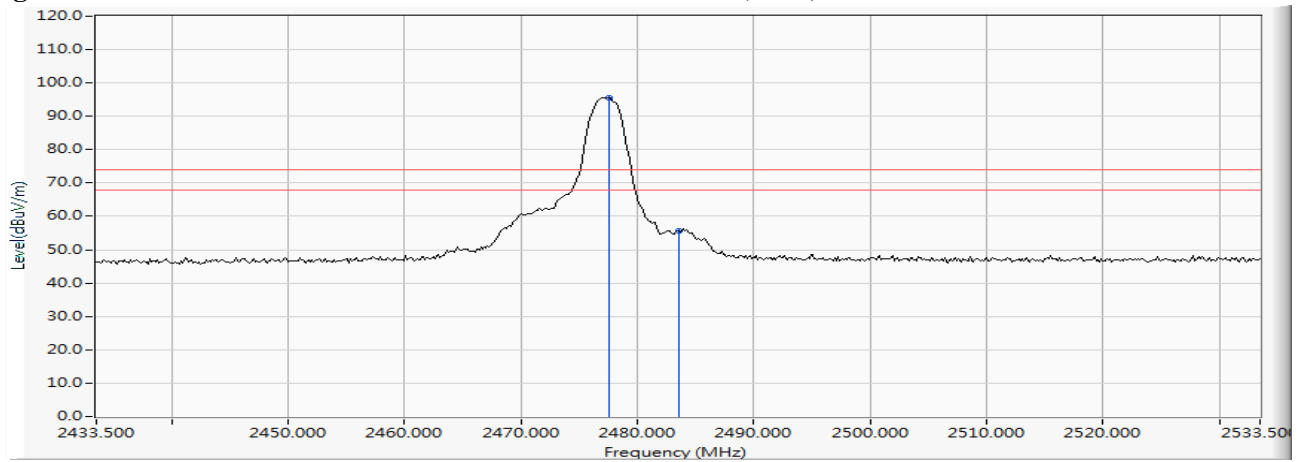


Figure Channel 39: Horizontal (Average)

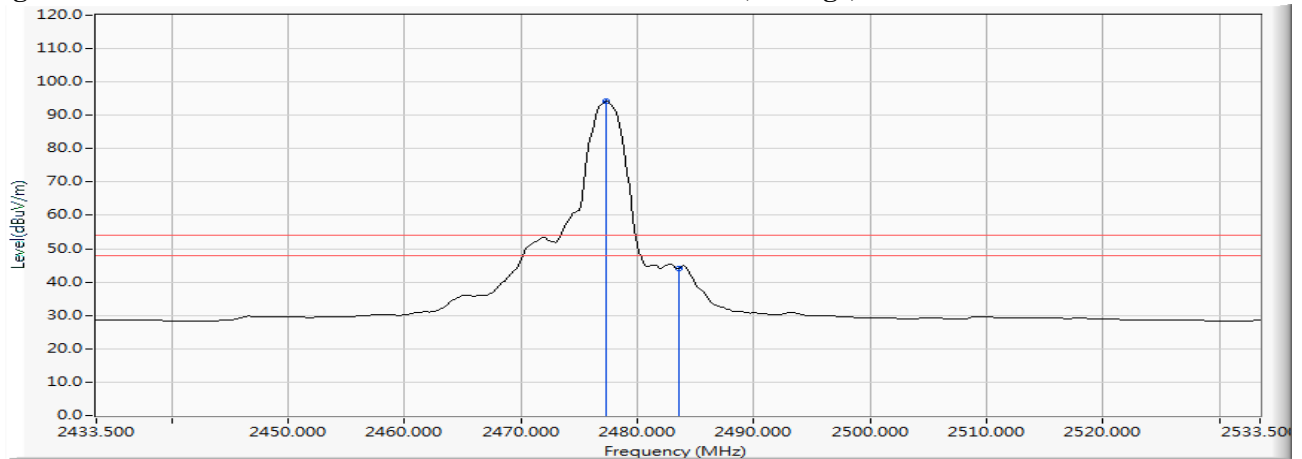

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LVL50 Wireless Dongle for XBO
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2477.558	6.326	85.718	92.044	--	--	--
39 (Peak)	2483.500	6.363	46.488	52.851	74.00	54.00	Pass
39 (Average)	2477.268	6.324	84.582	90.906	--	--	--
39 (Average)	2483.500	6.363	34.491	40.854	74.00	54.00	Pass

Figure Channel 39: Vertical (Peak)


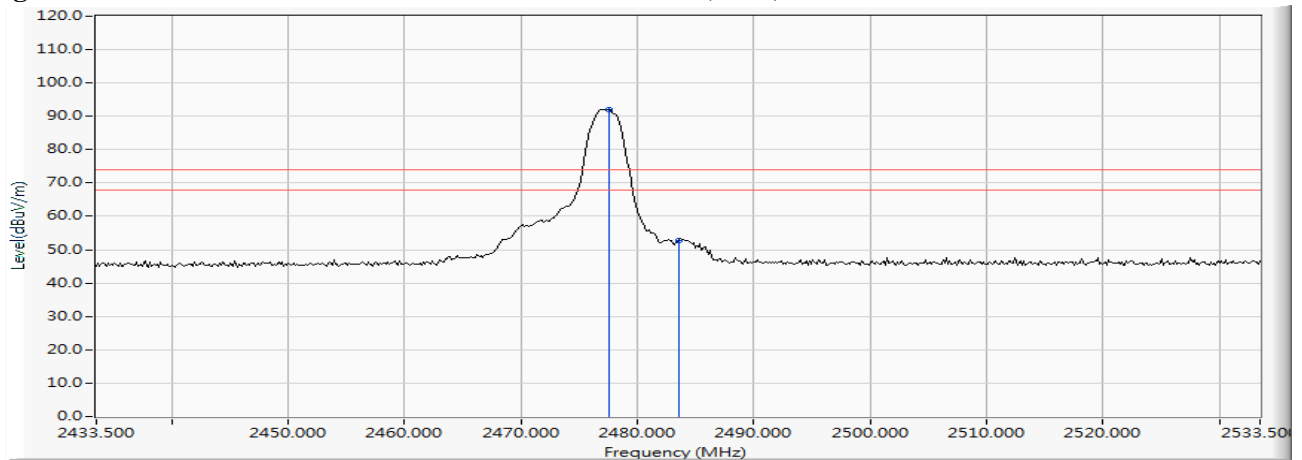


Figure Channel 39: Vertical (Average)

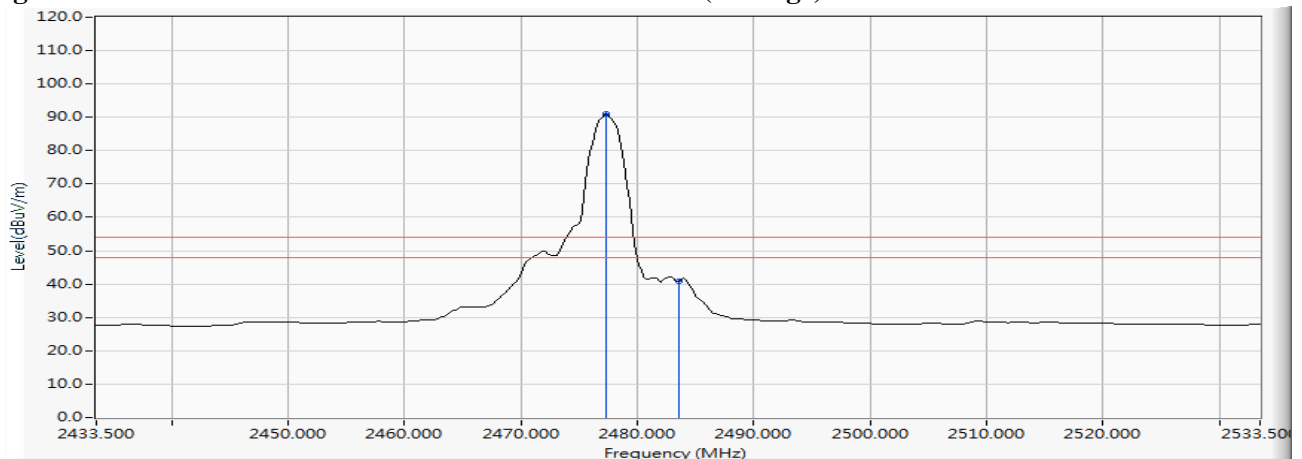


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

7. Occupied Bandwidth

7.1. Test Setup

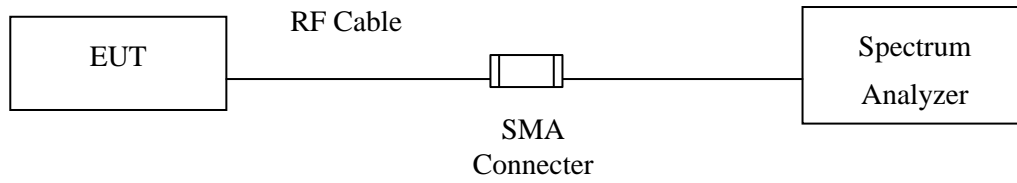

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty


$\pm 283\text{Hz}$

7.5. Test Result of Occupied Bandwidth

Product : LVL50 Wireless Dongle for XBO
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2405.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2405.35	1630	>500	Pass


Figure Channel 01:

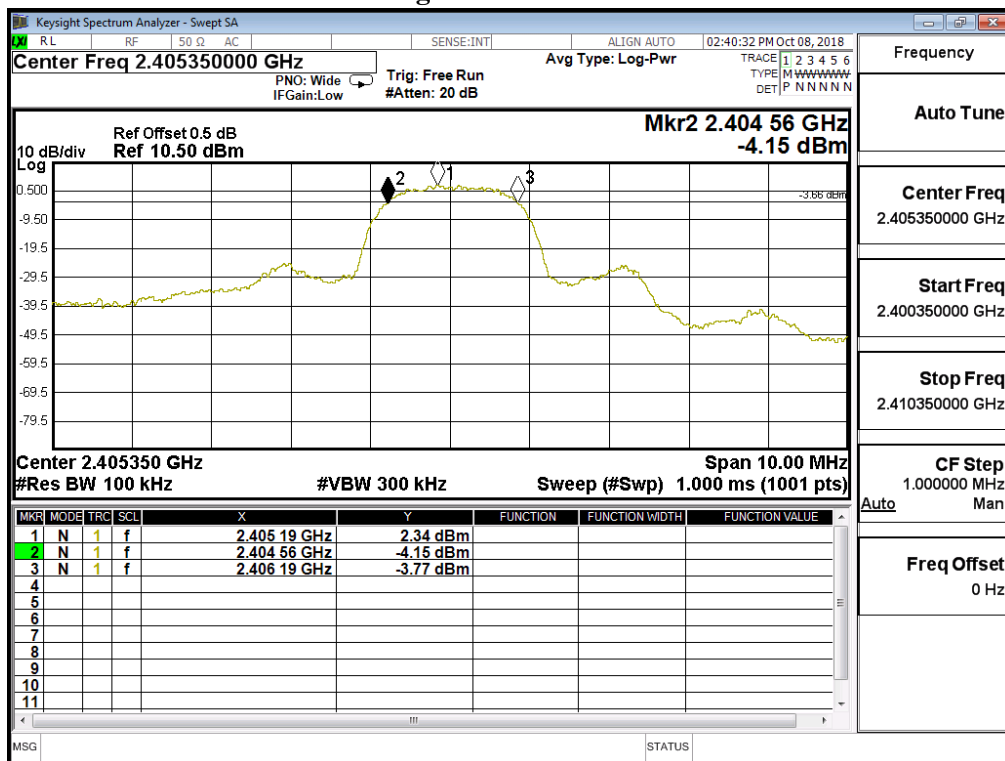

Product : LVL50 Wireless Dongle for XBO
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2441.35MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2441.35	1680	>500	Pass


Figure Channel 20:

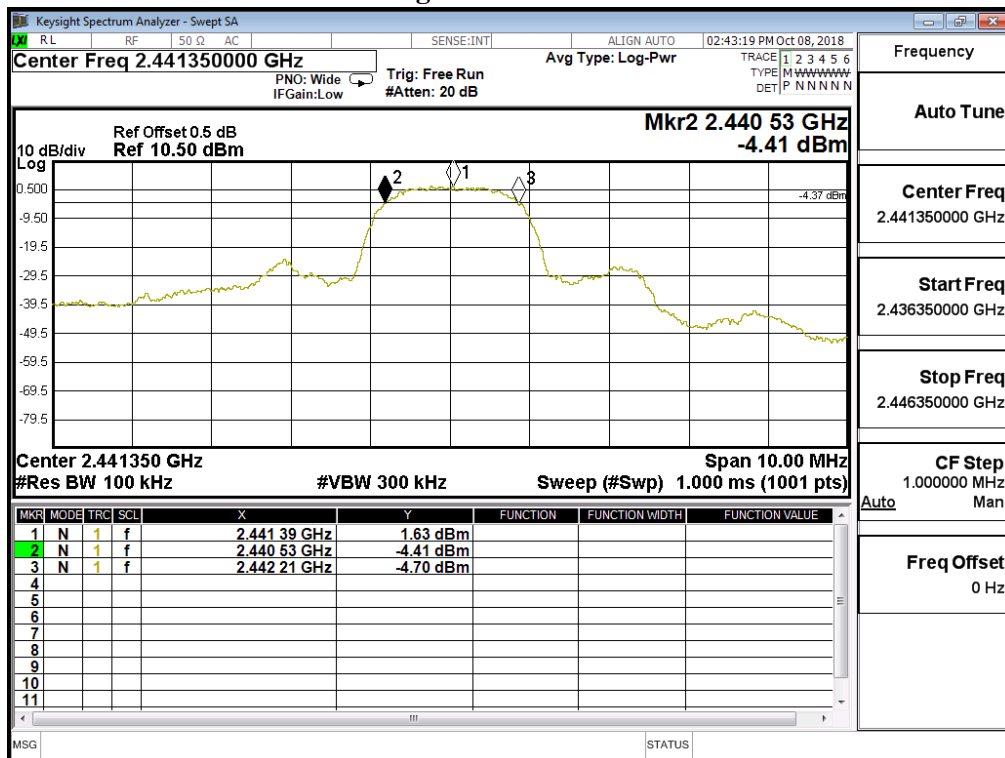

Product : LVL50 Wireless Dongle for XBO
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
37	2477.35	1640	>500	Pass

Figure Channel 39:

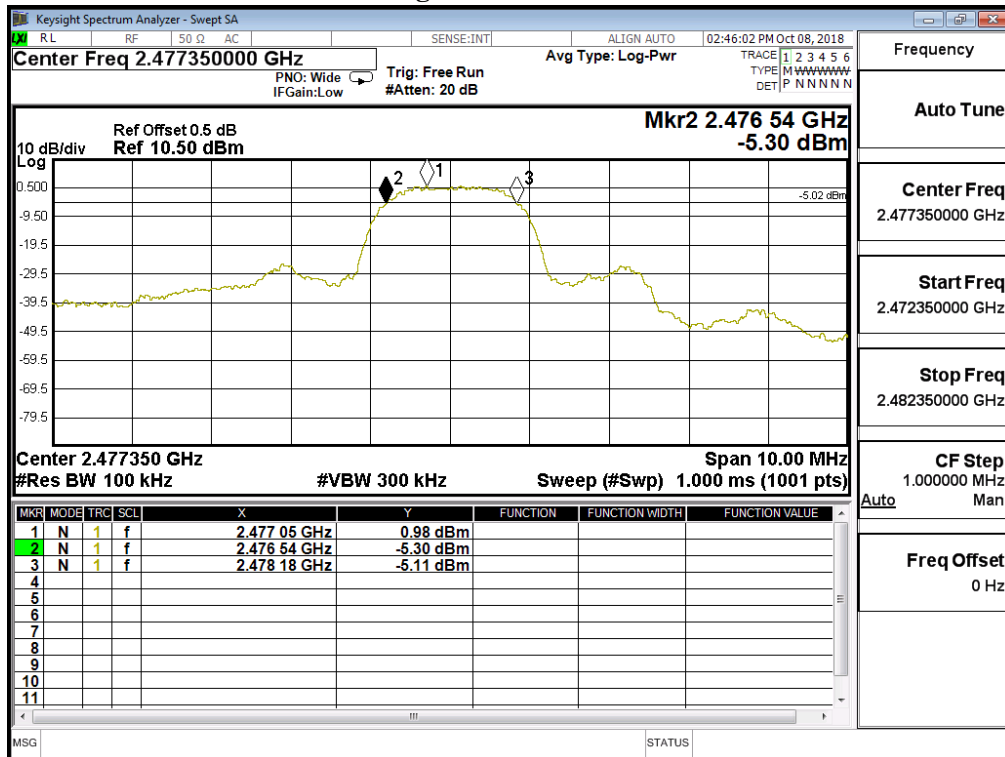

8. Power Density

8.1. Test Setup

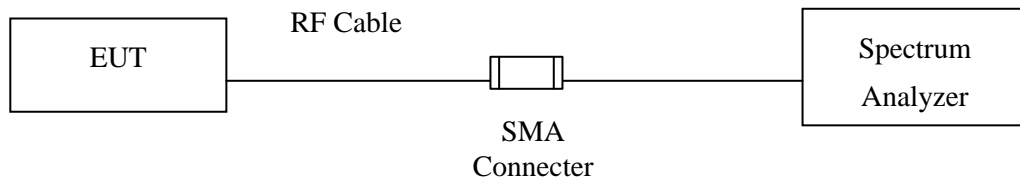

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 8.4 PKPSD (peak PSD) method.

8.4. Uncertainty


± 1.20 dB

8.5. Test Result of Power Density

Product : LVL50 Wireless Dongle for XBO
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit(2405.35MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2405.35	2.360	< 8dBm	Pass


Figure Channel 01:

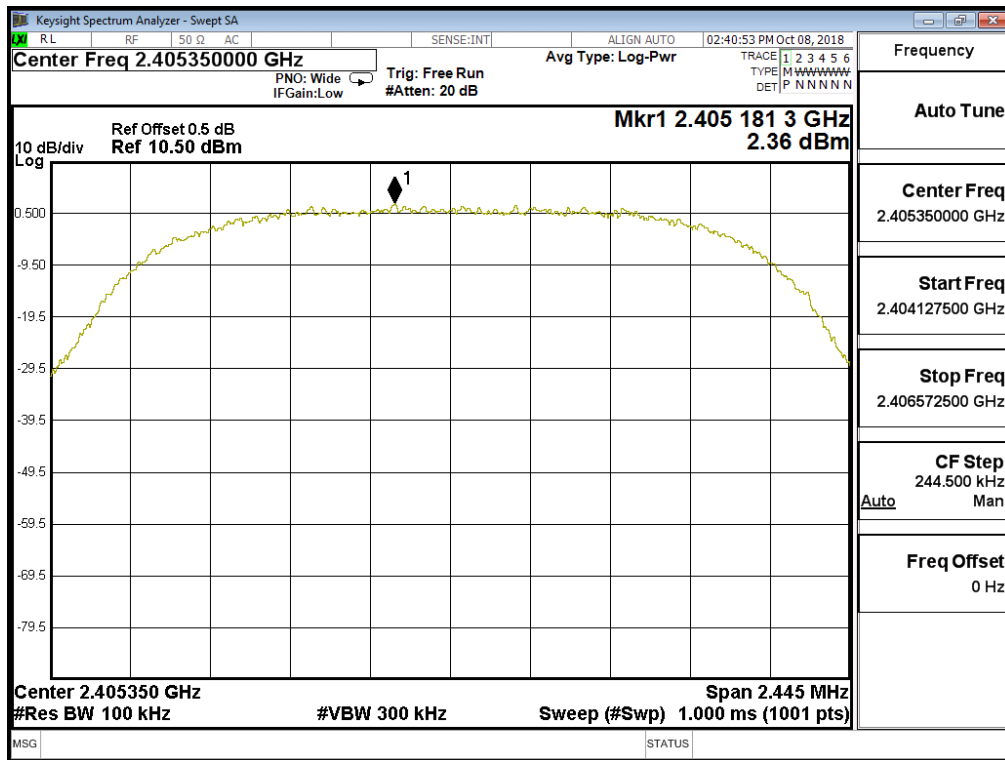

Product : LVL50 Wireless Dongle for XBO
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2477.35MHz)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
37	2477.35	1.420	< 8dBm	Pass

Figure Channel 39:

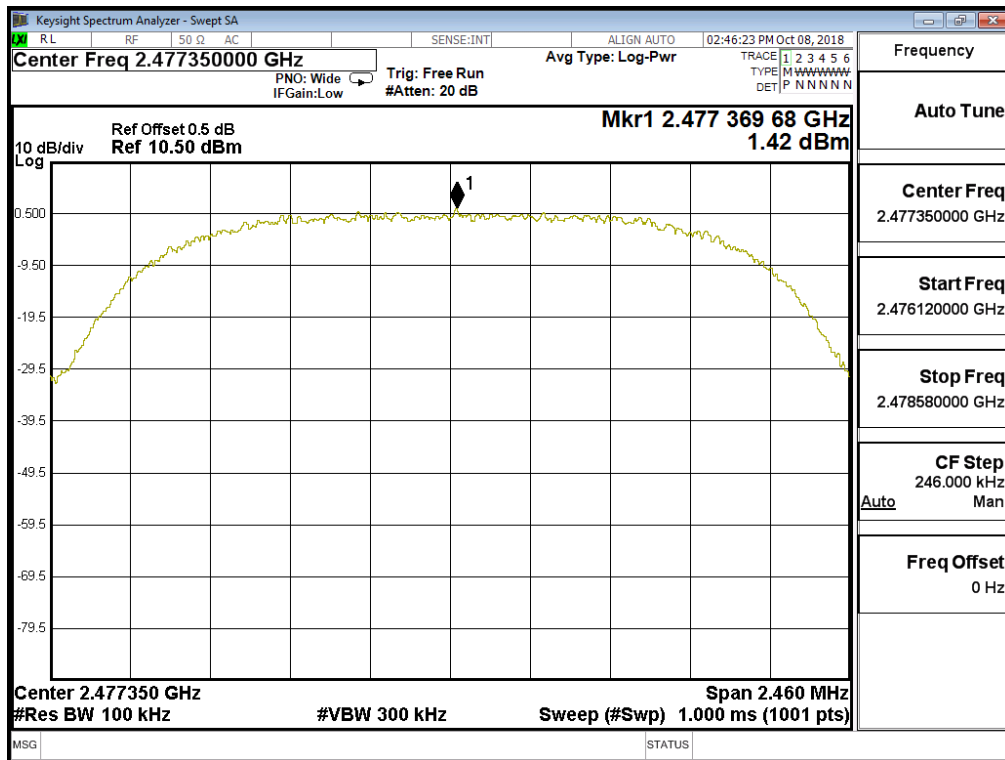

9. Duty Cycle

9.1. Test Setup

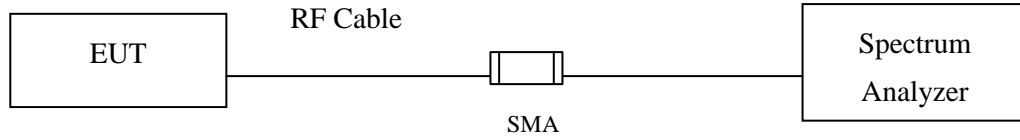

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

9.3. Uncertainty

$\pm 2.31\text{msec}$

9.4. Test Result of Duty Cycle

Product : LVL50 Wireless Dongle for XBO
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
Pi/4 DQPSK	--	--	100	0

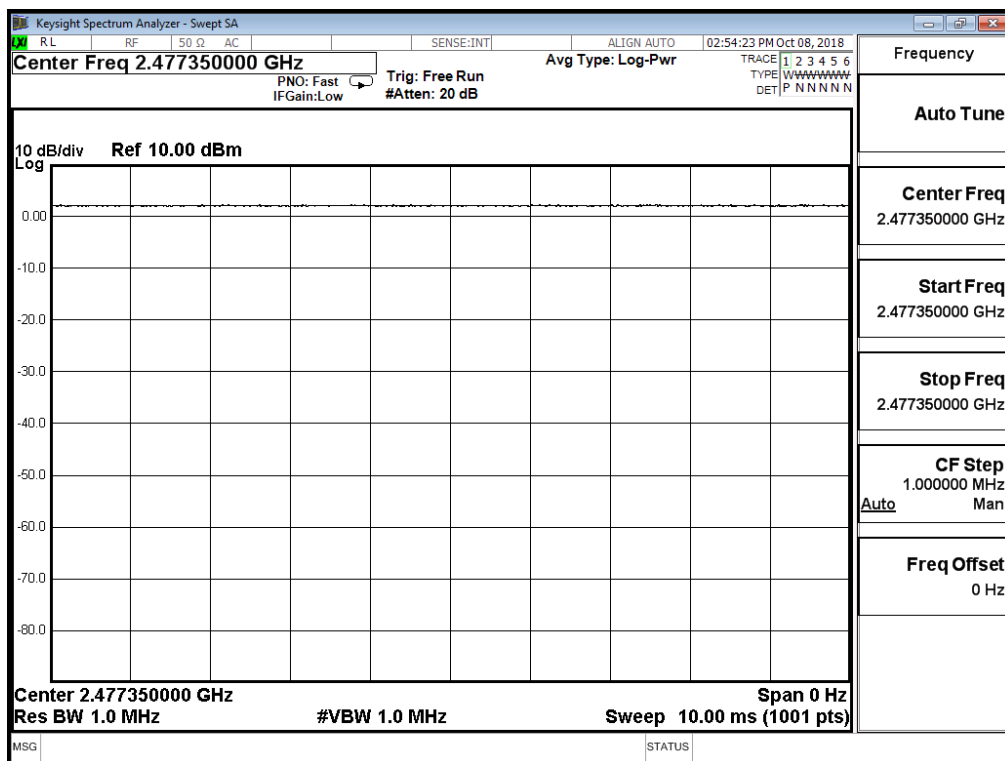

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.