

# FCC &ISED Radio Test Report

**FCC ID: X5B-5002021**  
**IC: 8814A-5002021**

**The report concerns: Original Grant**

Report Reference No.....: 23EFSS04013 02621

Date Sample(s) Received.....: 2023-04-12

Date of Tested.....: From 2023-04-12 to 2023-04-28

Date of issue.....: 2023-04-28

Testing Laboratory .....: DongGuanShuoXin Electronic Technology Co., Ltd.  
Zone A, 1F, No. 6, XinGang Road YuanGang Street,  
Address .....: XinAn District, ChangAn Town, DongGuan City,  
GuangDong, China

Applicant's name .....: PERFORMANCE DESIGNED PRODUCTS, LLC  
Address for .....: 14144 Ventura Blvd, Suite 200 Sherman. Oaks CA  
91423 United States Of America

Manufacturer.....: PERFORMANCE DESIGNED PRODUCTS, LLC

Equipment.....: REMATCH FACEON Wireless Deluxe Controller for  
Nintendo Switch

Trade Mark .....: /

Model .....: 500-202

HVIN: .....: 50020201

Ratings .....: I/P: DC 5V Charged  
DC 3.7V Li-ion Battery

**Test Engineer:**

Blue Qiu

**Responsible Engineer :**

Smile Wang

**Authorized Signatory:**

King Wang

**Table of Contents**

**Page**

<b>1. TEST REPORT DECLARE</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>2.1. MEASUREMENT UNCERTAINTY</b>	<b>7</b>
<b>3. GENERAL INFORMATION</b>	<b>8</b>
<b>3.1. GENERAL DESCRIPTION OF EUT</b>	<b>8</b>
<b>3.2. DESCRIPTION OF TEST MODES</b>	<b>10</b>
<b>3.3. PARAMETERS OF TEST SOFTWARE</b>	<b>11</b>
<b>3.4. BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED</b>	<b>11</b>
<b>3.5. SUPPORT UNITS</b>	<b>11</b>
<b>3.6. TEST ENVIRONMENT CONDITIONS</b>	<b>12</b>
<b>4. AC POWER LINE CONDUCTED EMISSIONS TEST</b>	<b>13</b>
<b>4.1. LIMIT</b>	<b>13</b>
<b>4.2. TEST PROCEDURE</b>	<b>13</b>
<b>4.3. MEASUREMENT INSTRUMENTS LIST</b>	<b>13</b>
<b>4.4. TESTSETUP</b>	<b>14</b>
<b>4.5. EUT OPERATING CONDITIONS</b>	<b>14</b>
<b>4.6. TEST RESULTS</b>	<b>15</b>
<b>5. RADIATED EMISSION TEST</b>	<b>17</b>
<b>5.1. LIMIT</b>	<b>17</b>
<b>5.2. TEST PROCEDURE AND SETTING</b>	<b>18</b>
<b>5.3. MEASUREMENT INSTRUMENTS LIST</b>	<b>19</b>
<b>5.4. TESTSETUP</b>	<b>19</b>
<b>5.5. EUT OPERATING CONDITIONS</b>	<b>20</b>
<b>5.6. TEST RESULTS - 9 KHZ TO 30MHZ</b>	<b>21</b>
<b>5.7. TEST RESULTS- 30 MHZ TO 1000MHZ</b>	<b>22</b>
<b>5.8. TEST RESULTS - ABOVE 1000MHZ(BAND EDGE)</b>	<b>24</b>
<b>5.9. TEST RESULTS - ABOVE 1000MHZ(HARMONIC)</b>	<b>32</b>
<b>6. NUMBER OF HOPPING FREQUENCY</b>	<b>44</b>
<b>6.1. LIMIT</b>	<b>44</b>
<b>6.2. TEST PROCEDURE AND SETTING</b>	<b>44</b>
<b>6.3. MEASUREMENT INSTRUMENTS LIST</b>	<b>44</b>
<b>6.4. TEST SETUP</b>	<b>44</b>

Table of Contents	Page
6.5. EUT OPERATION CONDITIONS	44
6.6. TEST RESULTS	45
<b>7. AVERAGE TIME OF OCCUPANCY</b>	<b>46</b>
7.1. LIMIT	46
7.2. TEST PROCEDURE AND SETTING	46
7.3. MEASUREMENT INSTRUMENTS LIST	46
7.4. TEST SETUP	46
7.5. EUT OPERATION CONDITIONS	46
7.6. TEST RESULTS	47
<b>8. HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>49</b>
8.1. LIMIT	49
8.2. TEST PROCEDURE AND SETTING	49
8.3. MEASUREMENT INSTRUMENTS LIST	49
8.4. TEST SETUP	49
8.5. EUT OPERATION CONDITIONS	49
8.6. TEST RESULTS	50
<b>9. BANDWIDTH TEST</b>	<b>52</b>
9.1. LIMIT	52
9.2. TEST PROCEDURE AND SETTING	52
9.3. MEASUREMENT INSTRUMENTS LIST	52
9.4. TEST SETUP	52
9.5. EUT OPERATION CONDITIONS	52
9.6. TEST RESULTS	53
<b>10. MAXIMUM OUTPUT POWER</b>	<b>55</b>
10.1. LIMIT	55
10.2. TEST PROCEDURE AND SETTING	55
10.3. MEASUREMENT INSTRUMENTS LIST	55
10.4. TEST SETUP	55
10.5. EUT OPERATION CONDITIONS	55
10.6. TEST RESULTS	56
<b>11. CONDUCTED SPURIOUS EMISSION</b>	<b>59</b>
11.1. LIMIT	59
11.2. TEST PROCEDURE AND SETTING	59
11.3. MEASUREMENT INSTRUMENTS LIST	59

<b>Table of Contents</b>	<b>Page</b>
<b>11.4. TEST SETUP</b>	<b>59</b>
<b>11.5. EUT OPERATION CONDITIONS</b>	<b>59</b>
<b>11.6. TEST RESULTS</b>	<b>60</b>
<b>12. FREQUENCY STABILITY MEASUREMENT</b>	<b>62</b>
<b>12.1. LIMIT</b>	<b>62</b>
<b>12.2. TEST PROCEDURE</b>	<b>62</b>
<b>12.3. MEASUREMENT INSTRUMENTS LIST</b>	<b>62</b>
<b>12.4. TEST SETUP</b>	<b>62</b>
<b>12.5. EUT OPERATION CONDITIONS</b>	<b>62</b>
<b>12.6. TEST RESULTS</b>	<b>63</b>

**1TEST REPORT DECLARE**

Applicant for FCC	PERFORMANCE DESIGNED PRODUCTS, LLC
Address for FCC	14144 Ventura Blvd, Suite 200 Sherman. Oaks CA 91423 United States Of America
Manufacturer	PERFORMANCE DESIGNED PRODUCTS, LLC
Address	14144 Ventura Blvd, Suite 200 Sherman. Oaks CA 91423 United States Of America
Factory	PERFORMANCE DESIGNED PRODUCTS, LLC
Address	14144 Ventura Blvd, Suite 200 Sherman. Oaks CA 91423 United States Of America
Equipment	REMATCH FACEON Wireless Deluxe Controller for Nintendo Switch
Model No.	500-202
HVIN	50020201
Trade Mark	/
Standard	FCC Part15, Subpart C (15.247) RSS-247 Issue 2, Feb. 2017 RSS-Gen Issue 5, Apr. 2018 ANSI C63.10-2013

**We Declare:**

The equipment described above is tested by DongGuanShuoXin Electronic Technology Co., Ltd(ATT). and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuanShuoXin Electronic Technology Co., Ltd.(ATT) is assumed of full responsibility for the accuracy and completeness of these tests.

ATT is not responsible for the sampling stage, so the results only apply to the sample as received.

ATT's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. ATT shall have no liability for any declarations, inferences or generalizations drawn by the client or others from ATT issued reports.

## 2SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

Standard(s) Section		Test Item	Judgment	Remark
FCC	ISED			
15.207	RSS-Gen8.8	AC Power Line Conducted Emissions	PASS	-----
15.247(d) 15.205(a) 15.209(a)	RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	Radiated Emission	PASS	-----
15.247(a)(1)(iii)	RSS-247 5.1 (d)	Number of Hopping Frequency	PASS	-----
15.247(a)(1)(iii)	RSS-247 5.1 (d)	Average Time Of Occupancy	PASS	-----
15.247(a)(1)	RSS-247 5.1 (b)	Hopping Channel Separation	PASS	-----
15.247(a)(1)	RSS-247 5.1 (a) RSS-Gen 6.7	Bandwidth	PASS	-----
15.247(a)(1)	RSS-247 5.1 (b)	Maximum Output Power	PASS	-----
15.247(d)	RSS-247 5.5	Conducted Spurious Emission	PASS	-----
-	RSS-Gen6.11	Frequency Stability	PASS	-----
15.203	-	Antenna Requirement	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

**2.1 MEASUREMENT UNCERTAINTY**

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	±0.048kHz
Uncertainty for conducted RF Power	±0.32dB

**Note:**

This uncertainty represents an expanded uncertainty expressed at approximately the 95%confidence level using a coverage factor of k=2.

**Test Facility:**

The Test site used by DongGuanShuoXin Electronic Technology Co., Ltd. to collect test data is located on the Zone A, 1F, No. 6, XinGang Road YuanGang Street, XinAn District, ChangAn Town, DongGuan City, GuangDong, China

The test facility is recognized, certified, or accredited by the following organizations:

Item	Registration No.	Expiration Date
CNAS	L3098	2024-08-27
A2LA	4893.01	2024-06-30
Innovation, Science and Economic Development Canada (ISED)	11033A CAB identifier:CN0083	2024-06-30
Federal Communications Commission (FCC)	171688 Designation No.:CN1235	2024-06-30

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	REMATCH FACEON Wireless Deluxe Controller for Nintendo Switch	
Brand Name	/	
Test Model	500-202	
HVIN	50020201	
Series Model	N/A	
Model Difference(s)	N/A	
Hardware Version	1.0	
Software Version	1.0	
Power Source	Battery	
Power Rating	DC 5V Charger DC 3.7V Li-ion Battery	
Operation Frequency	2402 MHz ~ 2480 MHz	
Modulation Technology	GFSK, $\pi/4$ -DQPSK, 8-DPSK	
Bit Rate of Transmitter	1Mbps /2Mbps /3Mbps	
Antenna Information	Antenna Type: PCB	Maximum Peak Gain:1.63dBi
Max. Output Power	1Mbps: 0.553dBm (0.00114W) 2Mbps: 2.218dBm (0.00167W) 3Mbps: 2.639dBm (0.00184W)	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Prefest Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>
Mode 2	TX Mode Channel 01_3Mbps

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 2	TX Mode Channel 01_3Mbps

<b>Radiated emissions test - Below 1GHz</b>	
Final Test Mode	Description
Mode 2	TX Mode Channel 01_3Mbps

<b>Radiated emissions test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

<b>Conducted test</b>	
Final Test Mode	Description
Mode 1	TX Mode <b>NOTE (1)</b>

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) The measurements for Hopping Channel Separation, Bandwidth and Maximum Output Power were tested during 1Mbps, 2Mbps and 3Mbps, the worst case are 1Mbps and 3Mbps, only worst case was documented.

### 3.3PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test Software	N/A		
Frequency (MHz)	2402	2441	2480
Parameters(1Mbps)	Default	Default	Default
Parameters(3Mbps)	Default	Default	Default

### 3.4BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED

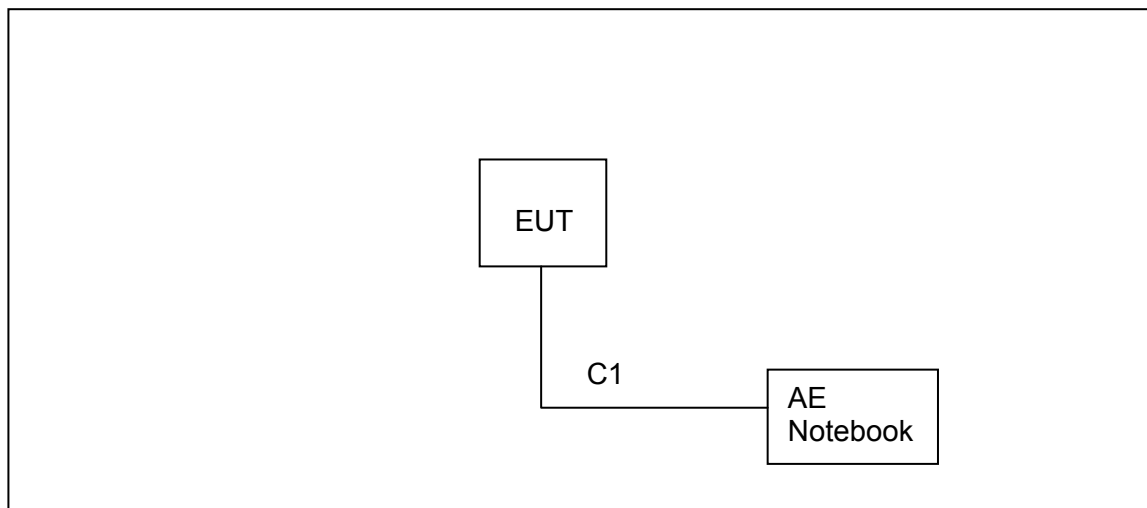

### 3.5SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
AE	Notebook	Lenovo	/	/

Item	Cable Type	Shielded Type	Ferrite Core	Length
C1	DC Cable	NO	NO	0.8m

**3.6 TEST ENVIRONMENT CONDITIONS**

Test Item	Temperature	Humidity	Test Voltage
AC Power Line Conducted Emissions	25°C	53%	DC 5V
Radiated Emissions-9K-30MHz	25°C	60%	DC 5V
Radiated Emissions-30 MHz to 1GHz	24°C	68%	DC 5V
Radiated Emissions-Above 1000 MHz	24°C	68%	DC 5V
Number of Hopping Frequency	24.8°C	40.9%	DC 5V
Average Time Of Occupancy	24.8°C	40.9%	DC 5V
Hopping Channel Separation	24.8°C	40.9%	DC 5V
Bandwidth	24.8°C	40.9%	DC 5V
Maximum Output Power	24.8°C	40.9%	DC 5V
Conducted Spurious Emission	24.8°C	40.9%	DC 5V

### 4AC POWER LINE CONDUCTED EMISSIONS TEST

#### 4.1LIMIT

Frequency of Emission (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.2TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.

#### 4.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/11/2023
2	EMI Test Receiver	R&S	ESCI	101308	12/12/2023
3	LISN	AFJ	LS16	16011103219	05/26/2023
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/11/2023
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

#### 4.4 TEST SETUP

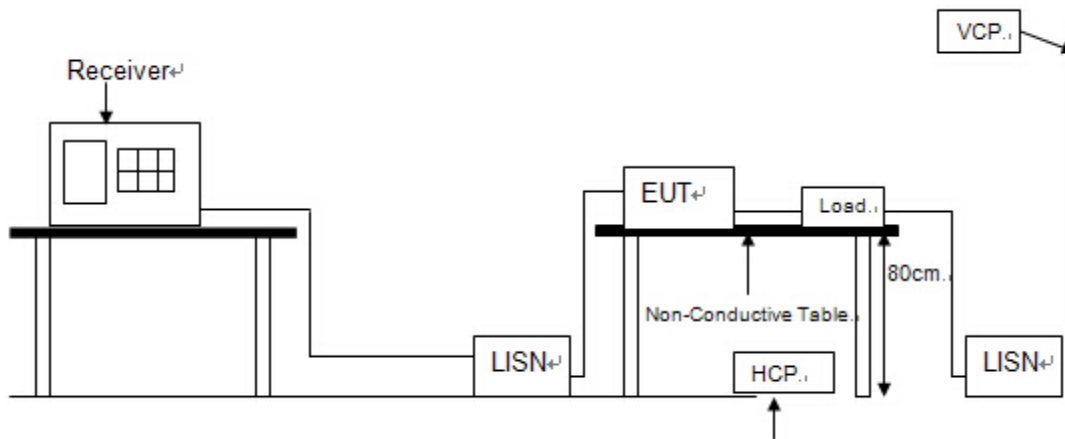


#### 4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

## 4.6 TEST RESULTS

Test Mode: TX Mode Channel 01 \_3Mbps

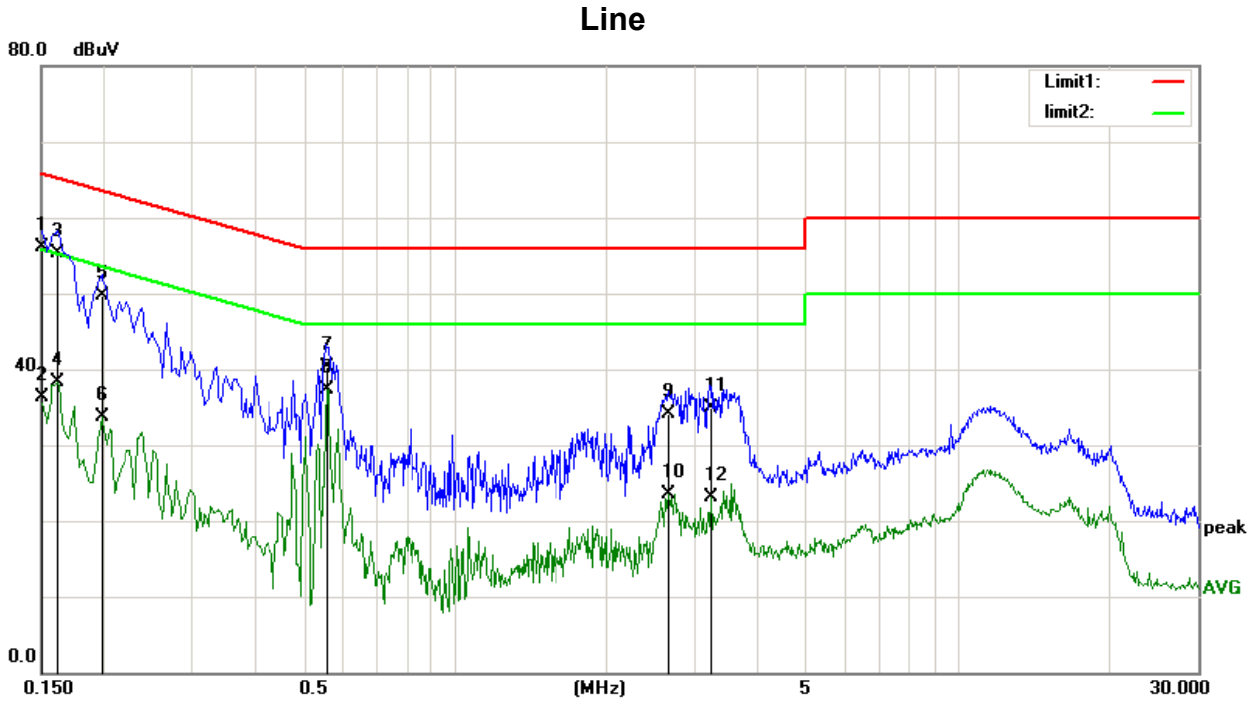


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	44.50	11.53	56.03	65.99	-9.96	QP
2	0.1500	24.68	11.53	36.21	55.99	-19.78	AVG
3	0.1620	43.84	11.45	55.29	65.36	-10.07	QP
4	0.1620	26.88	11.45	38.33	55.36	-17.03	AVG
5	0.1980	38.43	11.21	49.64	63.69	-14.05	QP
6	0.1980	22.44	11.21	33.65	53.69	-20.04	AVG
7	0.5580	30.07	10.25	40.32	56.00	-15.68	QP
8	0.5580	27.15	10.25	37.40	46.00	-8.60	AVG
9	2.6580	23.85	10.20	34.05	56.00	-21.95	QP
10	2.6580	13.38	10.20	23.58	46.00	-22.42	AVG
11	3.2340	24.62	10.20	34.82	56.00	-21.18	QP
12	3.2340	12.83	10.20	23.03	46.00	-22.97	AVG

**Remarks:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode Channel 01 \_3Mbps

## Neutral

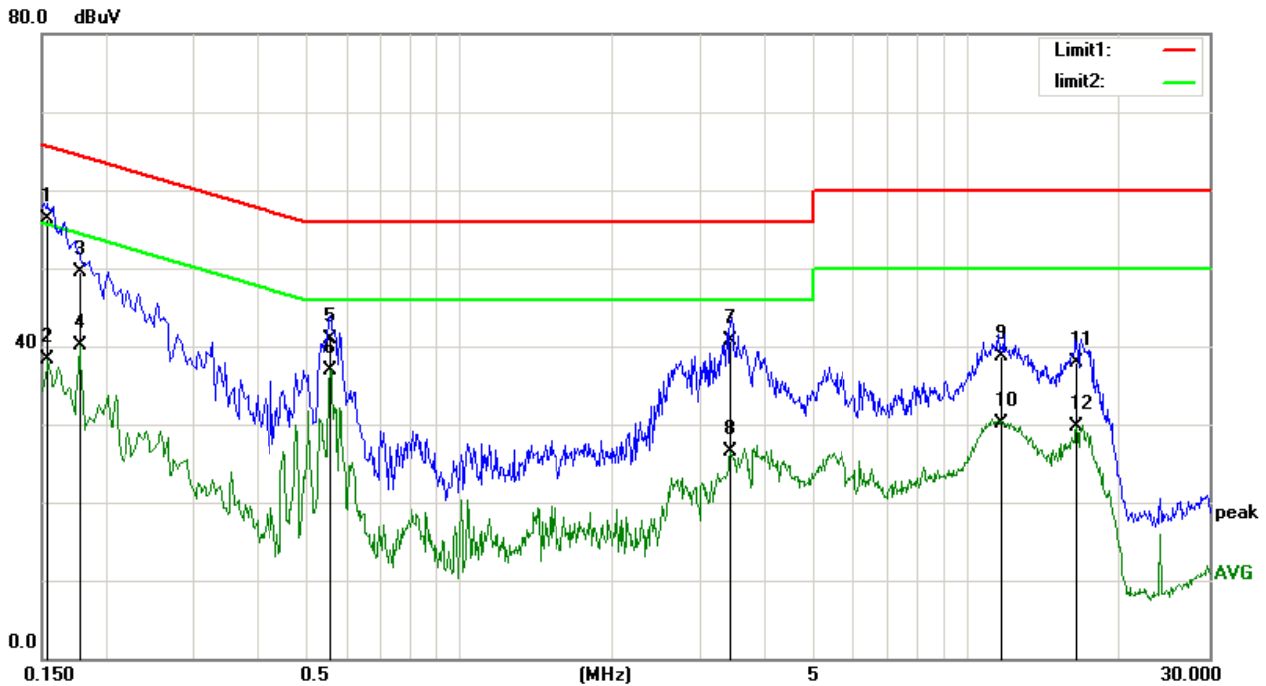

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	44.85	11.50	56.35	65.78	-9.43	QP
2	0.1539	26.73	11.50	38.23	55.78	-17.55	AVG
3	0.1780	38.24	11.35	49.59	64.57	-14.98	QP
4	0.1780	28.78	11.35	40.13	54.57	-14.44	AVG
5	0.5580	30.66	10.25	40.91	56.00	-15.09	QP
6	0.5580	26.73	10.25	36.98	46.00	-9.02	AVG
7	3.4180	30.53	10.21	40.74	56.00	-15.26	QP
8	3.4180	16.22	10.21	26.43	46.00	-19.57	AVG
9	11.7418	28.39	10.26	38.65	60.00	-21.35	QP
10	11.7418	19.90	10.26	30.16	50.00	-19.84	AVG
11	16.4259	27.64	10.31	37.95	60.00	-22.05	QP
12	16.4259	19.32	10.31	29.63	50.00	-20.37	AVG

**Remarks:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



## 5 RADIATED EMISSION TEST

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a) & RSS-Gen 8.10, then the 15.209(a) & RSS-Gen 8.9 limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-30 MHz)

Frequency (MHz)	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (meters)
0.009-0.490	6.37/F(kHz)	300
0.490-1.705	6.37/F(kHz)	30
1.705-30.0	0.08	30

#### LIMITS OF RADIATED EMISSION MEASUREMENT (30 MHz-1000MHz)

Frequency (MHz)	Field Strength (μV/m at 3m)
30-88	100
88-216	150
216-960	200
Above 960	500

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

**Note:**

- (1) The limit for radiated test was performed according to FCC PART 15C and RSS-247.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

**5.2 TEST PROCEDURE AND SETTING**

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. The test result is calculated as the following:
  - (1) Result = Reading + Correct Factor
  - (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain + Attenuator
  - (3) Margin = Result - Limit

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

### 5.3 MEASUREMENT INSTRUMENTS LIST


Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	101307	12/11/2023
2	Spectrum Analyzer	Agilent	E4407B	US40240708	11/10/2023
3	Loop antenna	SCHWARZBECK K	FMZB1519	1519-062	01/15/2024
4	Broadband antenna	SCHWARZBECK	VULB9168	VULB9168-192	07/04/2023
5	HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D 1065	04/09/2024
6	Preamplifier Amplifier	HP	8447F	3113A05680	12/19/2023
7	PRE-AMPLIFIER	EMEC	EM01G26G	980136	04/05/2024
8	RF Cable	R&S	Test Cable 4	4	12/11/2023
9	RF Cable	R&S	Test Cable 5	5	12/11/2023
10	RF Cable	R&S	Test Cable 9	9	04/09/2024
11	RF Cable	R&S	Test Cable 10	10	04/09/2024
12	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A


### 5.4 TEST SETUP

#### 9 kHz-30 MHz

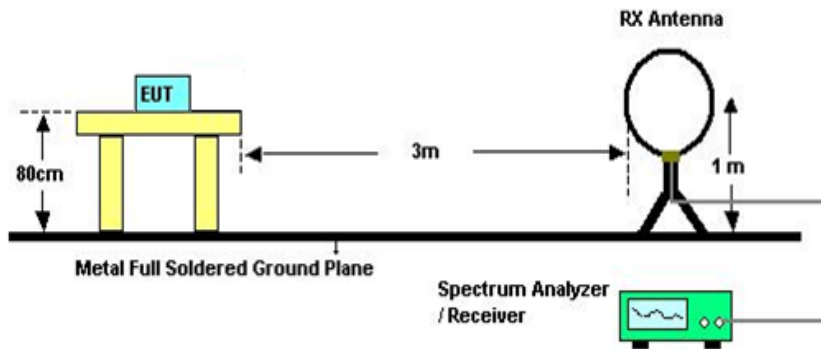

#### 30 MHz to 1 GHz

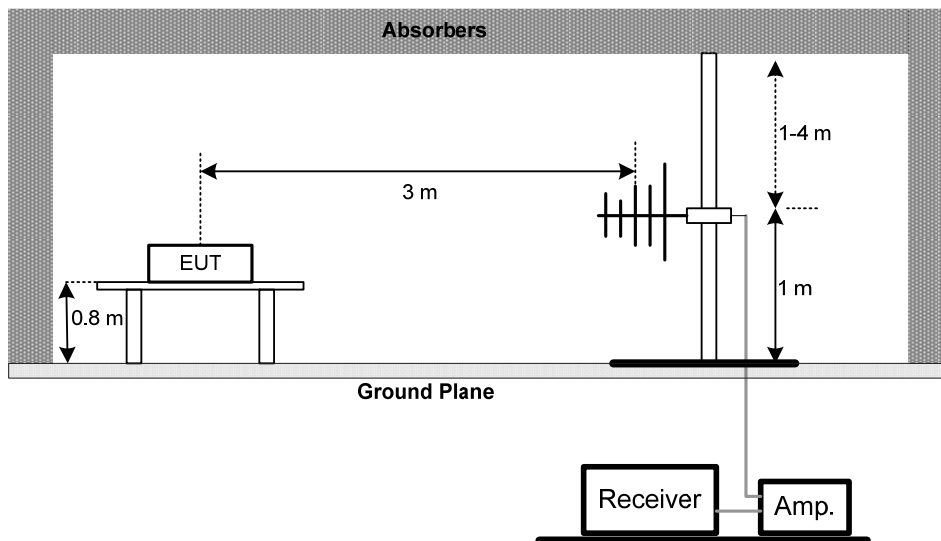

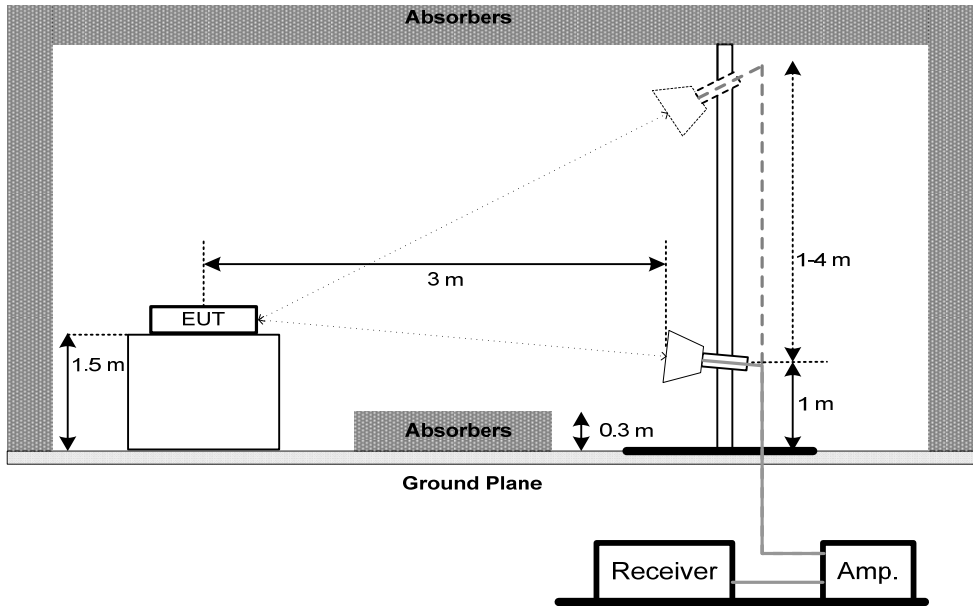**Above 1 GHz****5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS - 9 kHz TO 30MHz**

Test Mode:	TX Mode Channel 01 _3Mbps
------------	---------------------------

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor

## 5.7 TEST RESULTS- 30 MHz TO 1000MHz


Test Mode: TX Mode Channel 01 \_3Mbps

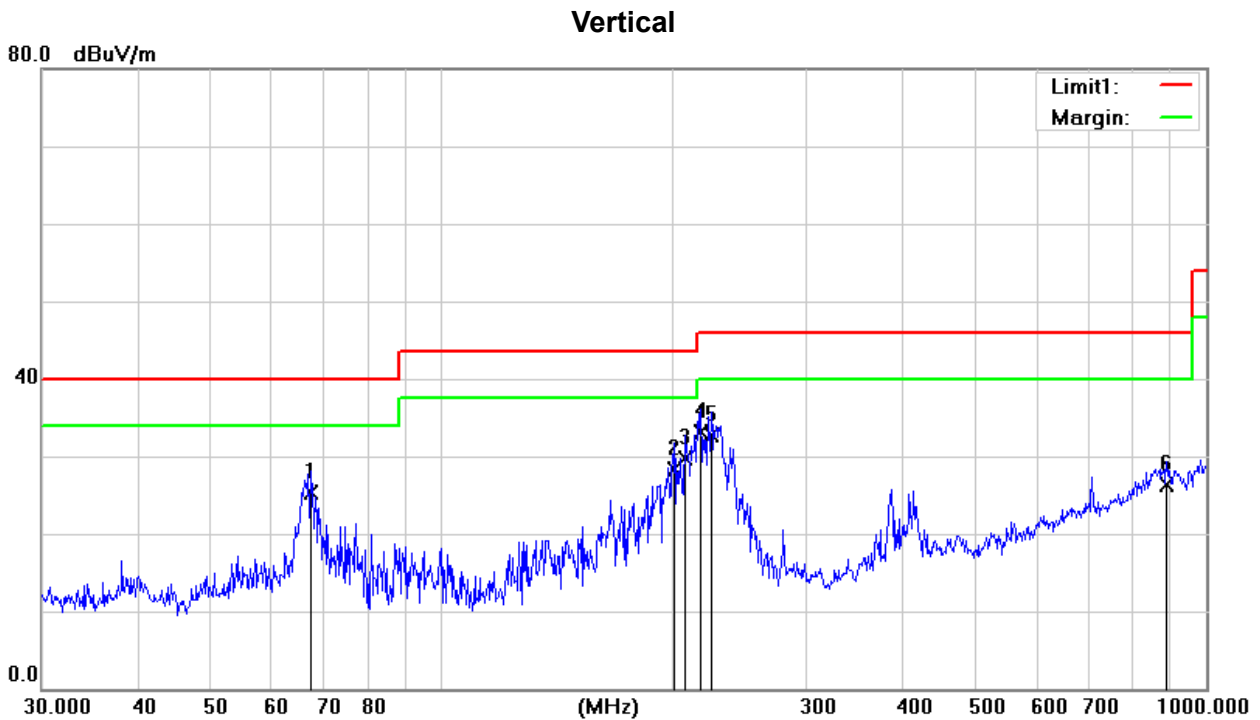

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		67.4382	38.39	-13.03	25.36	40.00	-14.64	300	266	
2		201.3930	41.13	-12.83	28.30	43.50	-15.20	200	198	
3		207.8501	42.01	-12.36	29.65	43.50	-13.85	200	154	
4	*	218.3085	44.94	-11.75	33.19	46.00	-12.81	100	14	
5		225.3080	43.07	-10.33	32.74	46.00	-13.26	100	68	
6		887.6099	24.62	1.60	26.22	46.00	-19.78	100	54	

Test Mode: TX Mode Channel 01 \_3Mbps

### Horizontal

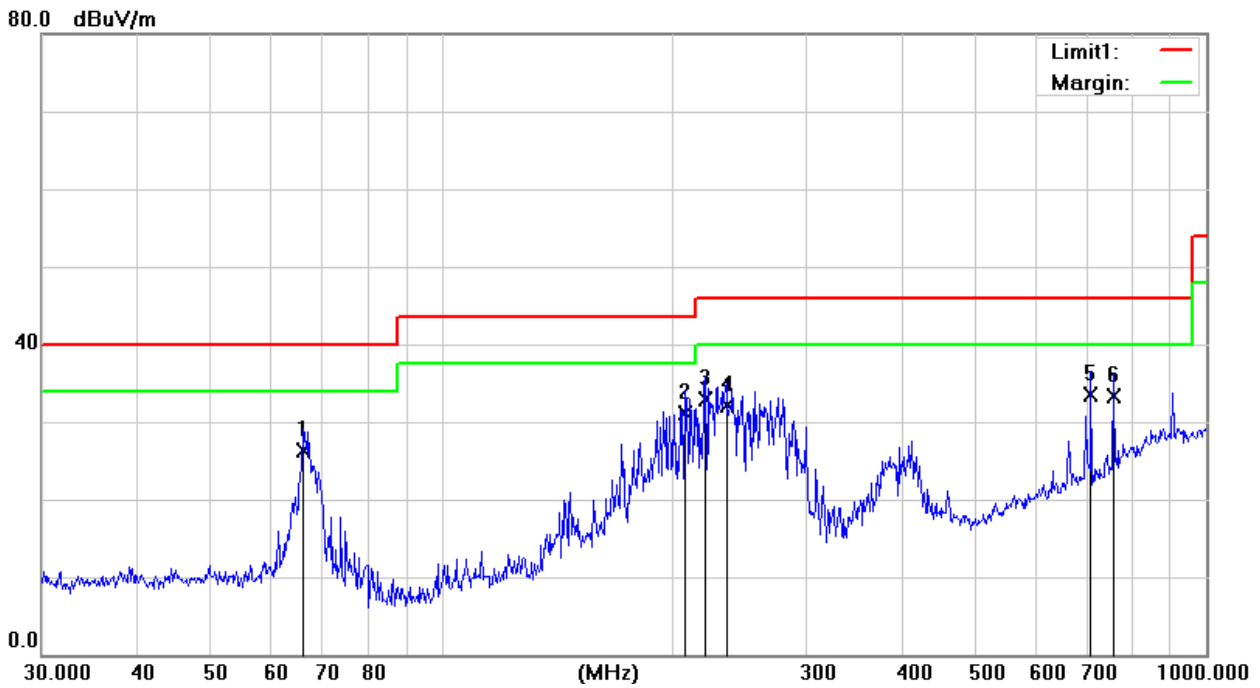


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		66.0342	41.29	-14.94	26.35	40.00	-13.65	QP	200	312
2	*	207.8500	41.98	-10.79	31.19	43.50	-12.31	QP	100	126
3		221.3920	42.42	-9.58	32.84	46.00	-13.16	QP	100	244
4		235.8163	40.60	-8.50	32.10	46.00	-13.90	QP	100	21
5		706.6999	36.04	-2.57	33.47	46.00	-12.53	QP	100	98
6		755.3873	35.08	-1.78	33.30	46.00	-12.70	QP	200	78

\*:Maximum data    x:Over limit    !:over margin

## 5.8 TEST RESULTS - ABOVE 1000MHz(BAND EDGE)

Test Mode: TX 2402 MHz\_CH00\_1Mbps

### Vertical

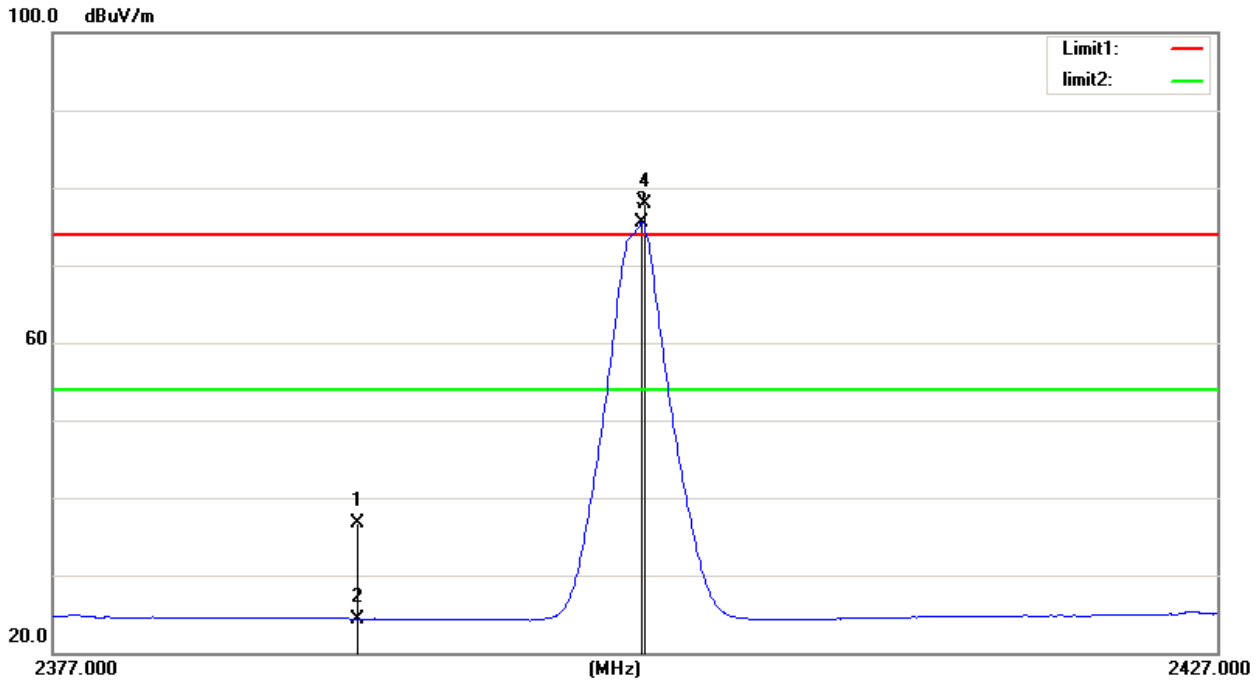

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment	
1		2390.000	48.68	-12.03	36.65	74.00	-37.35	peak	150	360	
2		2390.000	36.38	-12.03	24.35	54.00	-29.65	AVG	150	360	
3	*	2402.200	87.56	-12.00	75.56	54.00	21.56	AVG	150	360	No Limit
4	X	2402.300	89.97	-11.99	77.98	74.00	3.98	peak	150	360	No Limit


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)



Test Mode: TX 2402 MHz\_CH00\_1Mbps

### Horizontal

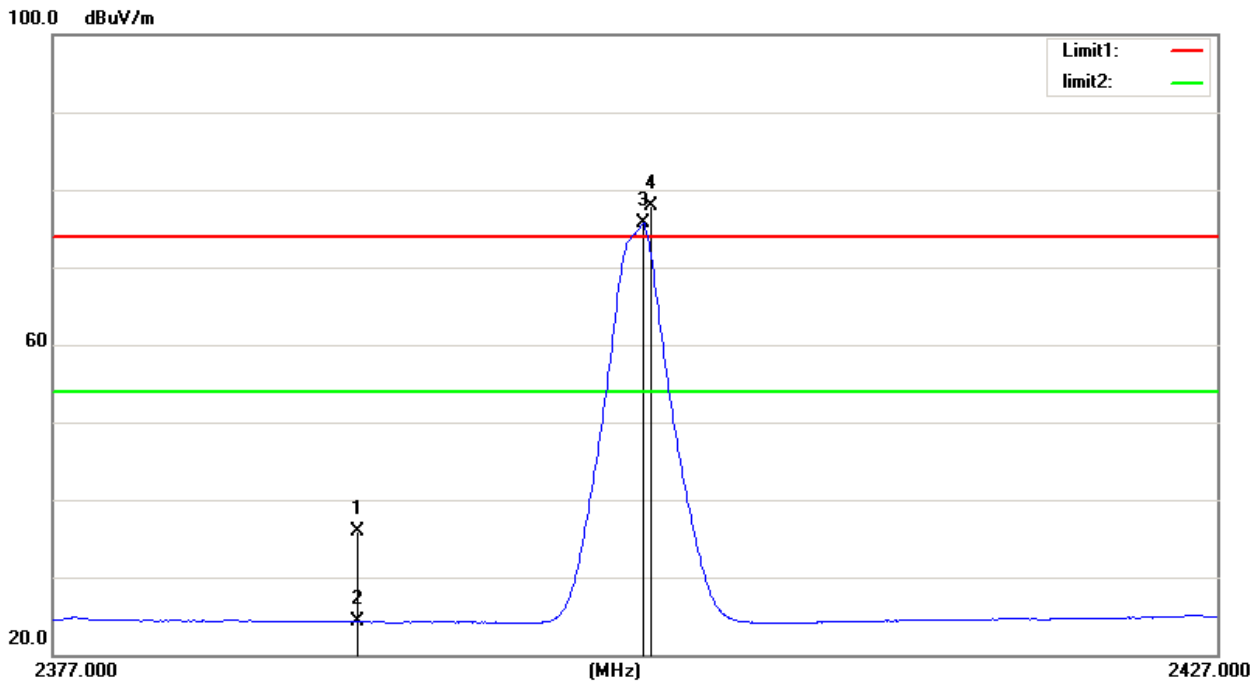


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment	
1		2390.000	47.89	-12.03	35.86	74.00	-38.14	peak	150	20	
2		2390.000	36.30	-12.03	24.27	54.00	-29.73	AVG	150	20	
3	*	2402.250	87.67	-11.99	75.68	54.00	21.68	AVG	150	20	No Limit
4	X	2402.600	89.97	-11.99	77.98	74.00	3.98	peak	150	20	No Limit

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

Test Mode: TX 2480 MHz\_CH78\_1Mbps

### Vertical

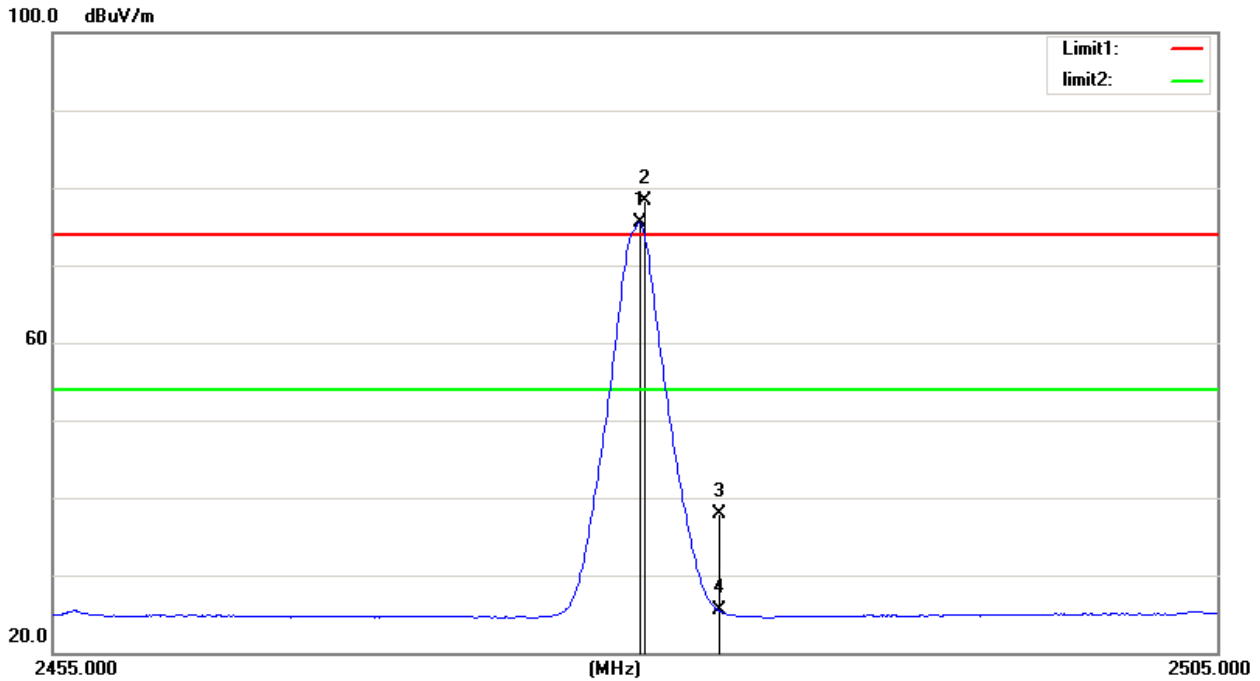


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1	*	2480.100	87.28	-11.71	75.57	54.00	21.57	150	1	No Limit
2	X	2480.300	89.97	-11.71	78.26	74.00	4.26	150	1	No Limit
3		2483.500	49.70	-11.70	38.00	74.00	-36.00	150	1	
4		2483.500	37.12	-11.70	25.42	54.00	-28.58	150	1	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

Test Mode: TX 2480 MHz\_CH78\_1Mbps

### Horizontal

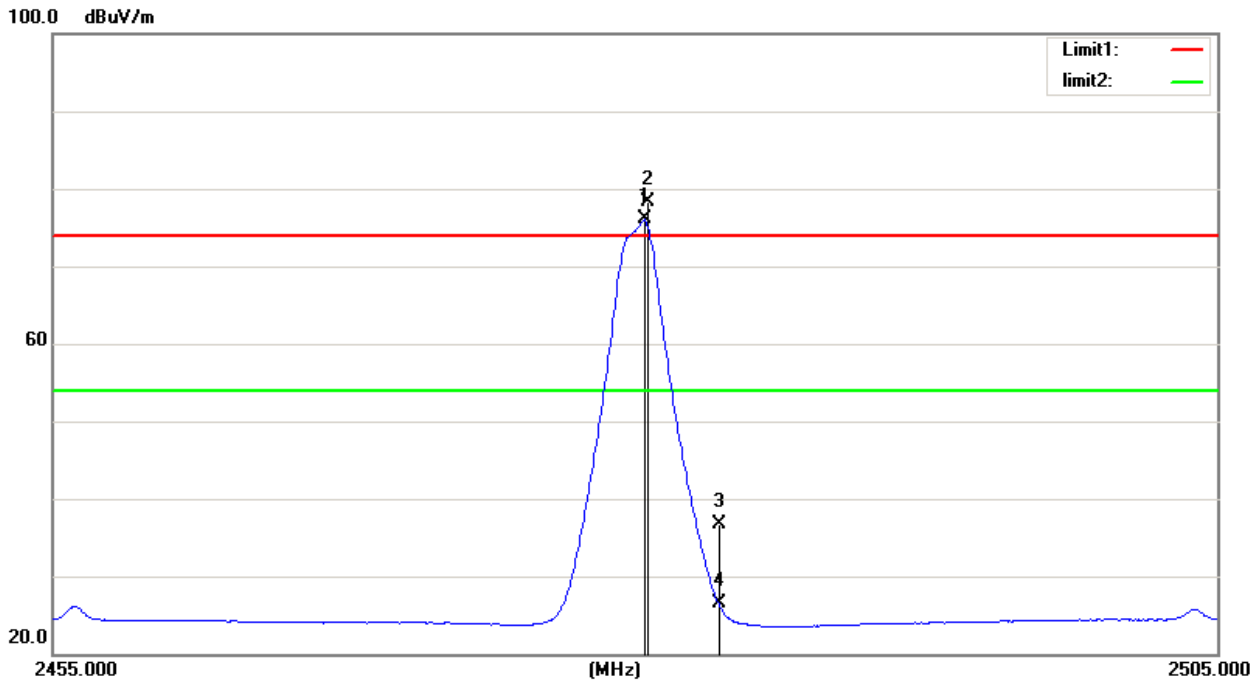


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree		
1	*	2480.300	87.82	-11.71	76.11	54.00	22.11	AVG	150	169	No Limit
2	X	2480.450	89.97	-11.71	78.26	74.00	4.26	peak	150	169	No Limit
3		2483.500	48.39	-11.70	36.69	74.00	-37.31	peak	150	169	
4		2483.500	38.19	-11.70	26.49	54.00	-27.51	AVG	150	169	

\*:Maximum data    x:Over limit    !:over margin

⌂Reference Only

Test Mode: TX 2402 MHz\_CH00\_3Mbps

### Vertical

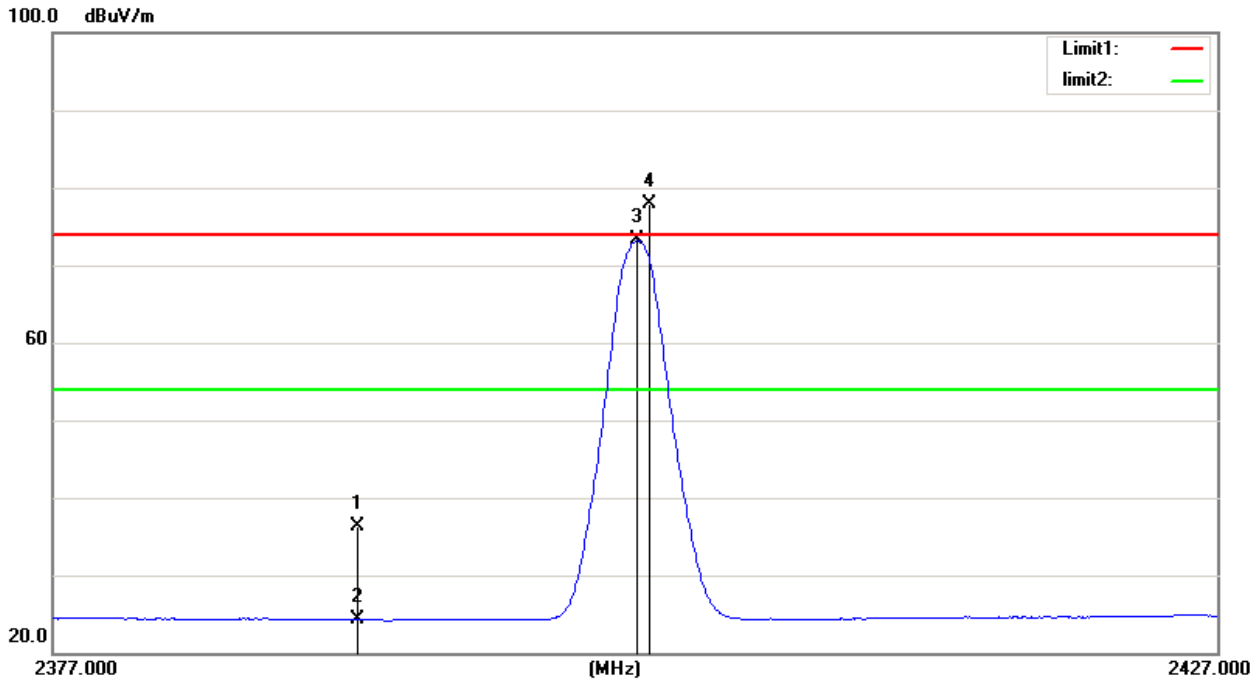


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment	
1		2390.000	48.39	-12.03	36.36	74.00	-37.64	peak	150	54	
2		2390.000	36.34	-12.03	24.31	54.00	-29.69	AVG	150	54	
3	*	2402.000	85.21	-12.00	73.21	54.00	19.21	AVG	150	54	No Limit
4	X	2402.550	89.97	-11.99	77.98	74.00	3.98	peak	150	54	No Limit

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2402 MHz\_CH00\_3Mbps

### Horizontal

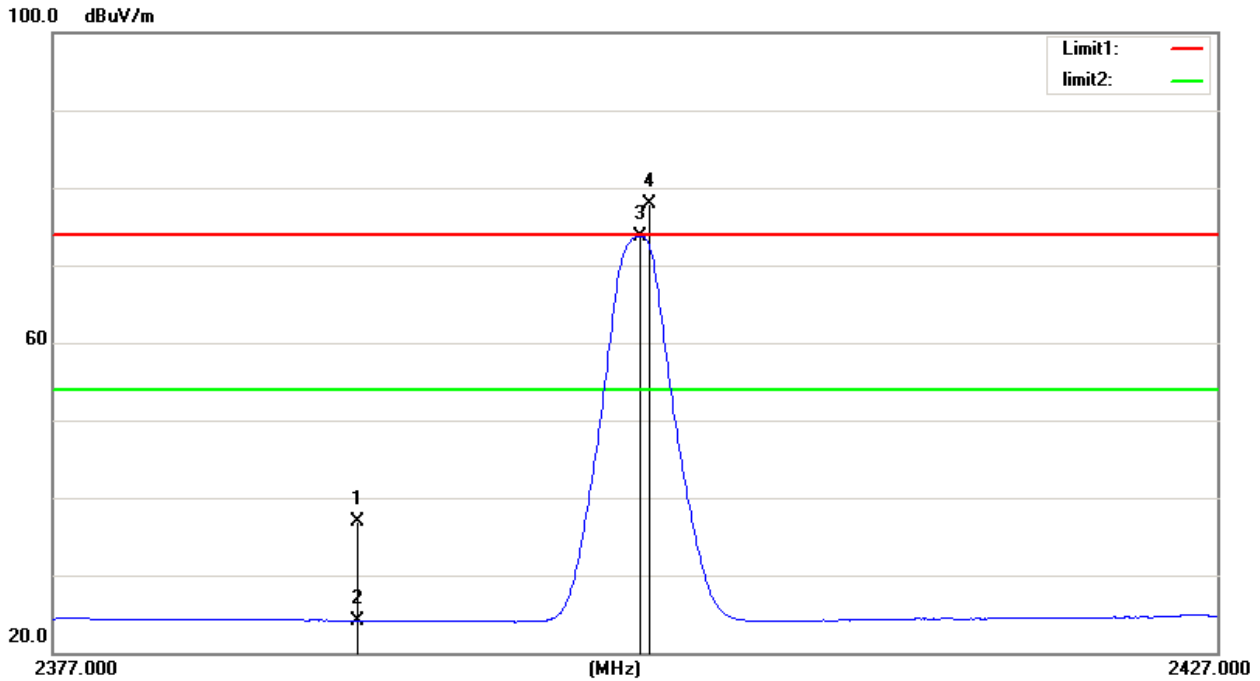


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment	
1		2390.000	48.89	-12.03	36.86	74.00	-37.14	peak	150	117	
2		2390.000	36.19	-12.03	24.16	54.00	-29.84	AVG	150	117	
3	*	2402.100	85.79	-12.00	73.79	54.00	19.79	AVG	150	117	No Limit
4	X	2402.500	89.97	-11.99	77.98	74.00	3.98	peak	150	117	No Limit

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_3Mbps

### Vertical

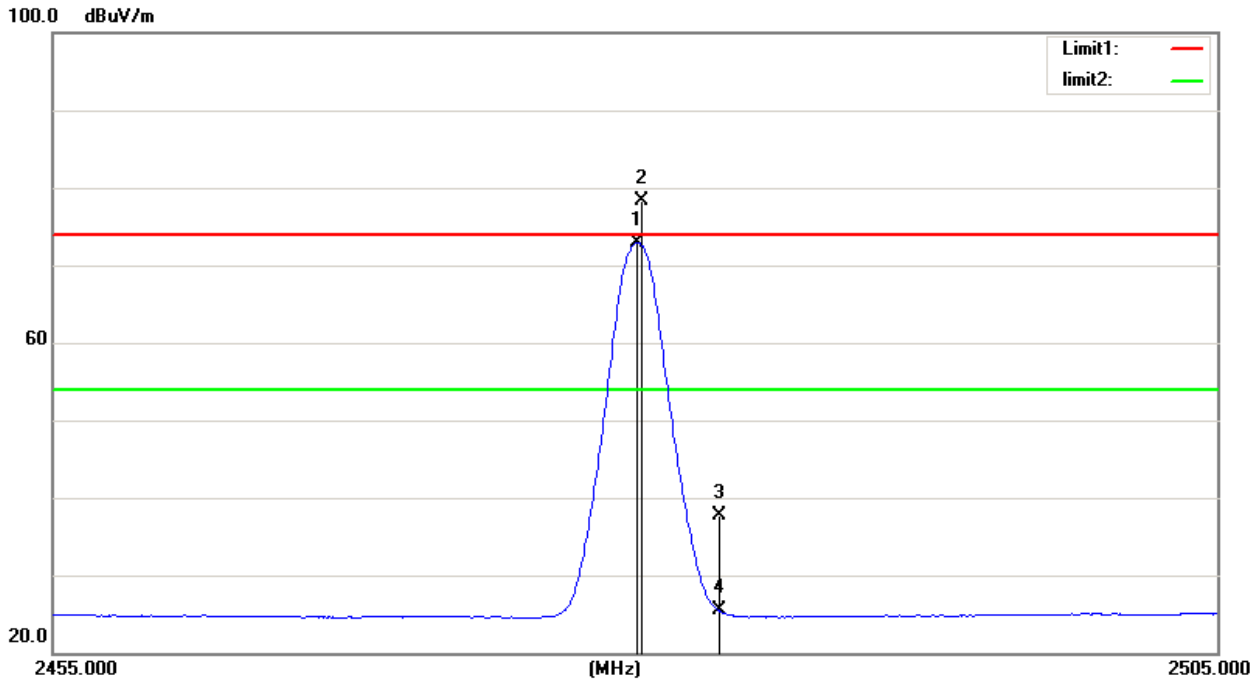


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.000	84.63	-11.71	72.92	54.00	18.92	AVG	150	201	No Limit
2	X	2480.200	89.97	-11.71	78.26	74.00	4.26	peak	150	201	No Limit
3		2483.500	49.34	-11.70	37.64	74.00	-36.36	peak	150	201	
4		2483.500	37.16	-11.70	25.46	54.00	-28.54	AVG	150	201	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_3Mbps

### Horizontal

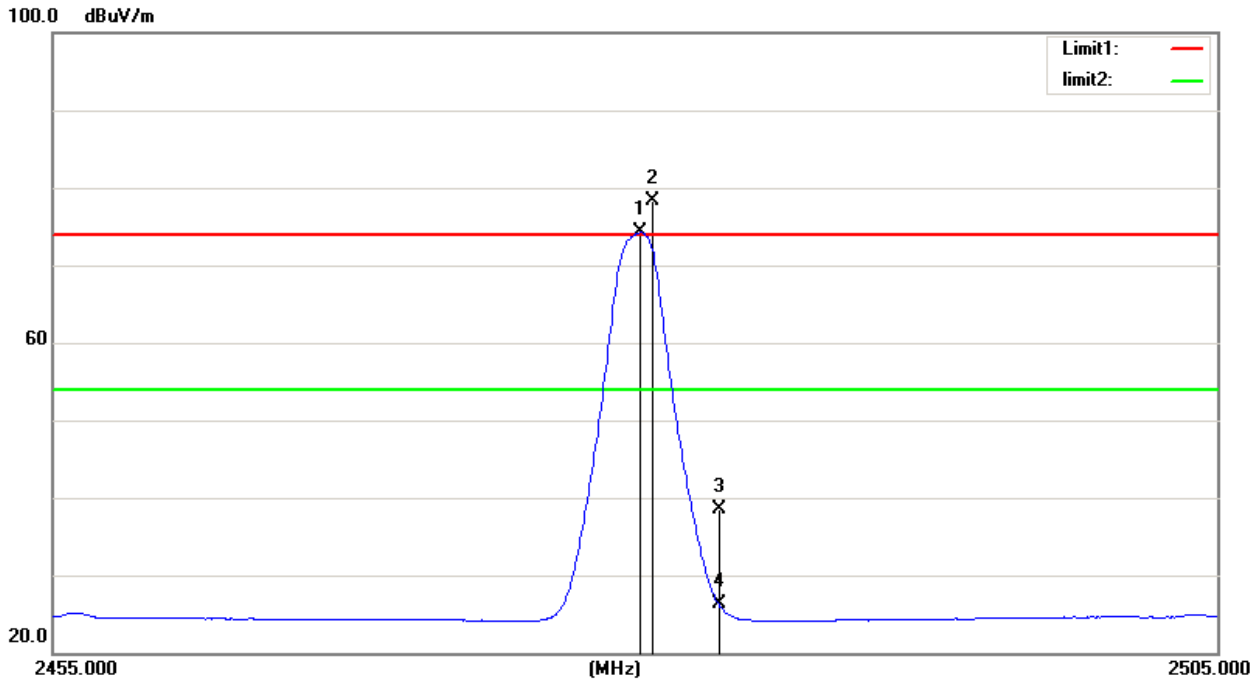

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.150	85.92	-11.71	74.21	54.00	20.21	AVG	150	42	No Limit
2	X	2480.650	89.97	-11.71	78.26	74.00	4.26	peak	150	42	No Limit
3		2483.500	50.18	-11.70	38.48	74.00	-35.52	peak	150	42	
4		2483.500	37.99	-11.70	26.29	54.00	-27.71	AVG	150	42	


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

## 5.9 TEST RESULTS - ABOVE 1000MHz(HARMONIC)

Test Mode: TX 2402 MHz\_CH00\_1Mbps

### Vertical

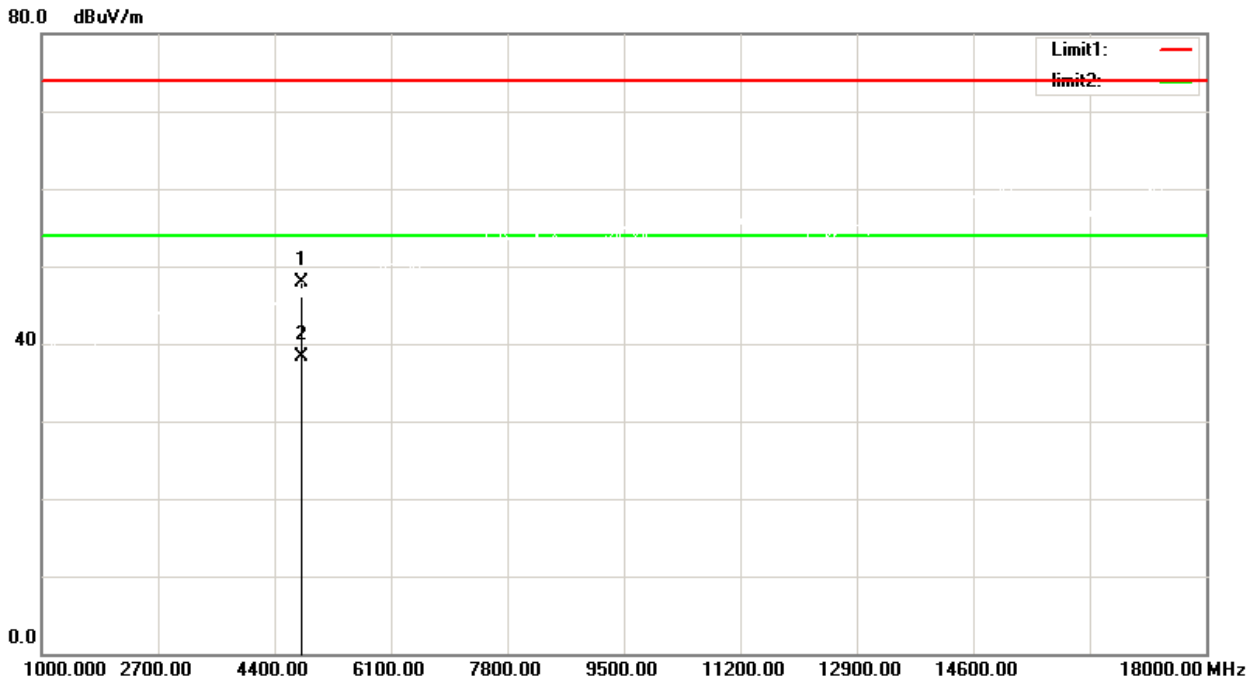

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	55.53	-7.68	47.85	74.00	-26.15	peak	150	64	
2	*	4804.000	46.02	-7.68	38.34	54.00	-15.66	AVG	150	64	


\*:Maximum data    x:Over limit    !:over margin

(Reference Only)



Test Mode: TX 2402 MHz\_CH00\_1Mbps

### Horizontal

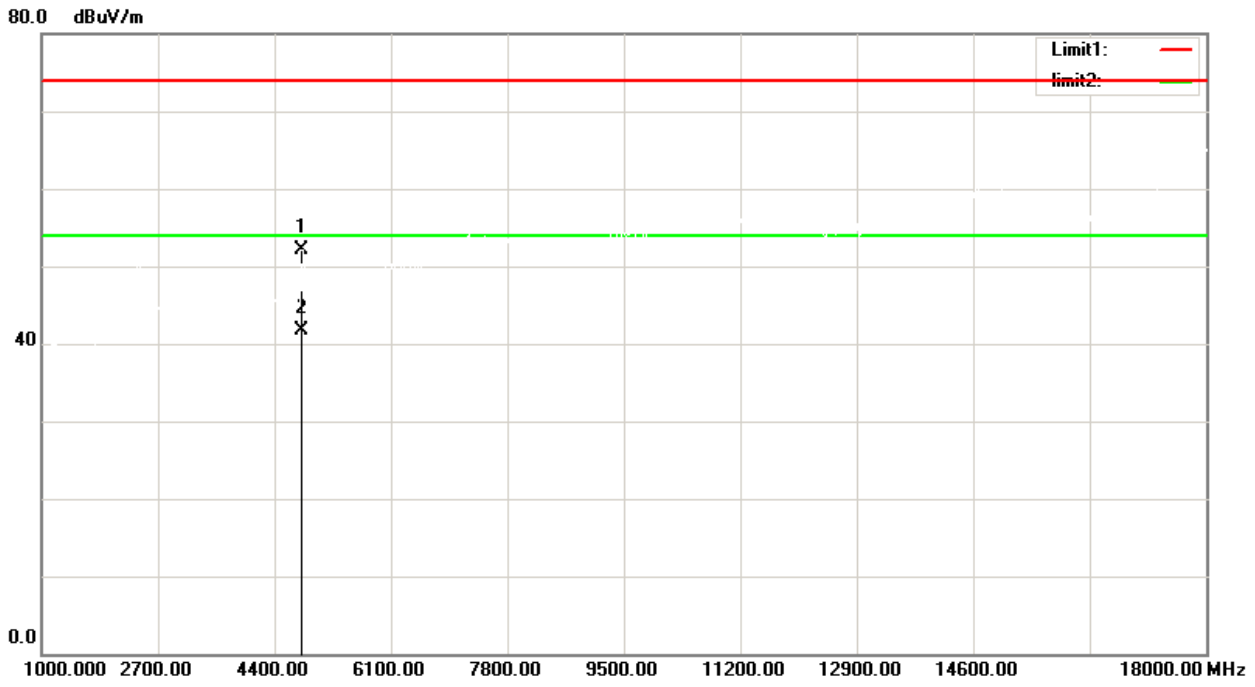


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	59.76	-7.68	52.08	74.00	-21.92	peak	150	164	
2	*	4804.000	49.37	-7.68	41.69	54.00	-12.31	AVG	150	164	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2441 MHz\_CH39\_1Mbps

### Vertical

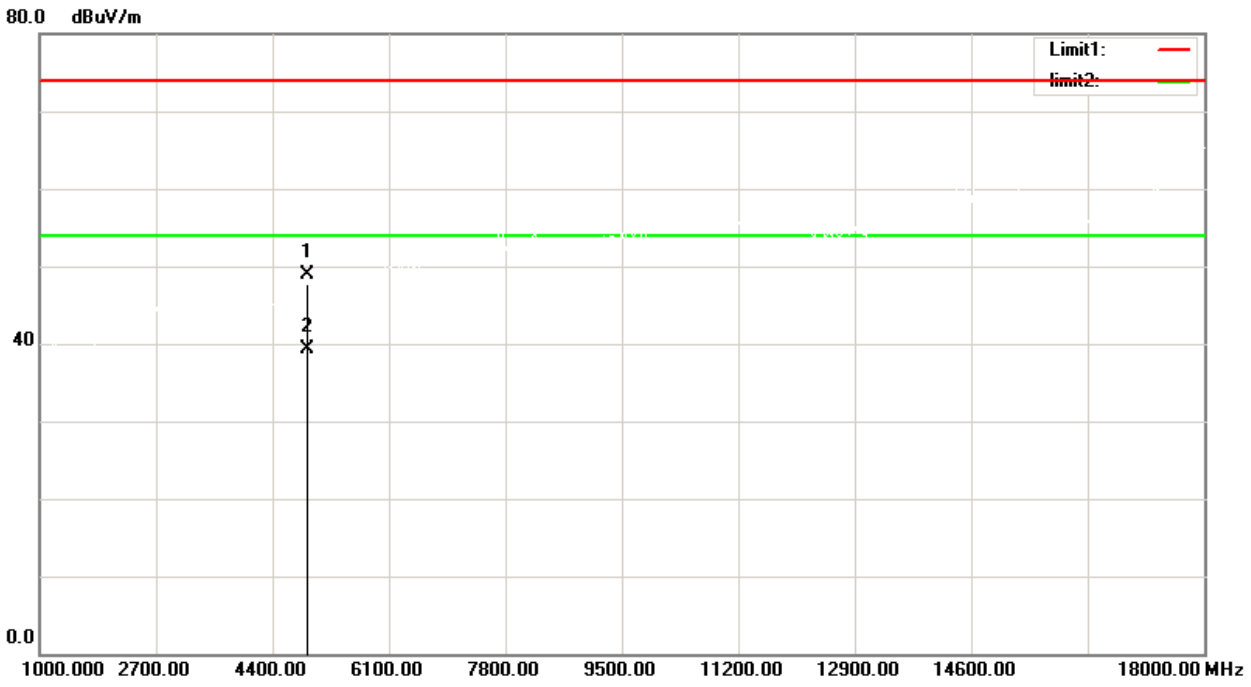


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4910.000	56.41	-7.45	48.96	74.00	-25.04	peak	150	70	
2	*	4910.000	46.81	-7.45	39.36	54.00	-14.64	AVG	150	70	

\*:Maximum data    x:Over limit    !:over margin

◀Reference Only

Test Mode: TX 2441 MHz\_CH39\_1Mbps

### Horizontal

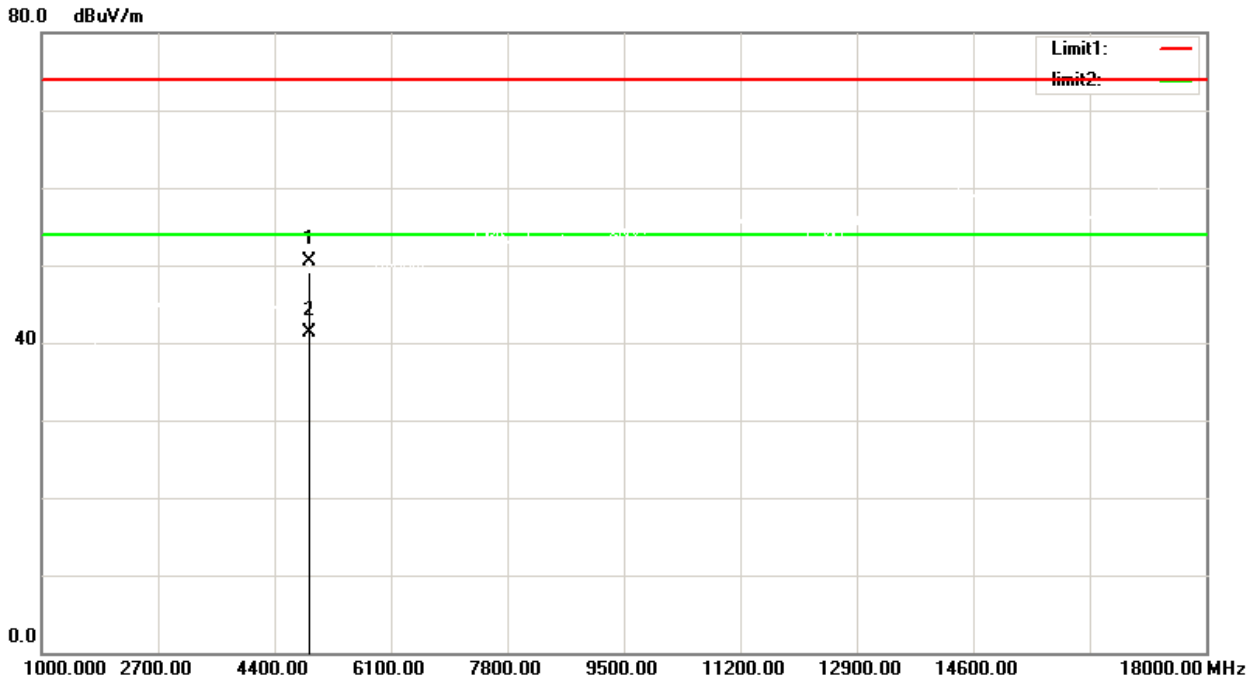


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4910.000	57.92	-7.45	50.47	74.00	-23.53	peak	150	159	
2	*	4910.000	48.81	-7.45	41.36	54.00	-12.64	AVG	150	159	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_1Mbps

### Vertical

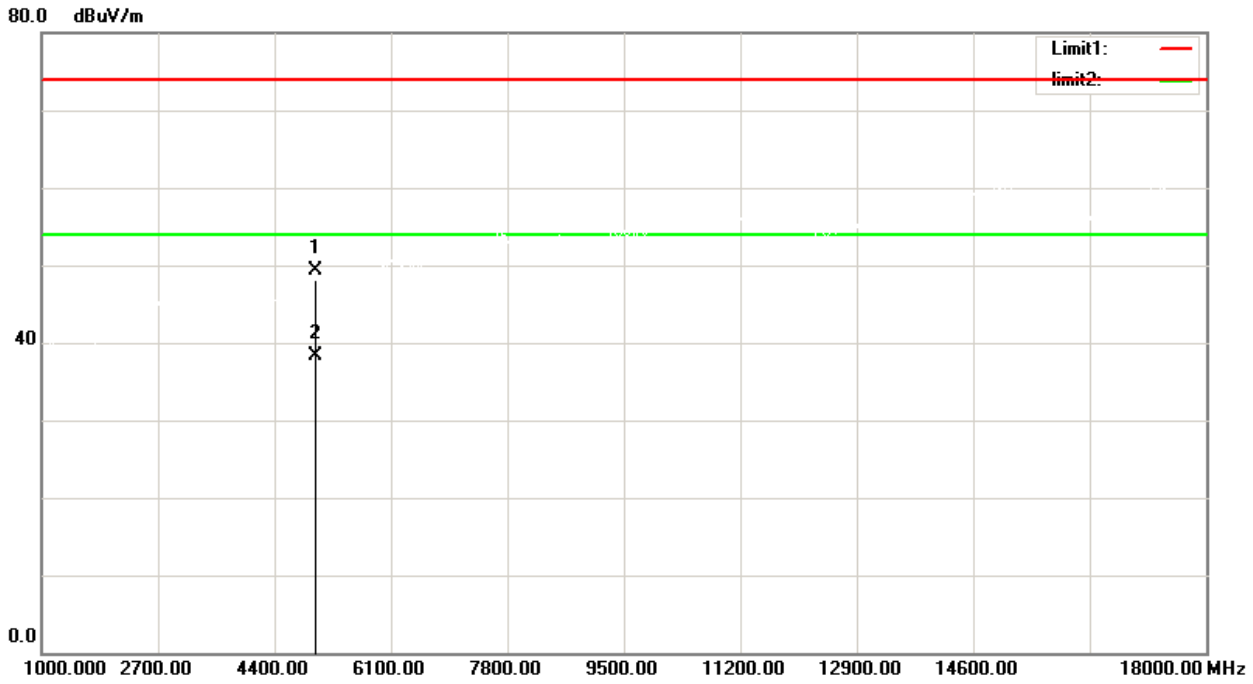


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4995.000	56.48	-7.26	49.22	74.00	-24.78	peak	150	62	
2	*	4995.000	45.62	-7.26	38.36	54.00	-15.64	AVG	150	62	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_1Mbps

### Horizontal

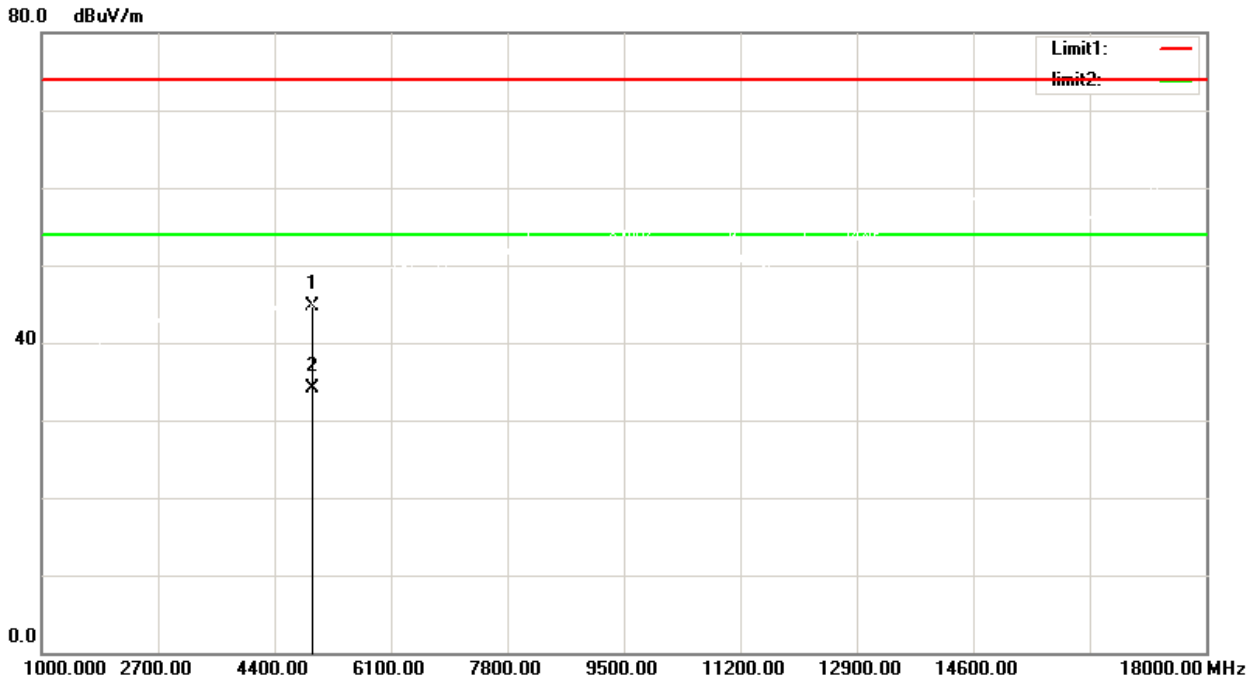


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4960.000	51.99	-7.34	44.65	74.00	-29.35	peak	150	76	
2	*	4960.000	41.49	-7.34	34.15	54.00	-19.85	AVG	150	76	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2402 MHz\_CH00\_3Mbps

### Vertical

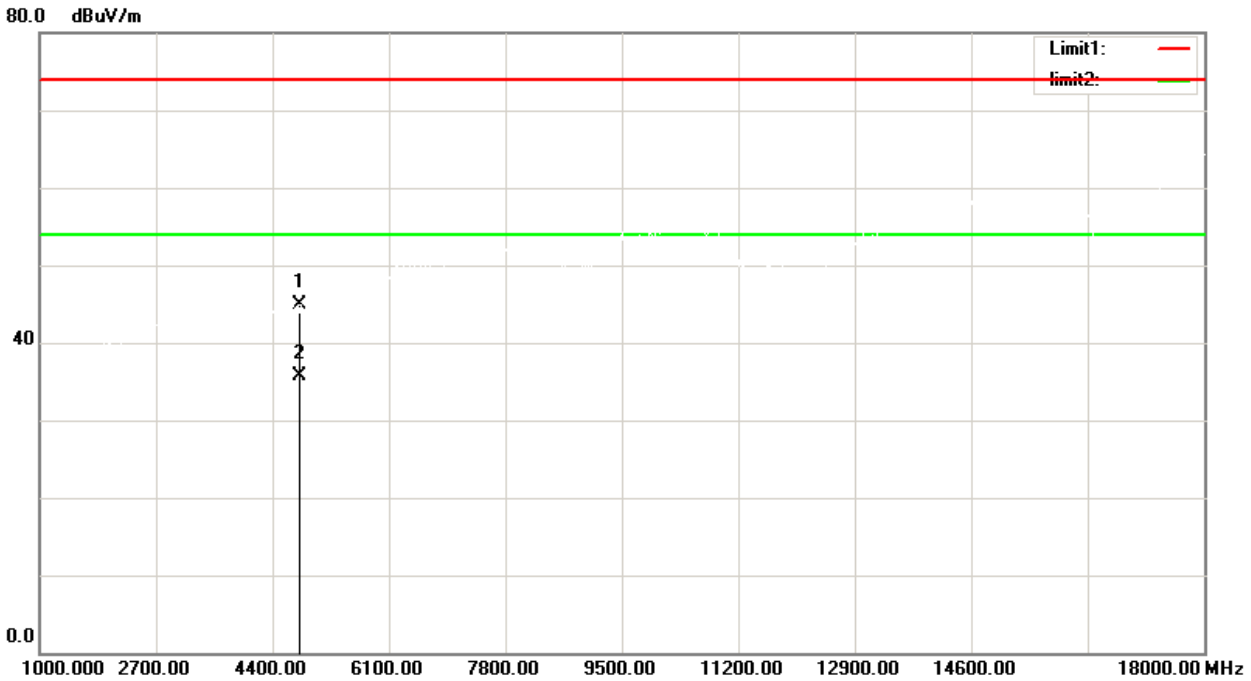


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	52.56	-7.68	44.88	74.00	-29.12	peak	150	84	
2	*	4804.000	43.36	-7.68	35.68	54.00	-18.32	AVG	150	84	

\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

Test Mode: TX 2402 MHz\_CH00\_3Mbps

### Horizontal

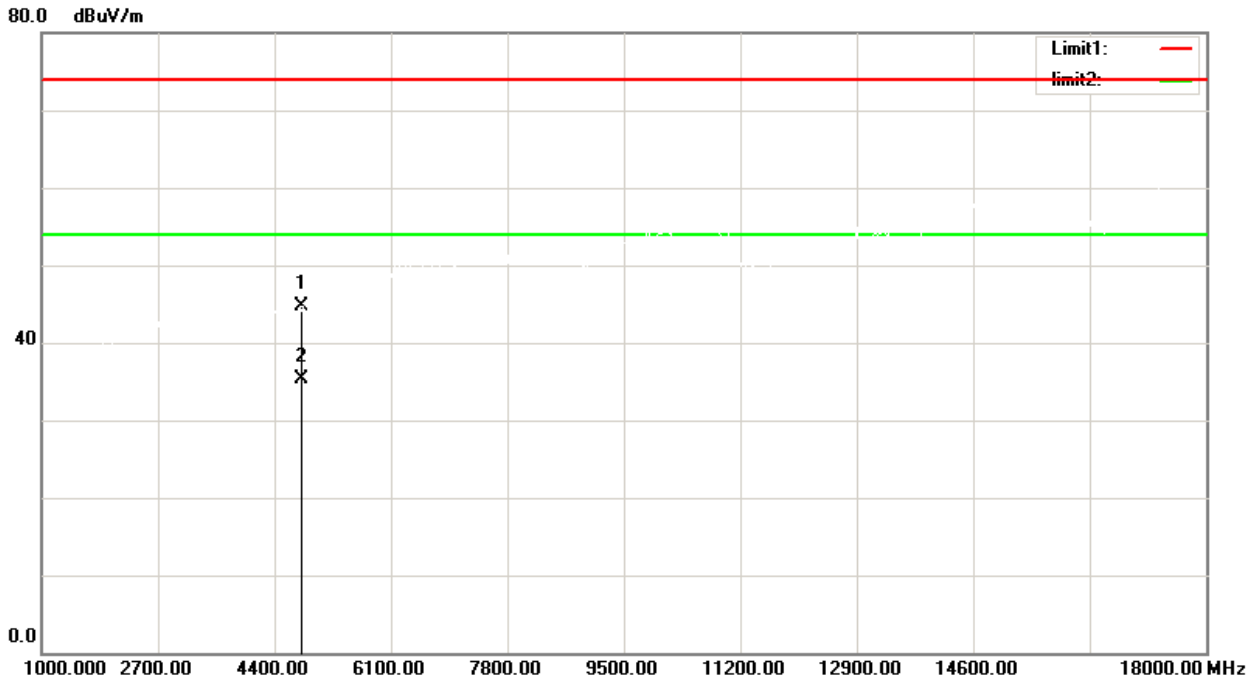


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4804.000	52.40	-7.68	44.72	74.00	-29.28	peak	150	166	
2	*	4804.000	42.94	-7.68	35.26	54.00	-18.74	AVG	150	166	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2441 MHz\_CH39\_3Mbps

### Vertical

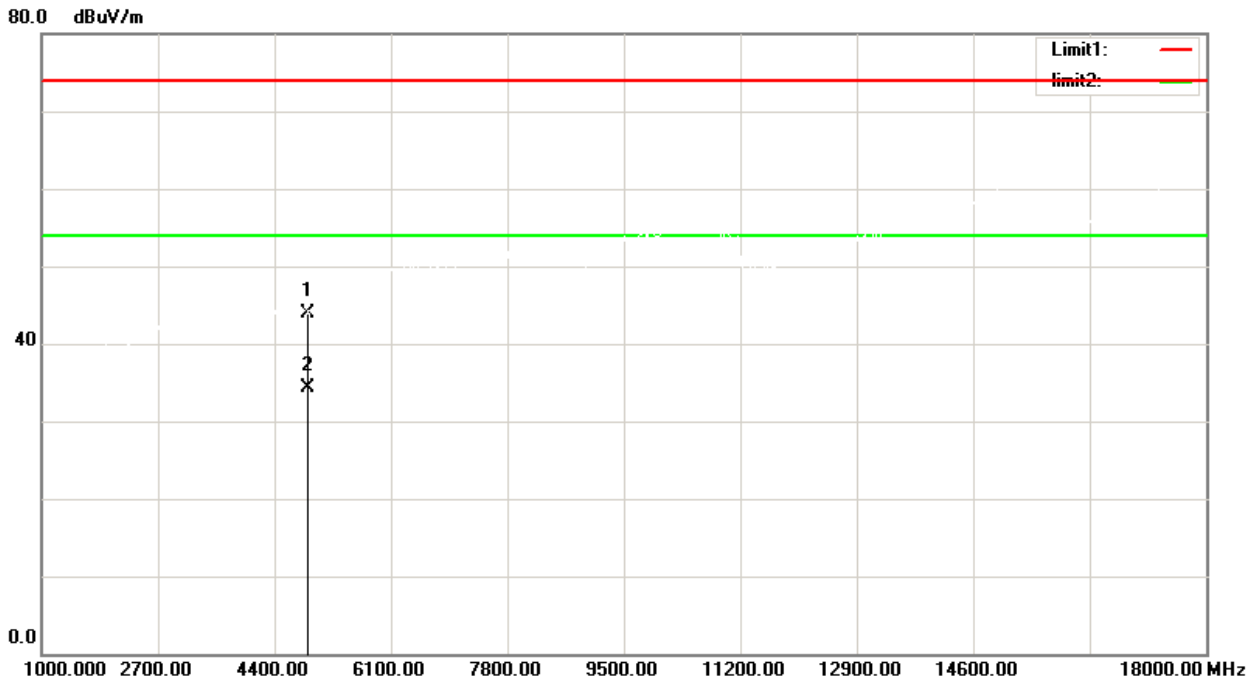

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4882.000	51.43	-7.51	43.92	74.00	-30.08	peak	150	87	
2	*	4882.000	41.87	-7.51	34.36	54.00	-19.64	AVG	150	87	


\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only



Test Mode: TX 2441 MHz\_CH39\_3Mbps

### Horizontal

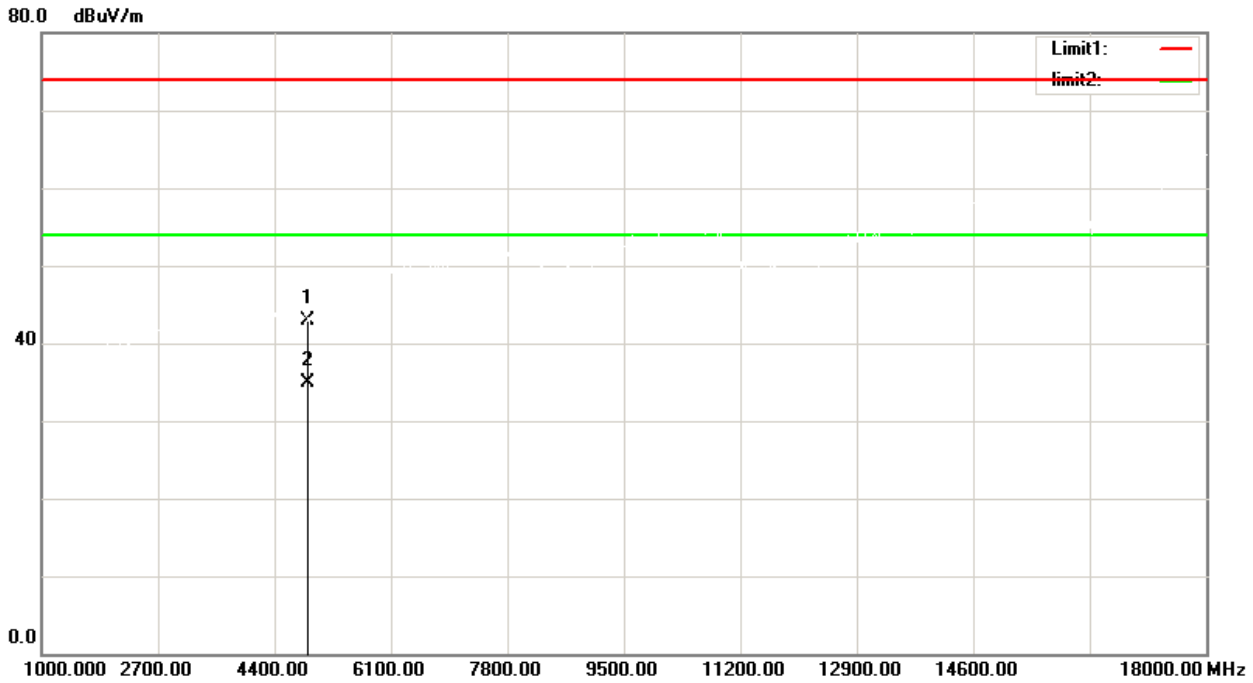


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4882.000	50.51	-7.51	43.00	74.00	-31.00	peak	150	97	
2	*	4882.000	42.36	-7.51	34.85	54.00	-19.15	AVG	150	97	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_3Mbps

### Vertical

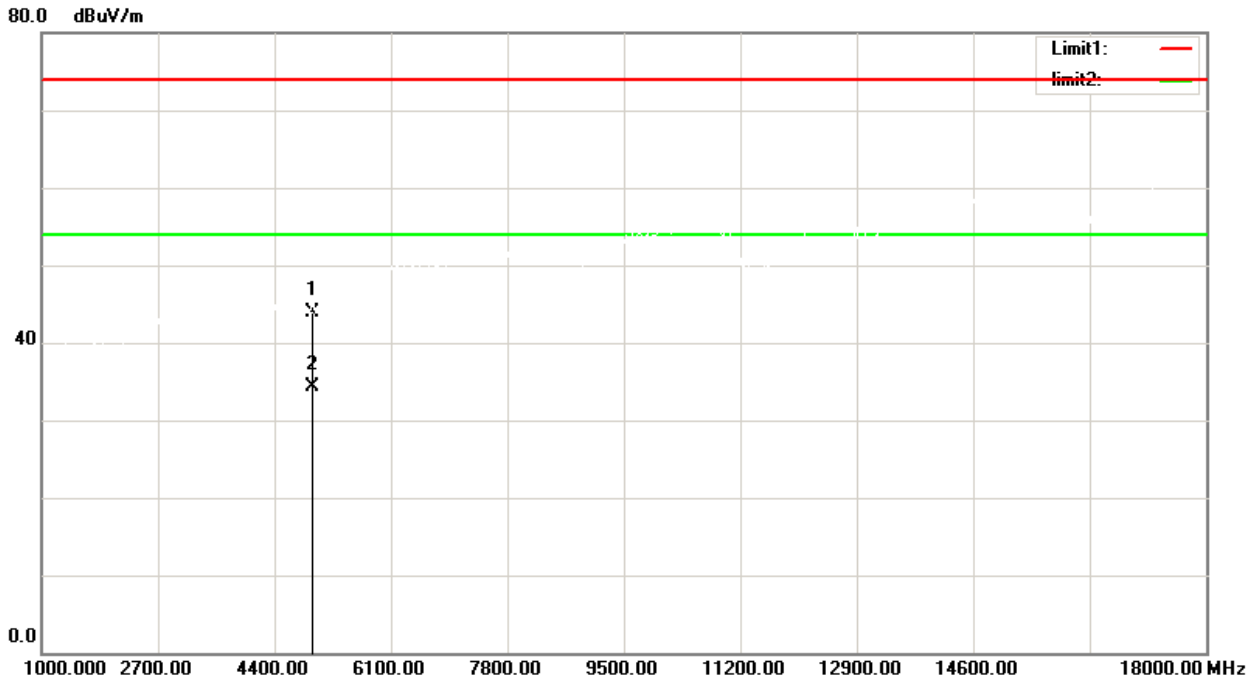


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4960.000	51.28	-7.34	43.94	74.00	-30.06	peak	150	162	
2	*	4960.000	41.60	-7.34	34.26	54.00	-19.74	AVG	150	162	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

Test Mode: TX 2480 MHz\_CH78\_3Mbps

### Horizontal

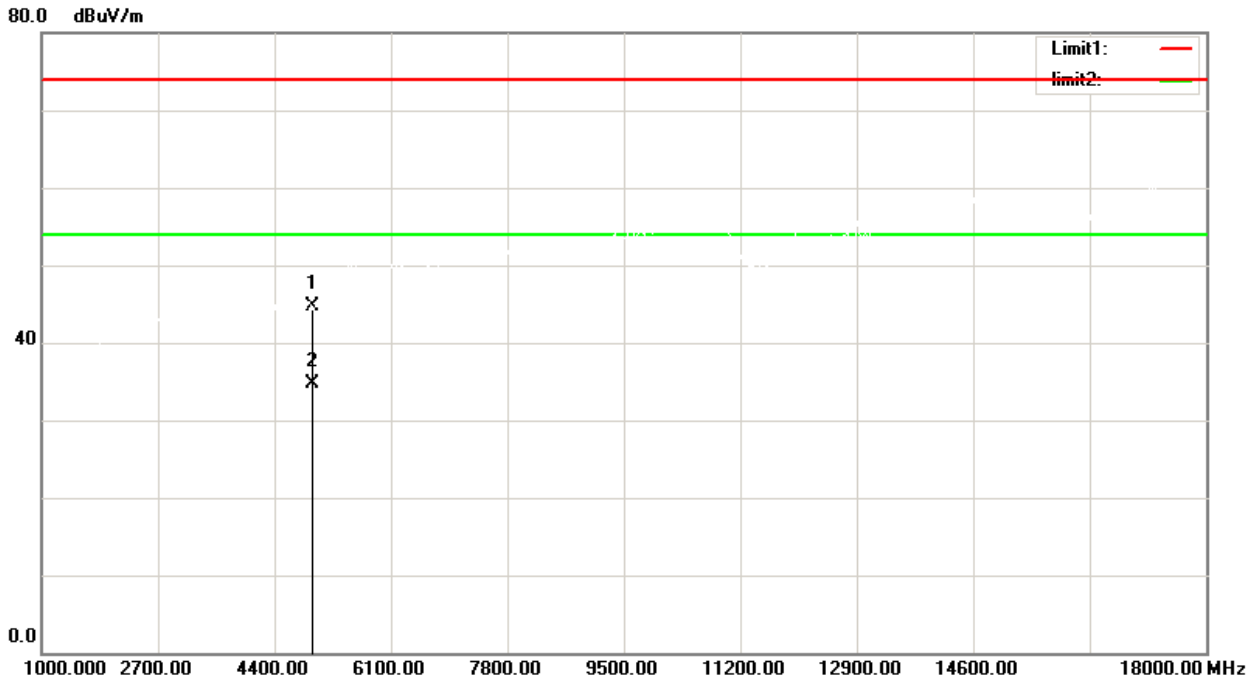

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		4960.000	52.13	-7.34	44.79	74.00	-29.21	peak	150	75	
2	*	4960.000	42.02	-7.34	34.68	54.00	-19.32	AVG	150	75	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

## 6NUMBER OF HOPPING FREQUENCY

### 6.1LIMIT

FCC Part15, Subpart C (15.247)&RSS-247	
Section	Test Item
15.247(a)(1)(iii) RSS-247 5.1 (d)	Number of Hopping Frequency

### 6.2TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Sweep time = Auto.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100kHz
VBW	300kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 6.3MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 6.4TEST SETUP




### 6.5EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.

### 6.6 TEST RESULTS

Hopping Mode_1Mbps		
Number of Hopping Frequency	Measurement result(CH)	Limit(CH)
	79	≥15

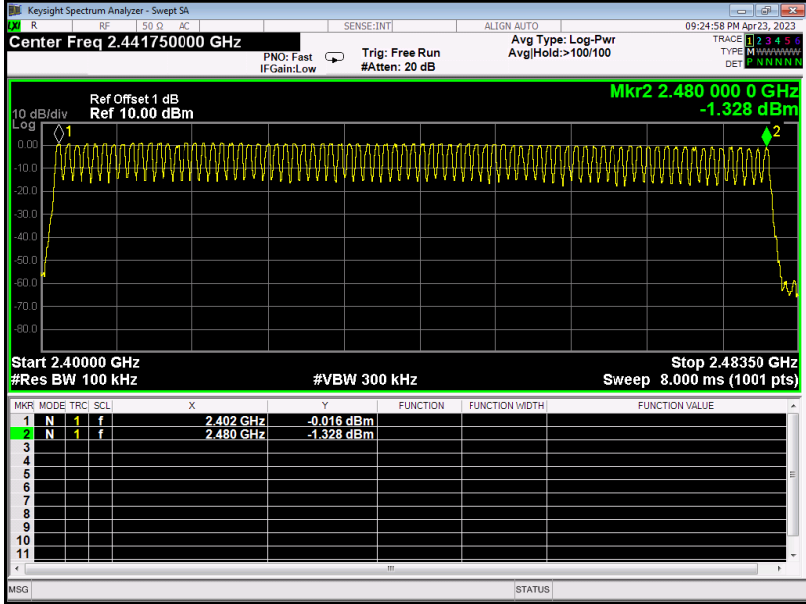

Hopping Mode_3Mbps		
Number of Hopping Frequency	Measurement result(CH)	Limit(CH)
	79	≥15

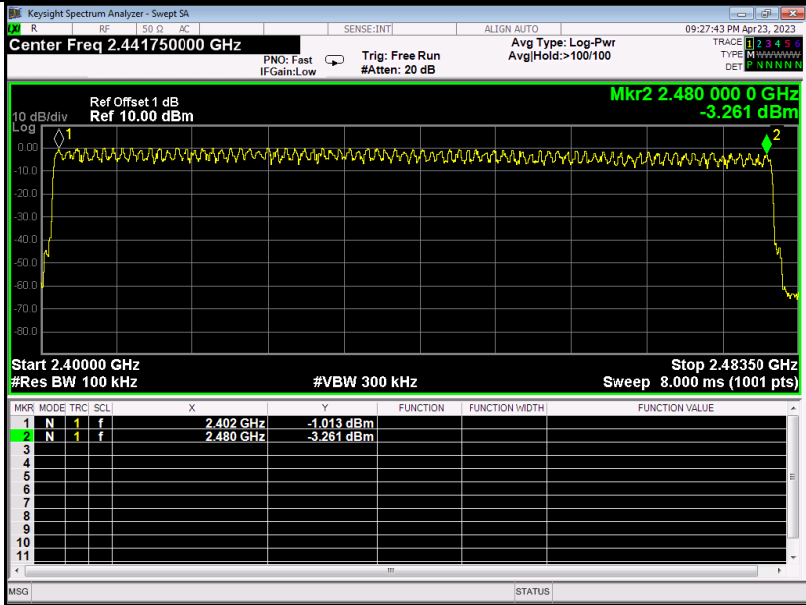

## 7 AVERAGE TIME OF OCCUPANCY

### 7.1 LIMIT

FCC Part15, Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(a)(1)(iii) RSS-247 5.1 (d)	Average Time of Occupancy	0.4sec

### 7.2 TEST PROCEDURE AND SETTING

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses
- d. Sweep Time is more than once pulse time
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span
- f. Measure the maximum time duration of one single pulse
- g. Set the EUT for DH1, DH3 and DH5 packet transmitting
- h. Measure the maximum time duration of one single pulse
- i. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds
- k. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

### 7.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 7.4 TEST SETUP




### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


## 7.6 TEST RESULTS

TX Mode_1Mbps				
Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.422	135.0	400
DH3	2441	1.679	268.6	400
DH5	2441	2.926	312.1	400


DH1

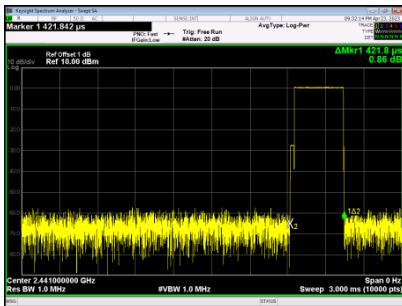

DH3

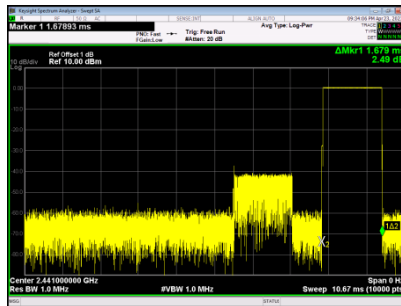


DH5

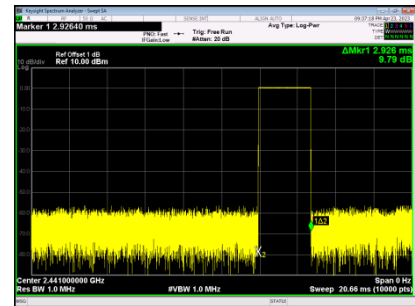


TX Mode_3Mbps				
Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.428	137.0	400
DH3	2441	1.679	268.6	400
DH5	2441	2.935	313.1	400


2441MHzDH1

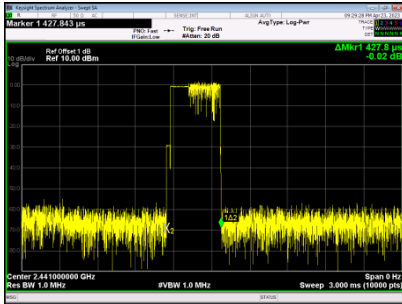

2441MHzDH3

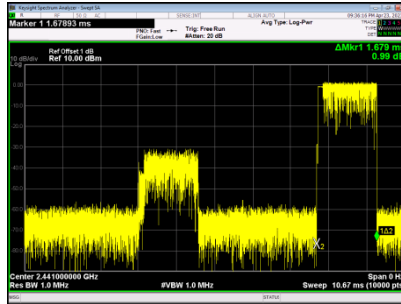

2441MHzDH5

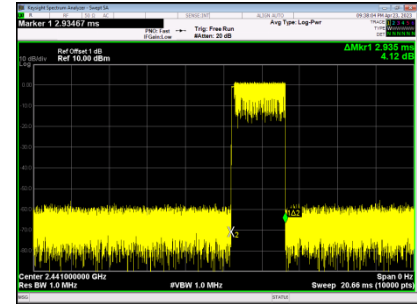



## 8 HOPPING CHANNEL SEPARATION MEASUREMENT

### 8.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 8.2 TEST PROCEDURE AND SETTING


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Span = wide enough to capture the peaks of two adjacent channels  
 Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
 Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
 Sweep = Auto  
 Detector function = Peak  
 Trace = Max Hold

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	10 kHz
VBW	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 8.4 TEST SETUP

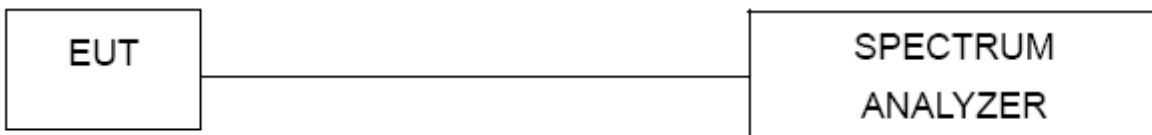


### 8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


### 8.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
CH00	2402	1.011	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH39	2441	0.999	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH78	2480	0.996	>(25KHz or 2/3*20dB Bandwidth)	PASS

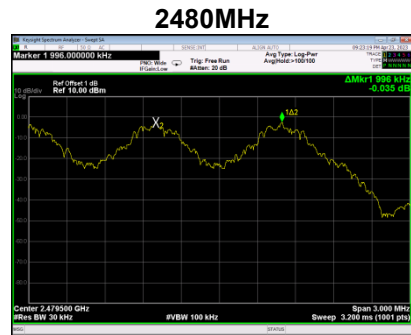


TX Mode_3Mbps				
Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
CH00	2402	1.008	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH39	2441	1.014	>(25KHz or 2/3*20dB Bandwidth)	PASS
CH78	2480	0.984	>(25KHz or 2/3*20dB Bandwidth)	PASS

**2402MHz**

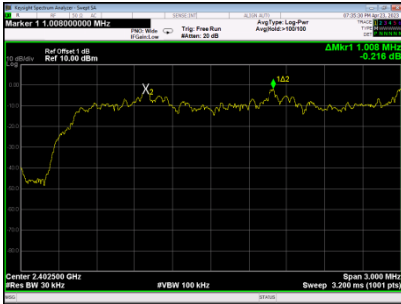

**2441MHz**

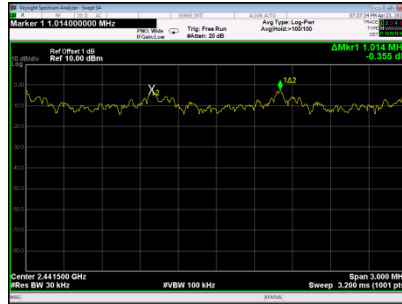

**2480MHz**



**9 BANDWIDTH TEST**

**9.1 LIMIT**

FCC Part15, Subpart C (15.247)&RSS-247	
Section	Test Item
15.247(a)(1) RSS-Gen 6.7 RSS-247 5.1 (a)	Bandwidth

**9.2 TEST PROCEDURE AND SETTING**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 30 kHz, VBW=100 kHz, Sweep Time = Auto.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth
RBW	30kHz
VBW	100kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**9.3 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

**9.4 TEST SETUP**




**9.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


### 9.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	Result
CH00	2402	0.9657	0.9066	PASS
CH39	2441	0.9664	0.9059	PASS
CH78	2480	0.9691	0.9062	PASS


**2402MHz**

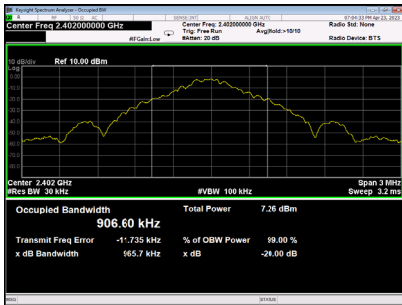

**2441MHz**

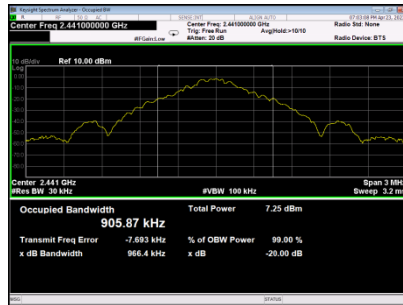


**2480MHz**

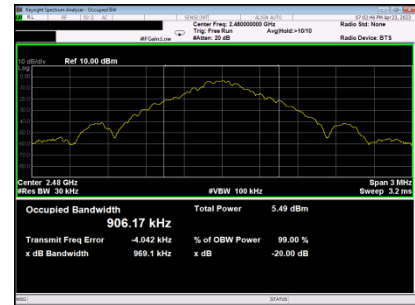


TX Mode_3Mbps				
Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	Result
CH00	2402	1.384	1.2362	PASS
CH39	2441	1.381	1.2363	PASS
CH78	2480	1.386	1.2362	PASS


**2402MHz**

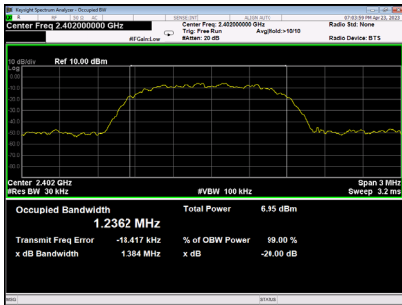

**2441MHz**

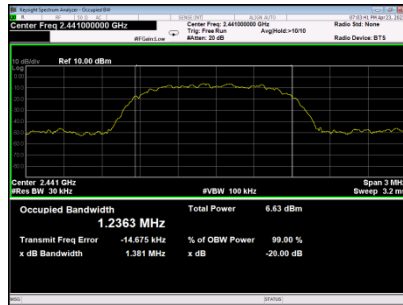

**2480MHz**

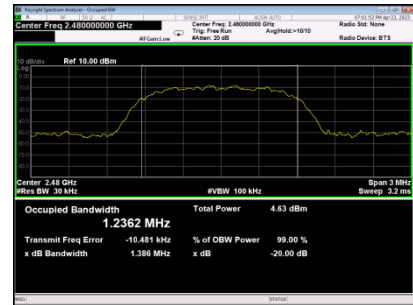

## 10 MAXIMUM OUTPUT POWER

### 10.1 LIMIT

FCC Part15 , Subpart C (15.247)&RSS-247		
Section	Test Item	Limit
15.247(a)(1) RSS-247 5.1 (b)	Maximum Output Power	0.125Watt or 21dBm

**Note:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 10.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

### 10.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 10.4 TEST SETUP




### 10.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.




## 10.6 TEST RESULTS

TX Mode_1Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	0.553	0.001136	PASS
CH39	2441	0.442	0.001107	PASS
CH78	2480	-1.318	0.000738	PASS
Limit	21dBm /0.125W			

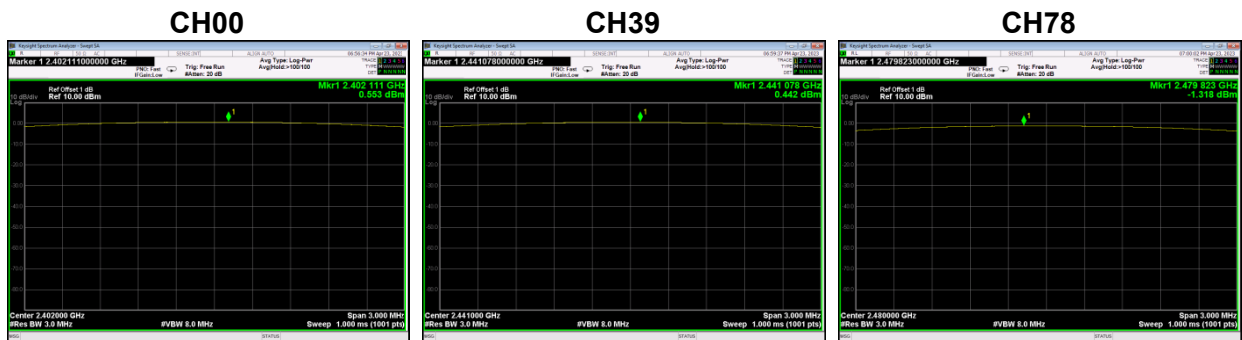




TX Mode_2Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	2.218	0.00167	PASS
CH39	2441	1.979	0.00158	PASS
CH78	2480	-0.171	0.00096	PASS
Limit	21dBm /0.125W			

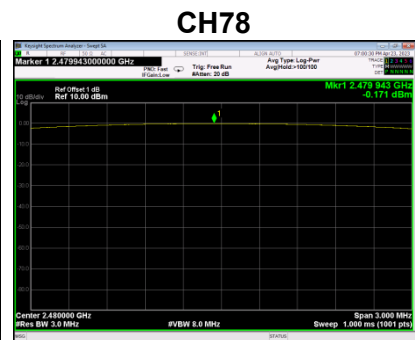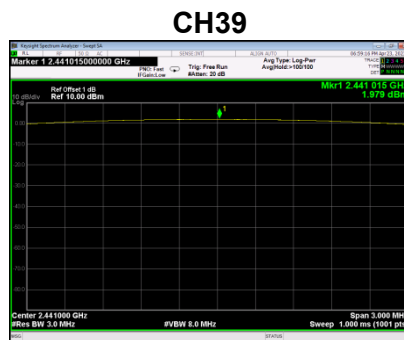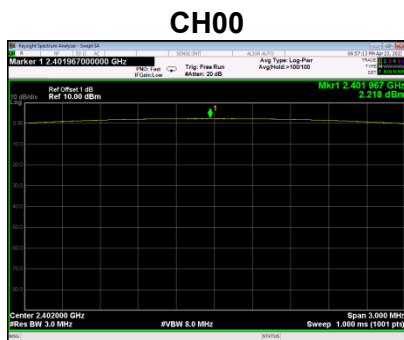

TX Mode_3Mbps				
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Result
CH00	2402	2.639	0.001836	PASS
CH39	2441	2.288	0.001694	PASS
CH78	2480	0.247	0.001059	PASS
Limit	21dBm /0.125W			


**CH00**

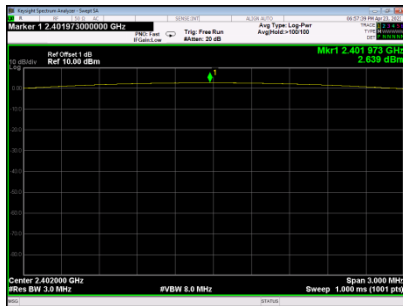

**CH39**



**CH78**

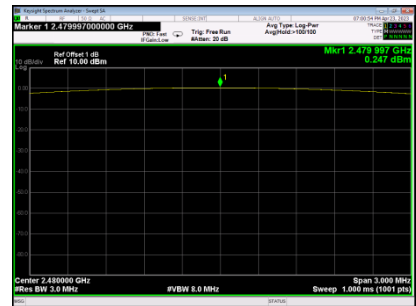

## 11 CONDUCTED SPURIOUS EMISSION

### 11.1 LIMIT

For FCC

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

For ISCED

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 11.2 TEST PROCEDURE AND SETTING

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

### 11.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A

### 11.4 TEST SETUP




### 11.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.5 unless otherwise a special operating condition is specified in the follows during the testing.


### 11.6 TEST RESULTS

#### TX Mode\_1Mbps


**Bandedge- CH00 (Lower)**

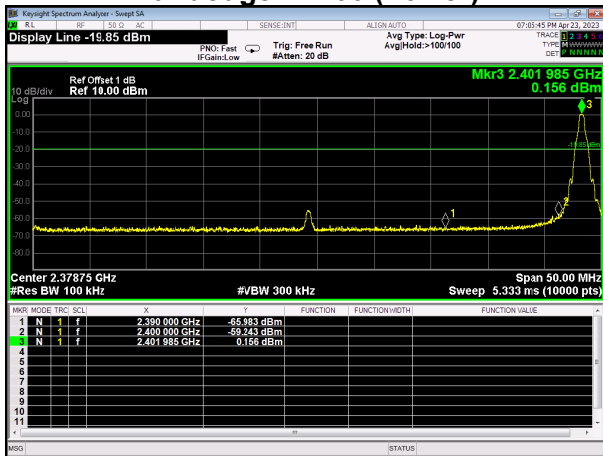


**Bandedge CH78 (Upper)**

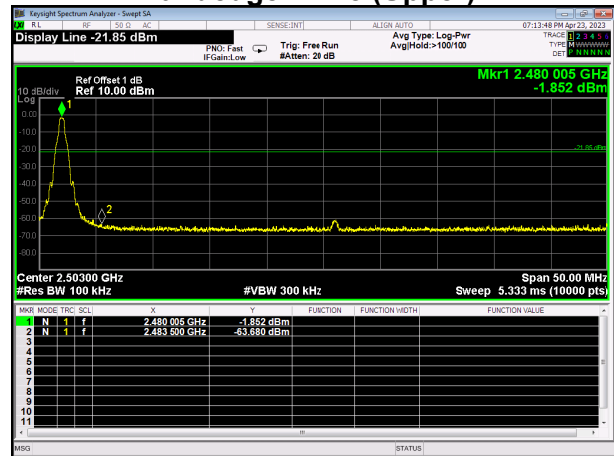

**Bandedge- Hopping on (Lower)**

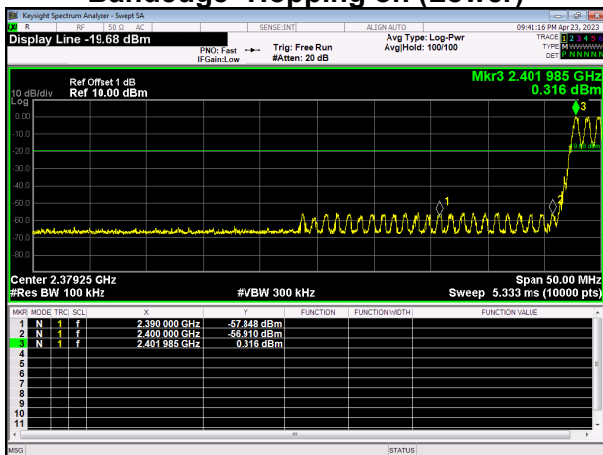


**BandedgeHopping on (Upper)**

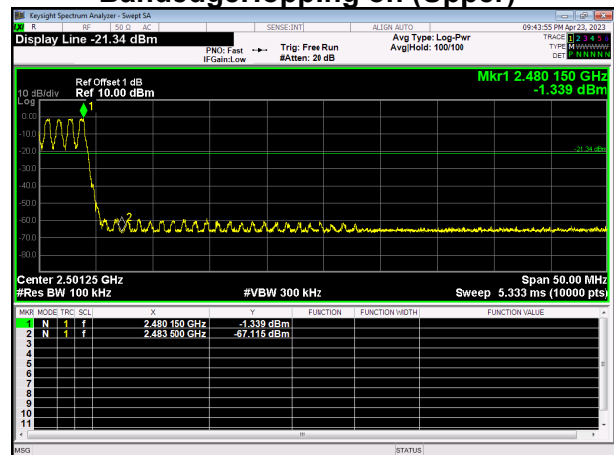


#### 10th Harmonic of the fundamental frequency


**CH00**

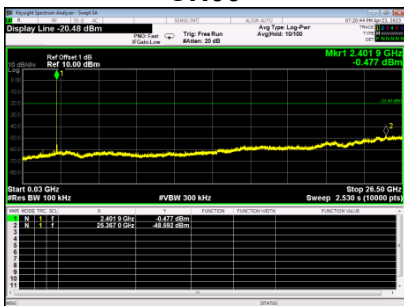

**CH39**

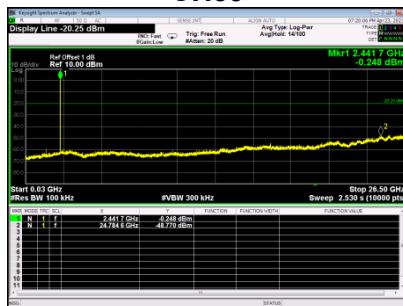


**CH78**

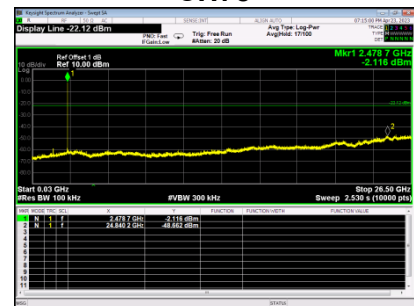


### TX Mode\_3Mbps


**Bandedge- CH00 (Lower)**

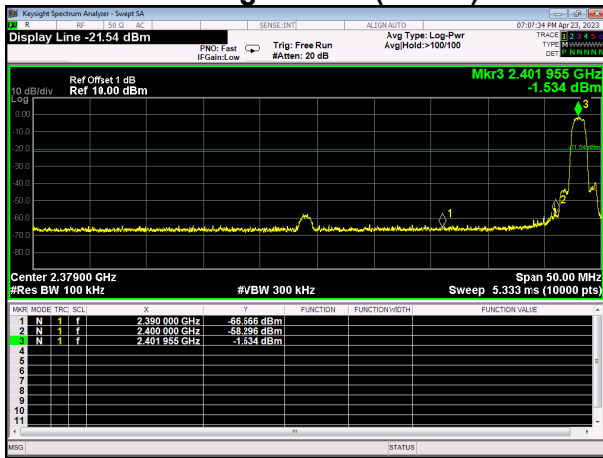


**Bandedge CH78 (Upper)**

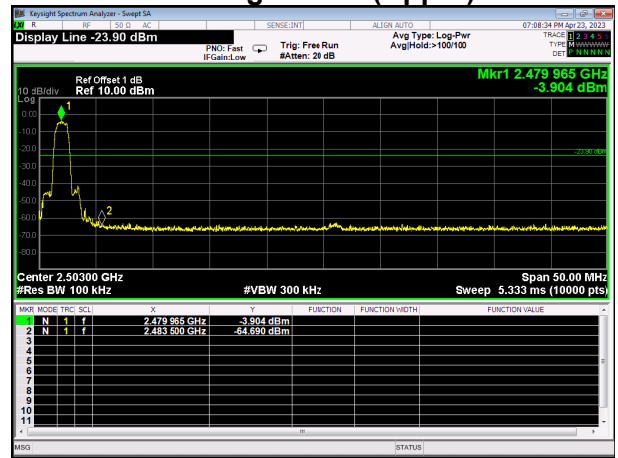

**Bandedge- Hopping on (Lower)**

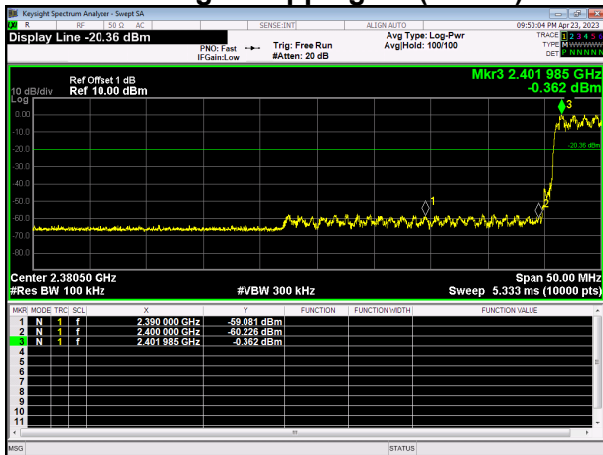

**Bandedge- Hopping on (Upper)**

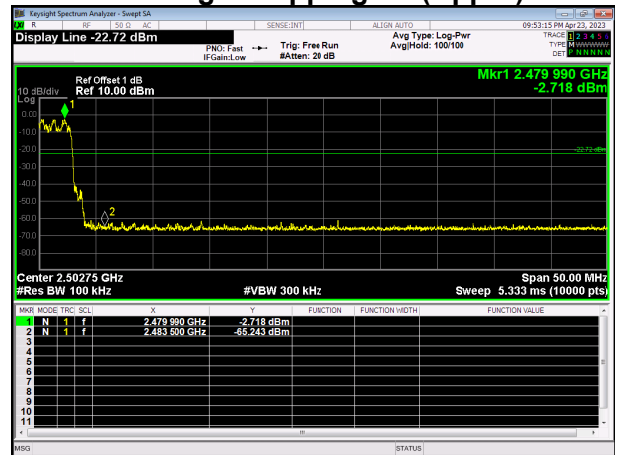


**10th Harmonic of the fundamental frequency**


**CH00**



**CH39**

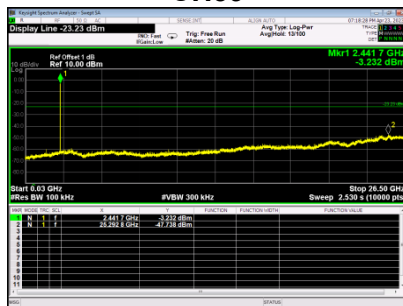

**CH78**

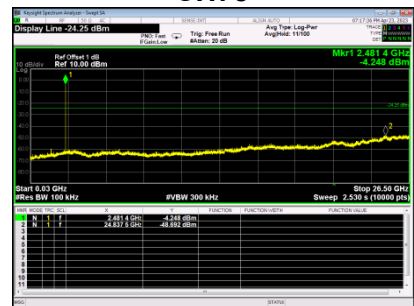

## 12 FREQUENCY STABILITY MEASUREMENT

### 12.1 LIMIT

RSS-Gen			
Section	Test Item	Limit	Frequency Range (MHz)
RSS-Gen 6.11	Frequency Stability	Specified in the user's manual	2402-2480

### 12.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Sweep Time	Auto

### 12.3 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2023/05/26
2	Attenuator	Mini-Circuits	BW-S10W2	101109	N/A
3	RF Cable	Mi-cable	C10-01-01-1	100309	N/A
4	Temperature conditioning	Guan Jian.HTH1000	-20-130°C	GJ1000-10D001	N/A
5	DC Power Supply	G.KE	IPR-10010D	010931954	N/A

### 12.4 TEST SETUP

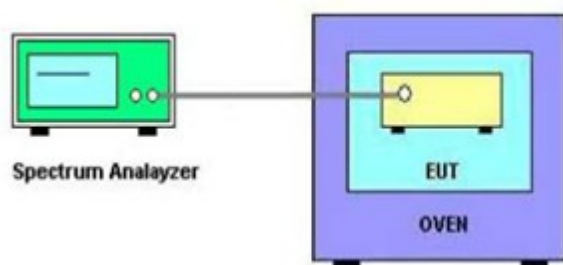

### 12.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

**12.6 TEST RESULTS**

	Temperature vs. Frequency Stability	
Voltage	Temperature	Measurement Frequency (MHz)
3.7V	(°C)	2402
	0	2401.9844
	25	2401.9844
	40	2401.9844
2.9V	25	2401.9844
Max. Deviation (MHz)		-0.0156
Max. Deviation (ppm)		-6.49

Note:2.9V is the end point voltage, and products below 2.9V will cease working.

**END OF TEST REPORT**