

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DECLARATION OF COMPLIANCE - SAR RF EXPOSURE EVALUATION (FCC)

Test Lab Information	Name	CELLTECH LABS INC.			
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
Test Lab Accreditation(s)	A2LA	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)			
Applicant Information	Name	CONTINENTAL WIRELESS, INC.			
	Address	10455 Vista Park, Dallas, TX 75238 United States			
Standards & Procedures Applied	FCC	47 CFR §2.1093	OET Bulletin 65, Supplement C	KDB 447498 D01v04	
	IEEE	1528-2003	IEC	62209-1:2005	
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF) - FCC Part 90			
Device RF Exposure Category	FCC	Occupational / Controlled			
Application Type(s)	FCC	TCB Certification			
Device Identifier(s)	FCC ID:	X63S2500-1			
Device Model(s)	Sentinel 2500				
Date of Sample Receipt	September 07, 2010				
Date(s) of Evaluations	September 28, 2010				
Test Sample Serial No.	407CKF2332G10174 (Identical Prototype)				
Hardware Revision No.	Version P19.001 rev.1				
Firmware Revision No.	Version 1.04				
Device Description	Portable Digital Covert Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range(s)	406.1 - 450.0 MHz (UHF Band)				
Co-located Transmitter(s)	None				
Manufacturer's Max. Output Power	4 Watts (Conducted)				
Manufacturer's Tolerance Spec.	+/- 0 dB				
RF Output Power Level(s) Tested	35.90 dBm	3.89 Watts	406.1 MHz	Average Conducted	
	35.91 dBm	3.90 Watts	417.0 MHz	Average Conducted	
	35.88 dBm	3.87 Watts	418.0 MHz	Average Conducted	
	35.85 dBm	3.85 Watts	428.0 MHz	Average Conducted	
	35.97 dBm	3.95 Watts	430.0 MHz	Average Conducted	
	35.93 dBm	3.92 Watts	439.0 MHz	Average Conducted	
	35.97 dBm	3.95 Watts	450.0 MHz	Average Conducted	
	Dipole (380-430 MHz)	P/N: 1570.B37.005	406-430	Nc = 3	Length: 260 mm
Antenna Type(s) Tested	Dipole (400-450 MHz)	P/N: 1570.B37.006	406-450	Nc = 5	Length: 245 mm
Battery Type(s) Tested	Lithium-ion STP1800	7.4 V	1800 mAh	P/N: 1570.B33.000	
Body-worn Accessories Tested	None (DUT is sold with a vest accessory with no metal and provides 0.5 cm antenna spacing)				
Audio Accessories Tested	Microphone-inductor (connected to Wired RCU and PTT Tail Knob)				P/N: 1570.B48.003
Max. SAR Level(s) Evaluated	Body-worn	7.00 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
FCC/IC Spatial Peak SAR Limit	Head/Body	8.0 W/kg	1g	50% PTT duty cycle	Occupational / Controlled Exp.
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), IEEE Standard 1528-2003 and IEC International Standard 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.</p> <p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p> <p>This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated.</p>					
Test Report Approved By			Sean Johnston	Lab Manager	Celltech Labs Inc.





Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f < 0.5$ GHz)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 NO. OF TEST CHANNELS (N_c)	5
7.0 SAR MEASUREMENT SUMMARY	6
8.0 SAR SCALING (TUNE-UP TOLERANCE)	6
9.0 FLUID DIELECTRIC PARAMETERS	7
10.0 DETAILS OF SAR EVALUATION	8
11.0 SAR EVALUATION PROCEDURES	8
12.0 SYSTEM PERFORMANCE CHECK	9
13.0 SIMULATED EQUIVALENT TISSUES	10
14.0 SAR LIMITS	10
15.0 ROBOT SYSTEM SPECIFICATIONS	11
16.0 PROBE SPECIFICATION (ET3DV6)	12
17.0 BARSKI PLANAR PHANTOM	12
18.0 DEVICE HOLDER	12
19.0 TEST EQUIPMENT LIST	13
20.0 MEASUREMENT UNCERTAINTIES	14
21.0 REFERENCES	15
APPENDIX A - SAR MEASUREMENT DATA	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	26
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	29
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	31
APPENDIX E - DIPOLE CALIBRATION	41
APPENDIX F - PROBE CALIBRATION	42
APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY	43


	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



REVISION HISTORY

REVISION NO.	DESCRIPTION	IMPLEMENTED BY	RELEASE DATE
1.0	Initial Release	Jon Hughes	October 19, 2010

TEST REPORT SIGN-OFF

DEVICE TESTED BY	REPORT PREPARED BY	QA REVIEW BY	REPORT APPROVED BY
Scott Kulifaj	Scott Kulifaj	Jon Hughes	Sean Johnston

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 3 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

1.0 INTRODUCTION

This measurement report demonstrates that the Continental Wireless, Inc. Model: Sentinel 2500 Portable Digital Covert UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements FCC 47 CFR §2.1093 (see reference [1]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [2]), IEEE Standard 1528-2003 (see reference [3]) and IEC Standard 62209-1:2005 (see reference [4]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (joystick), and remote control is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.


3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS



MEASURED RF CONDUCTED OUTPUT POWER LEVELS

Test Frequency	Mode	dBm	Watts	Method
406.1 MHz	CW	35.90	3.89	Average Conducted
417.0 MHz	CW	35.91	3.90	Average Conducted
418.0 MHz	CW	35.88	3.87	Average Conducted
428.0 MHz	CW	35.85	3.85	Average Conducted
430.0 MHz	CW	35.97	3.95	Average Conducted
439.0 MHz	CW	35.93	3.92	Average Conducted
450.0 MHz	CW	35.97	3.95	Average Conducted

Notes

- The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [5]).
- The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector of the radio in accordance with FCC 47 CFR §2.1046 (see reference [9]).

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 43

	Date(s) of Evaluation September 28, 2010	Test Report Serial No. 090710X63-T1043-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date October 19, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ($f \leq 0.5$ GHz)

FCC SAR Evaluation Power Thresholds for PTT Devices, $f \leq 0.5$ GHz ¹			Manufacturer's Rated RF Output Power	
Exposure Conditions	P mW (General Population)	P mW (Occupational)	100% PTT Duty Cycle	50% PTT Duty Cycle
Held to face, $d \geq 2.5$ cm	250	1250	n/a	n/a
Body-worn, $d \geq 1.5$ cm	200	1000		
Body-worn, $d \geq 1.0$ cm*	150	750	4 Watts	2 Watts
1. Per FCC KDB 447498 D01v04 Section 5)b)i) (see reference [5]). 2. The time-averaged output power, corresponding to the required PTT duty factor, is compared with these thresholds. 3. The closest distance between the user and the device or its antenna is used to determine the power thresholds.			1. The conducted output power level of the DUT exceeds the FCC threshold for SAR evaluation requirement.	

* Note: SAR evaluation is also required for smaller separation distances (FCC KDB 447498 Section 5)b)i) - see reference [5]).


5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES



The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within ± 50 MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within ± 100 MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals, ± 25 MHz < 300 MHz and ± 50 MHz ≥ 300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [6]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	± 50 MHz (≥ 300 MHz)
450 MHz	406.1 MHz	43.9 MHz	< 50 MHz
	417.0 MHz	33 MHz	< 50 MHz
	418.0 MHz	32 MHz	< 50 MHz
	428.0 MHz	22 MHz	< 50 MHz
	430.0 MHz	20 MHz	< 50 MHz
	439.0 MHz	11 MHz	< 50 MHz
	450.0 MHz	0 MHz	< 50 MHz
Note: Probe calibration and measurement frequency interval are < 50 MHz; therefore the additional steps were not required.			

6.0 NO. OF TEST CHANNELS (N_c)

Antenna Type & P/N	Antenna Freq. Range	Test Freq. Range	N_c	Test Frequencies
Dipole 1570.B37.005	380 - 430 MHz	406.1 - 430.0 MHz	3	406.1, 418, 430 MHz
Dipole 1570.B37.006	400 - 450 MHz	406.1 - 450.0 MHz	5	406.1, 417, 428, 439, 450 MHz
Note: The number of test channels (N_c) were calculated in accordance with the procedures specified in FCC KDB 447498 Section 6) c) (see reference [5]).				

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 43

	Date(s) of Evaluation September 28, 2010	Test Report Serial No. 090710X63-T1043-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date October 19, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

Test Lab Certificate No. 2470.01

7.0 SAR MEASUREMENT SUMMARY

BODY-WORN SAR EVALUATION RESULTS (UHF Band)

Test Config.	Test Date	Test Freq.	Antenna Test Freq. Range & Part No.	Batt. Type	Accessories		Device Distance to Planar Phantom		Cond. Power Before Test	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
		PTT Duty Cycle								PTT Duty Cycle				
		MHz	MHz		Body	Audio	DUT	ANT.		Watts	100%	50%	dB	100%
BODY	Sept 28	406.1	406.1 - 430.0 1570.B37.005	Li-Ion	none	Mic-Ind & RCU w/ PTT tail knob	Touch	0.5 cm	3.89	10.1	5.05	-0.204	10.6	5.30
	Sept 28	418.0							3.87	11.9	5.95	-0.183	12.4	6.20
	Sept 28	430.0							3.95	13.3	6.65	-0.216	14.0	7.00
	Sept 28	406.1	406.1 - 450.0 1570.B37.006	Li-Ion	none	Mic-Ind & RCU w/ PTT tail knob			3.89	7.54	3.77	-0.202	7.90	3.95
	Sept 28	417.0							3.90	9.53	4.77	-0.190	9.96	4.98
	Sept 28	428.0							3.85	10.1	5.05	-0.185	10.5	5.25
	Sept 28	439.0							3.92	11.9	5.95	-0.036	12.0	6.00
	Sept 28	450.0							3.95	13.8	6.90	0.041	-	-
SAR LIMIT(S)				BODY		SPATIAL PEAK				RF EXPOSURE CATEGORY				
FCC 47 CFR 2.1093				8.0 W/kg		averaged over 1 gram				Occupational / Controlled				

Notes

1. Device Test Mode = CW (Continuous Wave)
2. Phantom Type = Barski Fiberglass Planar
3. Mic-Ind & RCU = Microphone-inductor with Wired Remote Control Manipulator


8.0 SAR SCALING (TUNE-UP TOLERANCE)



SAR LEVELS SCALED TO MAXIMUM TOLERANCE SPECIFICATION

Test Config.	Freq. (MHz)	Antenna Part No.	Ant. Freq. Split MHz	Cond. Power		SAR Level 1g (W/kg)	Scaling to 4 W	Scaled SAR 1g (W/kg)
				W	dBm			
Body-worn	406.1	1570.B37.005	406.1-430.0	3.89	35.9	5.30	+0.1 dB	5.42
	418.0			3.87	35.9	6.20	+0.1 dB	6.34
	430.0			3.95	36.0	7.00	-	-
	406.1	1570.B37.006	406.1-450.0	3.89	35.9	3.95	+0.1 dB	4.04
	417.0			3.90	35.9	4.98	+0.1 dB	5.10
	428.0			3.85	35.9	5.25	+0.1 dB	5.37
	439.0			3.92	35.9	6.00	+0.1 dB	6.14
	450.0			3.95	36.0	6.90	-	-

Notes:

1. The SAR levels reported are based on 50% PTT duty factor with added SAR droop.
2. The scaled SAR levels are below the FCC Occupational SAR Limit of 8.0 W/kg (1g).


Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
Page 6 of 43						




	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

9.0 FLUID DIELECTRIC PARAMETERS

406.1 MHz Body – Sept. 28				417 MHz Body – Sept. 28				418 MHz Body – Sept. 28				428 MHz Body – Sept. 28			
Dielectric Constant ϵ_r				Dielectric Constant ϵ_r				Dielectric Constant ϵ_r				Dielectric Constant ϵ_r			
450 Target	Inter.	Dev.		450 Target	Inter.	Dev.		450 Target	Inter.	Dev.		450 Target	Inter.	Dev.	
56.7	± 5%	59.2	+4.4%	56.7	± 5%	59.0	+4.1%	56.7	± 5%	58.9	+3.9%	56.7	± 5%	58.9	+3.9%
Conductivity σ (mho/m)				Conductivity σ (mho/m)				Conductivity σ (mho/m)				Conductivity σ (mho/m)			
450 Target	Inter.	Dev.		450 Target	Inter.	Dev.		450 Target	Inter.	Dev.		450 Target	Inter.	Dev.	
0.94	± 5%	0.96	+2.0%	0.94	± 5%	0.97	+3.2%	0.94	± 5%	0.97	+3.2%	0.94	± 5%	0.96	+2.0%
430 MHz Body – Sept. 28				439 MHz Body – Sept. 28				450 MHz Body – Sept. 28							
Dielectric Constant ϵ_r				Dielectric Constant ϵ_r				Dielectric Constant ϵ_r							
450 Target	Meas.	Dev.		450 Target	Inter.	Dev.		450 Target	Meas.	Dev.					
56.7	± 5%	59.0	+4.1%	56.7	± 5%	58.3	+2.8%	56.7	± 5%	58.7	+3.5%				
Conductivity σ (mho/m)				Conductivity σ (mho/m)				Conductivity σ (mho/m)							
450 Target	Meas.	Dev.		450 Target	Inter.	Dev.		450 Target	Meas.	Dev.					
0.94	± 5%	0.96	+2.0%	0.94	± 5%	0.97	+3.2%	0.94	± 5%	0.98	+4.3%				

Test Date	Fluid Type	Ambient Temp.	Fluid Temp.	Fluid Depth	Atmospheric Pressure	Relative Humidity	ρ (Kg/m ³)
Sept 28	450 Body	22.0°C	23.0 °C	≥ 15 cm	101.1 kPa	35%	1000

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


Test Lab Certificate No. 2470.01



10.0 DETAILS OF SAR EVALUATION

- The number of test frequencies/channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6)c) (see reference [5]).
- The detailed photographs of the test setup are shown in Appendix D.
- The body-worn SAR evaluations were performed with the DUT (Transmitter) touching the outer surface of the planar phantom. The dipole antenna was positioned simulating the antenna positioning within the vest accessory supplied by the applicant on a low-loss foam base at a distance of 0.5 cm from the outer surface of the planar phantom. The 0.5 cm separation distance from the antenna to the phantom was established based on the 0.5 cm material thickness provided by the vest accessory (supplied to the user with the Sentinel 2500) between the antenna and the user's body (as confirmed by the applicant). The microphone-inductor audio accessory was connected to the extra PTT tail knob and wired RCU; which was connected to the DUT for the duration of the SAR evaluations.
- The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
- The SAR drift of the DUT was measured by the DASY4 system for the duration of the SAR evaluations. The measured SAR drift levels were within 5% from the SAR level at the start of the test. The measured SAR droop was added to the measured SAR levels to report scaled SAR levels as shown in the SAR test data table (see Page 6).
- The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
- The DUT was tested at the maximum conducted output power level preset by the manufacturer in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.

11.0 SAR EVALUATION PROCEDURES

- The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
 - For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
 - Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
 - A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are > 2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 43

	Date(s) of Evaluation September 28, 2010	Test Report Serial No. 090710X63-T1043-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date October 19, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

12.0 SYSTEM PERFORMANCE CHECK


Prior to the SAR evaluations a daily system check was performed with a planar phantom and SPEAG 450 MHz dipole (see Appendix B) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [3]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

SYSTEM PERFORMANCE CHECK EVALUATION

System Performance Check Evaluation																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
	Freq. (MHz)	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.						
Sept 28	Body 450	1.78 ±10%	1.95	+9.6%	56.7 ±5%	58.7	+3.5%	0.94 ±5%	0.98	+4.3%	1000	22.0	23.0	≥ 15	35	101.1

Notes


- The target SAR value is the measured value from the SAR system manufacturer's dipole calibration (see Appendix E).
- The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).
- The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

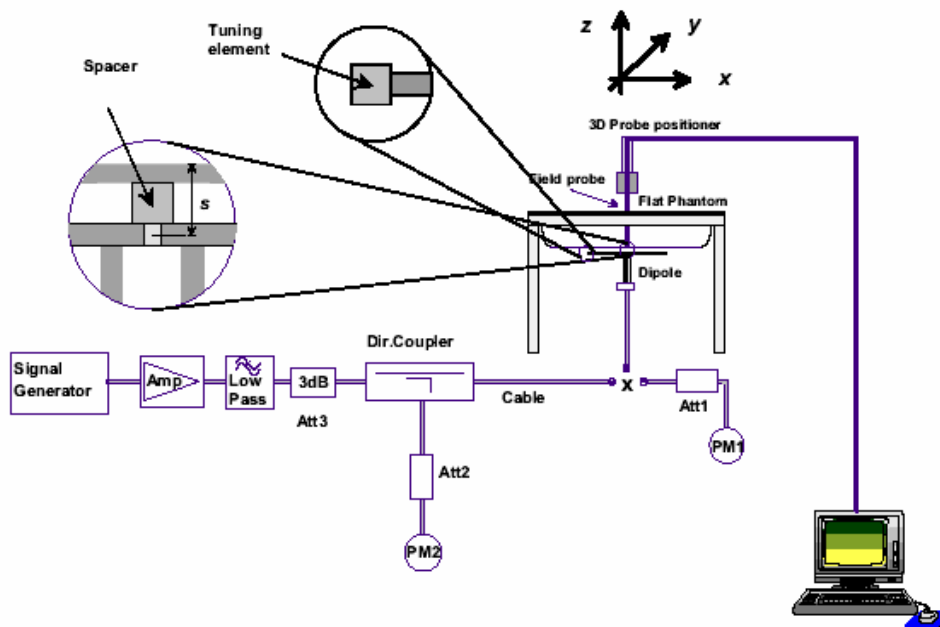



System Performance Check Measurement Setup (IEEE Standard 1528-2003)



SPEAG 450 MHz Validation Dipole Setup

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01


13.0 SIMULATED EQUIVALENT TISSUES




The simulated equivalent tissue recipe in the table below is derived from the SAR system manufacturer's suggested recipe in the DASY4 manual (see reference [7]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [3]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES	
INGREDIENT	450 MHz BODY
Water	52.00 %
Sugar	45.65 %
Salt	1.75 %
HEC	0.50 %
Bactericide	0.10 %

14.0 SAR LIMITS


SAR RF EXPOSURE LIMITS		
FCC 47 CFR 2.1093	General Population	Occupational
Spatial Average (averaged over the whole body)	0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)	1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	
Test Lab Certificate No. 2470.01				


15.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters
<u>Validation Phantom</u>	
Type	Barski Planar Phantom
Shell Material	Fiberglass
Thickness	2.0 ±0.1 mm
Volume	Approx. 70 liters


Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


16.0 PROBE SPECIFICATION (ET3DV6)


Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	ET3DV6 E-Field Probe



17.0 BARSKI PLANAR PHANTOM

<p>The Barski Planar Phantom is a fiberglass shell phantom with a 2.0 mm (± 0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table. The planar phantom was used for the DUT SAR evaluations and the system performance check evaluations. See Appendix G for dimensions and specifications of the Barski Planar Phantom.</p>	
Barski Planar Phantom	

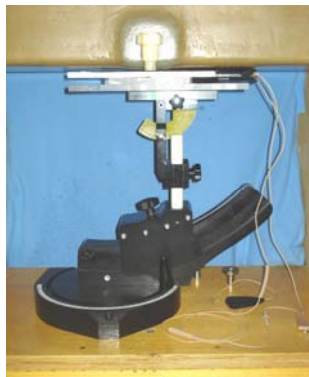18.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluations of larger devices a Plexiglas platform is attached to the device holder.</p>	
Device Holder	


Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 43




	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

19.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION INTERVAL
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	27Apr10	Annual
x	-ET3DV6 E-Field Probe	00017	1590	15Jul10	Annual
x	-SPEAG D450V3 Validation Dipole	00217	1068	18Jan10	Biennial
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
x	Gigatronics 8652A Power Meter	00007	1835272	04May10	Biennial
x	Gigatronics 80701A Power Sensor	00014	1833699	04May10	Biennial
x	HP 8753ET Network Analyzer	00134	US39170292	04May10	Biennial
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 43


	Date(s) of Evaluation September 28, 2010	Test Report Serial No. 090710X63-T1043-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	Test Report Issue Date October 19, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	



20.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION									
Uncertainty Component	IEEE 1528 Section	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value $\pm\%$ (1g)	Uncertainty Value $\pm\%$ (10g)	V_i or V_{eff}
Measurement System									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	4.3	Normal	1	0.64	0.43	2.8	1.8	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	4.4	Normal	1	0.6	0.49	2.6	2.2	∞
Combined Standard Uncertainty			RSS				11.65	11.24	
Expanded Uncertainty (95% Confidence Interval)			k=2				23.29	22.48	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003


This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				
						Page 14 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


21.0 REFERENCES



- [1] Federal Communications Commission - "Radio frequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [3] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [4] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [5] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01 v04: November 2009.
- [6] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [7] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [8] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."
- [9] Federal Communications Commission - "Measurements Required: RF Power Output"; Rule Part 47 CFR §2.1046.

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver			Transmit Freq. Range:	406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.005 (406.1-430.0 MHz) - 406.1 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 406.1 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 406.1 \text{ MHz}$; $\sigma = 0.956 \text{ mho/m}$; $\epsilon_r = 59.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 9.74 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.2 V/m; Power Drift = -0.204 dB



Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) 6.53 mW/g

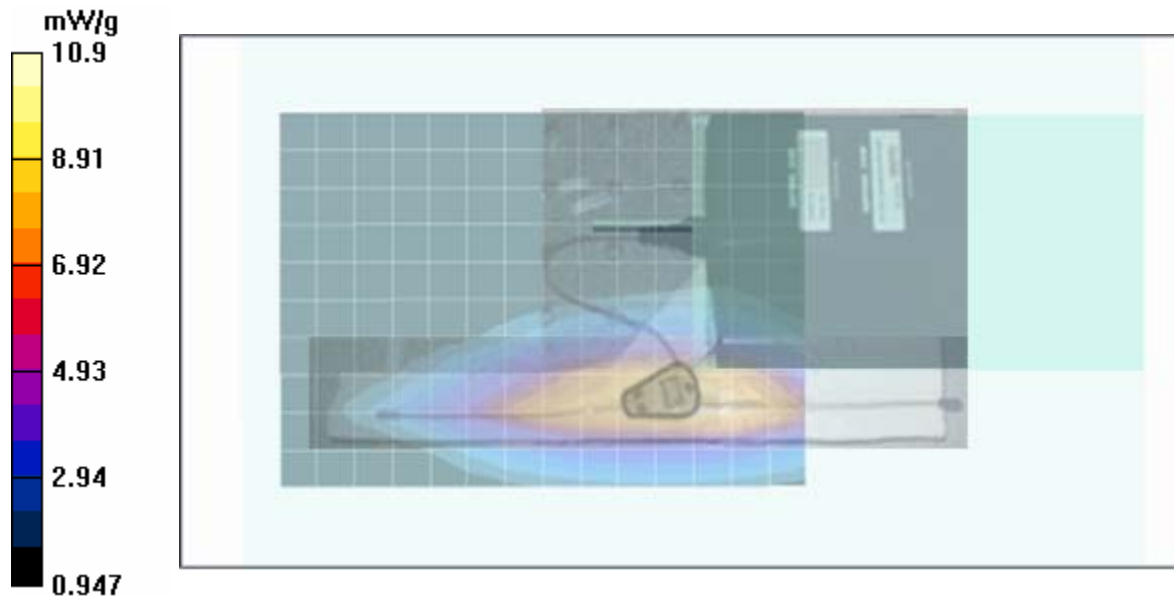Maximum value of SAR (measured) = 10.9 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 43	

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.005 (406.1-430.0 MHz) - 418.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 418.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 418.0 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 58.9$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 11.6 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.1 V/m; Power Drift = -0.183 dB



Peak SAR (extrapolated) = 20.1 W/kg

SAR(1 g) = 11.9 mW/g; SAR(10 g) 7.72 mW/g

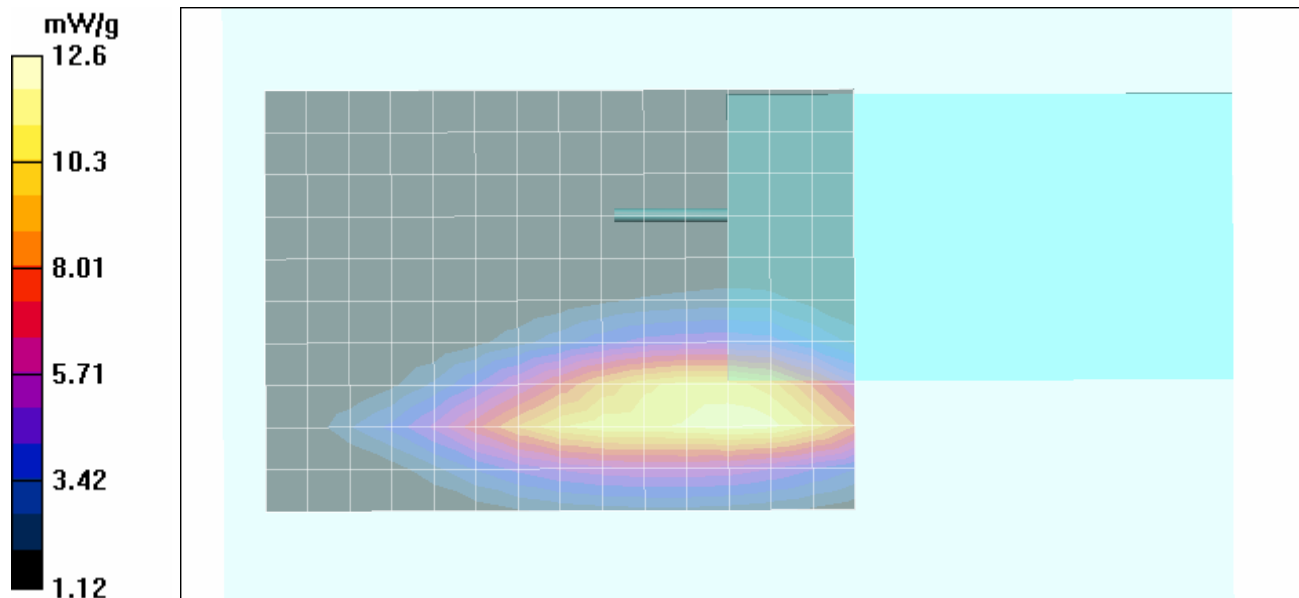Maximum value of SAR (measured) = 12.6 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.005 (406.1-430.0 MHz) - 430.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 430.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 430.0 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 59$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.4 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.5 V/m; Power Drift = -0.216 dB



Peak SAR (extrapolated) = 22.4 W/kg

SAR(1 g) = 13.3 mW/g; SAR(10 g) 8.63 mW/g

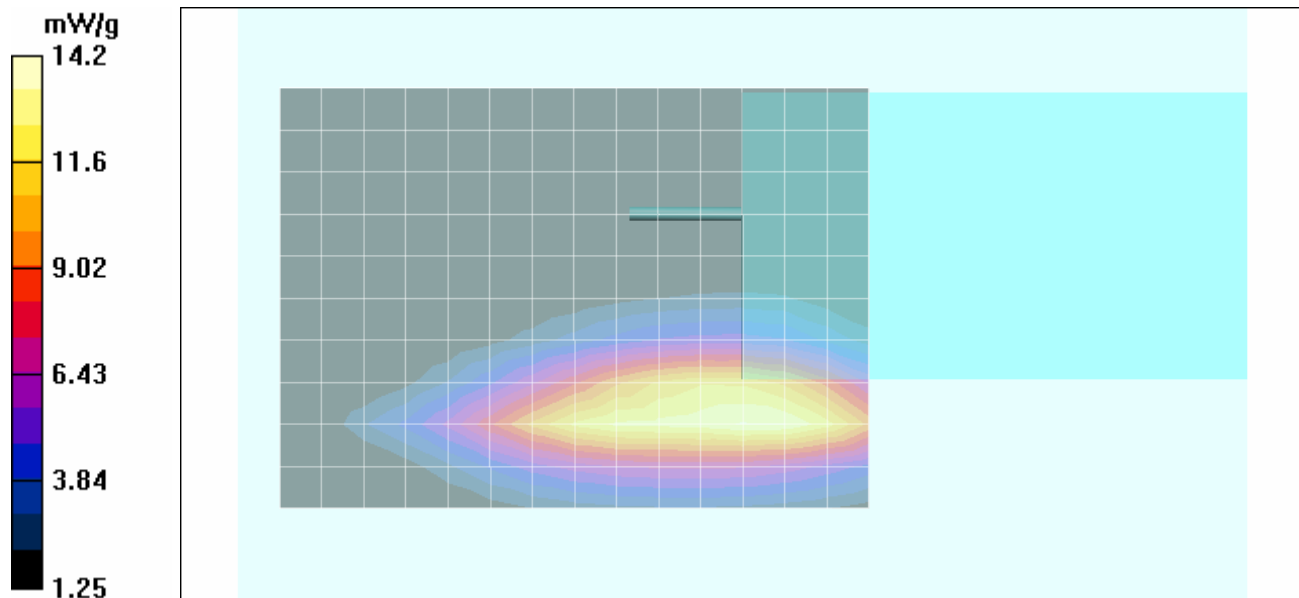
Maximum value of SAR (measured) = 14.2 mW/g






Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

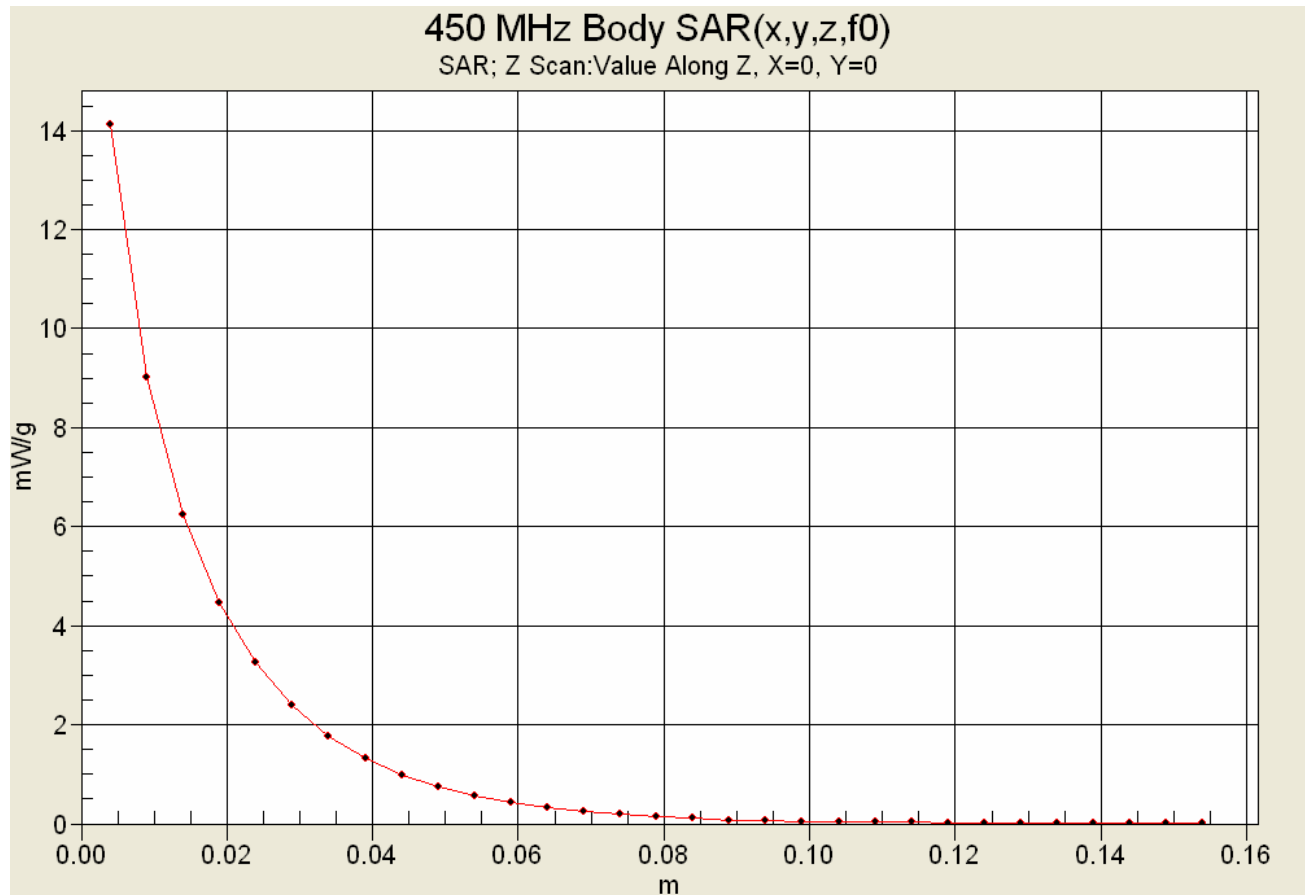Z-Axis Scan



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.006 (406.1-450.0 MHz) - 406.1 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 406.1 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 406.1 \text{ MHz}$; $\sigma = 0.956 \text{ mho/m}$; $\epsilon_r = 59.2$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 8.51 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.7 V/m; Power Drift = -0.202 dB



Peak SAR (extrapolated) = 13.4 W/kg

SAR(1 g) = 7.54 mW/g; SAR(10 g) 4.75 mW/g

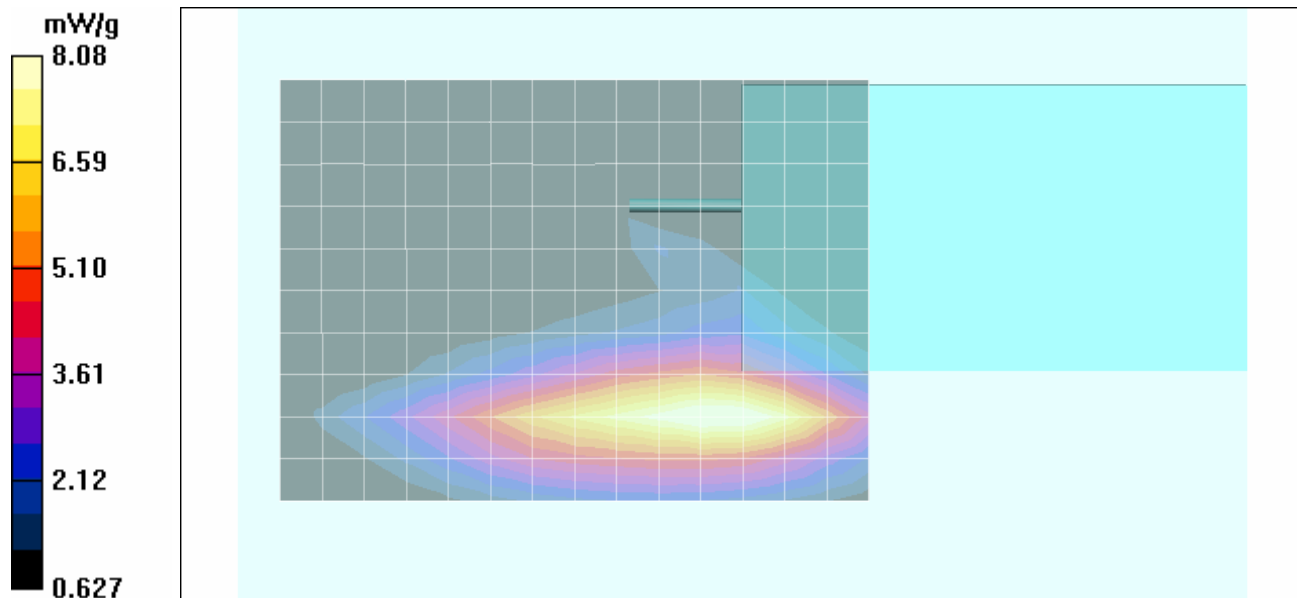Maximum value of SAR (measured) = 8.08 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.006 (406.1-450.0 MHz) - 417.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 417.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 417.0 \text{ MHz}$; $\sigma = 0.967 \text{ mho/m}$; $\epsilon_r = 59$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 9.64 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 15.6 V/m; Power Drift = -0.190 dB



Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.53 mW/g; SAR(10 g) 5.95 mW/g

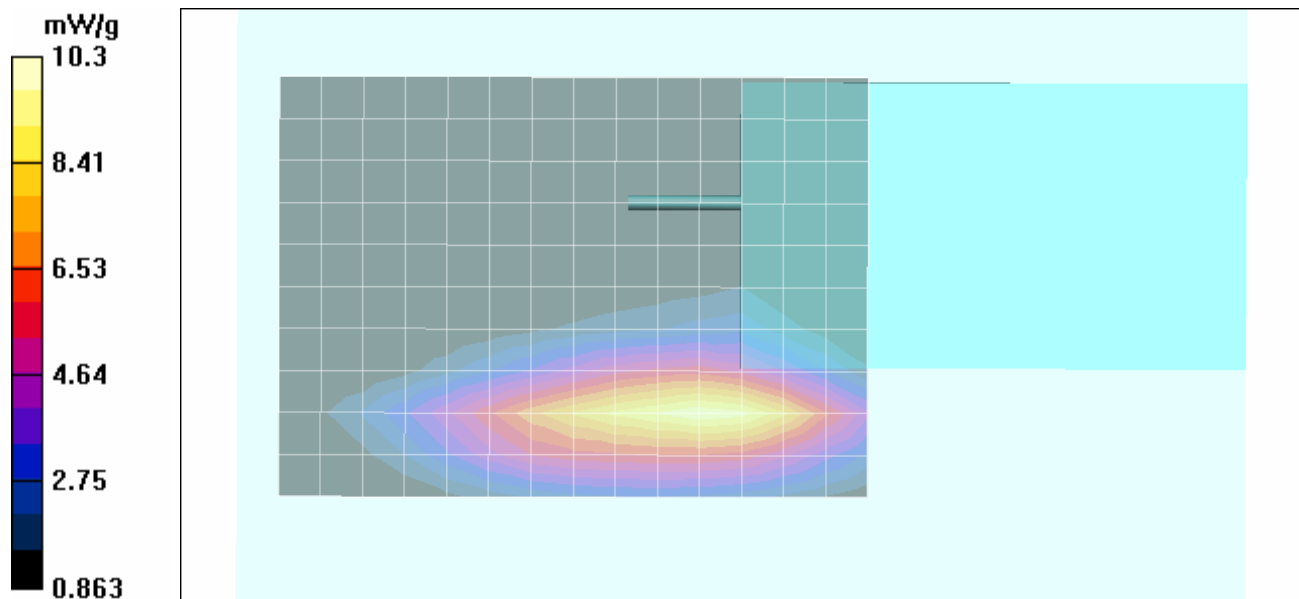Maximum value of SAR (measured) 10.3 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.006 (406.1-450.0 MHz) - 428.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 428.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 428.0$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 58.9$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 10.7 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 14.4 V/m; Power Drift = -0.185 dB



Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) 6.39 mW/g

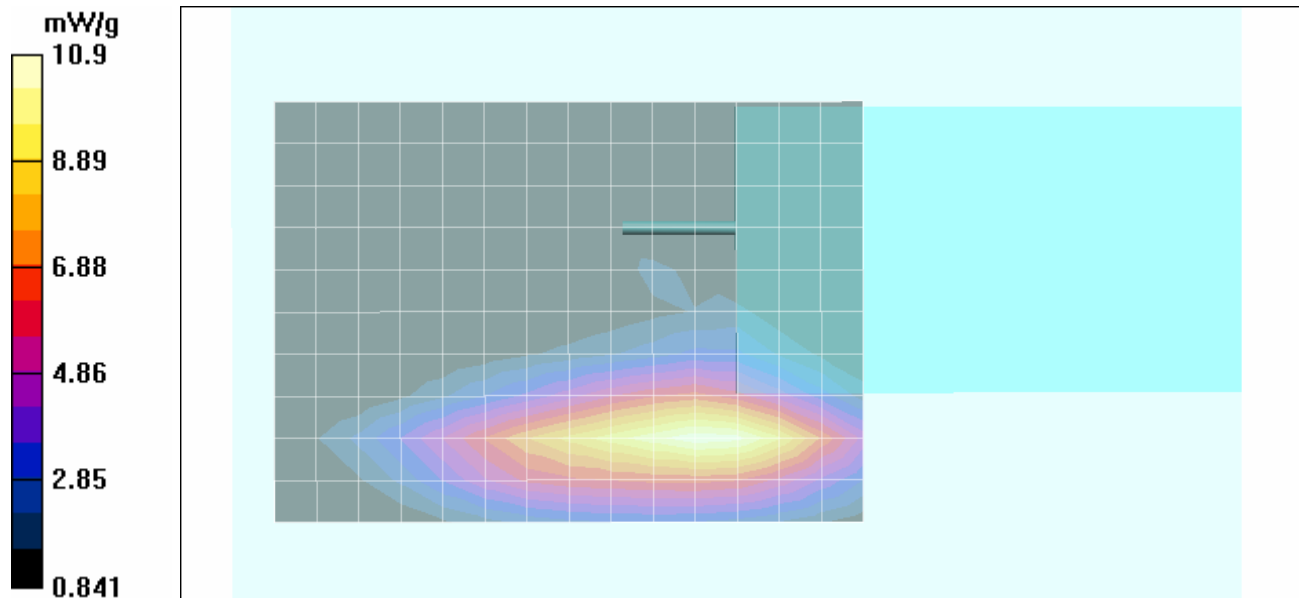Maximum value of SAR (measured) 10.9 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 43	

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.006 (406.1-450.0 MHz) - 439.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 439.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used (interpolated): $f = 439.0$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 58.3$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.3 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.97 V/m; Power Drift = -0.036 dB



Peak SAR (extrapolated) = 20.1 W/kg

SAR(1 g) = 11.9 mW/g; SAR(10 g) 7.74 mW/g

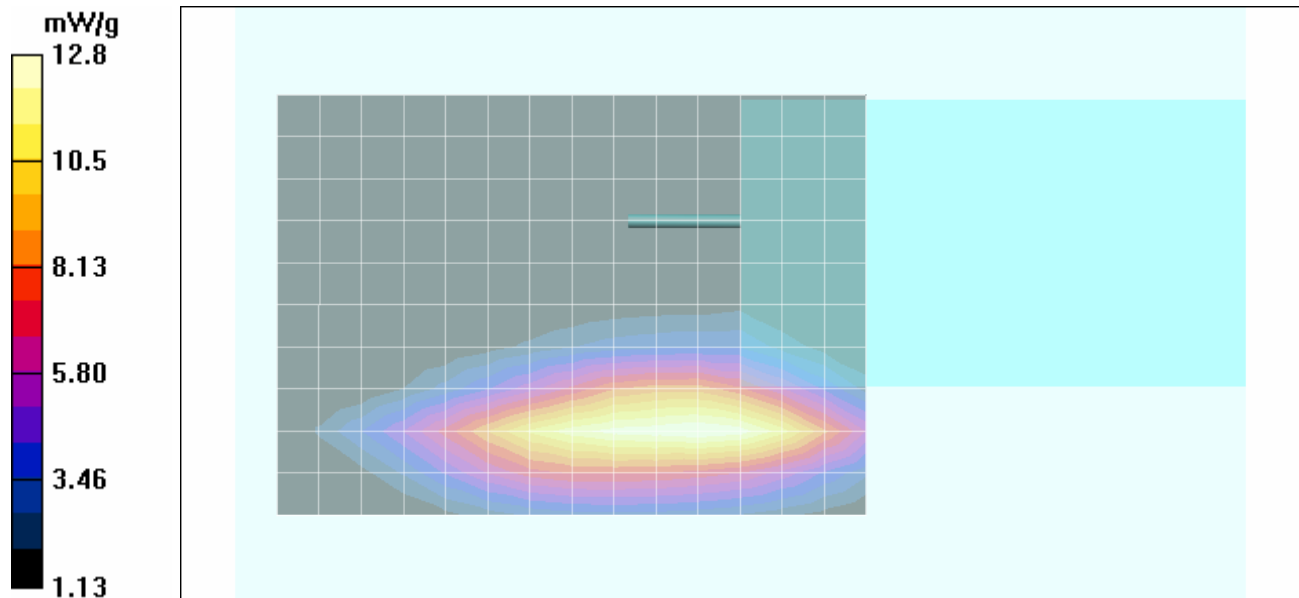Maximum value of SAR (measured) 12.8 mW/g



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 43	

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Date Tested: 09/28/2010

Body-worn SAR - Dipole Antenna P/N: 1570.B37.006 (406.1-450.0 MHz) - 450.0 MHz

DUT: Sentinel 2500; Type: Body-worn UHF PTT Radio Transceiver; Serial: 407CKF2332G10174

Body-worn Accessory: None; Audio Accessory: Microphone-inductor with Wired RCU & PTT Tail Knob

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Frequency: 450.0 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450.0$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 58.7$; $\rho = 1000$ kg/m³

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn SAR - 0.5 cm Antenna Spacing to Planar Phantom (Transmitter Touching Phantom)

Area Scan (11x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 14.6 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 10.2 V/m; Power Drift = 0.041 dB



Peak SAR (extrapolated) = 22.7 W/kg

SAR(1 g) = 13.8 mW/g; SAR(10 g) 9.1 mW/g

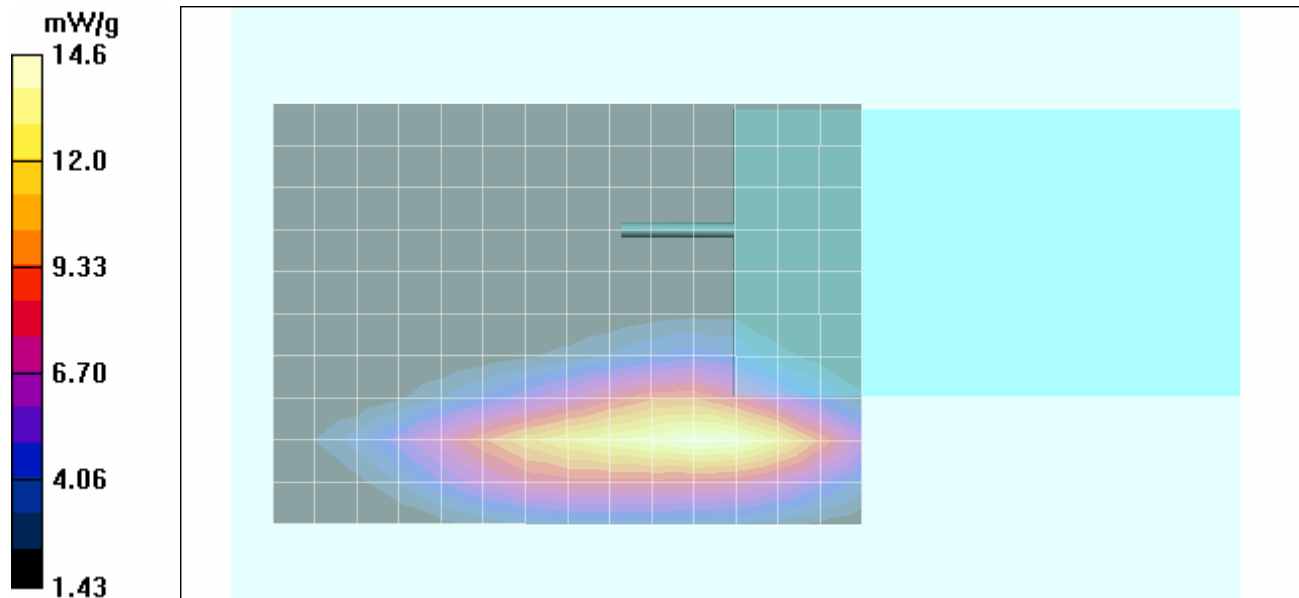
Maximum value of SAR (measured) 14.6 mW/g





Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

Date Tested: 09/28/2010

System Performance Check - 450 MHz Dipole - Body

DUT: Dipole D450V3; Asset: 00217; Serial: 1068; Calibration: 01/18/2010

Ambient Temp: 22.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.98 \text{ mho/m}$; $\epsilon_r = 58.7$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.73, 7.73, 7.73); Calibrated: 15/07/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 27/04/2010
- Phantom: Barski Industries; Type: Fiberglass Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

System Performance Check - 450 MHz Dipole

Head d=15mm Pin=398mW 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.01 mW/g


Head d=15mm Pin=398mW 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 45.1 V/m; Power Drift = 0.036 dB



Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 1.95 mW/g; SAR(10 g) = 1.29 mW/g

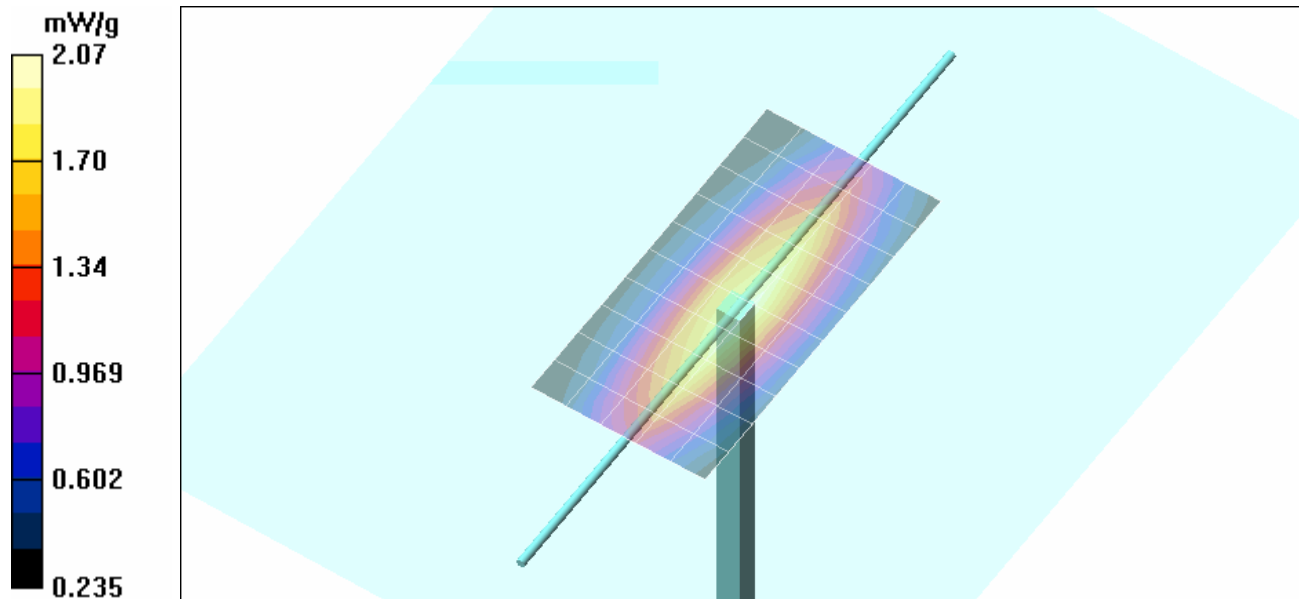
Maximum value of SAR (measured) = 2.07 mW/g






Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

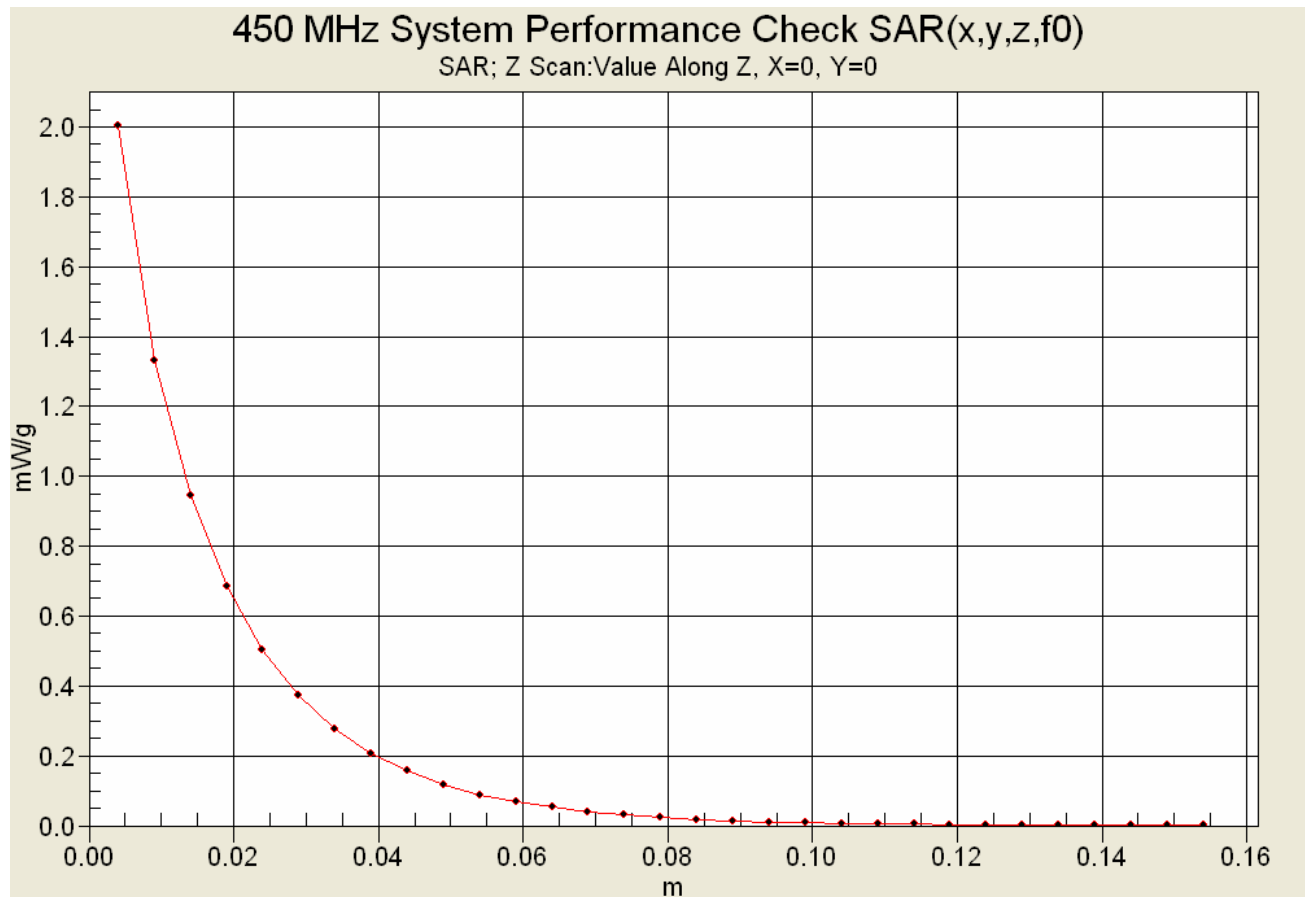
Z-Axis Scan





Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 43


	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



Test Lab Certificate No. 2470.01

450 MHz System Performance Check & DUT Evaluations (Body)


Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
28/Sep/2010
Frequency (GHz)
FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM



Freq	FCC_eHFCC	sHFCC	Test_e	Test_s
0.3500	57.70	0.93	59.75	0.91
0.3600	57.60	0.93	59.32	0.93
0.3700	57.50	0.93	59.56	0.94
0.3800	57.40	0.93	59.28	0.93
0.3900	57.30	0.93	58.94	0.94
0.4000	57.20	0.93	59.40	0.95
0.4100	57.10	0.93	59.11	0.96
0.4200	57.00	0.94	58.90	0.97
0.4300	56.90	0.94	58.95	0.96
0.4400	56.80	0.94	58.23	0.97
0.4500	56.70	0.94	58.67	0.98
0.4600	56.66	0.94	58.05	0.99
0.4700	56.62	0.94	58.66	1.00
0.4800	56.58	0.94	58.37	1.01
0.4900	56.54	0.94	57.82	1.02
0.5000	56.51	0.94	57.96	1.02
0.5100	56.47	0.94	58.11	1.03
0.5200	56.43	0.95	57.54	1.05
0.5300	56.39	0.95	58.01	1.06
0.5400	56.35	0.95	57.51	1.06
0.5500	56.31	0.95	57.41	1.06

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 43


	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS


Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 43



	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

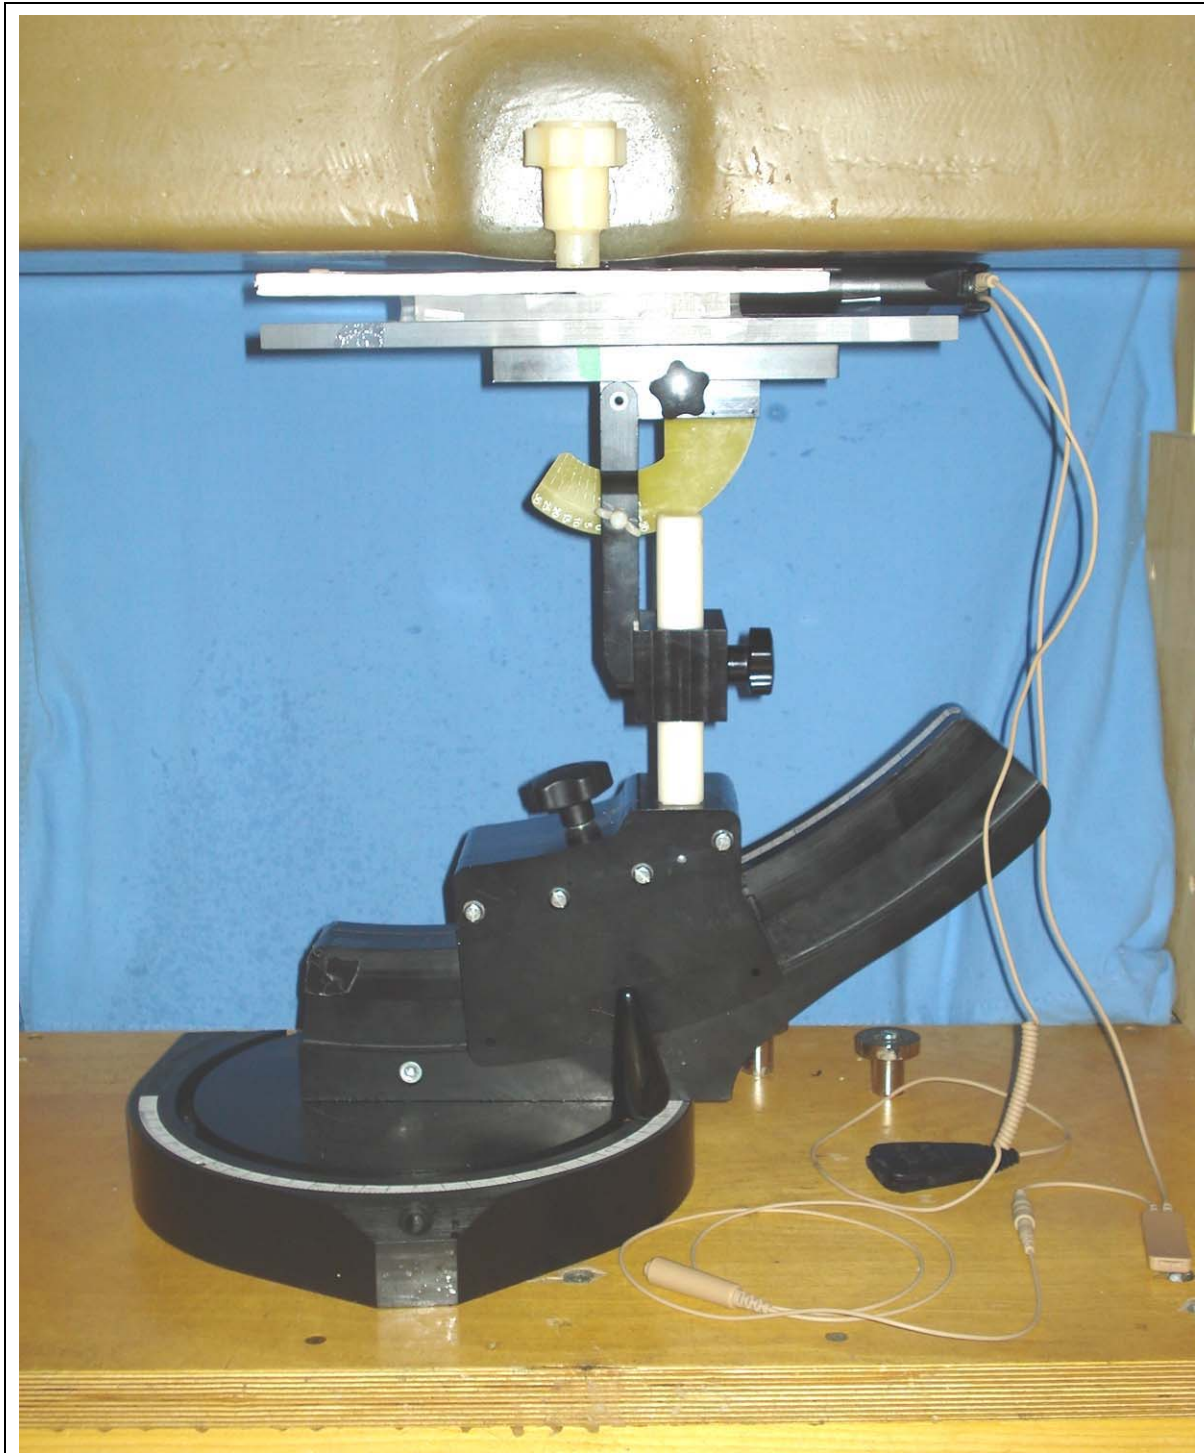BODY-WORN SAR TEST SETUP PHOTOGRAPHS




Body-worn Test Setup Configuration


Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


BODY-WORN SAR TEST SETUP PHOTOGRAPHS

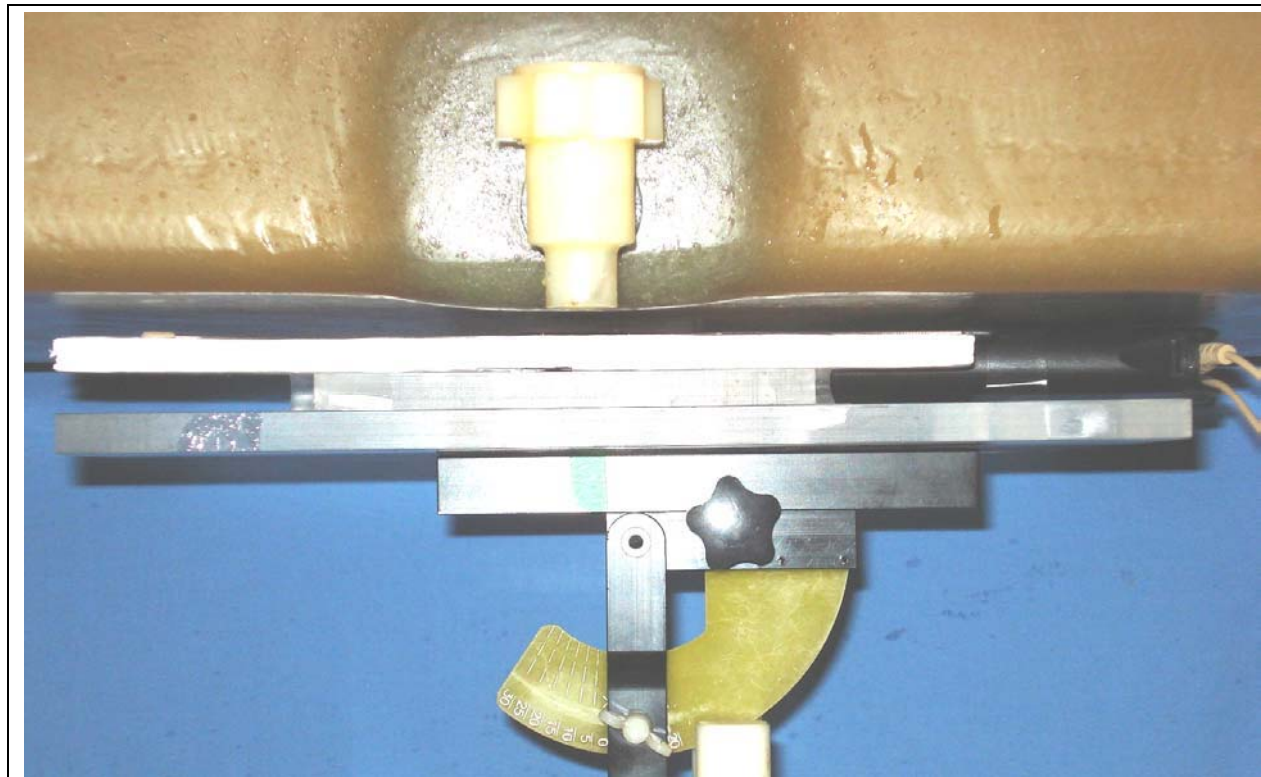

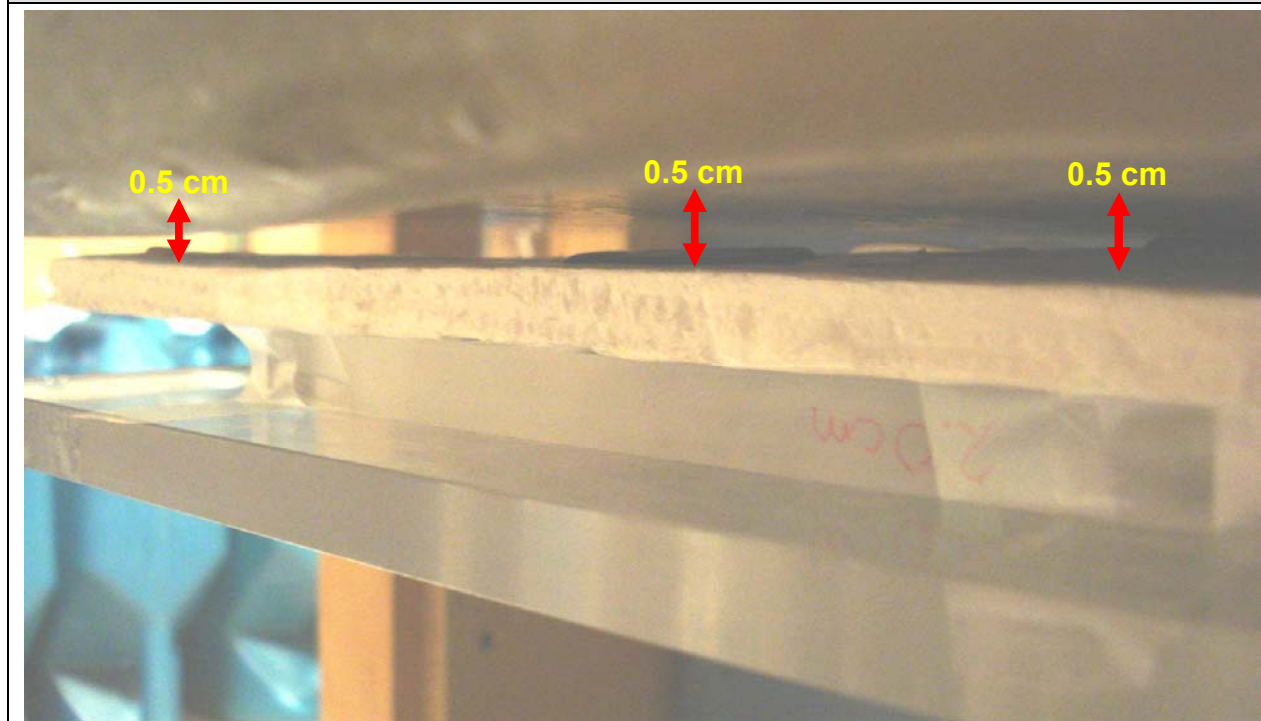

Close-up of Body-worn Test Setup Configuration



0.5 cm Separation Distance between Dipole Antenna and Planar Phantom

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


BODY-WORN SAR TEST SETUP PHOTOGRAPHS





Overview of DUT and Antenna Positioning Under Phantom (Antenna P/N: 1570.B37.005 - 406.1-430 MHz)




Overview of DUT and Antenna Positioning Under Phantom (Antenna P/N: 1570.B37.006 - 406.1-450 MHz)

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 34 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01


DUT PHOTOGRAPHS

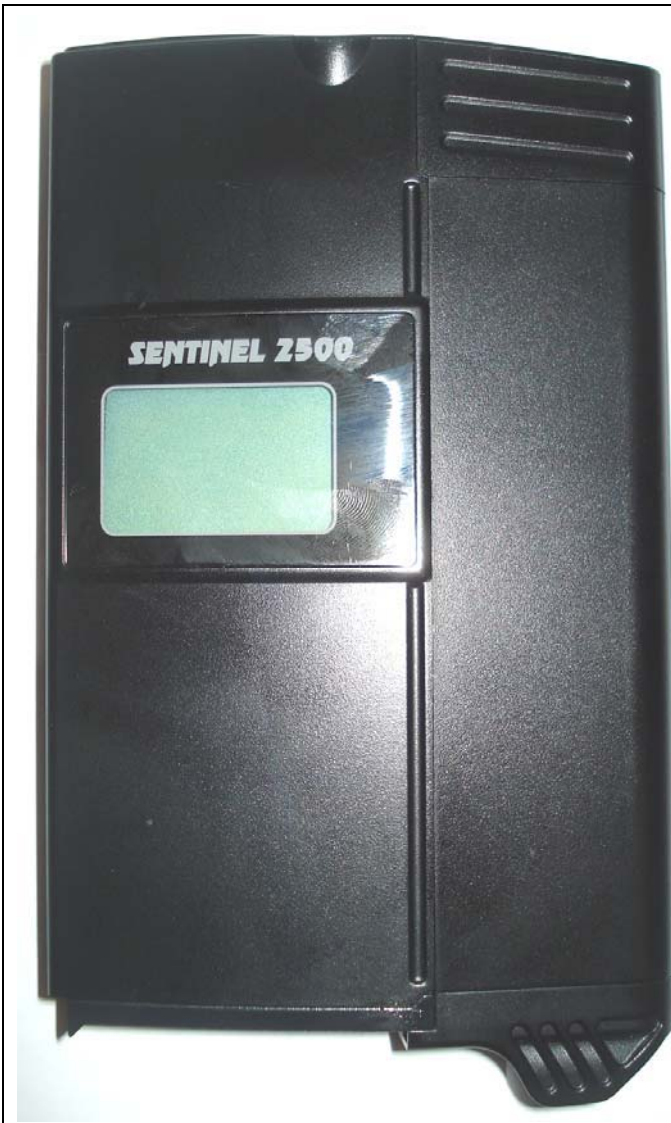



Front of DUT



Back of DUT

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DUT PHOTOGRAPHS



Bottom end of DUT




Top end of DUT





Left Side of DUT



Right Side of DUT

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


DUT PHOTOGRAPHS






Front of DUT with Battery Removed




Front of DUT with Battery and Battery Holder Removed



Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 37 of 43	

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


DUT PHOTOGRAPHS




Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DUT PHOTOGRAPHS

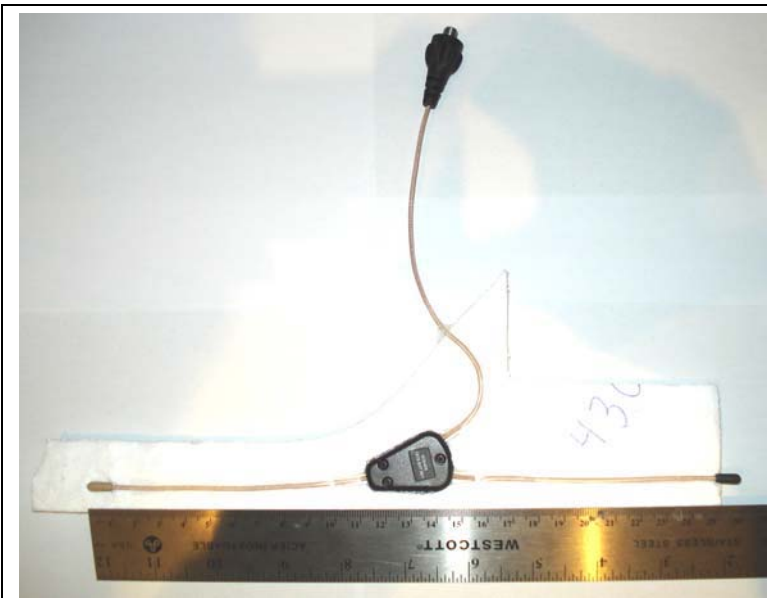


Dipole Antenna P/N: 1570.B37.005 (406.1-430 MHz)

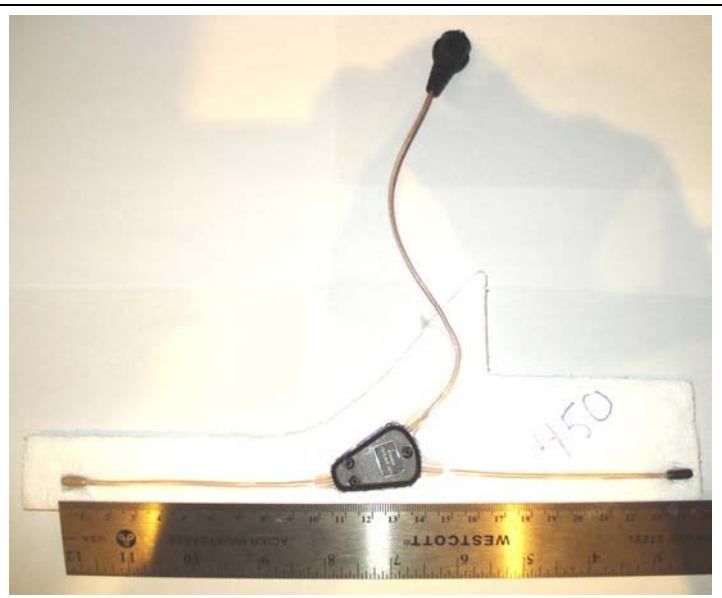



Dipole Antenna P/N: 1570.B37.006 (406.1-450 MHz)



DUT with Dipole Antenna

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DUT PHOTOGRAPHS



Wired Remote Control Manipulator - RCU (P/N: 1570.B34.001)




**Microphone-inductor Unit (P/N: 1570.B48.003)
with Extra PTT Tail Knob (P/N: 1570.B48.004)**





Wired RCU with Microphone-inductor Unit & Extra PTT Tail Knob




Sentinel 2500 with Dipole Antenna and wired accessories

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 43

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX E - DIPOLE CALIBRATION

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver		Transmit Freq. Range:		406.1 - 450.0 MHz	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 43



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **D450V3-1068_Jan10**

CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5**
Calibration Procedure for dipole validation kits below 800 MHz

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** Function: **Laboratory Technician** Signature: *i.v. [Signature]*

Approved by: **Katja Pokovic** Technical Manager *[Signature]*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	ELI4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Area Scan Resolution	dx, dy = 15 mm	
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz \pm 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.87 mho/m
Measured Head TSL parameters	(22.0 \pm 0.2) °C	44.2 \pm 6 %	0.86 mho/m \pm 6 %
Head TSL temperature during test	(22.0 \pm 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	4.76 mW / g \pm 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	3.17 mW / g \pm 17.6 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	56.7	0.94 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	4.58 mW / g ± 18.1 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	3.06 mW / g ± 17.6 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 Ω - 5.9 j Ω
Return Loss	- 21.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 Ω - 9.3 j Ω
Return Loss	- 20.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.86 \text{ mho/m}$; $\epsilon_r = 44.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Head/d=15mm, Pin=398mW/Area Scan (41x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.99 mW/g


Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.2 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g

Maximum value of SAR (measured) = 2 mW/g

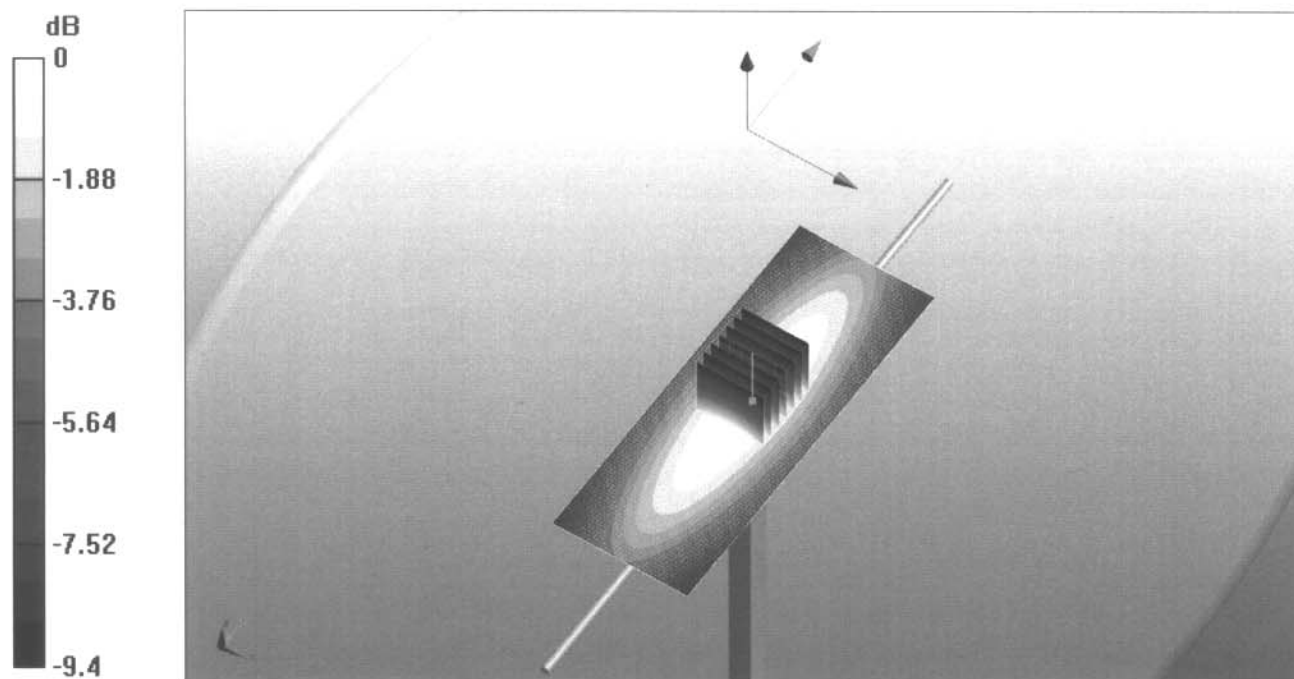

0 dB = 2mW/g

Impedance Measurement Plot for Head TSL

18 Jan 2010 10:25:40
CH1 S11 1 U FS 1: 57.502 Ω -5.9180 Ω 59.763 pF 450.000 000 MHz


*

Del

Cor

Avg
16

↑

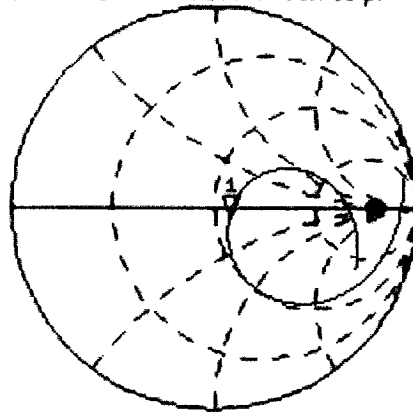


CH2 S11 LOG 5 dB/REF -20 dB 1:-21.035 dB 450.000 000 MHz

Cor

Avg
16

↑

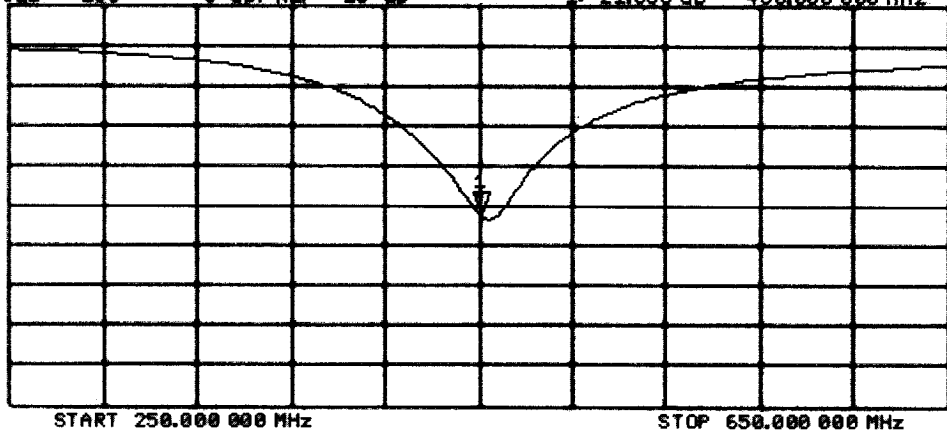

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used: $f = 450$ MHz; $\sigma = 0.9$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Body/d=15mm, Pin=398mW/Area Scan (61x201x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.9 mW/g


Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 2.71 W/kg

SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 1.9 mW/g

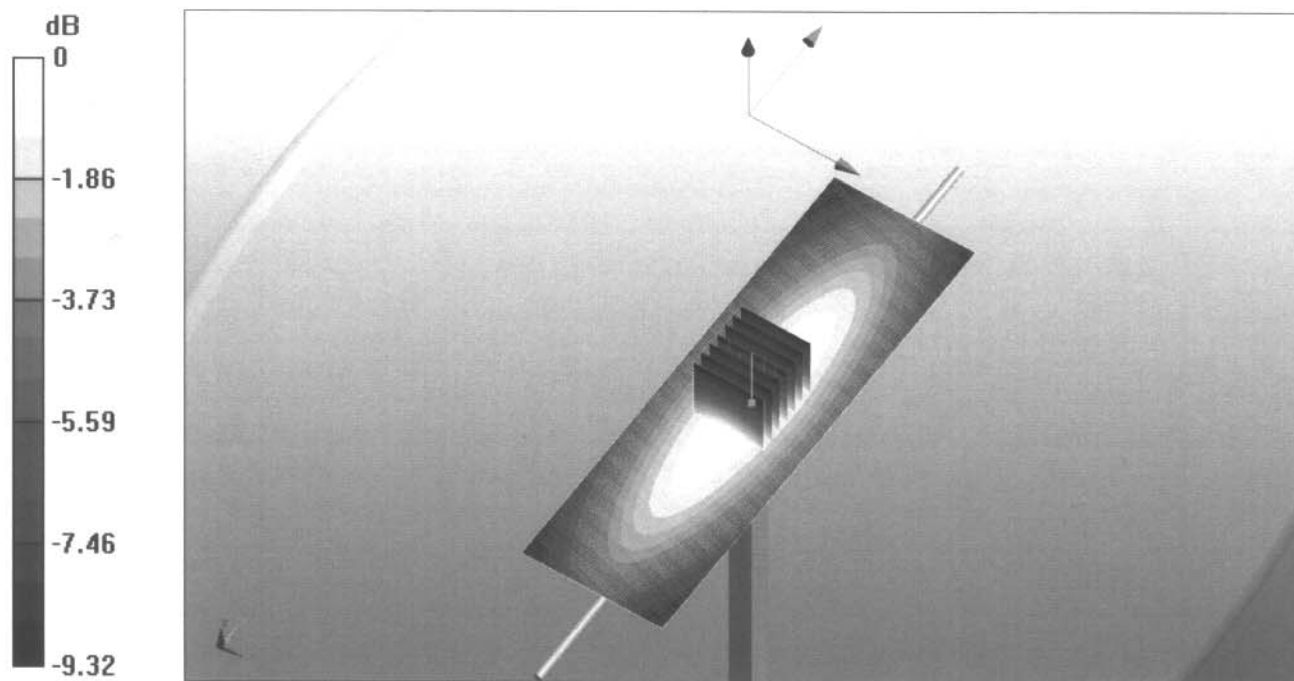


0 dB = 1.9mW/g

Impedance Measurement Plot for Body TSL

18 Jan 2010 12:18:41
CH1 S11 1 U FS 1: 54.824 Ω -9.3047 Ω 38.011 pF 450.000 000 MHz

*
 Del
 Cor

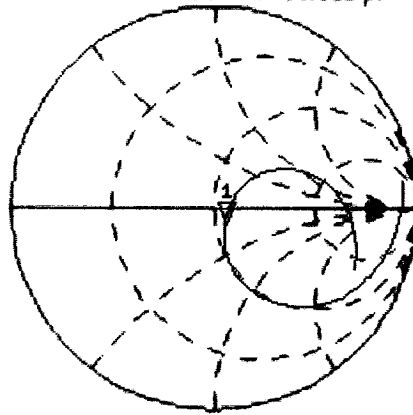

Avg
 16


↑



CH2 S11 L06 5 dB/REF -20 dB 1:-20.034 dB 450.000 000 MHz

Cor


Avg
 16

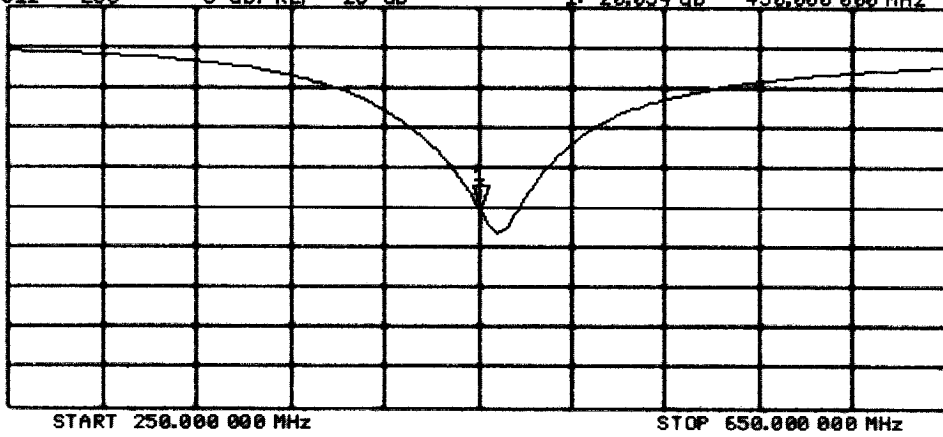↑



	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX F - PROBE CALIBRATION

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 42 of 43



Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Celltech**

Certificate No: **ET3-1590_Jul10**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v6, QA CAL-23.v3 and QA CAL-25.v2**
Calibration procedure for dosimetric E-field probes

Calibration date: **July 15, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	1-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	1-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	20-Apr-10 (No. DAE4-660_Apr10)	Apr-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: July 15, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibrated:	July 16, 2009
Recalibrated:	July 15, 2010

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.86	2.06	1.77	$\pm 10.1\%$
DCP (mV) ^B	91.4	92.4	83.5	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	300.0	$\pm 1.5\%$
			Y	0.00	0.00	1.00	300.0	
			Z	0.00	0.00	1.00	300.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6)

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	43.5 ± 5%	0.87 ± 5%	7.25	7.25	7.25	0.20	2.19 ± 13.3%
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	6.27	6.27	6.27	0.32	2.49 ± 11.0%
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	6.12	6.12	6.12	0.27	2.86 ± 11.0%

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

DASY/EASY - Parameters of Probe: ET3DV6 SN:1590


Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] ^c	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
450	± 50 / ± 100	56.7 ± 5%	0.94 ± 5%	7.73	7.73	7.73	0.13	2.06 ± 13.3%
835	± 50 / ± 100	55.2 ± 5%	0.97 ± 5%	6.33	6.33	6.33	0.22	3.60 ± 11.0%
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	6.15	6.15	6.15	0.28	2.94 ± 11.0%


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Frequency Response of E-Field



(TEM-Cell:ifi110 EXX, Waveguide: R22)

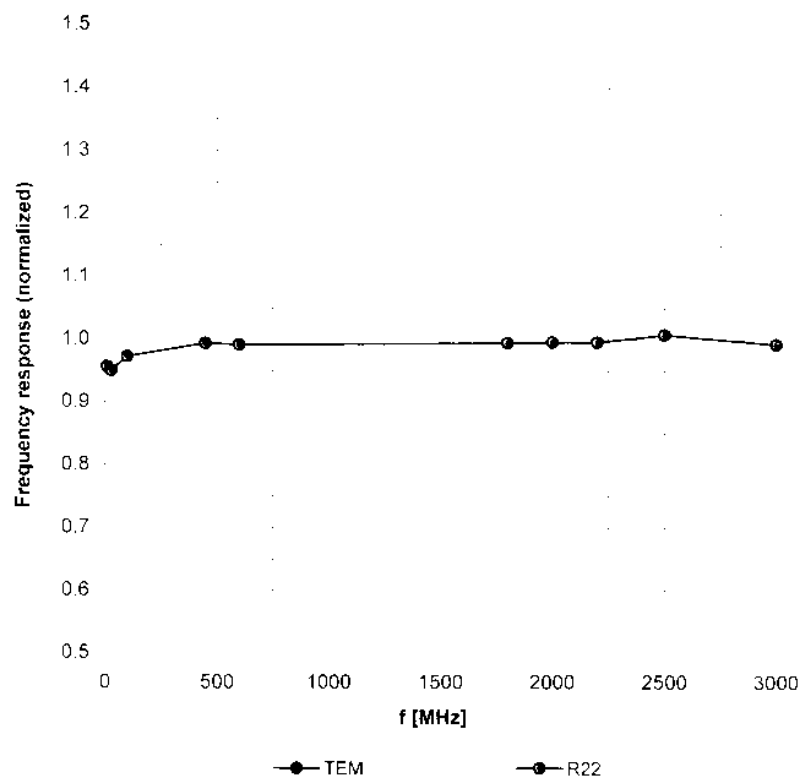

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

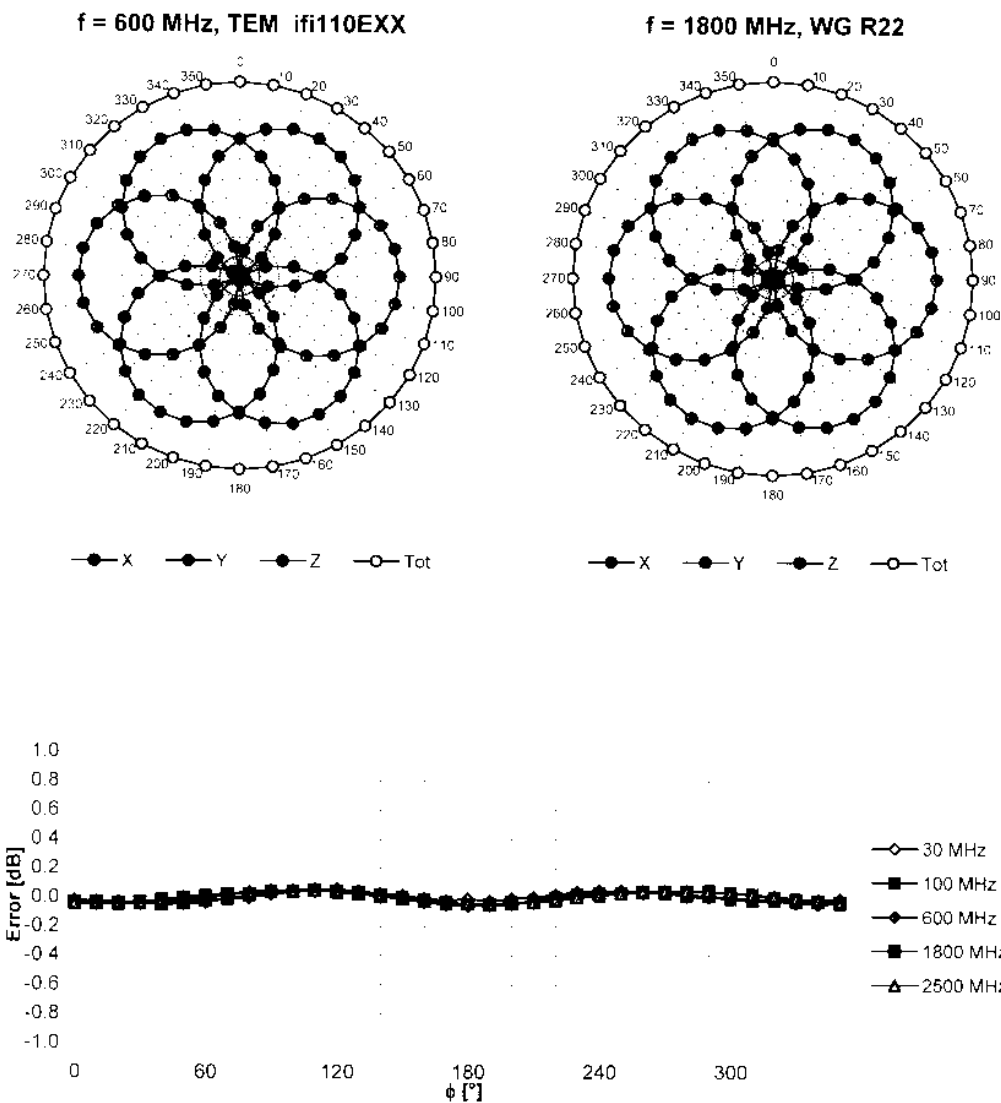
Receiving Pattern (ϕ), $\vartheta = 0^\circ$ Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

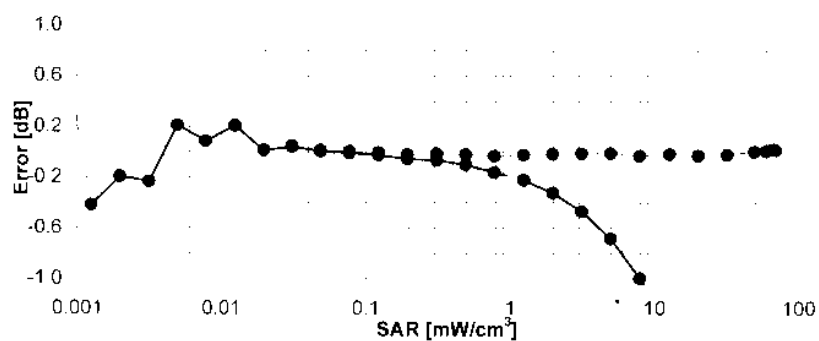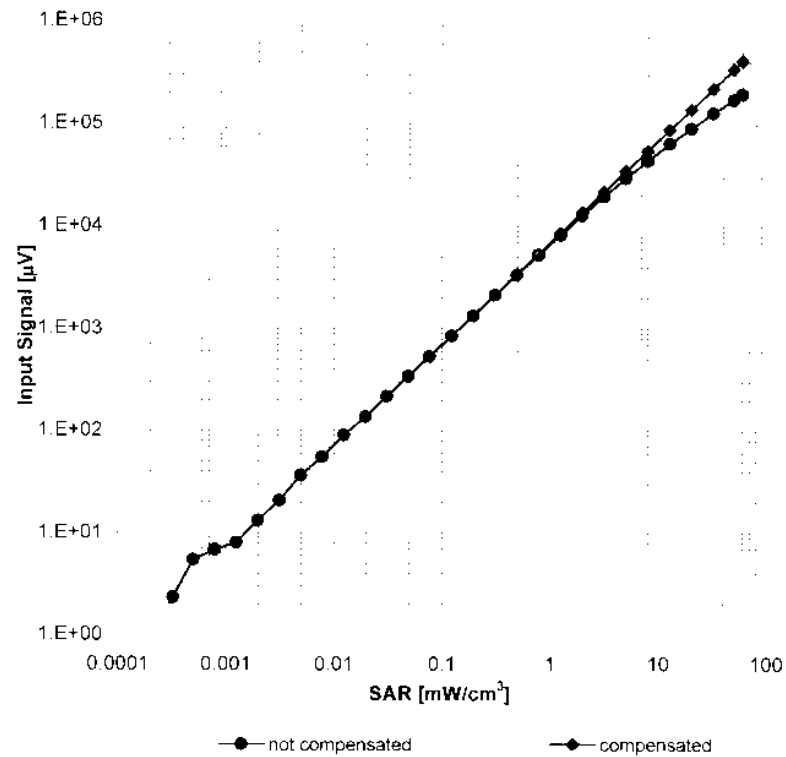


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

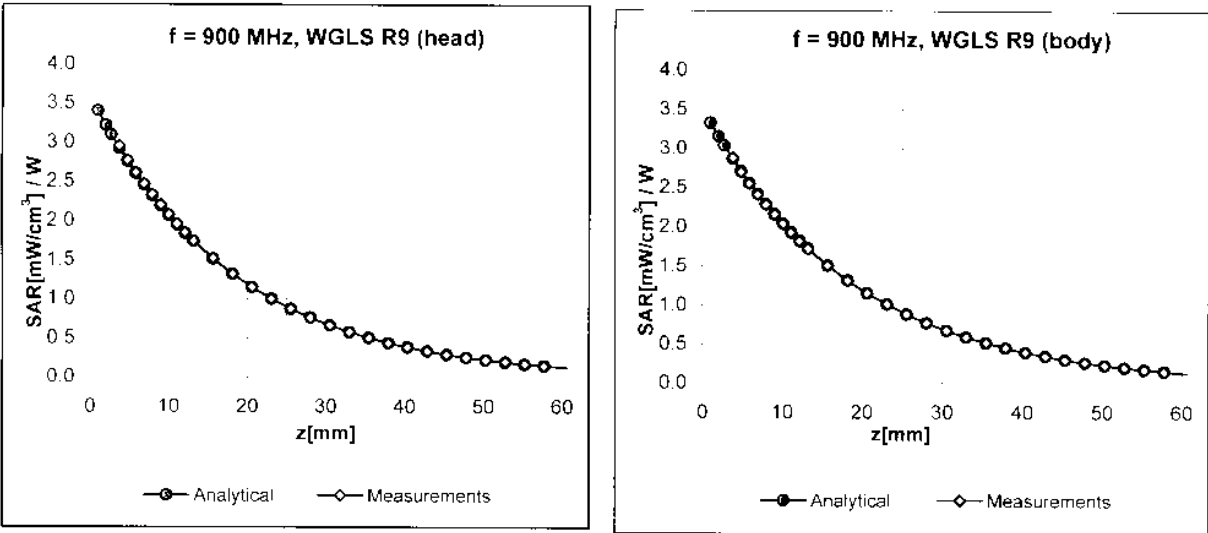

Deviation from Isotropy in HSL

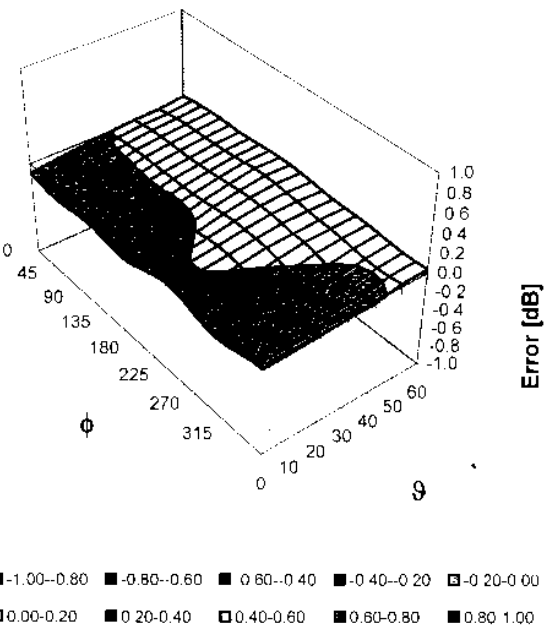

Error (φ, θ), f = 900 MHz




Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	enabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	6.8 mm
Probe Tip to Sensor X Calibration Point	2.7 mm
Probe Tip to Sensor Y Calibration Point	2.7 mm
Probe Tip to Sensor Z Calibration Point	2.7 mm
Recommended Measurement Distance from Surface	4 mm

	<u>Date(s) of Evaluation</u> September 28, 2010	<u>Test Report Serial No.</u> 090710X63-T1043-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> October 19, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX G - BARSKI PLANAR PHANTOM CERTIFICATE OF CONFORMITY

Applicant:	Continental Wireless, Inc.	FCC ID:	X63S2500-1	DUT Model:	Sentinel 2500	
DUT Type:	Portable Digital Covert PTT Radio Transceiver	Transmit Freq. Range:	406.1 - 450.0 MHz			
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 43 of 43

2378 Westlake Road
Kelowna, B.C. Canada
V1Z-2V2



Ph. # 250-769-6848
Fax # 250-769-6334
E-mail: barskiind@shaw.ca
Web: www.bcfiberglass.com

FIBERGLASS FABRICATORS

Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01
Date: June 16, 2003
Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity<5 Loss Tangent<0.05

Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: _____

A handwritten signature in black ink, appearing to read 'Daniel Chailier', is written over a horizontal line.

Daniel Chailier



Fiberglass Planar Phantom - Top View



Fiberglass Planar Phantom - Front View




Fiberglass Planar Phantom - Back View



Fiberglass Planar Phantom - Bottom View

Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

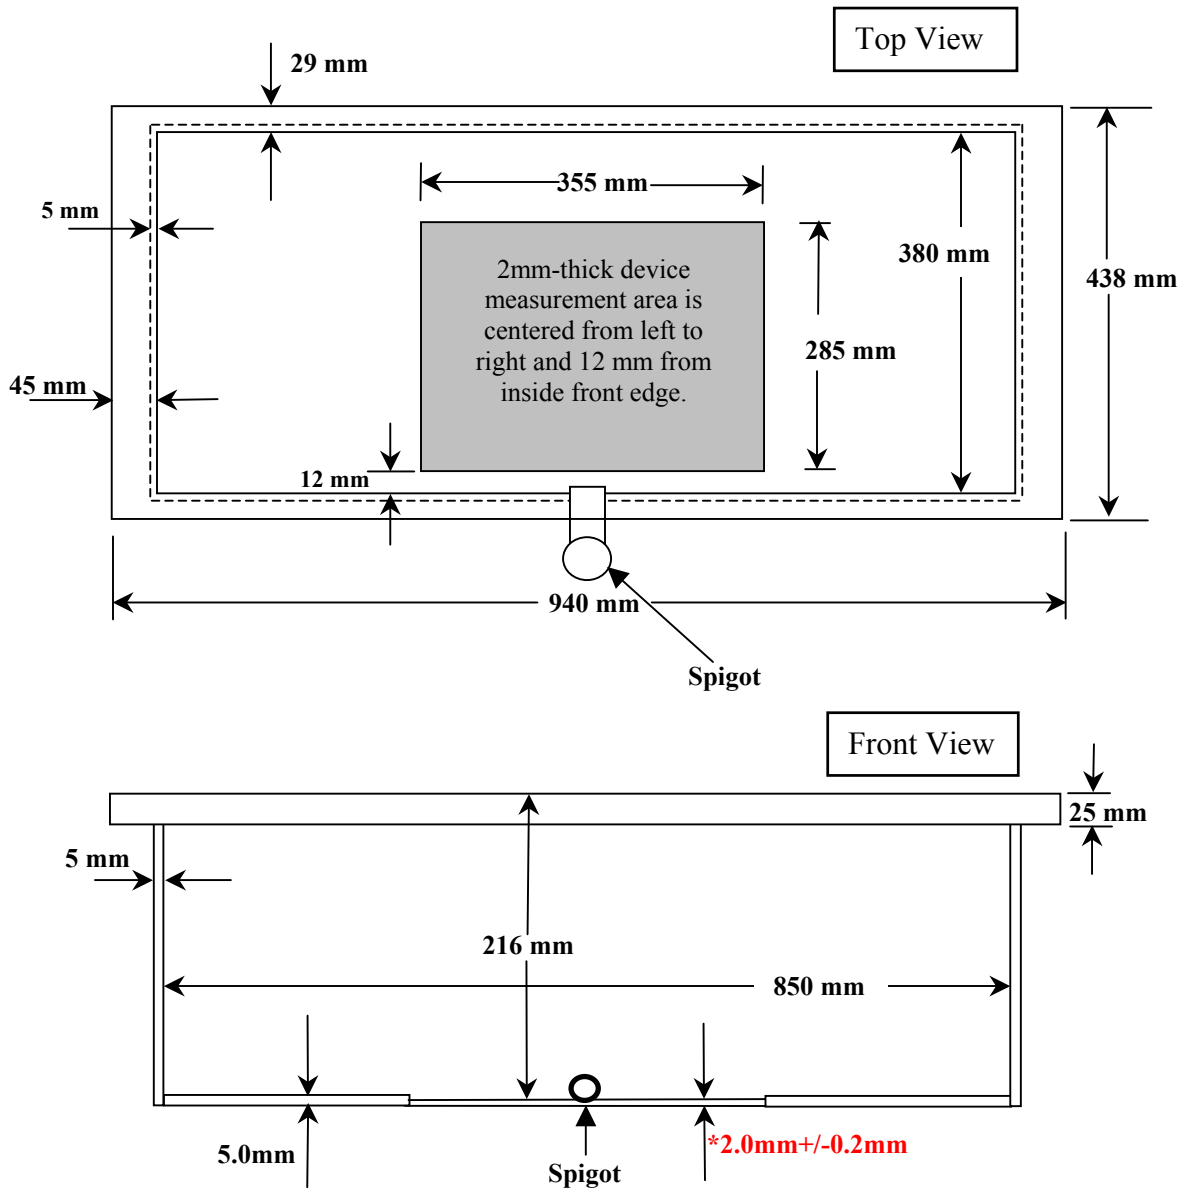

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.
This drawing is not to scale.**